

FCC Part 15C Measurement and Test Report

For

Acrox Technologies Co., Ltd.

4F., No.89, Minshan St., Neihu Dist., Taipei City 114, Taiwan, R. O. C

FCC ID: PRDRX0L

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>2.4GHz Wireless Receiver</u>
Tested Model:	<u>MRL</u>
Report No.:	<u>STR18058243I</u>
Sample Receipt Date:	<u>2018-05-24</u>
Tested Date:	<u>2018-05-25 to 2018-05-31</u>
Issued Date:	<u>2018-06-05</u>
Tested By:	<u>Ray Yang / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Ray Yang

Silin Chen

Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS.....	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS.....	11
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	11
5. OUT OF BAND EMISSIONS.....	20
5.1 STANDARD APPLICABLE.....	20
5.2 TEST PROCEDURE.....	20
5.3 ENVIRONMENTAL CONDITIONS.....	20
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	20
6. EMISSION BANDWIDTH.....	23
6.1 STANDARD APPLICABLE.....	23
6.2 TEST PROCEDURE.....	23
6.3 ENVIRONMENTAL CONDITIONS.....	23
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	23
7. CONDUCTED EMISSIONS.....	26
7.1 TEST PROCEDURE.....	26
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	26
7.3 ENVIRONMENTAL CONDITIONS.....	26
7.4 TEST RECEIVER SETUP.....	27
7.5 SUMMARY OF TEST RESULTS/PLOTS.....	27
7.6 CONDUCTED EMISSIONS TEST DATA.....	27

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Acrox Technologies Co., Ltd.
Address of applicant: 4F., No.89, Minshan St., Neihu Dist., Taipei City 114,
Taiwan, R.O.C

Manufacturer: Acrox Technologies Co., Ltd.
Address of manufacturer: Hsinmin Industria, Changan Town, Dongguan City,
Guangdong, China

General Description of EUT	
Product Name:	2.4GHz Wireless Receiver
Trade Name:	Klip/ACROX
Model No.:	MRL
Adding Model(s):	KPS-010R
Rated Voltage:	USB DC 5V
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MRL, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2408-2474MHz
Max. Field Strength:	83.61 dBuV/m
Modulation:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi
Lowest Internal Frequency of EUT:	12MHz

1.2 Test Standards

The following report is prepared on behalf of the Acrox Technologies Co., Ltd. in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2408MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2474MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
PC	Lenovo	E445	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

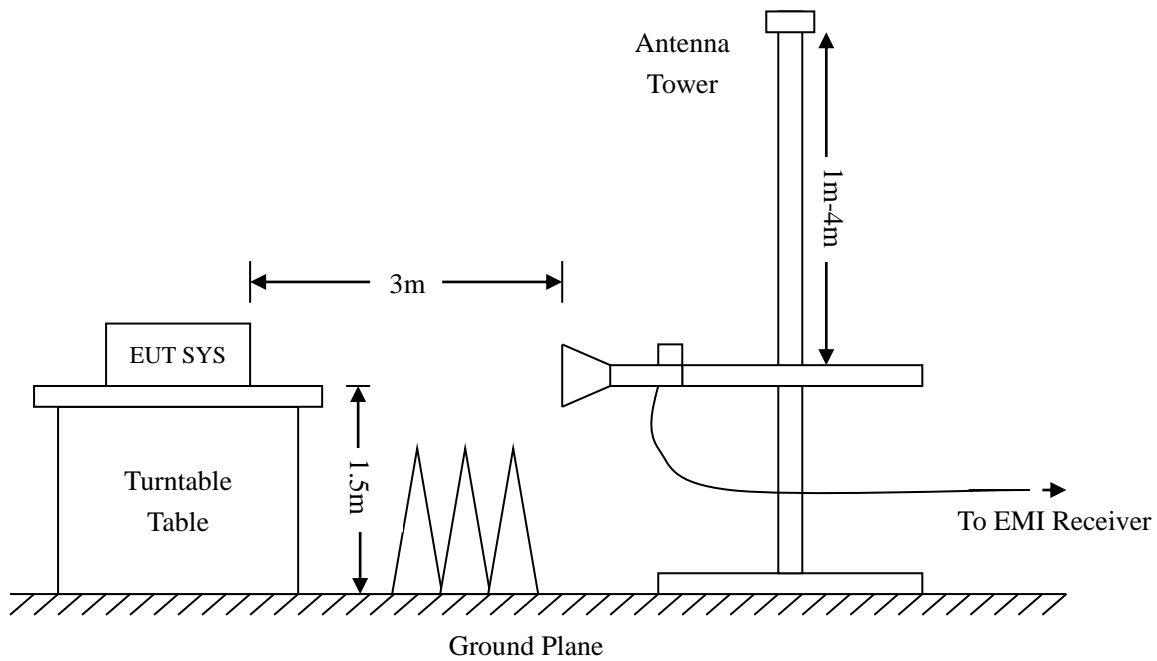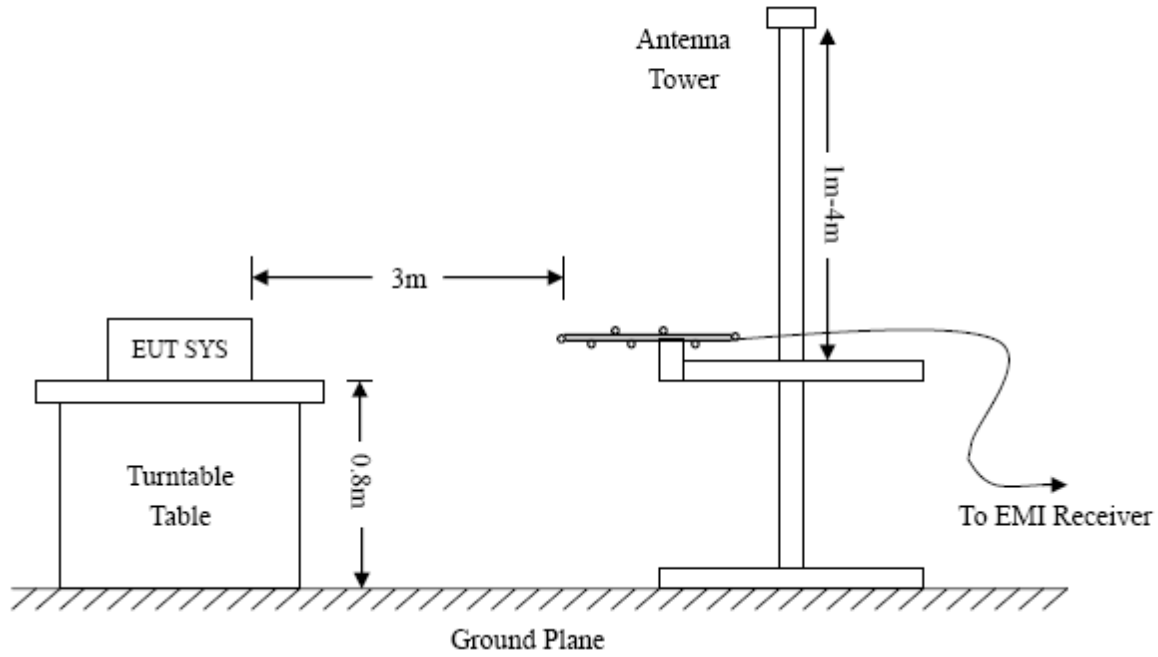

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:


-7.41 dB at 526.3967 MHz in the Vertical polarization, Low Channel, 9 kHz to 25 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: 2.4GHz Wireless Receiver
 Tested Model: MRL
 Operating Condition: Transmitting Low Channel (2408MHz)
 Comment: AC120V 60Hz

Test Specification: Horizontal

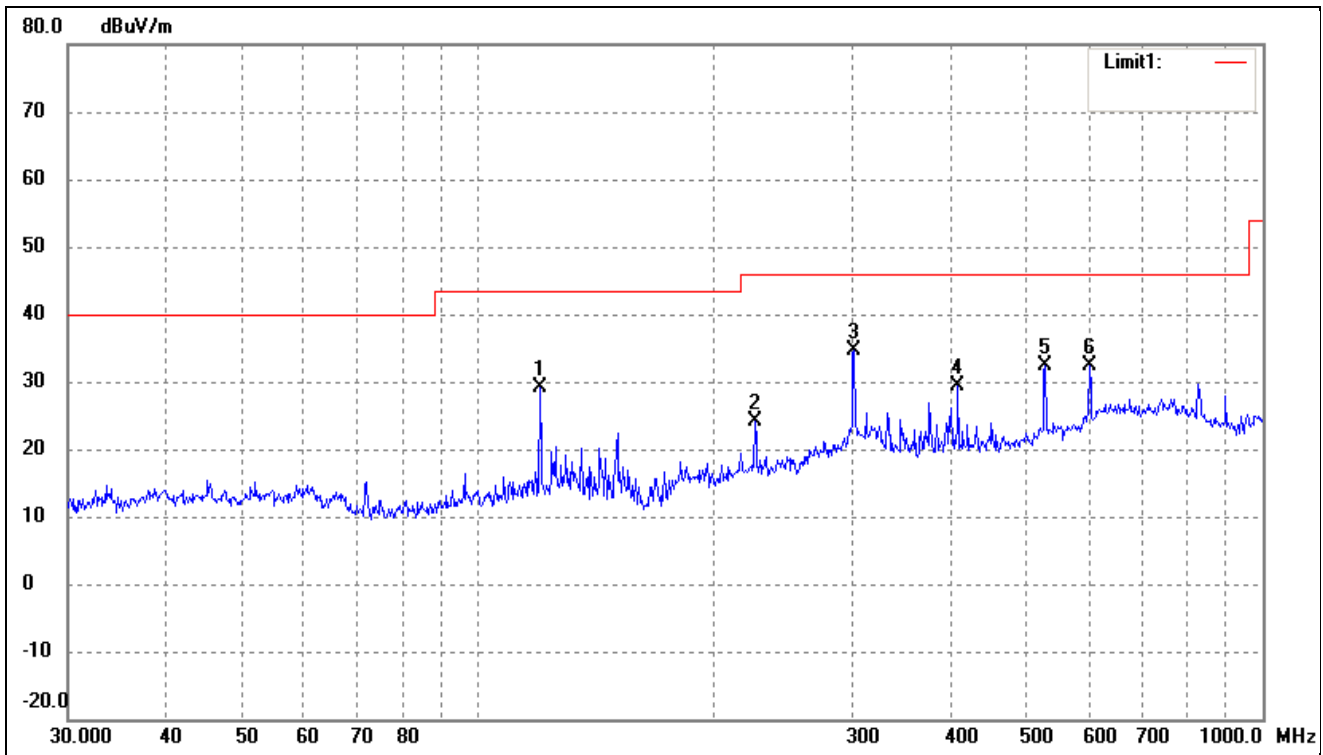

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	119.8556	45.70	-16.67	29.03	43.50	-14.47	300	100	peak
2	225.3080	37.55	-13.51	24.04	46.00	-21.96	91	100	peak
3	301.4224	44.28	-9.59	34.69	46.00	-11.31	248	100	peak
4	408.9460	37.33	-8.04	29.29	46.00	-16.71	98	100	peak
5	528.2458	37.64	-5.20	32.44	46.00	-13.56	316	100	peak
6	601.4265	32.70	-0.36	32.34	46.00	-13.66	150	100	peak

Test Specification: Vertical

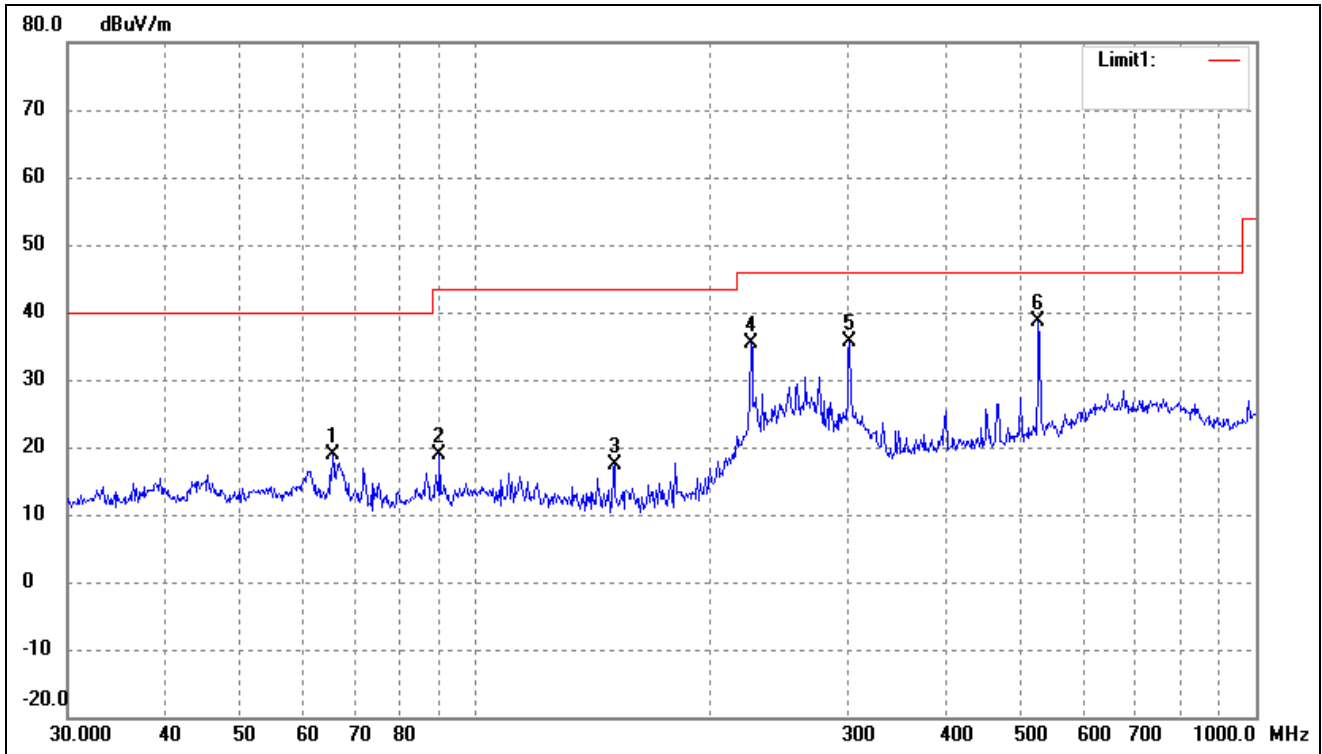


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.5727	36.50	-17.72	18.78	40.00	-21.22	329	100	peak
2	89.9047	36.90	-18.11	18.79	43.50	-24.71	97	100	peak
3	150.5378	36.22	-18.74	17.48	43.50	-26.02	55	100	peak
4	225.3080	48.82	-13.51	35.31	46.00	-10.69	106	100	peak
5	301.4224	45.19	-9.59	35.60	46.00	-10.40	211	100	peak
6	526.3967	43.79	-5.20	38.59	46.00	-7.41	222	100	peak

Operating Condition: Transmitting Middle Channel (2440MHz)


Comment: AC120V 60Hz

Test Specification: Horizontal

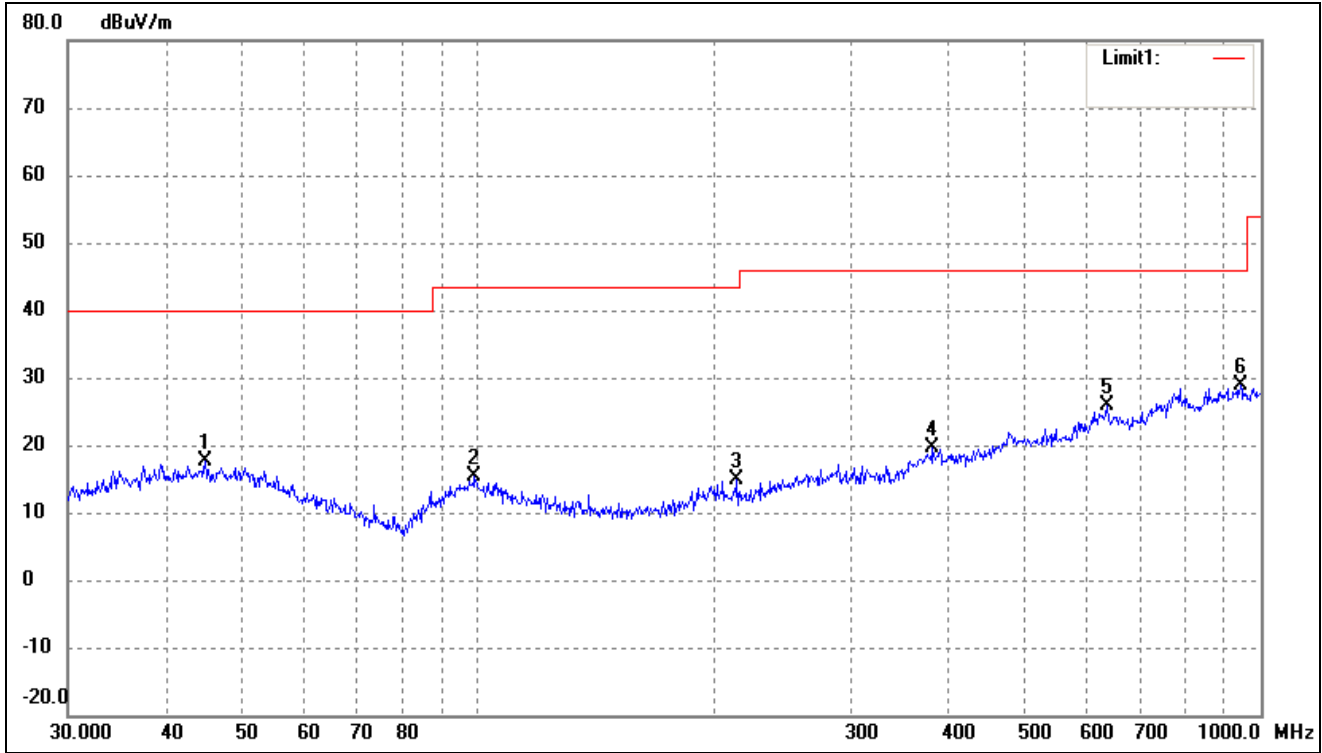

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.9006	28.22	-10.59	17.63	40.00	-22.37	195	100	peak
2	99.1797	27.01	-11.58	15.43	43.50	-28.07	344	100	peak
3	214.5143	27.06	-12.24	14.82	43.50	-28.68	64	100	peak
4	381.2487	26.75	-7.04	19.71	46.00	-26.29	311	100	peak
5	636.1340	28.93	-3.12	25.81	46.00	-20.19	221	100	peak
6	942.1305	26.76	2.21	28.97	46.00	-17.03	94	100	peak

Test Specification: Vertical

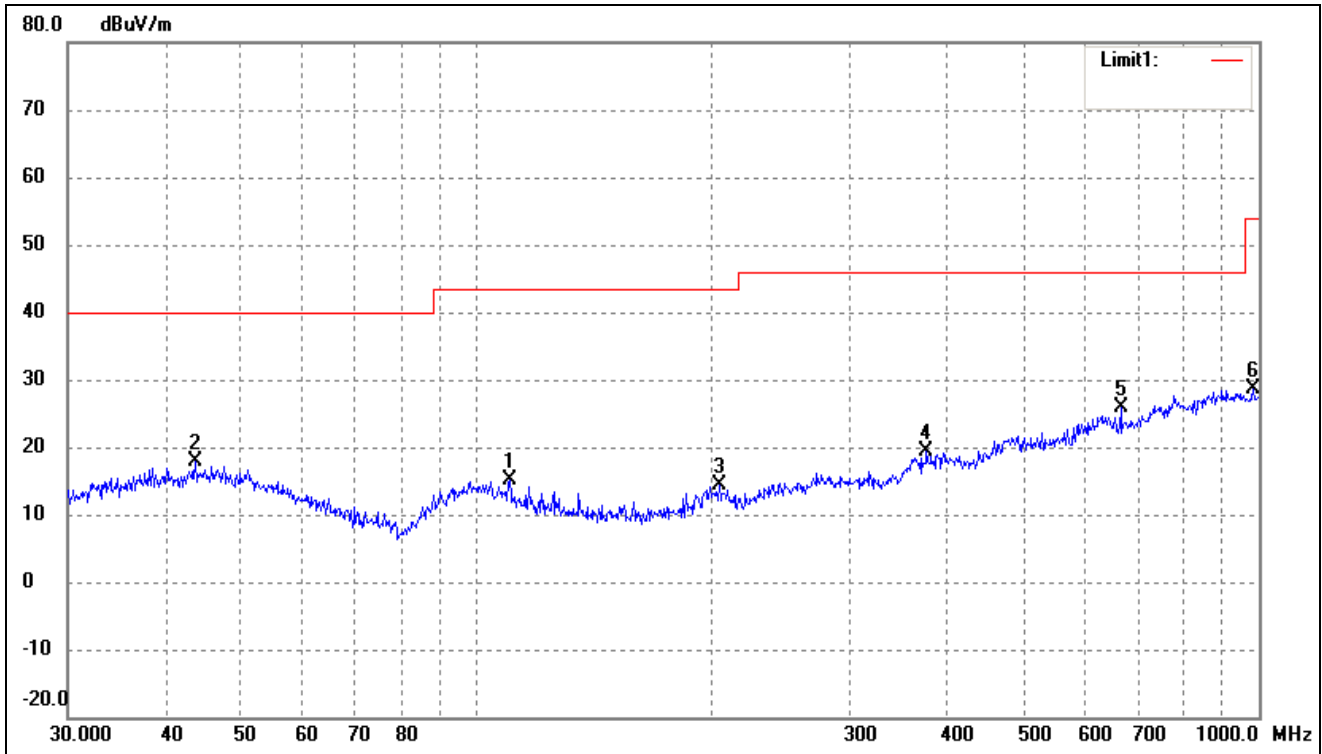


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	110.1816	27.68	-12.57	15.11	43.50	-28.39	145	100	peak
2	43.6585	28.37	-10.44	17.93	40.00	-22.07	238	100	peak
3	204.2377	26.13	-11.78	14.35	43.50	-29.15	97	100	peak
4	375.9385	26.50	-7.18	19.32	46.00	-26.68	324	100	peak
5	665.8035	29.64	-3.64	26.00	46.00	-20.00	152	100	peak
6	982.6200	26.59	2.09	28.68	54.00	-25.32	90	100	peak

Operating Condition: Transmitting High Channel (2474MHz)


Comment: AC120V 60Hz

Test Specification: Horizontal

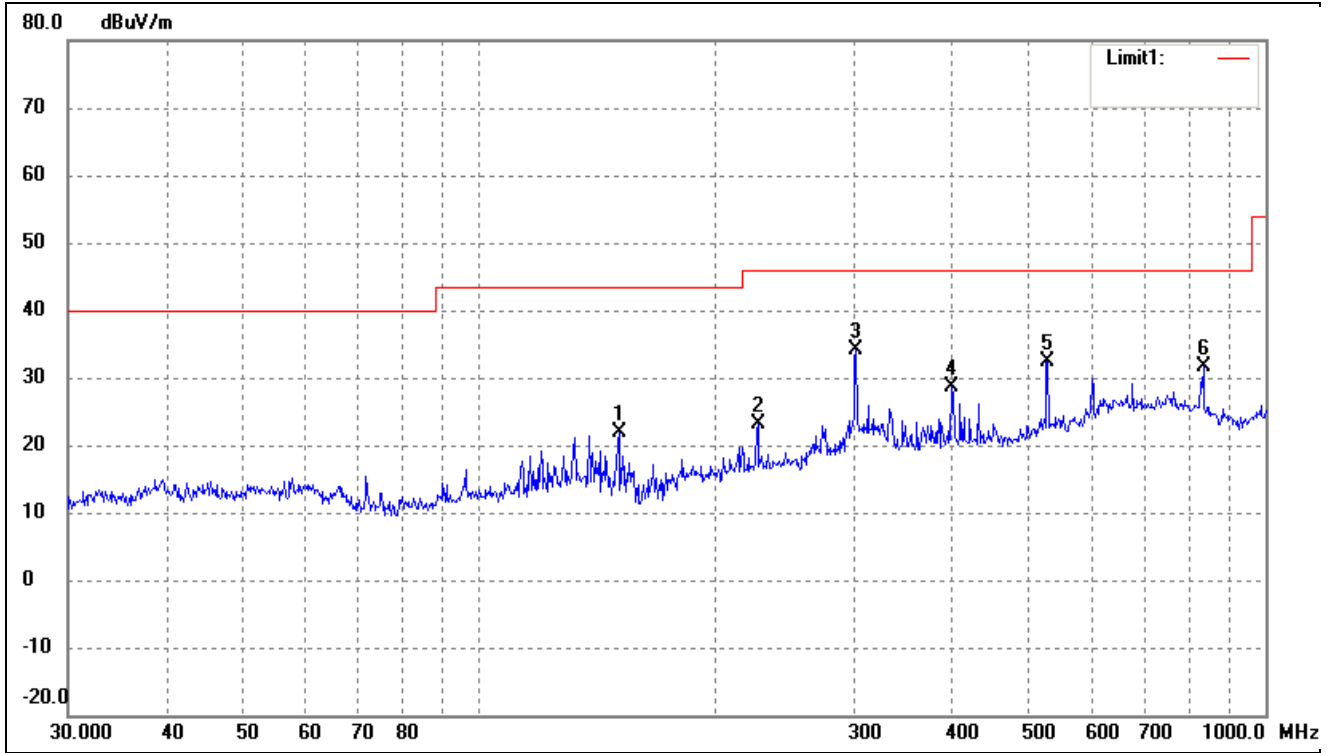

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	150.5378	40.54	-18.74	21.80	43.50	-21.70	169	100	peak
2	226.0994	36.49	-13.45	23.04	46.00	-22.96	181	100	peak
3	301.4224	43.76	-9.59	34.17	46.00	-11.83	68	100	peak
4	399.0302	36.40	-7.84	28.56	46.00	-17.44	122	100	peak
5	528.2458	37.58	-5.20	32.38	46.00	-13.62	334	100	peak
6	833.3171	34.11	-2.56	31.55	46.00	-14.45	214	100	peak

Test Specification: Vertical

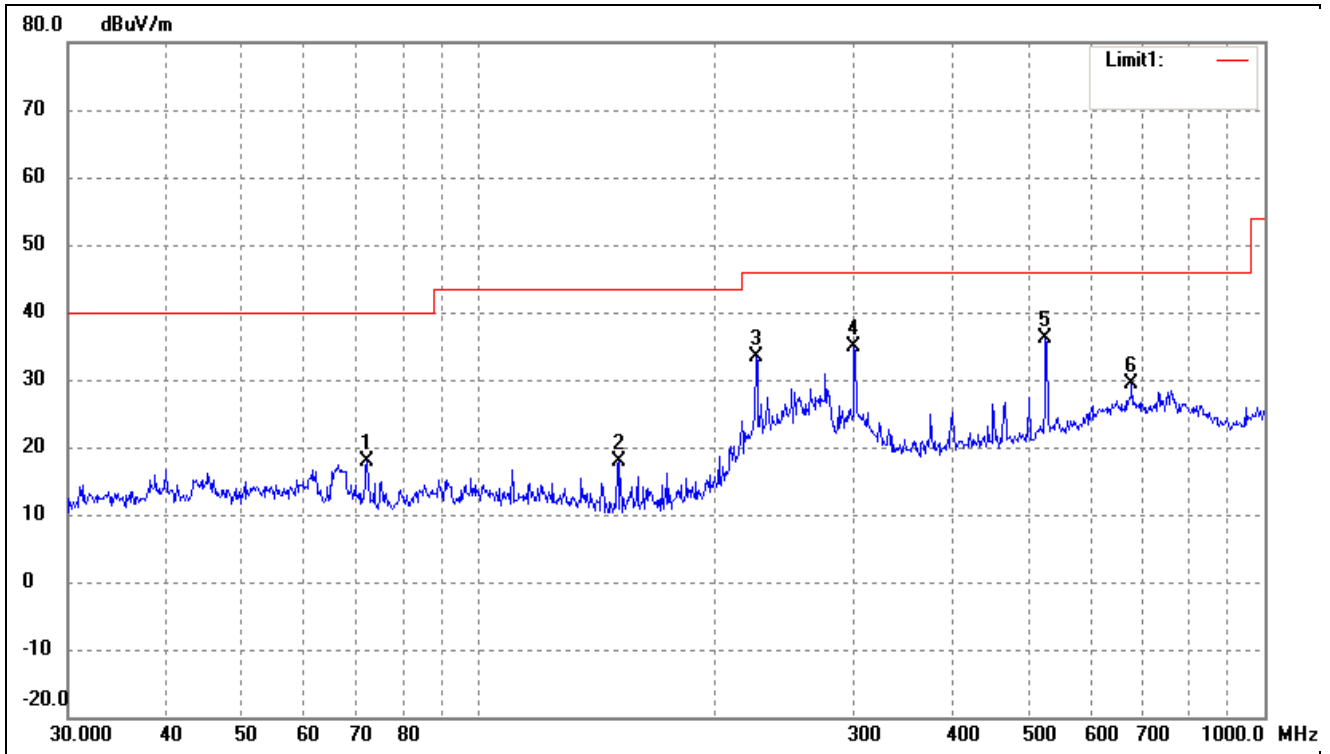

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	72.0843	36.83	-18.97	17.86	40.00	-22.14	60	100	peak
2	150.5378	36.66	-18.74	17.92	43.50	-25.58	107	100	peak
3	225.3080	46.94	-13.51	33.43	46.00	-12.57	145	100	peak
4	300.3673	44.45	-9.59	34.86	46.00	-11.14	139	100	peak
5	526.3967	41.30	-5.20	36.10	46.00	-9.90	145	100	peak
6	677.5798	29.85	-0.50	29.35	46.00	-16.65	114	100	peak

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2408MHz							
2408	87.20	-3.59	83.61	114	-30.39	H	PK
2408	78.51	-3.59	74.92	94	-19.08	H	AV
4816	49.82	-3.59	46.23	74	-27.77	H	PK
4816	43.74	-3.59	40.15	54	-13.85	H	AV
7224	45.63	-0.52	45.11	74	-28.89	H	PK
7224	39.14	-0.52	38.62	54	-15.38	H	AV
2408	83.90	-3.59	80.31	114	-33.69	V	PK
2408	74.83	-3.59	71.24	94	-22.76	V	AV
4816	48.81	-3.59	45.22	74	-28.78	V	PK
4816	42.84	-3.59	39.25	54	-14.75	V	AV
7224	44.10	-0.52	43.58	74	-30.42	V	PK
7224	37.54	-0.52	37.02	54	-16.98	V	AV
Middle Channel-2440MHz							
2440	86.65	-3.59	83.06	114	-30.94	H	PK
2440	77.35	-3.59	73.76	94	-20.24	H	AV
4880	47.66	-3.49	44.17	74	-29.83	H	PK
4880	41.73	-3.49	38.24	54	-15.76	H	AV
7320	44.71	-0.47	44.24	74	-29.76	H	PK
7320	38.63	-0.47	38.16	54	-15.84	H	AV
2440	83.94	-3.59	80.35	114	-33.65	V	PK
2440	73.57	-3.59	69.98	94	-24.02	V	AV
4880	47.23	-3.49	43.74	74	-30.26	V	PK
4880	39.58	-3.49	36.09	54	-17.91	V	AV
7320	46.08	-0.47	45.61	74	-28.39	V	PK
7320	40.46	-0.47	39.99	54	-14.01	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
High Channel-2474MHz							
2474	86.84	-3.59	83.25	114	-30.75	H	PK
2474	77.76	-3.59	74.17	94	-19.83	H	AV
4948	48.57	-3.41	45.16	74	-28.84	H	PK
4948	43.01	-3.41	39.60	54	-14.4	H	AV
7422	44.30	-0.42	43.88	74	-30.12	H	PK
7422	38.76	-0.42	38.34	54	-15.66	H	AV
2474	83.61	-3.59	80.02	114	-33.98	V	PK
2474	42.12	-3.59	38.53	94	-55.47	V	AV
4948	47.52	-3.41	44.11	74	-29.89	V	PK
4948	42.70	-3.41	39.29	54	-14.71	V	AV
7422	43.61	-0.42	43.19	74	-30.81	V	PK
7422	38.65	-0.42	38.23	54	-15.77	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Lowest Bandedge
Vertical (Worst case)

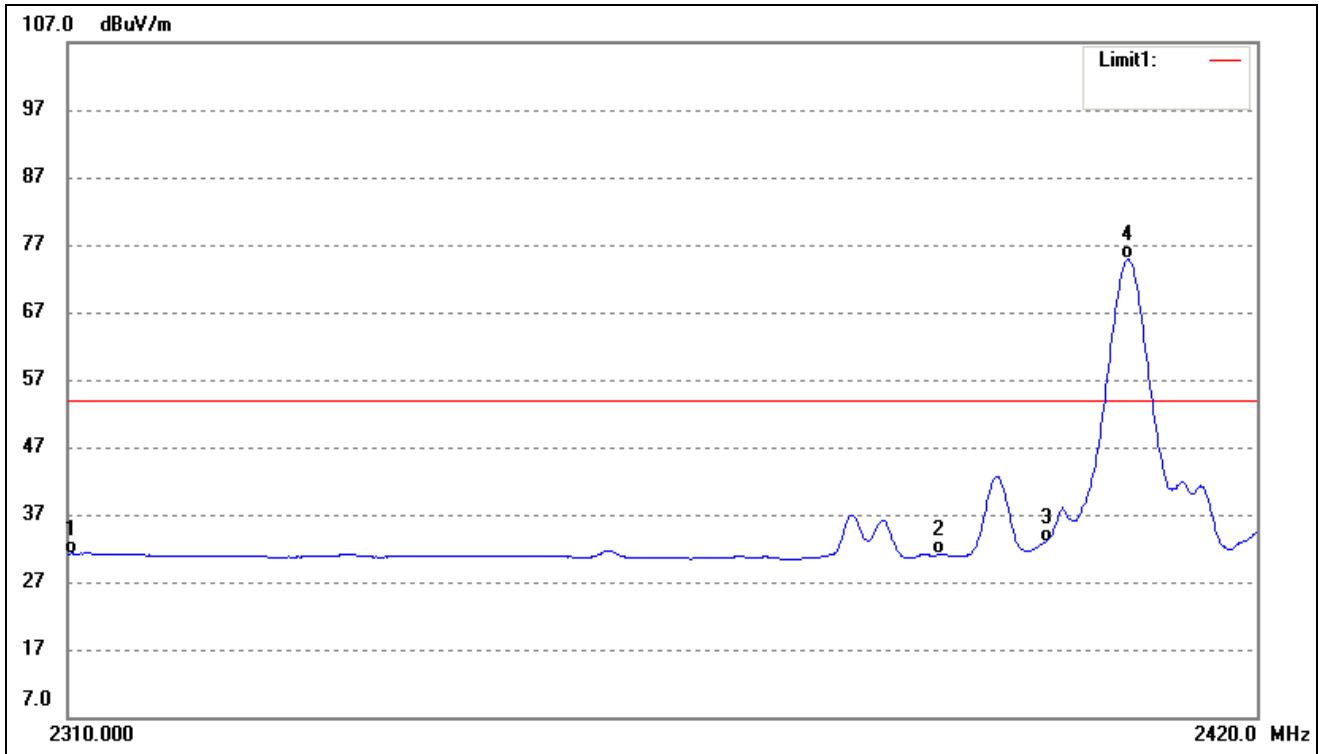

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.61	-6.38	31.23	54.00	-22.77	Ave Detector
	2310.000	49.57	-6.38	43.19	74.00	-30.81	Peak Detector
2	2390.000	38.33	-7.26	31.07	54.00	-22.93	Ave Detector
	2390.000	53.23	-7.26	45.97	74.00	-28.03	Peak Detector
3	2400.000	40.37	-7.37	33.00	54.00	-21.00	Ave Detector
	2400.000	63.47	-7.37	56.10	74.00	-17.90	Peak Detector

Highest Bandedge
Vertical (Worst case)

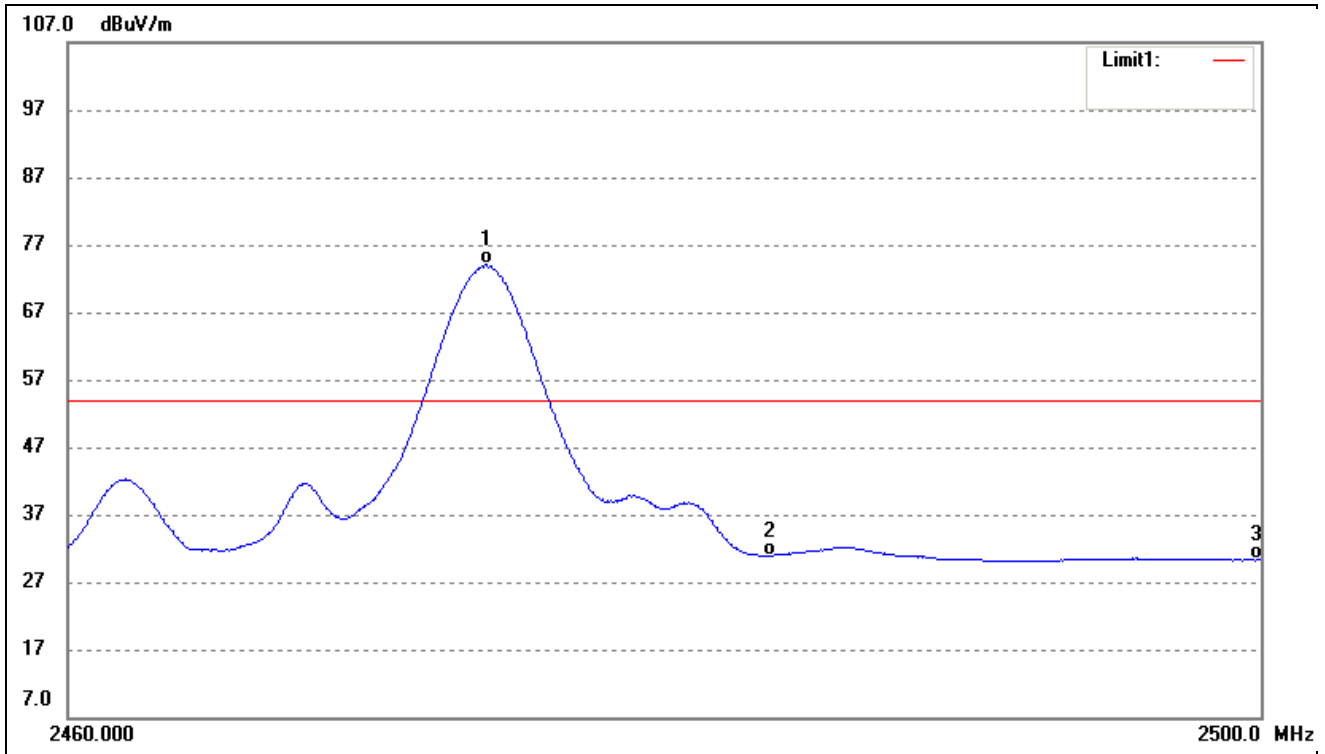

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2473.967	81.33	-7.29	74.04	/	/	Ave Detector
	2474.406	90.59	-7.29	83.30	/	/	Peak Detector
2	2483.500	38.19	-7.28	30.91	54.00	-23.09	Ave Detector
	2483.500	56.06	-7.28	48.78	74.00	-25.22	Peak Detector
3	2500.000	37.52	-7.25	30.27	54.00	-23.73	Ave Detector
	2500.000	58.46	-7.25	51.21	74.00	-22.79	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2408	2095	2128.3
Middle Channel	2440	2172	2170.1
High Channel	2474	2266	2196.4

Please refer to the following test plots


Low Channel:

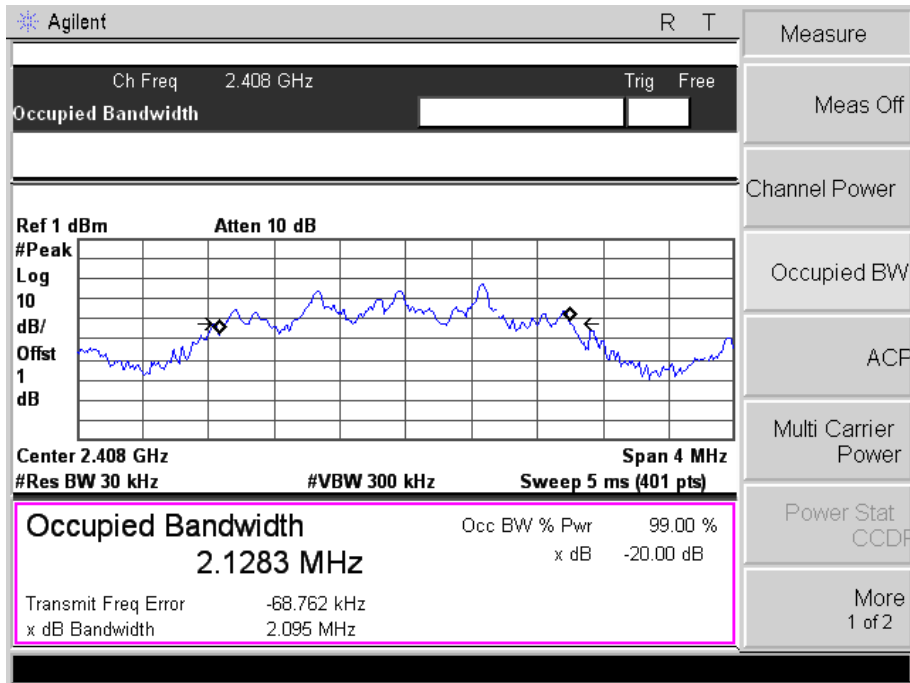

Middle Channel:

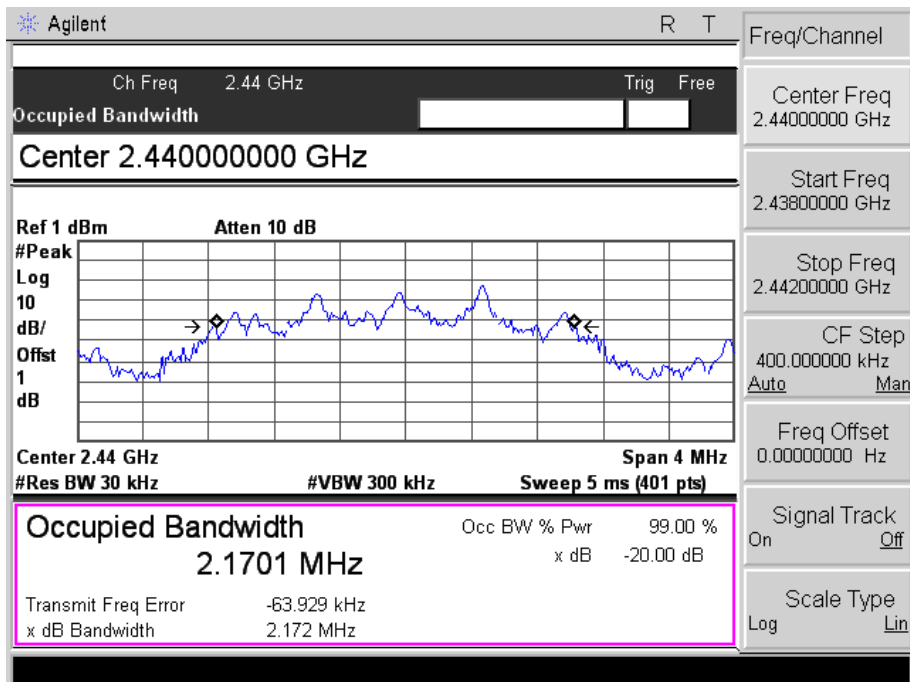

High Channel:

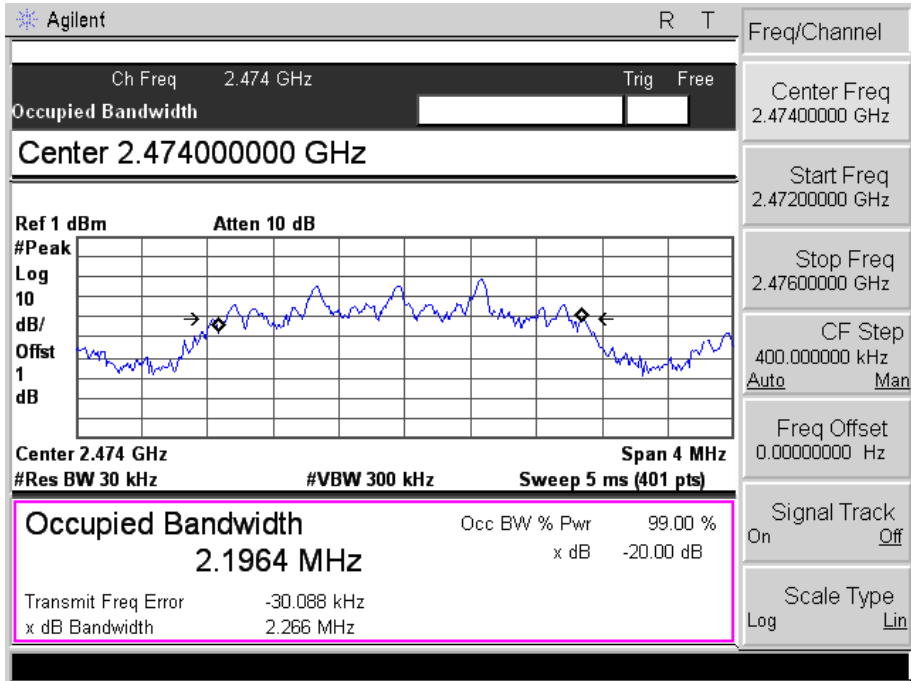


7. Conducted Emissions

7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

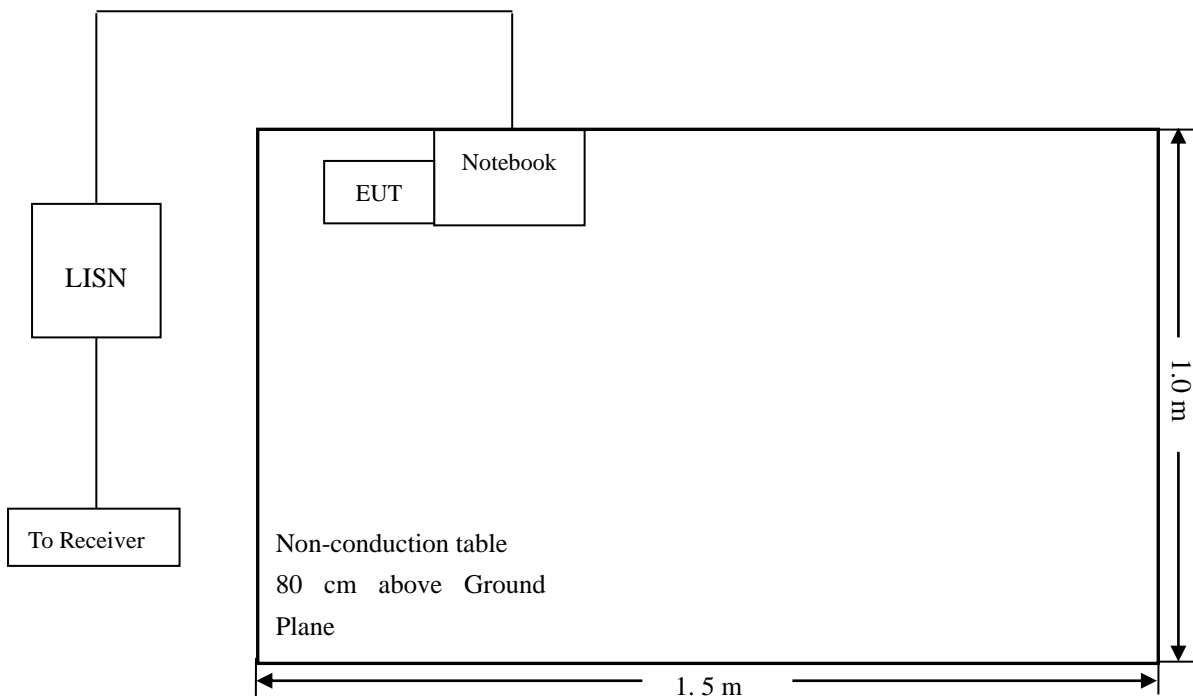

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

7.5 Summary of Test Results/Plots

According to the data in section 7.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

-1.91 dB at 0.4980 MHz in the Line mode, AVG detector, 0.15-30MHz

7.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: 2.4GHz Wireless Receiver

Tested Model: MRL

Operating Condition: Transmitting


Comment: AC 120V/60Hz

Test Specification: Neutral

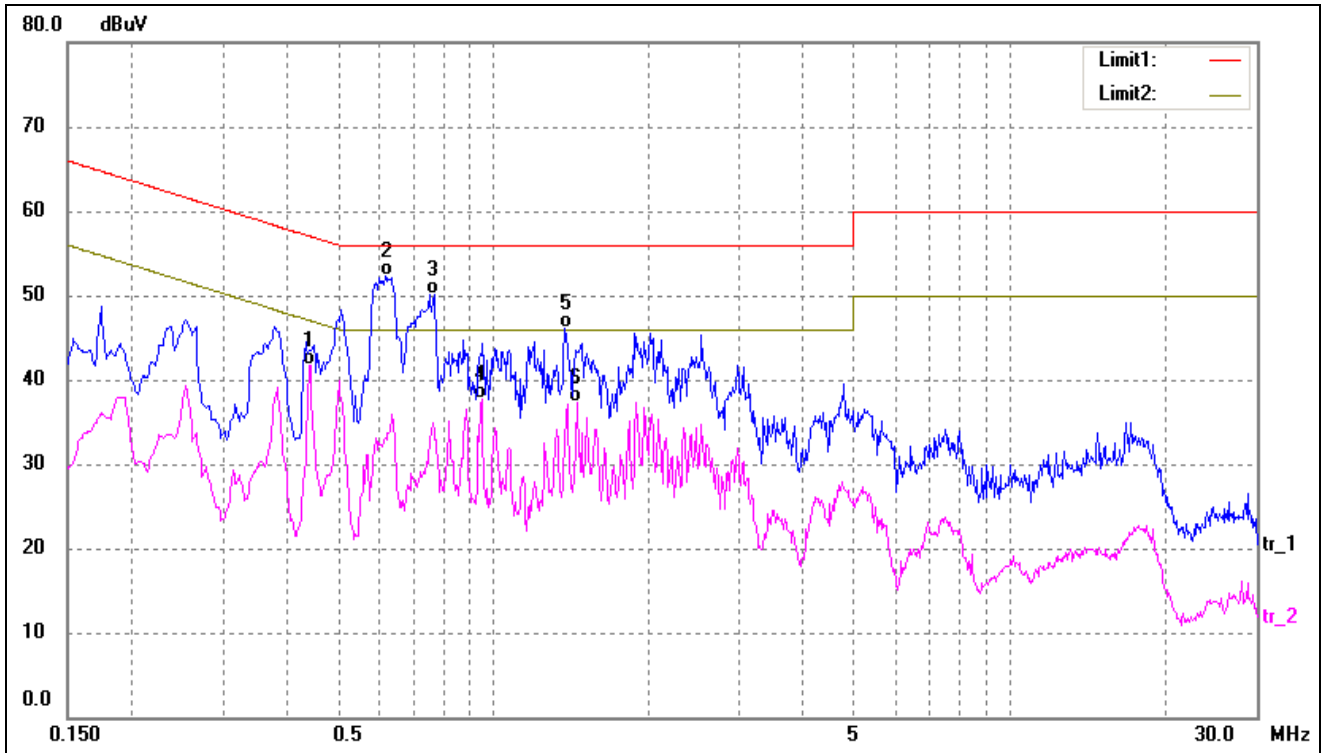

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4420	31.97	9.80	41.77	47.02	-5.25	AVG
2*	0.6180	42.44	9.79	52.23	56.00	-3.77	QP
3	0.7700	40.38	9.78	50.16	56.00	-5.84	QP
4	0.9500	27.89	9.76	37.65	46.00	-8.35	AVG
5	1.3780	36.42	9.75	46.17	56.00	-9.83	QP
6	1.4540	27.58	9.75	37.33	46.00	-8.67	AVG

Test Specification: Line

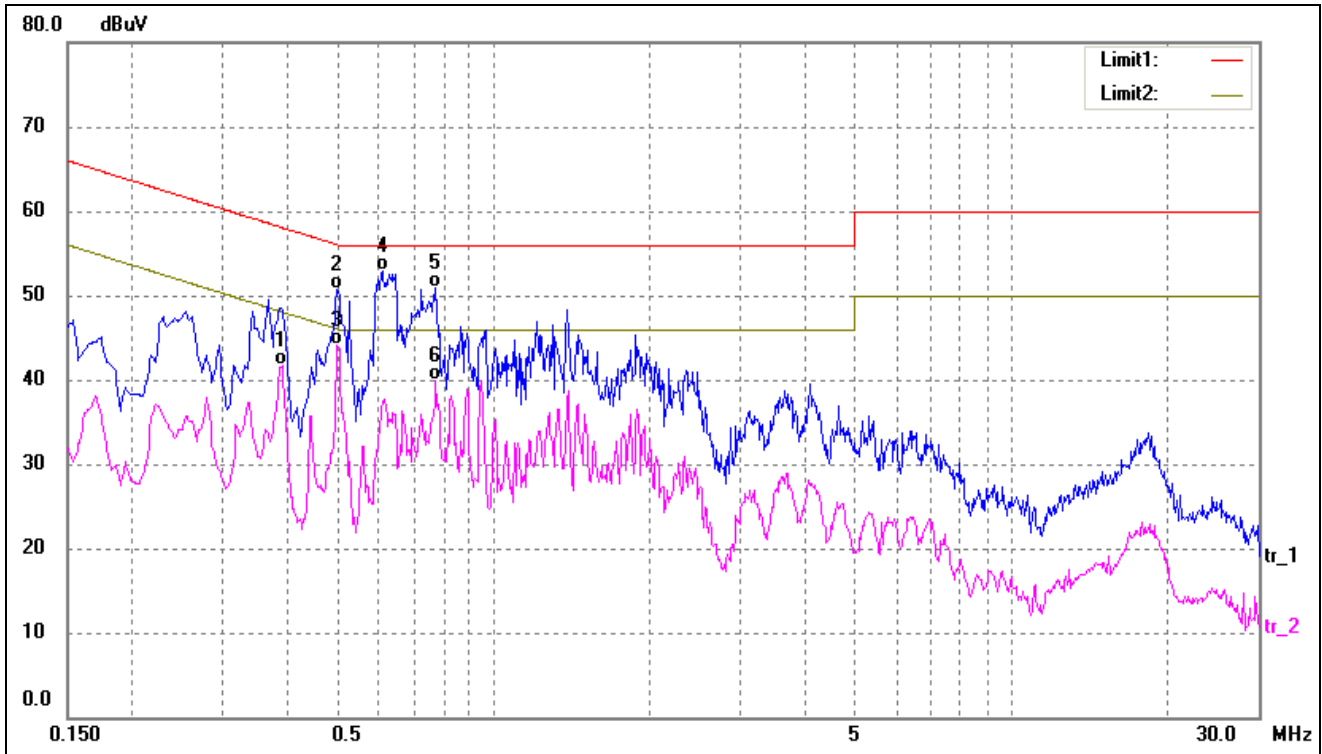

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3900	32.00	9.80	41.80	48.06	-6.26	AVG
2	0.4980	40.86	9.80	50.66	56.03	-5.37	QP
3*	0.4980	34.32	9.80	44.12	46.03	-1.91	AVG
4	0.6100	43.08	9.79	52.87	56.00	-3.13	QP
5	0.7740	41.04	9.78	50.82	56.00	-5.18	QP
6	0.7740	30.10	9.78	39.88	46.00	-6.12	AVG

***** END OF REPORT *****