



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**

**TEST REPORT**

**FOR**

**PACKETWAVE POINT TO POINT**

**MODEL NUMBER: PW210, PW220, PW230**

**FCC ID: PS6R3003-A1**

**REPORT NUMBER: 04U2749-1**

**ISSUE DATE: JULY 28, 2004**

*Prepared for*

**APERTO NETWORKS  
1637S. MAIN STREET  
MILPITAS  
CALIFORNIA 95035, USA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION.....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY.....</b>	<b>6</b>
5.1. MEASURING INSTRUMENT CALIBRATION.....	6
5.2. MEASUREMENT UNCERTAINTY.....	6
5.3. TEST AND MEASUREMENT EQUIPMENT.....	7
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
<b>7. APPLICABLE LIMITS AND TEST RESULTS .....</b>	<b>10</b>
7.1. 6 dB BANDWIDTH.....	10
7.2. 99% BANDWIDTH.....	14
7.3. PEAK OUTPUT POWER.....	18
7.4. MAXIMUM PERMISSIBLE EXPOSURE .....	23
7.5. AVERAGE POWER.....	26
7.6. PEAK POWER SPECTRAL DENSITY .....	27
7.7. CONDUCTED SPURIOUS EMISSIONS.....	31
7.8. RADIATED EMISSIONS.....	38
7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	38
7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ .....	41
7.8.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	42
7.9. POWERLINE CONDUCTED EMISSIONS .....	43
<b>8. SETUP PHOTOS.....</b>	<b>47</b>

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** APERTO NETWORKS  
1637 S. MAIN STREET  
MILPITAS CA.95035, USA

**EUT DESCRIPTION:** PACKETWAVE POINT TO MULTIPOINT

**MODEL NAME:** PW210, PW220, PW230

**MODEL DIFFERENCE:** The three models are identical to each other except that they have different software features inside, which allow the products to be configured as VLAN or just a HUB.

**DATE TESTED:** DECEMBER 03-JULY 28, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



THU CHAN  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The EUT is a point to point Broadband Wireless subscribe device, with a maximum antenna gain of 18dBi in the 5.8 GHz band

The transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5728 - 5847	802.11a	27.52	564.94

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Amplifier, 2-8GHz	HP	11975A	2517A01067	1/16/2005
Quasi-Peak Adapter	HP	85650A	3145A01654	11/1/04
SA Display Section 1	HP	85662A	3026A19146	2/2/05
SA RF Section, 22 GHz	HP	85660B	3014A06685	11/1/04
Antenna, Horn 1-18GHz	EMCO	3115	6717	2/4/05
Amplifier, 1-26GHz	Miteq	NSP2600-SP	924341	4/25/05
Antenna, Horn 18-26GHz	ARA	MWH-1826/B	1013	2/2/05
HPF 7.6-18GHz	Micro-Tronic	HPM13195	1	CNR
Harmonic Mixer, 26.5 ~ 40 GHz	HP	11970A	3008A04190	10/14/05
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/04
Site C Antenna, Biconial	Eaton	94455-1	1214	3/6/05
Site C Antenna, Log Periodic	EMCO	3146	9107-3163	3/6/05
Site C Preamplifier, 1300MHz	HP	8447D	2944A06550	8/18/04
EMI Test Receiver	R & S	ESHS 20	827129/006	7/22/05
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	10/13/04

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	Satellite	NA	DoC
Radio	Aperto	PWPR5800-01	3007	NA
AC Adapter	Toshiba	NA	NA	NA
Radio	Aperto	Packetwave 760R	NA	NA
AC Adapter	Aperto	HASU11	NA	DoC
POE	NA	NA	NA	NA

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
AC	1	US 115V	Un-shielded	2m	No	No
DC	2	DC	Un-shielded	1m	No	No
POE	1	RJ45	Un-shielded	1m	Yes	No
Serial	1	DB9	Un-shielded	5m	Yes	No
Radio	1	Coax	Shielded	1m	Yes	No
Radio IF	1	RJ45	Un-shielded	2m	Yes	No
Antenna	1	Coax	Un-shielded	1m	Yes	No

### TEST SETUP

The EUT is stand-alone unit via POE adapter. Test software exercised between the EUT & support radio antennas



**SETUP DIAGRAM FOR TESTS**

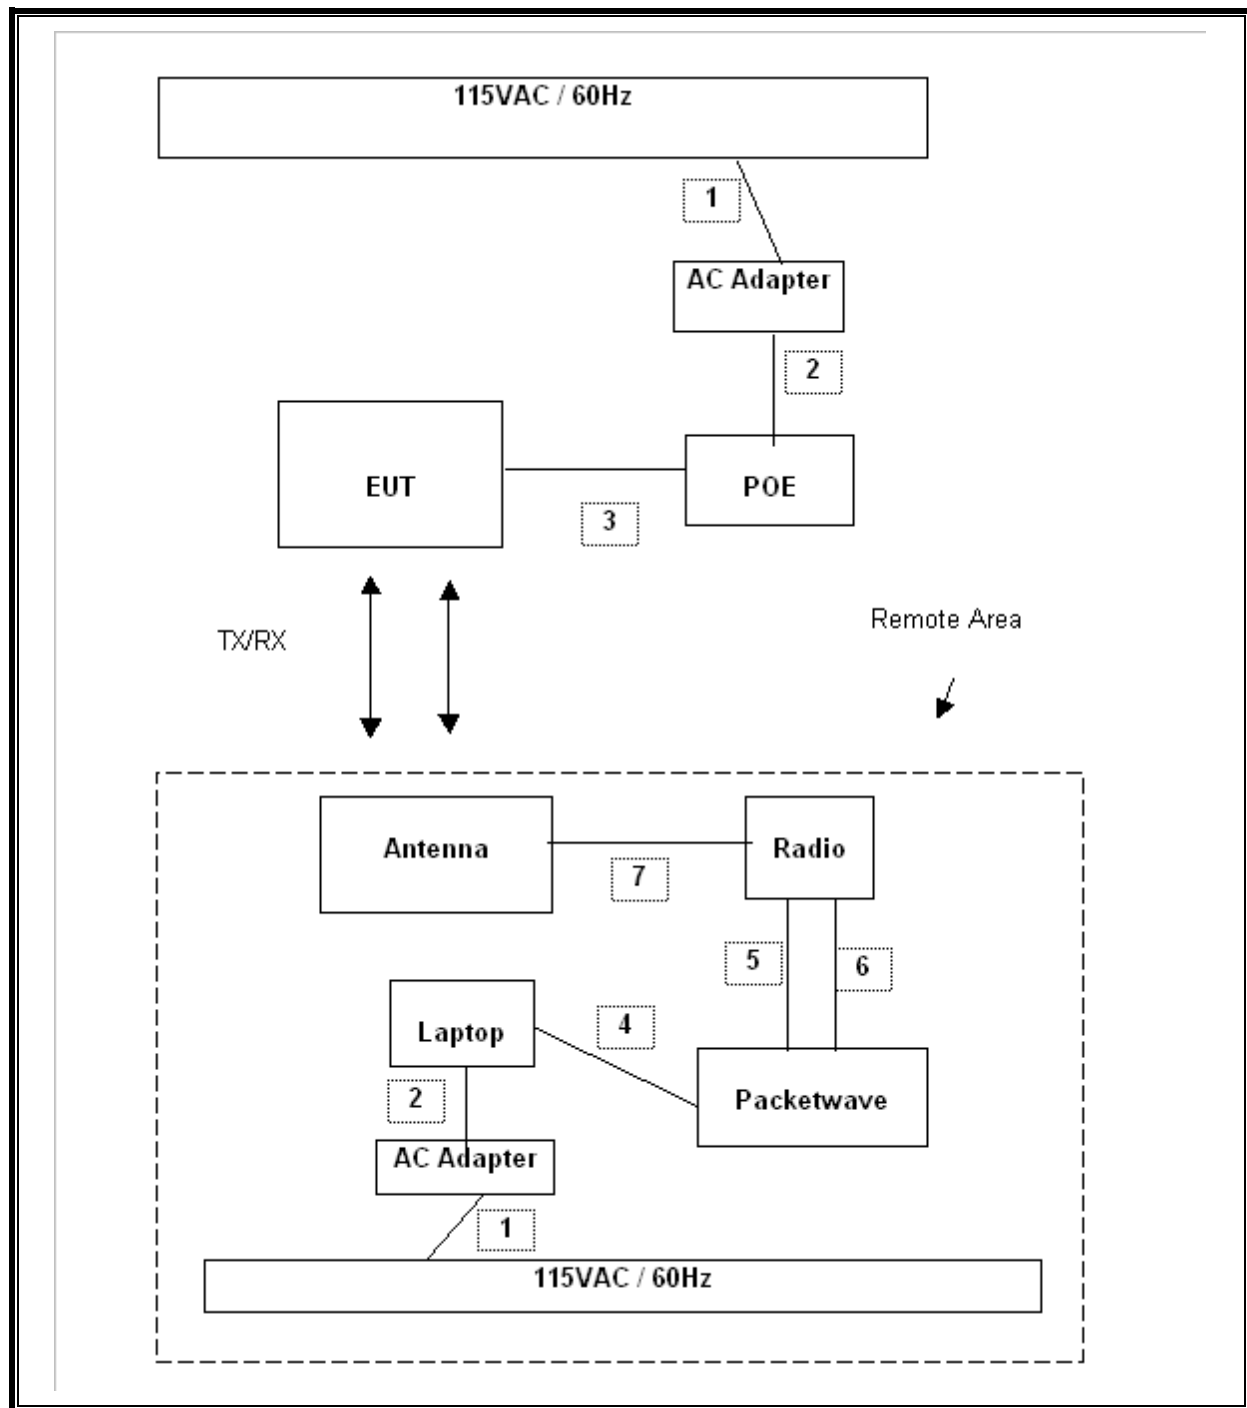

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.


#### 5.8 GHz BAND RESULTS


No non-compliance noted:


#### 802.11a Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5728	4650	500	4150
Middle	5788	4920	500	4420
High	5847	4700	500	4200

**6 DB BANDWIDTH (802.11a MODE)**

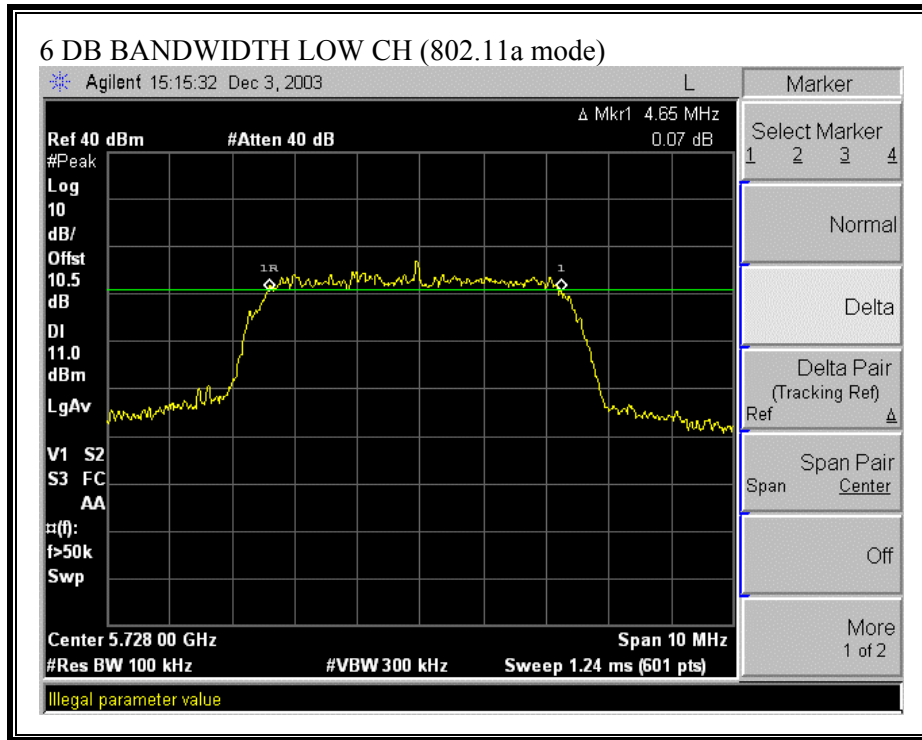

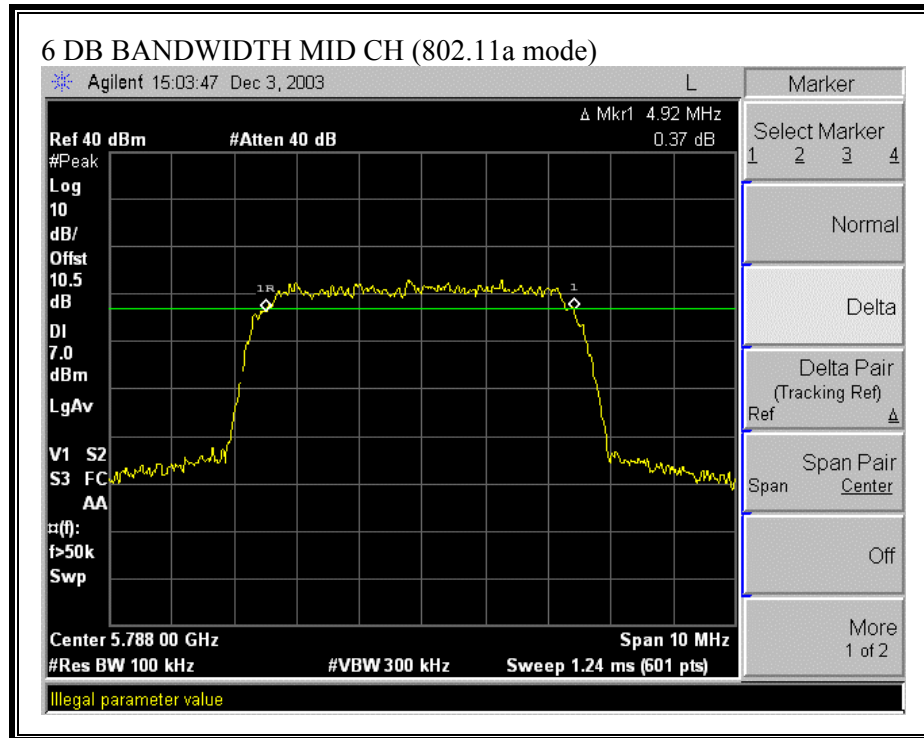

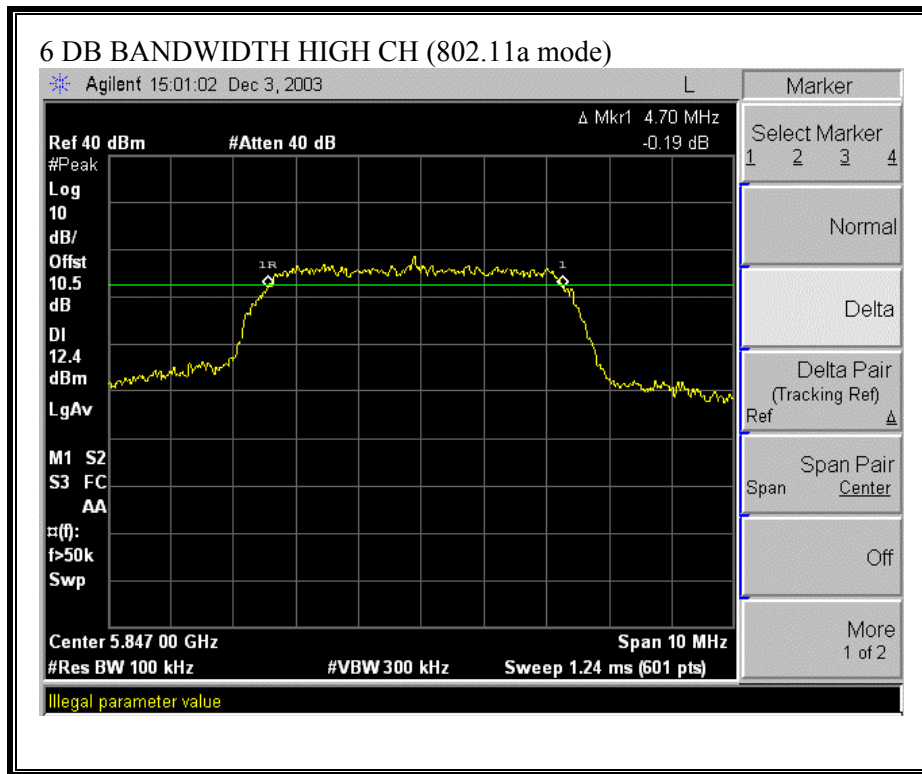

## 7.2. 99% BANDWIDTH

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


### 5.8 GHz BAND RESULTS


No non-compliance noted:

#### 802.11a Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5728	5.1607
Middle	5788	5.1179
High	5847	5.3627

**99% BANDWIDTH (802.11a MODE)**

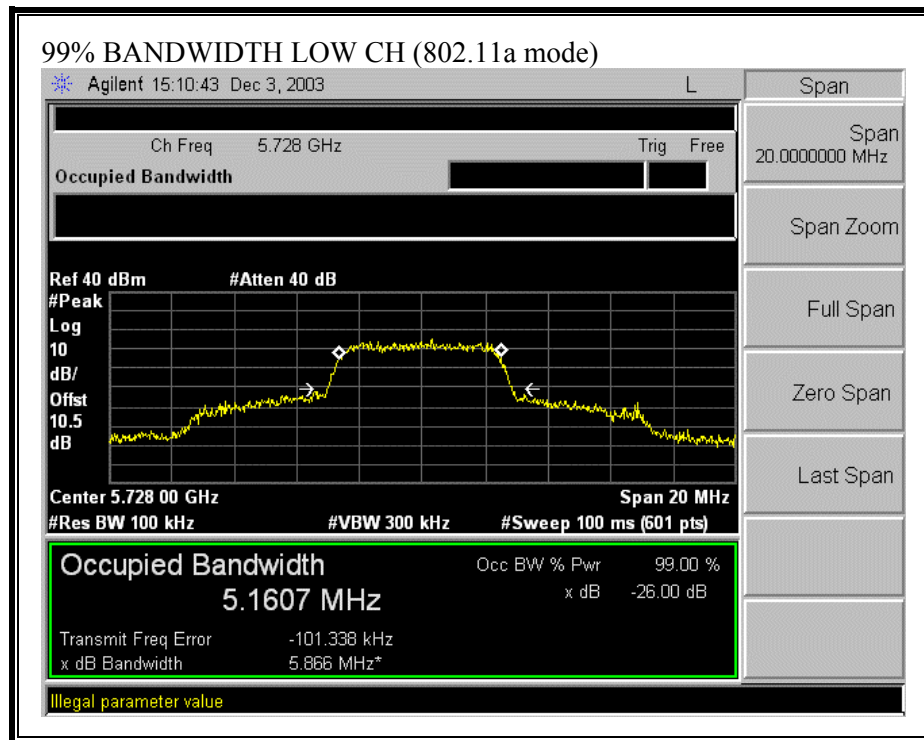

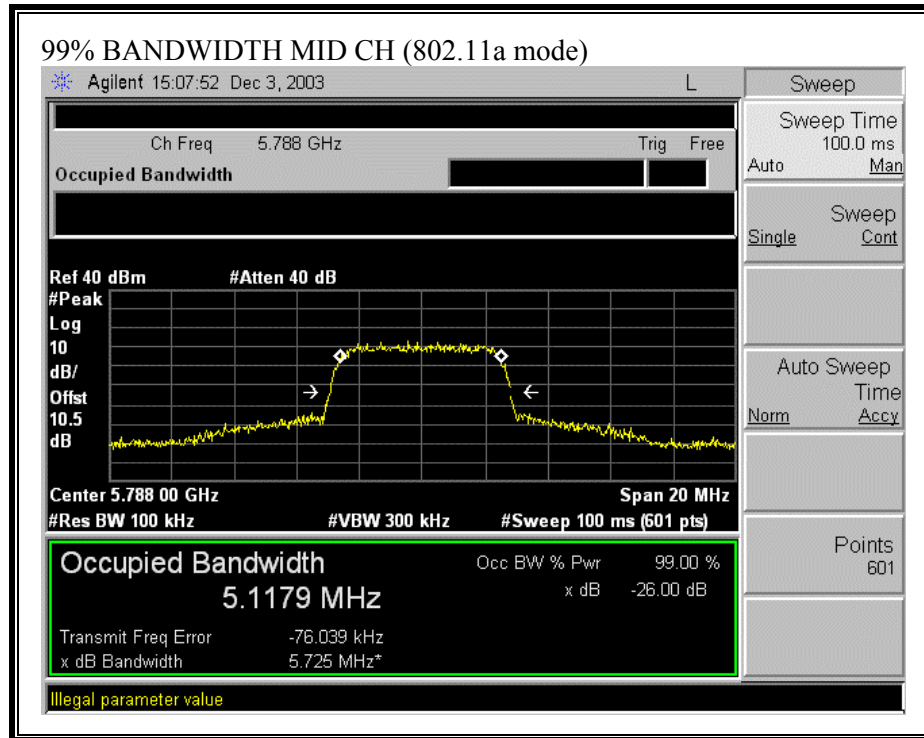





### **7.3. PEAK OUTPUT POWER**

#### **PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

The maximum antenna gain is 18dBi and point-to-point, therefore only the limit is 30dBm on the antenna port.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.


## **5.8 GHZ BAND RESULTS**


No non-compliance noted:


802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	5728	27.52	30	-2.48
Middle	5788	27.16	30	-2.84
High	5847	27.45	30	-2.55

**OUTPUT POWER (802.11a MODE)**

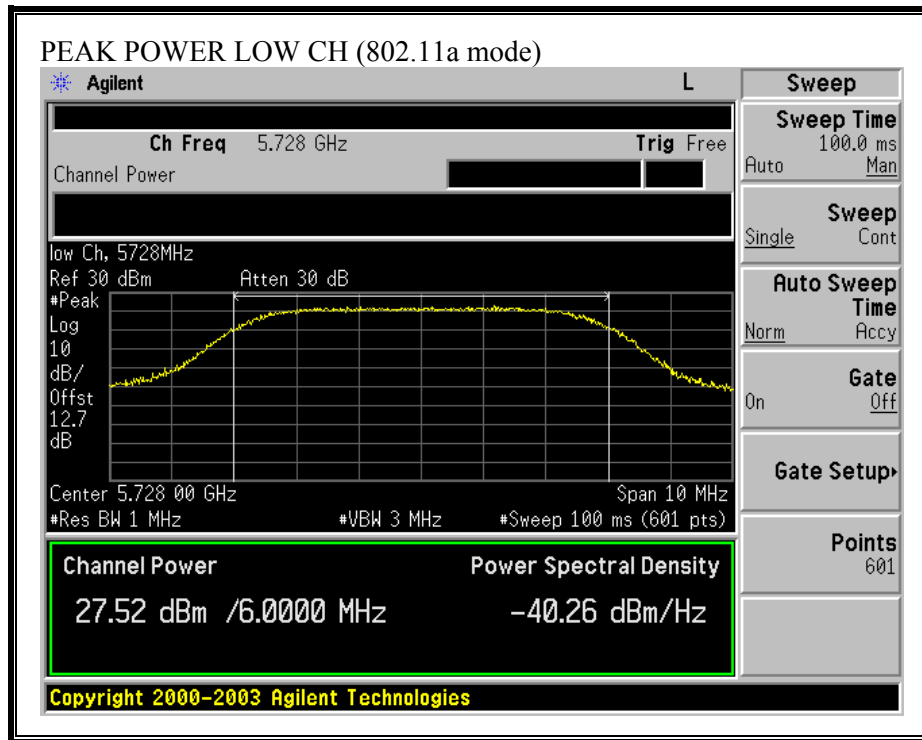

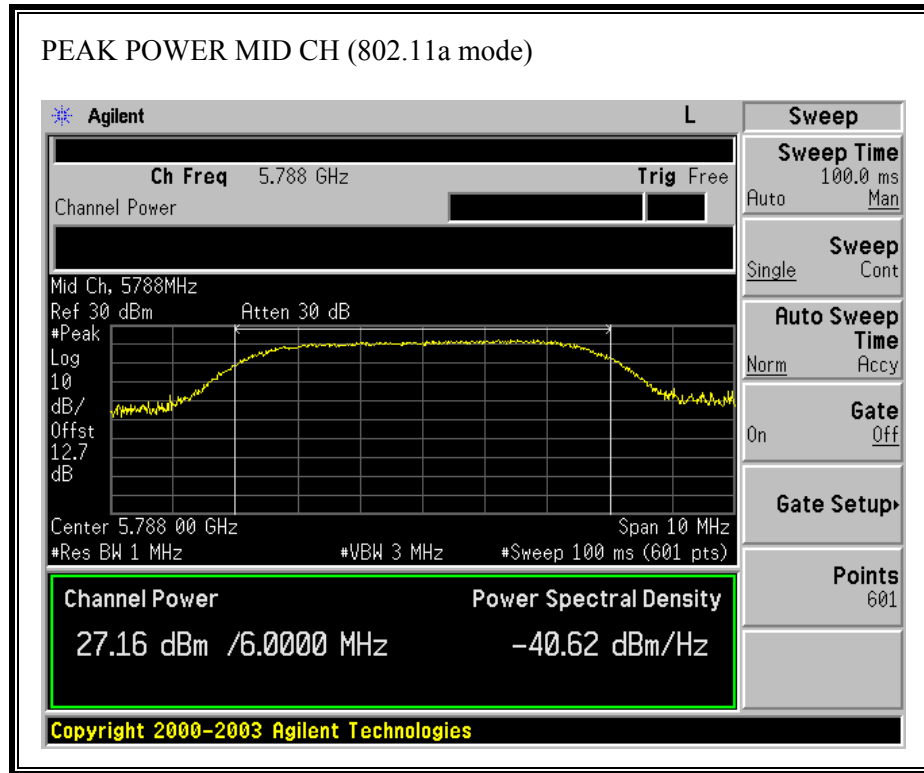

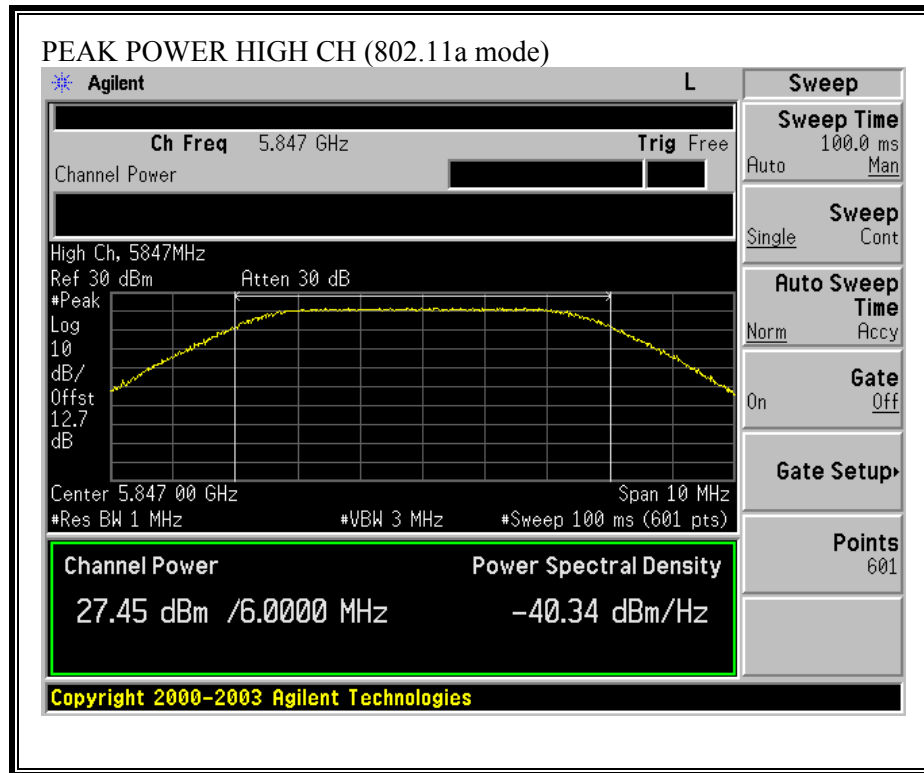

## 7.4. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.



## **LIMITS**

From §1.1310 Table 1 (B),  $S = 1.0 \text{ mW/cm}^2$

## **5.8 GHz BAND RESULTS**

No non-compliance noted:

<b>Mode</b>	<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Output Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>MPE Distance (cm)</b>
802.11a	1.0	27.52	18.00	53.24

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 7.5. AVERAGE POWER

### AVERAGE POWER LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### 5.8 GHZ BAND RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.7 dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

### 802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5728	22.24
Middle	5788	20.00
High	5847	23.62

## 7.6. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

:


### 5.8 GHz BAND RESULTS


No non-compliance noted:


### 802.11a Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5728	1.38	8	-6.62
Middle	5788	3.15	8	-4.85
High	5847	3.90	8	-4.10

**PEAK POWER SPECTRAL DENSITY (802.11a MODE)**

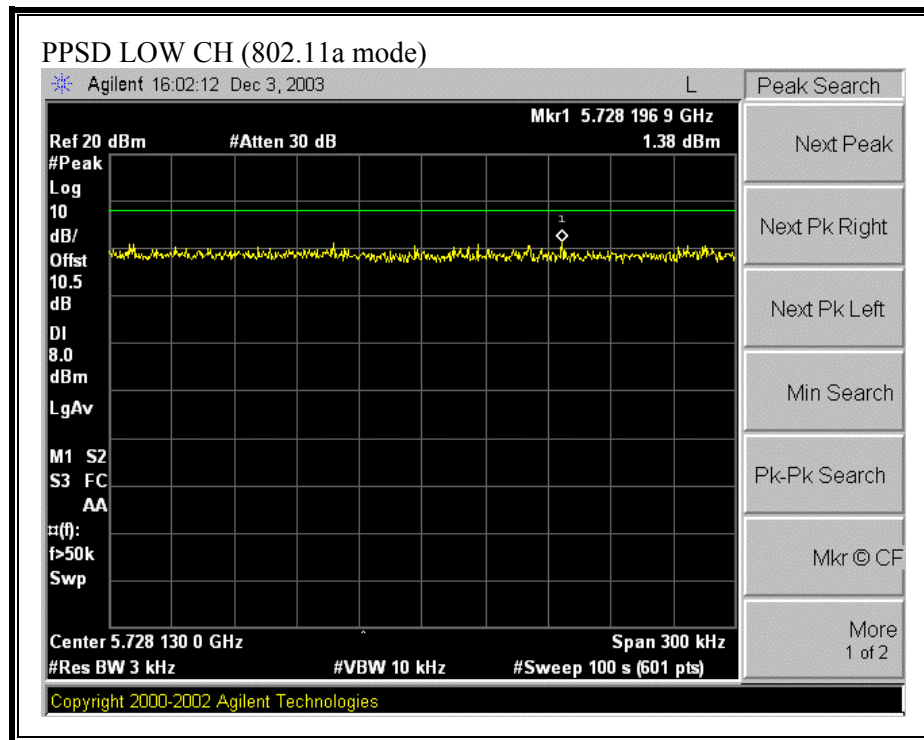

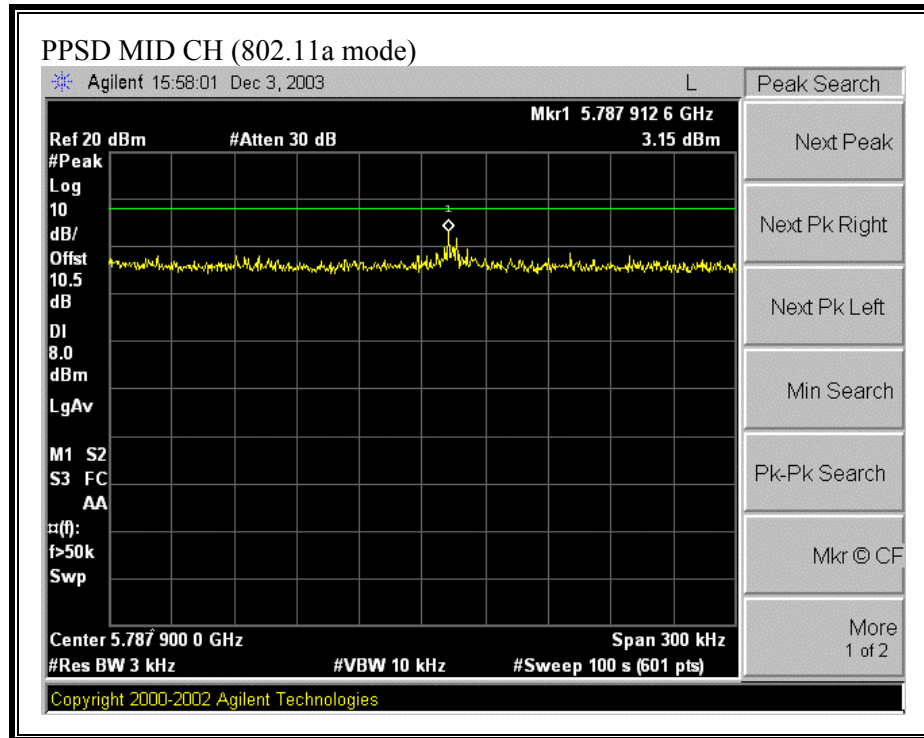

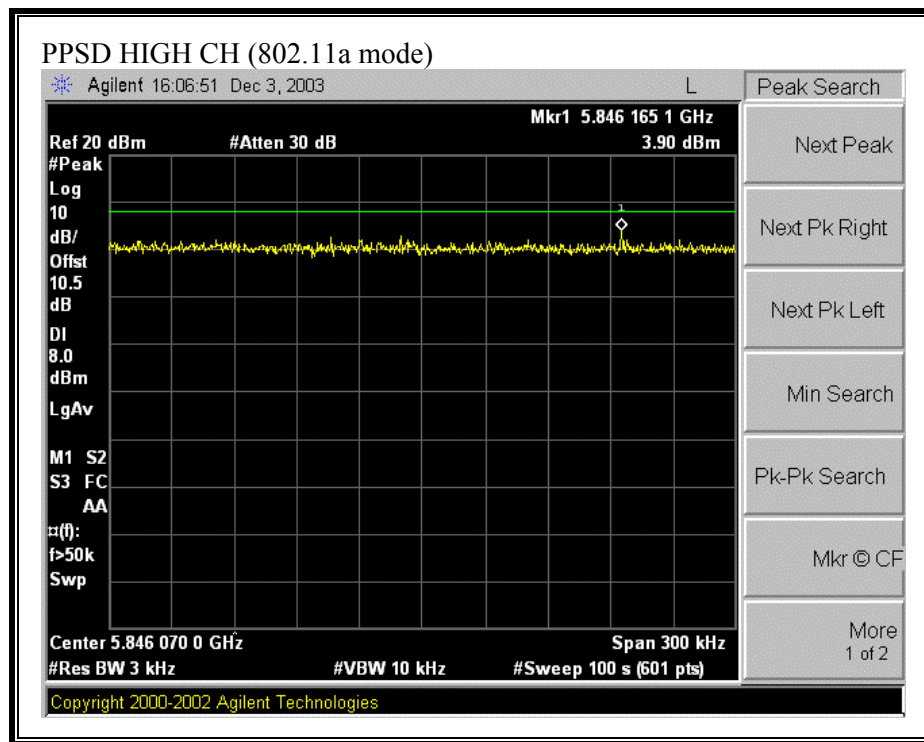

## **7.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 5.8 GHz band.


### **RESULTS**

No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11a MODE)**

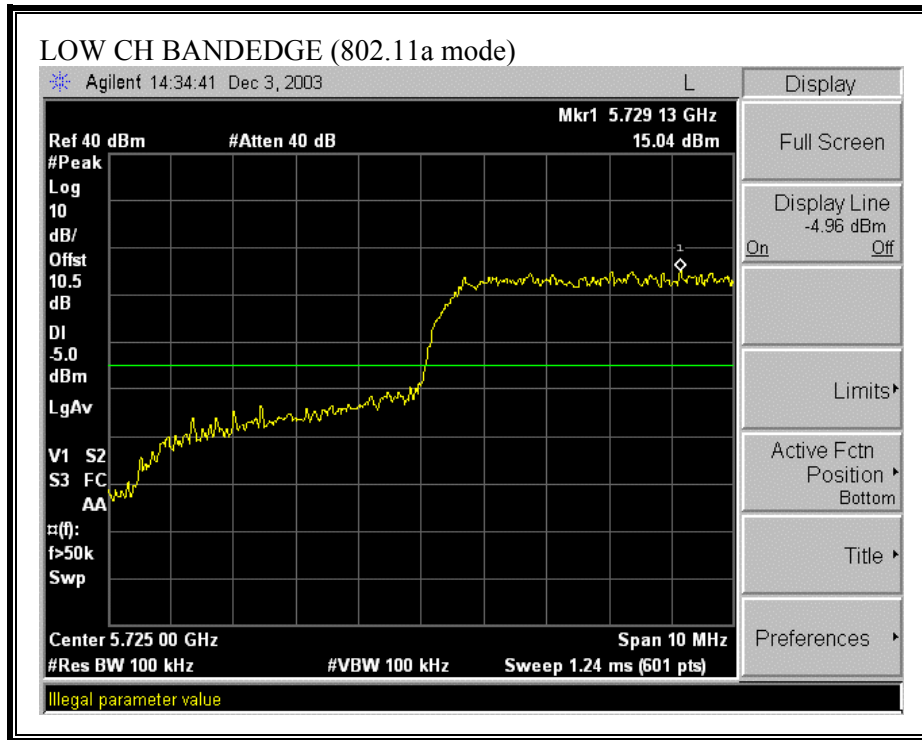




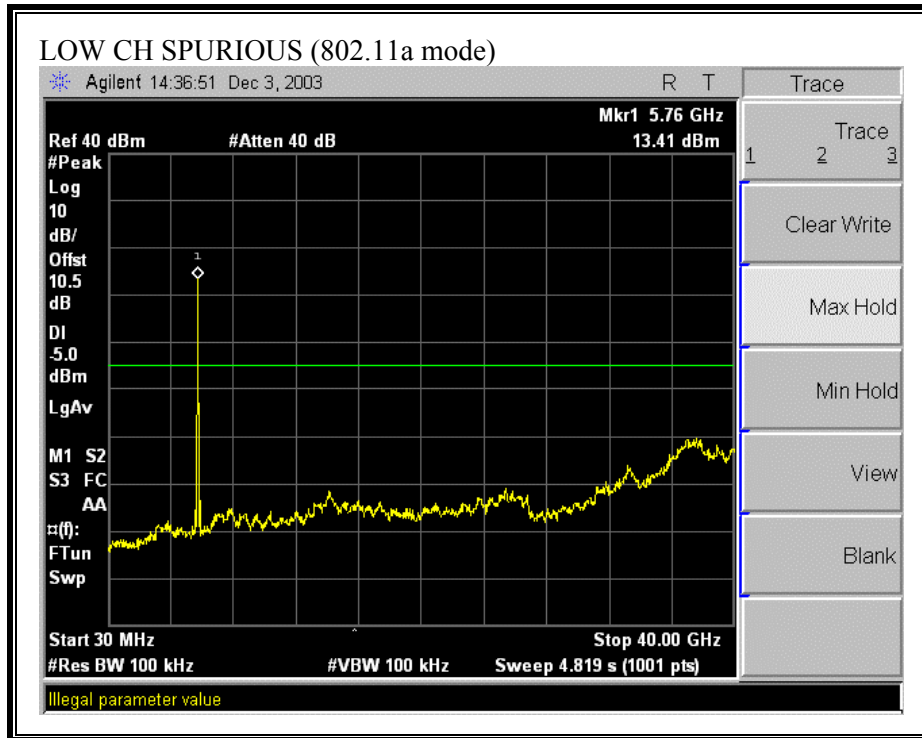



**SPURIOUS EMISSIONS, MID CHANNEL (802.11a MODE)**

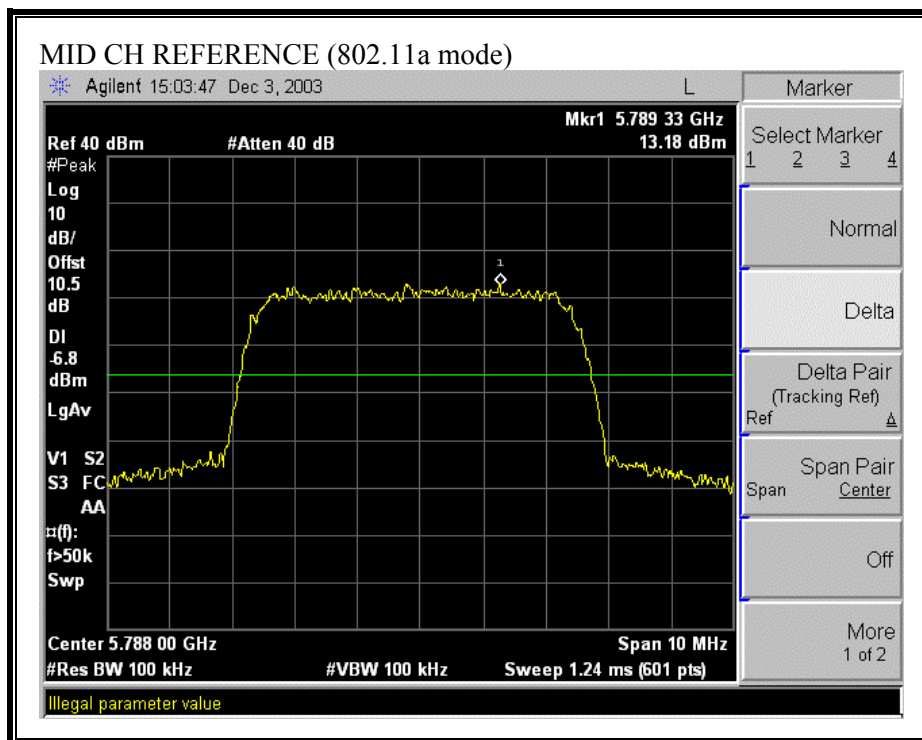

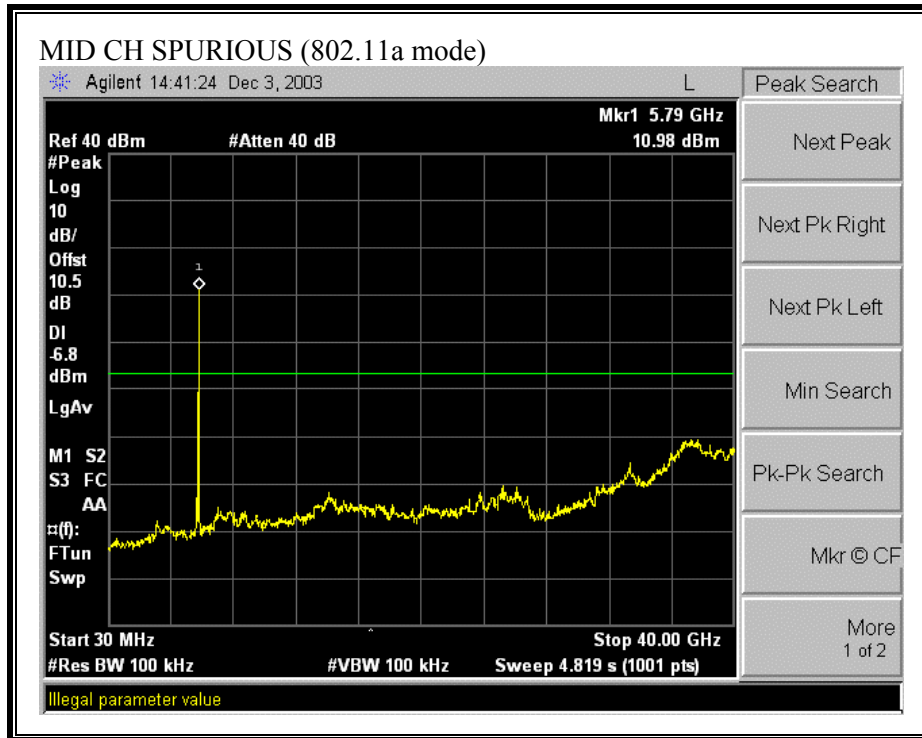

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11a MODE)**

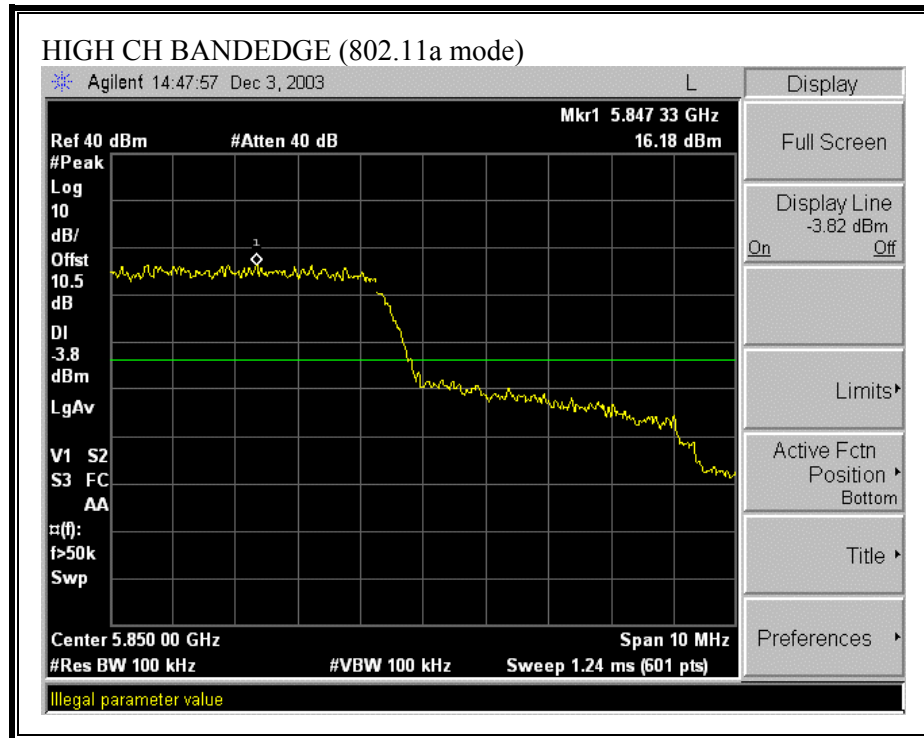

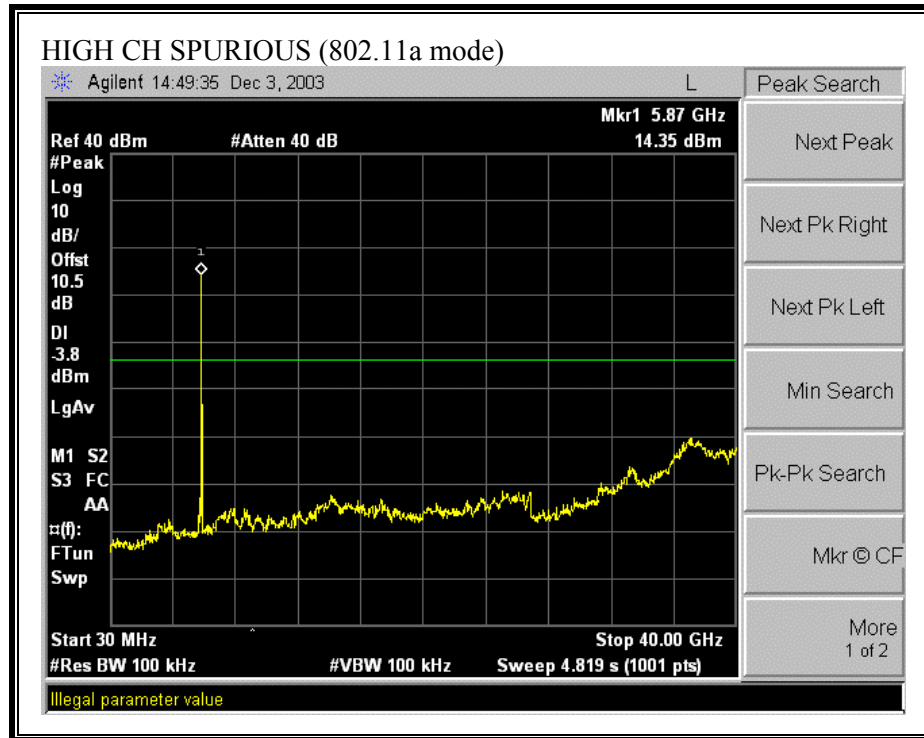

## 7.8. RADIATED EMISSIONS

### 7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels of the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels of the 5.8 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **RESULTS**

No non-compliance noted:



## 7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ

### HARMONICS AND SPURIOUS EMISSIONS (a MODE)

07/28/04 High Frequency Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang

Project #:04U2749-1

Company: Aperto

EUT Descrip.: Packetwave point to point

EUT M/N: PW210, PW220, PW30

Test Target: FCC 15.247

Mode Oper: Tx

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T86 Miteq 924341	Agilent E4446A Analyzer		FCC 15.209

Hi Frequency Cables

☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Peak Measurements:

1 MHz Resolution Bandwidth  
1MHz Video Bandwidth

Average Measurements:

1 MHz Resolution Bandwidth  
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Low Ch, 5728MHz															
11.450	9.8	50.5	37.3	38.7	4.7	-44.5	0.0	1.0	50.3	37.1	74.0	54.0	-23.7	-16.9	V
17.184	9.8	50.6	37.5	41.2	6.0	-48.5	0.0	1.0	50.3	37.2	74.0	54.0	-23.7	-16.8	V, noise floor
11.450	9.8	51.2	37.7	38.7	4.7	-44.5	0.0	1.0	51.0	37.5	74.0	54.0	-23.0	-16.5	H
17.184	9.8	52.0	38.0	41.2	6.0	-48.5	0.0	1.0	51.7	37.7	74.0	54.0	-22.3	-16.3	H, noise floor
Mid Ch, 5788MHz															
11.569	9.8	48.2	37.1	38.8	4.7	-44.7	0.0	1.0	48.0	36.9	74.0	54.0	-26.0	-17.1	V
17.364	9.8	50.2	39.5	42.3	6.1	-48.3	0.0	1.0	51.2	40.5	74.0	54.0	-22.8	-13.5	V, noise floor
11.569	9.8	49.5	37.3	38.8	4.7	-44.7	0.0	1.0	49.3	37.1	74.0	54.0	-24.7	-16.9	H
17.569	9.8	50.9	39.6	43.5	6.1	-48.1	0.0	1.0	53.5	42.2	74.0	54.0	-20.5	-11.8	H, noise floor
High Ch, 5847MHz															
11.694	9.8	49.7	37.4	38.9	4.7	-44.9	0.0	1.0	49.4	37.1	74.0	54.0	-24.6	-16.9	V
17.576	9.8	48.0	37.1	43.6	6.1	-48.0	0.0	1.0	50.7	39.7	74.0	54.0	-23.3	-14.3	V, noise floor
11.694	9.8	50.1	37.4	38.9	4.7	-44.9	0.0	1.0	49.8	37.1	74.0	54.0	-24.2	-16.9	H
17.576	9.8	49.0	37.3	43.6	6.1	-48.0	0.0	1.0	51.6	39.9	74.0	54.0	-22.4	-14.1	H, noise floor
Note: No emissions were found up to 40GHz															

f Measurement Frequency

Dist Distance to Antenna

Read Analyzer Reading

AF Antenna Factor

CL Cable Loss

Amp Preamp Gain

D Corr Distance Correct to 3 meters

Avg Average Field Strength @ 3 m

Peak Calculated Peak Field Strength

HPF High Pass Filter

Avg Lim Average Field Strength Limit


Pk Lim Peak Field Strength Limit

Avg Mar Margin vs. Average Limit

Pk Mar Margin vs. Peak Limit

### 7.8.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

RADIATED EMISSION DATA											
						<b>Project #:</b> 04u2749-1 <b>Report #:</b> 040727C1 <b>Date &amp; Time:</b> 07/27/04 10:09 AM <b>Test Engr:</b> Chin Pang					
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
<b>Company:</b> Aperto Networks <b>EUT Description:</b> 5GHZ Broadband Wireless Point to Point <b>Test Configuration :</b> EUT/Support Equipment <b>Type of Test:</b> FCC Class B <b>Mode of Operation:</b> Tx/Rx											
<a href="#">&lt;&lt; Main Sheet</a>											
Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
533.33	50.96	18.45	3.75	27.70	45.46	46.00	-0.54	3mV	0.00	2.00	QP
533.33	50.30	18.45	3.75	27.70	44.80	46.00	-1.20	3mH	0.00	3.00	QP
266.66	55.10	13.58	2.53	26.46	44.75	46.00	-1.25	3mH	0.00	1.50	P
800.00	45.60	21.76	4.69	27.43	44.62	46.00	-1.38	3mV	0.00	1.00	P
800.00	44.80	21.76	4.69	27.43	43.82	46.00	-2.18	3mH	0.00	1.50	QP
400.00	51.30	16.25	3.17	27.13	43.59	46.00	-2.41	3mH	0.00	2.00	P
6 Worst Data											

## 7.9. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

No non-compliance noted:


# **6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	57.27	--	44.11	0.00	65.71	55.71	-8.44	-11.60	L1
0.26	46.26	--	34.67	0.00	62.86	52.86	-16.60	-18.19	L1
2.92	39.00	--	31.20	0.00	56.00	46.00	-17.00	-14.80	L1
0.16	55.66	--	45.28	0.00	65.71	55.71	-10.05	-10.43	L2
0.73	41.46	--	39.21	0.00	56.00	46.00	-14.54	-6.79	L2
6.06	44.95	--	42.10	0.00	60.00	50.00	-15.05	-7.90	L2
6 Worst Data									

## LINE 1 RESULTS

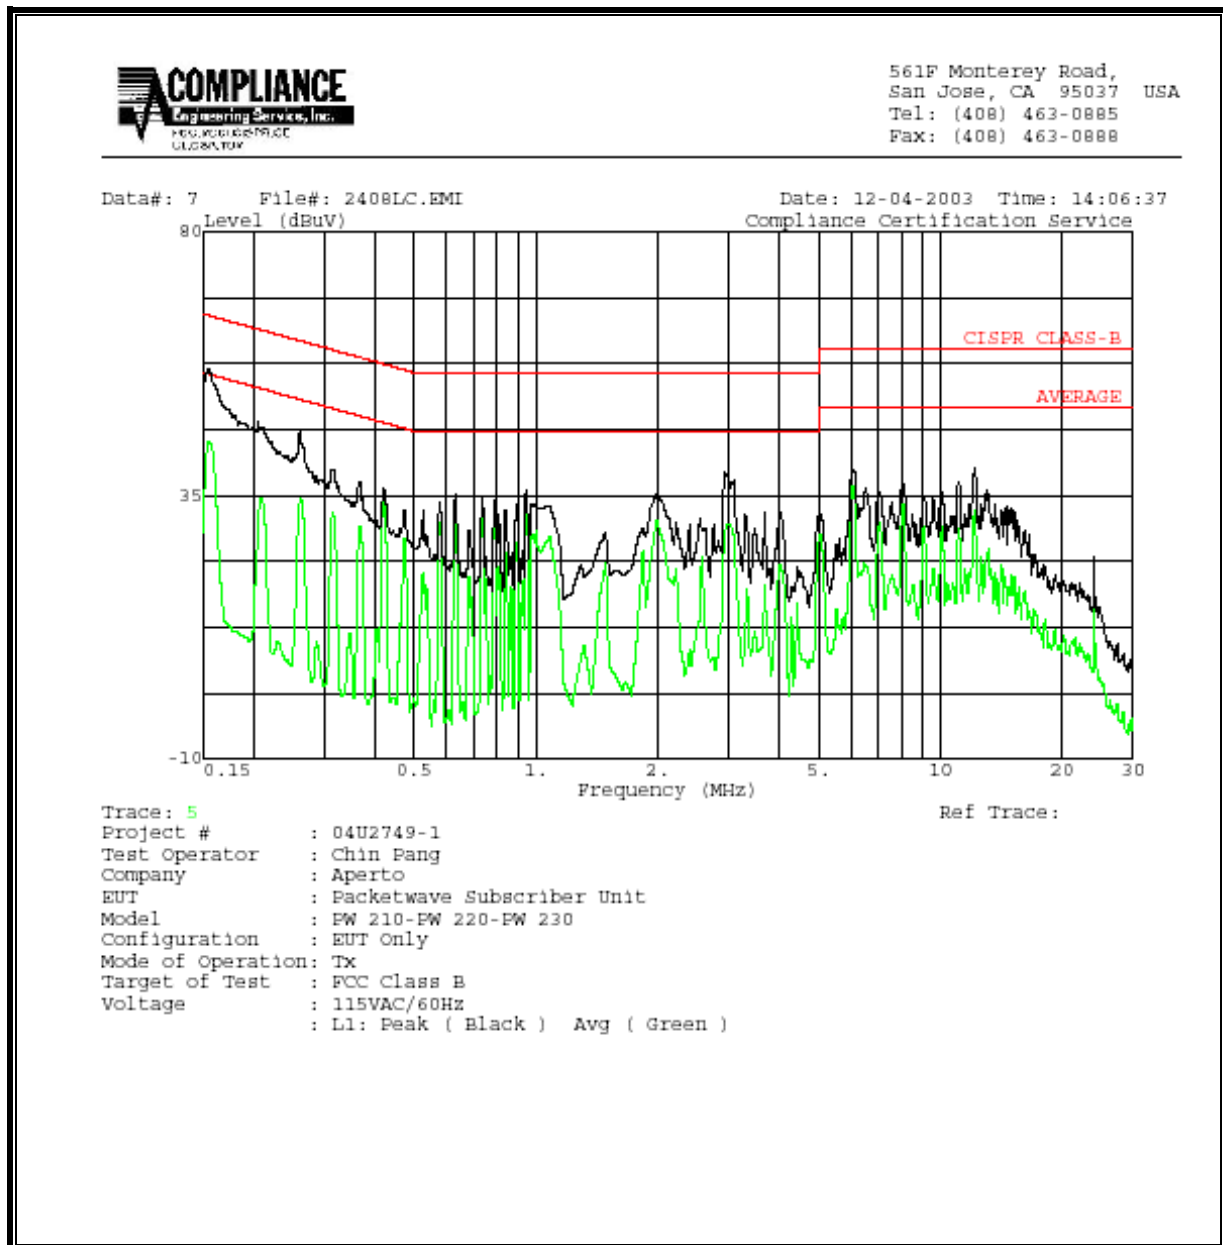


**LINE 2 RESULTS**

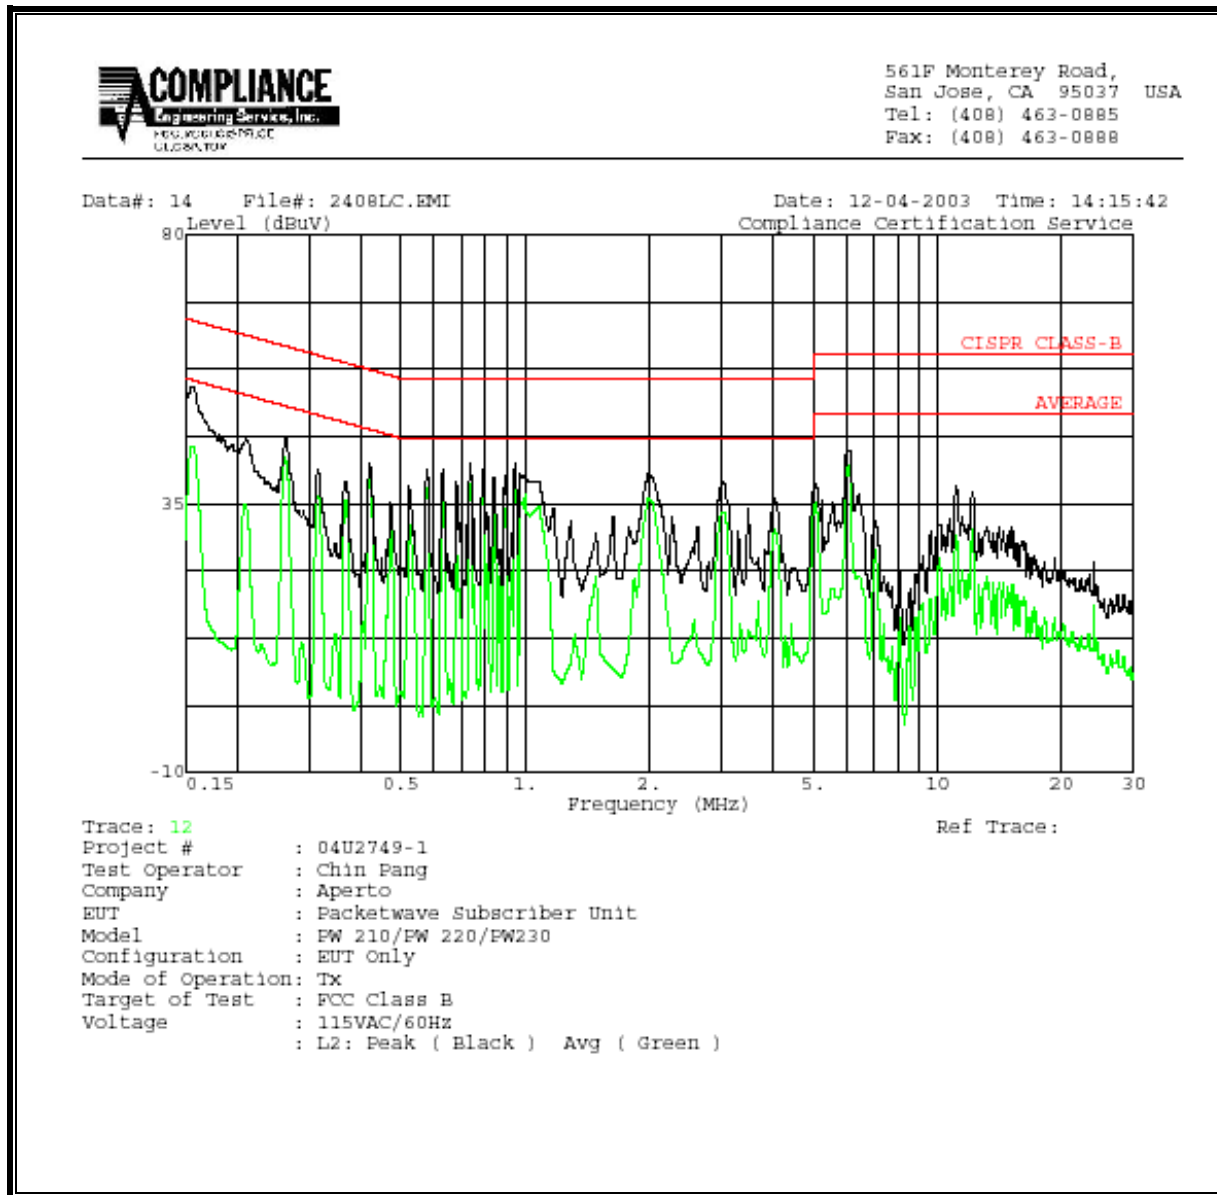

## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

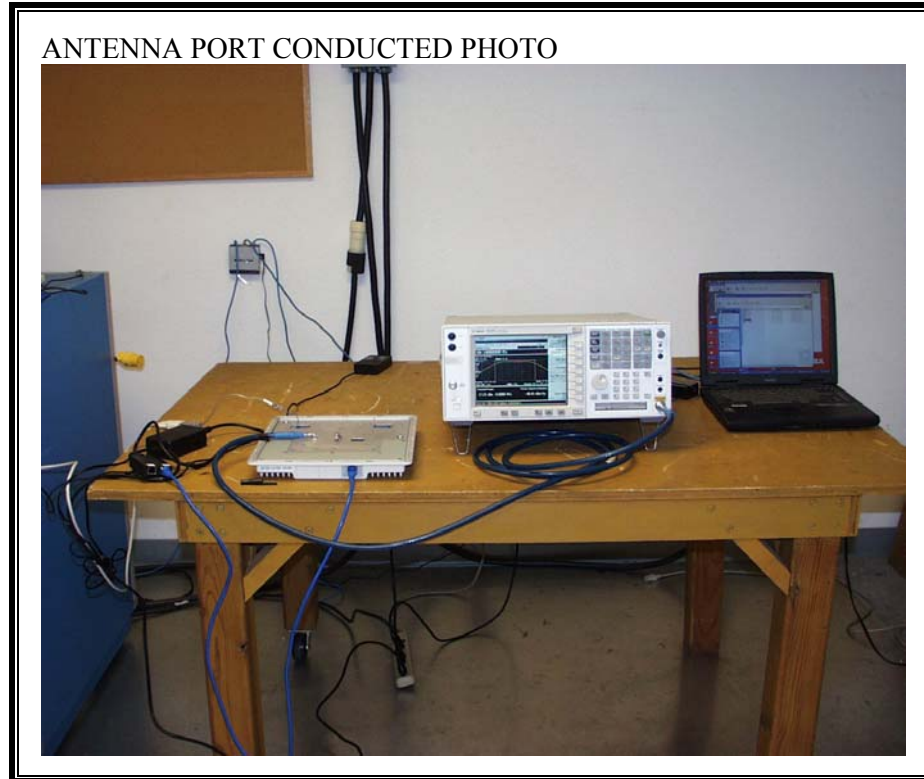


**RADIATED RF MEASUREMENT SETUP**


RADIATED FRONT PHOTO





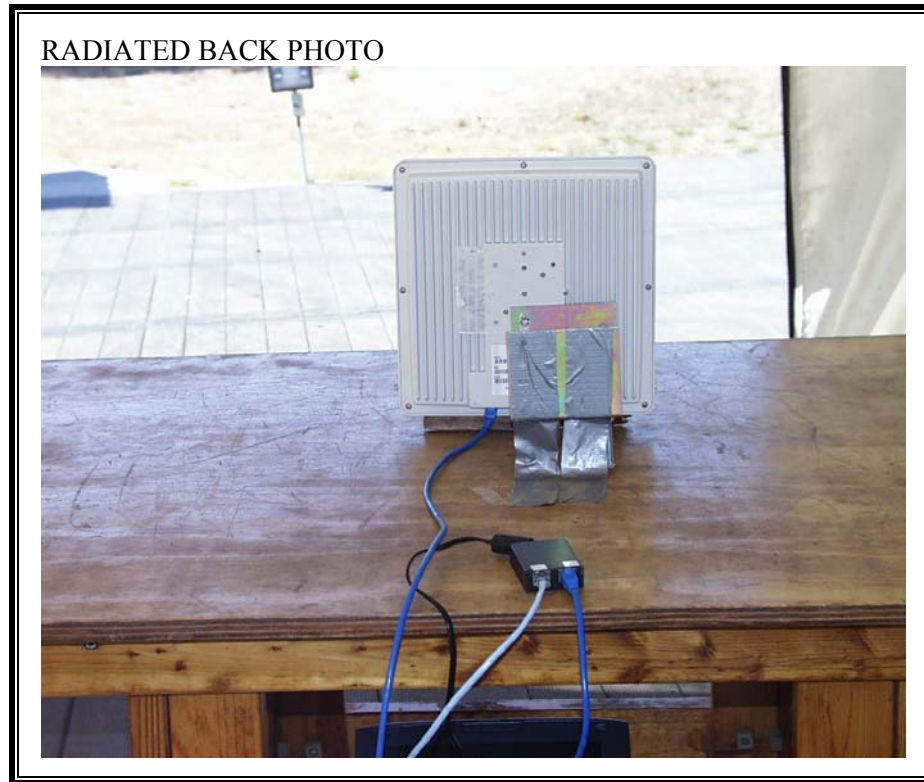

**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

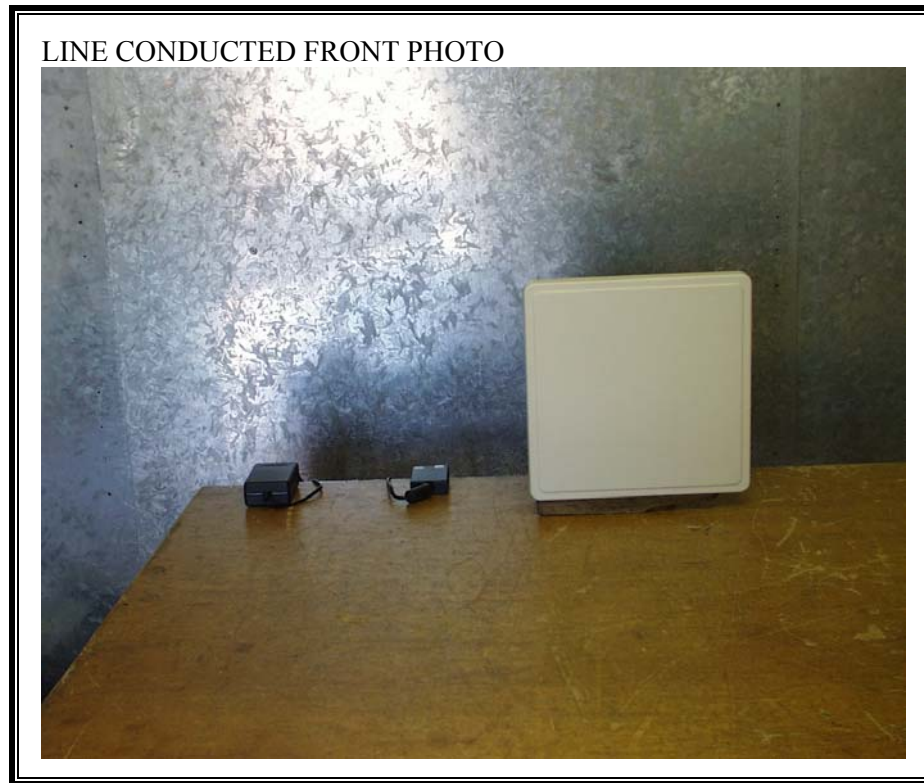

LINE CONDUCTED BACK PHOTO



**END OF REPORT**