


PROPRIETARY AND CONFIDENTIAL INFORMATION

**RF Remote
Serial Data Protocol**

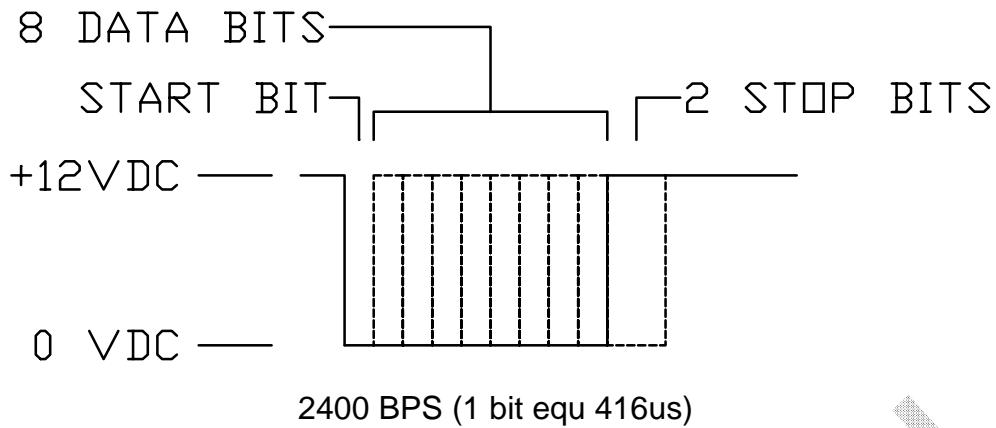

The control string is transmitted as seven (7) bytes, 2400 bps, 8 data bits, 2 stop bits. The function of each byte is as follows:

Byte 1	8 data bits, 1 start bit & 2 stop bits = 3
Byte 2	0 data bits, 1 start bit & 2 stop bits = 3
Byte 3	0 data bits, 1 start bit & 2 stop bits = 3
Byte 4	0 data bits, 1 start bit & 2 stop bits = 3
Byte 5	0 data bits, 1 start bit & 2 stop bits = 3
Byte 6	2 data bits, 1 start bit & 2 stop bits = 5
Byte 7	0 data bits, 1 start bit & 2 stop bits = 3
Byte 8	0 data bits, 1 start bit & 2 stop bits = 3

Total number of possible high bits
in any 100 ms period ----- 34

Duty cycle = 14.17%