

20130220_SystemPerformanceCheck-D2450V2 SN 706

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.008$ mho/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1352; Calibrated: 10/8/2012
- Probe: EX3DV4 - SN3885; ConvF(6.8, 6.8, 6.8); Calibrated: 10/9/2012;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Body/Pin=100 mW/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 5.43 W/kg


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.351 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.83 W/kg

SAR(1 g) = 4.68 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 6.66 W/kg

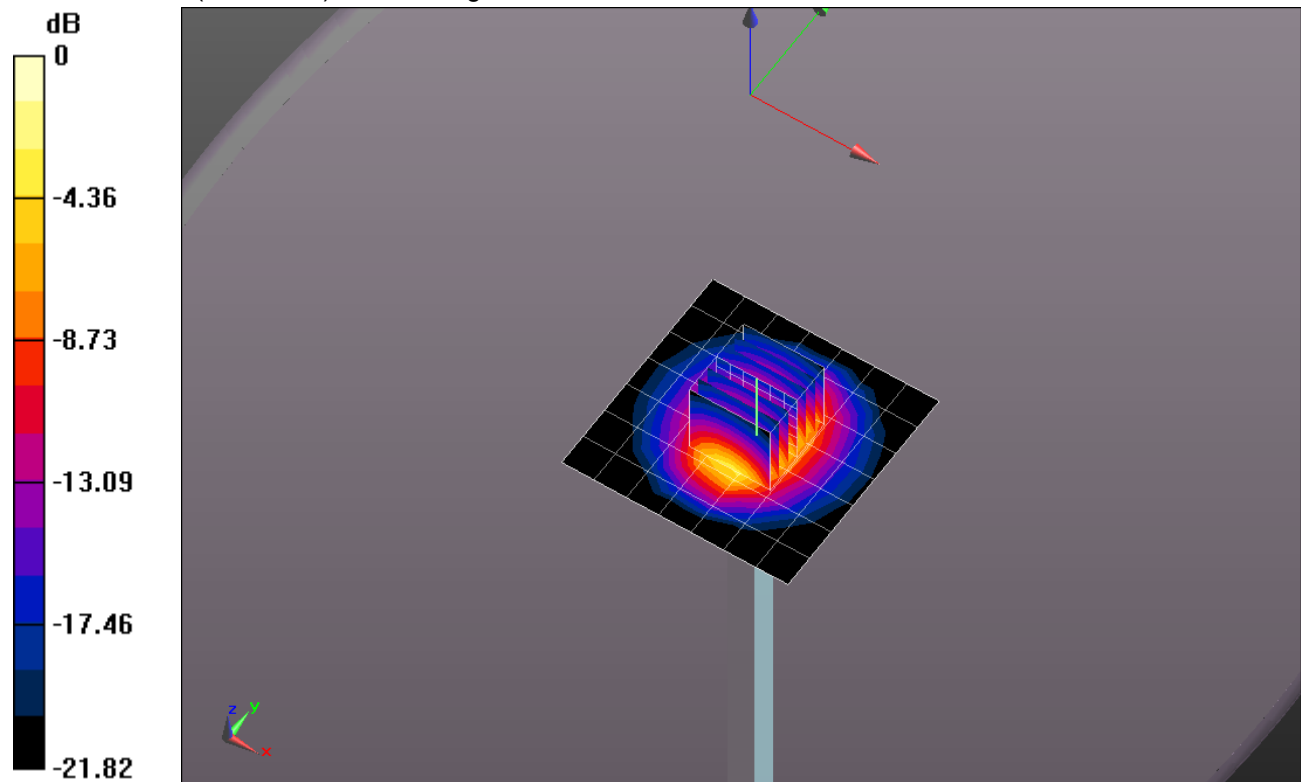


0 dB = 6.66 W/kg = 8.23 dBW/kg

20130220_SystemPerformanceCheck-D2450V2 SN 706

Frequency: 2450 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 6.42 W/kg

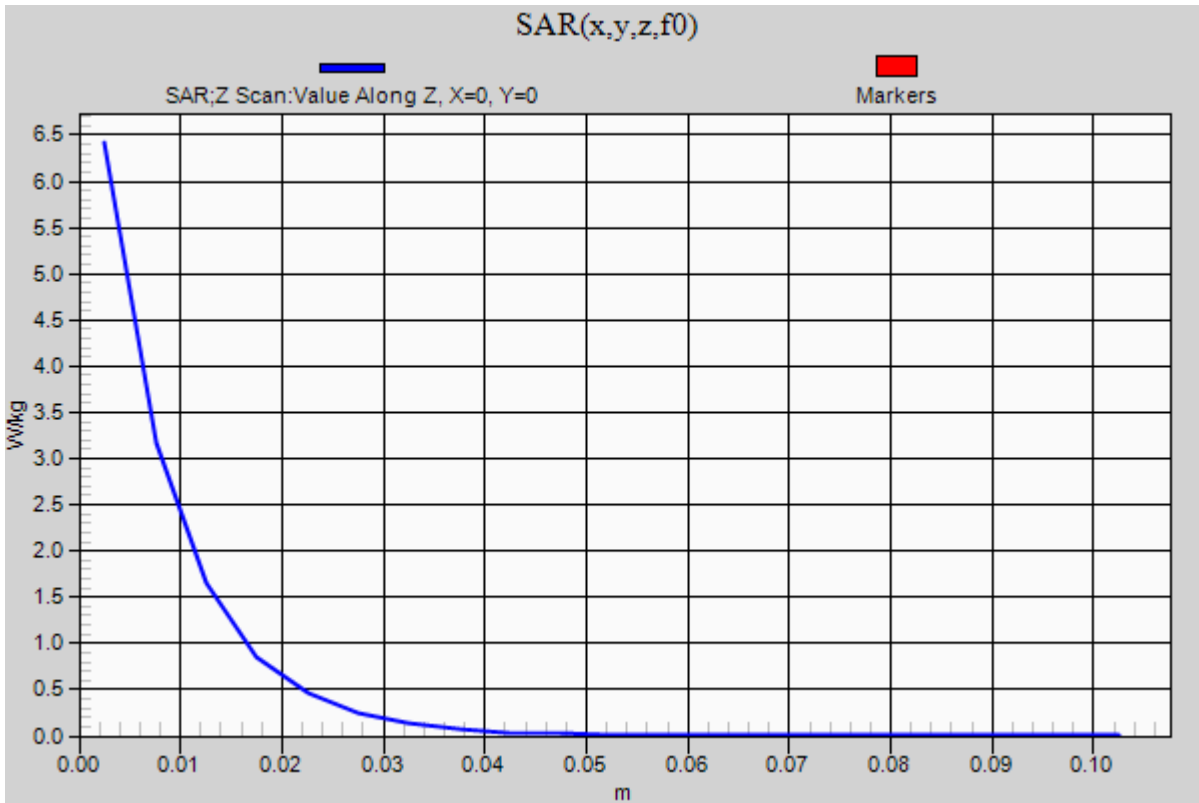

20130314_SystemPerformanceCheck-D2450V2 SN 706

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 51.921$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn500; Calibrated: 13/06/2012
- Probe: EX3DV3 - SN3531; ConvF(7.54, 7.54, 7.54); Calibrated: 15/11/2012;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELLI v4.0; Type: QDOVA001BB; Serial: TP:xxxx

Body/Pin=100 mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 59.505 V/m; Power Drift = -0.08 dB

Fast SAR: SAR(1 g) = 4.88 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (interpolated) = 7.15 W/kg


Body/Pin=100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.505 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 9.91 W/kg

SAR(1 g) = 4.81 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 6.81 W/kg

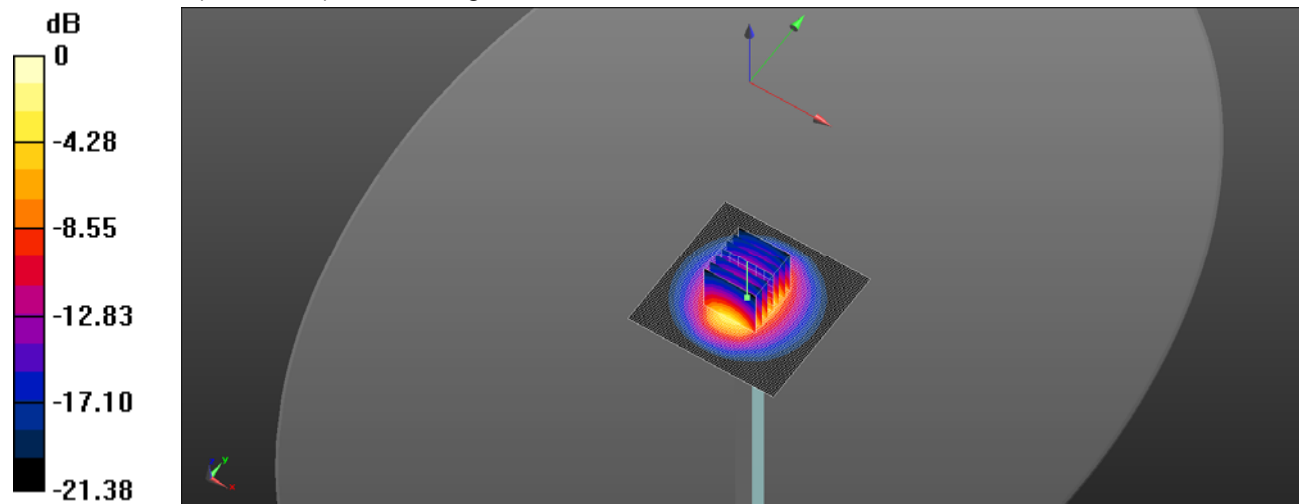

0 dB = 6.81 W/kg = 8.33 dBW/kg

20130314_SystemPerformanceCheck-D2450V2 SN 706

Frequency: 2450 MHz; Duty Cycle: 1:1

Body/Pin=100 mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 6.75 W/kg

