

## Bluetooth

Frequency: 2402 MHz; Duty Cycle: 1:1.53993; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.891$  S/m;  $\epsilon_r = 52.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn500; Calibrated: 13/06/2012
- Probe: EX3DV3 - SN3531; ConvF(7.54, 7.54, 7.54); Calibrated: 15/11/2012;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx

**Rear/Ver 3.0+EDR, GFSK/Channel 0/Area Scan (13x10x1):** Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0707 W/kg

**Rear/Ver 3.0+EDR, GFSK/Channel 0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.691 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.213 W/kg

**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.028 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.118 W/kg

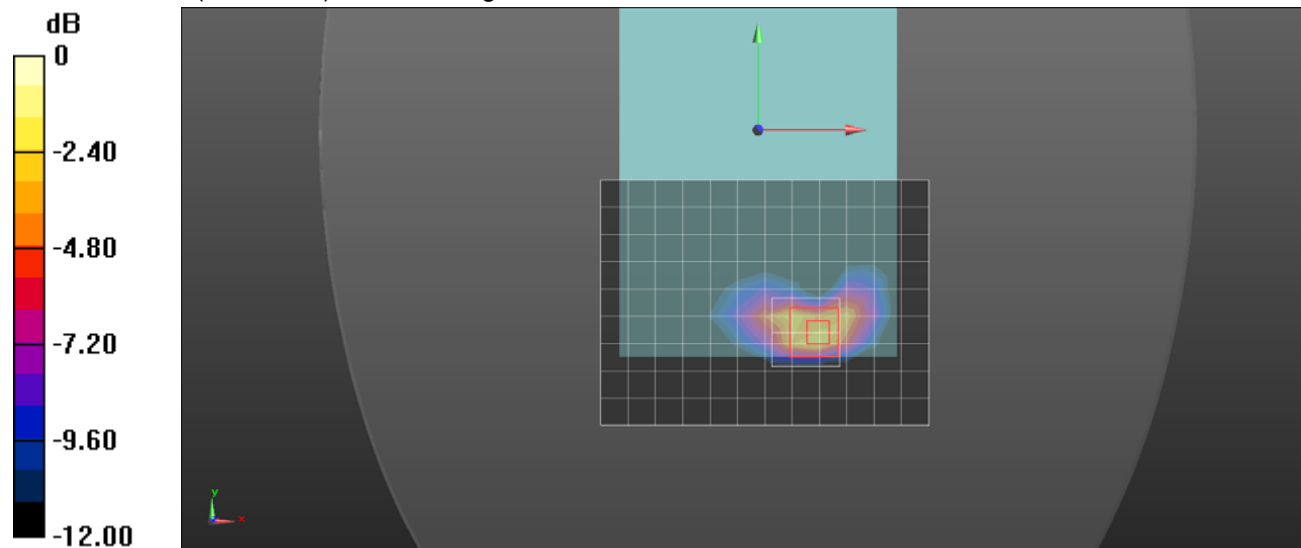

0 dB = 0.118 W/kg = -9.28 dBW/kg