

**FCC PART 15 SUBPART C**  
**EMI MEASUREMENT AND TEST REPORT**

For  
**Arescom, Inc.**

3541 Gateway Blvd.  
Fremont, CA 94538

**FCC ID: PT2AG2560**

June 21, 2002

<b>This Report Concerns:</b> <input checked="checked" type="checkbox"/> Original Report	<b>Equipment Type:</b> ADSL Wireless Router
<b>Test Engineer:</b> Benjamin Jing	
<b>Report No.:</b> R0205068	
<b>Test Date:</b> May 6, 2002	
<b>Reviewed By:</b> Jeff Lee	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>1 - GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
1.2 OBJECTIVE .....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
1.5 TEST EQUIPMENT LIST .....	5
1.6 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	5
1.7 EXTERNAL I/O CABLING LIST AND DETAILS .....	5
<b>2 - SYSTEM TEST CONFIGURATION AND REQUIREMENT.....</b>	<b>6</b>
2.1 DESCRIPTION OF TEST CONFIGURATION .....	6
2.2 EQUIPMENT MODIFICATION .....	6
2.3 CONFIGURATION OF TEST SYSTEM.....	6
2.4 TEST SETUP BLOCK DIAGRAM .....	6
<b>3 - SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4 - CONDUCTED OUTPUT POWER.....</b>	<b>8</b>
4.1 STANDARD APPLICABLE .....	8
4.2 MEASUREMENT PROCEDURE.....	8
4.3 MEASUREMENT RESULT .....	8
4.4 TEST EQUIPMENT .....	8
<b>5 - SPURIOUS EMISSION.....</b>	<b>10</b>
5.1 STANDARD APPLICABLE .....	10
5.2 MEASUREMENT PROCEDURE.....	10
5.3 MEASUREMENT DATA.....	10
<b>6 - 6 DB BANDWIDTH OF EMISSIONS .....</b>	<b>14</b>
6.1 STANDARD APPLICABLE .....	14
6.2 MEASUREMENT PROCEDURE.....	14
6.3 MEASUREMENT DATA.....	14
<b>7 - 100 KHZ BANDWIDTH OF BAND EDGES .....</b>	<b>16</b>
7.1 STANDARD APPLICABLE .....	16
7.2 MEASUREMENT PROCEDURE.....	16
7.3 TEST RESULTS .....	16
<b>8 - POWER DENSITY .....</b>	<b>18</b>
8.1 STANDARD APPLICABLE .....	18
8.2 MEASUREMENT PROCEDURE.....	18
8.3 TEST RESULTS .....	18
<b>9 - RADIATED EMISSION.....</b>	<b>20</b>
9.1 MEASUREMENT UNCERTAINTY .....	20
9.2 EUT SETUP.....	20
9.3 SPECTRUM ANALYZER SETUP .....	20
9.4 TEST PROCEDURE .....	21
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	21
9.6 SUMMARY OF TEST RESULTS .....	21
<b>10 - CONDUCTED EMISSIONS.....</b>	<b>23</b>
10.1 MEASUREMENT UNCERTAINTY .....	23
10.2 EUT SETUP.....	23
10.3 SPECTRUM ANALYZER SETUP .....	23
10.4 TEST PROCEDURE .....	23
10.5 SUMMARY OF TEST RESULTS .....	24
10.6 CONDUCTED EMISSIONS TEST DATA .....	24
10.7 PLOT OF CONDUCTED EMISSIONS TEST DATA .....	24

**11 - ANTENNA REQUIREMENT.....25**

    11.1 STANDARD APPLICABLE .....25

    11.2 ANTENNA CONNECTED CONSTRUCTION .....25

**12 - RF SAFETY REQUIREMENTS TO 2.1091 .....26**

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

Arescom, Inc.'s product, model: AG2560/2561 or the "EUT" as referred to in this report is an ADSL wireless router which measures approximately 5.75" L x 8.00" W x 1.50" H.

The EUT utilized Arescom AC/DC power adapter, M/N: JOD-48U.

*\* The test data was good for test sample only. It may have deviation for other product sample.*

### 1.2 Objective

This type approval report is prepared on behalf of Arescom, Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for peak output power, antenna requirement, 6 dB bandwidth, power density, 100 kHz bandwidth of band edges, RF exposure of emission, conducted and spurious radiated emission.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2000, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.4 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2000.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

**1.5 Test Equipment List**

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8564E	08303	12/6/02
HP	Spectrum Analyzer	8593B	2919A00242	12/20/02
HP	Amplifier	8349B	2644A02662	12/20/02
HP	Quasi-Peak Adapter	85650A	917059	12/6/02
HP	Amplifier	8447E	1937A01046	12/6/02
A.H. System	Horn Antenna	SAS0200/571	261	12/27/02
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/02
Com-Power	Biconical Antenna	AB-100	14012	11/2/02
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/02
Com-Power	LISN	LI-200	12208	12/20/02
Com-Power	LISN	LI-200	12005	12/20/02
BACL	Data Entry Software	DES1	0001	12/20/02
Rohde & Schwarz	Signal Generator	SMIQ03B	1125.5555.03	7/10/02
Rohde & Schwarz	I/Q Modulation Generator	AMIQ	1110.2003.02	8/10/02

**1.6 Local Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number	FCC ID
Microsoft	Mouse	X04-72174	52463-OEM	DOC
Microsoft	KB	5121	753622030114	E5XKBM104M 10UC
ViewSonic	Monitor	VCDTS21477-1M	DP02301873	DOC
EVEREX	Modem	EV-945	None	None
HP	Printer	2225C+	2821S14783	DS16XU2225
eMachine	Desktop	GD38B-100-27852	None	DOC

**1.7 External I/O Cabling List and Details**

Cable Description	Length (M)	Port/From	To
Shielded Video Cable	1.0	VGA Port/Host	Monitor
Shielded Serial Cable	1.0	Serial Port/Host	Modem
Shielded Parallel Cable	1.5	Parallel Port/Host	Printer
Shielded Mouse Cable	1.2	P/S 2 Mouse Port/Host	Mouse
Shielded KB Cable	1.2	P/S 2 KB Port/Host	Keyboard
Shielded RJ45 Cable	1.0	RJ45 Port/Host	EUT

## 2 - SYSTEM TEST CONFIGURATION AND REQUIREMENT

### 2.1 Description of Test Configuration


The EUT was configured for testing in a typical fashion (as normally used by a typical user).

The test software, provided by the customer, was used to exercise during conducted and radiated testing. No other test data as transmitted to the EUT during testing.


### 2.2 Equipment Modification

No modification(s) was made by BACL Corp. to ensure EUT comply with applicable limits and requirements.

### 2.3 Configuration of Test System

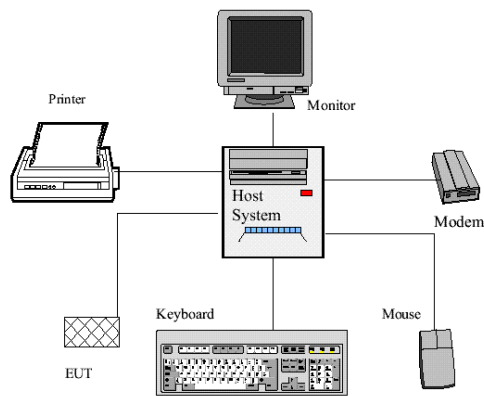

### 2.4 Test Setup Block Diagram

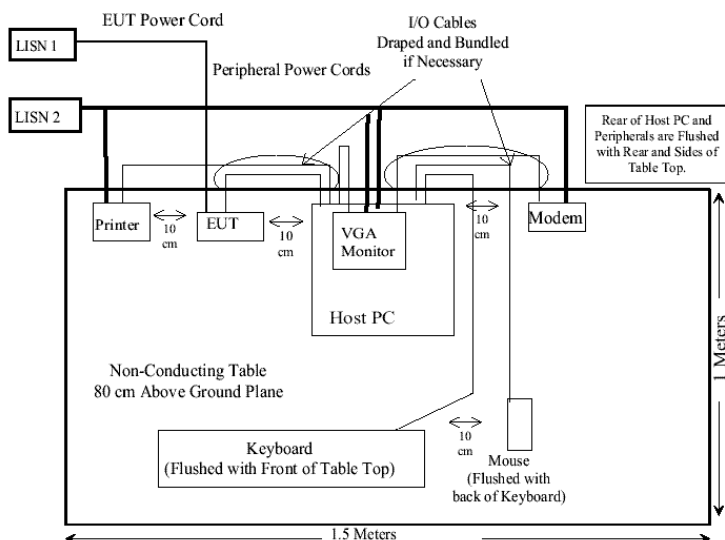

### 3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247 (b) (2)	Output Power	Compliant
§15.247 (a) (2)	6 dB Bandwidth	Compliant
§ 15.205 §15.209 (a) §15.209 (f)	Restricted Bands, Radiated Emission, Spurious Emission	Compliant
§ 2.1091	RF Safety Requirements	Compliant
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edges	Compliant
§15.247 (d)	Peak Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
§15.247 (e)	Processing Gain	Compliant
§ 2.1091	RF Safety Requirements	Compliant
§15.247 (e)	Processing Gain	Exempt
§15.207 (a)	Conducted Emission	Compliant

## 4 - CONDUCTED OUTPUT POWER

### 4.1 Standard Applicable

For frequency hopping, according to §15.247(b) (2), the maximum peak output power of the transmitter shall not exceed 1 Watt.

### 4.2 Measurement Procedure

1. Place the EUT on the bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a power meter.


### 4.3 Measurement Result

Channel No.	Test Data (dBm)	Test Data (mW)	Limit	Test Result
Low	16.31	42.76	≤1W	Compliant
Middle	16.18	41.50	≤1W	Compliant
High	15.94	39.26	≤1W	Compliant

### 4.4 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
Agilent	E4419B	GB40202891	4/8/03
Agilent	E4412A	US38486529	4/8/03



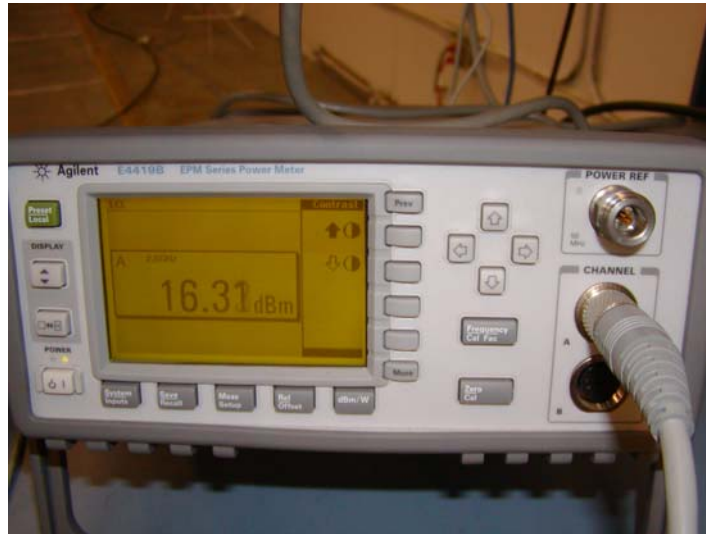

---

## 5 - SPURIOUS EMISSION

---

### 5.1 Standard Applicable


According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.



### 5.2 Measurement Procedure



1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 5.3 Measurement Data

Please refer to the appending for more information.

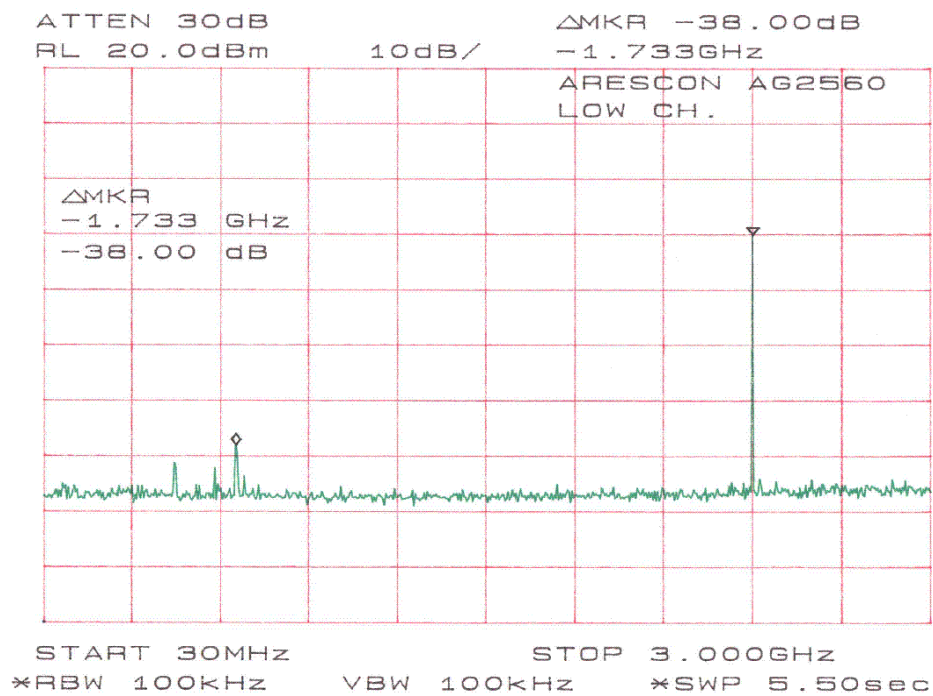

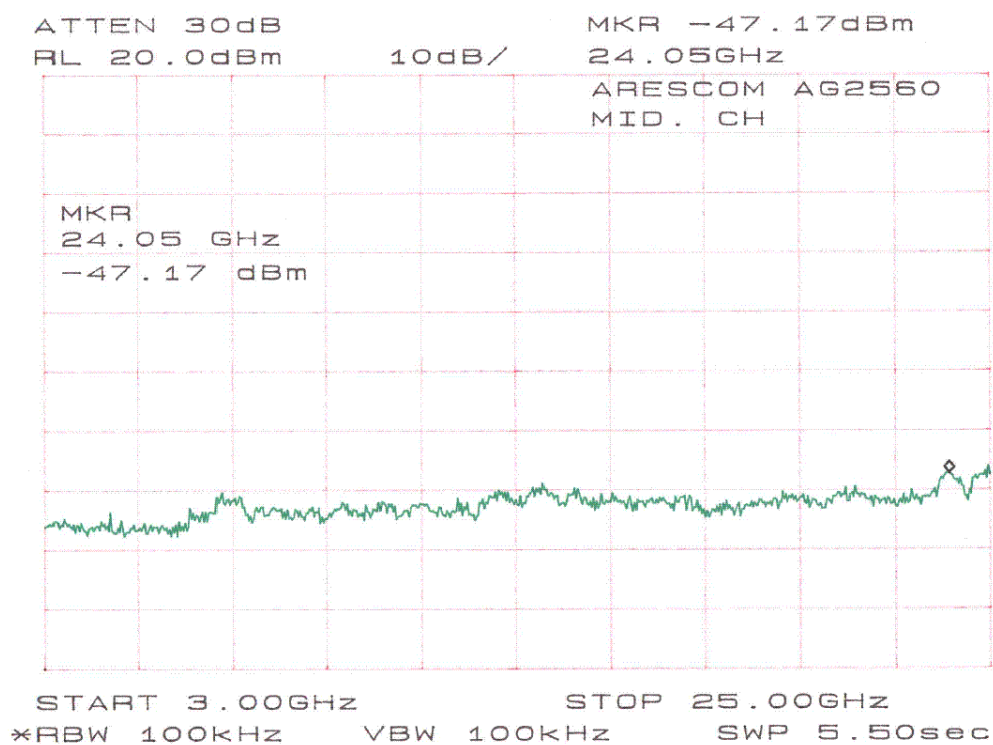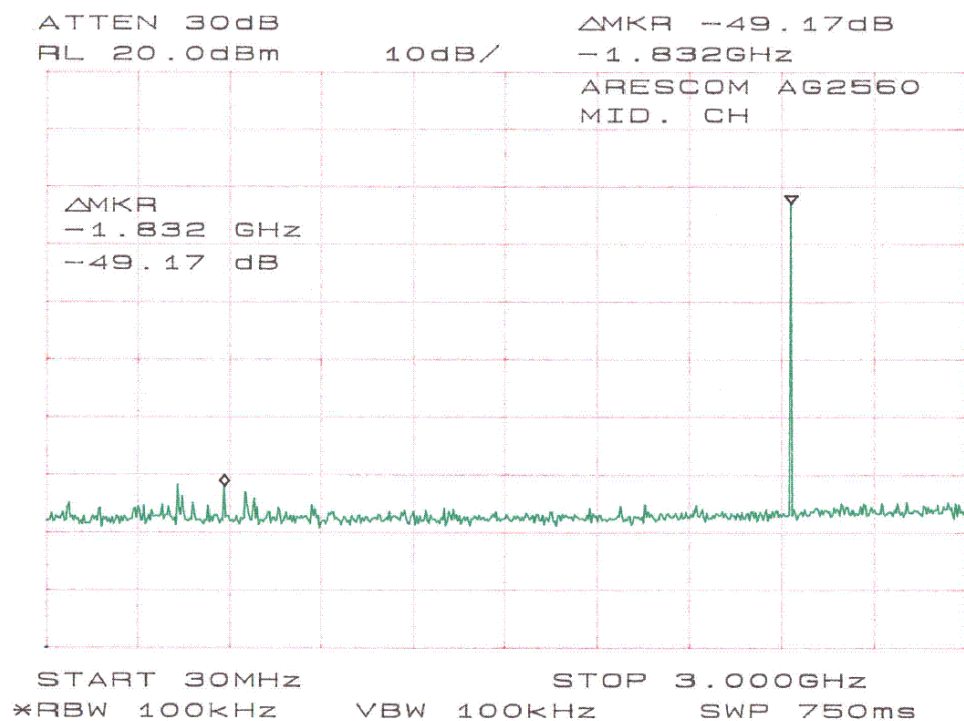

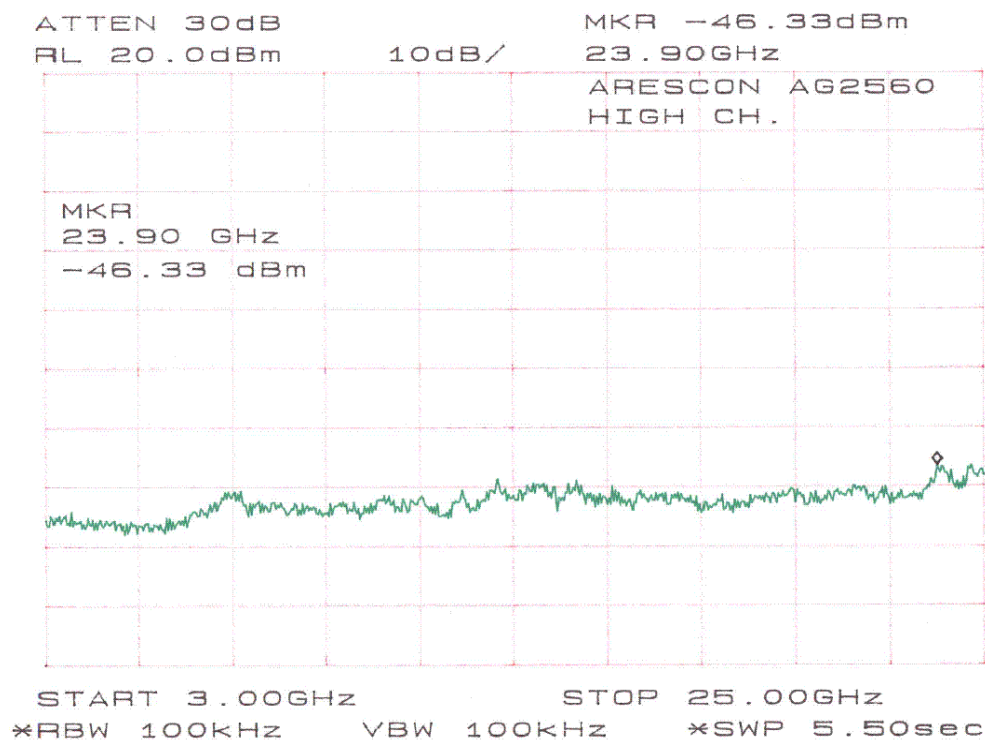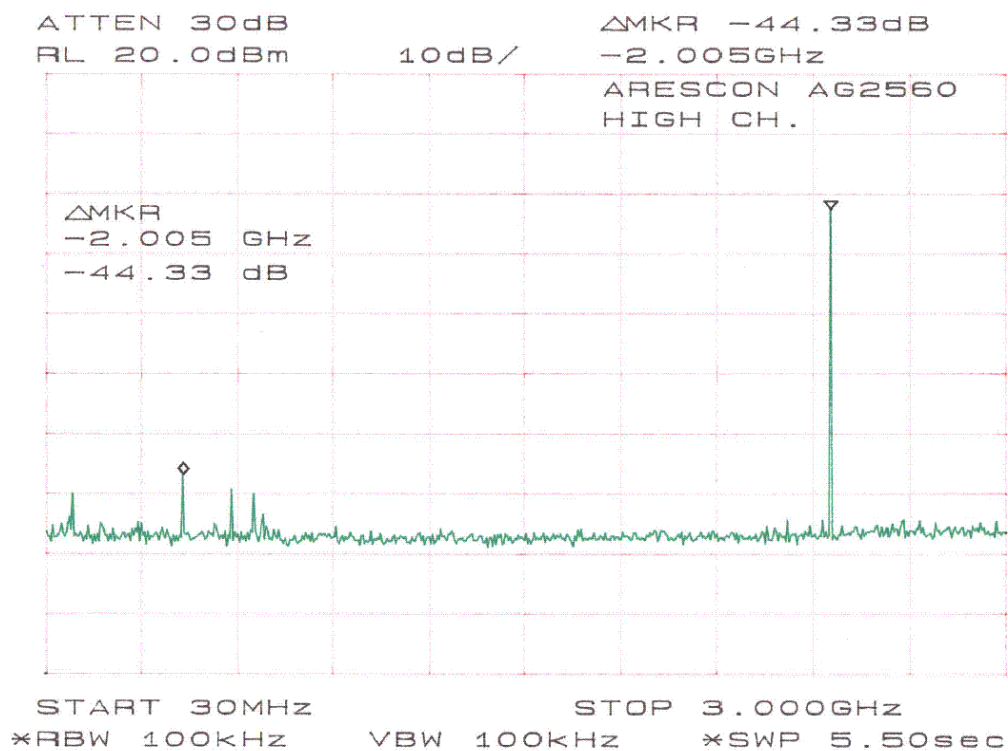

---

## **6 - 6 DB BANDWIDTH OF EMISSIONS**

---

### **6.1 Standard Applicable**

According to §15.247(a)(2), for direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### **6.2 Measurement Procedure**




1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### **6.3 Measurement Data**

Test Result: Pass. According to §15.247(a)(2), for direct sequence systems, the minimum 6dB bandwidth was greater than 500 kHz.

Please refer to the hereinafter plots for more details.



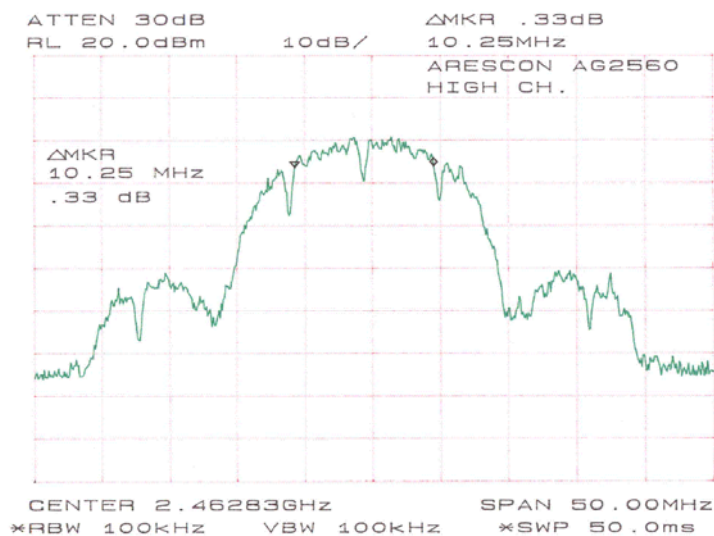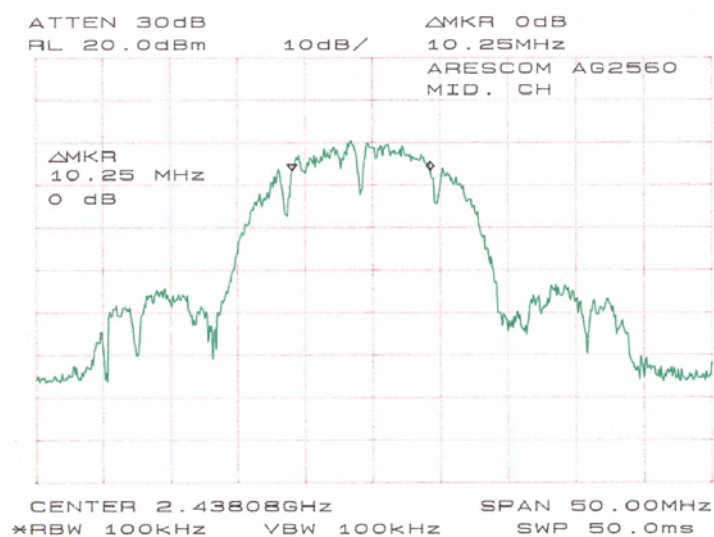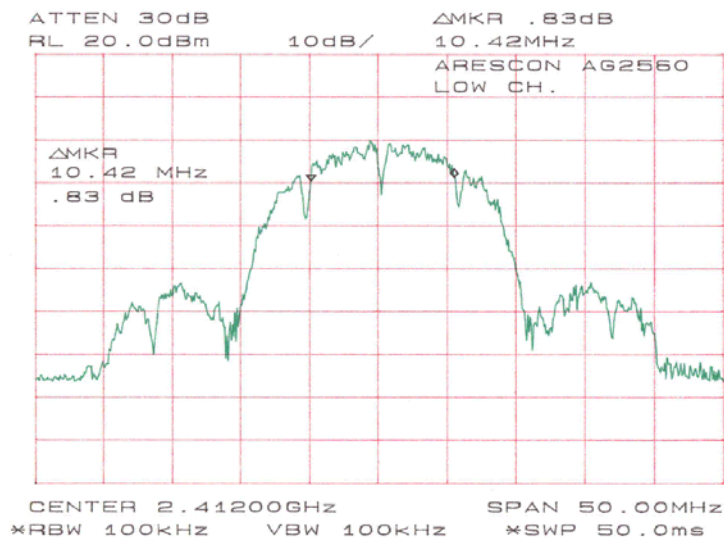

---

## 7 - 100 KHZ BANDWIDTH OF BAND EDGES

---

### 7.1 Standard Applicable

According to §15.247(c), if *any* 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

### 7.2 Measurement Procedure




1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 7.3 Test Results

Test Result: Pass.

Please refer to the hereinafter plots for more details.



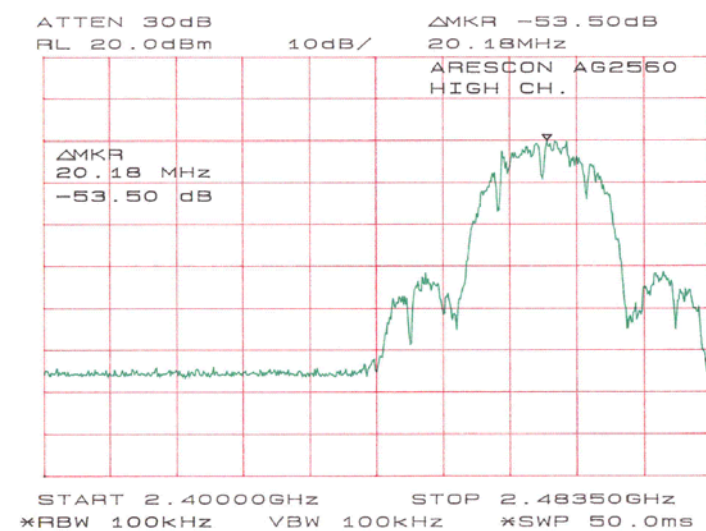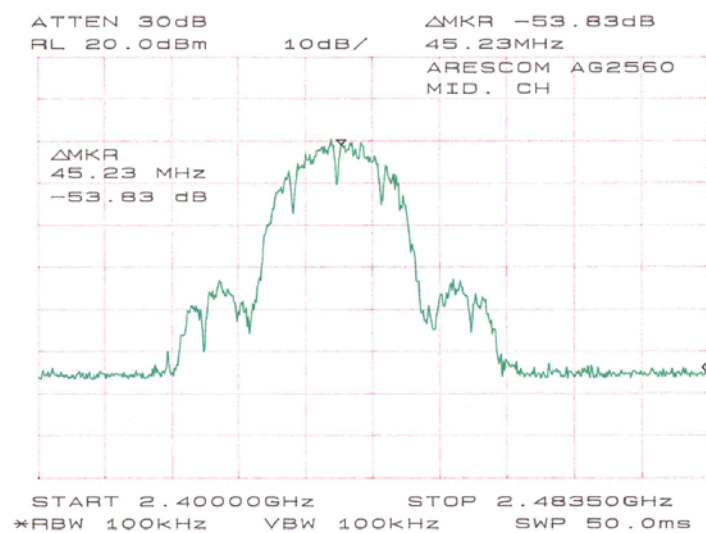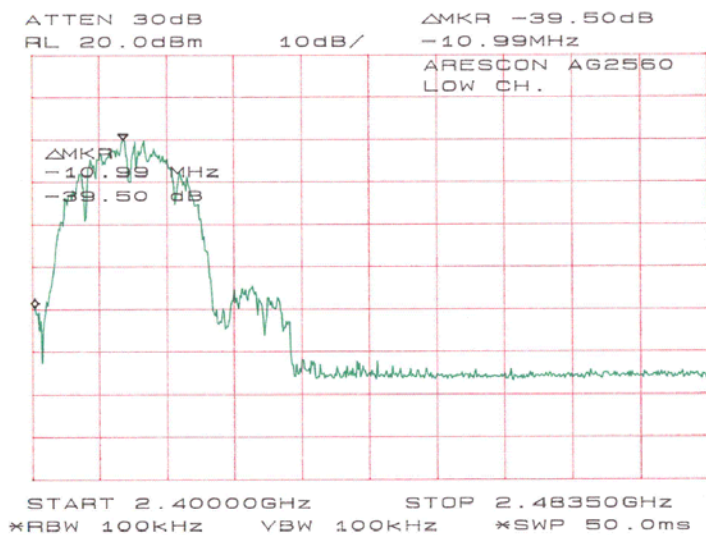

---

## 8 - POWER DENSITY

---

### 8.1 Standard Applicable



According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

### 8.3 Test Results

Please refer to the following plot(s) for more details.

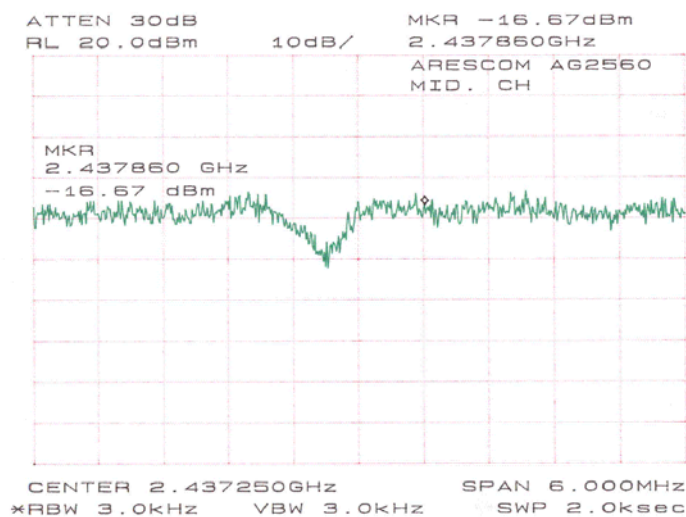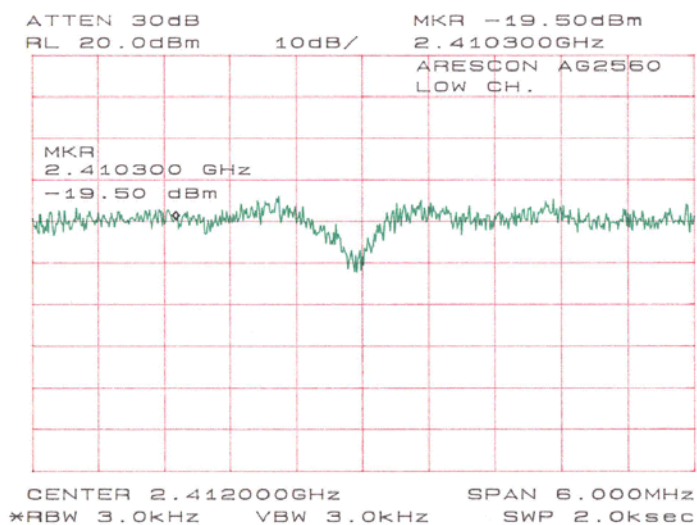

## 9 - RADIATED EMISSION

---

### 9.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### 9.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4-2000. The specification used was the FCC 15 Subpart C limits.

The EUT was put in the front of the test table. The host PC system was placed on the center of the back edge on the test table. The modem and the monitor were placed on the left side of the host PC system, and the printer was placed on the left side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The keyboard was placed directly in front of the monitor, flushed with the front of tabletop. The mouse was placed next to the keyboard, flushed with the back of keyboard.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 110 Vac/60Hz power source.

### 9.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 26GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency .....	30 MHz
Stop Frequency .....	26GHz
Sweep Speed .....	Auto
IF Bandwidth .....	1 MHz
Video Bandwidth .....	1 MHz
Quasi-Peak Adapter Bandwidth.....	120 kHz
Quasi-Peak Adapter Mode .....	Normal
Resolution Bandwidth.....	1MHz

## 9.4 Test Procedure

For the radiated emissions test, the Host PC system and all support equipment power cords were connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "Qp" in the data table.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Subpart C. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Subpart C Limit}$$

## 9.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207 and 15.247, and had the worst margin of:

-4.9 (AVG) dBμV at 4824.00 MHz in the Vertical polarization, 30 MHz to 26GHz, Low Channel, 3 meters

-6.1 (AVG) dBμV at 4884.00 MHz in the Vertical polarization, 30 MHz to 26GHz, Middle Channel, 3 meters

-6.9 (AVG) dBμV at 4944.00 MHz in the Vertical polarization, 30 MHz to 26GHz, High Channel, 3 meters

-0.8 dBμV at 282.62 MHz in the Vertical polarization, *Unintentional Emission*, 30 MHz to 1000MHz, 3 meters

**Unintentional Emission, 30MHz to 26GHz, 3 meters**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel											
4824.00	41.7	Avg.	160	1.0	V	32.5	4.9	30.0	49.1	54	-4.9
4824.00	39.4	Avg.	0	1.2	H	32.5	4.9	30.0	46.8	54	-7.2
Middle Channel											
4884.00	40.5	Avg.	270	1.2	V	32.5	4.9	30.0	47.9	54	-6.1
4874.00	39.6	Avg.	60	1.0	H	32.5	4.9	30.0	47.0	54	-7.0
High Channel											
4974.00	39.7	Avg.	180	1.2	V	32.5	4.9	30.0	47.1	54	-6.9
4974.00	36.2	Avg.	230	1.5	H	32.5	4.9	30.0	43.6	54	-10.4

\* There was no apparent emission after the 2<sup>nd</sup> harmonics.

**Unintentional Emission, 30MHz to 1000MHz, 3 meters**

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 CLASS B	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
282.62	49.8	270	2.5	H	14.6	5.8	25.0	45.2	46	-0.8
291.45	48.3	210	1.3	V	14.9	5.1	25.0	43.3	46	-2.7
291.45	47.6	180	1.5	H	14.9	5.1	25.0	42.6	46	-3.4
240.00	50.60	160	2.0	V	12.6	2.3	25.0	40.5	46	-5.5
240.00	49.3	180	2.5	H	12.6	2.3	25.0	39.2	46	-6.8
48.20	49.5	180	1.5	V	11.3	0.5	25.0	36.3	40	-3.7
48.20	49.2	130	2.0	H	11.3	0.5	25.0	36.0	40	-4.0

## 10 - CONDUCTED EMISSIONS

---

### 10.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### 10.2 EUT Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4-2000 measurement procedure. The specification used was FCC Class B limits.

The EUT was connected to a 120Vac/60Hz power source and it was connected to the host PC system. The host PC was placed on the center back edge of the test table with the monitor on its top. The printer was placed on one side of the host and the modem on the other side. The rear of the EUT and the peripherals was placed flushed with the rear of the tabletop.

The keyboard was placed directly in front of the monitor. The mouse was next to the keyboard and flushed with the rear of the test table.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundled if necessary.

### 10.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency.....	450 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode.....	Normal

### 10.4 Test Procedure

During the conducted emission test, the power cord of the EUT was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within  $-4$  dB $\mu$ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

## 10.5 Summary of Test Results

According to the data in section 12.6, the EUT complied with the FCC Conducted margin for a Class B device and these test results is deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, with the *worst* margin reading of:


-2.7 dB $\mu$ V at 0.695 MHz in the Neutral mode, 0.45-30MHz

## 10.6 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB $\mu$ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
0.695	45.3	QP	Neutral	48	-2.7
0.720	44.7	QP	Line	48	-3.3
0.840	34.6	QP	Neutral	48	-13.4
1.190	34.5	QP	Line	48	-13.5
26.320	33.9	QP	Line	48	-14.1
26.100	32.8	QP	Neutral	48	-15.2

## 10.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.

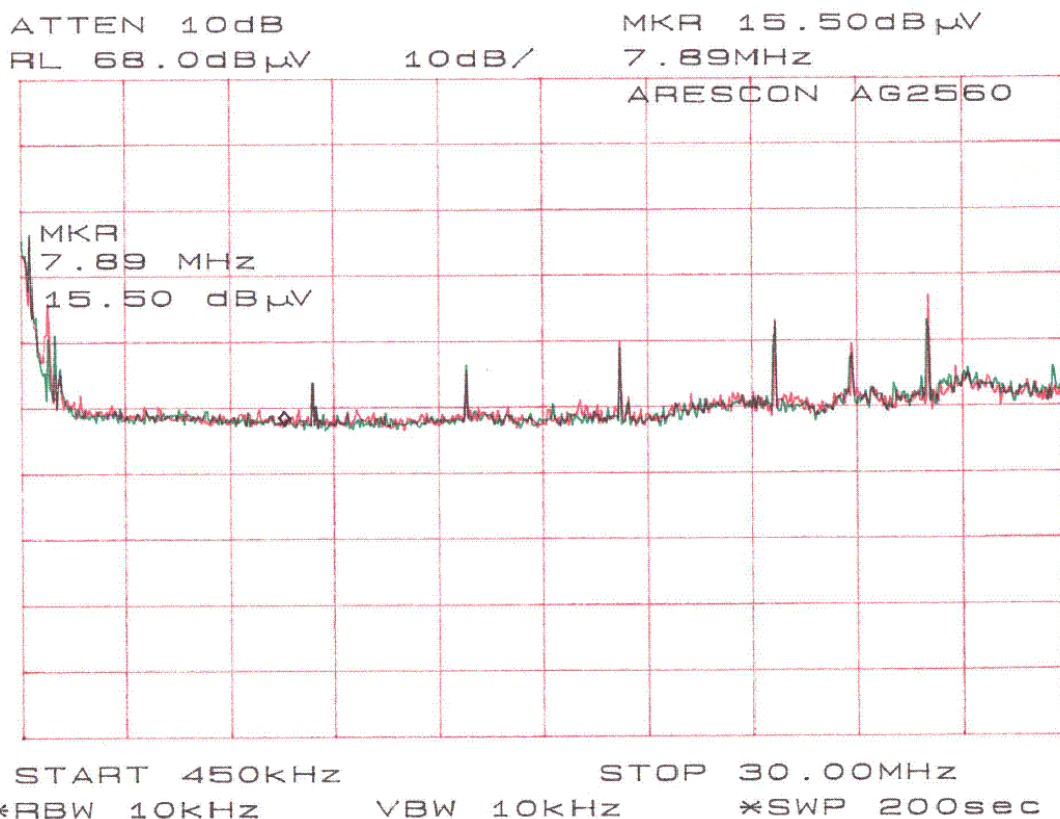



---

## **11 - ANTENNA REQUIREMENT**

---

### **11.1 Standard Applicable**

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **11.2 Antenna Connected Construction**

The directional gain of antenna used for transmitting is 2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

---

## 12 - RF SAFETY REQUIREMENTS TO 2.1091

---

According to 15.247(b)(4), RF exposure is calculated.

### MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 16.31 (dBm)

Maximum peak output power at antenna input terminal: 42.76 (mW)

Antenna Gain (typical): 2 (dBi)

Maximum antenna gain: 1.58 (numeric)

Prediction distance: 20 (cm)

Predication frequency: 2400 (MHz)

MPE limit for uncontrolled exposure at prediction frequency: 0.013 (mW/cm<sup>2</sup>)

Power density at predication frequency: 117.49 (mW/cm<sup>2</sup>)

Maximum allowable antenna gain: 20.7 (dBi)

### Test Result

The predicted power density level at 20 cm is 0.013 mW/cm<sup>2</sup>. This is below the uncontrolled exposure limit of 1mW/cm<sup>2</sup> at 2400 MHz.

This radio is intended to be installed in laptop PC only and is thus classed as mobile equipment.