

APPLICATION CERTIFICATION FCC Part 15C

On Behalf of
Pipo Technology Co., Ltd.

Mobile Internet Device
Model No.: P102, P103, P106, P101, P108

FCC ID: PT7-P102

Prepared for : Pipo Technology Co., Ltd.
Address : Area C, 3F, Bao Yun Da Logistics Centre, Warehouse Xi
Xiang Avenue, Bao An District, Shenzhen, China

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan Rd.
Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20122687
Date of Test : Nov 23- Dec 17, 2012
Date of Report : Dec 17, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	10
4. TEST PROCEDURES AND RESULTS	11
5. 6DB BANDWIDTH MEASUREMENT	12
5.1. Block Diagram of Test Setup.....	12
5.2. The Requirement For Section 15.247(a)(2).....	12
5.3. EUT Configuration on Measurement	12
5.4. Operating Condition of EUT	12
5.5. Test Procedure	13
5.6. Test Result	13
6. MAXIMUM PEAK OUTPUT POWER	27
6.1. Block Diagram of Test Setup.....	27
6.2. The Requirement For Section 15.247(b)(3).....	27
6.3. EUT Configuration on Measurement	27
6.4. Operating Condition of EUT	27
6.5. Test Procedure	28
6.6. Test Result	28
7. POWER SPECTRAL DENSITY MEASUREMENT	42
7.1. Block Diagram of Test Setup.....	42
7.2. The Requirement For Section 15.247(e).....	42
7.3. EUT Configuration on Measurement	42
7.4. Operating Condition of EUT	42
7.5. Test Procedure	43
7.6. Test Result	43
8. BAND EDGE COMPLIANCE TEST	57
8.1. Block Diagram of Test Setup.....	57
8.2. The Requirement For Section 15.247(d)	57
8.3. EUT Configuration on Measurement	57
8.4. Operating Condition of EUT	58
8.5. Test Procedure	58
8.6. Test Result	59
9. RADIATED SPURIOUS EMISSION TEST	92
9.1. Block Diagram of Test Setup.....	92
9.2. The Limit For Section 15.247(d)	93
9.3. Restricted bands of operation	93
9.4. Configuration of EUT on Measurement	94

9.5.	Operating Condition of EUT	94
9.6.	Test Procedure	94
9.7.	The Field Strength of Radiation Emission Measurement Results	95
10.	CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	178
10.1.	Block Diagram of Test Setup.....	178
10.2.	The Requirement For Section 15.247(d)	178
10.3.	EUT Configuration on Measurement	178
10.4.	Operating Condition of EUT	179
10.5.	Test Procedure	179
10.6.	Test Result	179
11.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)	192
11.1.	Block Diagram of Test Setup.....	192
11.2.	The Emission Limit	192
11.3.	Configuration of EUT on Measurement	193
11.4.	Operating Condition of EUT	193
11.5.	Test Procedure	193
11.6.	Power Line Conducted Emission Measurement Results	194
12.	ANTENNA REQUIREMENT.....	197
12.1.	The Requirement	197
12.2.	Antenna Construction	197

Test Report Certification

Applicant : Pipo Technology Co., Ltd.
Manufacturer : Pipo Technology Co., Ltd.
EUT Description : Mobile Internet Device
(A) MODEL NO.: P102, P103, P106, P101, P108
(B) Brand Name.: N/A
(C) POWER SUPPLY: DC 3.7V (Li-polymer battery) & AC 120V/60Hz
(Adapter input)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.4: 2009

KDB 558074 D01 DTS Meas Guidance v02

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Nov 23-Dec 17, 2012

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Mobile Internet Device
Model Number	:	P102, P103, P106, P101, P108 Note: These models are identical in interior structure, electrical circuits and components, and just the plastics appearance such as color, shape are different. So we prepare P102 for test only.
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	:	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Antenna Gain	:	2.0dBi
Power Supply	:	DC 3.7V (Li-polymer battery) & AC 120V/60Hz (Adapter input)
Adapter	:	Model: W&T-AD18W090200 Input: 100-240VAC ~ 0.5A 50-60Hz Output: 9.0V 2.5A MAX
Data Rate	:	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Applicant	:	Pipo Technology Co., Ltd.
Address	:	Area C, 3F, Bao Yun Da Logistics Centre, Warehouse Xi Xiang Avenue, Bao An District, Shenzhen, China
Manufacturer	:	Pipo Technology Co., Ltd.
Address	:	Area C, 3F, Bao Yun Da Logistics Centre, Warehouse Xi Xiang Avenue, Bao An District, Shenzhen, China
Date of sample received	:	Nov 23, 2012
Date of Test	:	Nov 23-Dec 14, 2012

1.2.Carrier Frequency of Channels

802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

1.3.Special Accessory and Auxiliary Equipment

N/A

1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11n (20MHz) Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11n (40MHz) Transmitting mode



Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

Charging

3.2.Configuration and peripherals

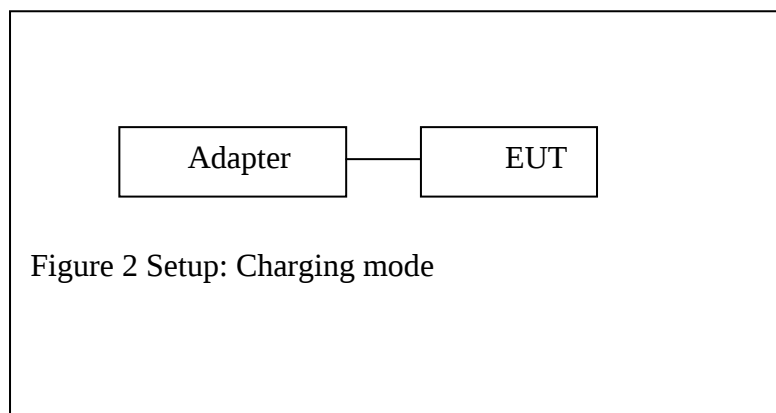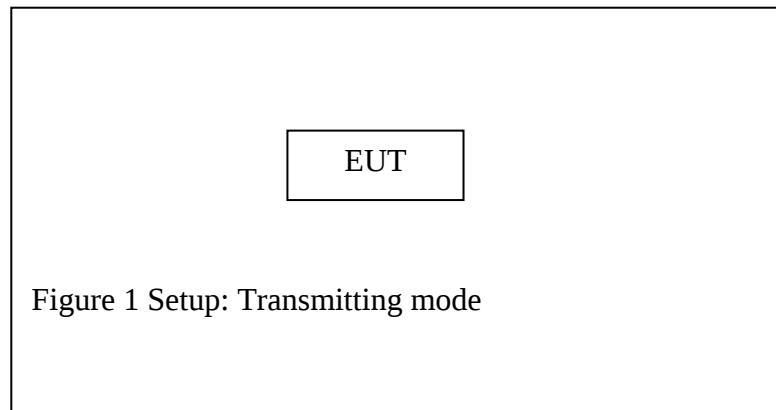

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup



(EUT: Mobile Internet Device)

5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Mobile Internet Device (EUT)

Model Number	:	P102
Serial Number	:	N/A
Manufacturer	:	Pipo Technology Co., Ltd.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.6. Test Result

PASS.

Date of Test:	Dec 14, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	TX	Test Engineer:	Allen

The test was performed with 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	10.16	> 0.5MHz
Middle	2437	10.16	> 0.5MHz
High	2462	10.16	> 0.5MHz

The test was performed with 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.44	> 0.5MHz
Middle	2437	16.44	> 0.5MHz
High	2462	16.48	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 20 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	17.68	> 0.5MHz
Middle	2437	17.68	> 0.5MHz
High	2462	17.72	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 40 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2422	36.00	> 0.5MHz
Middle	2437	36.00	> 0.5MHz
High	2452	36.00	> 0.5MHz


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

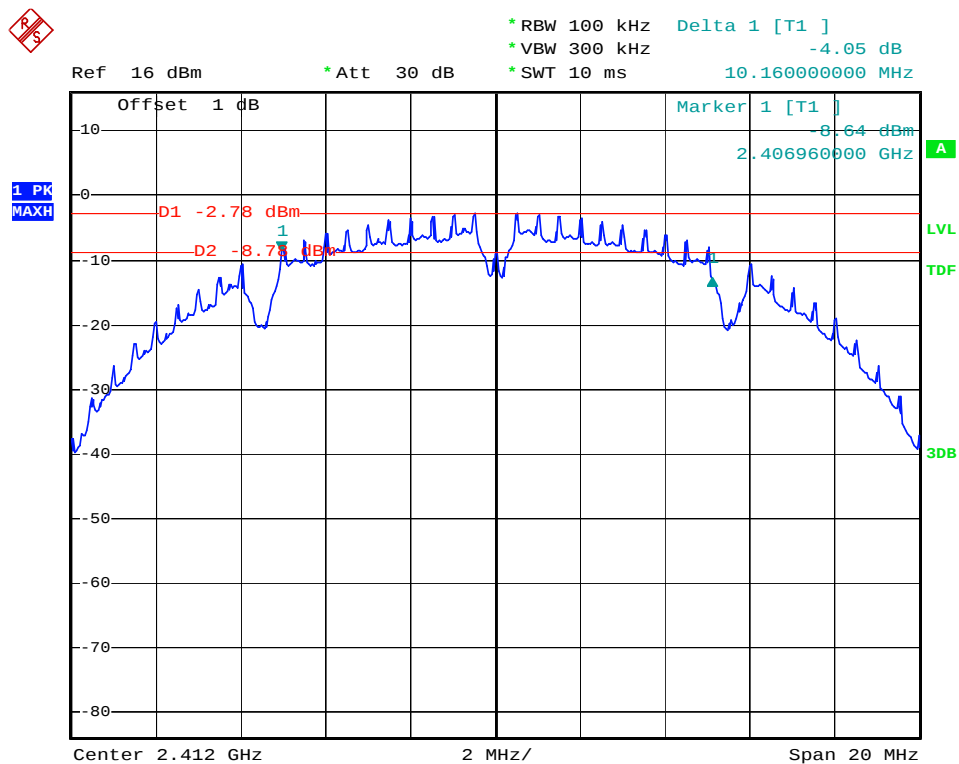


Date: 14.DEC.2012 15:03:39

802.11b Channel Middle 2437MHz

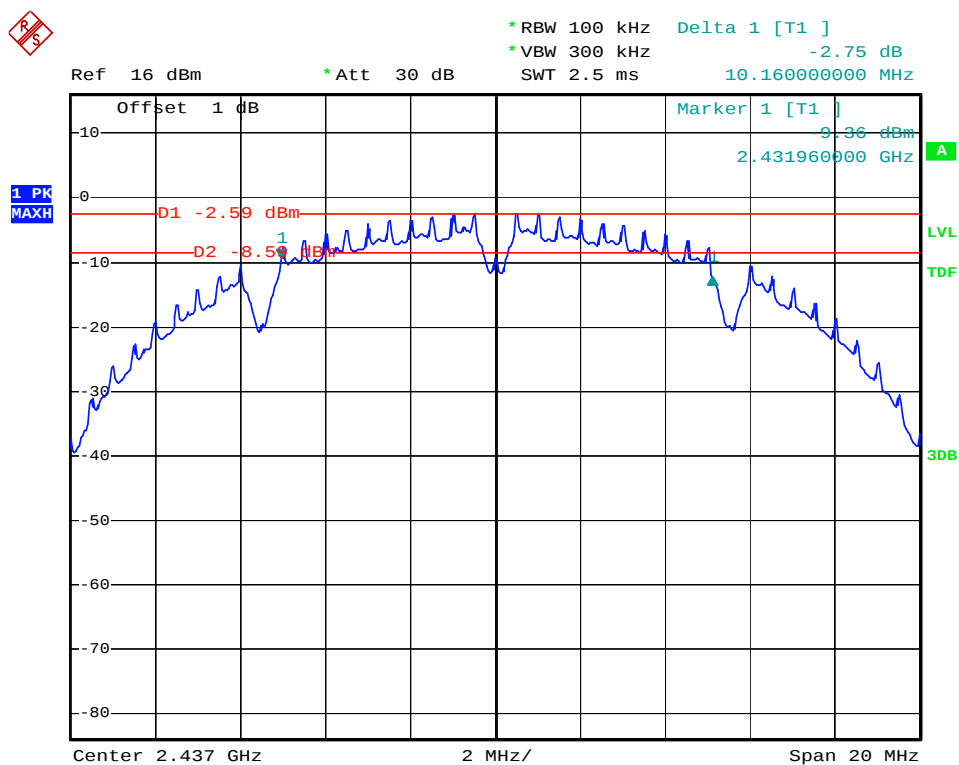


Date: 14.DEC.2012 15:16:54

802.11b Channel High 2462MHz

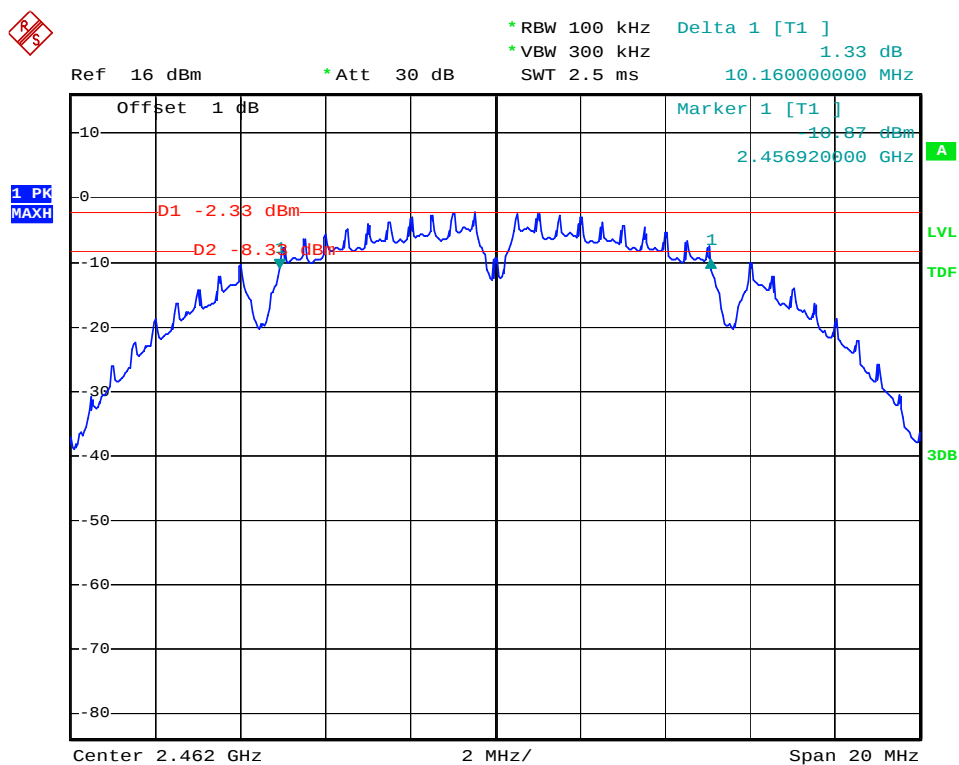


Date: 14.DEC.2012 15:23:11

802.11g Channel Low 2412MHz

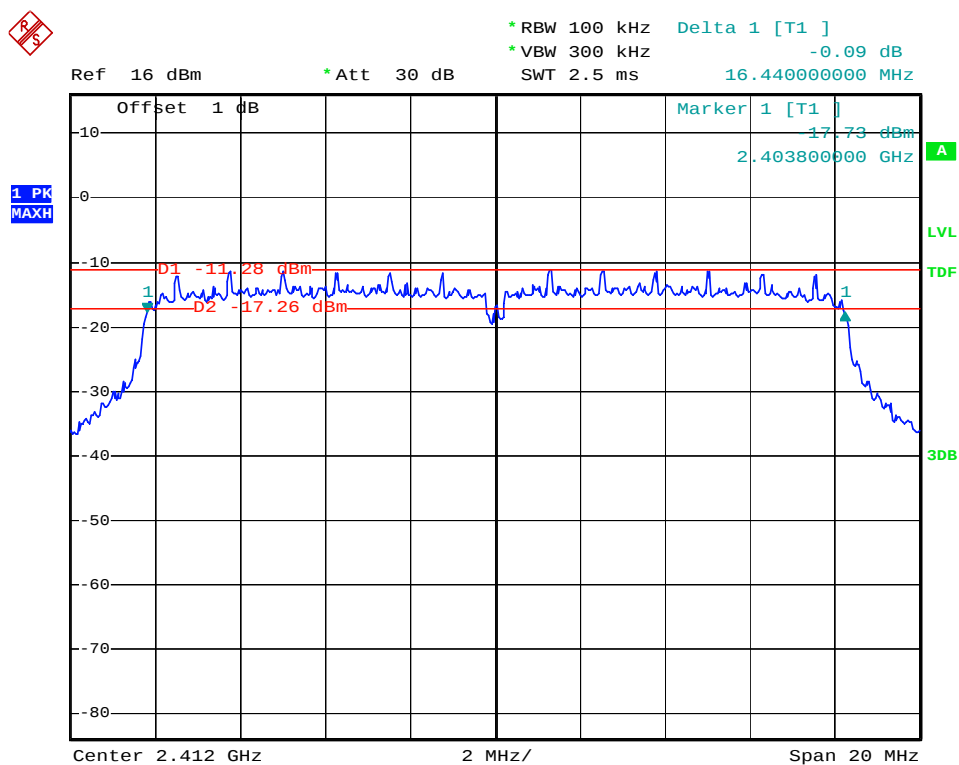


Date: 14.DEC.2012 15:42:04

802.11g Channel Middle 2437MHz

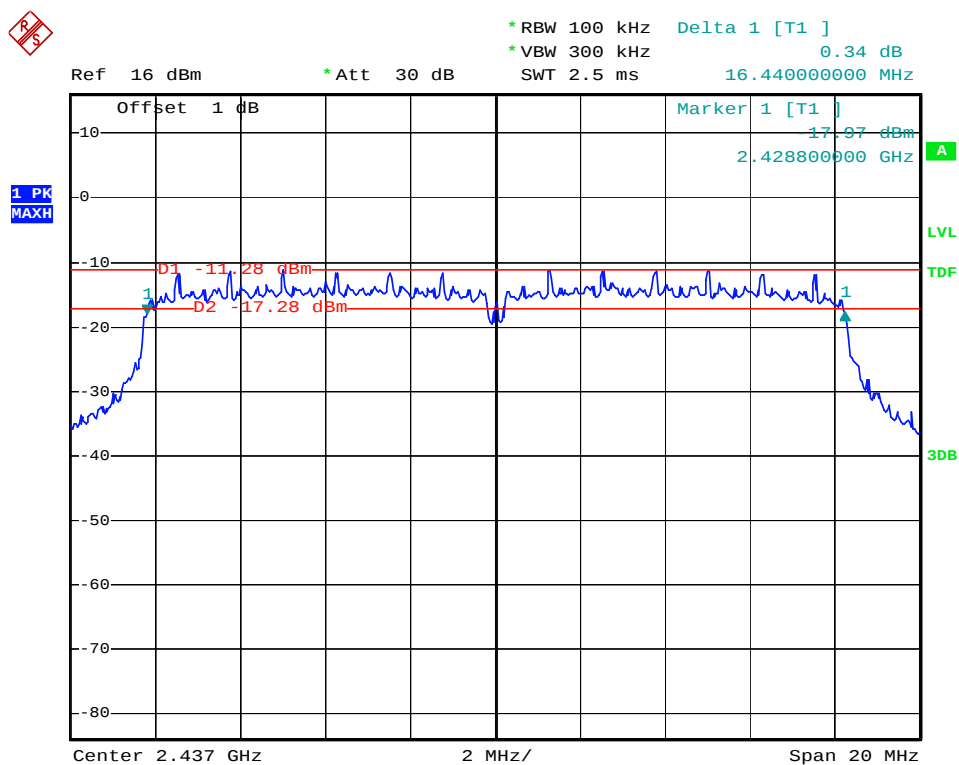


Date: 14.DEC.2012 15:38:51

802.11g Channel High 2462MHz

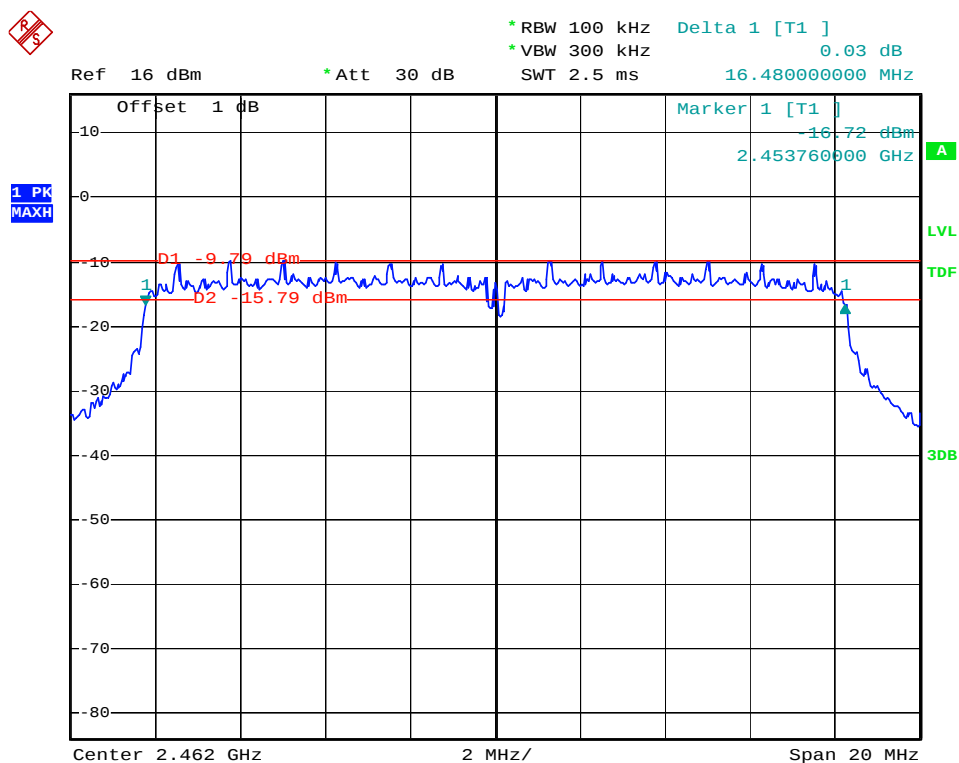


Date: 14.DEC.2012 15:28:36

802.11n Channel Low 2412MHz (20MHz)

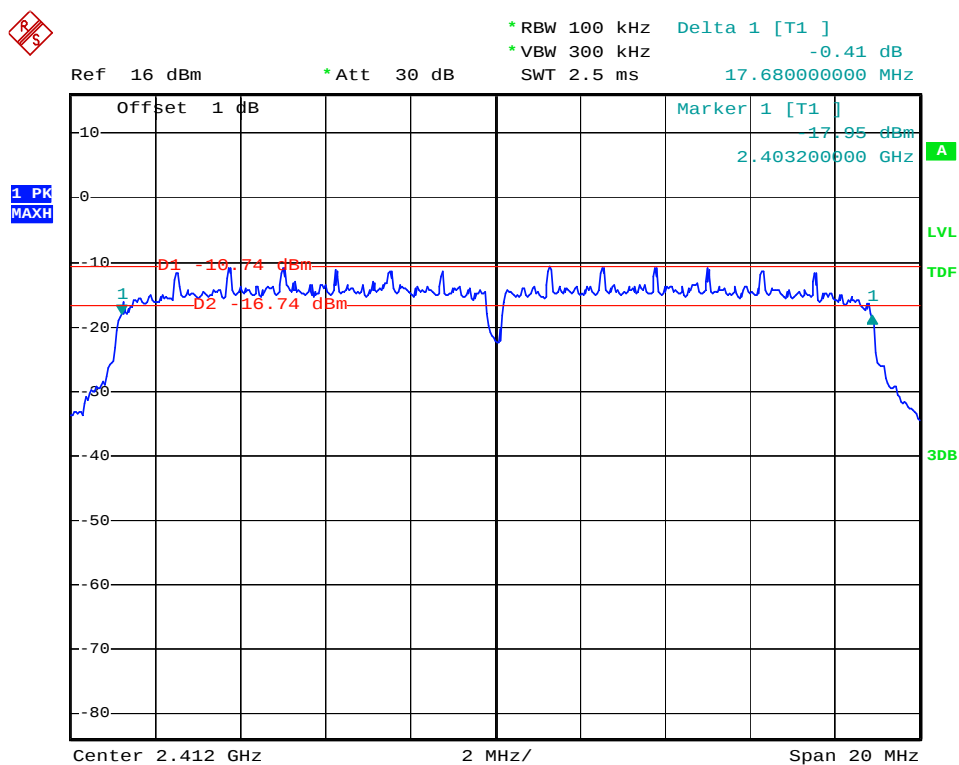


Date: 14.DEC.2012 15:52:06

802.11n Channel Middle 2437MHz (20MHz)

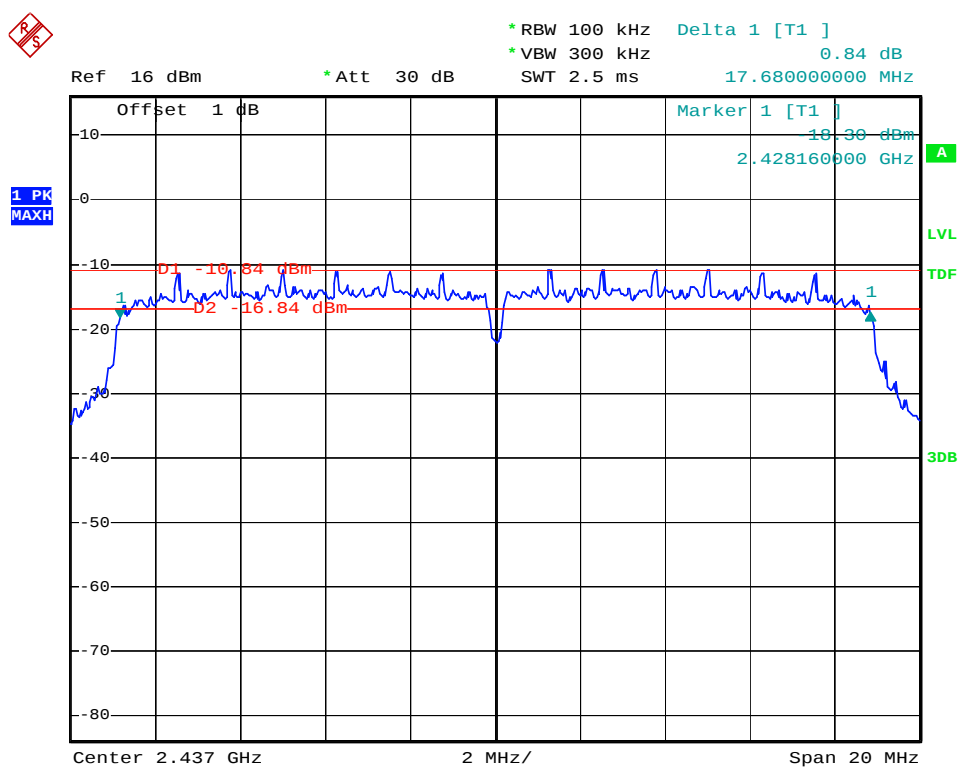


Date: 14.DEC.2012 15:59:46

802.11n Channel High 2462MHz (20MHz)

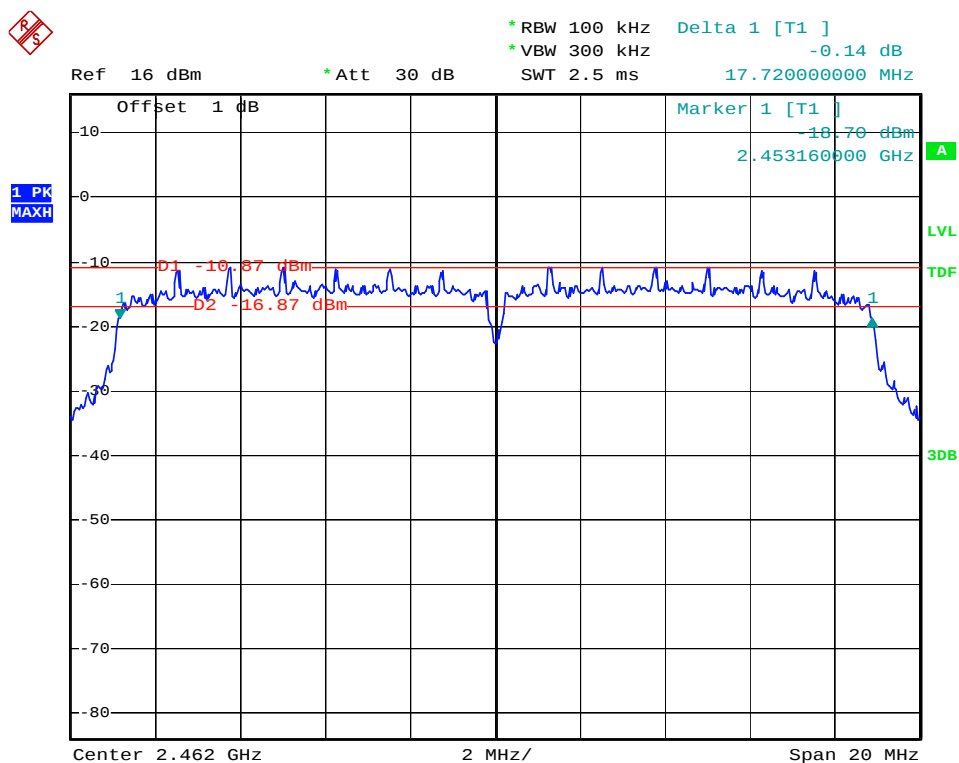


Date: 14.DEC.2012 16:01:39

802.11n Channel Low 2422MHz (40MHz)

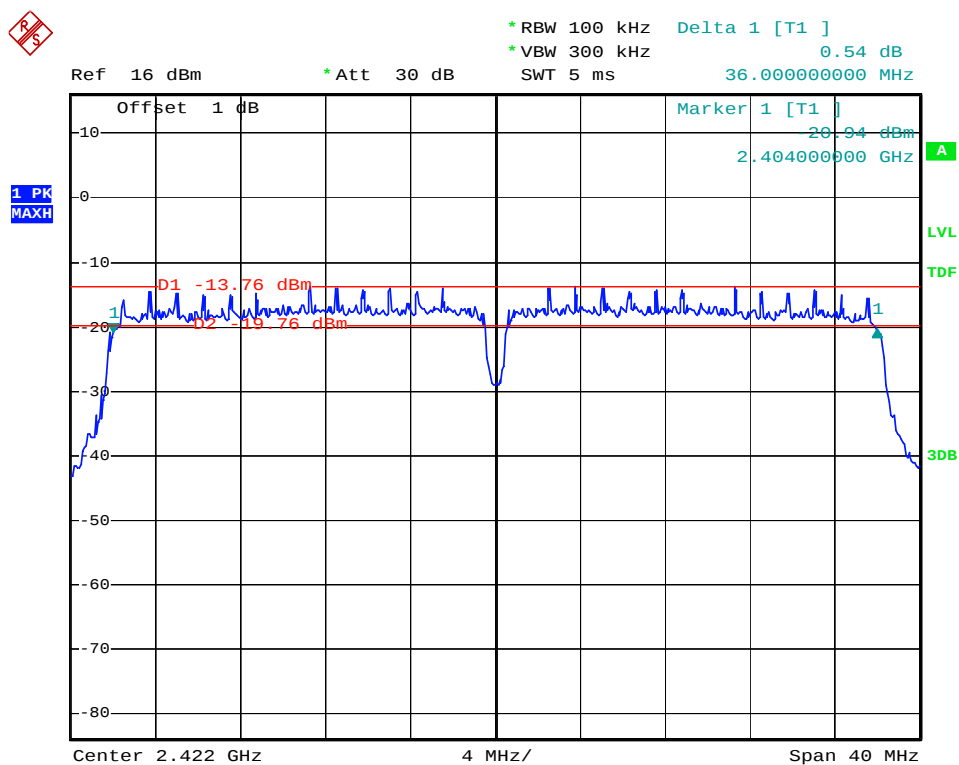


Date: 14.DEC.2012 16:11:38

802.11n Channel Middle 2437MHz (40MHz)

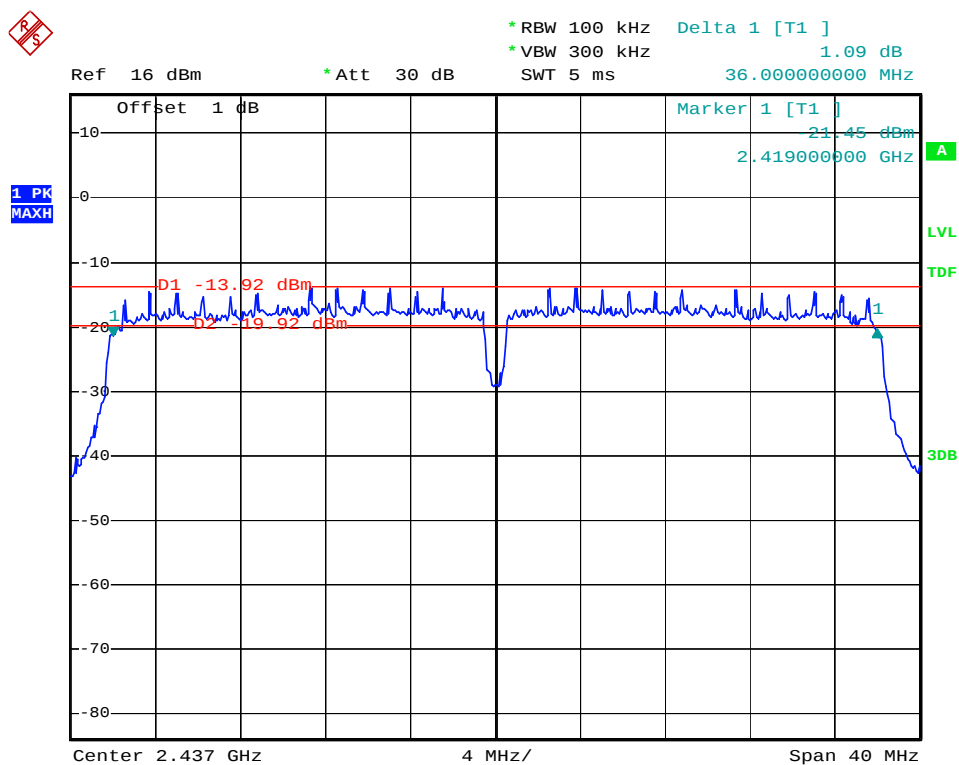

Date: 14.DEC.2012 16:23:08

802.11n Channel High 2452MHz (40MHz)

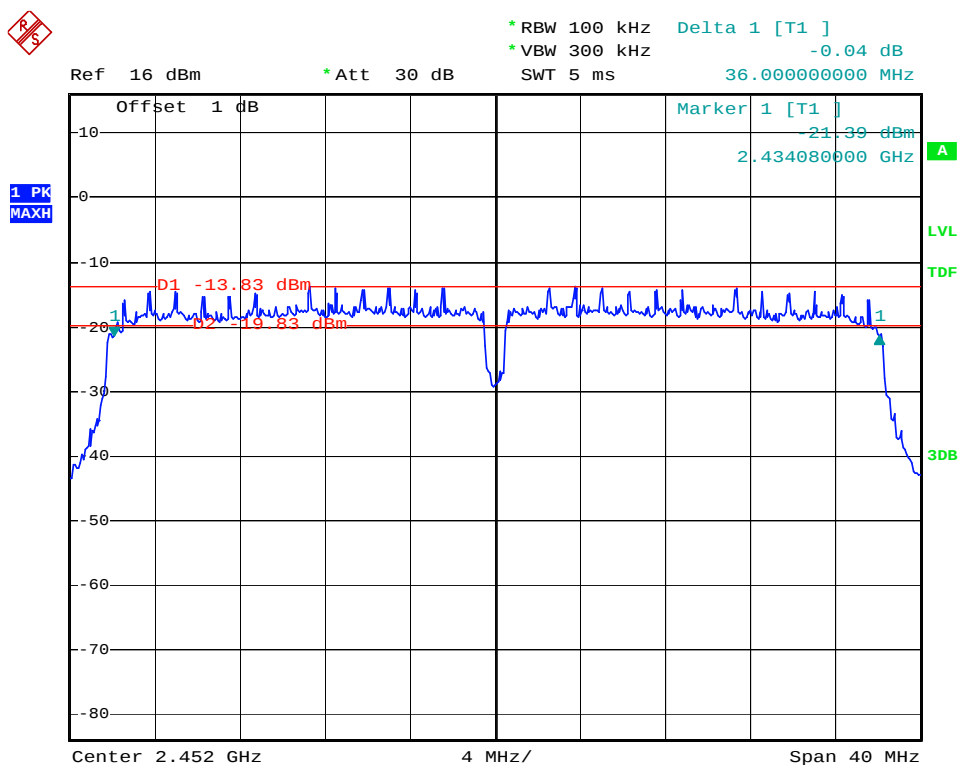

Date: 14.DEC.2012 16:25:03

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup



(EUT: Mobile Internet Device)

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. Mobile Internet Device (EUT)

Model Number	: P102
Serial Number	: N/A
Manufacturer	: Pipo Technology Co., Ltd.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

6.5.3. Measurement the maximum peak output power.

6.6. Test Result

PASS.

Date of Test:	<u>Dec 14, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mobile Internet Device</u>	Humidity:	<u>50%</u>
Model No.:	<u>P102</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Allen</u>

The test was performed with 802.11b				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.10	8.13	30 dBm / 1 W
Middle	2437	9.34	8.59	30 dBm / 1 W
High	2462	9.55	9.02	30 dBm / 1 W

The test was performed with 802.11g				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	8.51	7.10	30 dBm / 1 W
Middle	2437	8.66	7.35	30 dBm / 1 W
High	2462	8.69	7.40	30 dBm / 1 W

The test was performed with 802.11n (20MHz)


Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	8.93	7.82	30 dBm / 1 W
Middle	2437	8.98	7.91	30 dBm / 1 W
High	2462	9.01	7.96	30 dBm / 1 W

The test was performed with 802.11n (40MHz)

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2422	8.81	7.60	30 dBm / 1 W
Middle	2437	8.61	7.26	30 dBm / 1 W
High	2452	8.75	7.50	30 dBm / 1 W


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

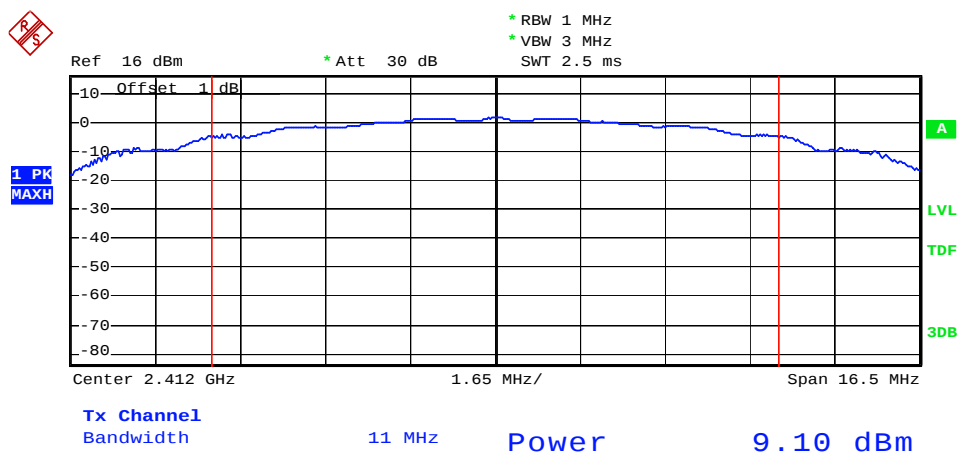


Date: 14.DEC.2012 15:09:58

802.11b Channel Middle 2437MHz

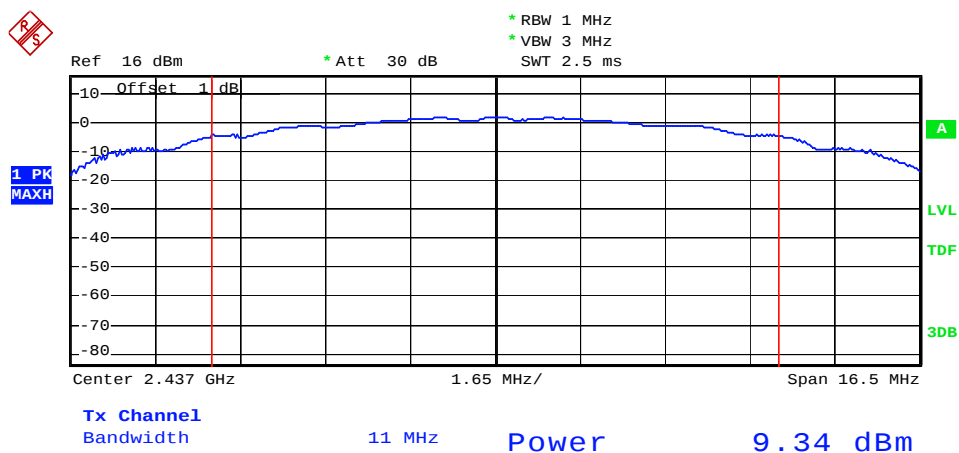


Date: 14.DEC.2012 15:18:03

802.11b Channel High 2462MHz

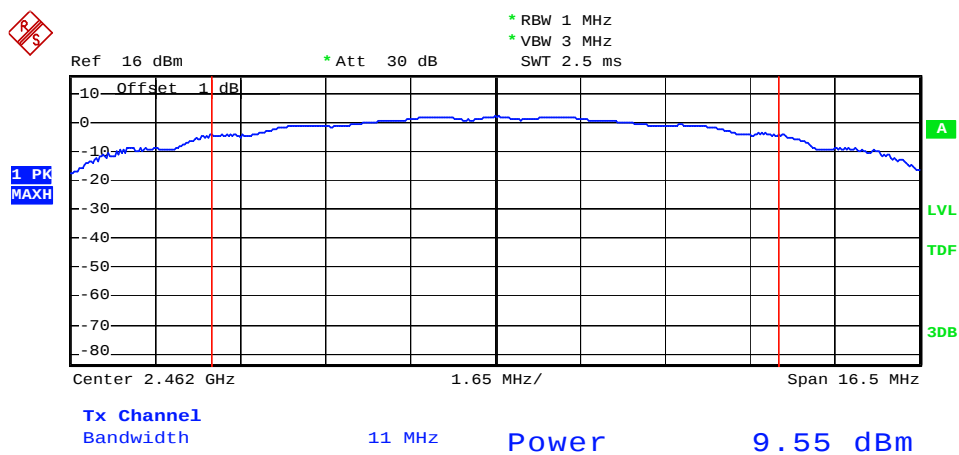


Date: 14.DEC.2012 15:21:25

802.11g Channel Low 2412MHz

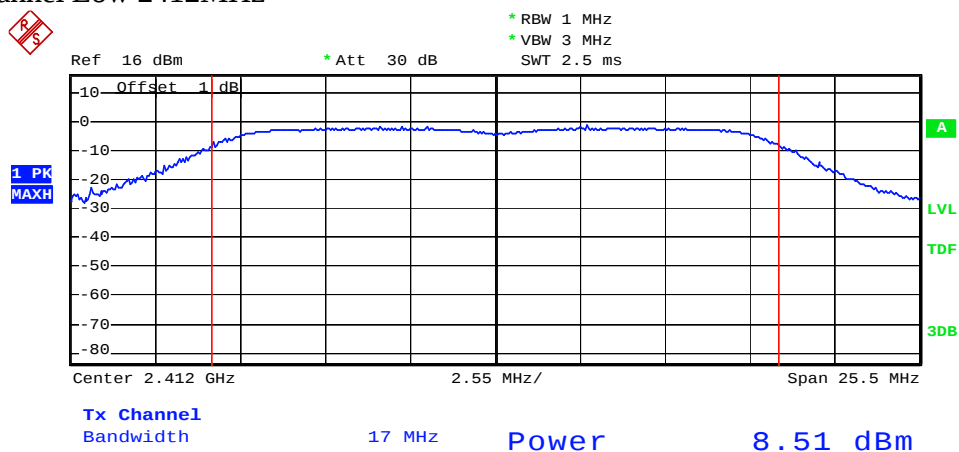


Date: 14.DEC.2012 15:45:33

802.11g Channel Middle 2437MHz

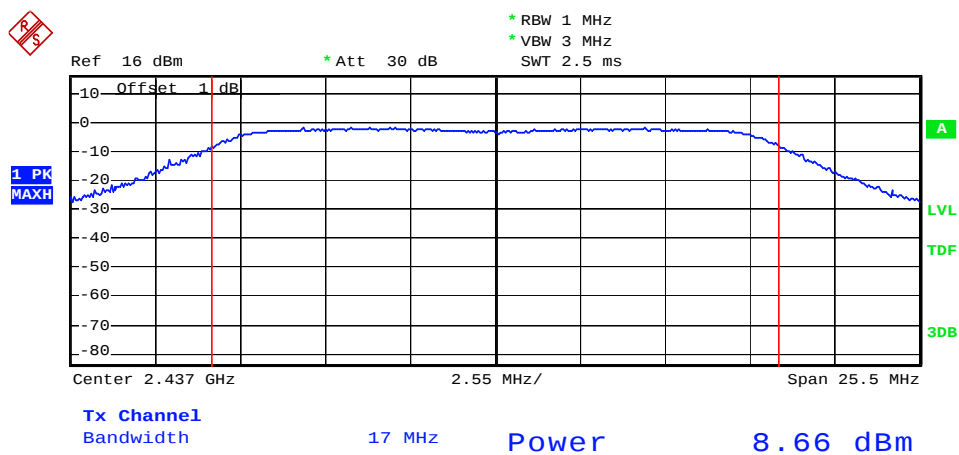


Date: 14.DEC.2012 15:36:52

802.11g Channel High 2462MHz

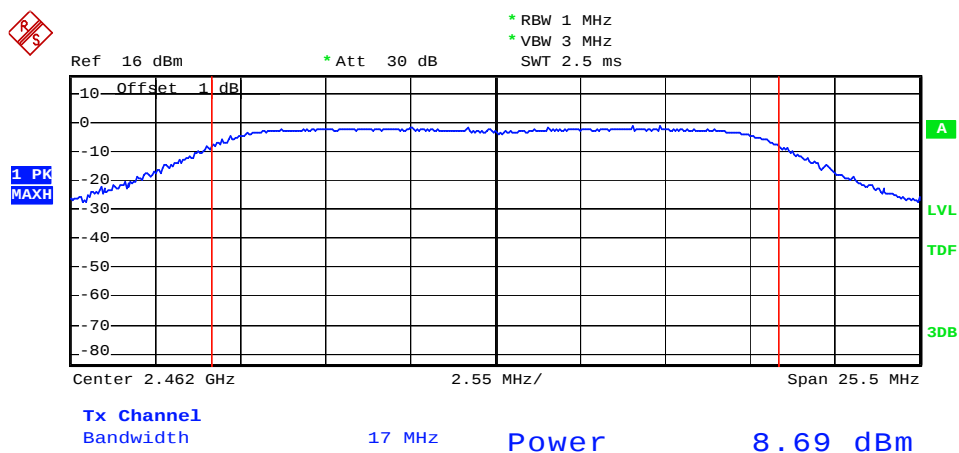


Date: 14.DEC.2012 15:32:41

802.11n Channel Low 2412MHz (20MHz)

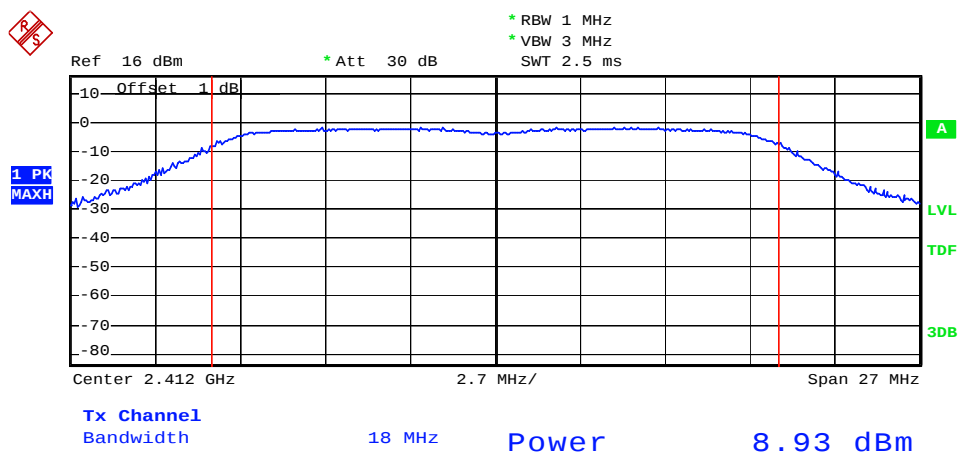


Date: 14.DEC.2012 15:55:33

802.11n Channel Middle 2437MHz (20MHz)

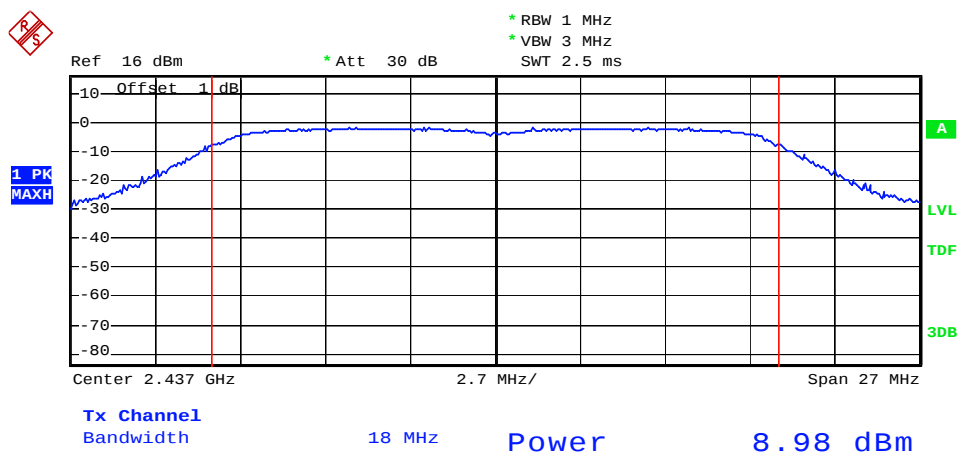


Date: 14.DEC.2012 15:58:15

802.11n Channel High 2462MHz (20MHz)

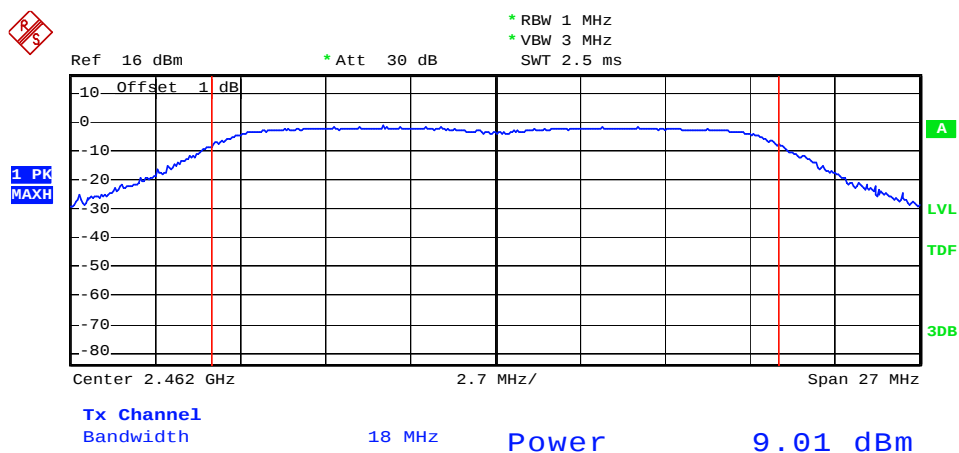


Date: 14.DEC.2012 16:04:15

802.11n Channel Low 2422MHz (40MHz)

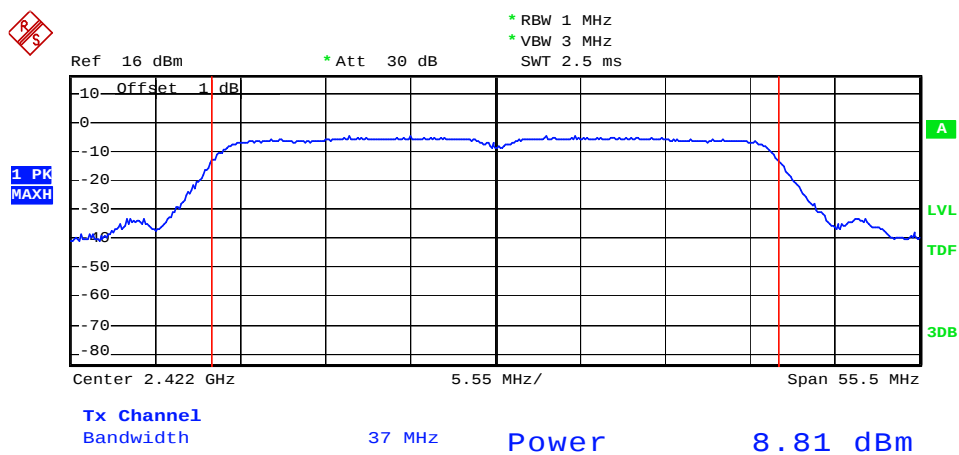


Date: 14.DEC.2012 16:17:15

802.11n Channel Middle 2437MHz (40MHz)

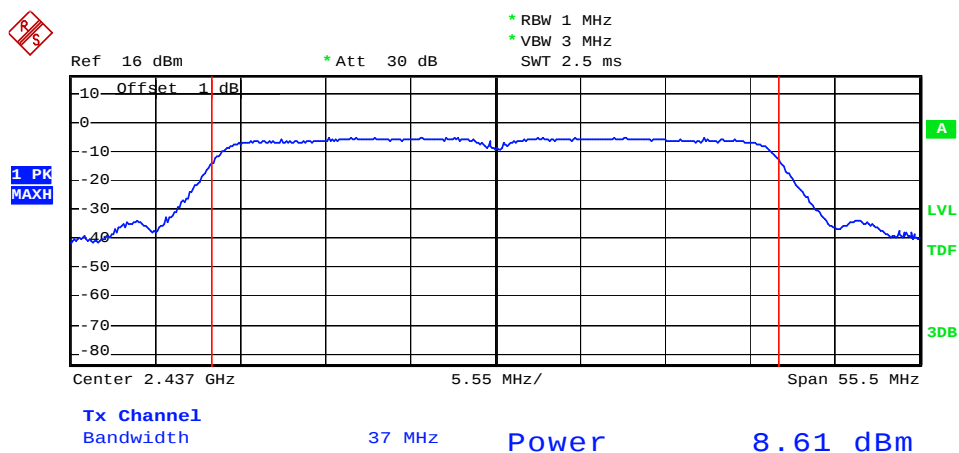

Date: 14.DEC.2012 16:21:14

802.11n Channel High 2452MHz (40MHz)

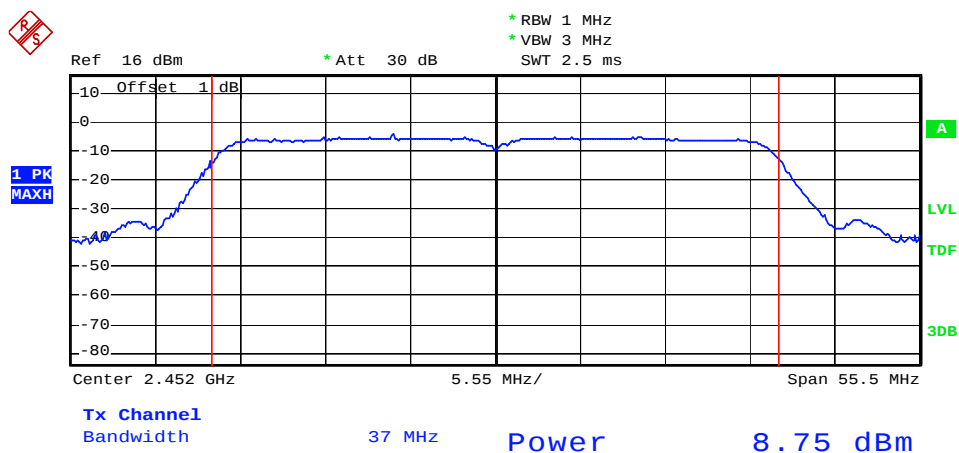

Date: 14.DEC.2012 16:28:44

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: Mobile Internet Device)

7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. Mobile Internet Device(EUT)

Model Number	:	P102
Serial Number	:	N/A
Manufacturer	:	Pipo Technology Co., Ltd.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 3 kHz and VBW to 10 kHz, sweep time = auto, span ≥ 1.5 time DTS channel bandwidth.

7.5.3. Measurement the maximum power spectral density.

7.6. Test Result

PASS.

Date of Test:	Dec 14, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	TX	Test Engineer:	Allen

The test was performed with 802.11b

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limits (dBm/3kHz)
Low	2412	-15.79	8 dBm
Middle	2437	-16.04	8 dBm
High	2462	-16.50	8 dBm

The test was performed with 802.11g


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limits (dBm)
Low	2412	-24.84	8 dBm
Middle	2437	-21.98	8 dBm
High	2462	-21.92	8 dBm

The test was performed with 802.11n (20MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limits (dBm)
Low	2412	-24.56	8 dBm
Middle	2437	-25.28	8 dBm
High	2462	-24.35	8 dBm

The test was performed with 802.11n (40MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limits (dBm)
Low	2422	-28.88	8 dBm
Middle	2437	-27.95	8 dBm
High	2452	-28.45	8 dBm


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

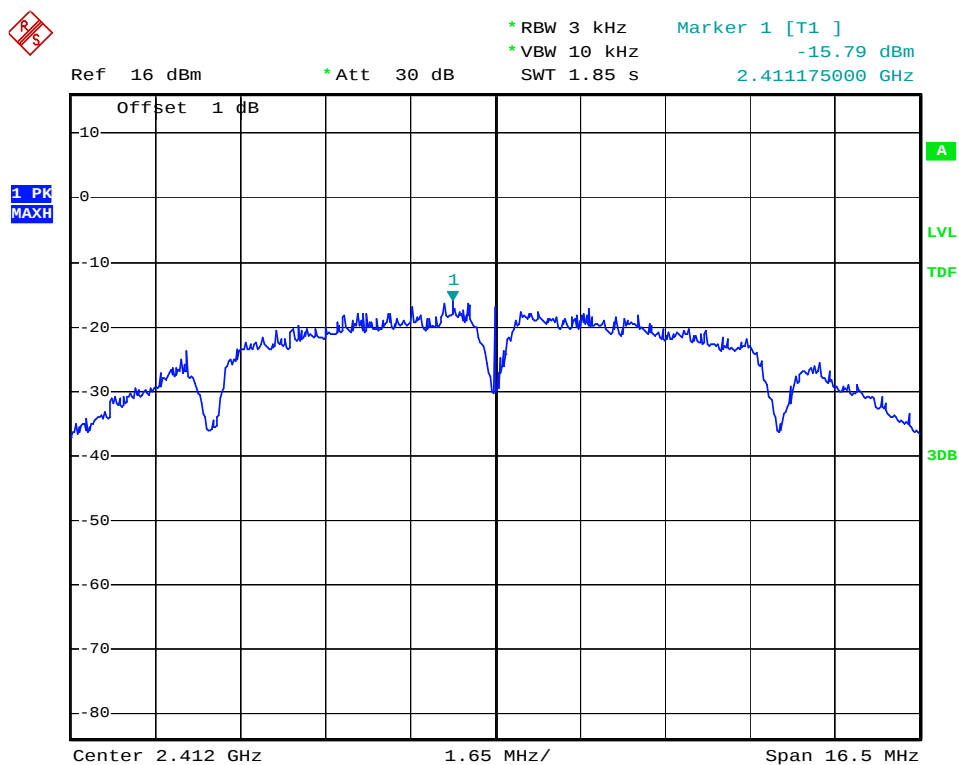


Date: 14.DEC.2012 15:09:15

802.11b Channel Middle 2437MHz

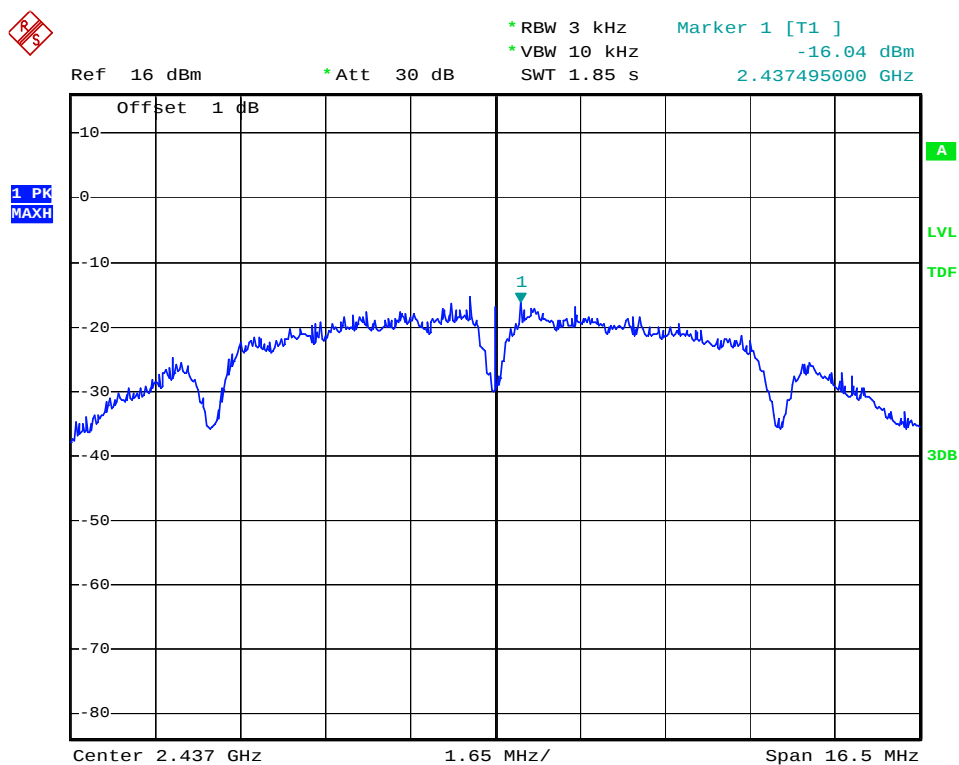


Date: 14.DEC.2012 15:19:36

802.11b Channel High 2462MHz

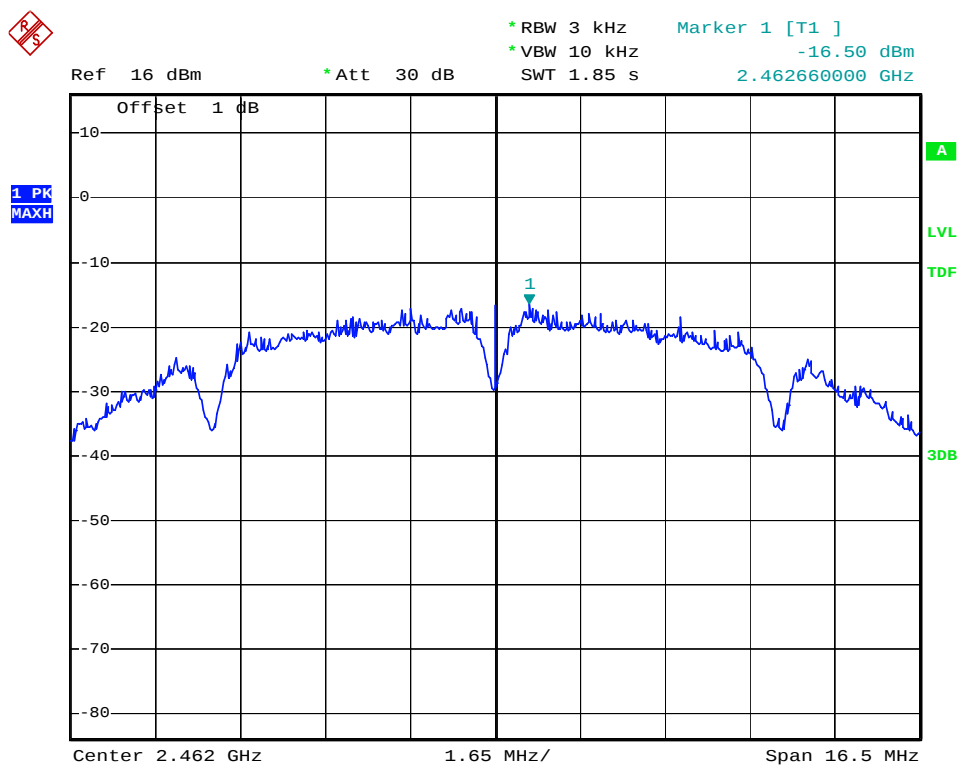


Date: 14.DEC.2012 15:20:41

802.11g Channel Low 2412MHz

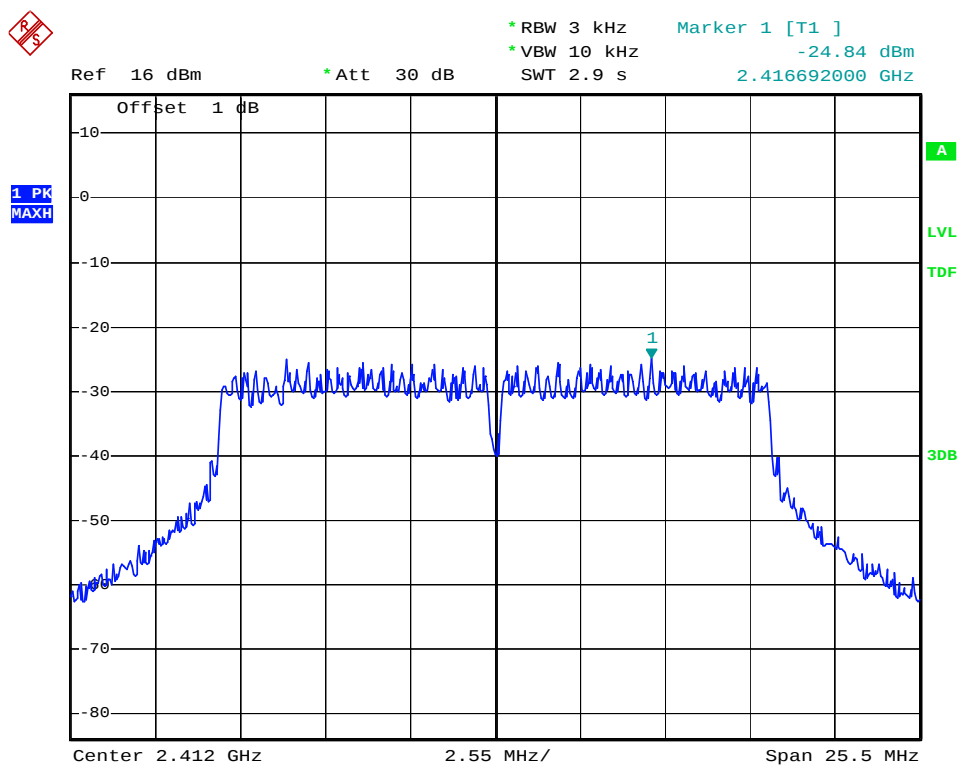


Date: 14.DEC.2012 15:46:19

802.11g Channel Middle 2437MHz

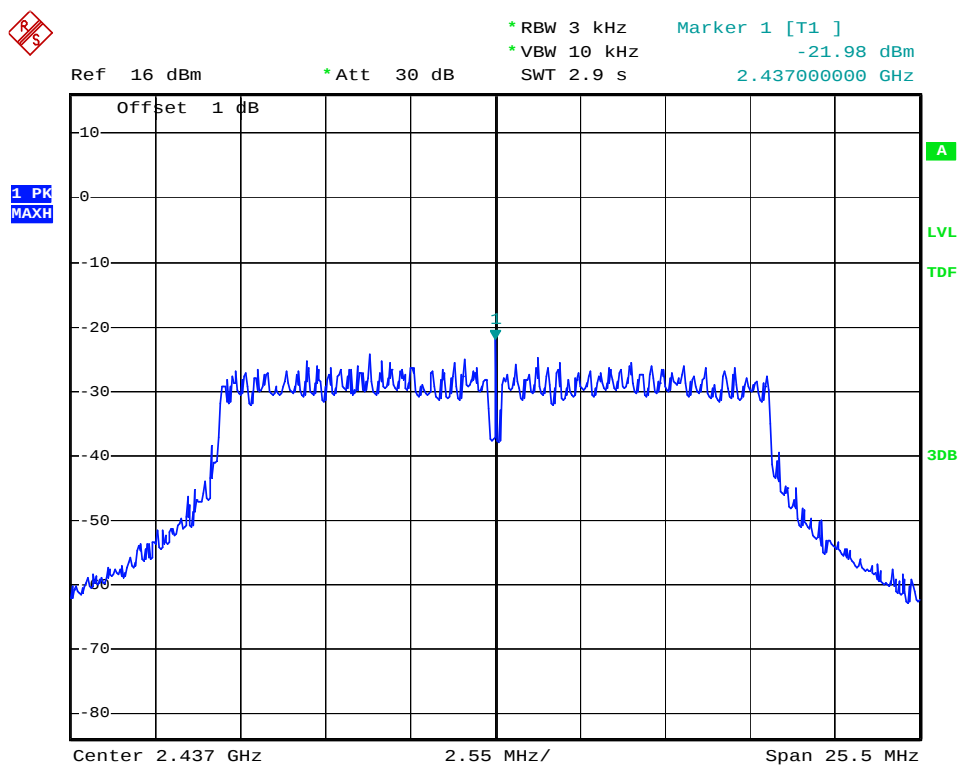


Date: 14.DEC.2012 15:35:53

802.11g Channel High 2462MHz

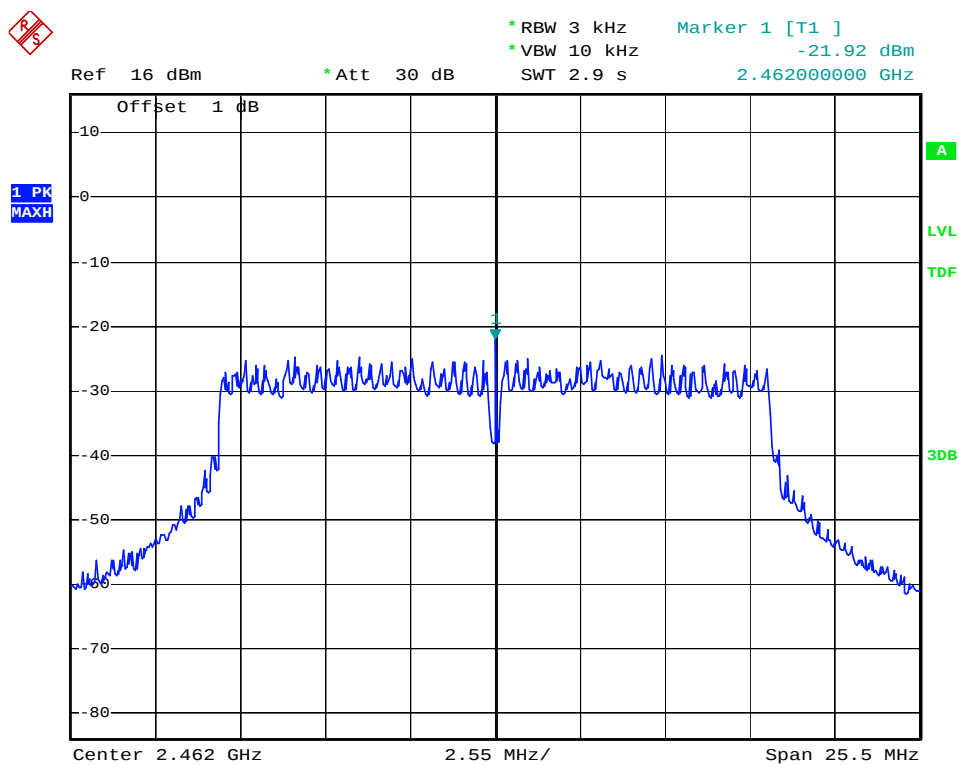


Date: 14.DEC.2012 15:34:22

802.11n Channel Low 2412MHz (20MHz)

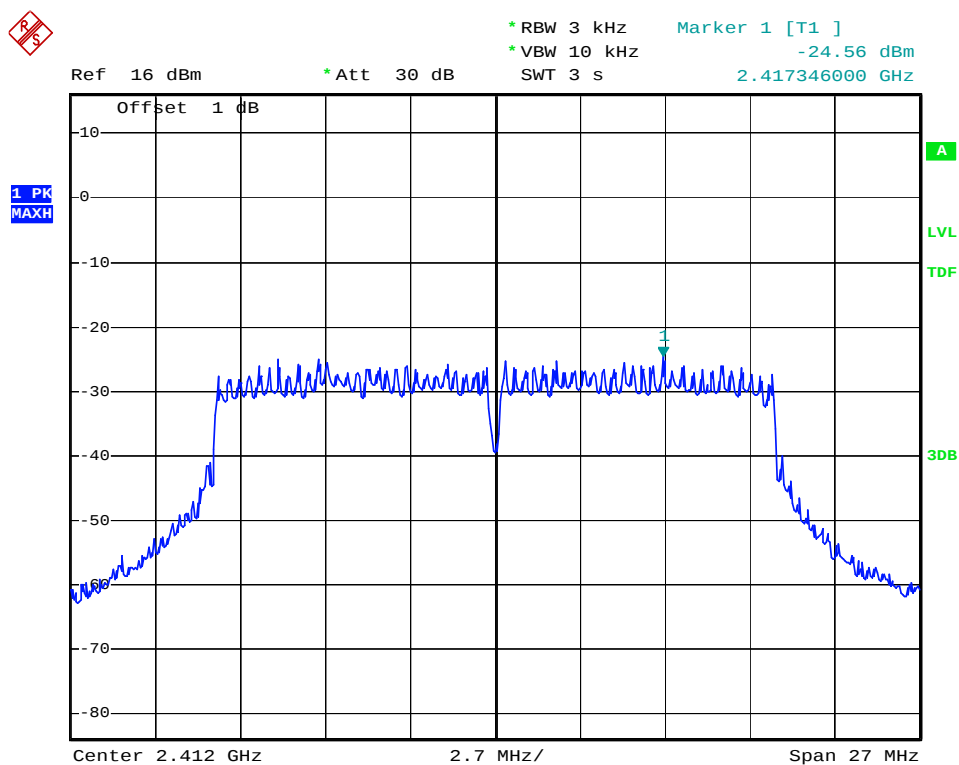


Date: 14.DEC.2012 15:56:35

802.11n Channel Middle 2437MHz (20MHz)

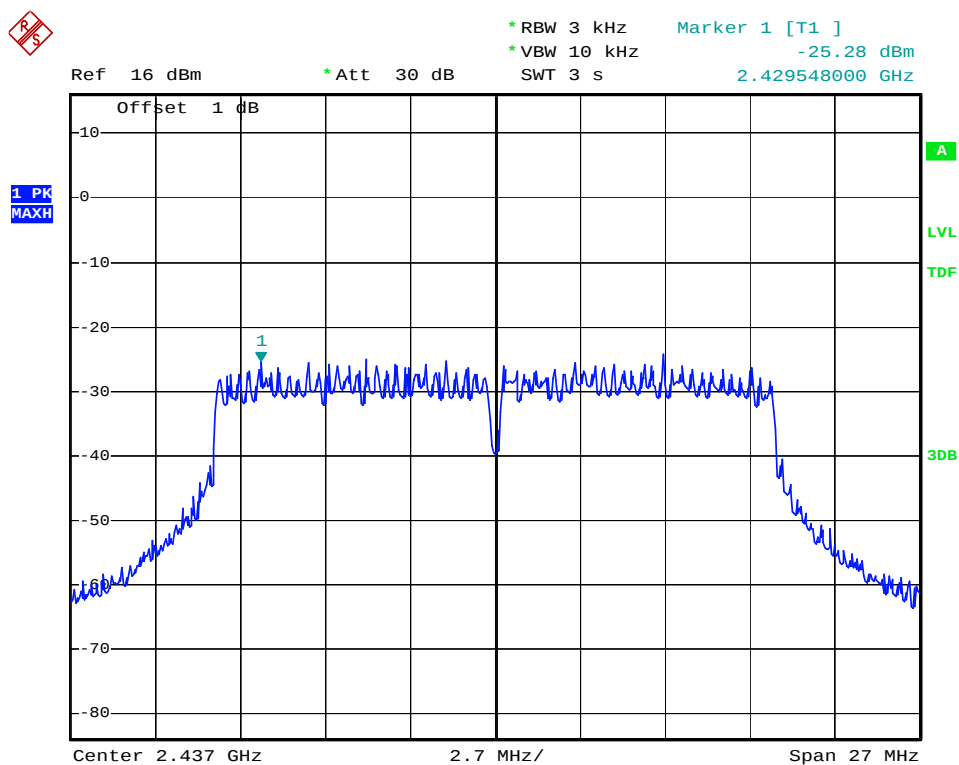


Date: 14.DEC.2012 15:57:29

802.11n Channel High 2462MHz (20MHz)

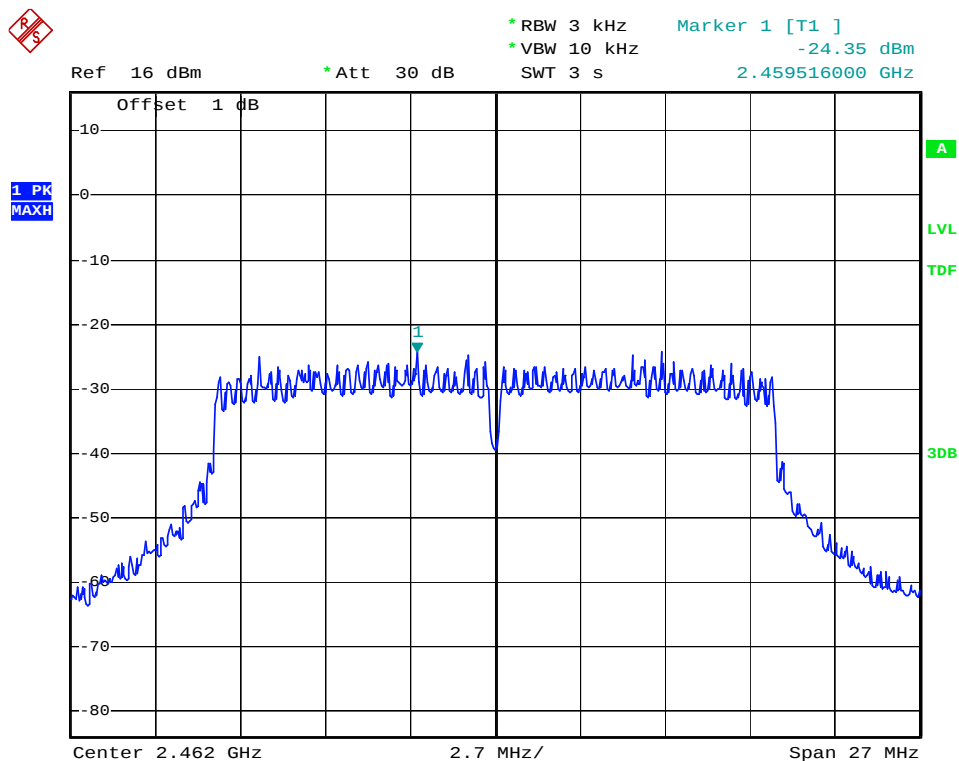


Date: 14.DEC.2012 16:04:59

802.11n Channel Low 2422MHz (40MHz)

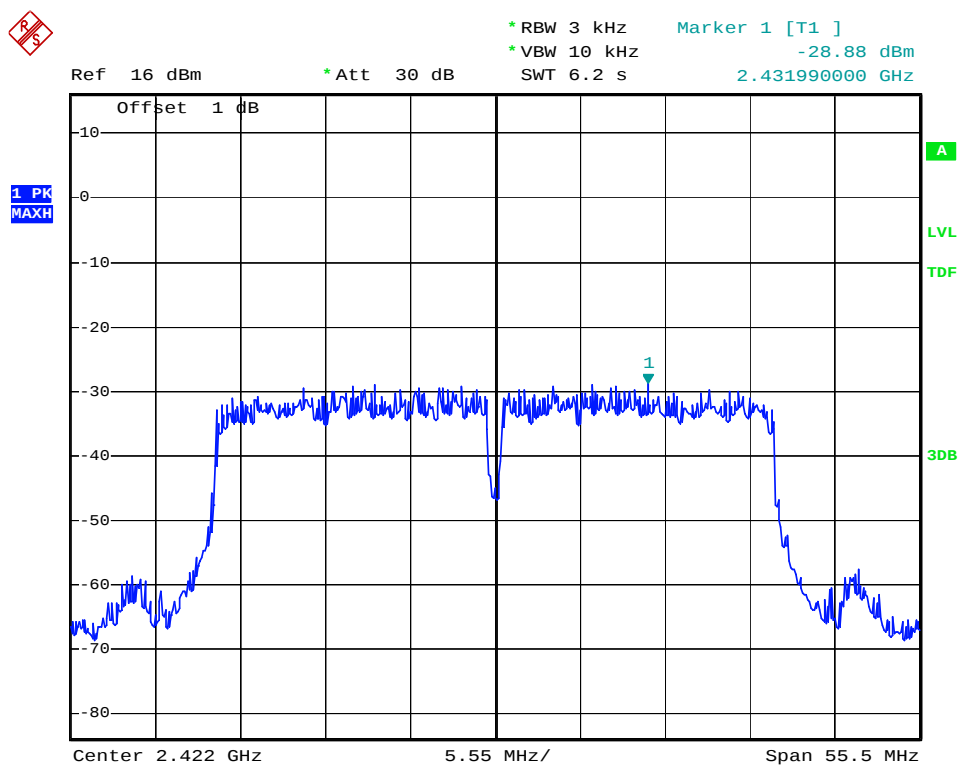

Date: 14.DEC.2012 16:18:15

802.11n Channel Middle 2437MHz (40MHz)

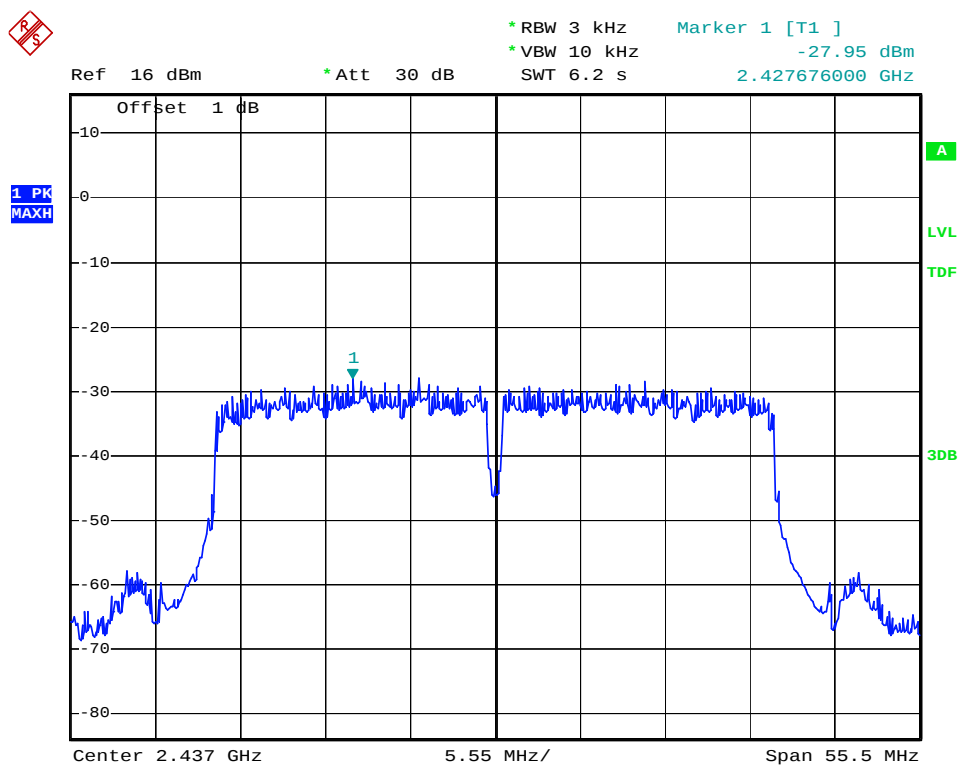

Date: 14.DEC.2012 16:19:57

802.11n Channel High 2452MHz (40MHz)



* RBW 3 kHz
 * VBW 10 kHz
 SWT 6.2 s

Marker 1 [T1]

-28.45 dBm


2.445118000 GHz

Ref 16 dBm

* Att 30 dB

SWT 6.2 s

1 PK
 MAXH

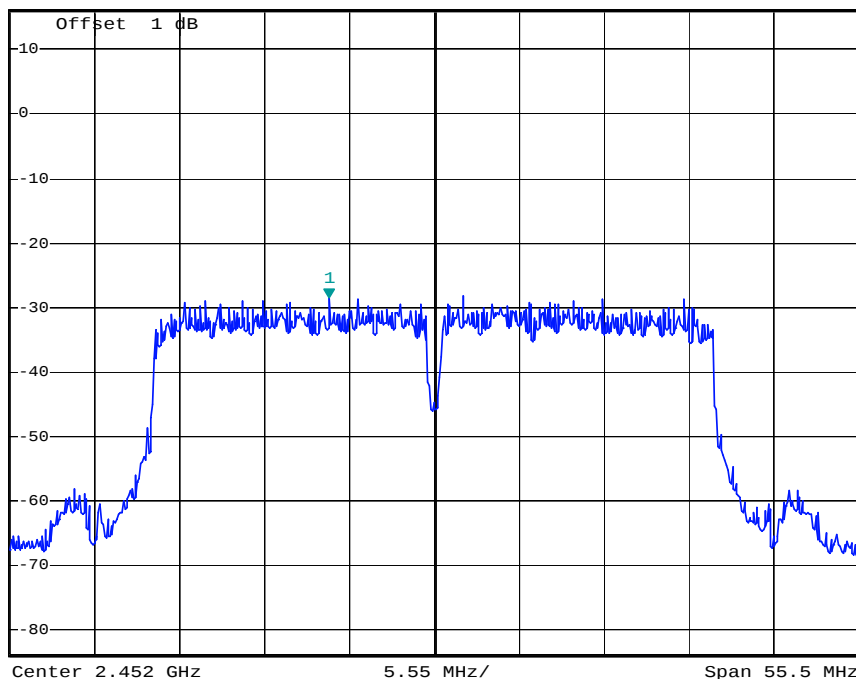

Date: 14.DEC.2012 16:29:35

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup



(EUT: Mobile Internet Device)

8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. TABLET PC (EUT)

Model Number	:	P102
Serial Number	:	N/A
Manufacturer	:	Pipo Technology Co., Ltd.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz MHz. We select 2412MHz, 2462MHz and 2422MHz, 2452MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

8.5.7. The band edges was measured and recorded.

8.6. Test Result

Pass

Conducted test

Date of Test:	<u>Dec 14, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mobile Internet Device</u>	Humidity:	<u>50%</u>
Model No.:	<u>P102</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Allen</u>

The test was performed with 802.11b

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	42.11	> 20dBc
2462	49.02	> 20dBc

The test was performed with 802.11g

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	32.88	> 20dBc
2462	41.97	> 20dBc


The test was performed with 802.11n (20MHz)

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	32.57	> 20dBc
2462	40.50	> 20dBc

The test was performed with 802.11n (40MHz)


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2422	27.11	> 20dBc
2452	45.08	> 20dBc

802.11b Channel Low 2412MHz

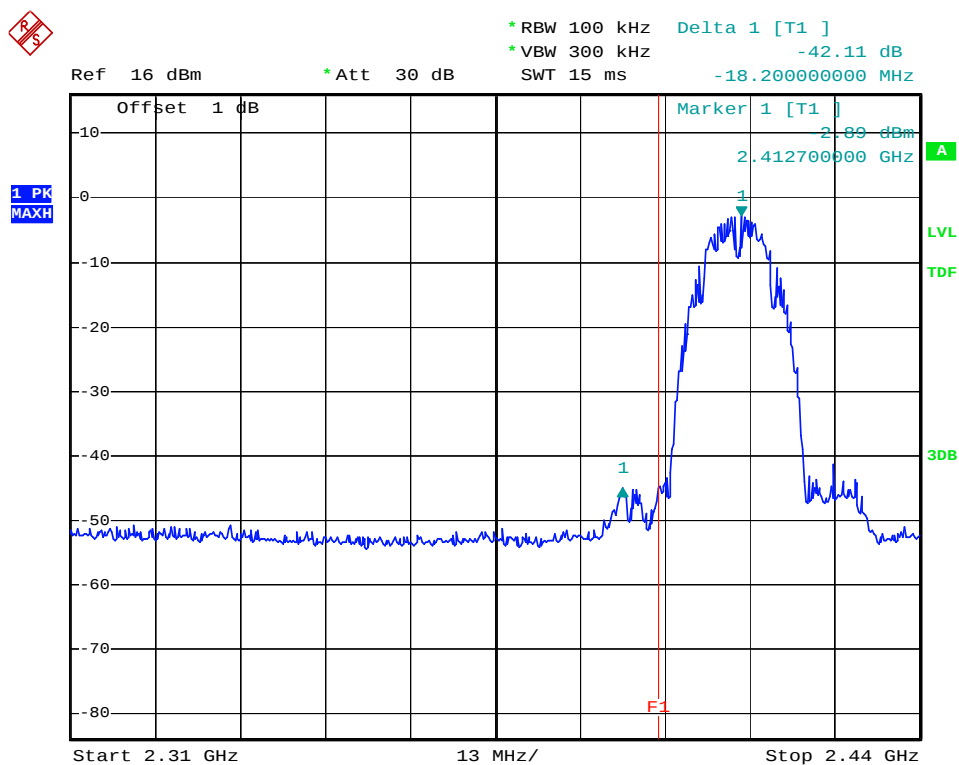


Date: 14.DEC.2012 15:12:39

802.11b Channel High 2462MHz

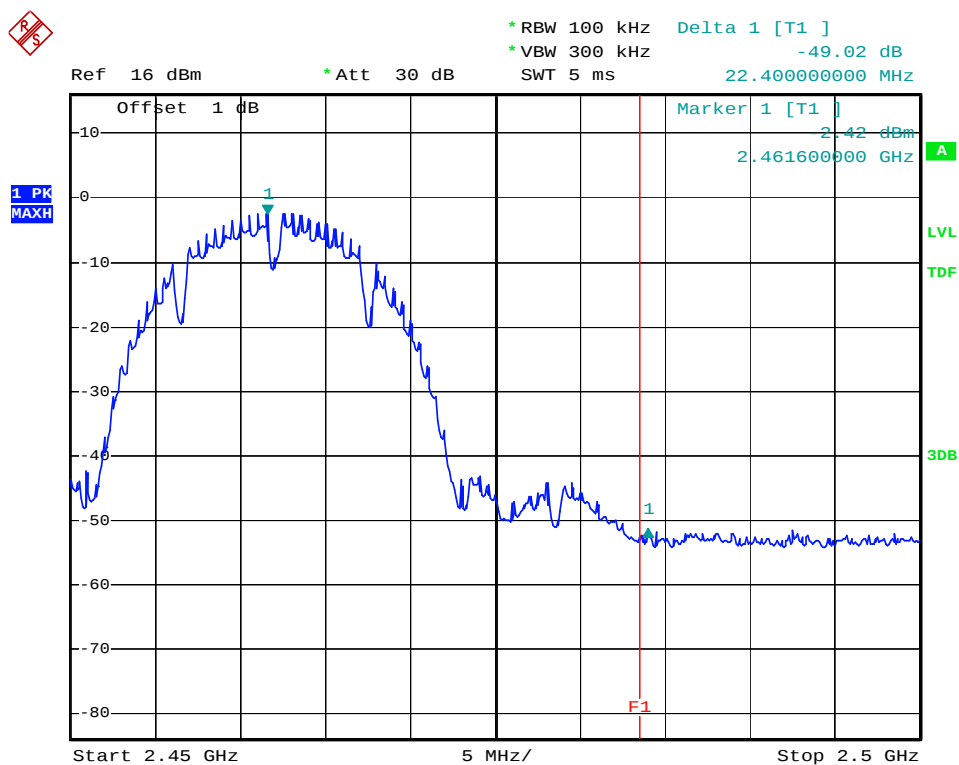


Date: 14.DEC.2012 15:25:07

802.11g Channel Low 2412MHz

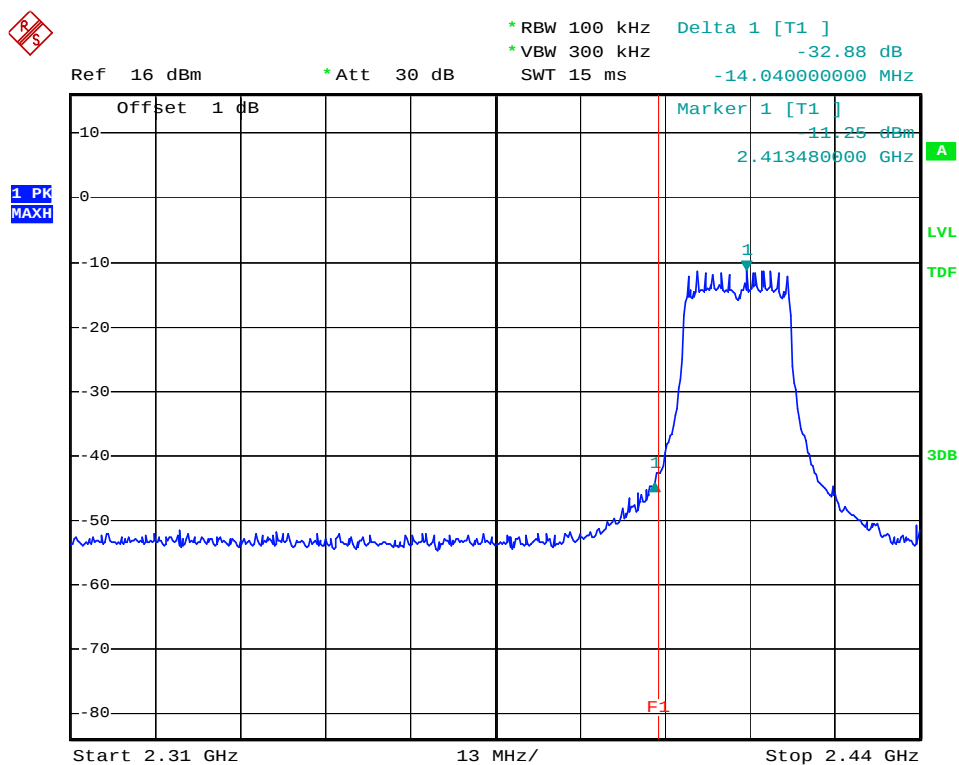


Date: 14.DEC.2012 15:44:07

802.11g Channel High 2462MHz

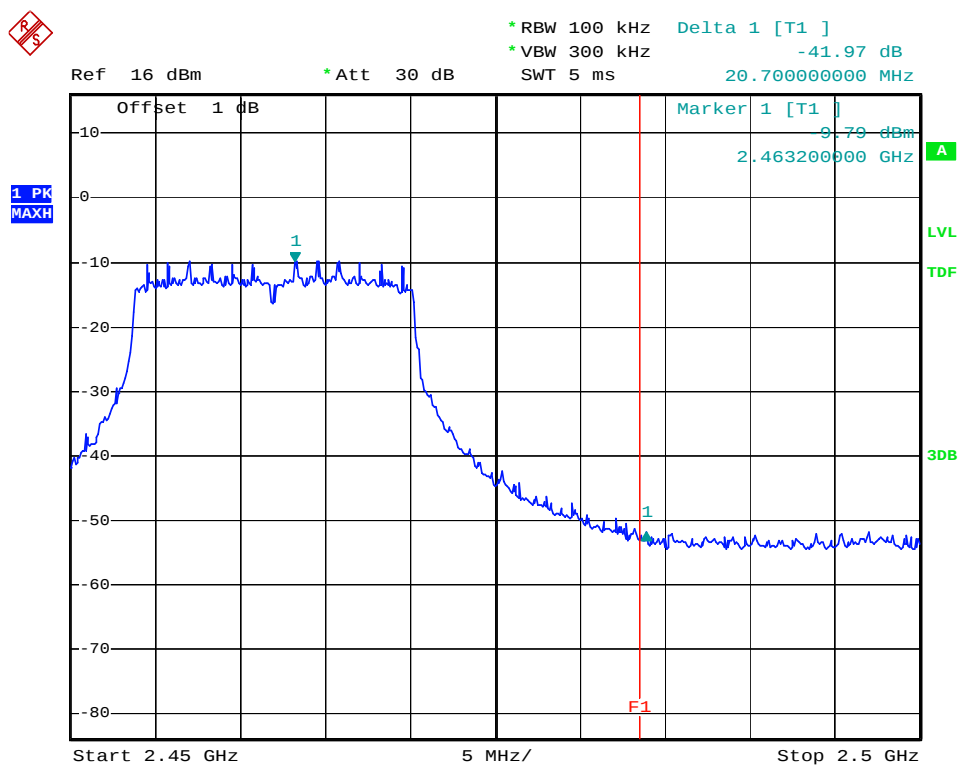


Date: 14.DEC.2012 15:26:53

802.11n Channel Low 2412MHz (20MHz)

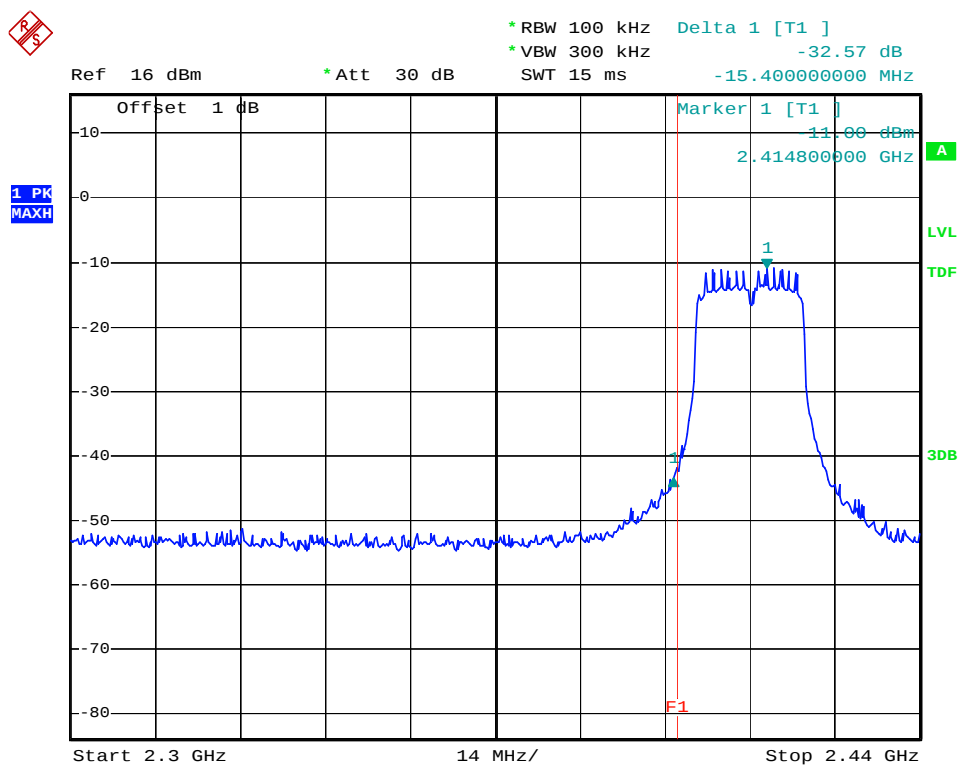


Date: 14.DEC.2012 15:53:14

802.11n Channel High 2462MHz (20MHz)

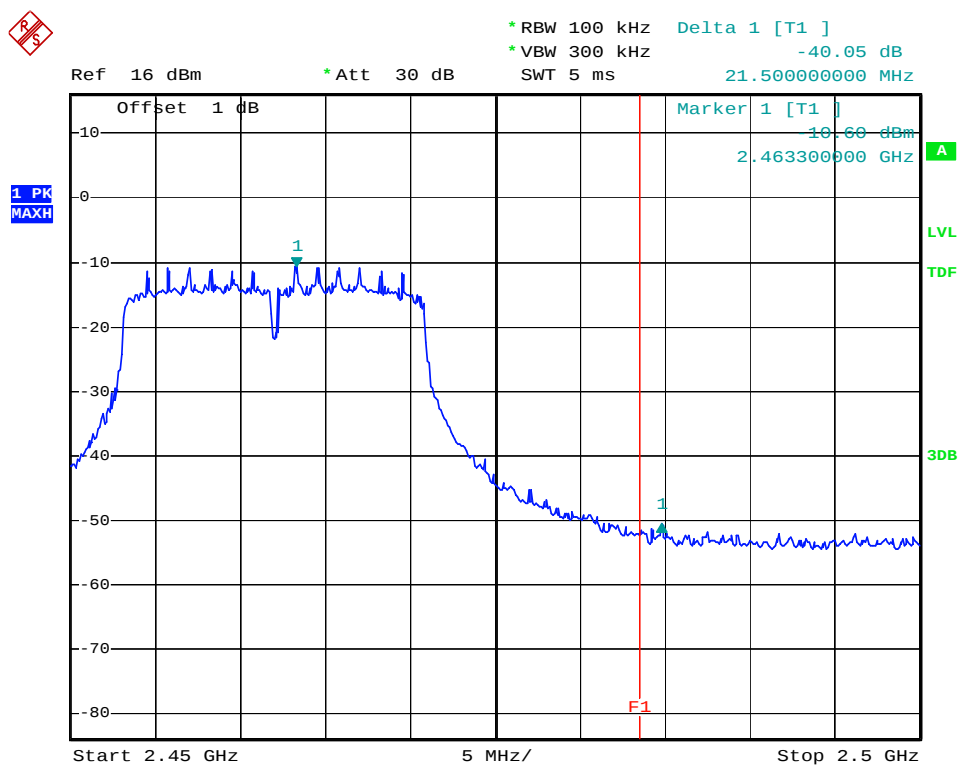


Date: 14.DEC.2012 16:03:00

802.11n Channel Low 2422MHz (40MHz)

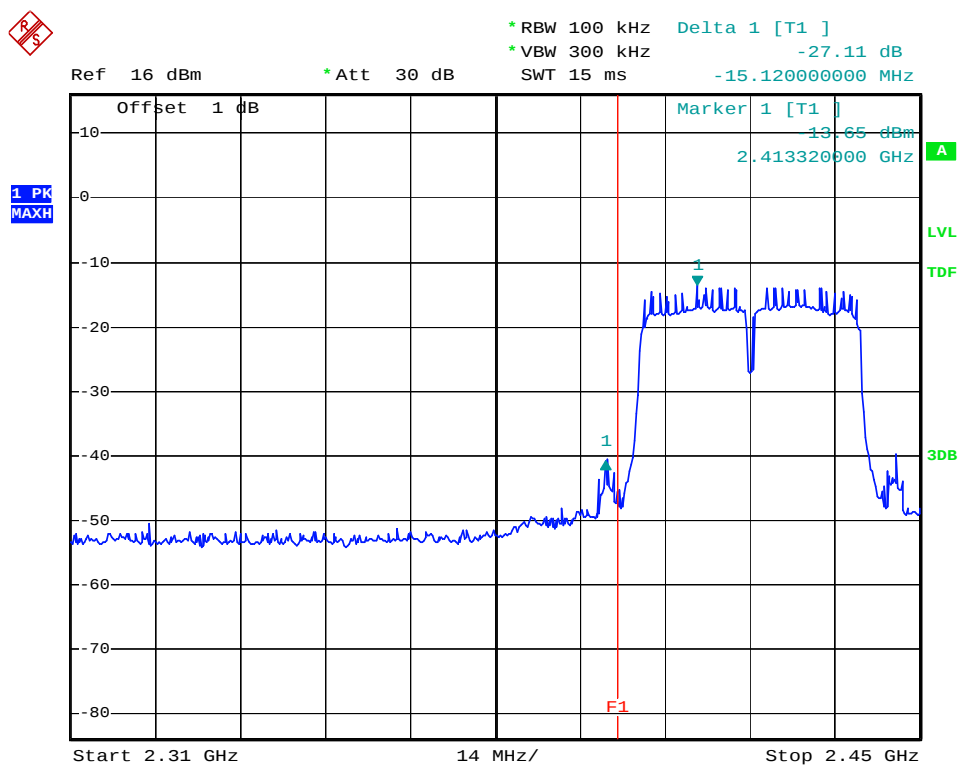

Date: 14.DEC.2012 16:14:41

802.11n Channel High 2452MHz (40MHz)

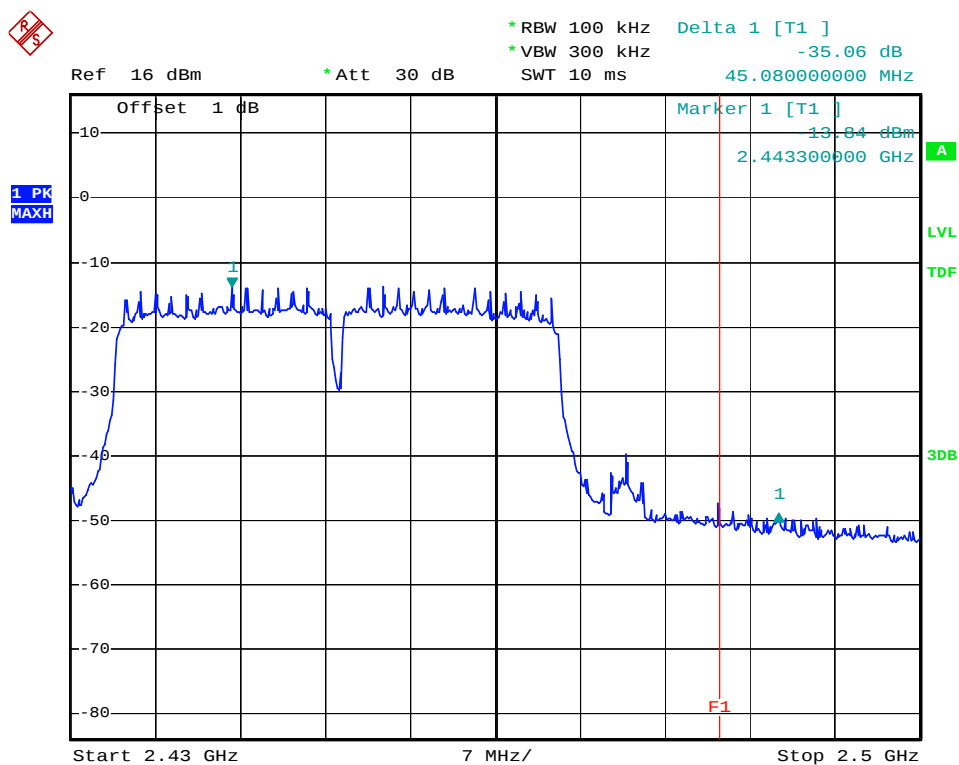

Date: 14.DEC.2012 16:27:28

Radiated Band Edge Result

Date of Test:	Dec 15, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel Low 2412MHz	Test Engineer:	Allen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2394.778	45.87	79.87	-7.49	38.38	42.38	54	74	-15.62	-31.62	Vertical
2400.000	52.05	55.86	-7.49	44.59	48.40	54	74	-9.41	-25.60	Vertical
2394.647	45.71	49.38	-7.46	38.22	41.89	54	74	-15.78	-32.11	Horizontal
2400.000	51.89	55.58	-7.46	44.43	48.12	54	74	-9.57	-25.88	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	Oct 15, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel High 2462MHz	Test Engineer:	Allen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	41.78	45.93	-7.37	34.41	38.56	54	74	-19.59	-35.44	Vertical
2487.559	44.35	48.69	-7.38	36.97	41.31	54	74	-17.03	-32.69	Vertical
2483.500	44.25	48.08	-7.37	36.88	40.71	54	74	-17.12	-33.29	Horizontal
2484.893	46.04	50.42	-7.38	38.66	43.04	54	74	-15.34	-30.96	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>Dec 15, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mobile Internet Device</u>	Humidity:	<u>50%</u>
Model No.:	<u>P102</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>802.11g Channel Low 2412MHz</u>	Test Engineer:	<u>Allen</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2398.855	58.36	63.91	-7.46	50.90	56.45	54	74	-3.10	-17.55	Vertical
2400.000	58.12	66.85	-7.46	50.66	59.39	54	74	-3.34	-14.61	Vertical
2396.618	53.14	57.08	-7.48	45.66	49.60	54	74	-8.34	-24.40	Horizontal
2400.000	57.87	63.99	-7.46	50.41	56.53	54	74	-3.59	-17.47	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>Dec 15, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mobile Internet Device</u>	Humidity:	<u>50%</u>
Model No.:	<u>P102</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>802.11g Channel High 2462MHz</u>	Test Engineer:	<u>Allen</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	45.88	49.42	-7.37	38.51	42.05	54	74	-15.49	-31.95	Vertical
2484.954	46.35	50.39	-7.38	38.97	43.01	54	74	-15.03	-30.99	Vertical
2483.500	42.11	45.76	-7.37	34.74	38.39	54	74	-19.26	-35.61	Horizontal
2485.014	42.01	46.22	-7.38	34.63	38.84	54	74	-19.37	-35.16	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	Dec 15, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel Low 2412MHz (20MHz)	Test Engineer:	Allen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2398.460	58.34	62.01	-7.46	50.88	54.55	54	74	-3.11	-18.16	Vertical
2400.000	58.36	63.31	-7.47	50.88	54.55	54	74	-3.12	-19.45	Vertical
2398.328	54.01	58.62	-7.47	46.54	51.15	54	74	-7.46	-22.85	Horizontal
2400.000	56.32	61.18	-7.46	48.86	53.72	54	74	-5.14	-20.28	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Date of Test:	Dec 15, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel High 2462MHz (20MHz)	Test Engineer:	Allen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	41.56	44.61	-7.37	34.19	37.24	54	74	-19.81	-36.76	Vertical
2486.406	42.01	47.93	-7.39	34.62	40.54	54	74	-19.38	-33.46	Vertical
2483.500	40.21	43.91	-7.37	32.84	36.54	54	74	-21.16	-37.46	Horizontal
2485.438	42.01	46.21	-7.38	34.63	38.83	54	74	-19.37	-35.17	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	Dec 15, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
	802.11n Channel Low 2422MHz		
Test Mode:	(40MHz)	Test Engineer:	Allen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2398.723	56.21	59.98	-7.47	48.74	52.51	54	74	-5.26	-21.49	Vertical
2400.000	52.04	55.06	-7.46	44.58	47.60	54	74	-9.42	-26.40	Vertical
2398.328	52.05	55.10	-7.47	44.58	47.63	54	74	-9.42	-26.37	Horizontal
2400.000	48.47	51.69	-7.46	41.01	44.23	54	74	-12.99	-29.77	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Date of Test:	Dec15, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel High 2452MHz (40MHz)	Test Engineer:	Allen

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	44.23	47.65	-7.37	36.86	40.28	54	74	-17.14	-33.72	Vertical
2485.861	45.12	48.90	-7.38	37.74	41.52	54	74	-16.26	-32.48	Vertical
2483.500	42.24	45.97	-7.37	34.87	38.60	54	74	-19.13	-35.40	Horizontal
2485.014	43.60	47.95	-7.38	36.22	40.57	54	74	-17.78	-33.43	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #739

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 1(802.11b)

Model: P102

Manufacturer: Pipio

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/10/35

Engineer Signature: Ricky

Distance: 3m

Note:

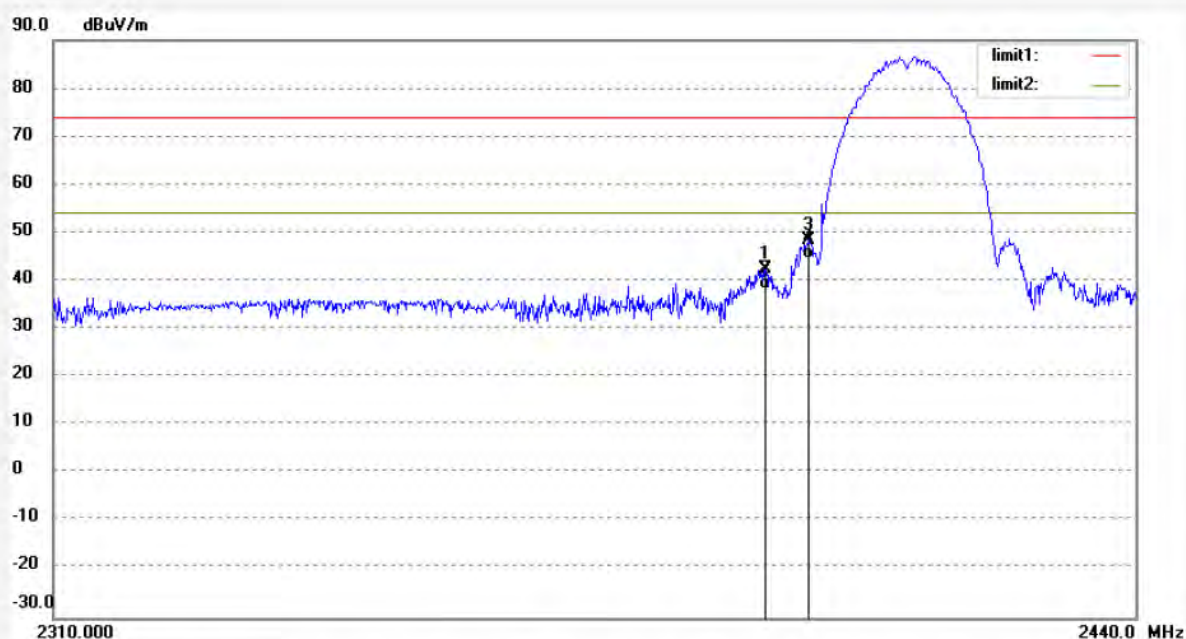

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2394.778	49.87	-7.49	42.38	74.00	-31.62	peak			
2	2394.778	45.87	-7.49	38.38	54.00	-15.62	AVG			
3	2400.000	55.86	-7.46	48.40	74.00	-25.60	peak			
4	2400.000	52.05	-7.46	44.59	54.00	-9.41	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #740

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 1(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/11/42

Engineer Signature: Ricky

Distance: 3m

Note:

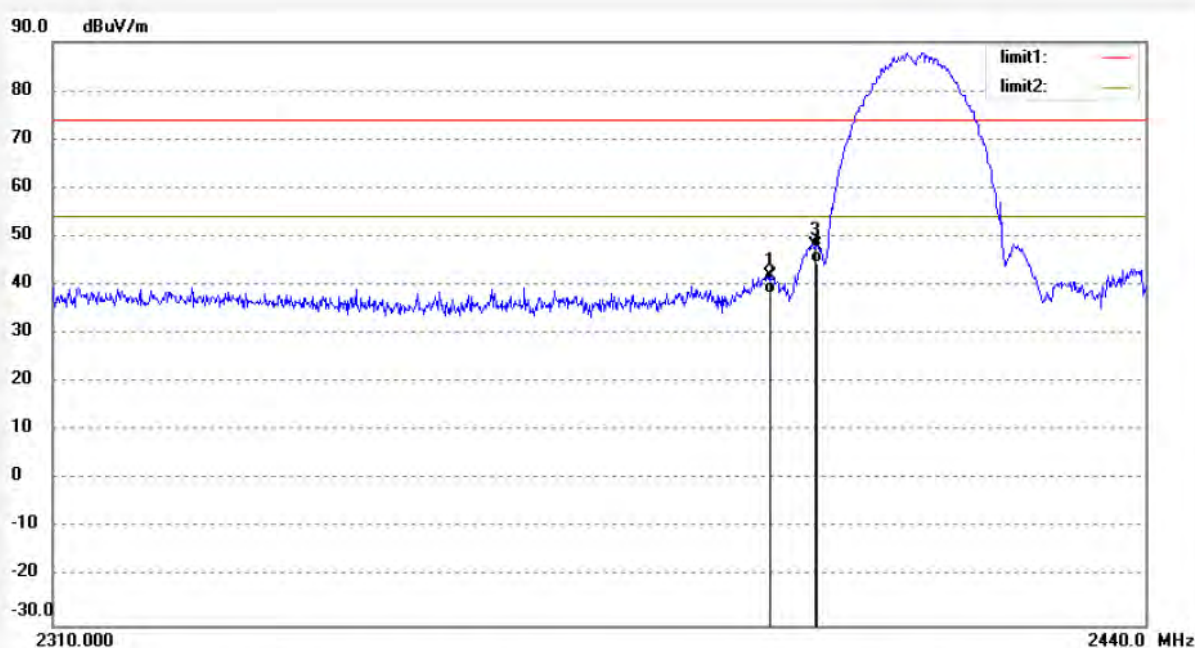

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2394.647	49.38	-7.49	41.89	74.00	-32.11	peak			
2	2394.647	45.71	-7.49	38.22	54.00	-15.78	AVG			
3	2400.000	55.58	-7.46	48.12	74.00	-25.88	peak			
4	2400.000	51.89	-7.46	44.43	54.00	-9.57	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #741

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 11(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/14/03

Engineer Signature: Ricky

Distance: 3m

Note:

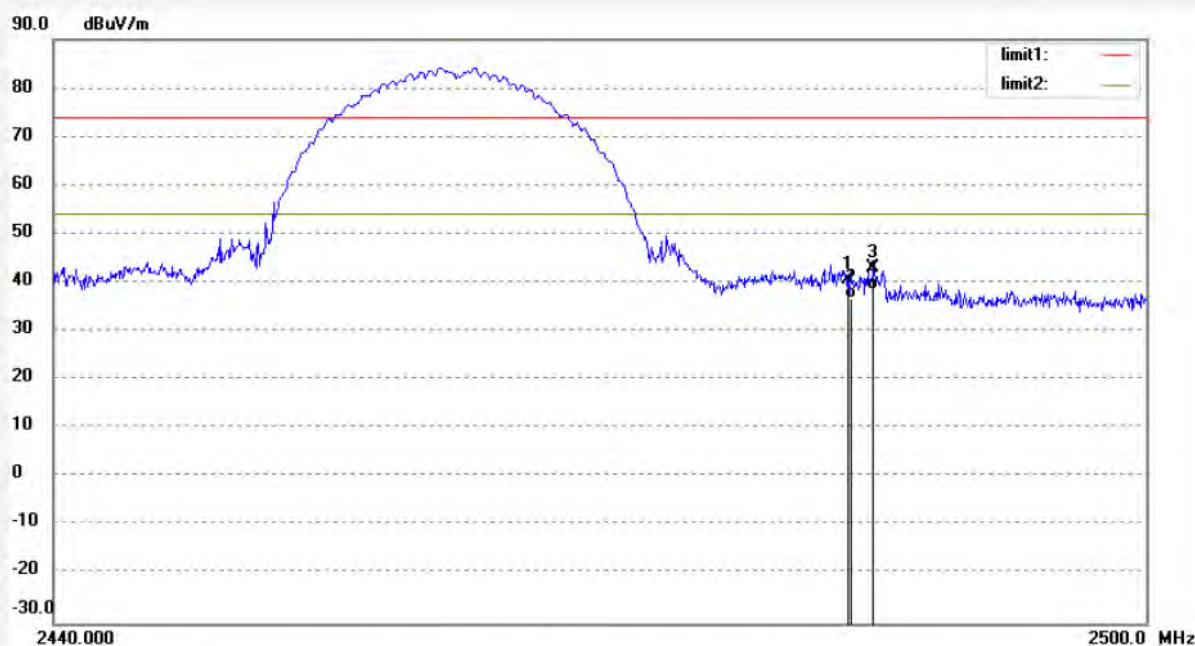

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.08	-7.37	40.71	74.00	-33.29	peak			
2	2483.500	44.25	-7.37	36.88	54.00	-17.12	AVG			
3	2484.893	50.42	-7.38	43.04	74.00	-30.96	peak			
4	2484.893	46.04	-7.38	38.66	54.00	-15.34	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #742

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 12(802.11b)

Model: P102

Manufacturer: Pipa

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/15/14

Engineer Signature: Ricky

Distance: 3m

Note:

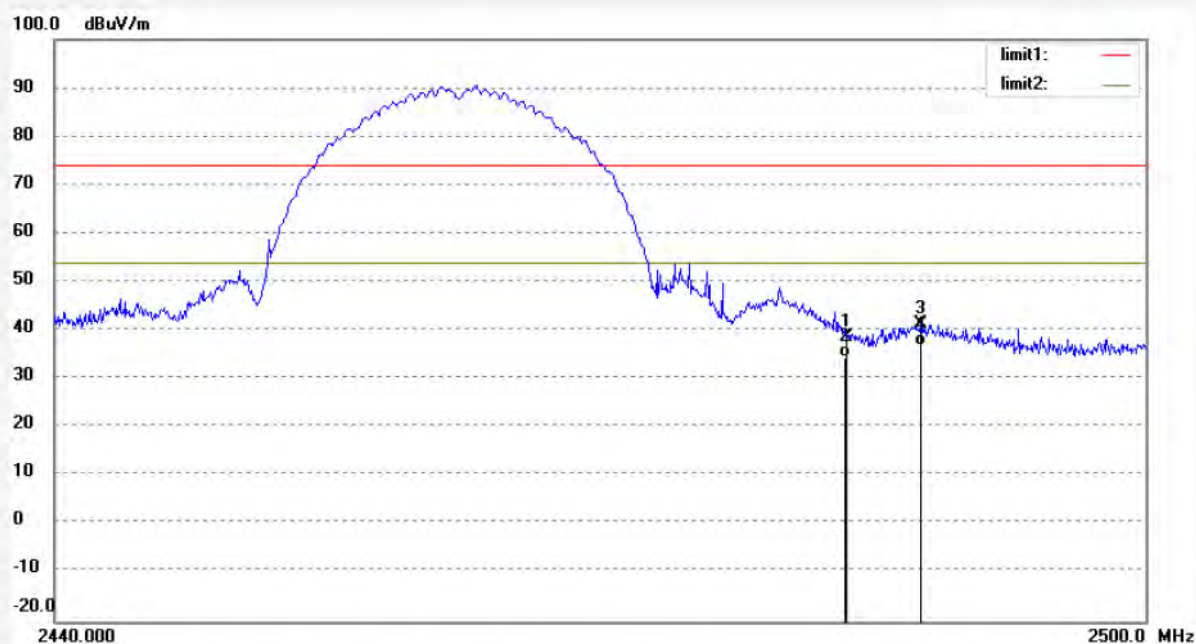

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.93	-7.37	38.56	74.00	-35.44	peak			
2	2483.500	41.78	-7.37	34.41	54.00	-19.59	AVG			
3	2487.556	48.69	-7.38	41.31	74.00	-32.69	peak			
4	2487.556	44.35	-7.38	36.97	54.00	-17.03	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #743

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 11(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/17/52

Engineer Signature: Ricky

Distance: 3m

Note:

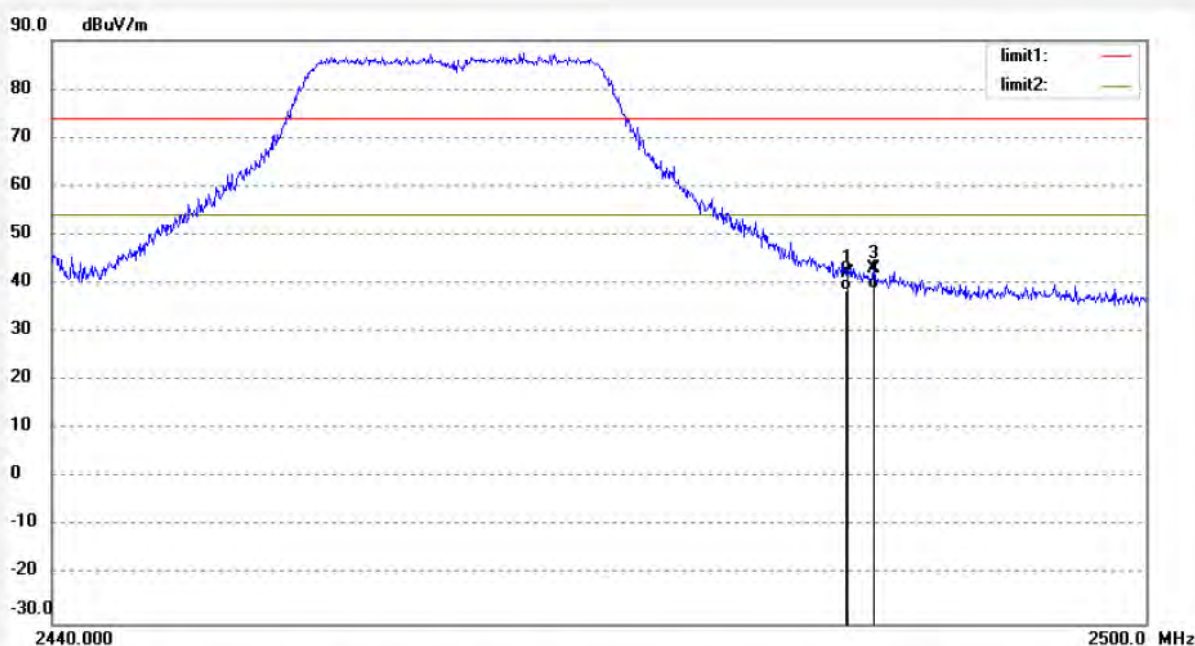

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.42	-7.37	42.05	74.00	-31.95	peak			
2	2483.500	45.88	-7.37	38.51	54.00	-15.49	AVG			
3	2484.954	50.39	-7.38	43.01	74.00	-30.99	peak			
4	2484.954	46.35	-7.38	38.97	54.00	-15.03	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #744

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 11(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/19/19

Engineer Signature: Ricky

Distance: 3m

Note:

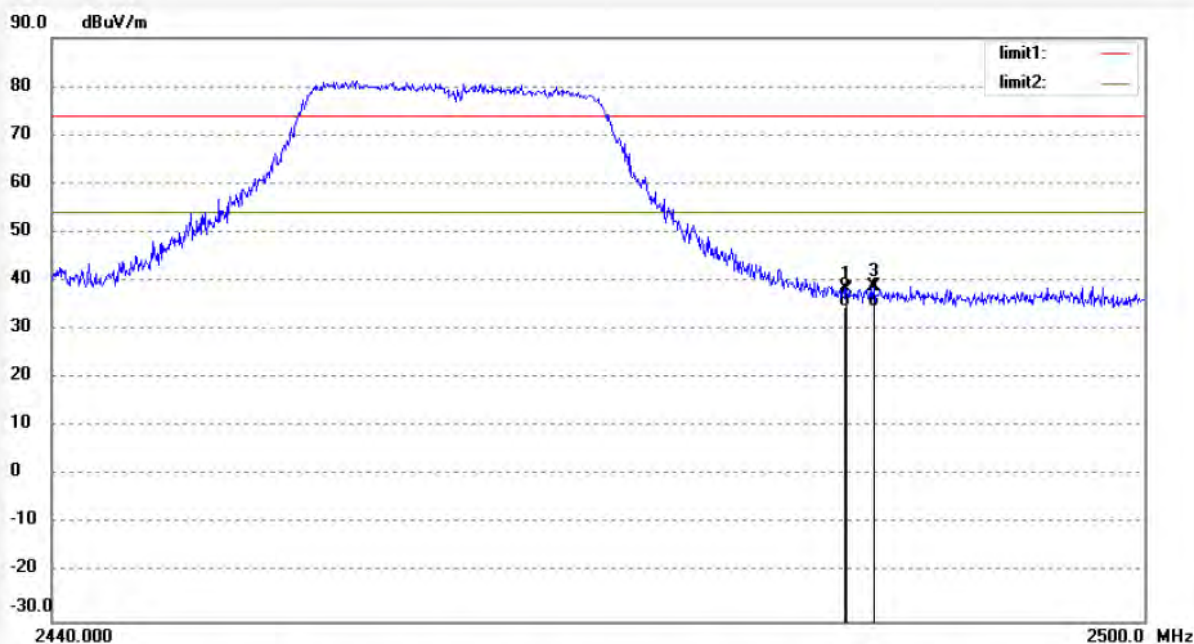

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.76	-7.37	38.39	74.00	-35.61	peak			
2	2483.500	42.11	-7.37	34.74	54.00	-19.26	AVG			
3	2485.014	46.22	-7.38	38.84	74.00	-35.16	peak			
4	2485.014	42.01	-7.38	34.63	54.00	-19.37	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #745

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 1(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/21/28

Engineer Signature: Ricky

Distance: 3m

Note:

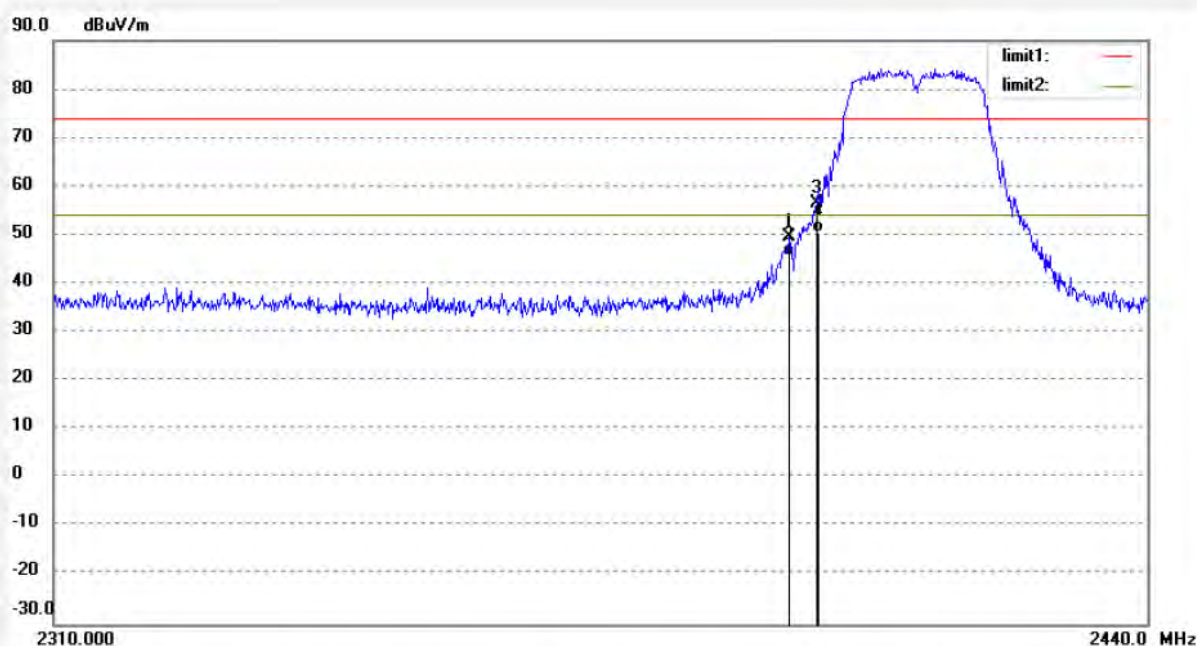

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2396.618	57.08	-7.48	49.60	74.00	-24.40	peak			
2	2396.618	53.14	-7.48	45.66	54.00	-8.34	AVG			
3	2400.000	63.99	-7.46	56.53	74.00	-17.47	peak			
4	2400.000	57.87	-7.46	50.41	54.00	-3.59	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #746

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 1(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/23/02

Engineer Signature: Ricky

Distance: 3m

Note:

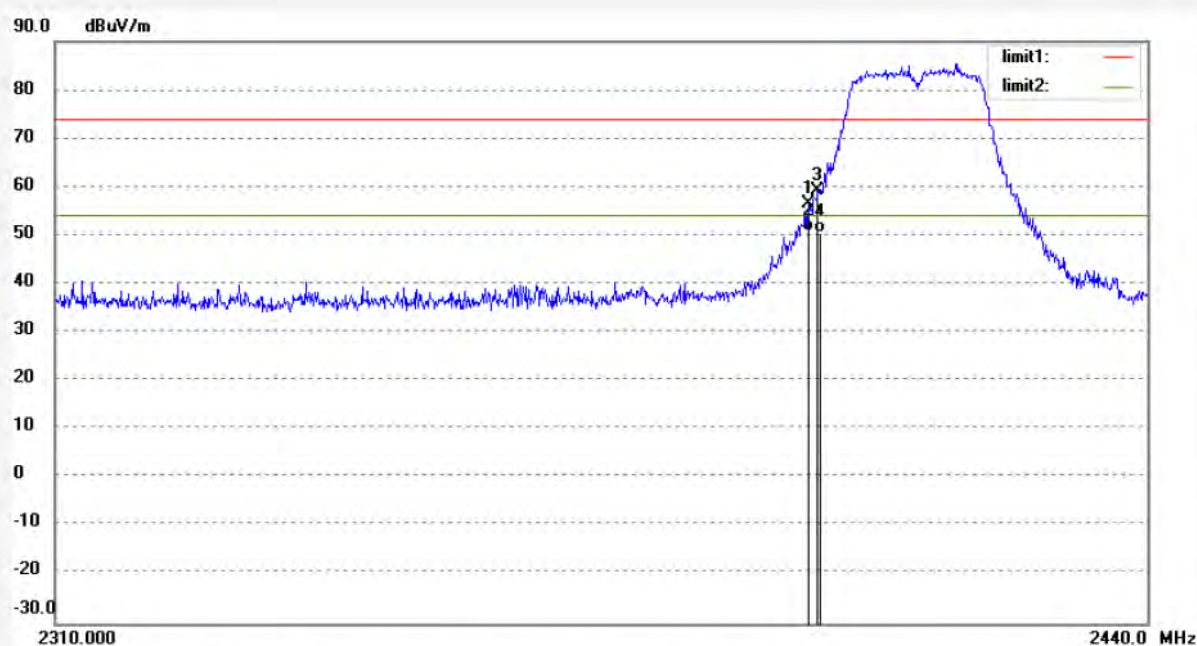

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.855	63.91	-7.46	56.45	74.00	-17.55	peak			
2	2398.855	58.36	-7.46	50.90	54.00	-3.10	AVG			
3	2400.000	66.85	-7.46	59.39	74.00	-14.61	peak			
4	2400.000	58.12	-7.46	50.66	54.00	-3.34	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #747

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 1(802.11n)20MHz

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/26/49

Engineer Signature: Ricky

Distance: 3m

Note:

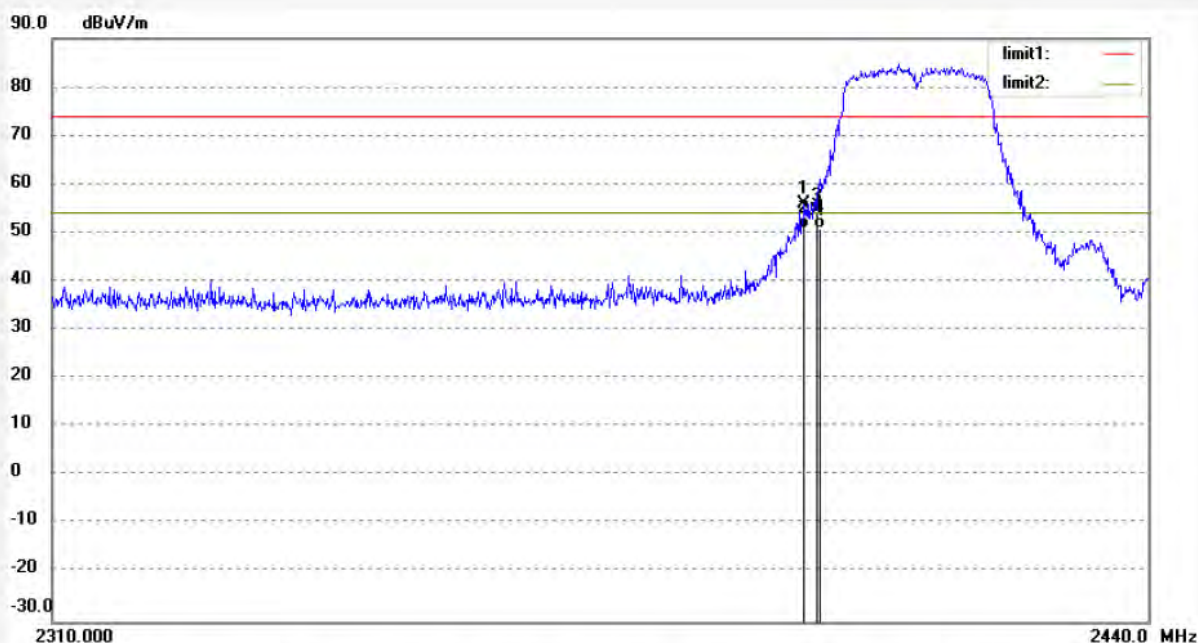

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.460	63.31	-7.47	55.84	74.00	-18.16	peak			
2	2398.460	58.36	-7.47	50.89	54.00	-3.11	AVG			
3	2400.000	62.01	-7.46	54.55	74.00	-19.45	peak			
4	2400.000	58.34	-7.46	50.88	54.00	-3.12	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #748

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 1(802.11n)20MHz

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/27/59

Engineer Signature: Ricky

Distance: 3m

Note:

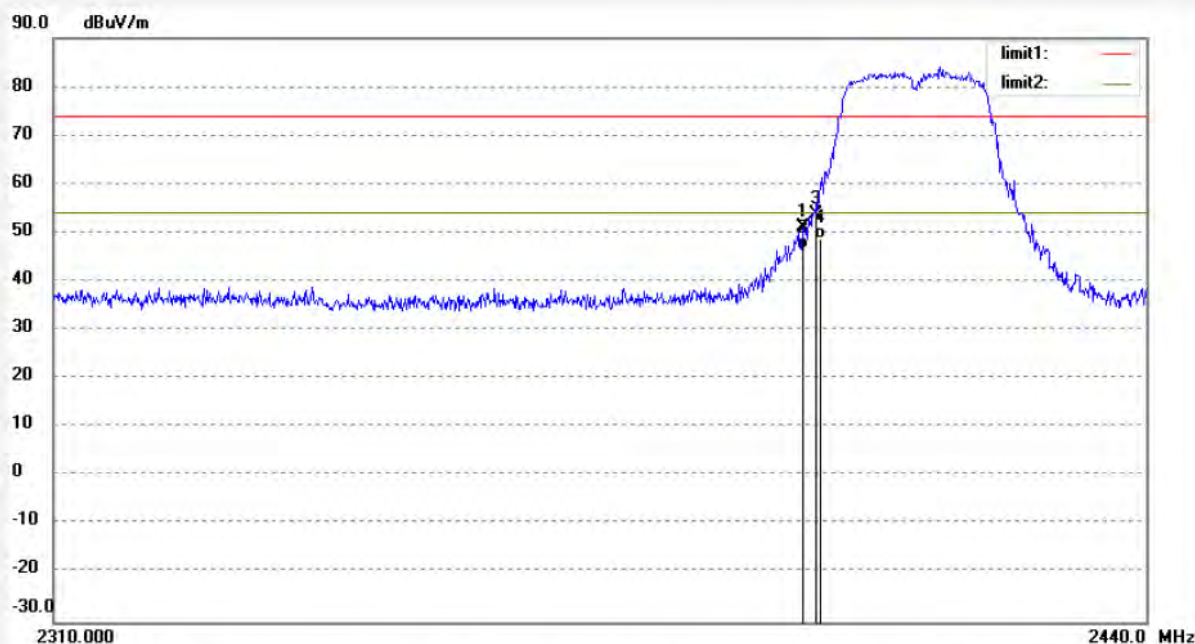

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.328	58.62	-7.47	51.15	74.00	-22.85	peak			
2	2398.328	54.01	-7.47	46.54	54.00	-7.46	AVG			
3	2400.000	61.18	-7.46	53.72	74.00	-20.28	peak			
4	2400.000	56.32	-7.46	48.86	54.00	-5.14	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #749

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 11(802.11n)20MHz

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/30/12

Engineer Signature: Ricky

Distance: 3m

Note:

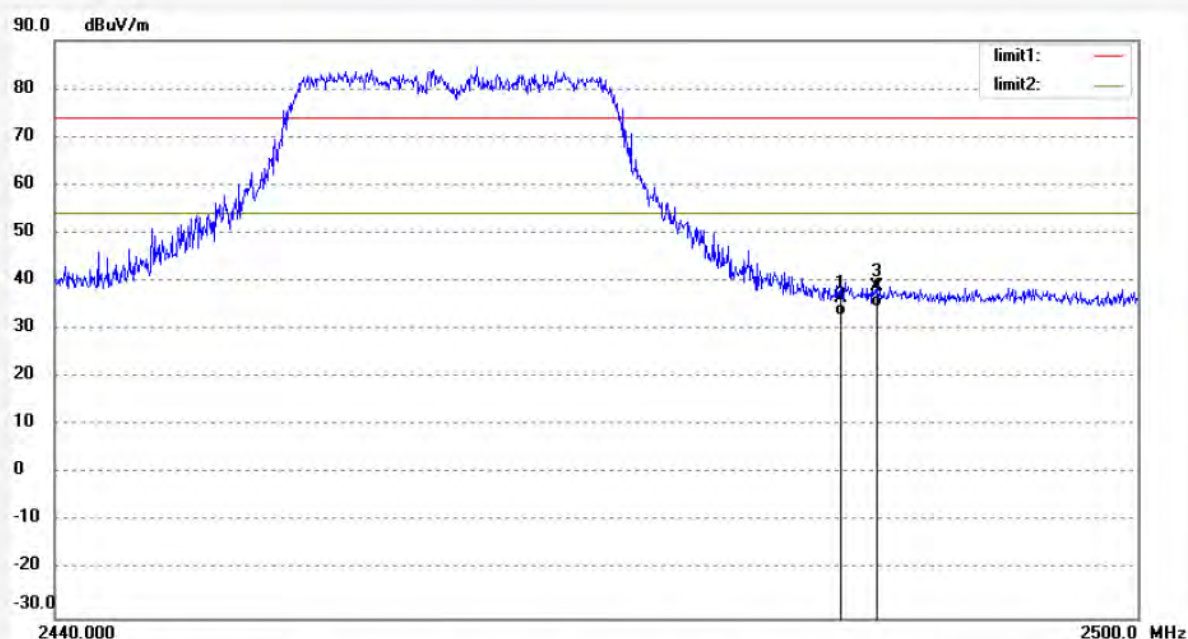

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	43.91	-7.37	36.54	74.00	-37.46	peak			
2	2483.500	40.21	-7.37	32.84	54.00	-21.16	AVG			
3	2485.438	46.21	-7.38	38.83	74.00	-35.17	peak			
4	2485.438	42.01	-7.38	34.63	54.00	-19.37	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #750

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 11(802.11n)20MHz

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/34/16

Engineer Signature: Ricky

Distance: 3m

Note:

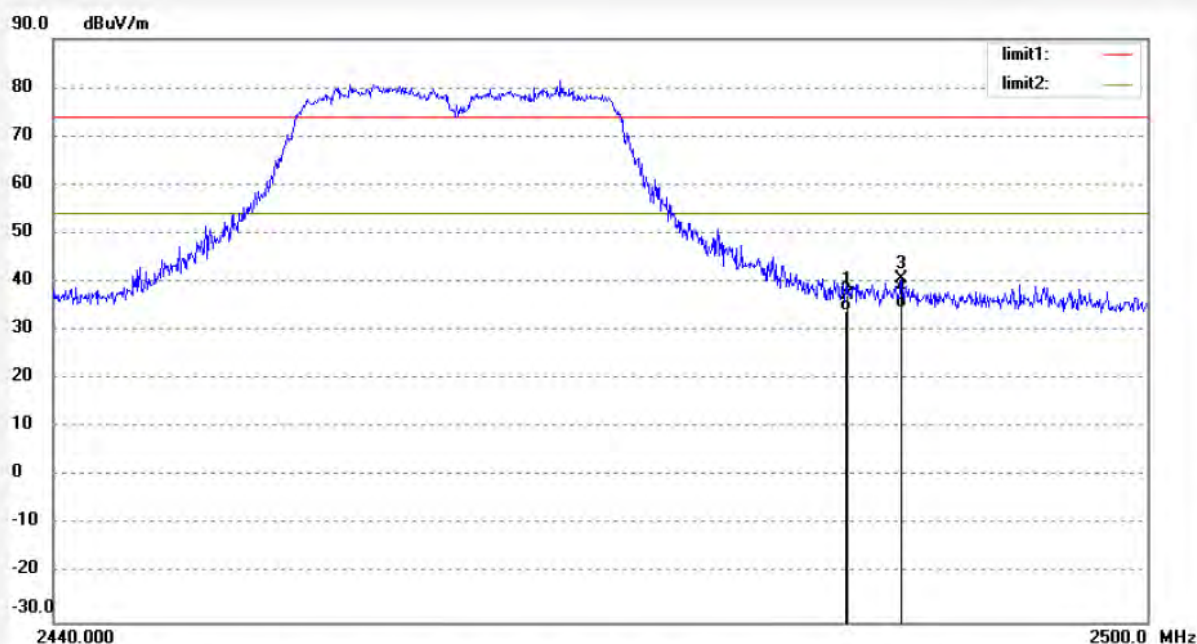

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.61	-7.37	37.24	74.00	-36.76	peak			
2	2483.500	41.56	-7.37	34.19	54.00	-19.81	AVG			
3	2486.406	47.93	-7.39	40.54	74.00	-33.46	peak			
4	2486.406	42.01	-7.39	34.62	54.00	-19.38	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #751

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 9(802.11n)40MHz

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/37/16

Engineer Signature: Ricky

Distance: 3m

Note:

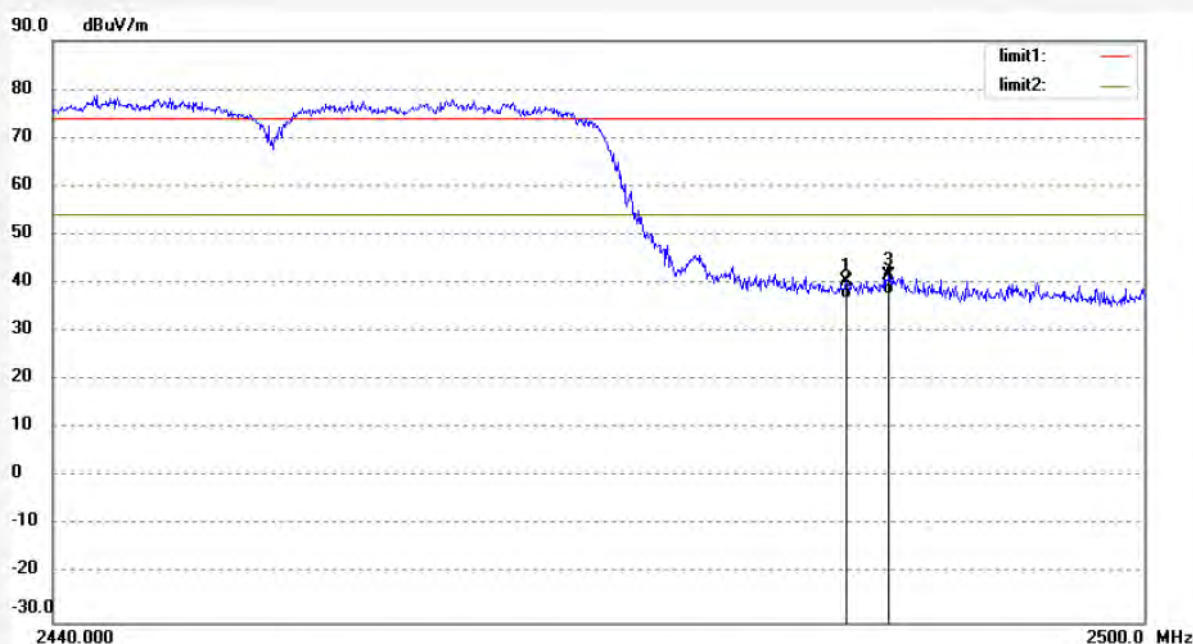

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.65	-7.37	40.28	74.00	-33.72	peak			
2	2483.500	44.23	-7.37	36.86	54.00	-17.14	AVG			
3	2485.861	48.90	-7.38	41.52	74.00	-32.48	peak			
4	2485.861	45.12	-7.38	37.74	54.00	-16.26	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #752

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 9(802.11n)40MHz

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/38/49

Engineer Signature: Ricky

Distance: 3m

Note:

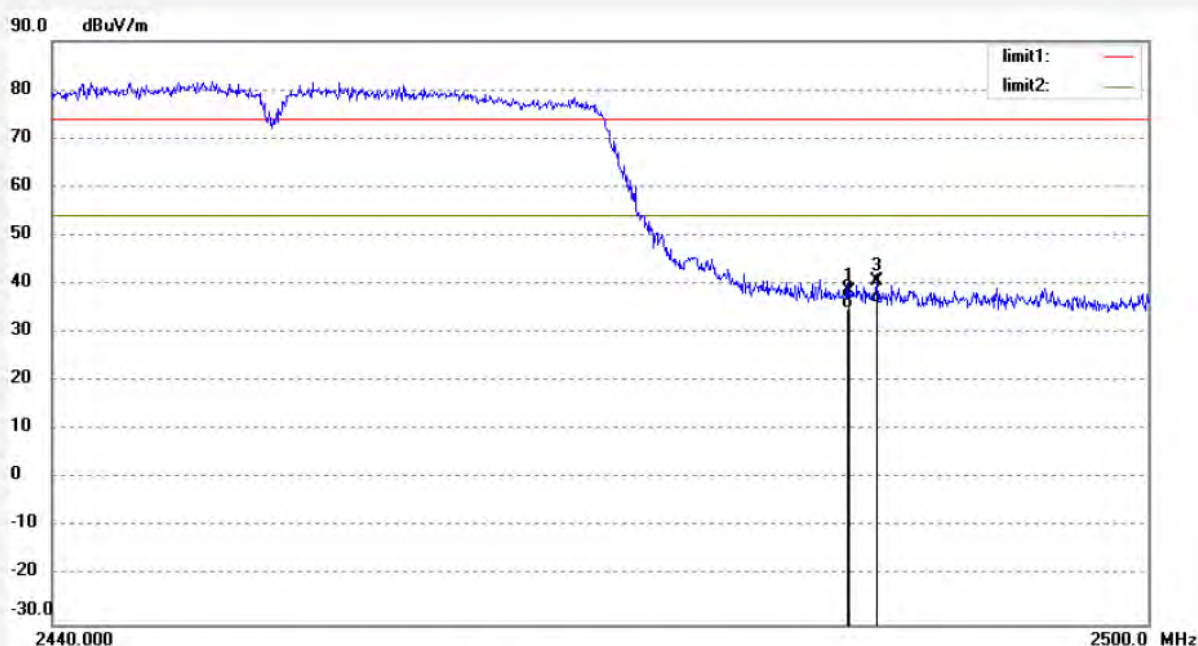

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.97	-7.37	38.60	74.00	-35.40	peak			
2	2483.500	42.24	-7.37	34.87	54.00	-19.13	AVG			
3	2485.014	47.95	-7.38	40.57	74.00	-33.43	peak			
4	2485.014	43.60	-7.38	36.22	54.00	-17.78	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #753

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 3(802.11n)40MHz

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/40/53

Engineer Signature: Ricky

Distance: 3m

Note:

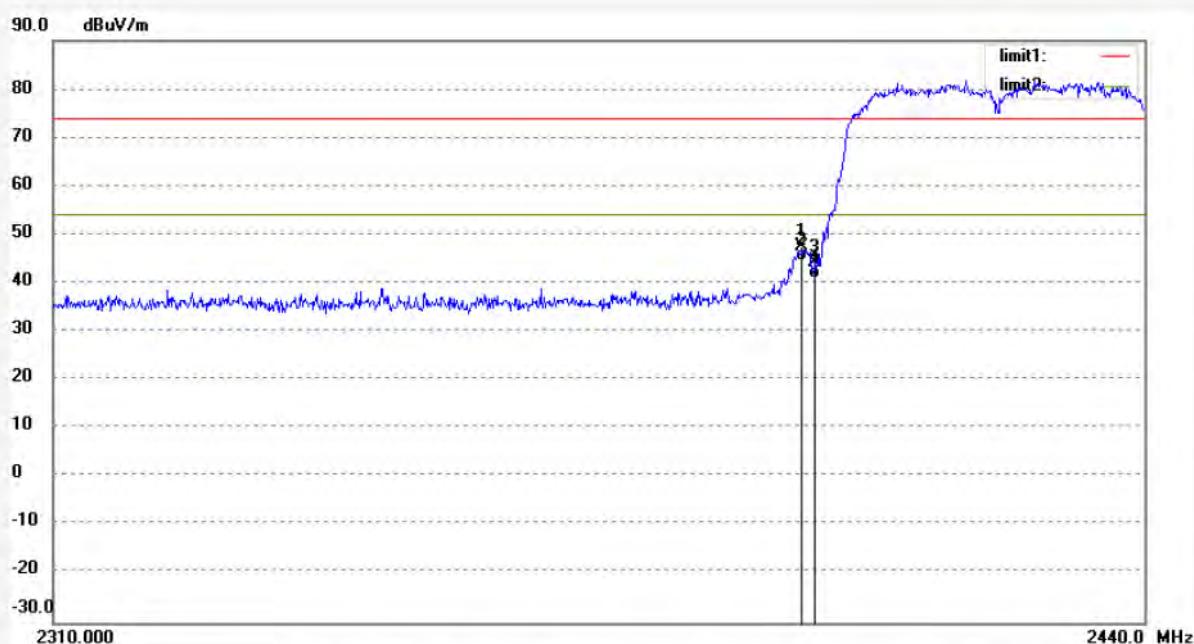

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.328	55.10	-7.47	47.63	74.00	-26.37	peak			
2	2398.328	52.05	-7.47	44.58	54.00	-9.42	AVG			
3	2400.000	51.69	-7.46	44.23	74.00	-29.77	peak			
4	2400.000	48.47	-7.46	41.01	54.00	-12.99	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #754

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Mobile internet device

Mode: TX Channel 3(802.11n)40MHz

Model: P102

Manufacturer: Pipio

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/12/15/

Time: 9/43/03

Engineer Signature: Ricky

Distance: 3m

Note:

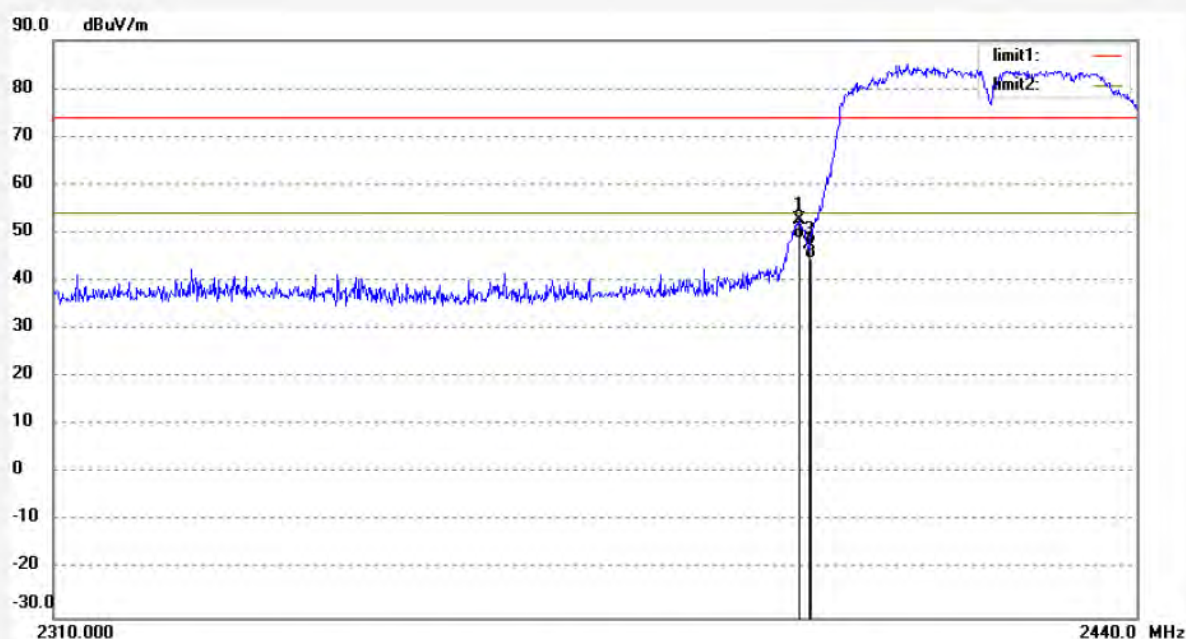


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2398.723	59.98	-7.47	52.51	74.00	-21.49	peak			
2	2398.723	56.21	-7.47	48.74	54.00	-5.26	AVG			
3	2400.000	55.06	-7.46	47.60	74.00	-26.40	peak			
4	2400.000	52.04	-7.46	44.58	54.00	-9.42	AVG			

9. RADIATED SPURIOUS EMISSION TEST

9.1. Block Diagram of Test Setup


9.1.1. Block diagram of connection between the EUT and peripherals

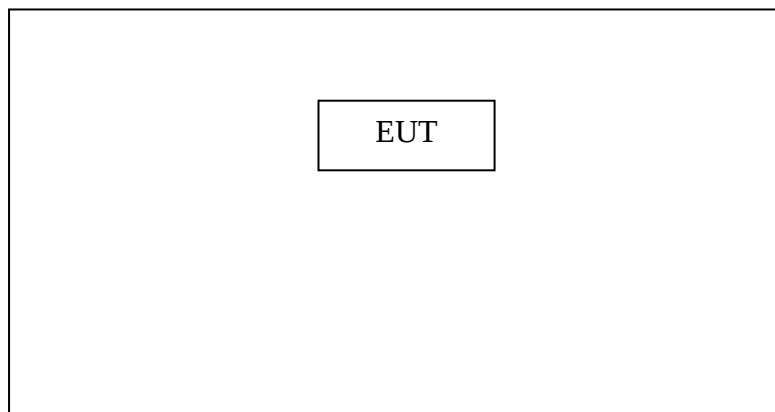

Setup: Transmitting mode

(EUT: Mobile Internet Device)

9.1.2. Semi-Anechoic Chamber Test Setup Diagram

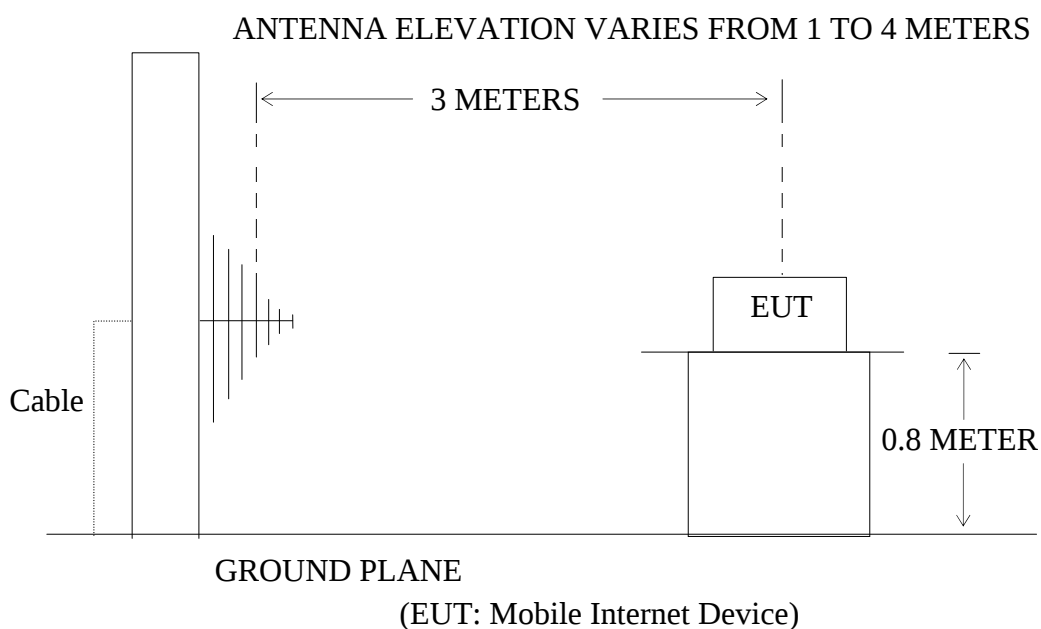

9.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3.Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.4.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.1.TABLET PC (EUT)

Model Number : P102
 Serial Number : N/A
 Manufacturer : Pipo Technology Co., Ltd.

9.5.Operating Condition of EUT

9.5.1.Setup the EUT and simulator as shown as Section 9.1.

9.5.2.Turn on the power of all equipment.

9.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

9.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 300Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

9.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel Low 2412MHz	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
36.2678	21.32	16.60	37.92	40.00	-2.08	Vertical
105.1667	26.96	14.41	41.37	43.50	-2.13	Vertical
134.0193	23.11	14.72	37.83	43.50	-5.67	Vertical
133.0809	12.14	14.76	26.90	43.50	-16.60	Horizontal
250.4859	15.67	17.56	33.23	46.00	-12.77	Horizontal
353.4471	12.78	21.01	33.79	46.00	-12.21	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4824.000	46.78	49.26	-0.31	46.47	48.95	54	74	-7.53	-25.05	Vertical
4824.000	48.49	48.49	-0.31	48.18	48.18	54	74	-5.82	-25.82	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel Middle 2437MHz	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
36.6521	20.97	16.58	37.55	40.00	-2.45	Vertical
105.5369	27.12	14.39	41.51	43.50	-1.99	Vertical
134.0194	22.63	14.72	37.35	43.50	-6.15	Vertical
131.2235	11.69	14.85	26.54	43.50	-16.96	Horizontal
213.8535	13.98	16.50	30.48	43.50	-13.02	Horizontal
354.6912	13.64	21.09	34.73	46.00	-11.27	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4874.000	46.25	48.94	-0.08	46.17	48.86	54	74	-7.83	-25.14	Vertical
4874.000	46.23	49.06	-0.08	46.15	48.98	54	74	-7.85	-25.02	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11b Channel High 2462MHz	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
35.7616	21.21	16.63	37.84	40.00	-2.16	Vertical
105.5369	21.63	14.39	36.02	43.50	-7.48	Vertical
139.7908	22.36	14.50	36.86	43.50	-6.64	Vertical
222.2807	15.36	16.80	32.16	46.00	-13.84	Horizontal
261.2730	14.21	18.62	32.83	46.00	-13.17	Horizontal
355.9397	12.57	21.14	33.71	46.00	-12.29	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4924.000	44.65	47.54	0.30	44.95	47.84	54	74	-9.05	-28.16	Vertical
4924.000	45.01	48.76	0.30	45.31	49.06	54	74	-8.69	-24.94	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11g Channel Low 2412MHz	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
35.7617	20.12	16.63	36.75	40.00	-3.25	Vertical
105.1668	26.04	14.41	40.45	43.50	-3.05	Vertical
134.9645	22.57	14.67	37.24	43.50	-6.26	Vertical
35.2626	15.30	16.63	31.93	40.00	-8.07	Horizontal
253.1402	15.47	17.74	33.21	46.00	-12.79	Horizontal
352.2075	14.02	20.92	34.94	46.00	-11.06	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4824.000	45.36	48.07	-0.31	45.05	47.76	54	74	-8.95	-26.24	Vertical
4824.000	45.02	47.80	-0.31	44.71	47.49	54	74	-9.29	-26.51	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11g Channel Middle 2437MHz	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
35.7617	22.30	16.63	38.93	40.00	-1.07	Vertical
105.5369	25.74	14.39	40.13	43.50	-3.37	Vertical
131.2235	22.30	14.85	37.15	43.50	-6.35	Vertical
212.3560	14.02	16.44	30.46	43.50	-13.04	Horizontal
263.1155	13.21	18.64	31.85	46.00	-14.15	Horizontal
355.9397	12.39	21.14	33.53	46.00	-12.47	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4874.000	45.67	48.33	-0.08	45.59	48.25	54	74	-8.41	-25.75	Vertical
4874.000	48.94	48.94	-0.08	48.86	48.86	54	74	-5.14	-25.14	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Dec 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
36.1406	20.24	16.61	36.85	40.00	-3.15	Vertical
105.1668	25.63	14.41	40.04	43.50	-3.46	Vertical
130.3048	22.34	14.89	37.23	43.50	-6.27	Vertical
213.1035	14.69	16.46	32.15	43.50	-11.35	Horizontal
260.3566	14.65	18.60	33.25	46.00	-12.75	Horizontal
347.1925	13.35	21.17	34.52	46.00	-11.48	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4924.000	44.56	47.21	0.30	44.86	47.51	54	74	-9.14	-26.49	Vertical
4924.000	45.12	47.74	0.30	45.42	48.04	54	74	-8.58	-25.96	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
	802.11n Channel Low 2412MHz		
Test Mode:	(20MHz)	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
36.1406	21.86	16.61	38.47	40.00	-1.53	Vertical
105.9084	25.36	14.35	39.71	43.50	-3.79	Vertical
133.5493	23.60	14.74	38.34	43.50	-5.16	Vertical
133.5493	11.31	14.74	26.05	43.50	-17.45	Horizontal
214.6063	13.91	16.52	30.43	43.50	-13.07	Horizontal
353.4471	14.63	21.01	35.64	46.00	-10.36	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4824.000	44.89	47.53	-0.31	44.58	47.22	54	74	-9.45	-26.78	Vertical
4824.000	45.02	47.76	-0.31	44.71	47.45	54	74	-9.29	-26.55	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel Middle 2437MHz (20MHz)	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
35.6362	21.96	16.65	38.61	40.00	-1.39	Vertical
50.9961	19.02	14.18	33.20	40.00	-6.80	Vertical
105.1668	26.01	14.41	40.42	43.50	-3.08	Vertical
226.2202	16.04	16.91	32.95	46.00	-13.05	Horizontal
259.4433	14.69	18.52	33.21	46.00	-12.79	Horizontal
355.9397	11.97	21.14	33.11	46.00	-12.89	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4874.000	45.87	48.66	-0.08	45.79	48.58	54	74	-8.21	-25.42	Vertical
4874.000	45.15	48.23	-0.08	45.07	48.15	54	74	-8.93	-25.85	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel High 2462MHz (20MHz)	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
35.7617	22.01	16.63	38.64	40.00	-1.36	Vertical
51.1756	19.67	14.13	33.80	40.00	-6.20	Vertical
104.4303	25.30	14.37	39.67	43.50	-3.83	Vertical
128.9385	10.63	14.94	25.57	43.50	-17.93	Horizontal
208.6580	13.69	16.30	29.99	43.50	-13.51	Horizontal
354.6912	12.63	21.09	33.72	46.00	-12.28	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4924.000	44.68	47.23	0.30	44.98	47.53	54	74	-9.02	-26.47	Vertical
4924.000	44.36	46.91	0.30	44.66	47.21	54	74	-9.34	-26.79	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel Low 2422MHz (40MHz)	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
61.0041	20.74	12.73	33.47	40.00	-6.53	Vertical
89.4716	22.60	13.82	36.42	43.50	-7.08	Vertical
105.1667	24.32	13.93	38.25	43.50	-5.28	Vertical
104.7978	10.23	13.97	24.20	43.50	-19.30	Horizontal
231.8531	21.56	15.12	36.68	46.00	-9.32	Horizontal
349.7411	9.10	18.37	27.47	46.00	-18.53	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4844.000	44.89	47.74	-0.31	44.58	47.43	54	74	-9.42	-26.57	Vertical
4844.000	45.21	48.31	-0.31	44.90	48.00	54	74	-9.10	-26.00	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
Test Mode:	802.11n Channel Middle 2437MHz (40MHz)	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
59.9418	22.74	13.10	35.84	40.00	-4.16	Vertical
90.1025	21.69	13.86	35.55	43.50	-7.95	Vertical
104.7978	22.36	13.97	36.33	43.50	-7.17	Vertical
105.5369	10.87	13.94	24.81	43.50	-18.69	Horizontal
230.2295	22.82	15.04	37.86	46.00	-8.14	Horizontal
372.5747	10.12	18.07	28.82	46.00	-17.18	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4874.000	48.49	48.49	-0.08	48.41	48.41	54	74	-5.59	-25.59	Vertical
4874.000	45.02	47.74	-0.08	44.94	47.66	54	74	-9.06	-26.34	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.**

Date of Test:	Nov 30, 2012	Temperature:	25°C
EUT:	Mobile Internet Device	Humidity:	50%
Model No.:	P102	Power Supply:	AC 120V/60HZ
	802.11n Channel High 2452MHz		
Test Mode:	(40MHz)	Test Engineer:	Allen

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
40.2995	19.86	14.54	34.40	40.00	-5.60	Vertical
105.1667	24.56	13.93	38.49	43.50	-5.01	Vertical
231.8531	18.44	15.12	33.56	46.00	-12.44	Vertical
105.5369	10.78	13.94	24.72	43.50	-18.78	Horizontal
230.2295	23.01	15.04	38.05	46.00	-7.95	Horizontal
372.5747	10.23	18.70	28.93	46.00	-17.07	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4904.000	44.65	47.08	0.30	44.95	47.38	54	74	-9.08	-26.62	Vertical
4904.000	47.96	45.12	0.30	45.42	48.26	54	74	-8.58	-25.74	Horizontal

- Note:** 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.
3. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #615

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2412MHz(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:53:31

Engineer Signature:

Distance:

Note:

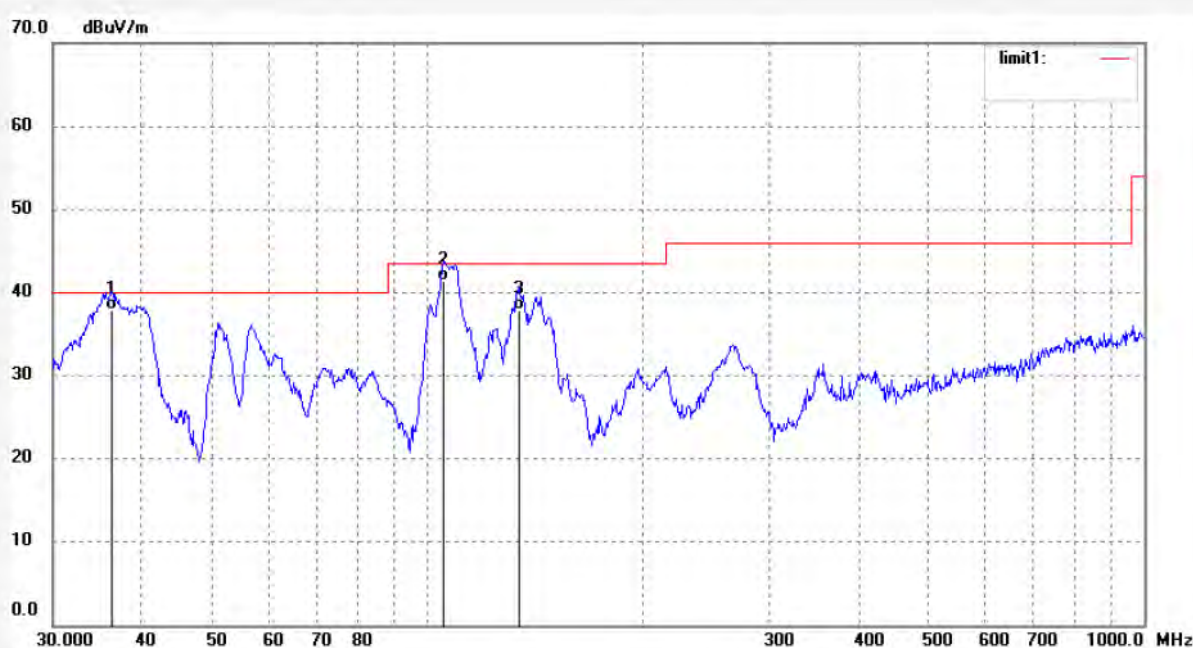

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.2678	21.32	16.60	37.92	40.00	-2.08	QP			
2	105.1667	26.96	14.41	41.37	43.50	-2.13	QP			
3	134.0193	23.11	14.72	37.83	43.50	-5.67	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #616

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2412MHz(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:54:25

Engineer Signature:

Distance:

Note:

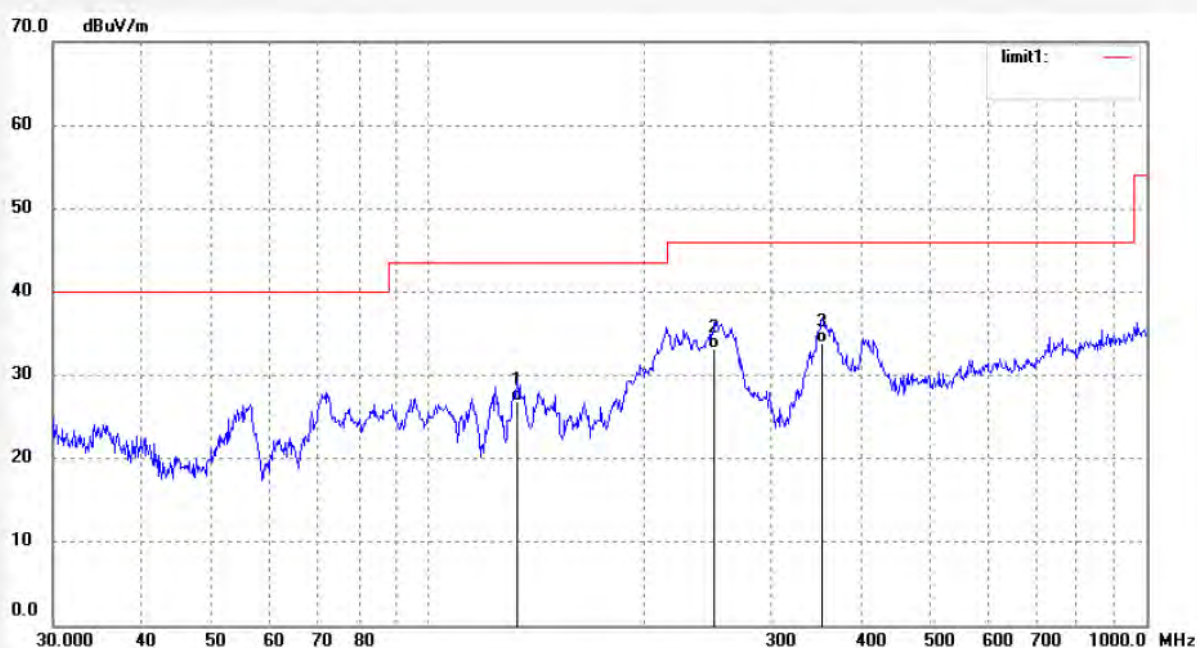

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	133.0809	12.14	14.76	26.90	43.50	-16.60	QP			
2	250.4859	15.67	17.56	33.23	46.00	-12.77	QP			
3	353.4471	12.78	21.01	33.79	46.00	-12.21	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #619

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:55:48

Engineer Signature:

Distance:

Note:

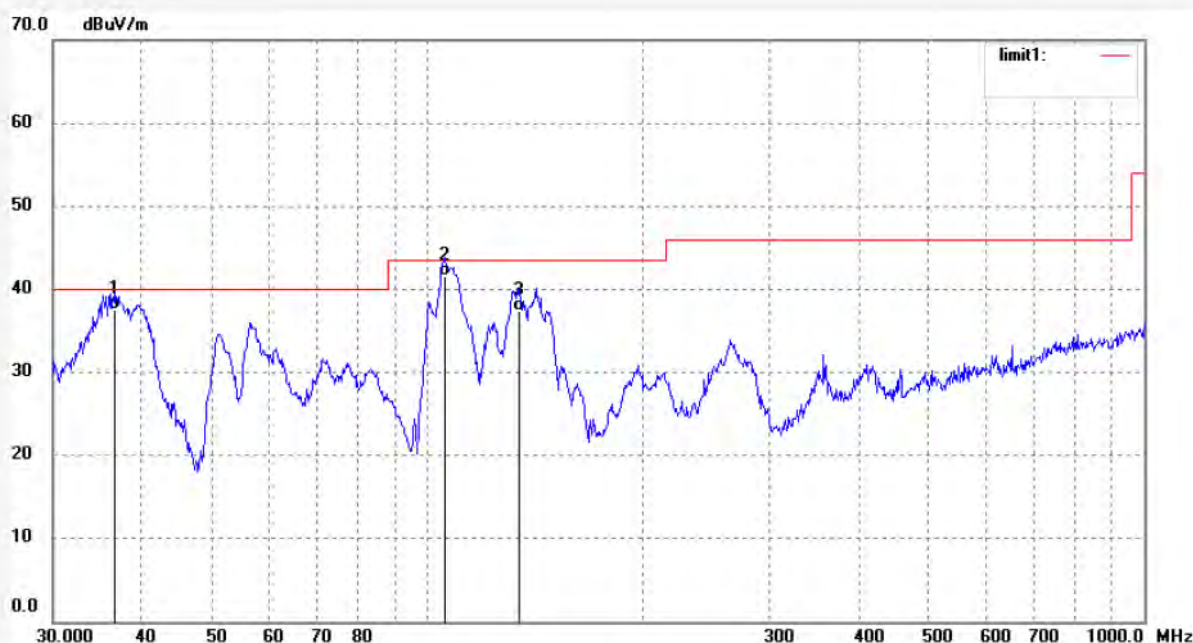

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.6521	20.97	16.58	37.55	40.00	-2.45	QP			
2	105.5369	27.12	14.39	41.51	43.50	-1.99	QP			
3	134.0194	22.63	14.72	37.35	43.50	-6.15	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #620

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:56:33

Engineer Signature:

Distance:

Note:

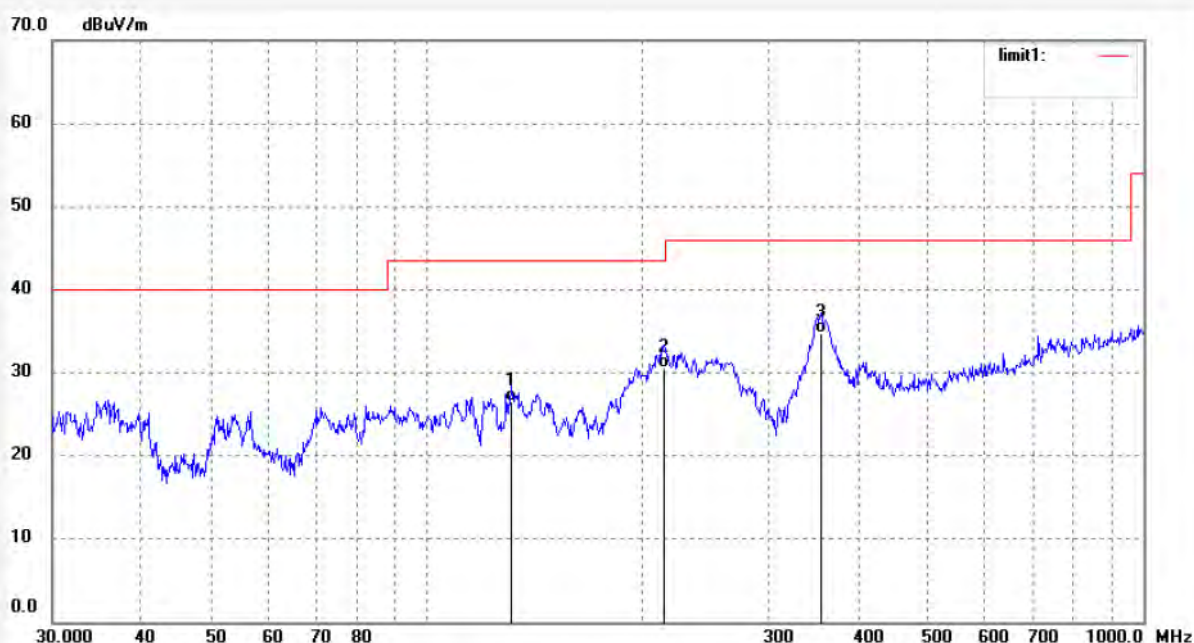

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	131.2235	11.69	14.85	26.54	43.50	-16.96	QP			
2	213.8535	13.98	16.50	30.48	43.50	-13.02	QP			
3	354.6912	13.64	21.09	34.73	46.00	-11.27	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #629

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2462MHz(802.11b)

Model: P102

Manufacturer: Pipio

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:08:05

Engineer Signature:

Distance:

Note:

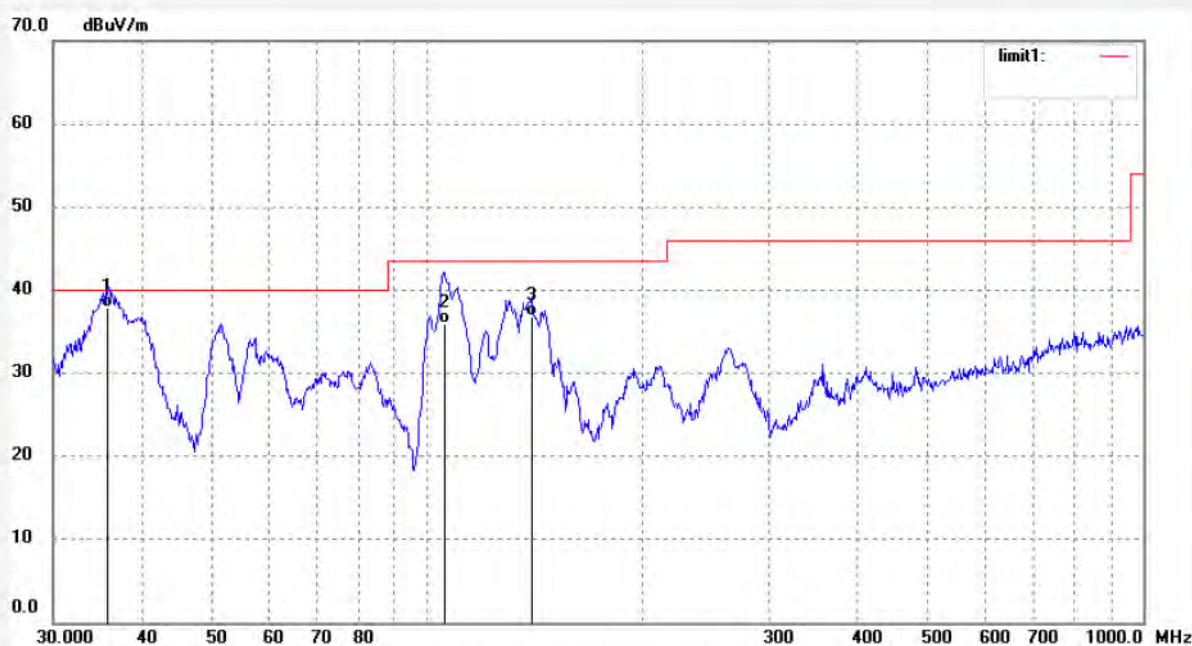

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.7616	21.21	16.63	37.84	40.00	-2.16	QP			
2	105.5369	21.63	14.39	36.02	43.50	-7.48	QP			
3	139.7908	22.36	14.50	36.86	43.50	-6.64	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #630

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2462MHz(802.11b)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:08:46

Engineer Signature:

Distance:

Note:

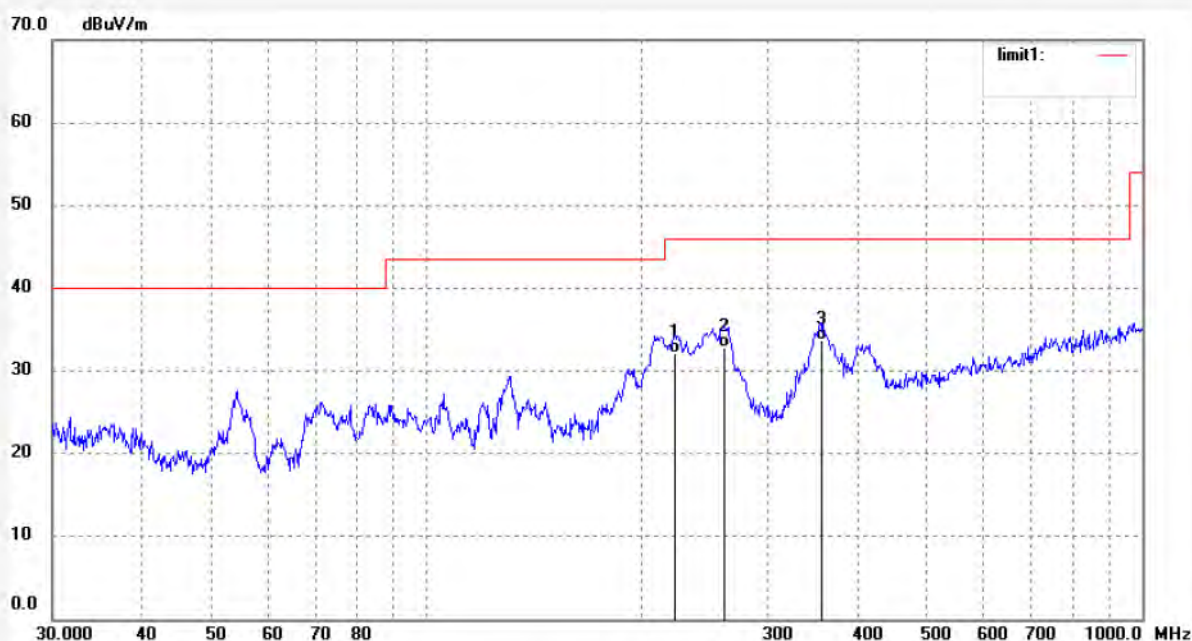

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	222.2807	15.36	16.80	32.16	46.00	-13.84	QP			
2	261.2730	14.21	18.62	32.83	46.00	-13.17	QP			
3	355.9397	12.57	21.14	33.71	46.00	-12.29	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #613

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2412MHz(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 2012-11-30

Time: 16:51:40

Engineer Signature:

Distance:

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	15.30	16.63	31.93	40.00	-8.07	QP			
2	253.1402	15.47	17.74	33.21	46.00	-12.79	QP			
3	352.2075	14.02	20.92	34.94	46.00	-11.06	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #614

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2412MHz(802.11g)

Model: P102

Manufacturer: Pipa

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:52:50

Engineer Signature:

Distance:

Note:

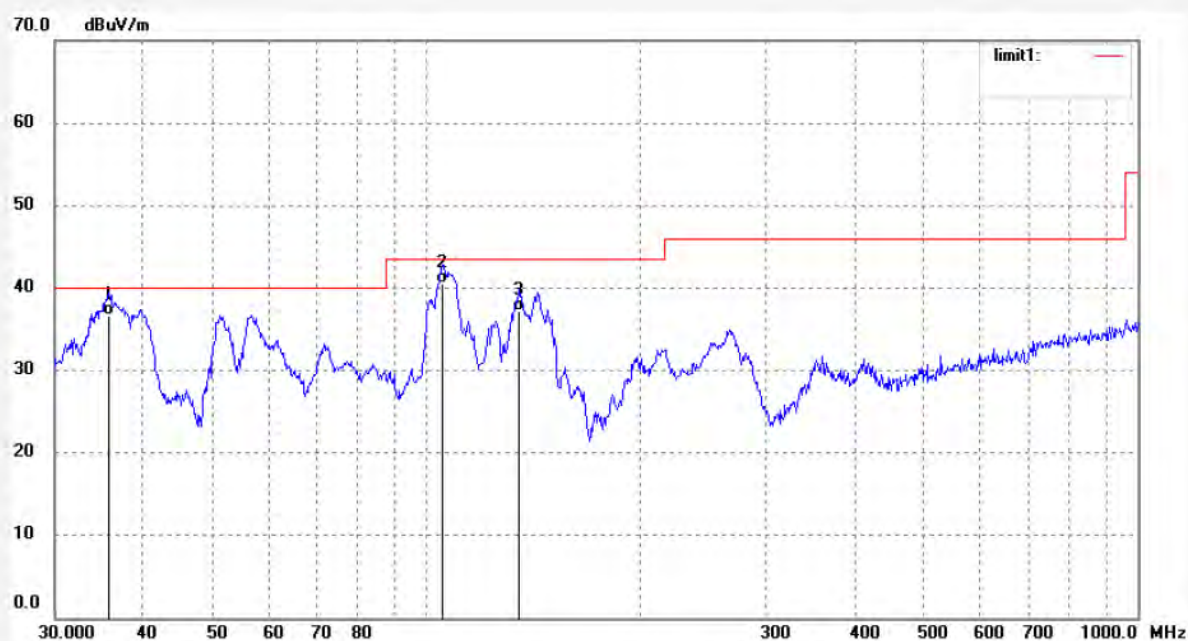

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.7617	20.12	16.63	36.75	40.00	-3.25	QP			
2	105.1668	26.04	14.41	40.45	43.50	-3.05	QP			
3	134.9645	22.57	14.67	37.24	43.50	-6.26	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #623

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:03:19

Engineer Signature:

Distance:

Note:

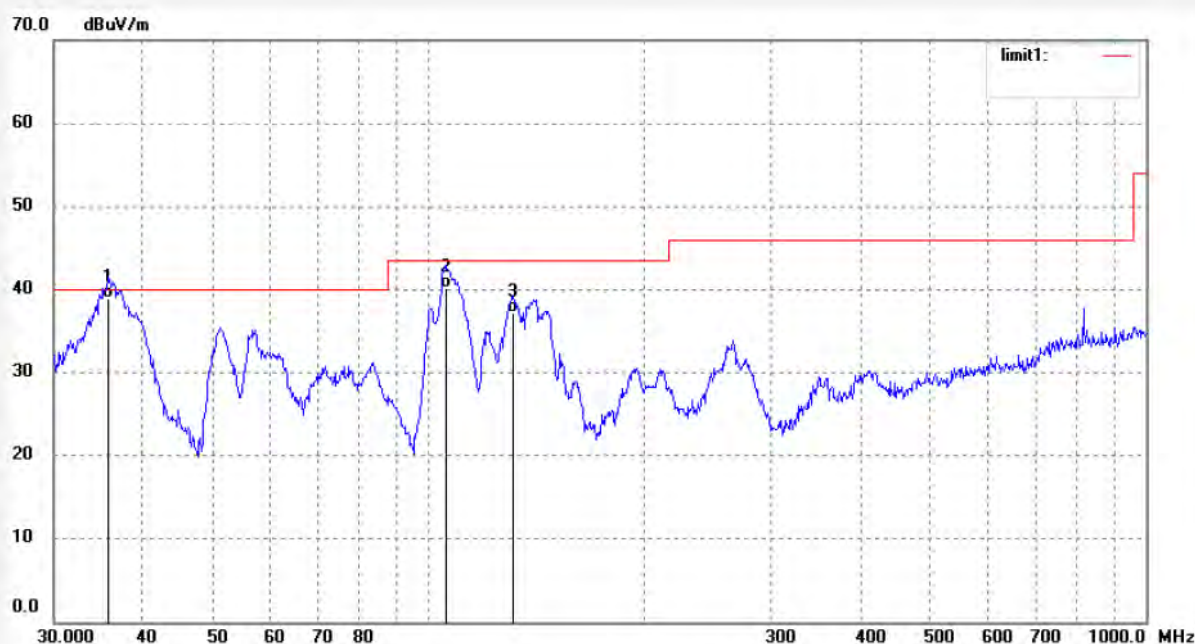

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.7617	22.30	16.63	38.93	40.00	-1.07	QP			
2	105.5369	25.74	14.39	40.13	43.50	-3.37	QP			
3	131.2235	22.30	14.85	37.15	43.50	-6.35	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #624

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:04:25

Engineer Signature:

Distance:

Note:

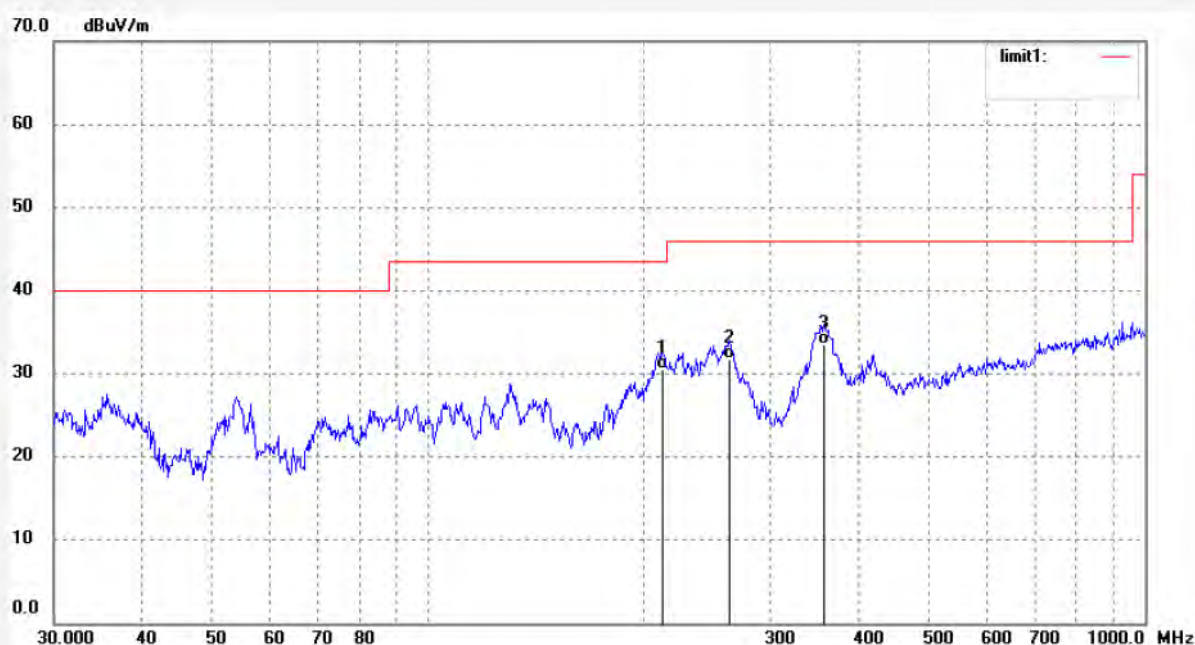

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	212.3560	14.02	16.44	30.46	43.50	-13.04	QP			
2	263.1155	13.21	18.64	31.85	46.00	-14.15	QP			
3	355.9397	12.39	21.14	33.53	46.00	-12.47	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #625

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2462MHz(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:05:27

Engineer Signature:

Distance:

Note:

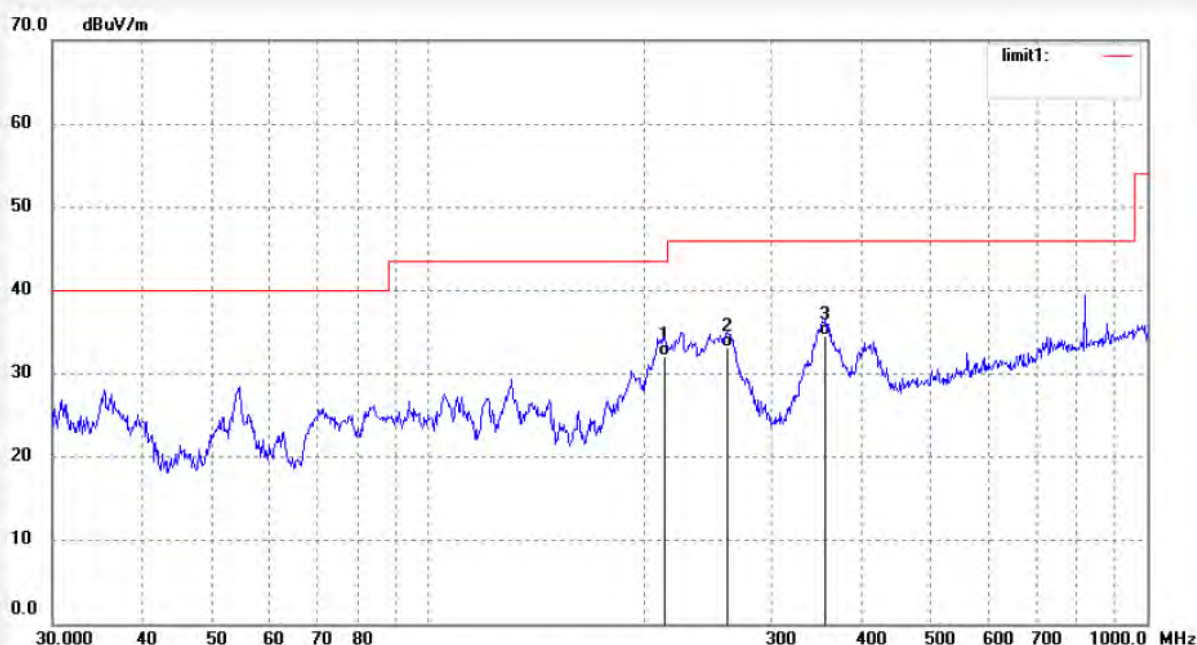

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	213.1035	15.69	16.46	32.15	43.50	-11.35	QP			
2	260.3566	14.65	18.60	33.25	46.00	-12.75	QP			
3	357.1925	13.35	21.17	34.52	46.00	-11.48	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #626

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2462MHz(802.11g)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz

Date: 2012/11/30

Time: 17:05:55

Engineer Signature:

Distance:

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.1406	20.24	16.61	36.85	40.00	-3.15	QP			
2	105.1668	25.63	14.41	40.04	43.50	-3.46	QP			
3	130.3048	22.34	14.89	37.23	43.50	-6.27	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #617

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2412MHz(802.11n)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:54:52

Engineer Signature:

Distance:

Note:

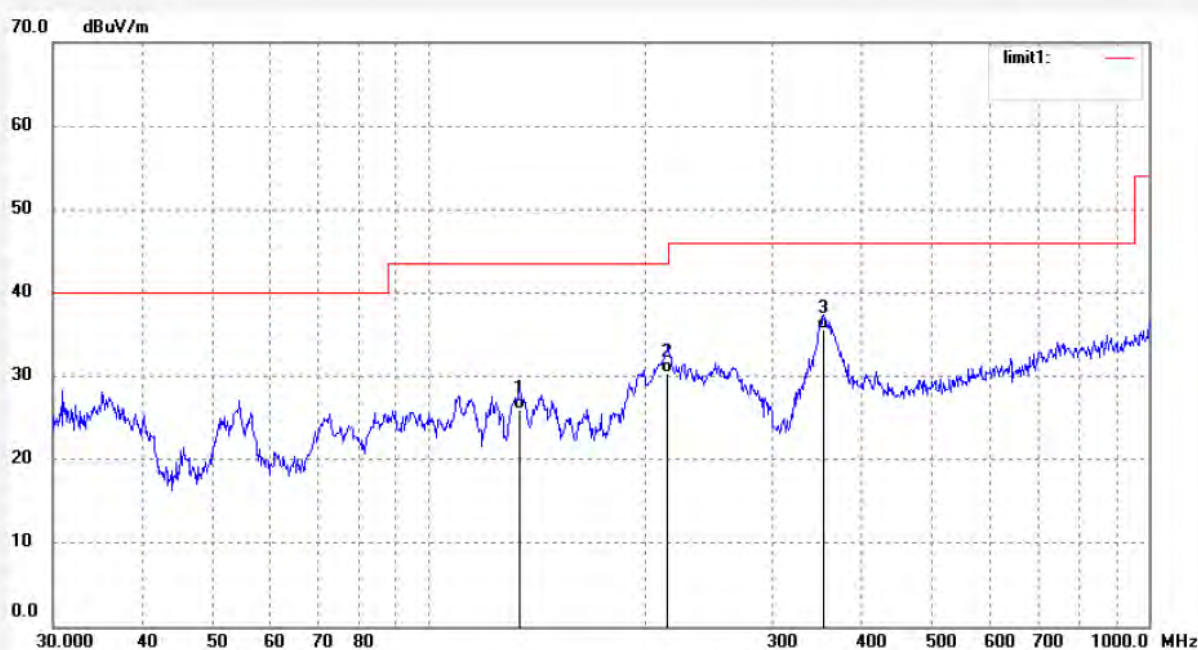

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	133.5493	11.31	14.74	26.05	43.50	-17.45	QP			
2	214.6063	13.91	16.52	30.43	43.50	-13.07	QP			
3	353.4471	14.63	21.01	35.64	46.00	-10.36	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #618

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2412MHz(802.11n)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012-11-30

Time: 16:55:24

Engineer Signature:

Distance:

Note:

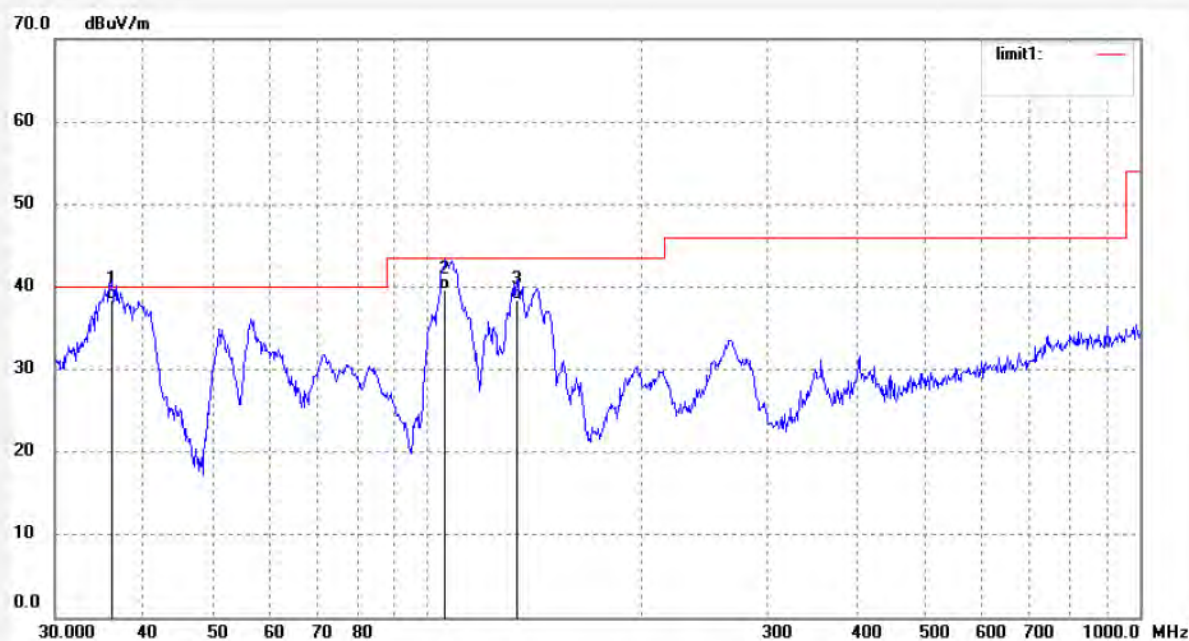

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.1406	21.86	16.61	38.47	40.00	-1.53	QP			
2	105.9084	25.36	14.35	39.71	43.50	-3.79	QP			
3	133.5493	23.60	14.74	38.34	43.50	-5.16	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #621

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11n)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:01:42

Engineer Signature:

Distance:

Note:

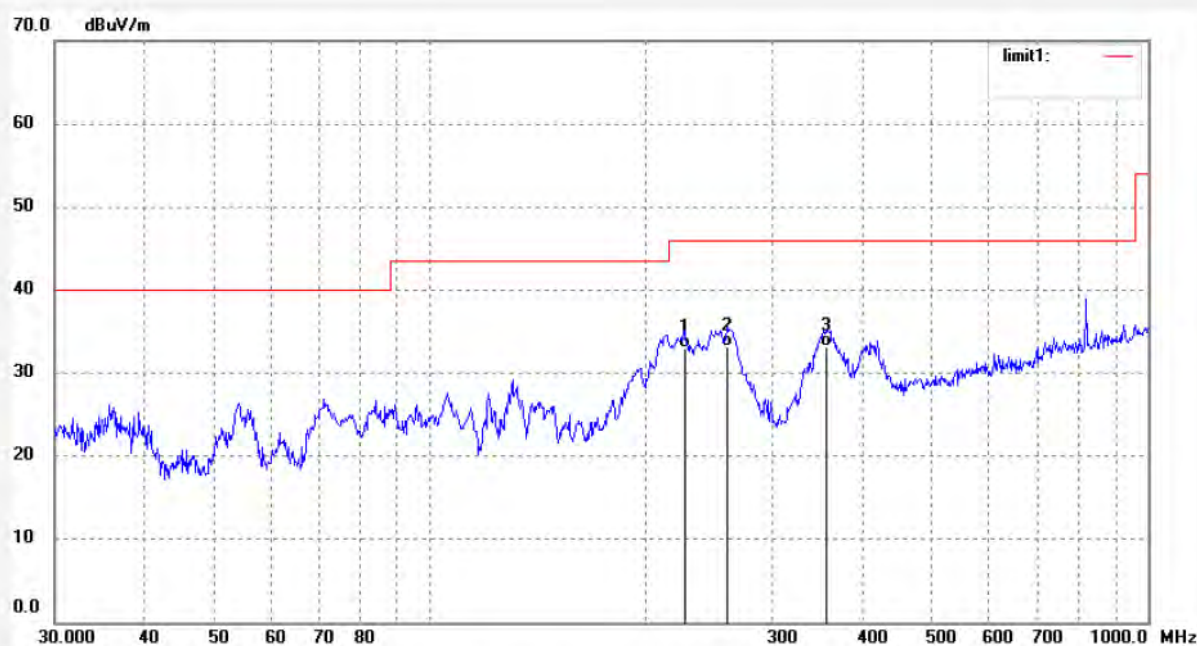

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	226.2202	16.04	16.91	32.95	46.00	-13.05	QP			
2	259.4433	14.69	18.52	33.21	46.00	-12.79	QP			
3	355.9397	11.97	21.14	33.11	46.00	-12.89	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #622

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11n)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:02:42

Engineer Signature:

Distance:

Note:

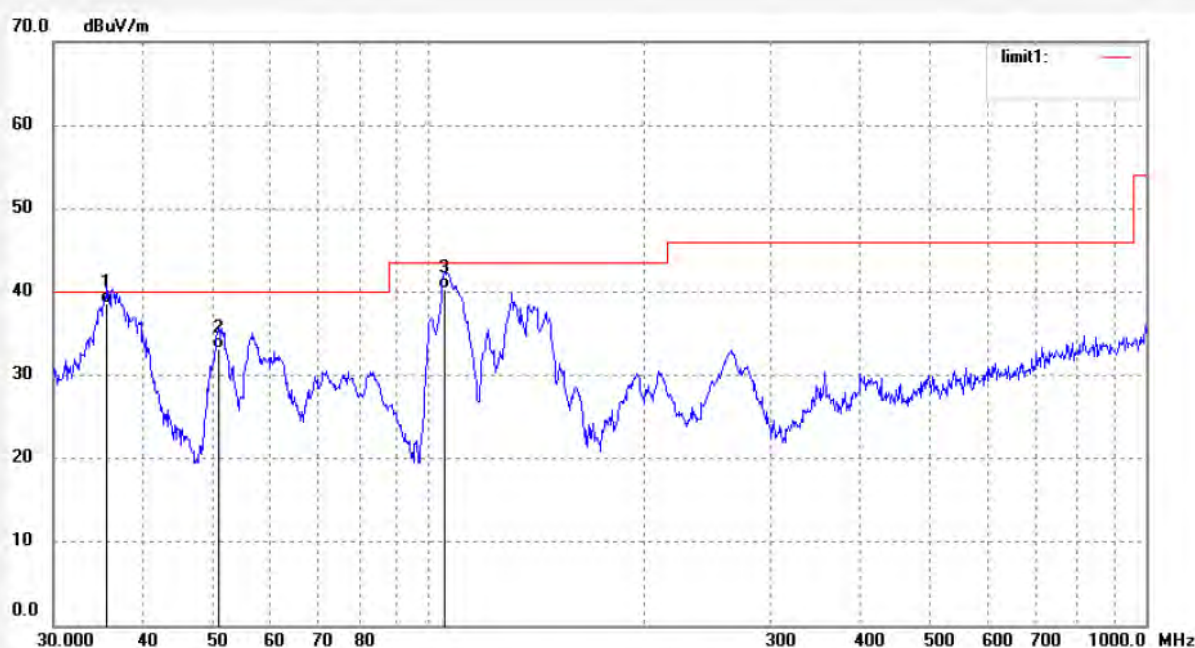

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.6362	21.96	16.65	38.61	40.00	-1.39	QP			
2	50.9961	19.02	14.18	33.20	40.00	-6.80	QP			
3	105.1668	26.01	14.41	40.42	43.50	-3.08	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #627

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2462MHz(802.11n)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/11/30

Time: 17:07:10

Engineer Signature:

Distance:

Note:

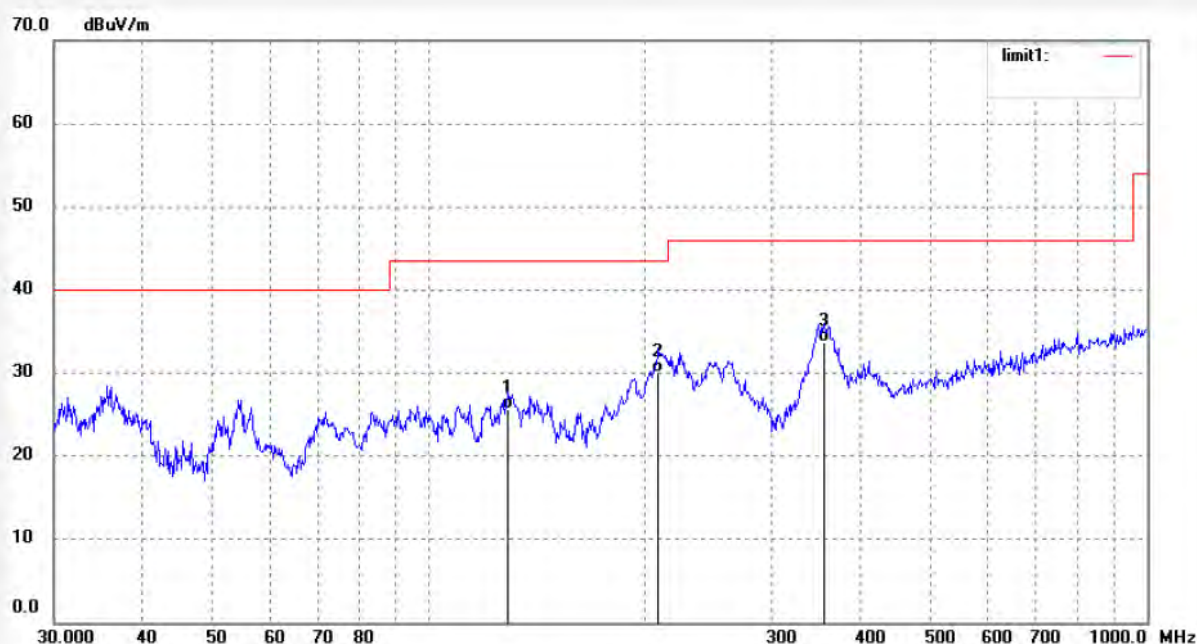

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	128.9385	10.63	14.94	25.57	43.50	-17.93	QP			
2	208.6580	13.69	16.30	29.99	43.50	-13.51	QP			
3	354.6912	12.63	21.09	33.72	46.00	-12.28	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #628

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Mobile internet device

Mode: TX 2462MHz(802.11n)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz

Date: 2012/11/30

Time: 17:07:31

Engineer Signature:

Distance:

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.7617	22.01	16.63	38.64	40.00	-1.36	QP			
2	51.1756	19.67	14.13	33.80	40.00	-6.20	QP			
3	104.4303	25.30	14.37	39.67	43.50	-3.83	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #711

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: Mobile internet device

Mode: TX 2422MHz(802.11n)(40MHz)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz

Date: 12/12/12/

Time: 8/43/47

Engineer Signature:

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	61.0041	20.74	12.73	33.47	40.00	-6.53	QP			
2	89.4716	22.60	13.82	36.42	43.50	-7.08	QP			
3	105.1667	24.32	13.93	38.25	43.50	-5.25	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #712

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: Mobile internet device

Mode: TX 2422MHz(802.11n)(40MHz)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/12/

Time: 8/44/23

Engineer Signature:

Distance: 3m

Note:

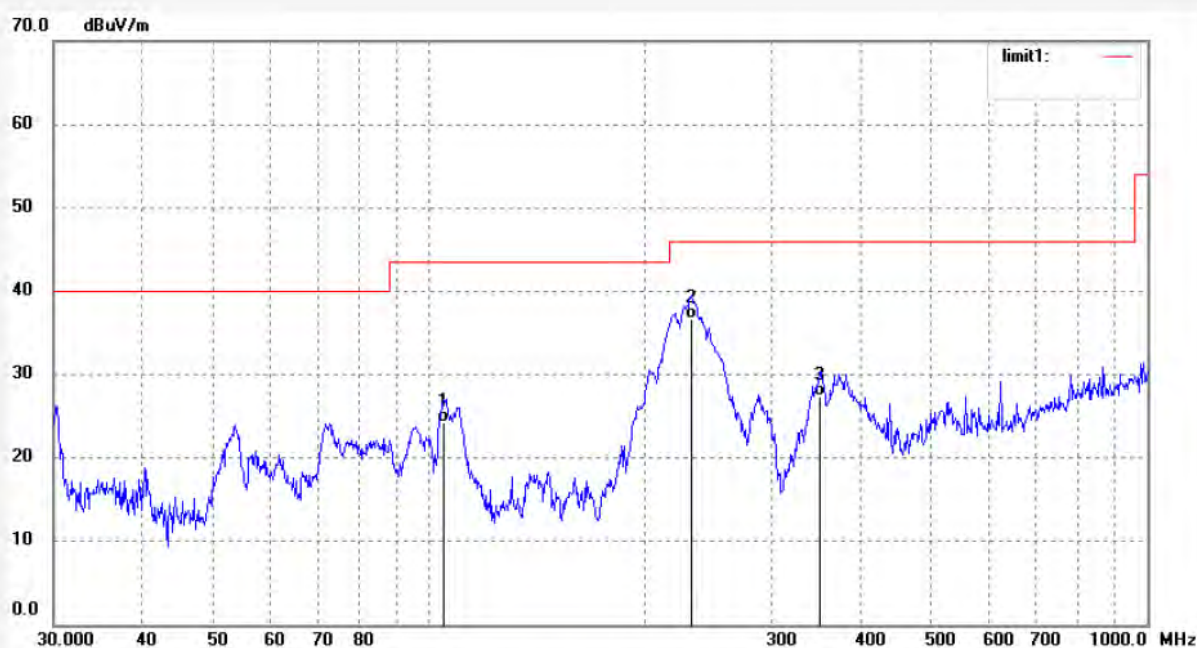

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	104.7978	10.23	13.97	24.20	43.50	-19.30	QP			
2	231.8531	21.56	15.12	36.68	46.00	-9.32	QP			
3	349.7411	9.10	18.37	27.47	46.00	-18.53	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #710

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11n)(40MHz)

Model: P102

Manufacturer: Pipo

Polarization: Vertical

Power Source: AC 120V/60Hz

Date: 12/12/12/

Time: 8/43/27

Engineer Signature:

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	59.9418	22.74	13.10	35.84	40.00	-4.16	QP			
2	90.1025	21.69	13.86	35.55	43.50	-7.95	QP			
3	104.7978	22.36	13.97	36.33	43.50	-7.17	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #709

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: Mobile internet device

Mode: TX 2437MHz(802.11n)(40MHz)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/12/

Time: 8/42/53

Engineer Signature:

Distance: 3m

Note:

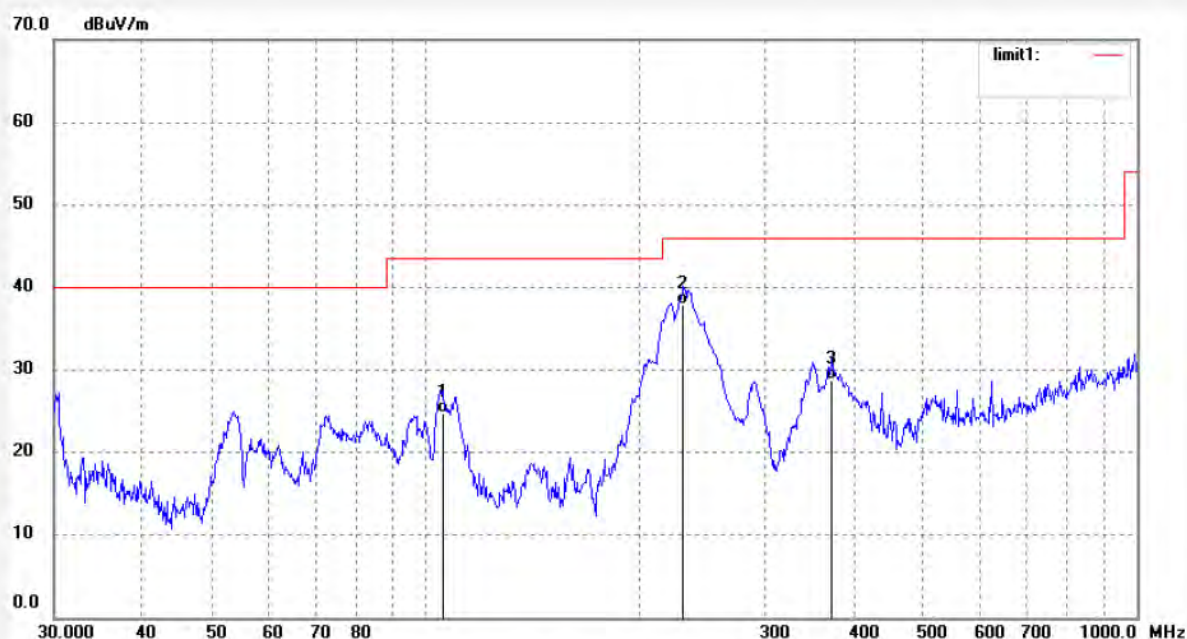

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	105.5369	10.87	13.94	24.81	43.50	-18.69	QP			
2	230.2295	22.82	15.04	37.86	46.00	-8.14	QP			
3	372.5747	10.12	18.70	28.82	46.00	-17.18	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #708

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: Mobile internet device

Mode: TX 2452MHz(802.11n)(40MHz)

Model: P102

Manufacturer: Pipo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/12/

Time: 8/42/36

Engineer Signature:

Distance: 3m

Note:

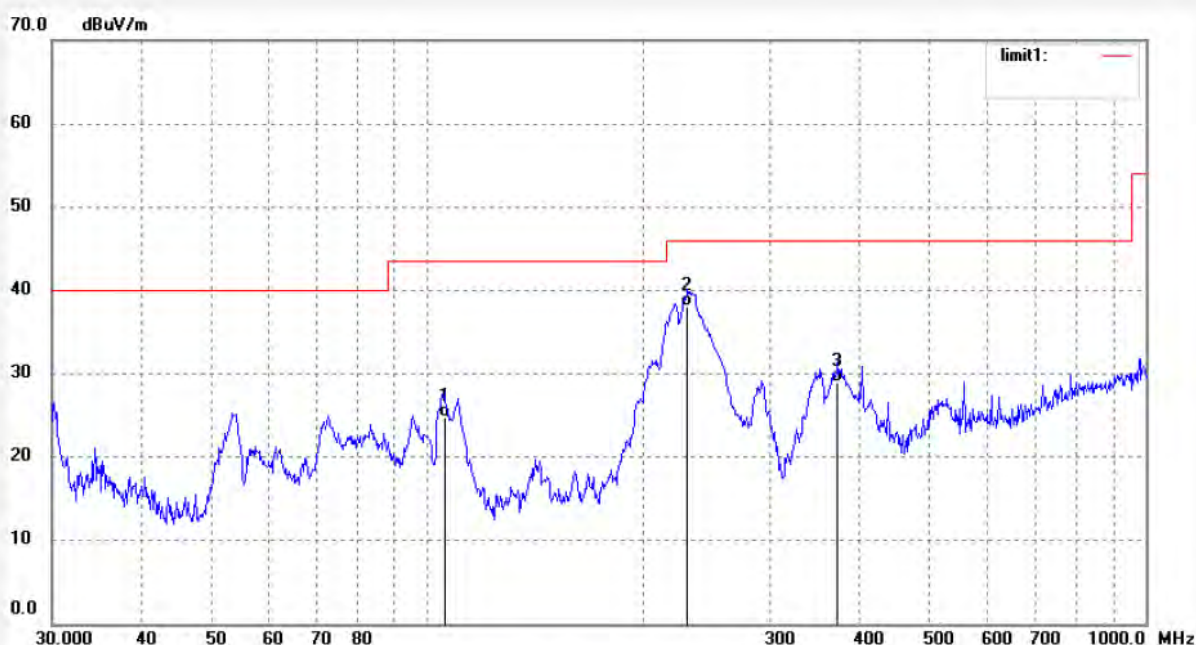

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	105.5369	10.78	13.94	24.72	43.50	-18.78	QP			
2	230.2295	23.01	15.04	38.05	46.00	-7.95	QP			
3	372.5747	10.23	18.70	28.93	46.00	-17.07	QP			