




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1607	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:32:05
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

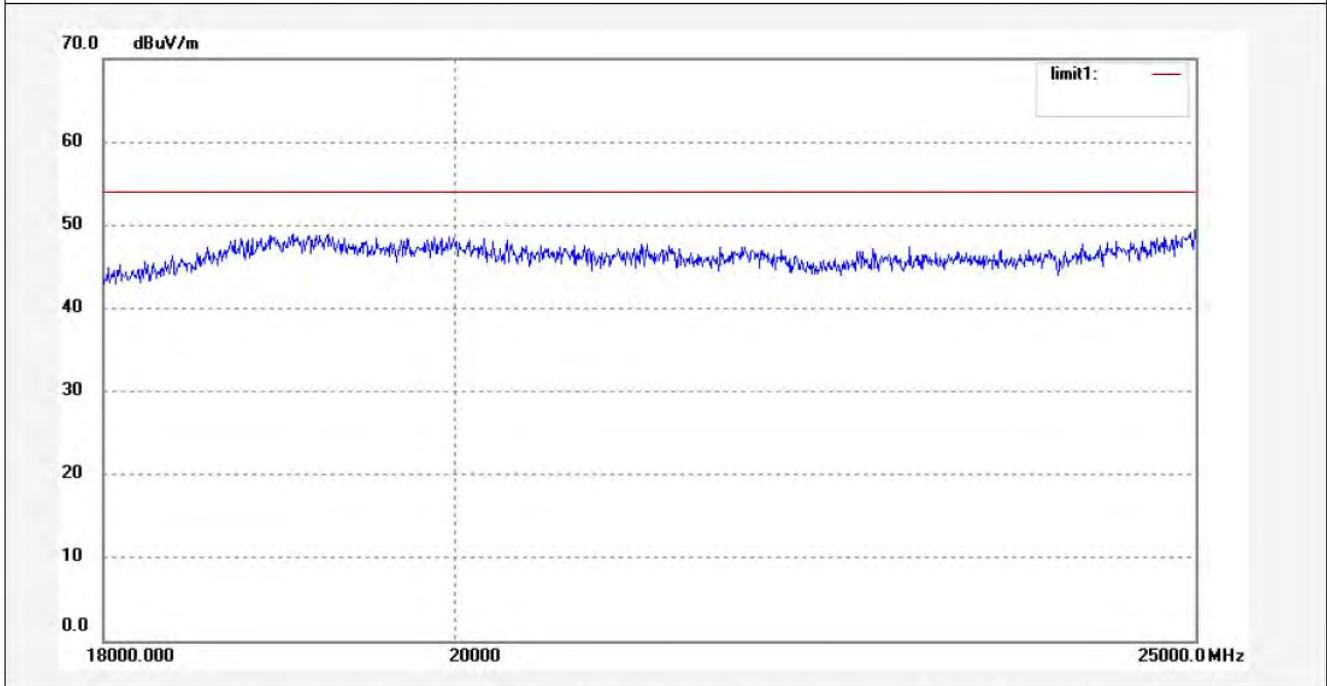

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5876	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:39:32
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

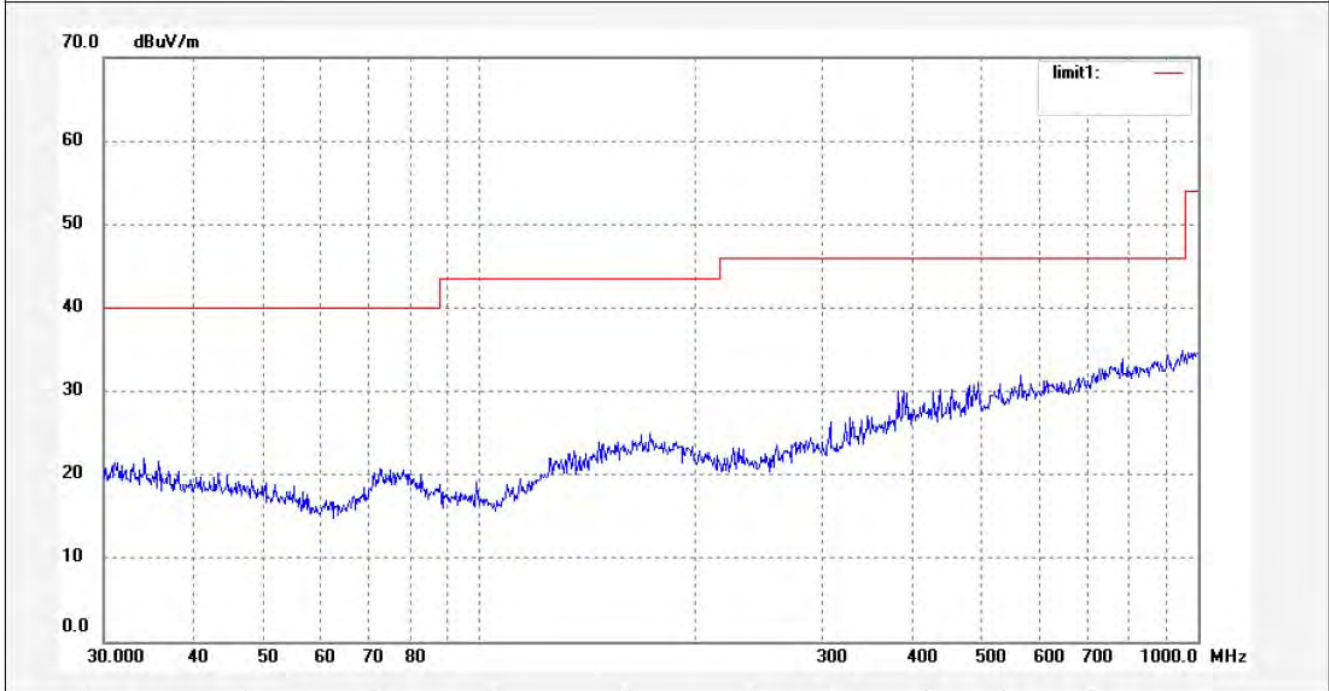

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Bob #5877	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:43:40
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

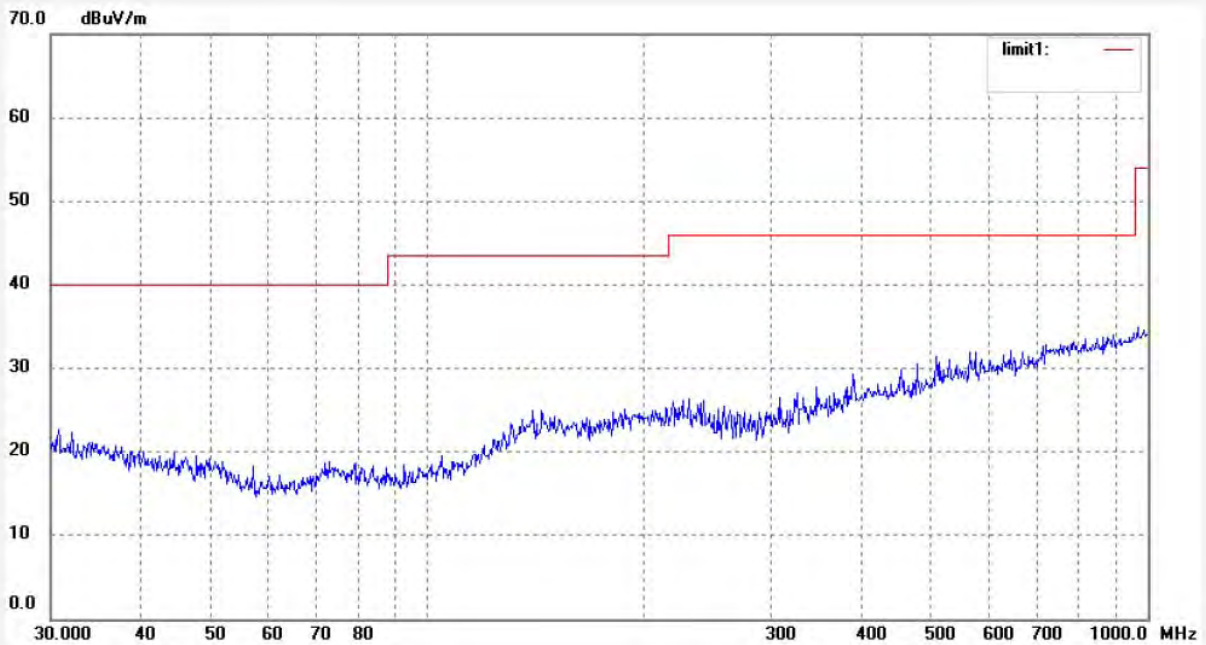

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #858	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 18:37:06
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6(802.11g)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

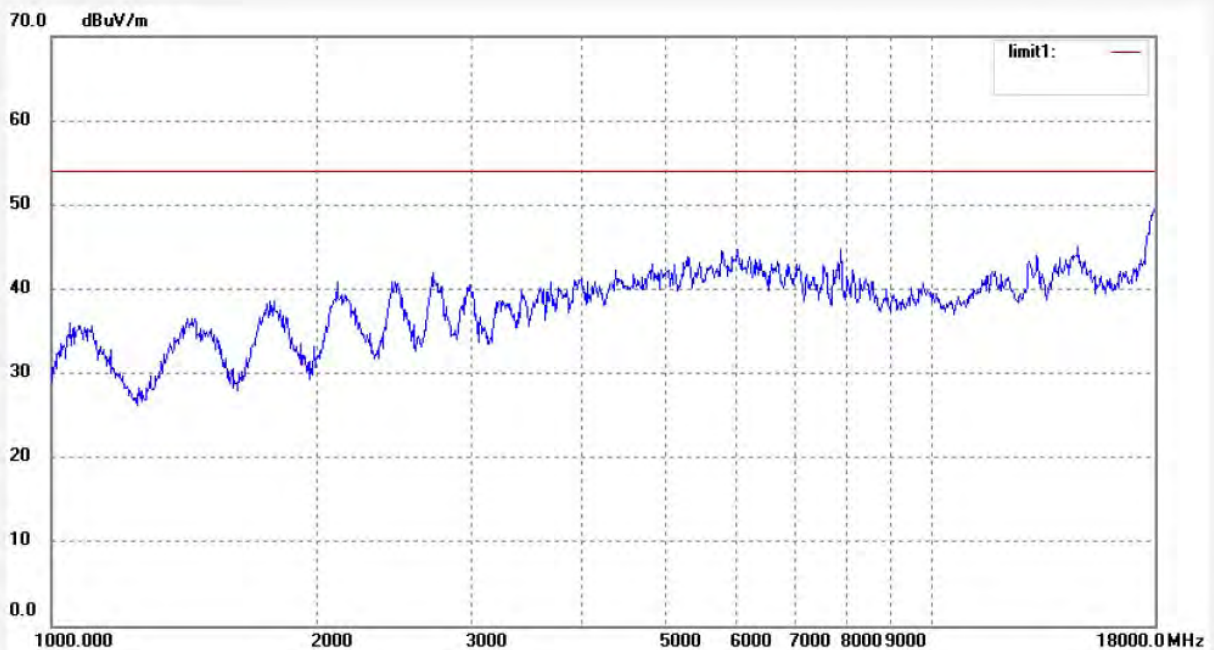

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #859	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 18:40:49
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6(802.11g)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

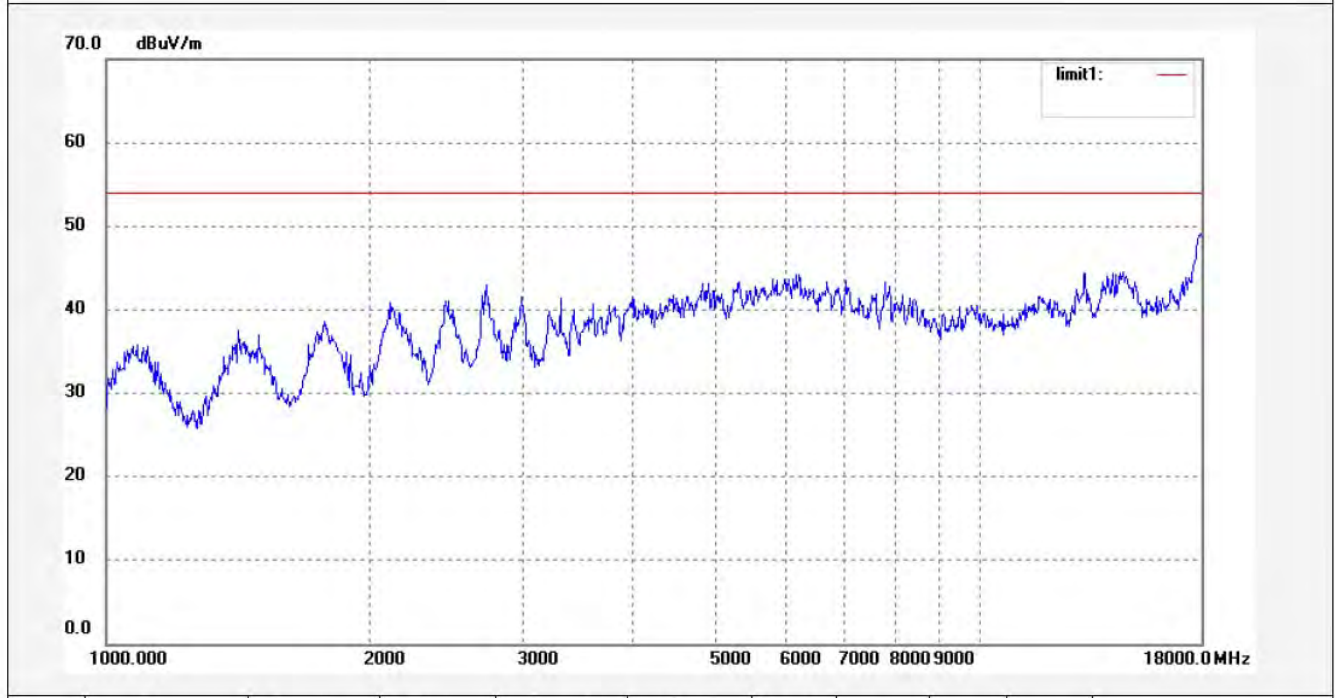

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1609	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:38:38
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

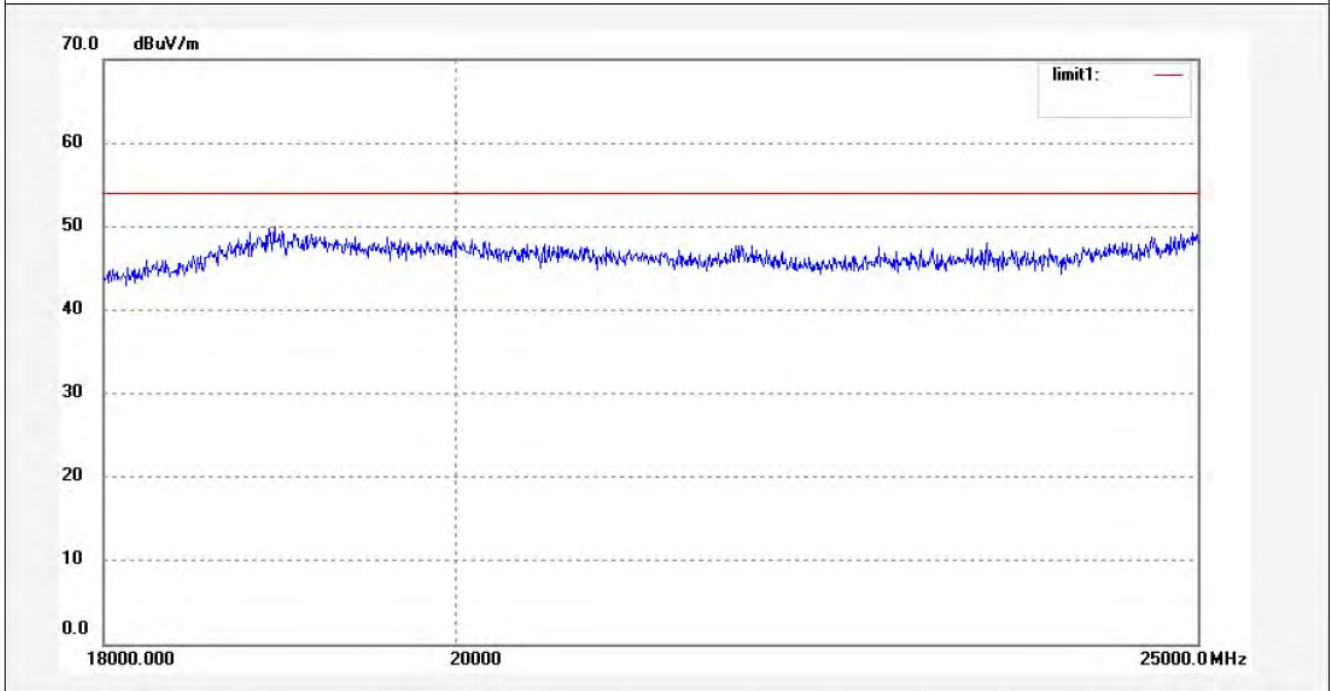

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Bob #1610	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:43:17
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

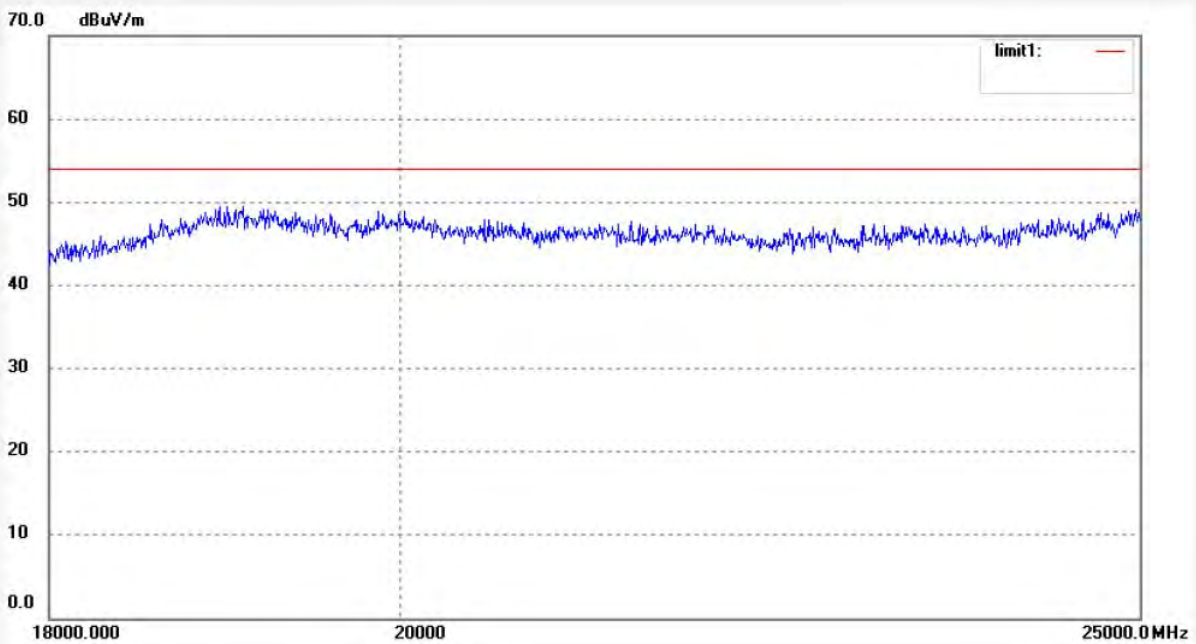

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5879	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:53:06
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

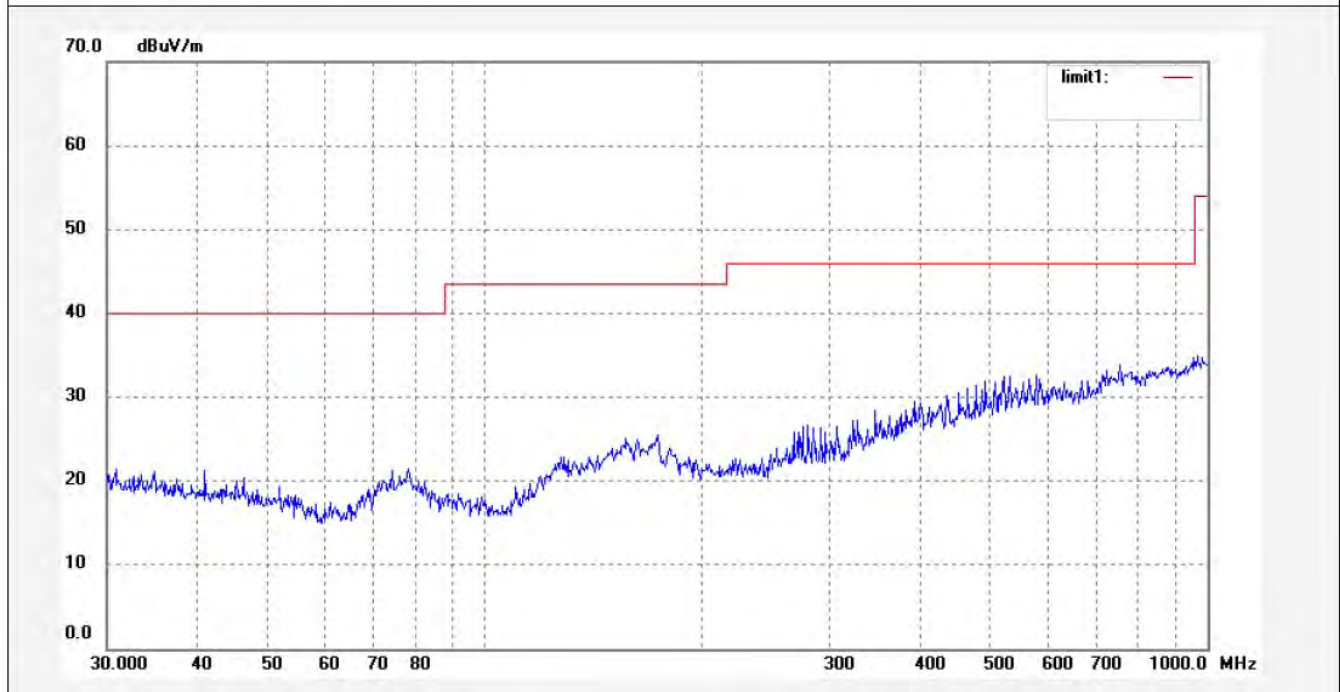

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5878	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:48:55
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

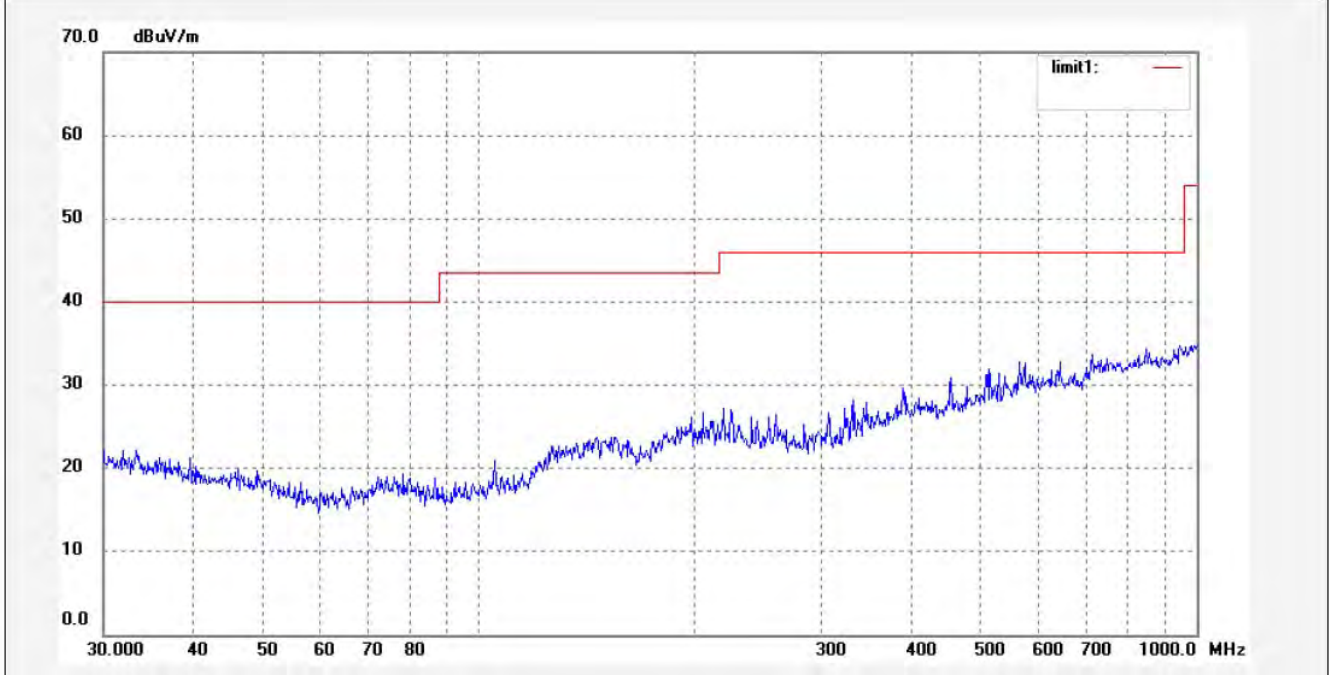

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #860	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 18:45:33
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11(802.11g)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

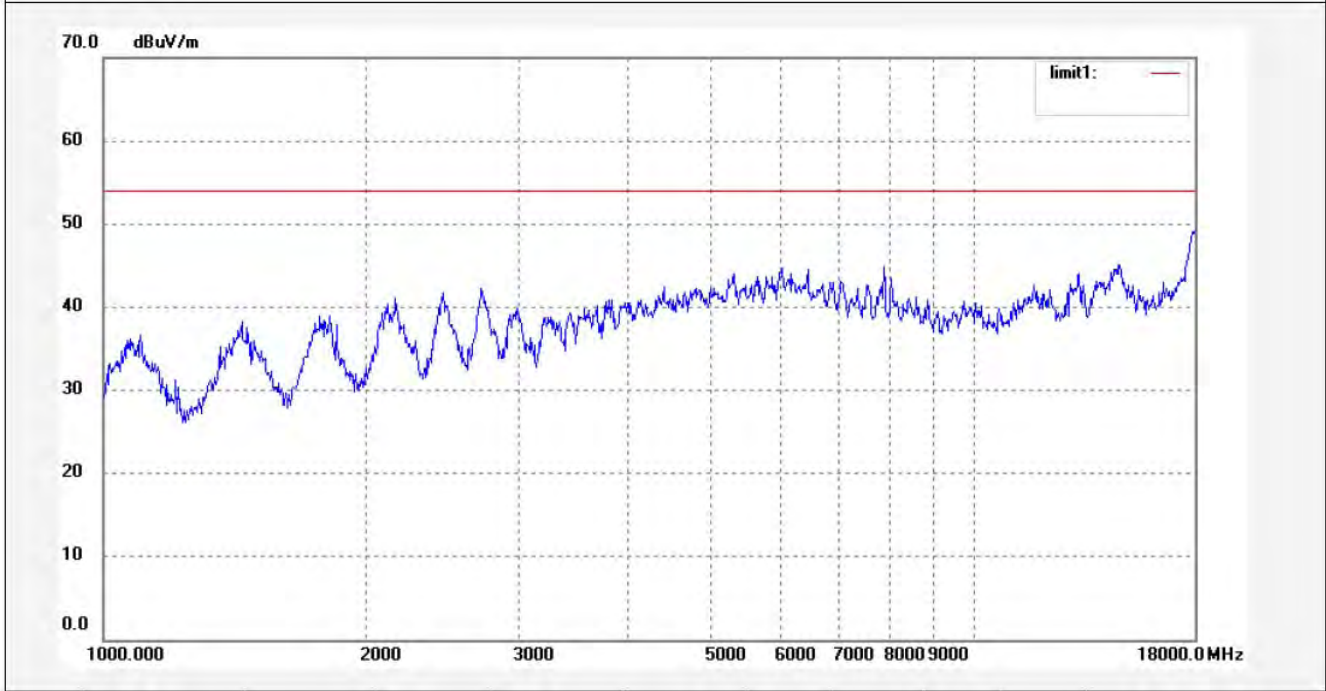

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #861  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 51 %  
EUT: Mobile internet device  
Mode: TX Channel 11(802.11g)  
Model: DS975  
Manufacturer: Pipo

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2012/09/1  
Time: 18:49:19  
Engineer Signature: Bob  
Distance:

Note: Report No.:ATE20121929

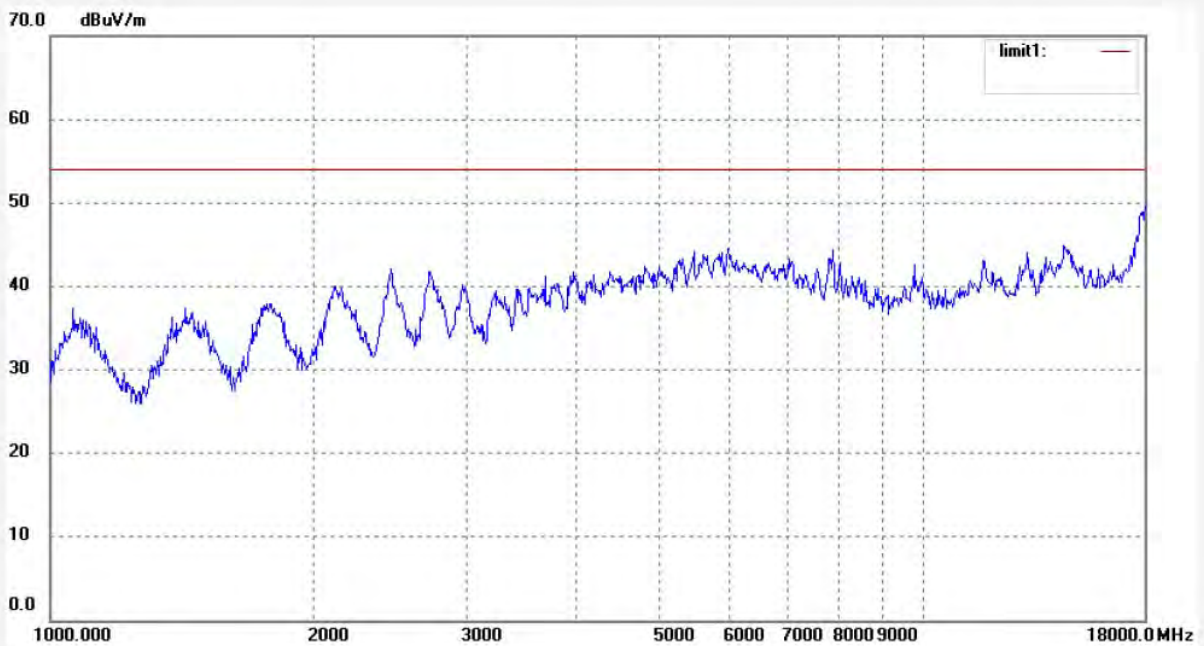

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1612	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:50:47
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

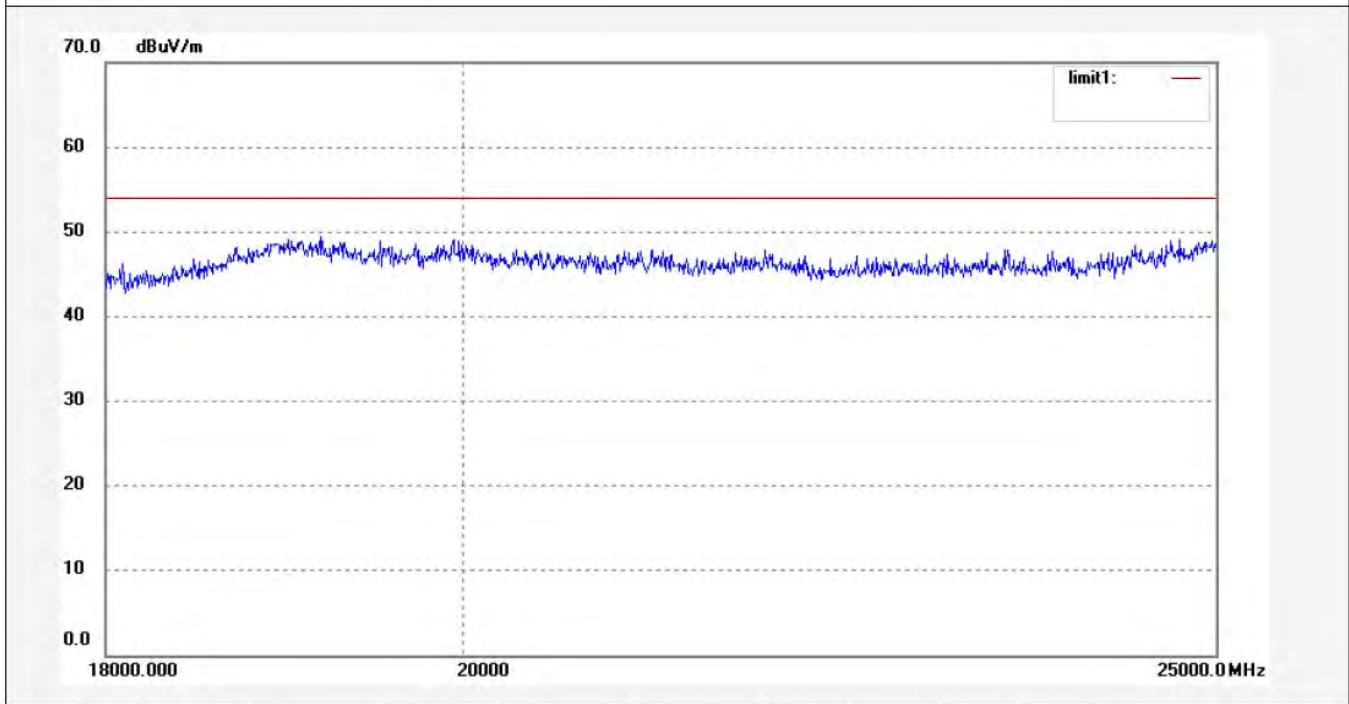

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1611	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:47:55
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

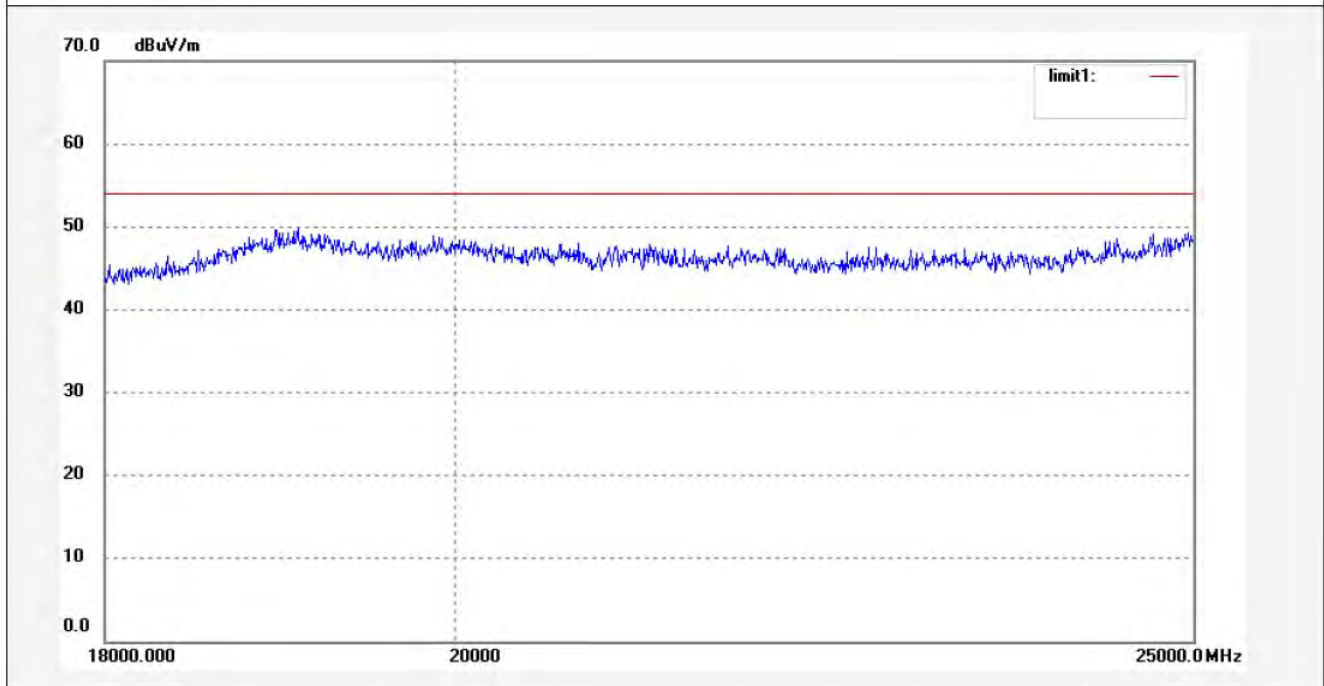

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5880	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:01:35
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

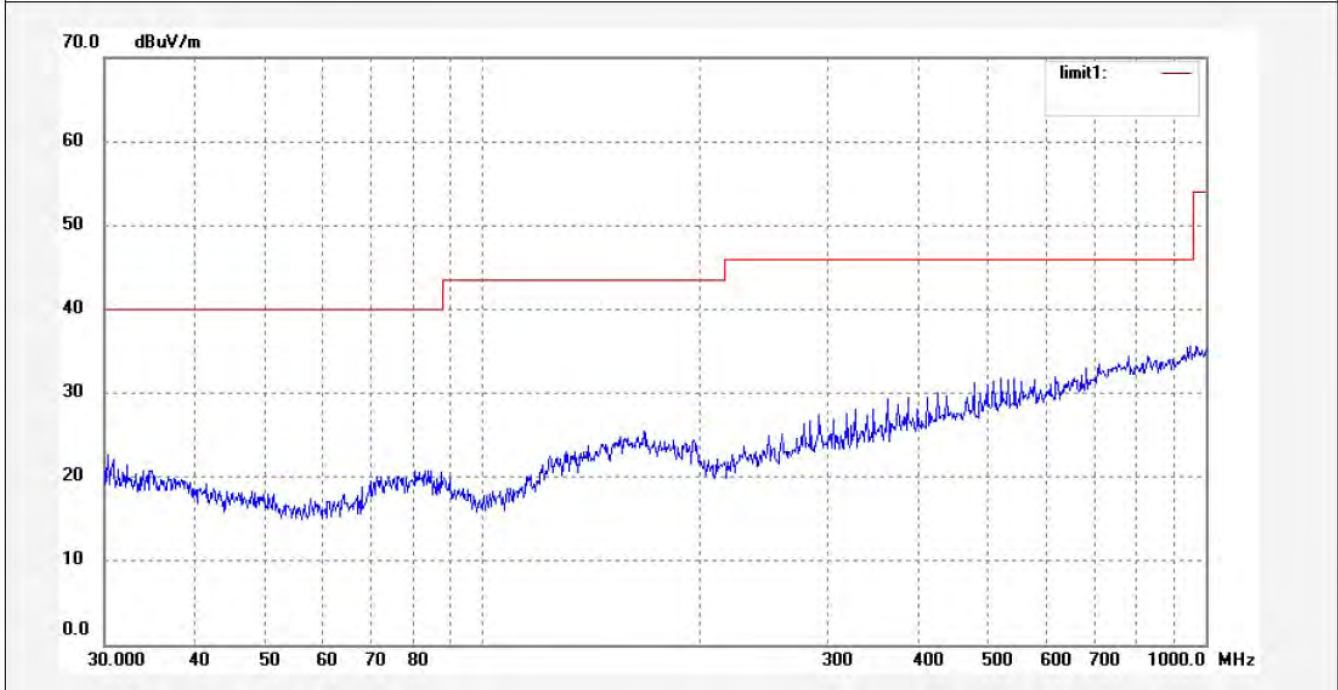

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5881	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:05:42
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

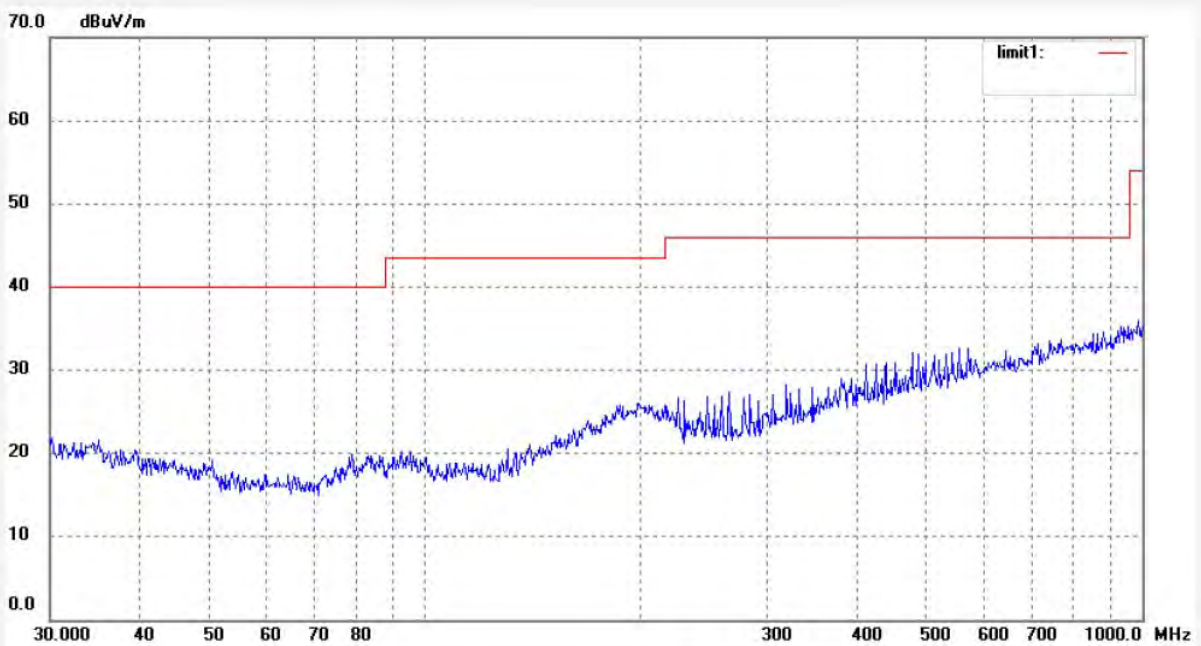

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #863	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 18:58:53
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

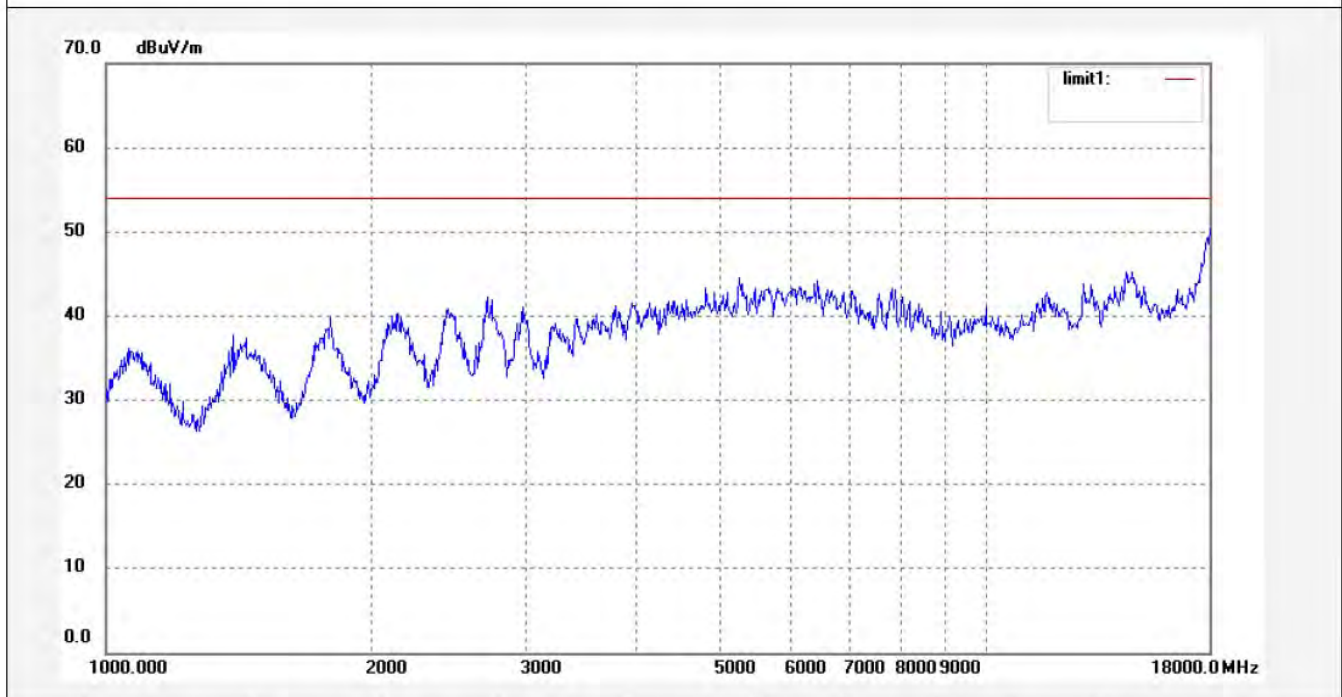

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #862	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 18:52:06
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

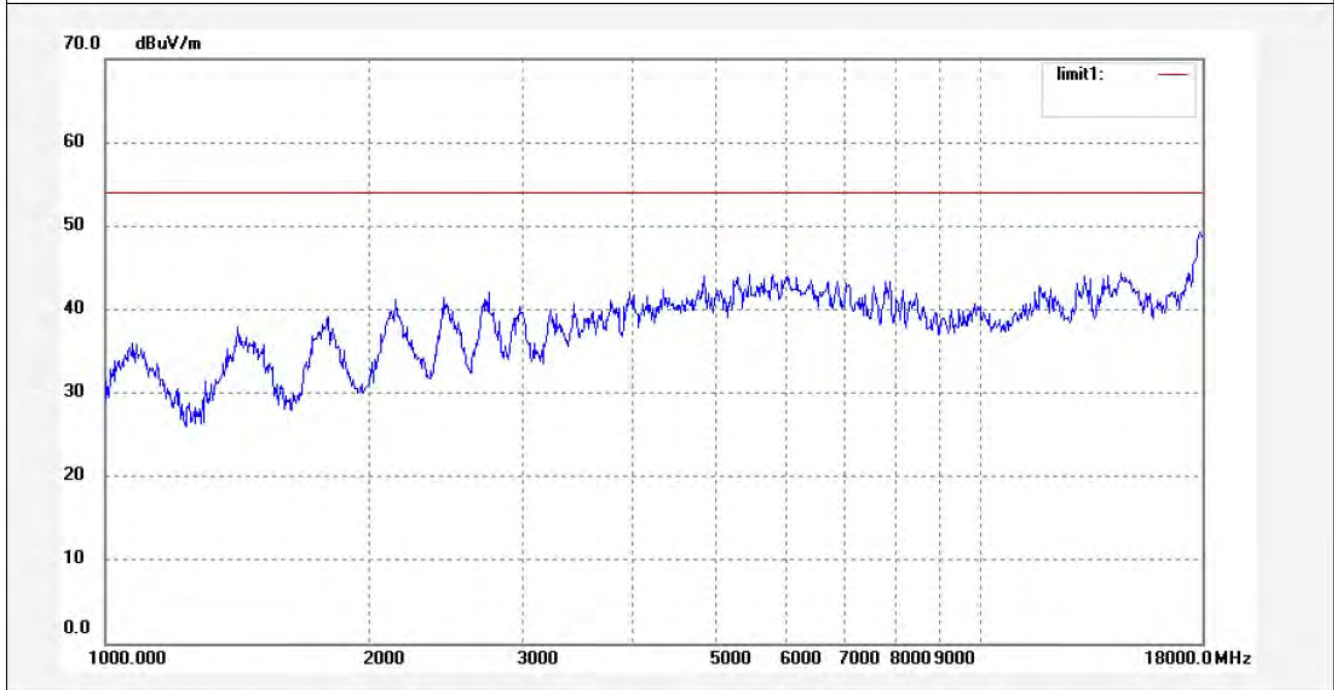

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1617	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:09:37
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

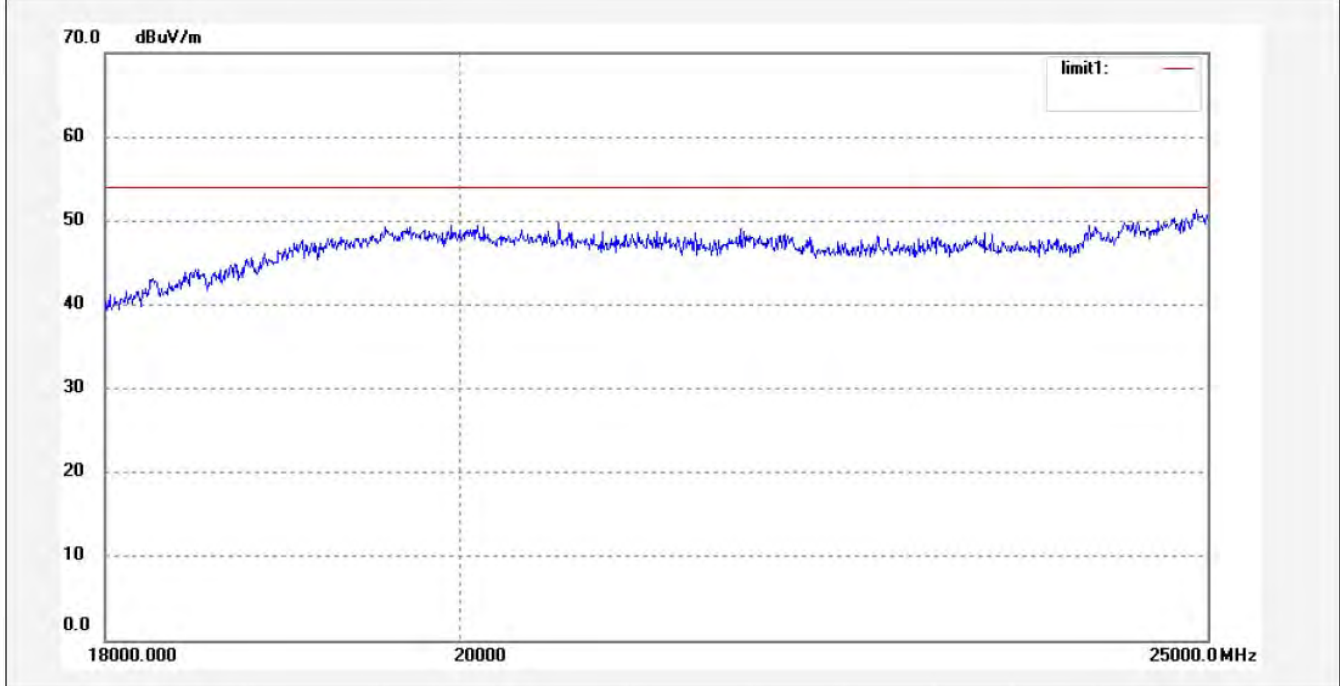

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1618	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:14:41
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

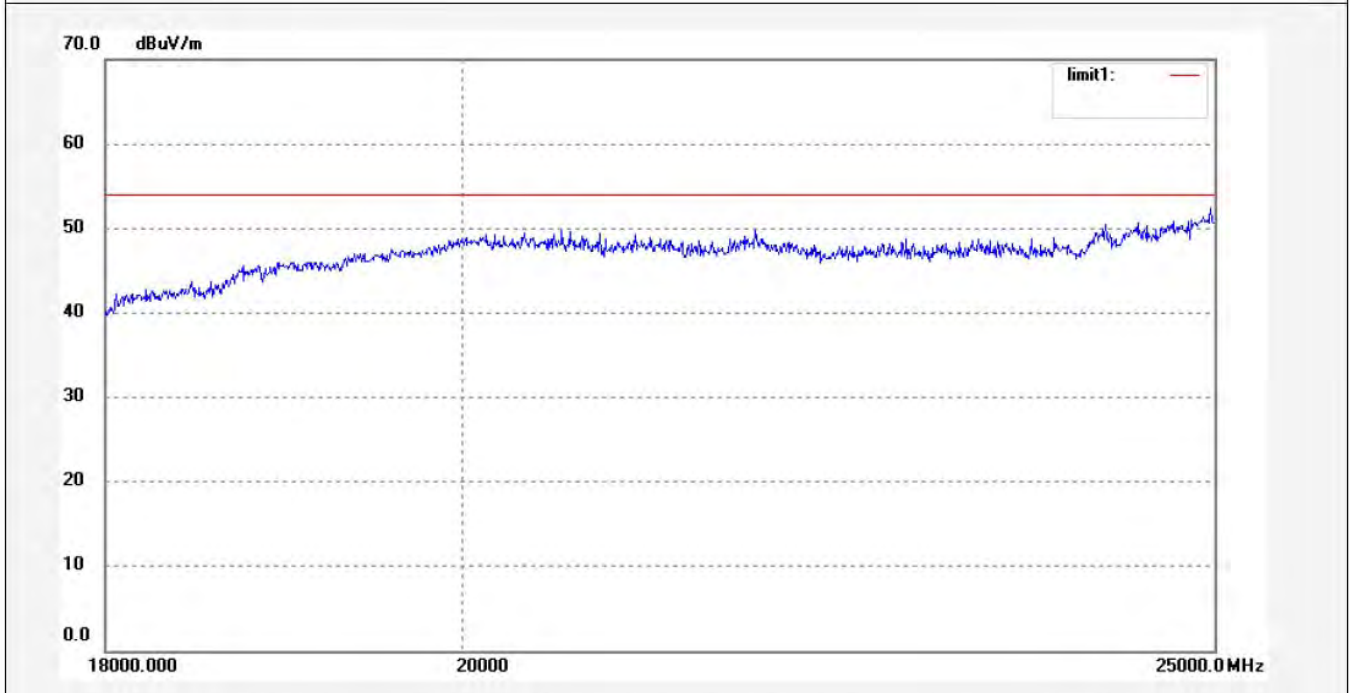

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5883	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:14:58
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

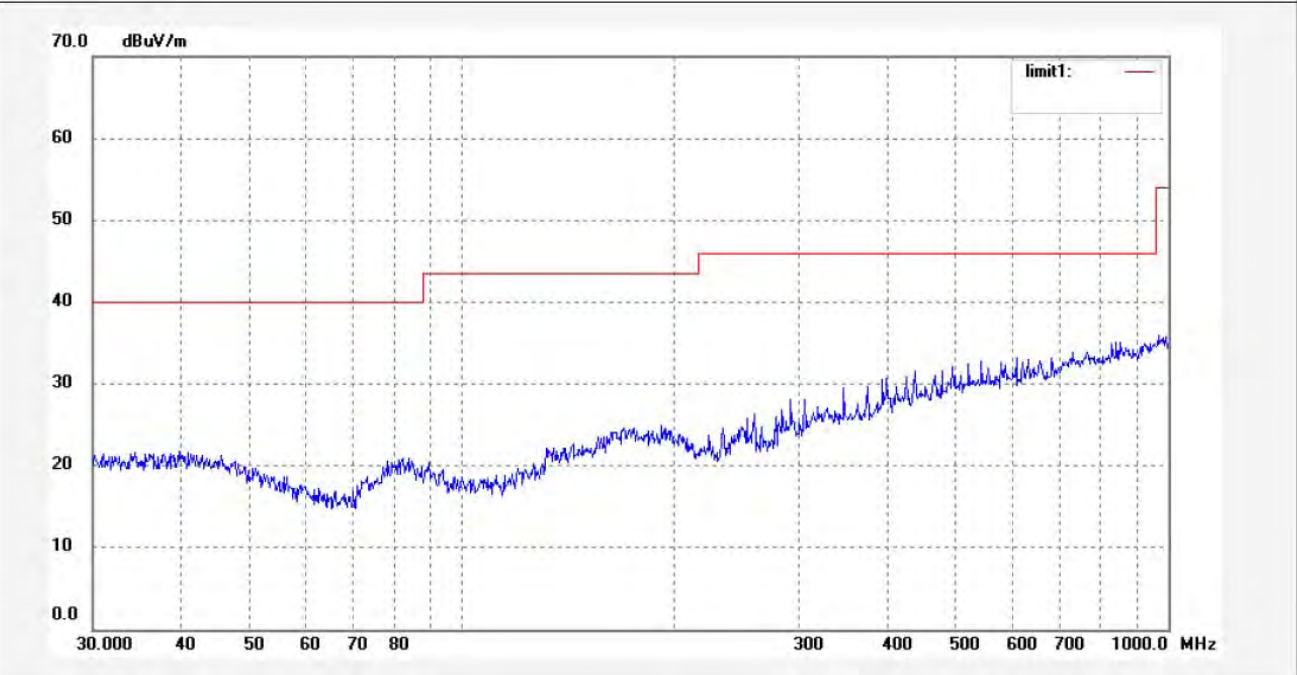

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5882	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:10:50
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

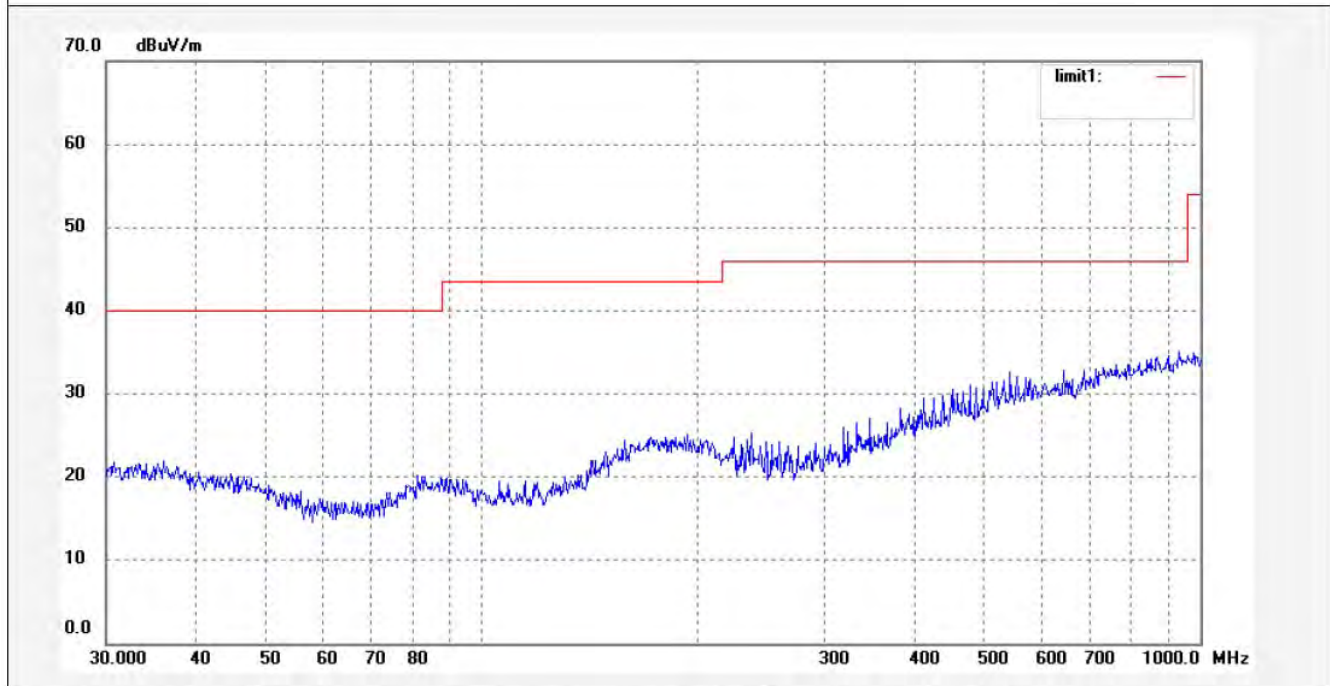

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #864	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:03:49
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

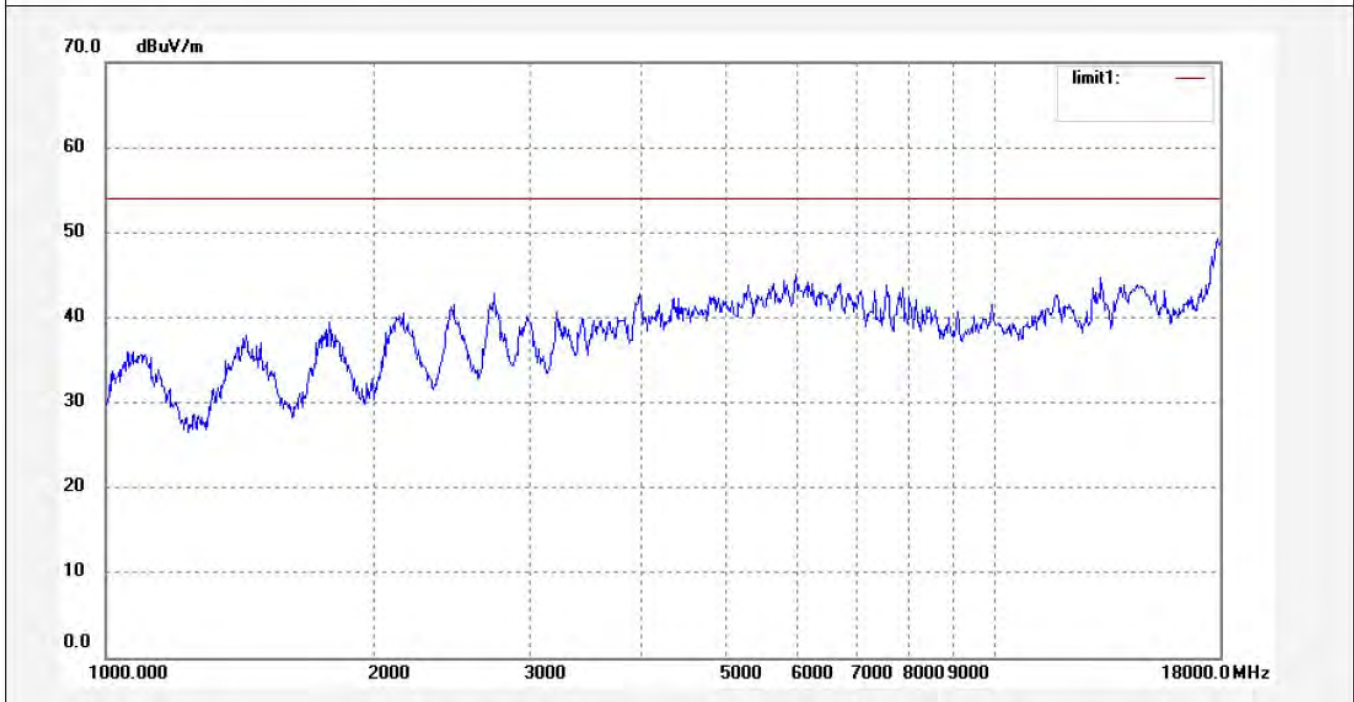

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #865	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:08:44
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

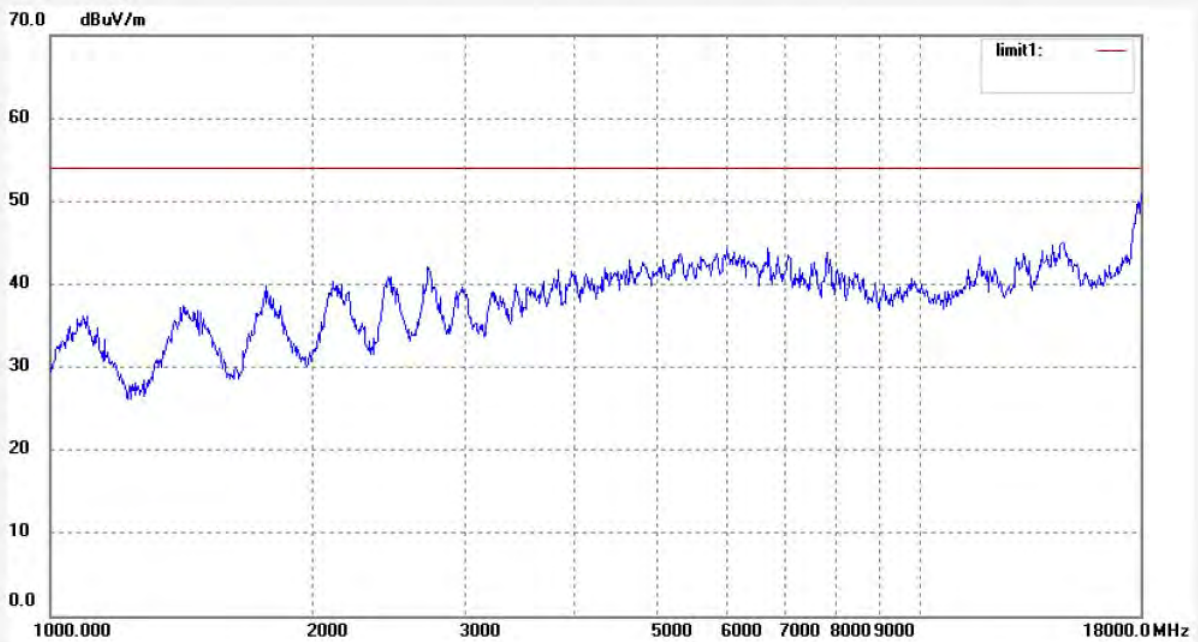

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1616	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:05:58
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

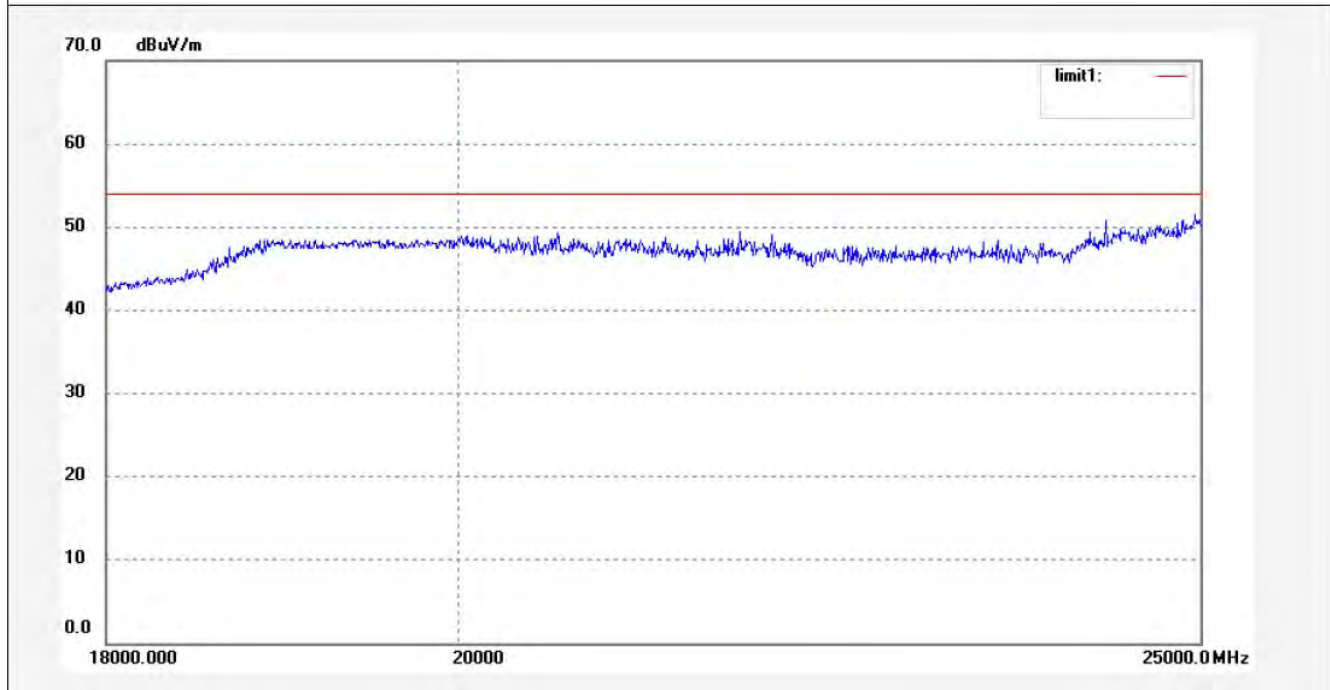

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1615	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:02:36
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

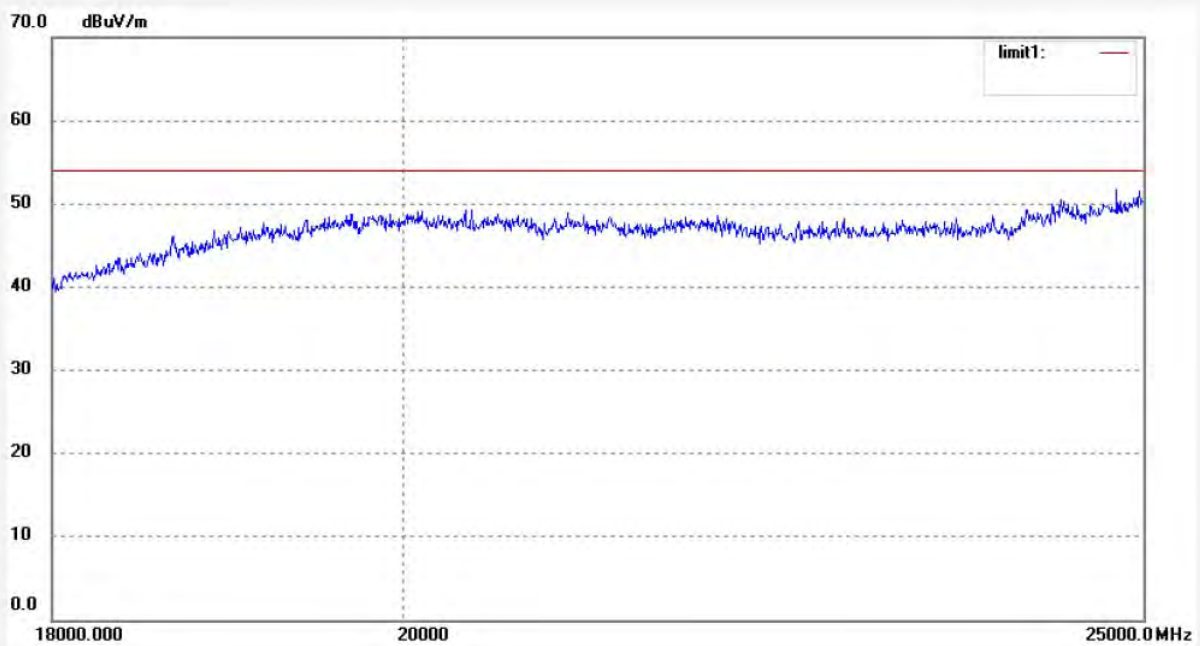

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5884	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:20:11
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

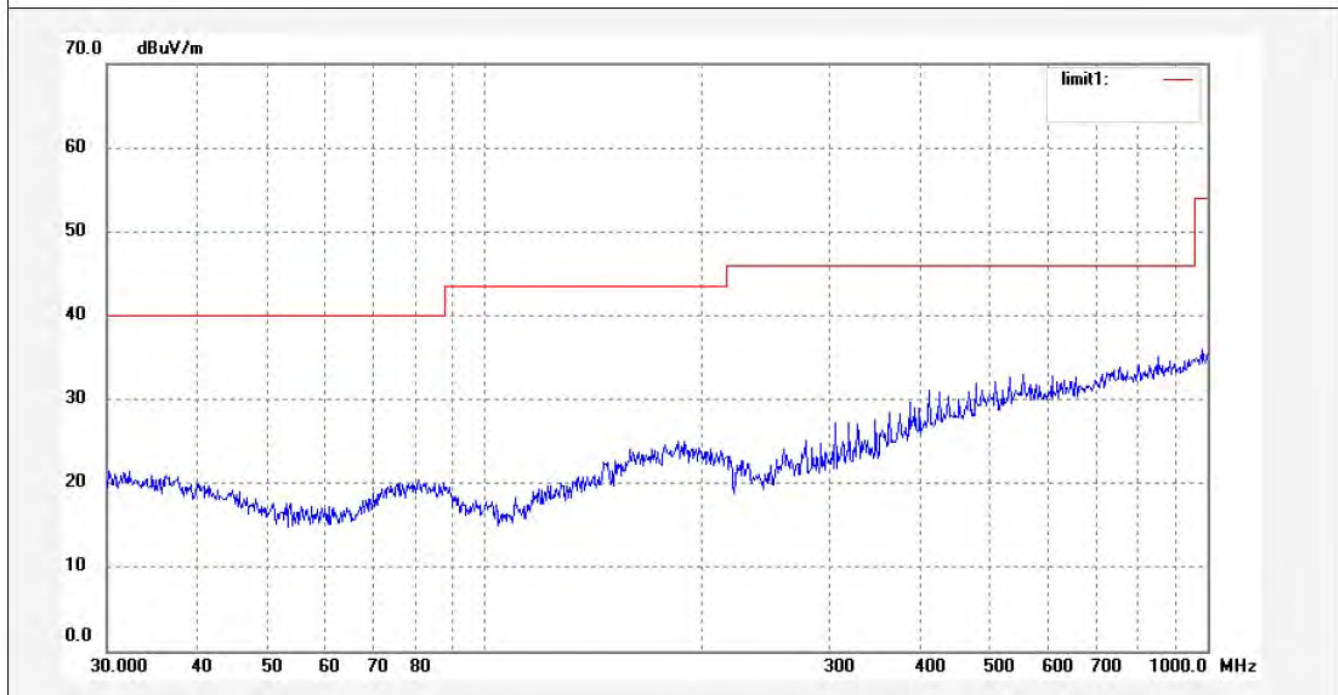

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5885	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:24:23
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

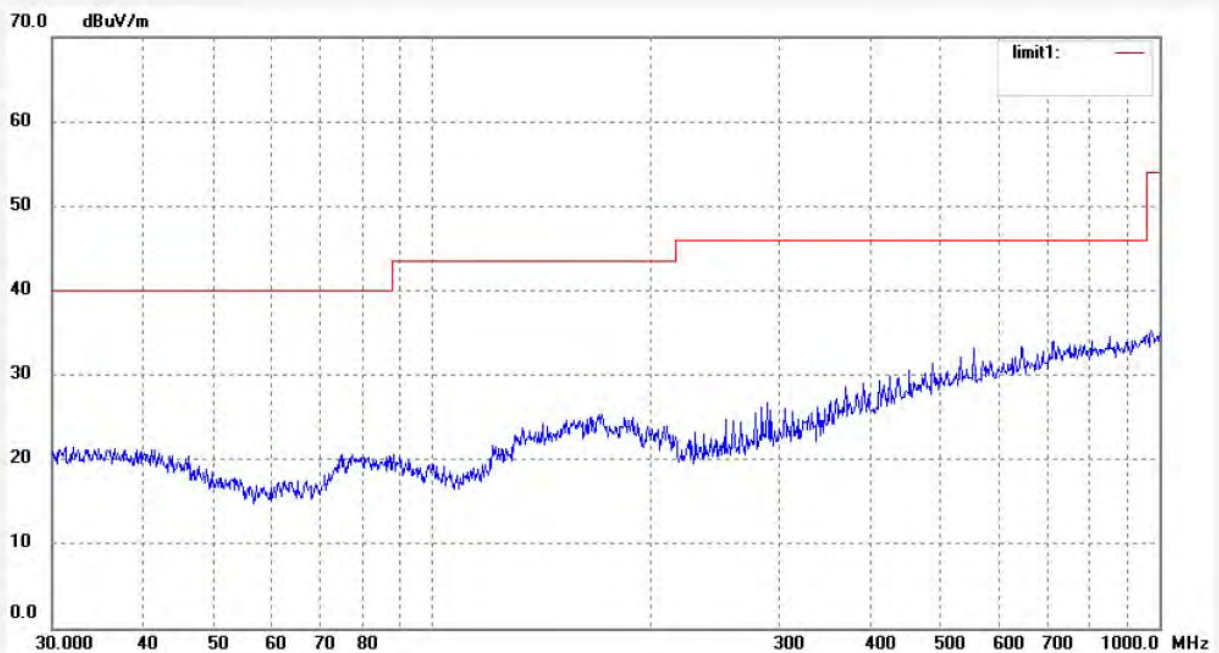

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Bob #867	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:16:33
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

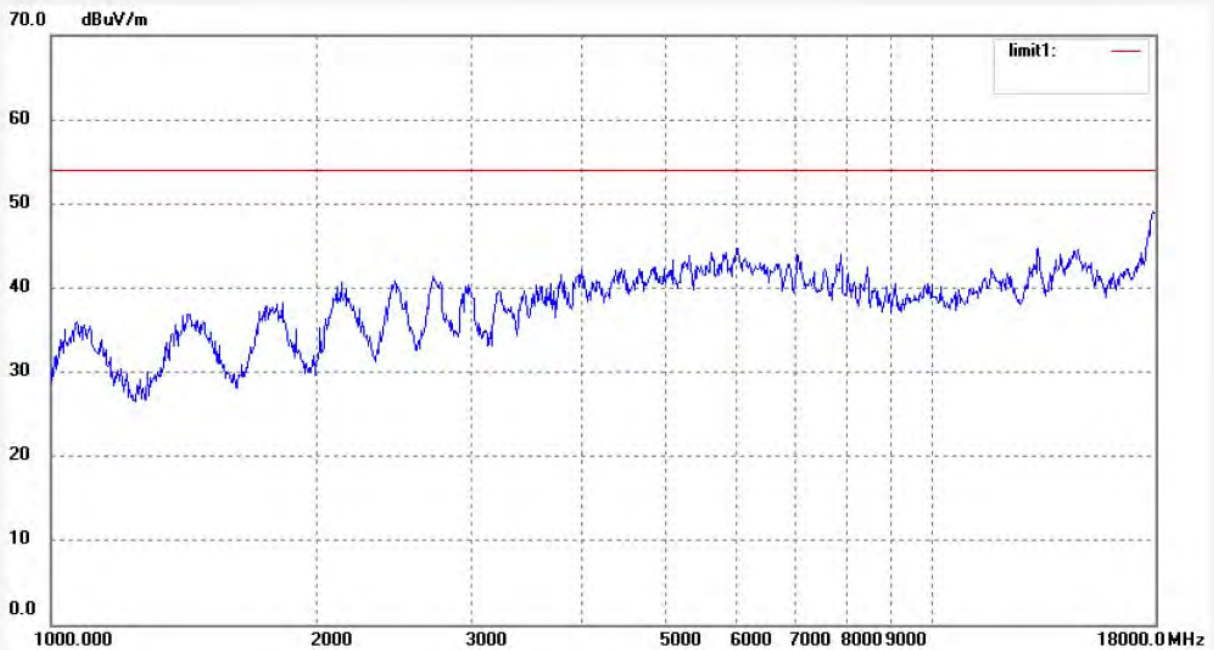

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #866	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:11:47
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

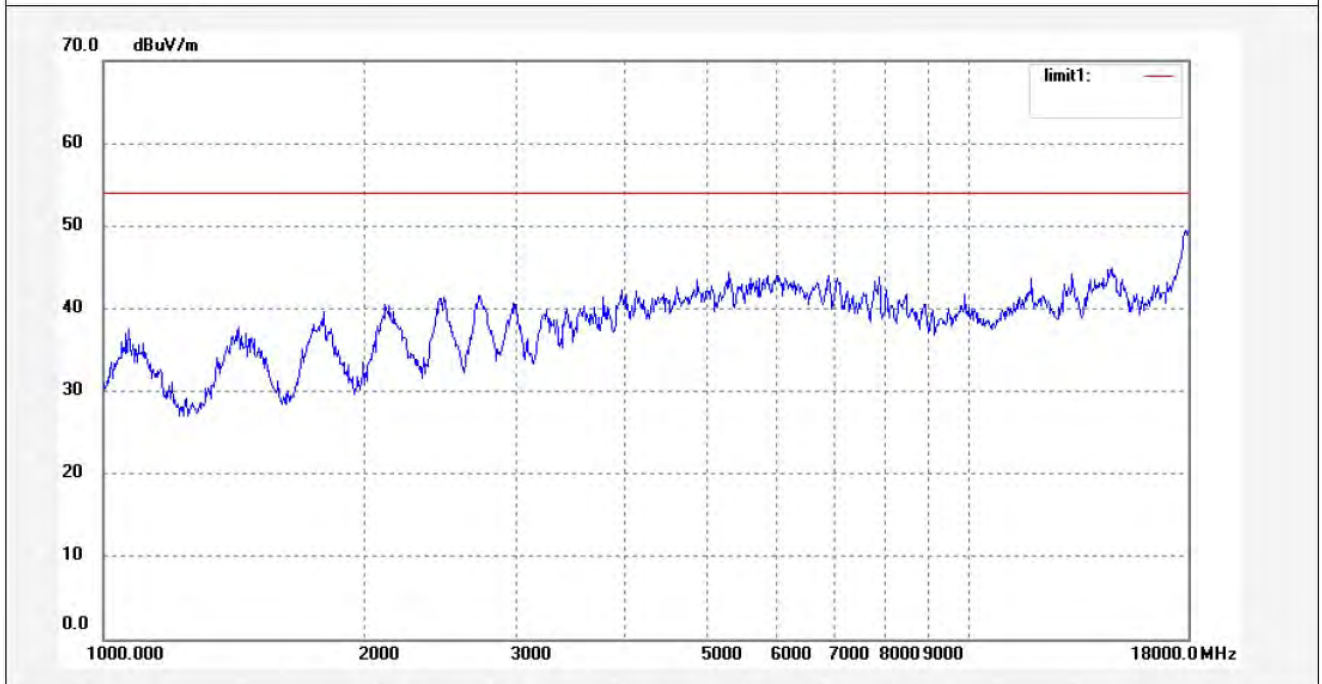

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1613	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 10:53:17
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

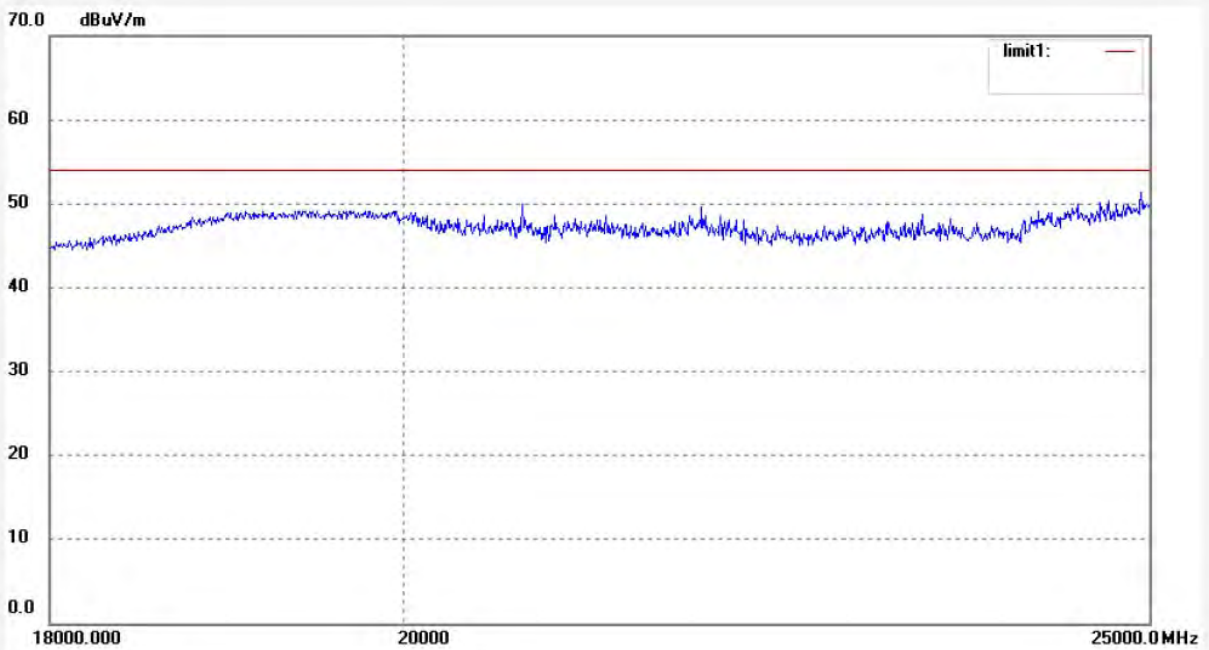

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1614	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 10:57:05
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 11 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

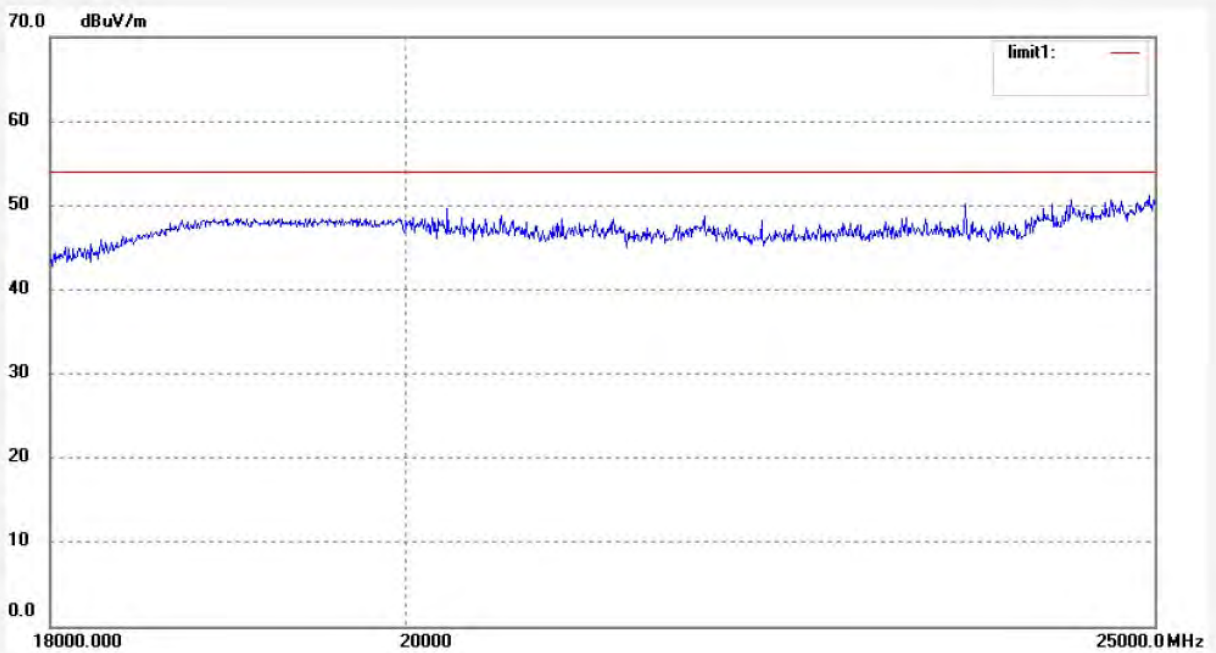

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5876	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:39:32
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 3 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

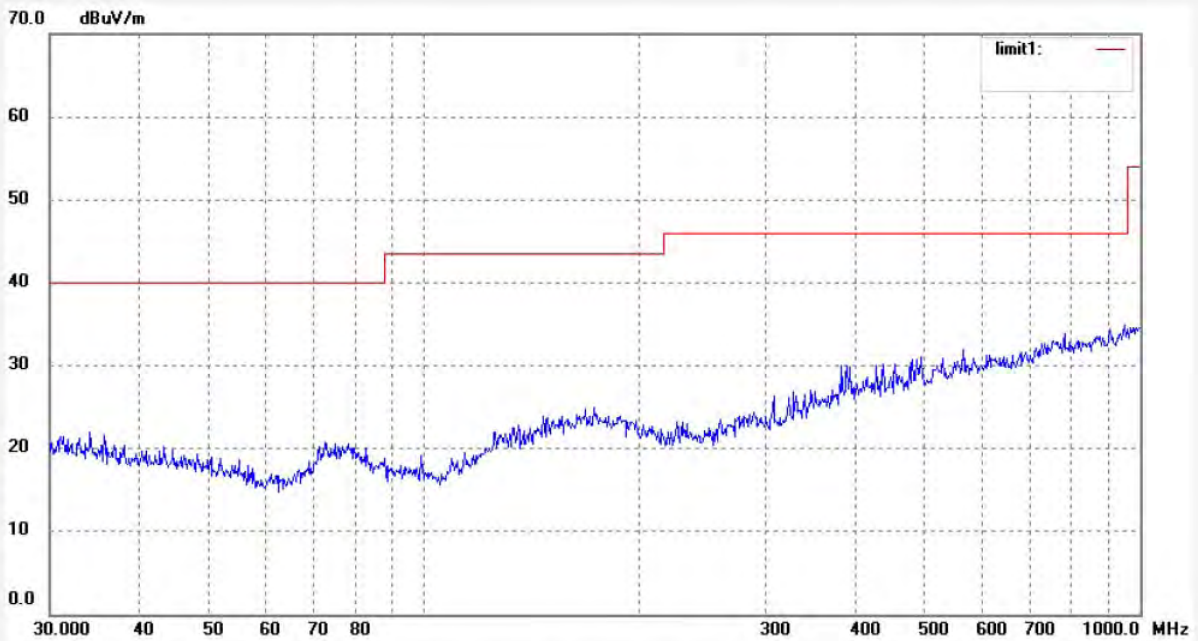

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5877	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:43:40
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 3 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

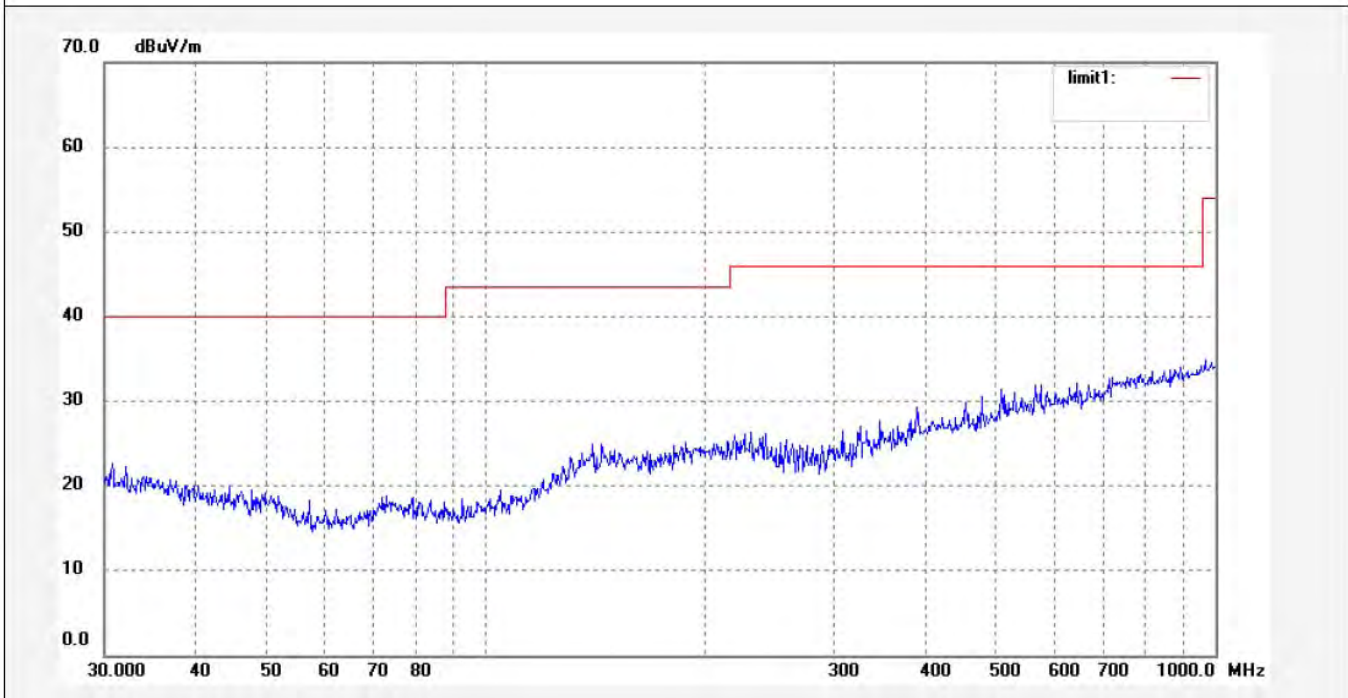

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #868	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:21:11
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 3(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

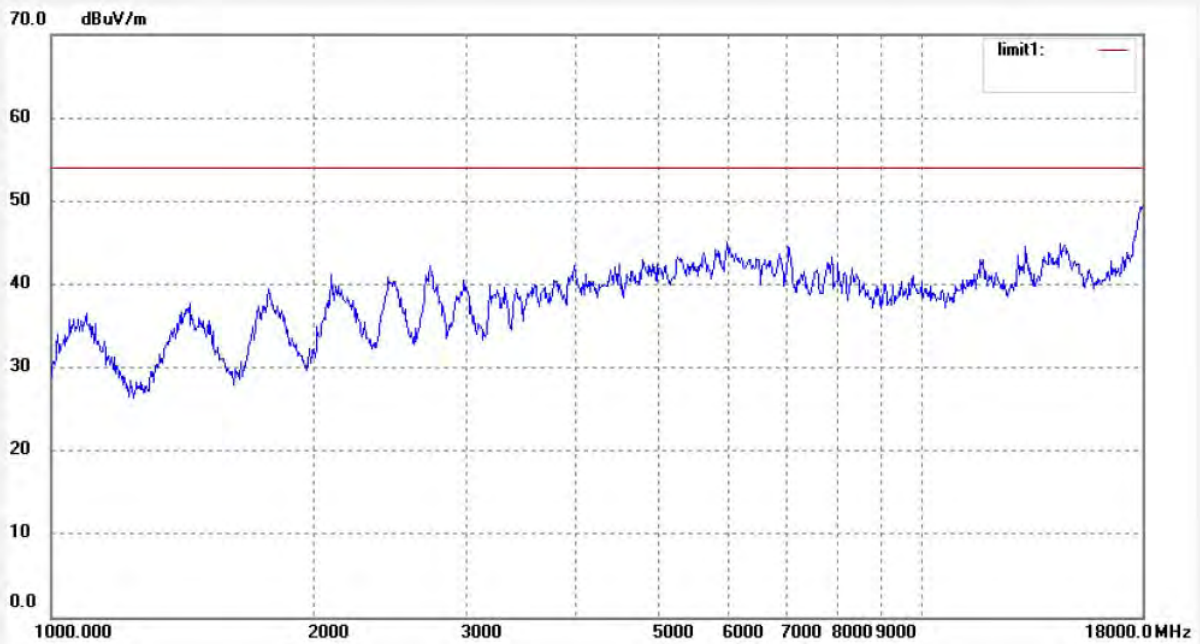

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #869	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:26:01
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 3(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

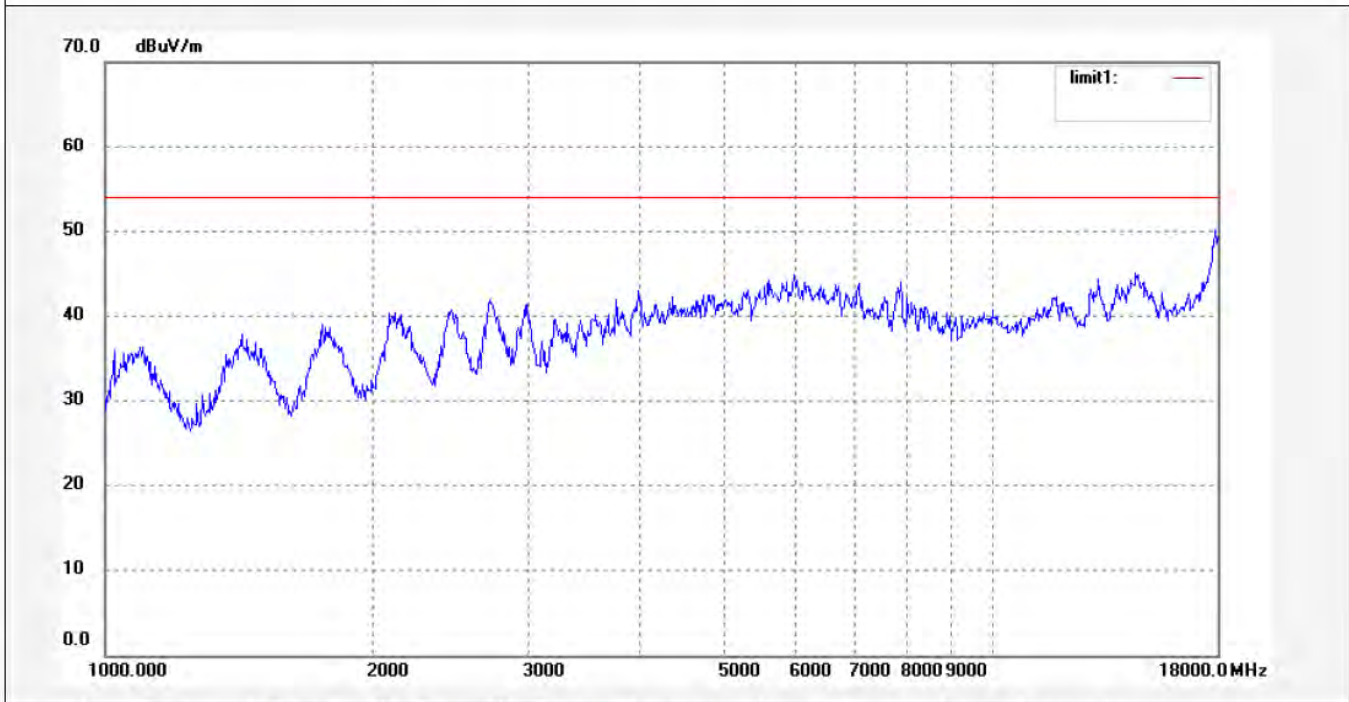

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5916	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11:52:09
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 3 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

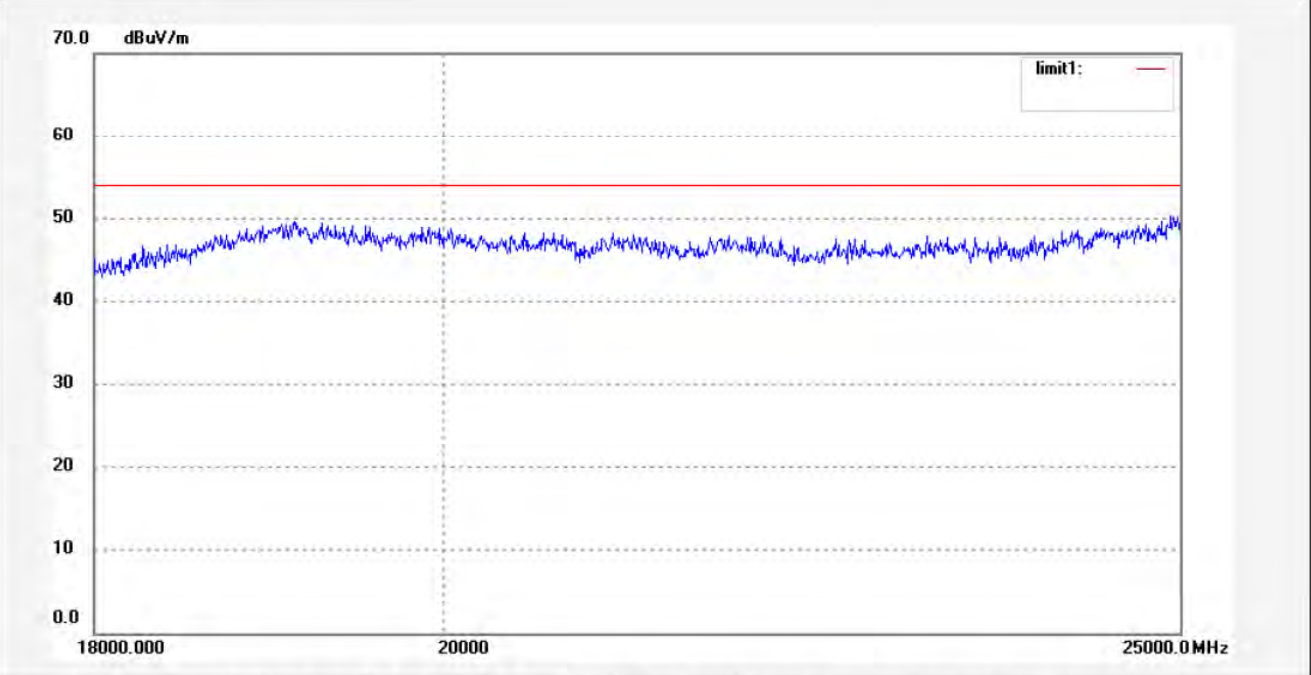

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5917	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11:56:43
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 3 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

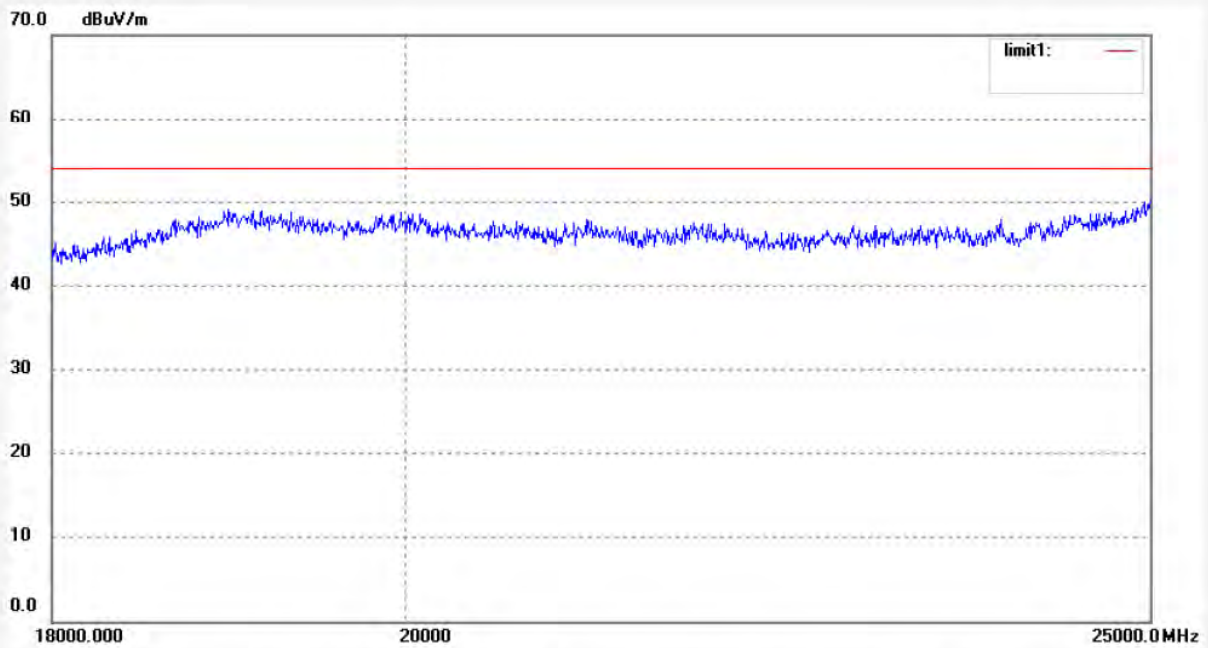

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5879	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:53:06
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

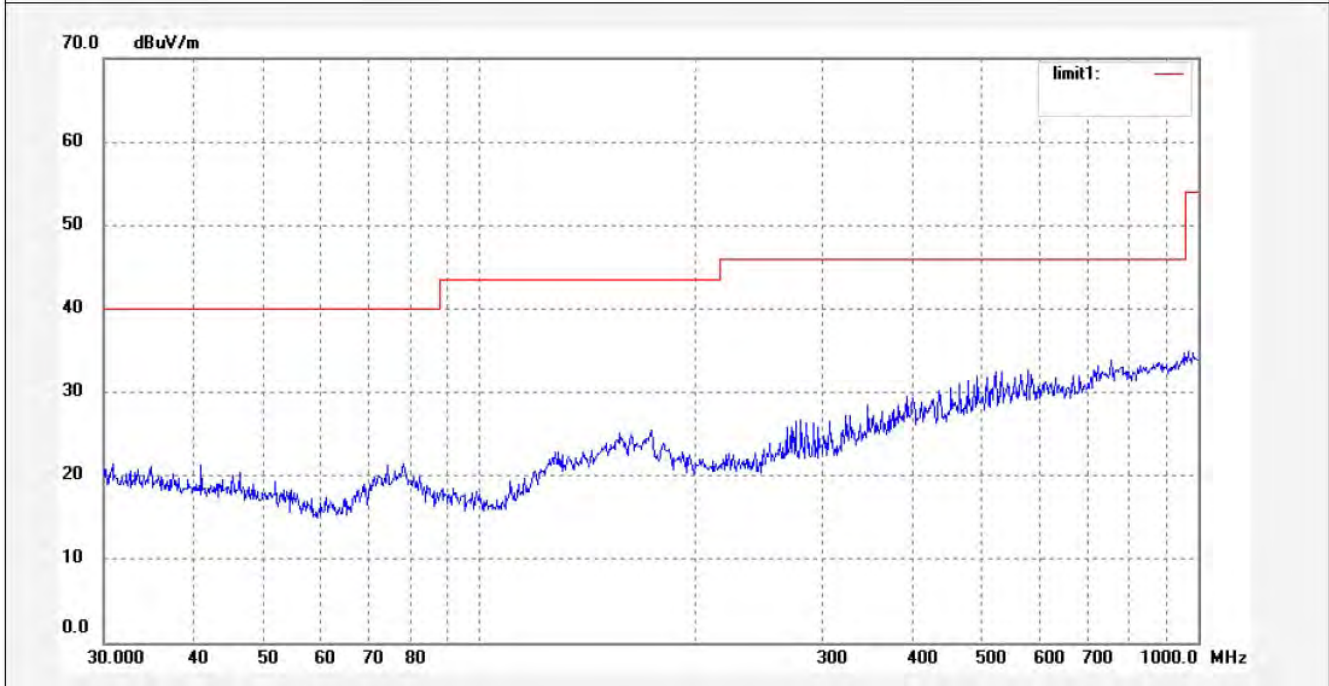

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5878	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 15:48:55
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

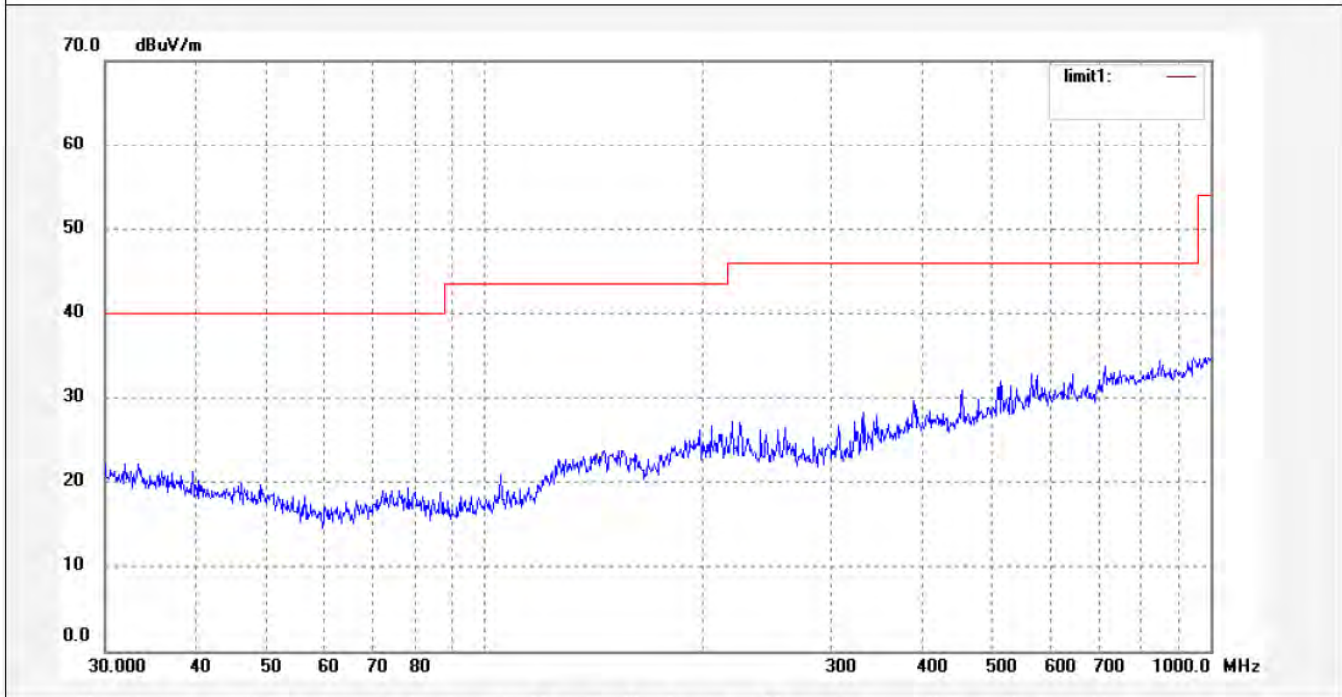

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #871	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:34:10
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

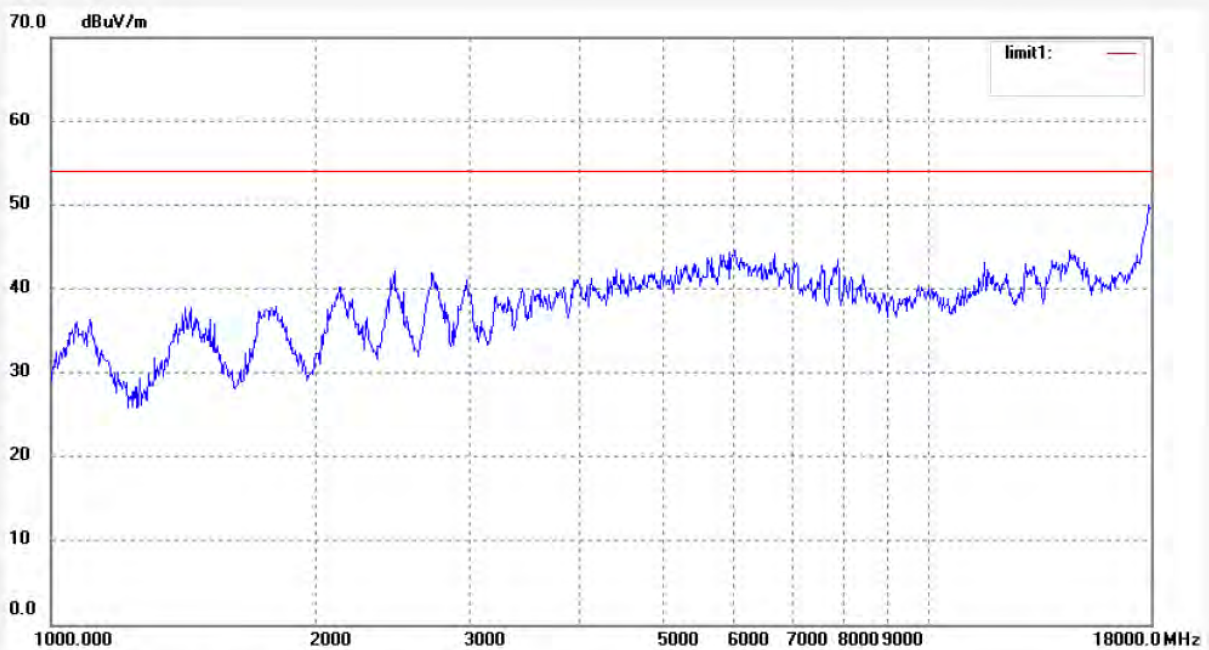

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #870	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:30:35
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

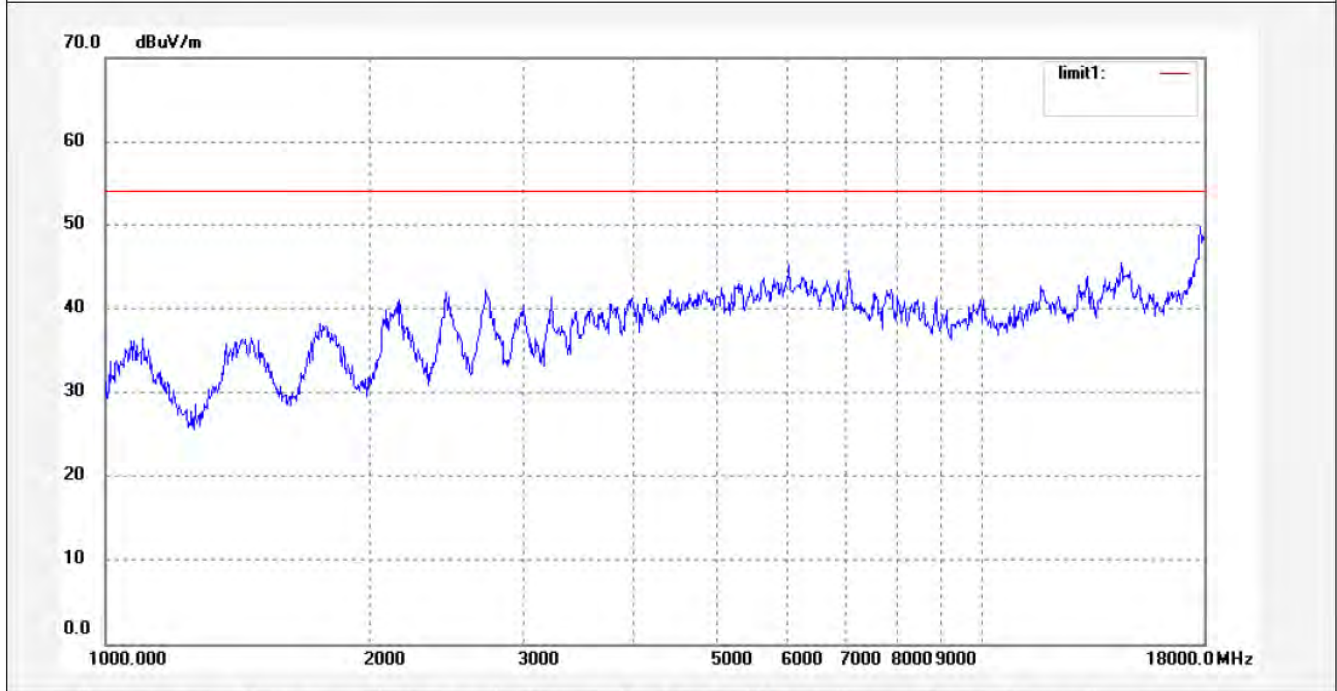

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5919	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:05:30
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

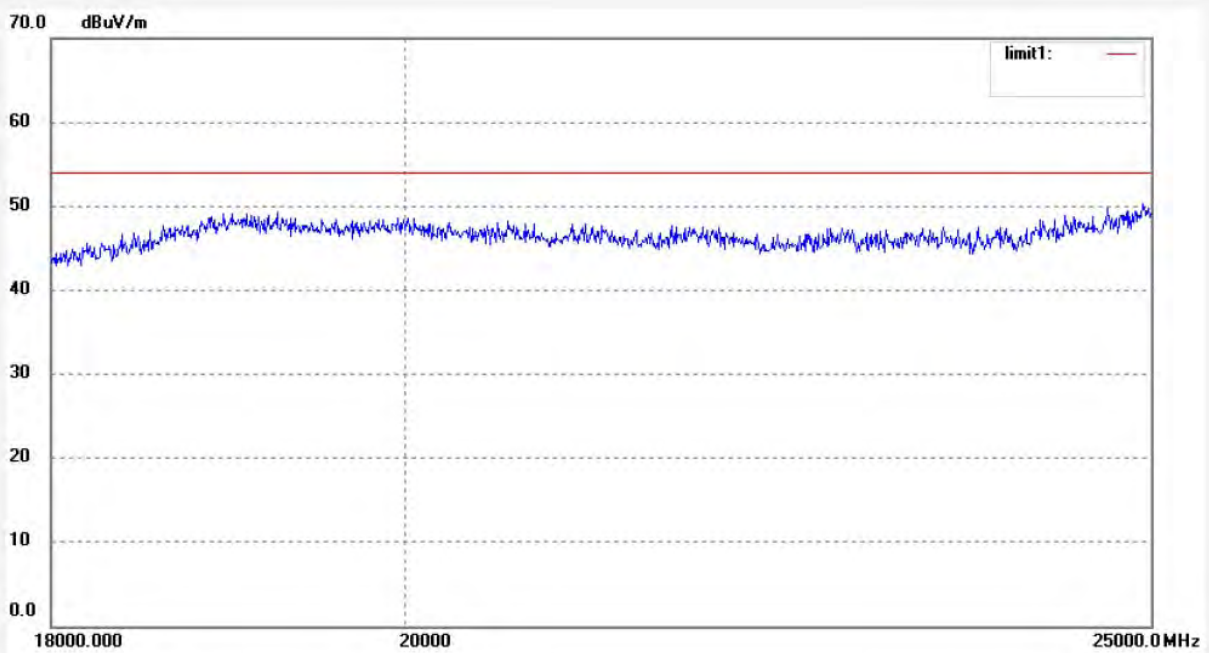

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5918	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:01:19
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

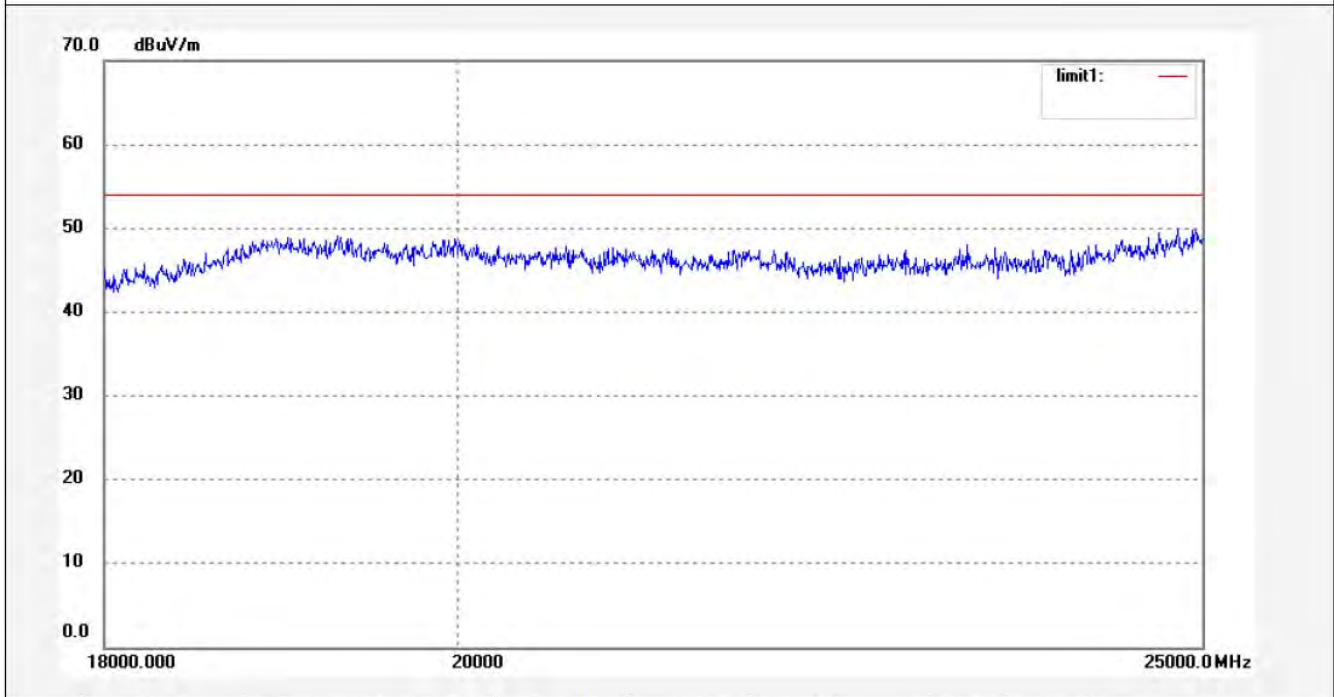

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5880	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 16:01:35
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 9 (802.11n)	Distance: 3m
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

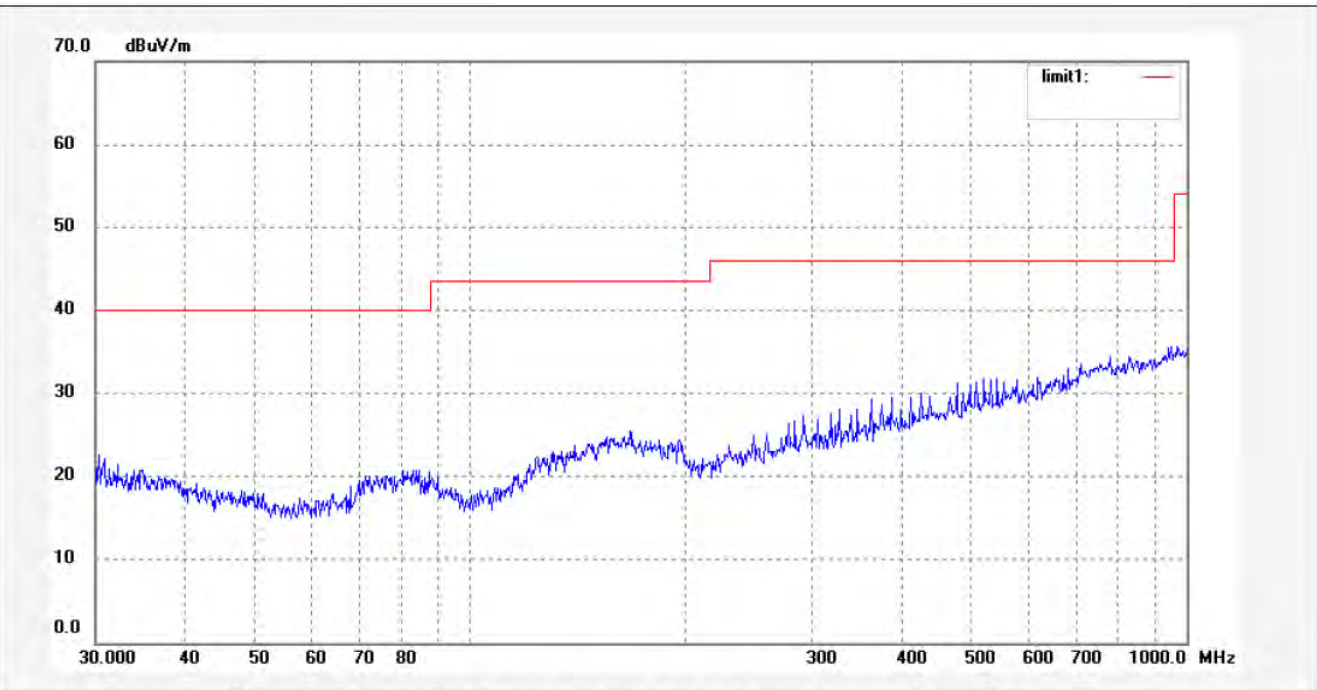

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5881  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: Mobile internet device  
Mode: TX Channel 9 (802.11n)  
Model: DS975  
Manufacturer: Pipo

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2012/8/31  
Time: 16:05:42  
Engineer Signature: Bob  
Distance: 3m

Note: Report No.:ATE20121929

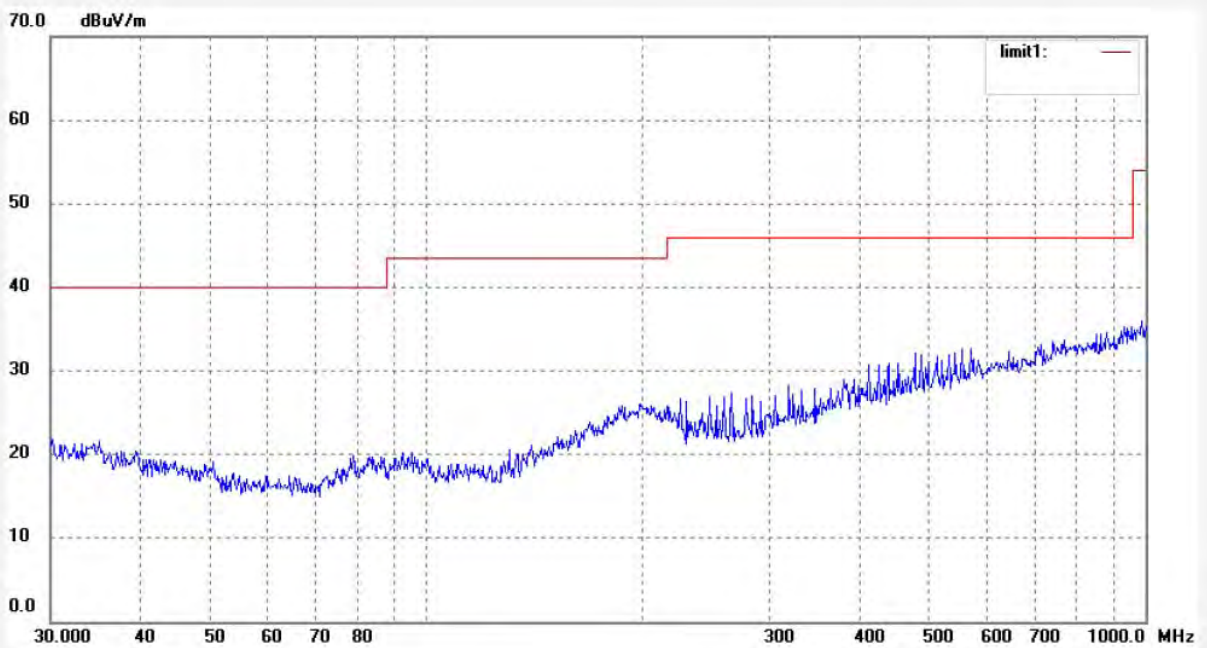

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #872	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:37:55
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 9(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

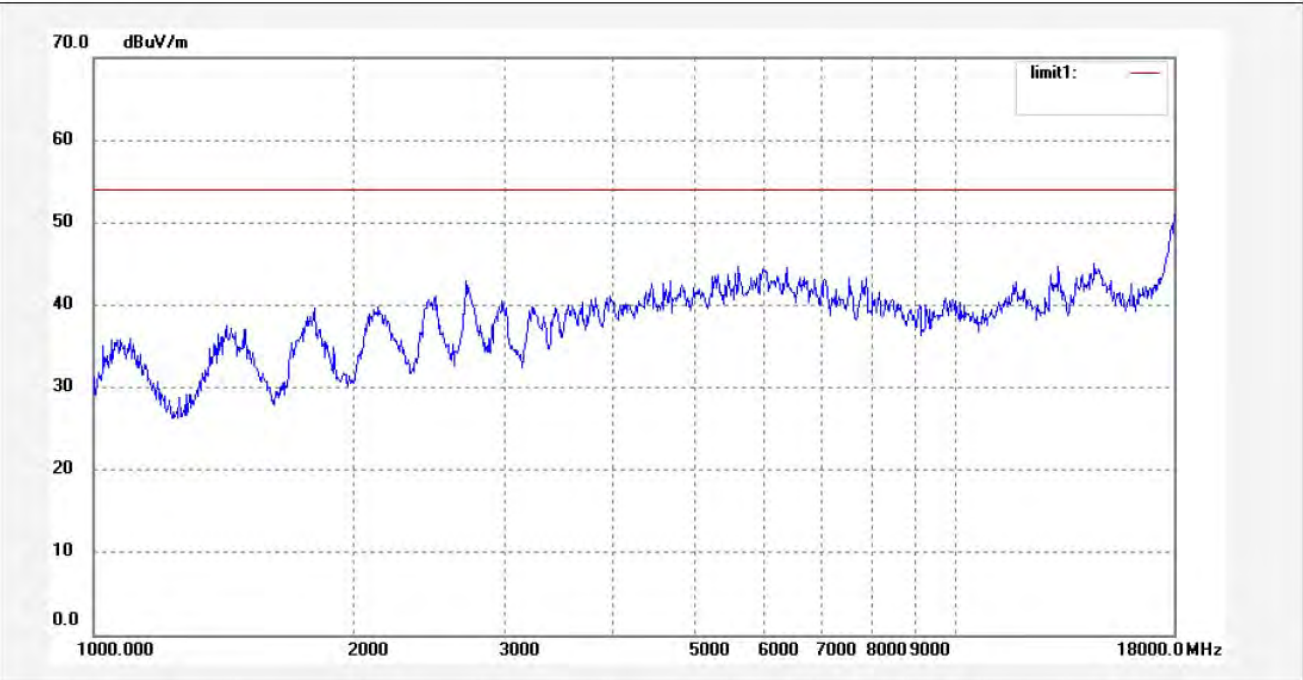

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #873	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2012/09/1
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 19:43:30
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 9(802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

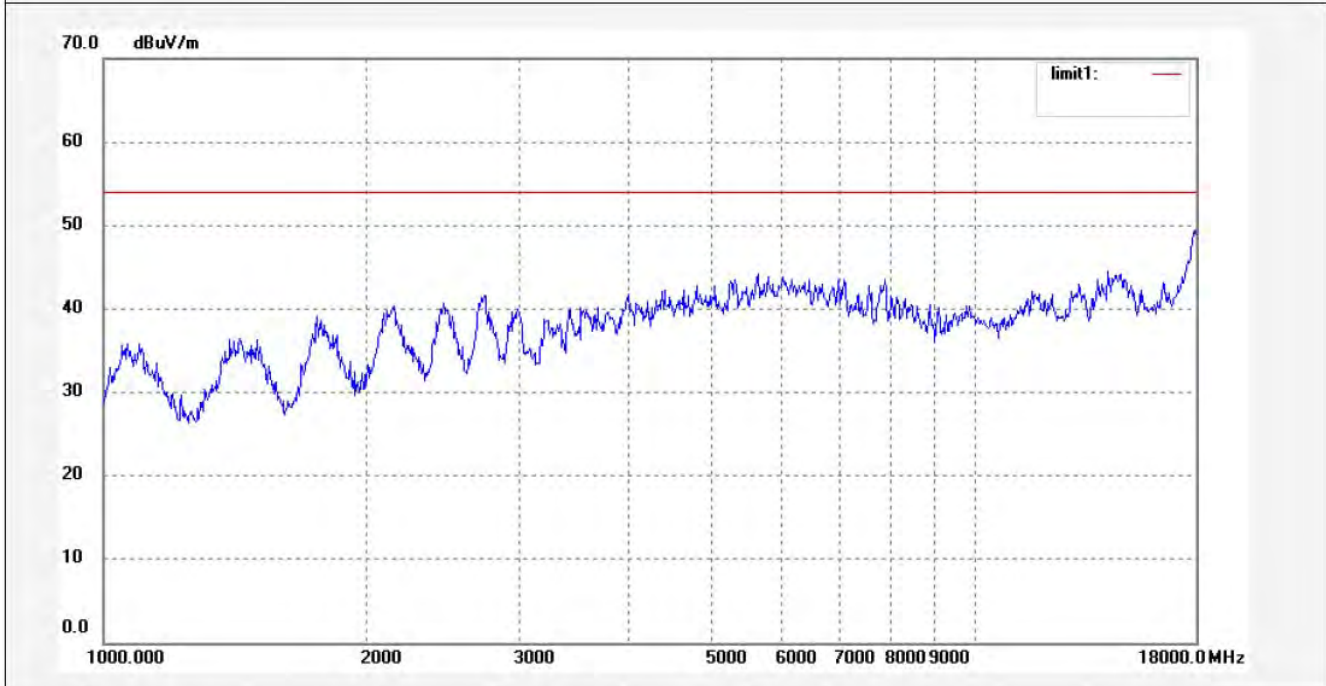

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A.Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5920	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:10:41
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 9 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	

Note: Report No.:ATE20121929

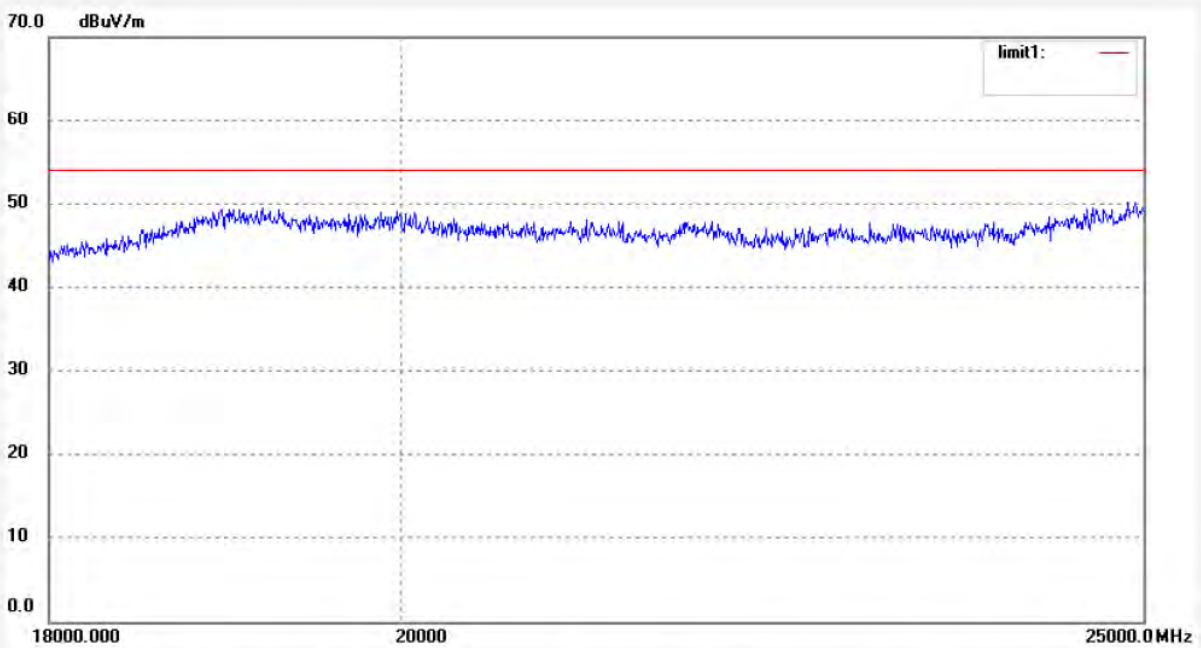

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5921	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date:12/8/31
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:15:08
EUT: Mobile internet device	Engineer Signature: Bob
Mode: TX Channel 9 (802.11n)	Distance:
Model: DS975	
Manufacturer: Pipo	


Note: Report No.:ATE20121929

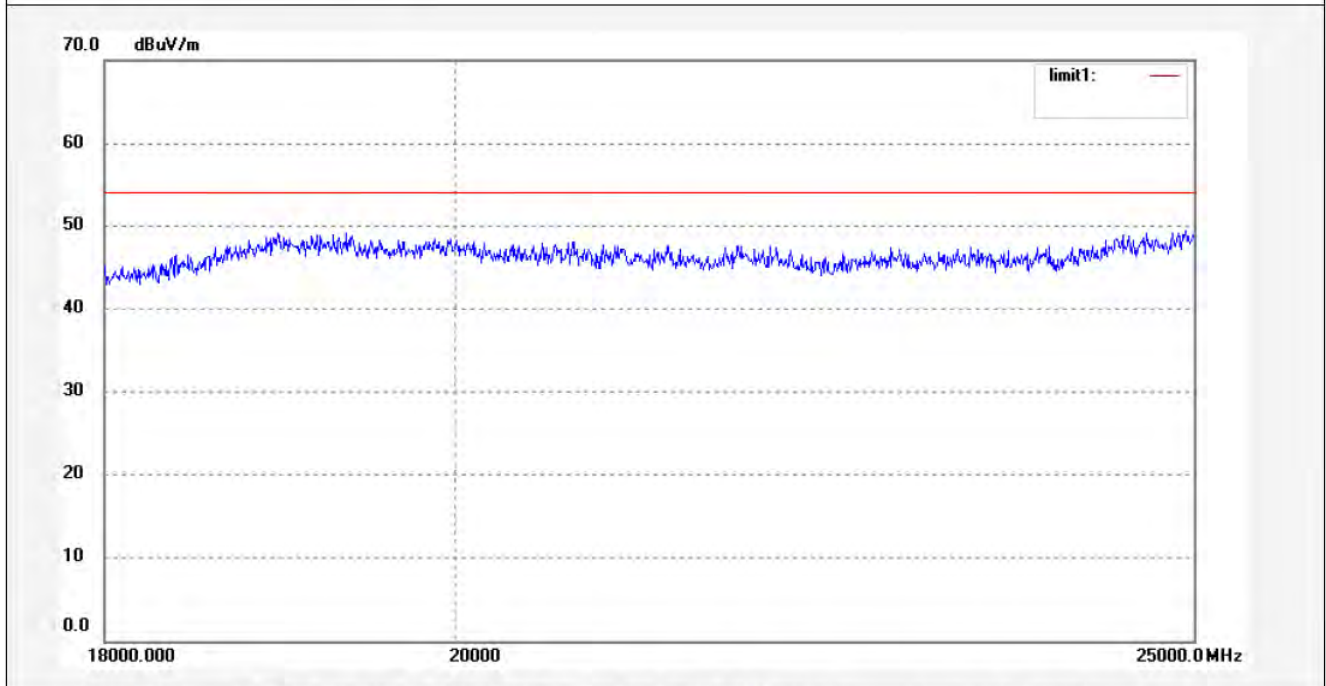

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

## 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

### 10.1. Block Diagram of Test Setup

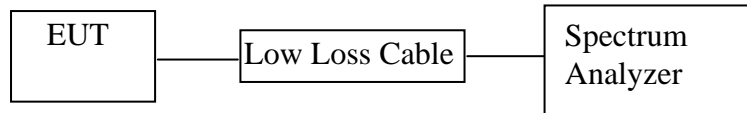

(EUT: Mobile Internet Device)

### 10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 10.3.1. Mobile Internet Device (EUT)

Model Number	:	DS975
Serial Number	:	N/A
Manufacturer	:	Pipo Technology Co., Ltd.

## 10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 10.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

## 10.5. Test Procedure

10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

10.5.3. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


10.5.4. The Conducted Spurious Emission was measured and recorded.

## 10.6. Test Result


**Pass.**

The spectrum analyzer plots are attached as below.


**TX 802.11b Channel Low 2412MHz (30MHz-1GHz)**

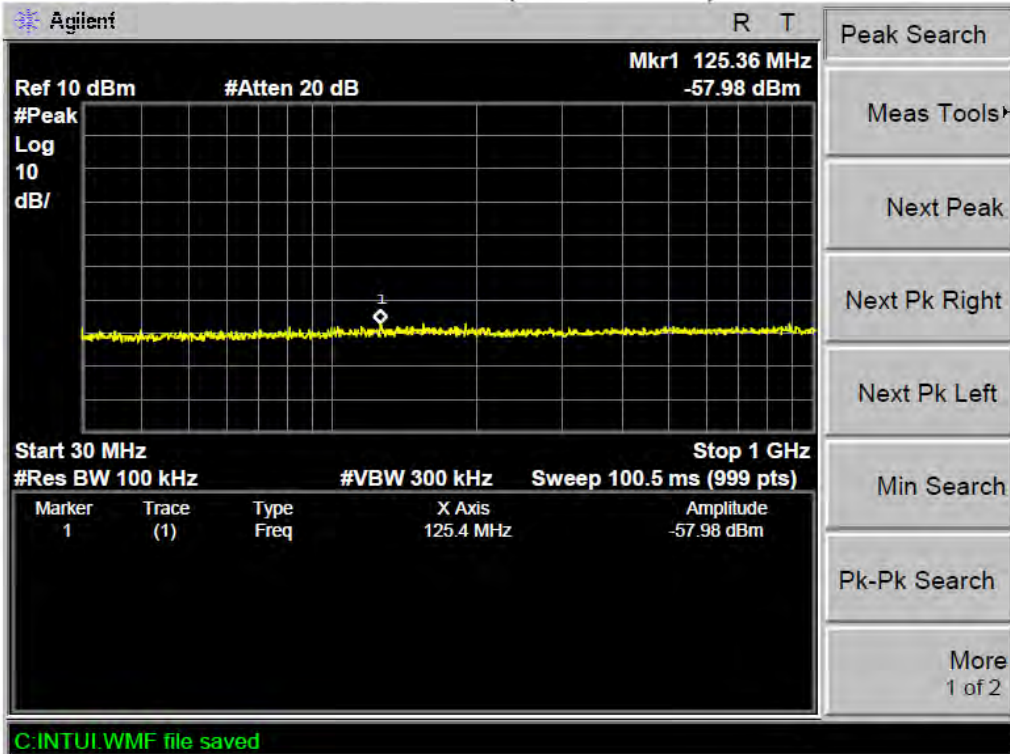


**TX 802.11b Channel Low 2412MHz (1GHz-25GHz)**

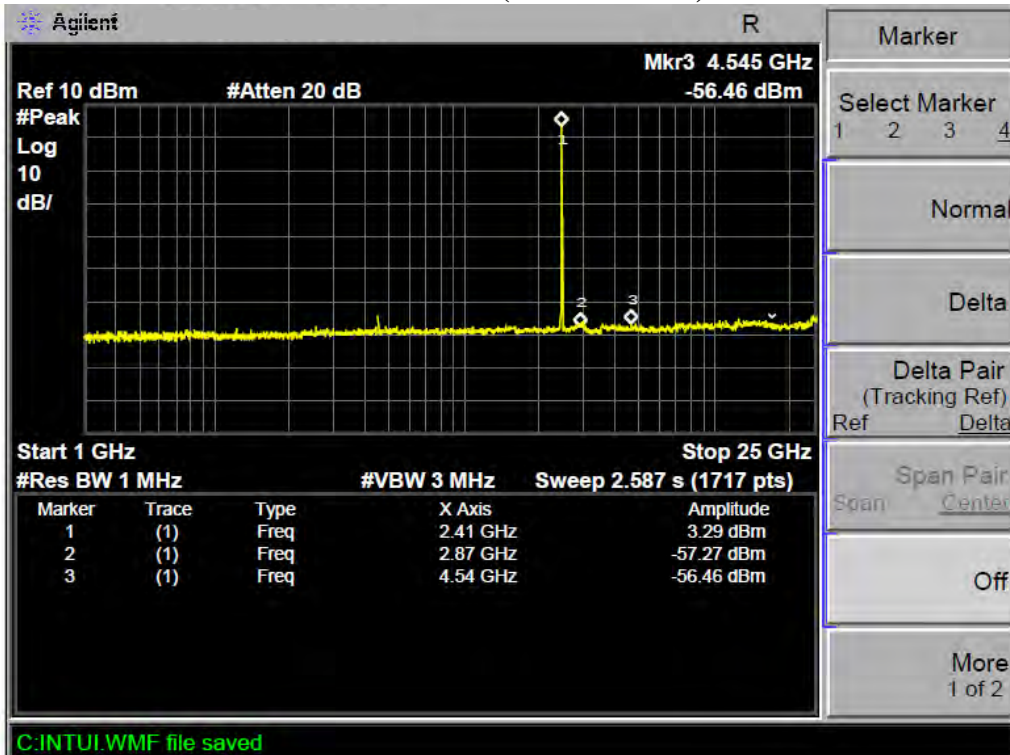


### TX 802.11b Channel Middle 2437MHz (30MHz-1GHz)

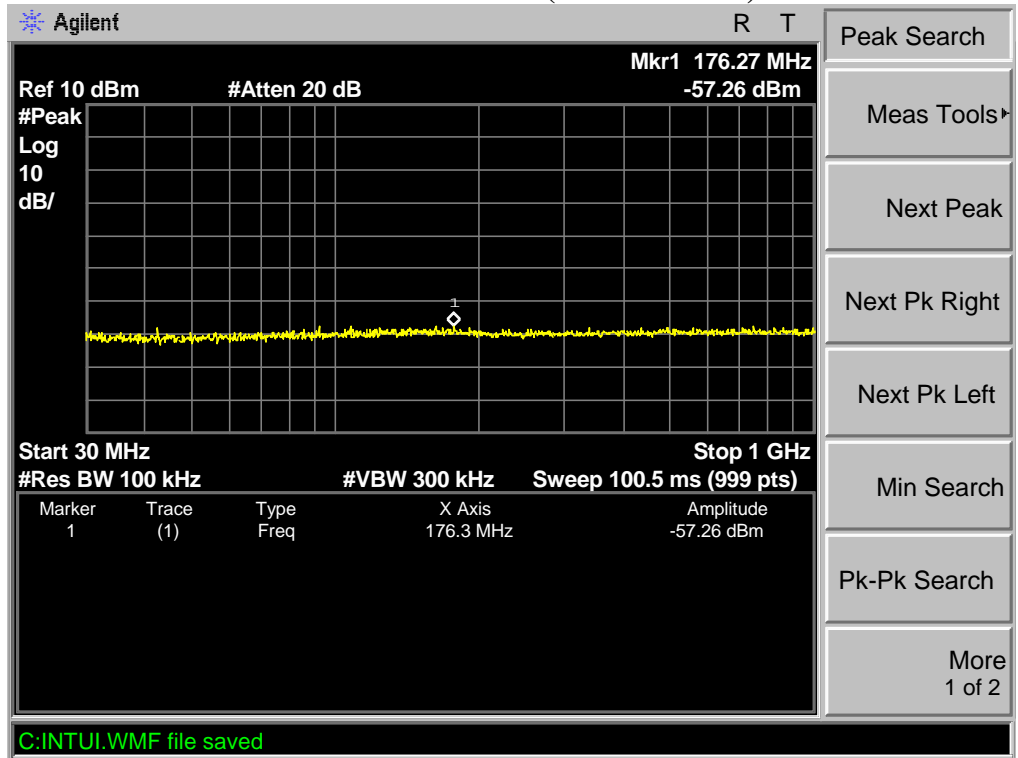


### TX 802.11b Channel Middle 2437MHz (1GHz-25GHz)

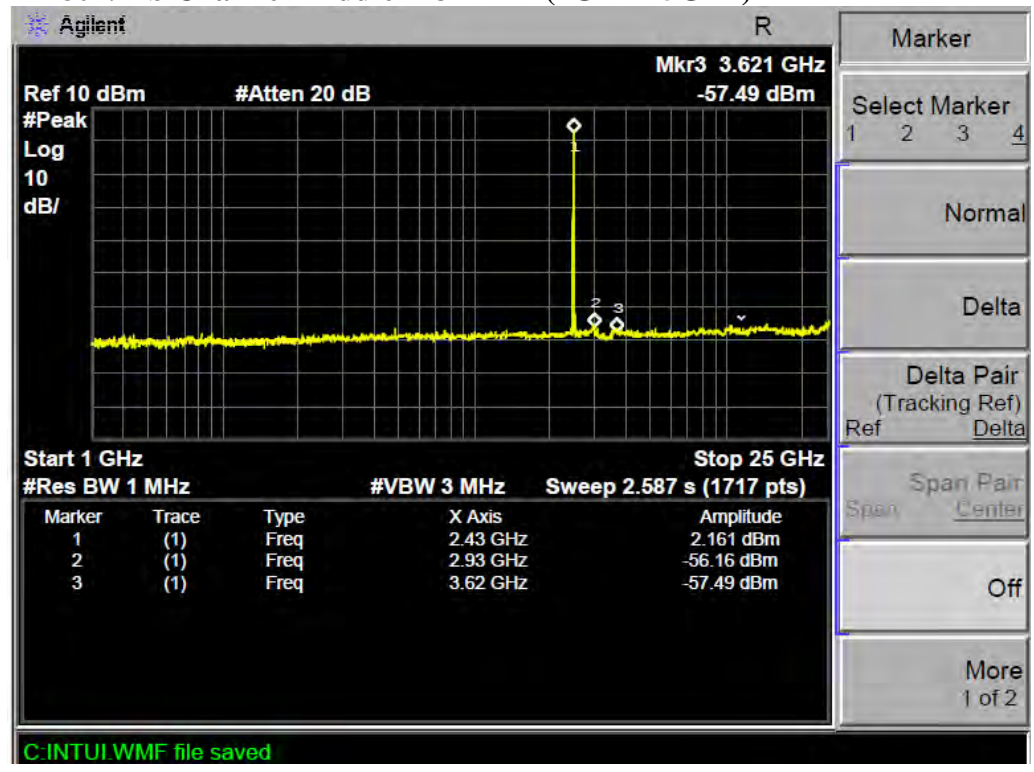


### TX 802.11b Channel High 2462MHz (30MHz-1GHz)

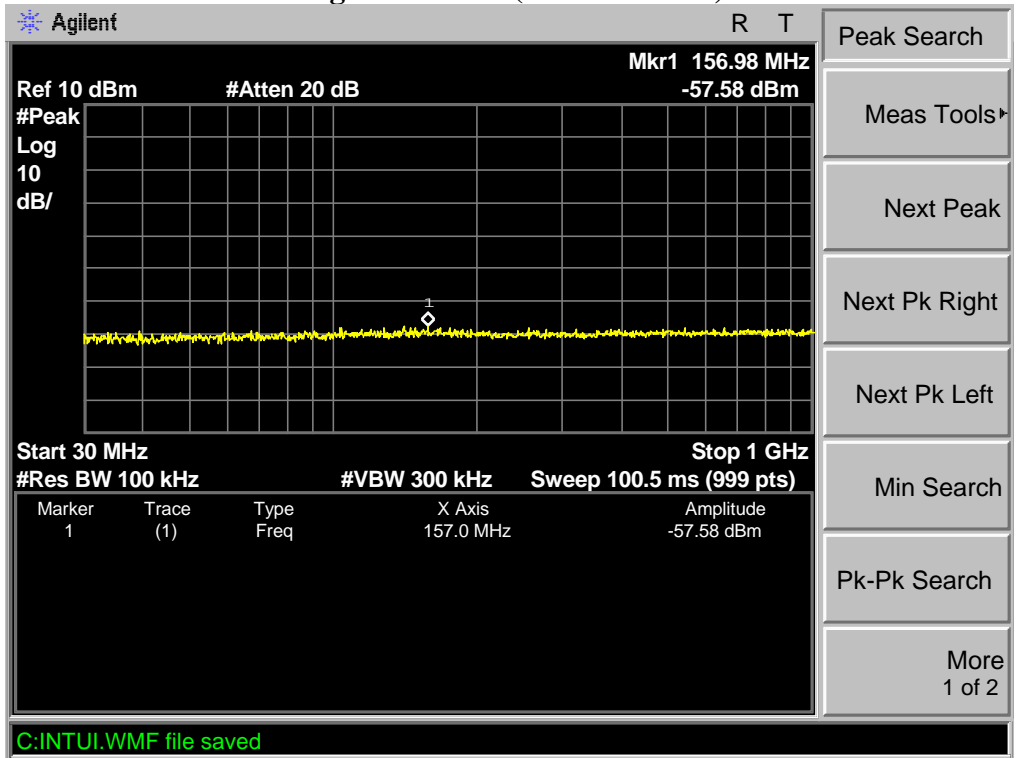


### TX 802.11b Channel High 2462MHz (1GHz-25GHz)

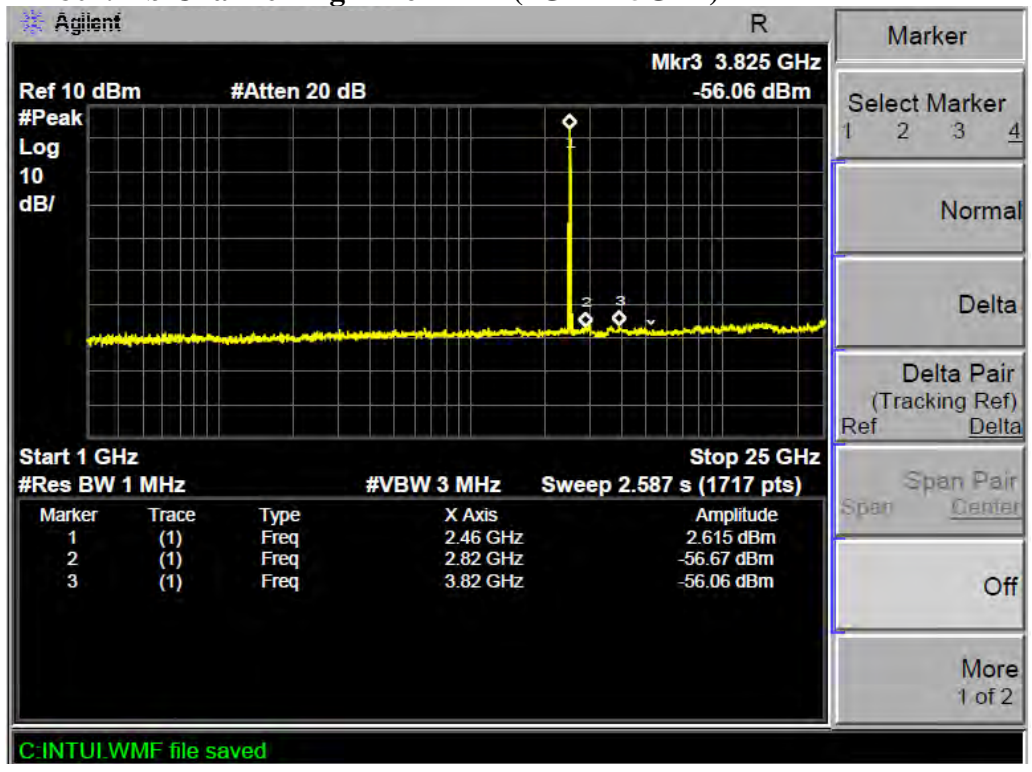


### TX 802.11g Channel Low 2412MHz (30MHz-1GHz)

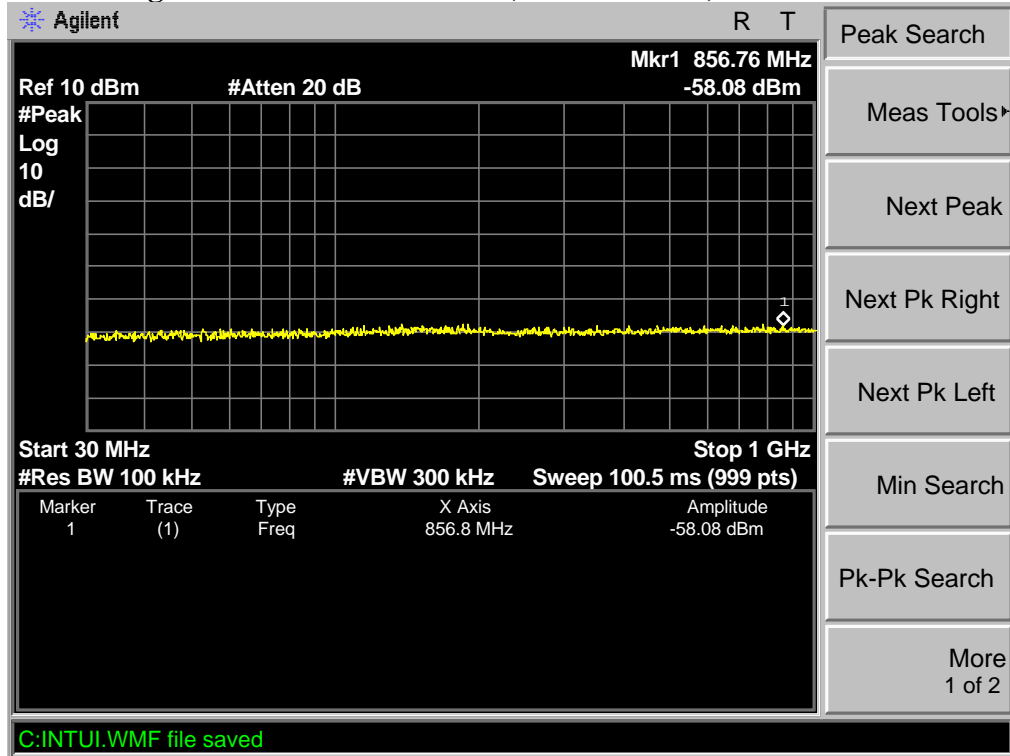


### TX 802.11g Channel Low 2412MHz (1GHz-25GHz)

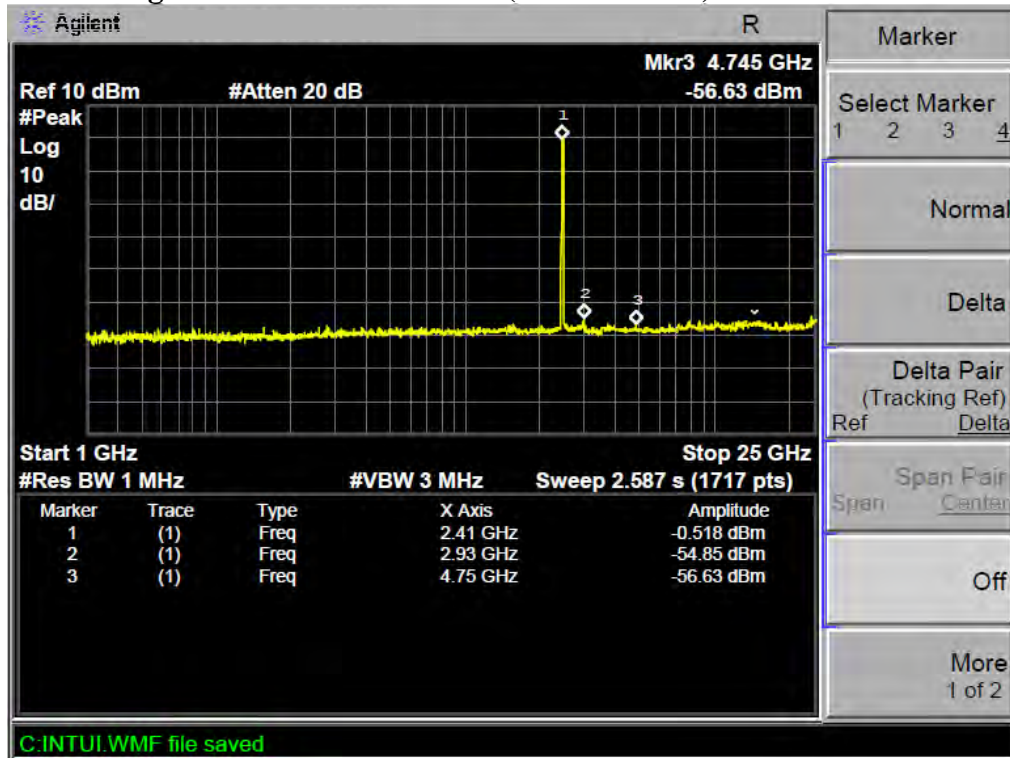

### TX 802.11g Channel Middle 2437MHz (30MHz-1GHz)

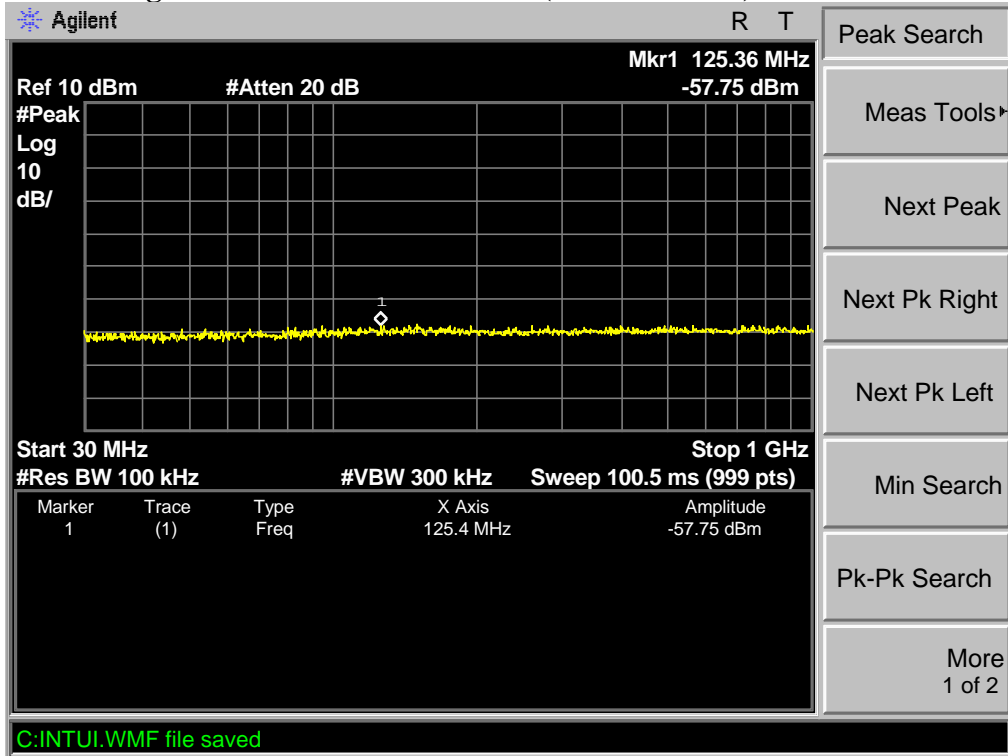


### TX 802.11g Channel Middle 2437MHz

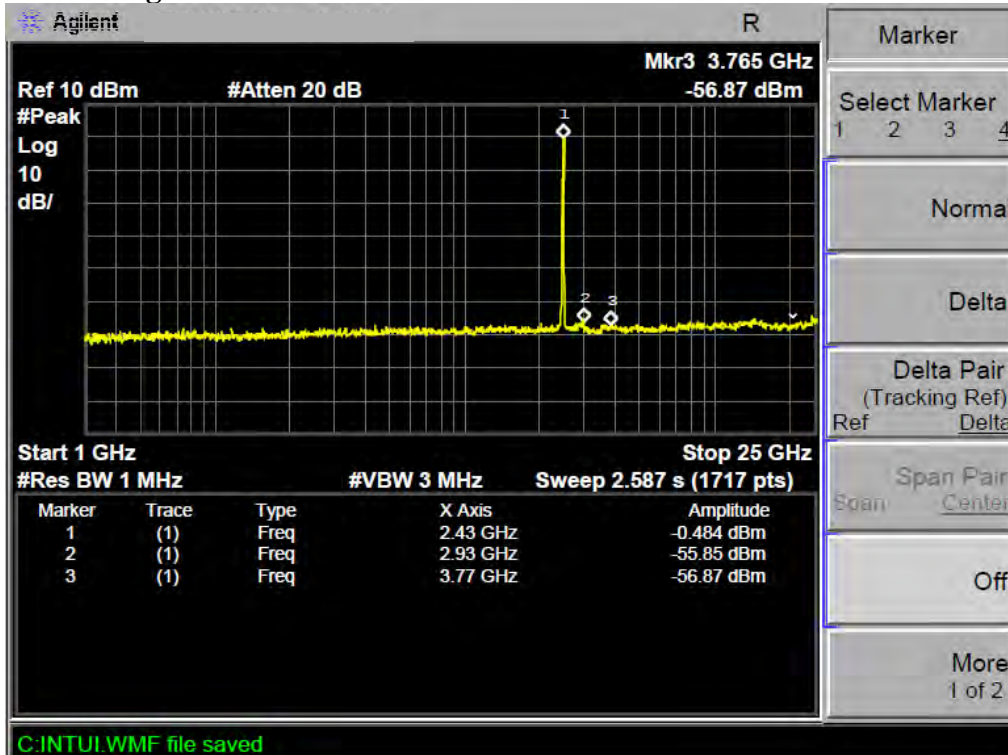





### TX 802.11g Channel High 2462MHz (30MHz-1GHz)

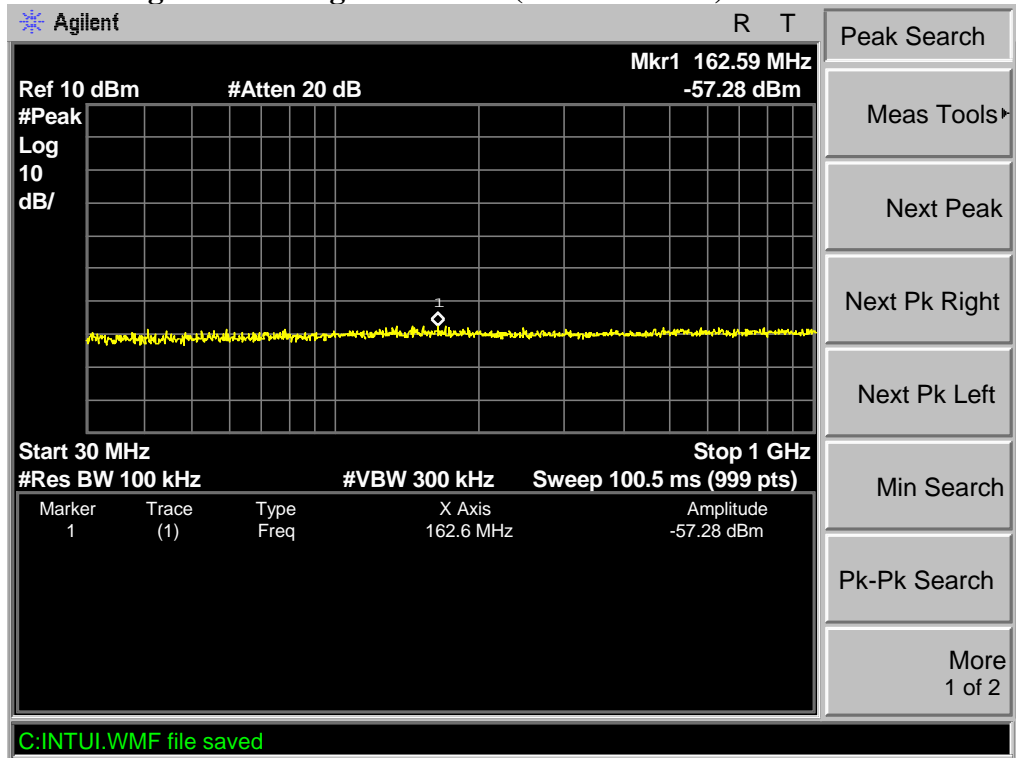


### TX 802.11g Channel High 2462MHz (1GHz-25GHz)

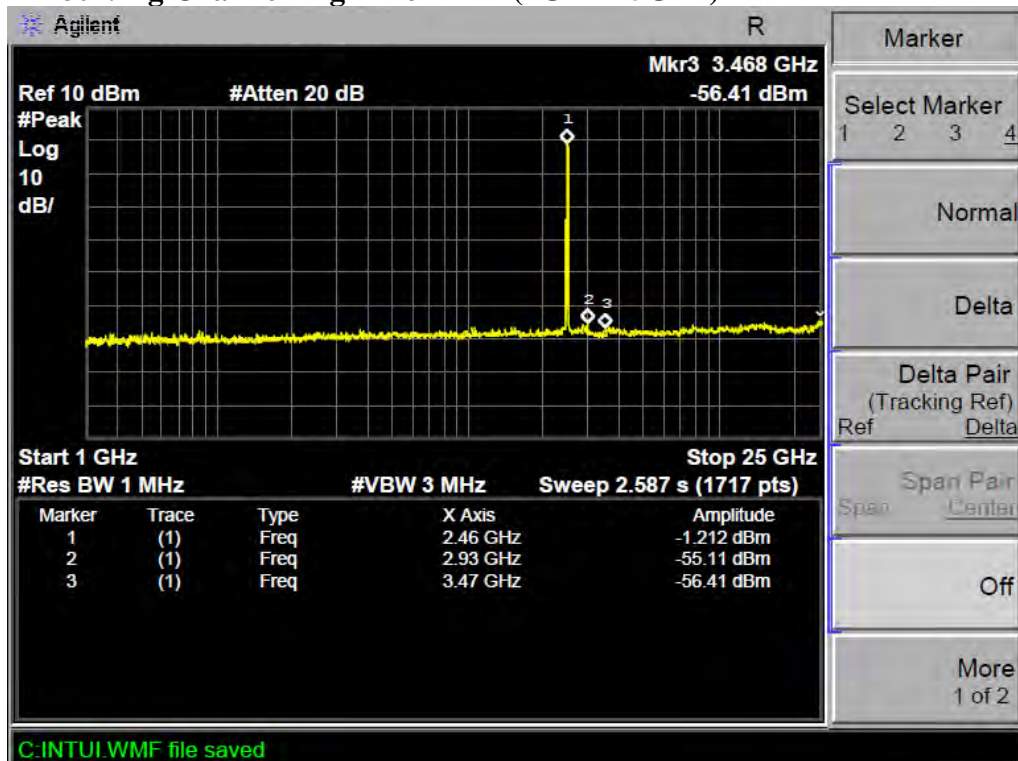


**TX 802.11n Channel Low 2412MHz (20MHz) (30MHz-1GHz)**

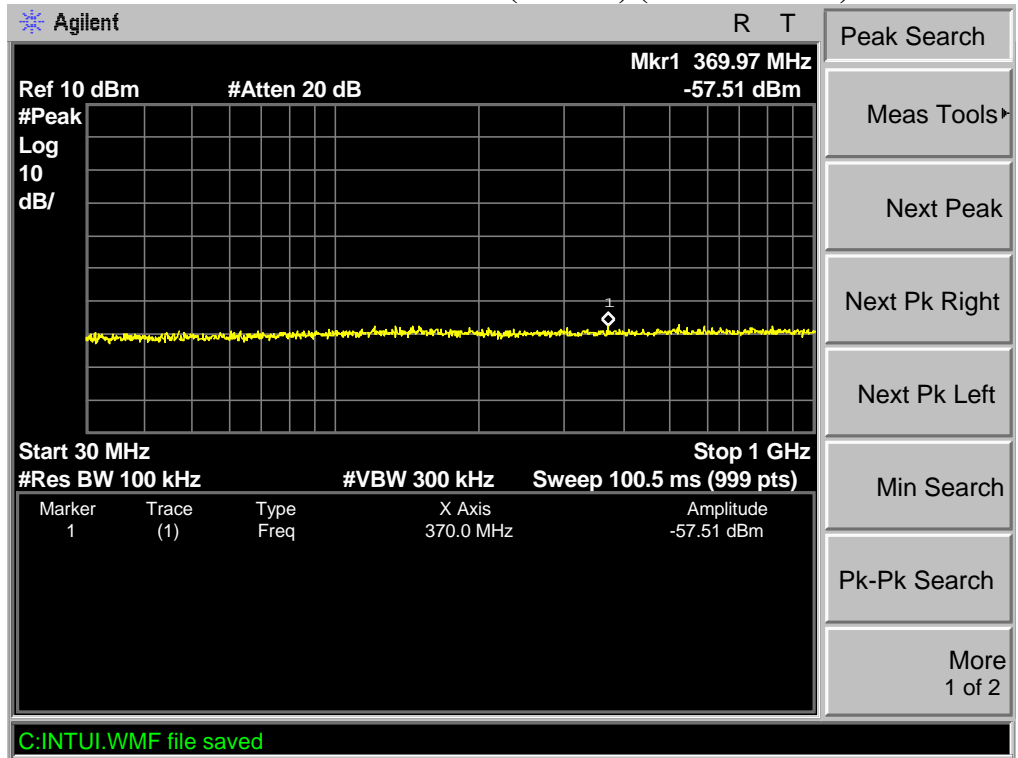


**TX 802.11n Channel Low 2412MHz (20MHz) (1GHz-25GHz)**

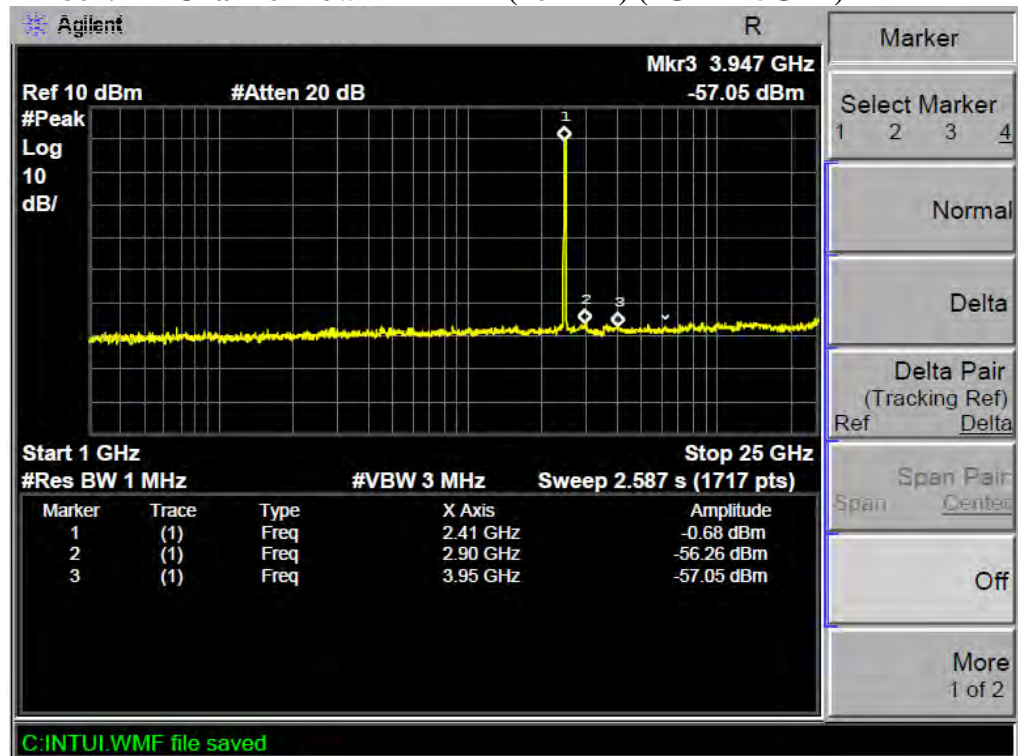


**TX 802.11n Channel Middle 2437MHz (20MHz) (30MHz-1GHz)**

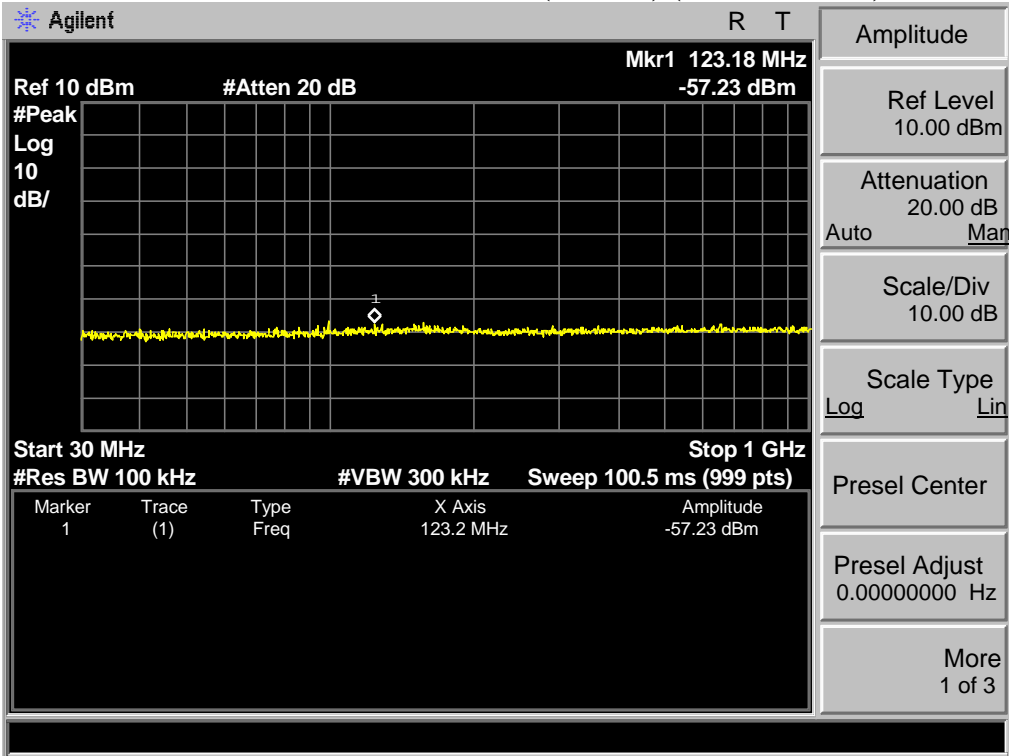


**TX 802.11n Channel Middle 2437MHz (20MHz) (1GHz-25GHz)**

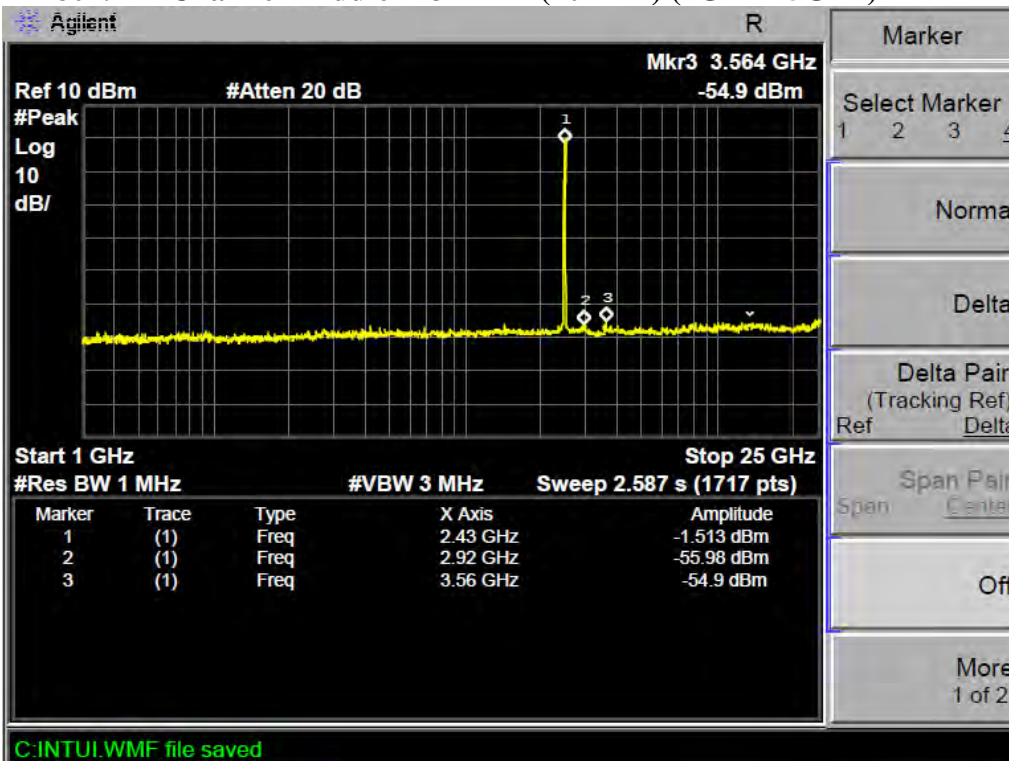


**TX 802.11n Channel High 2462MHz (20MHz) (30MHz-1GHz)**

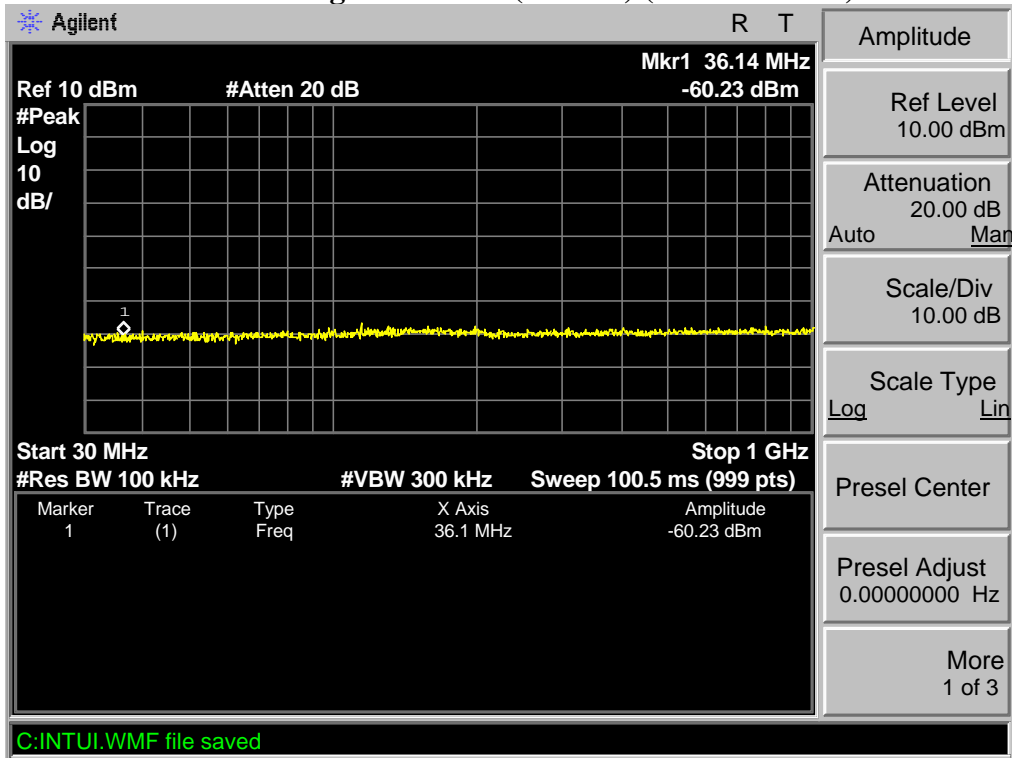


**TX 802.11n Channel High 2462MHz (20MHz) (1GHz-25GHz)**

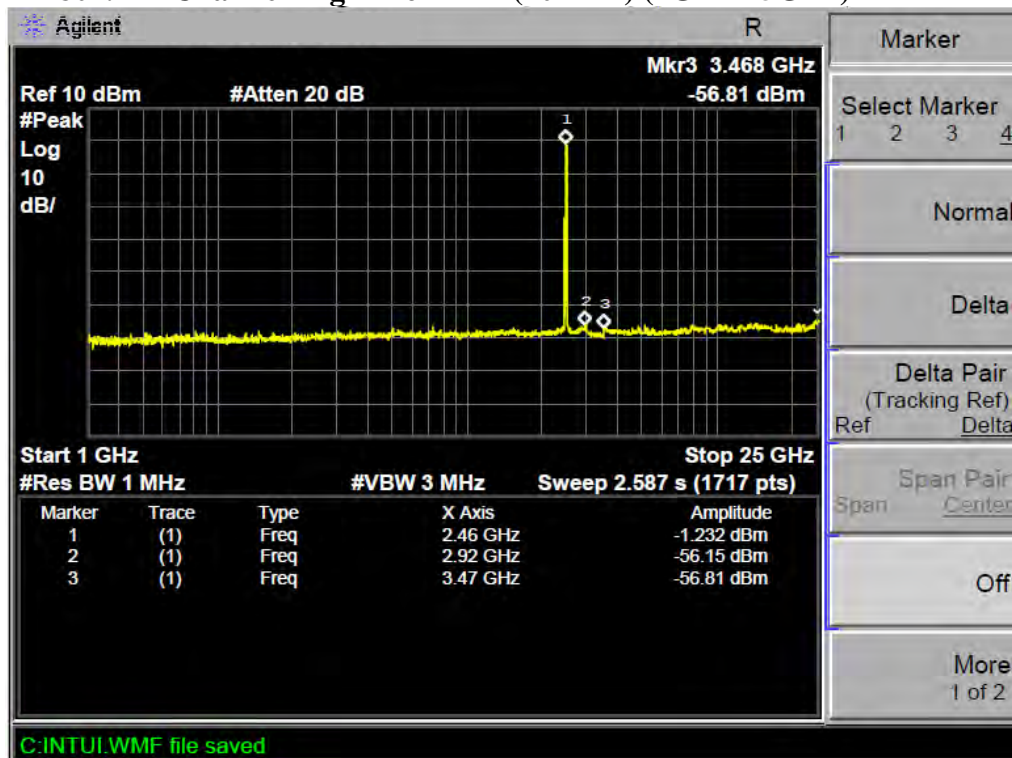


**TX 802.11n Channel Low 2422MHz (40MHz) (30MHz-1GHz)**

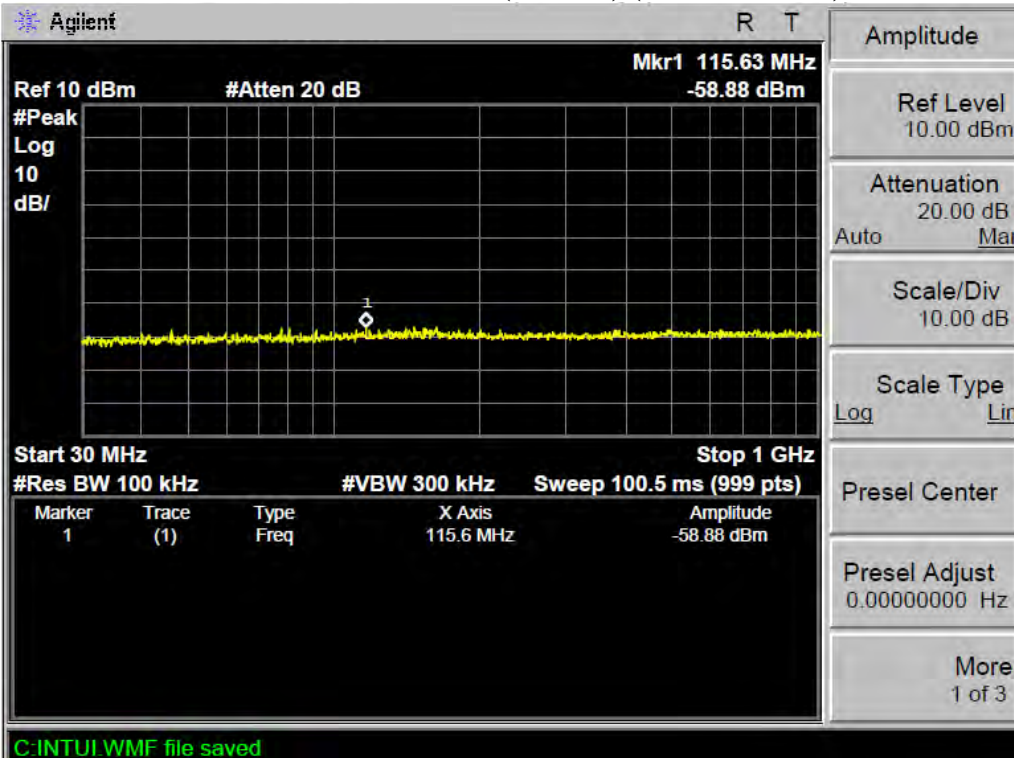


**TX 802.11n Channel Low 2422MHz (40MHz) (1GHz-25GHz)**

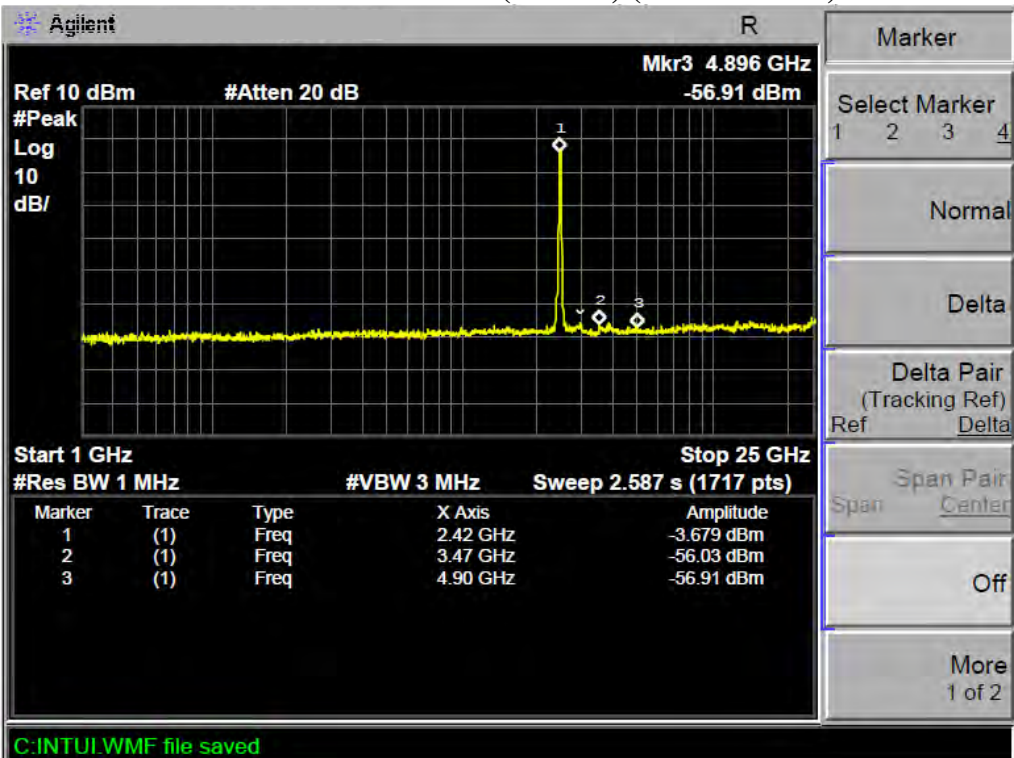


**TX 802.11n Channel Middle 2437MHz (40MHz) (30MHz-1GHz)**

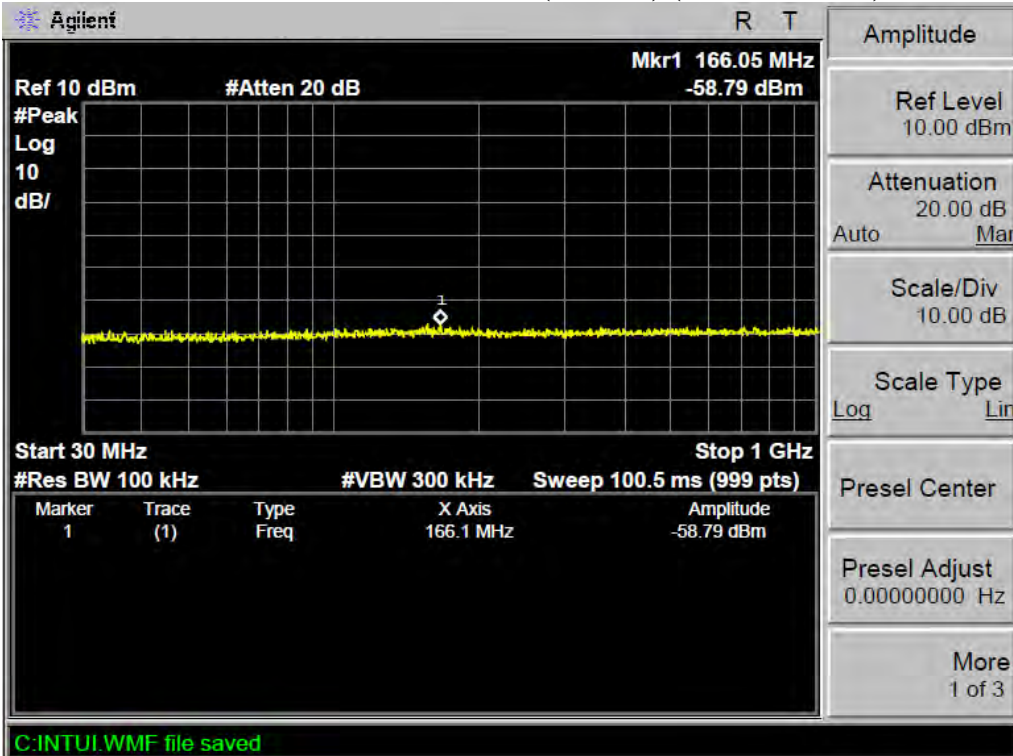


**TX 802.11n Channel Middle 2437MHz (40MHz) (1GHz-25GHz)**

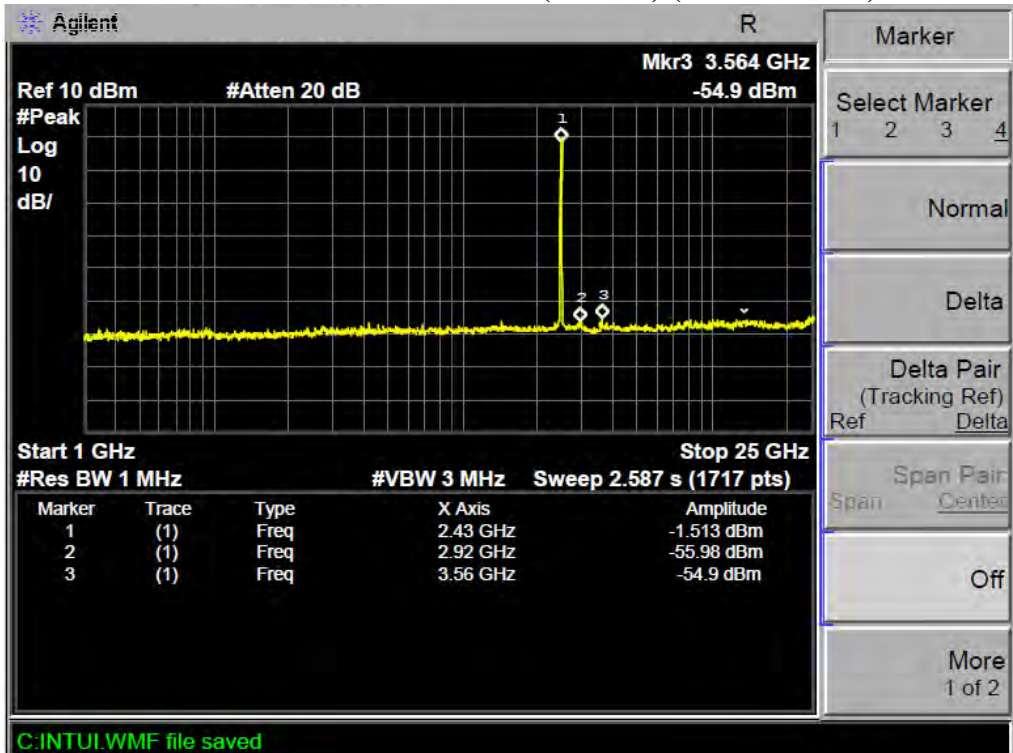

**TX 802.11n Channel High 2452MHz (40MHz) (30MHz-1GHz)**

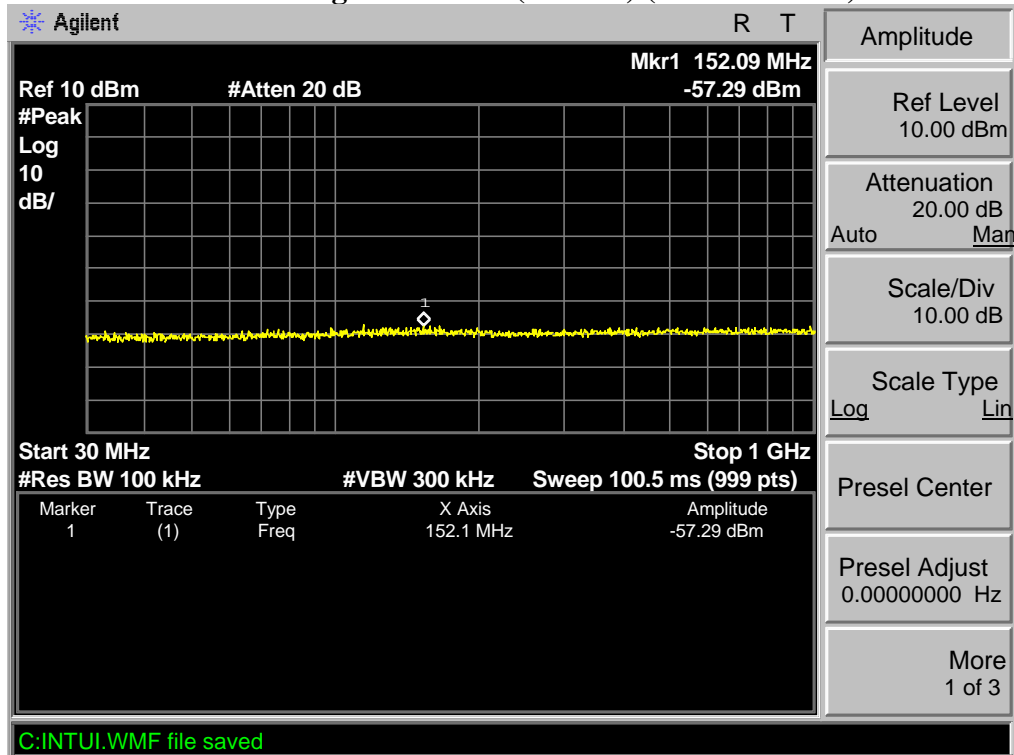

**TX 802.11n Channel High 2452MHz (40MHz) (1GHz-25GHz)**

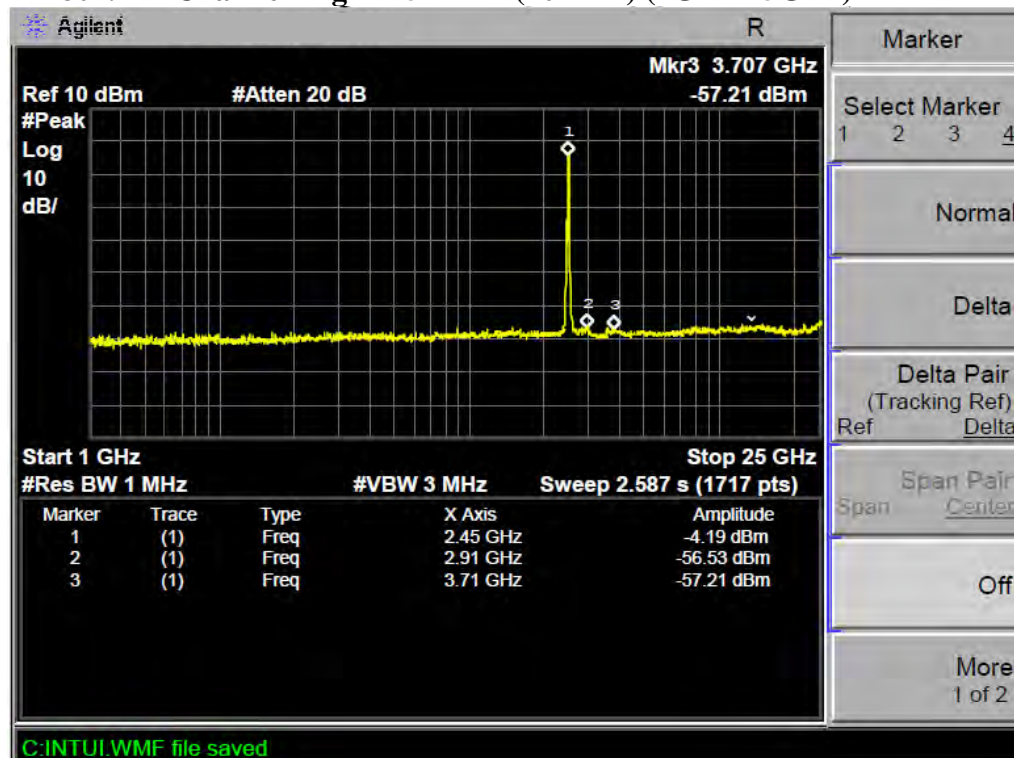


# 11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


## 15 SECTION 15.207(A)

### 11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

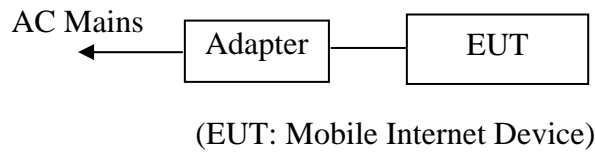

11.1.2.Shielding Room Test Setup Diagram

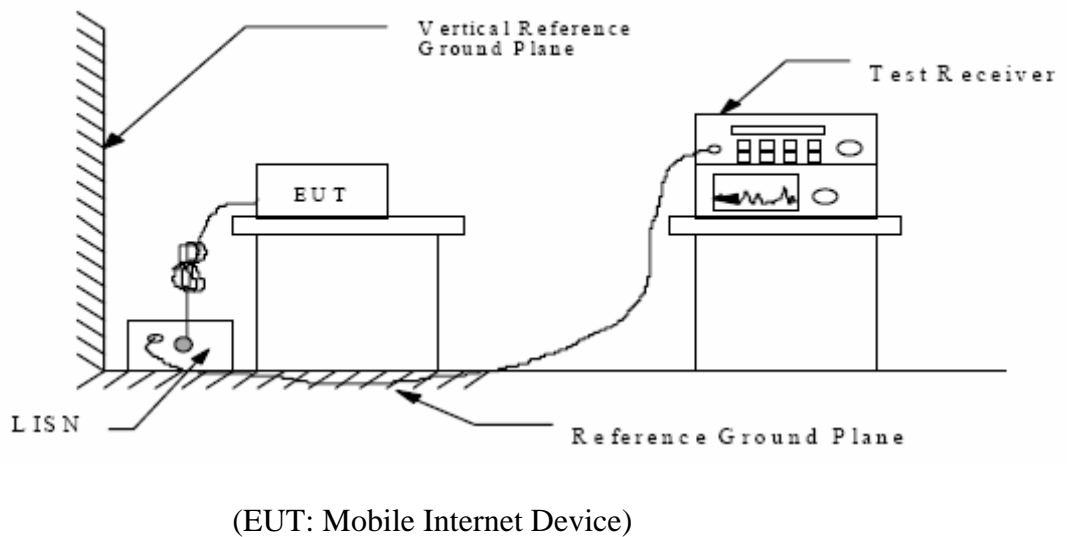

### 11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

\* Decreases with the logarithm of the frequency.



### 11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 11.3.1.Mobile Internet Device (EUT)

Model Number : DS975  
Serial Number : N/A  
Manufacturer : Pipo Technology Co., Ltd.

### 11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in (Charging & Tx) mode measure it.

### 11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

## 11.6. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>August 31, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mobile Internet Device</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS975</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>Charging &amp; Tx</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.613500	32.70	56	-23.3	QP	Neutral
1.563000	34.10	56	-21.9	QP	
12.646500	47.00	60	-13.0	QP	
12.574500	42.30	50	-7.7	AV	
12.579000	45.20	50	-4.8	AV	
12.849000	44.20	50	-5.8	AV	
0.613500	32.70	56	-23.3	QP	Live
1.356000	35.30	56	-20.7	QP	
12.763500	47.20	60	-12.8	QP	
1.356000	30.70	46	-15.3	AV	
12.493500	45.80	50	-4.2	AV	
12.768000	47.30	50	-2.7	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.  
The spectral diagrams are attached as below.


**ACCURATE TECHNOLOGY CO.,LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Mobile internet device M/N:DS975  
 Manufacturer: Pipo  
 Operating Condition: Charging & Tx  
 Test Site: 1#Shielding Room  
 Operator: Bob  
 Test Specification: L 120V/60Hz  
 Comment: Mains port  
 Report No.:ATE20121929

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

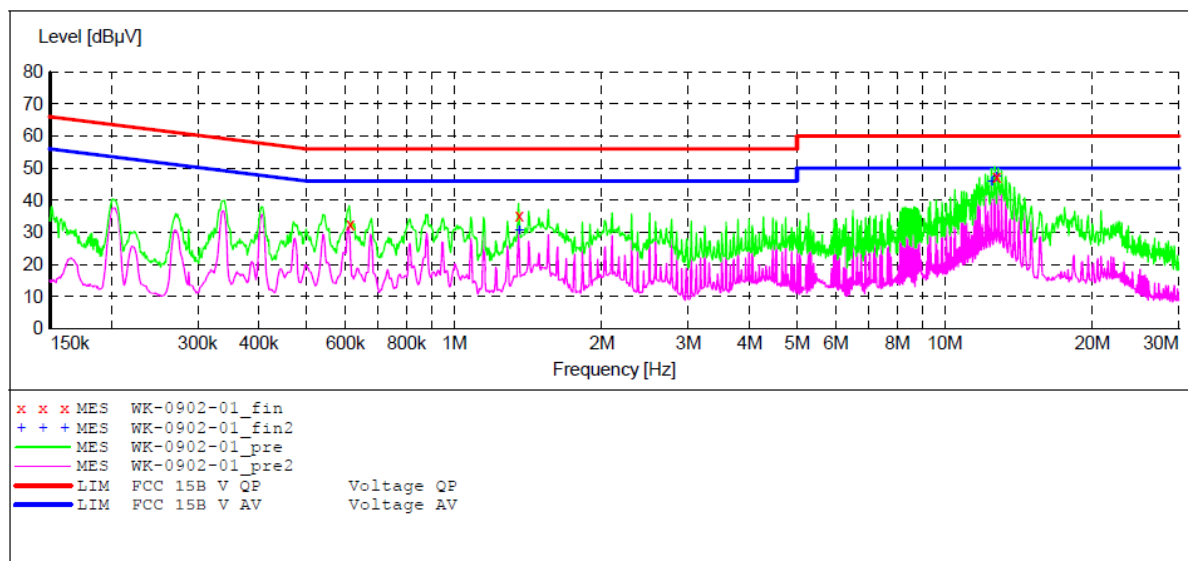

**MEASUREMENT RESULT: "WK-0902-01\_fin"**

8/31/2012 10:16AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.613500	32.70	12.0	56	23.3	QP	L1	GND
1.356000	35.30	11.8	56	20.7	QP	L1	GND
12.763500	47.20	11.2	60	12.8	QP	L1	GND

**MEASUREMENT RESULT: "WK-0902-01\_fin2"**

8/31/2012 10:16AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.356000	30.70	11.8	46	15.3	AV	L1	GND
12.493500	45.80	11.2	50	4.2	AV	L1	GND
12.768000	47.30	11.2	50	2.7	AV	L1	GND


**ACCURATE TECHNOLOGY CO.,LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Mobile internet device M/N:DS975  
 Manufacturer: Pipo  
 Operating Condition: Charging & Tx  
 Test Site: 1#Shielding Room  
 Operator: Bob  
 Test Specification: N 120V/60Hz  
 Comment: Mains port  
 Report No.:ATE20121929

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

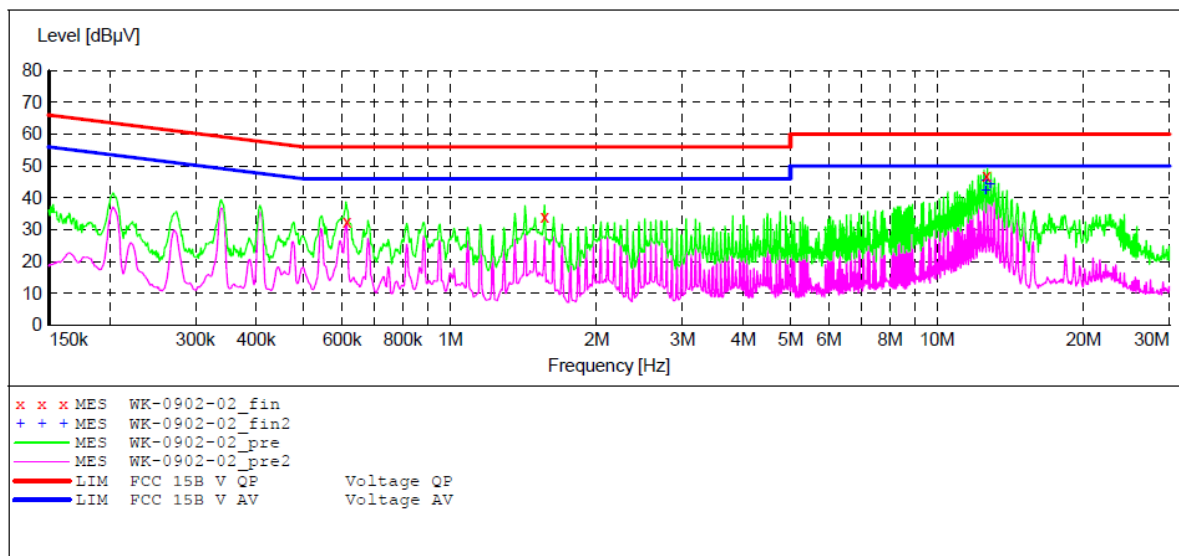

**MEASUREMENT RESULT: "WK-0902-02\_fin"**

8/31/2012 10:23AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.613500	32.70	12.0	56	23.3	QP	N	GND
1.563000	34.10	11.7	56	21.9	QP	N	GND
12.646500	47.00	11.2	60	13.0	QP	N	GND

**MEASUREMENT RESULT: "WK-0902-02\_fin2"**

8/31/2012 10:23AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
12.574500	42.30	11.2	50	7.7	AV	N	GND
12.579000	45.20	11.2	50	4.8	AV	N	GND
12.849000	44.20	11.2	50	5.8	AV	N	GND


## 12.ANTENNA REQUIREMENT

### 12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

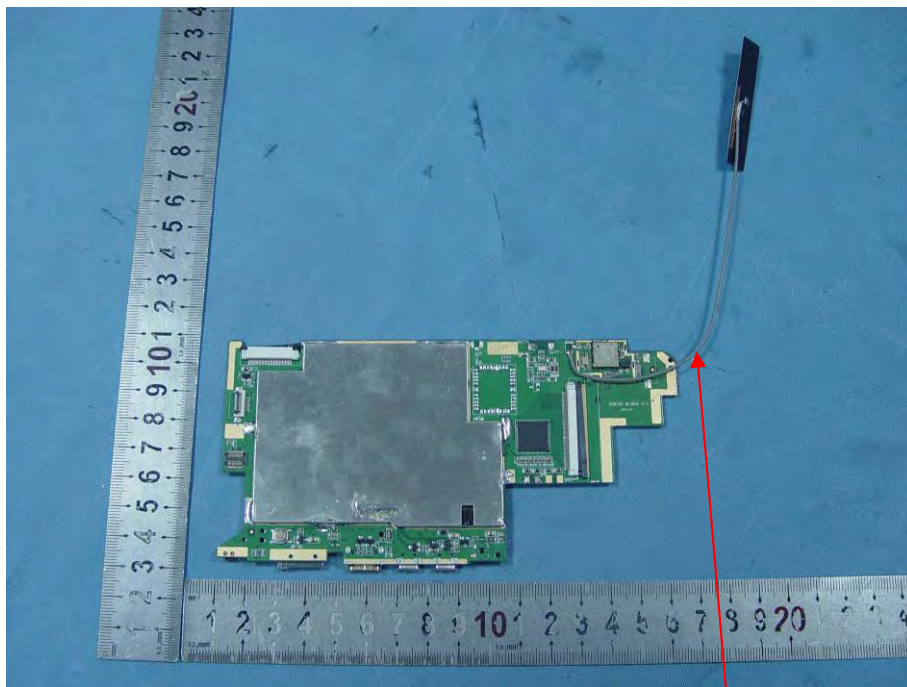

Antenna