




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2542	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/12/12
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

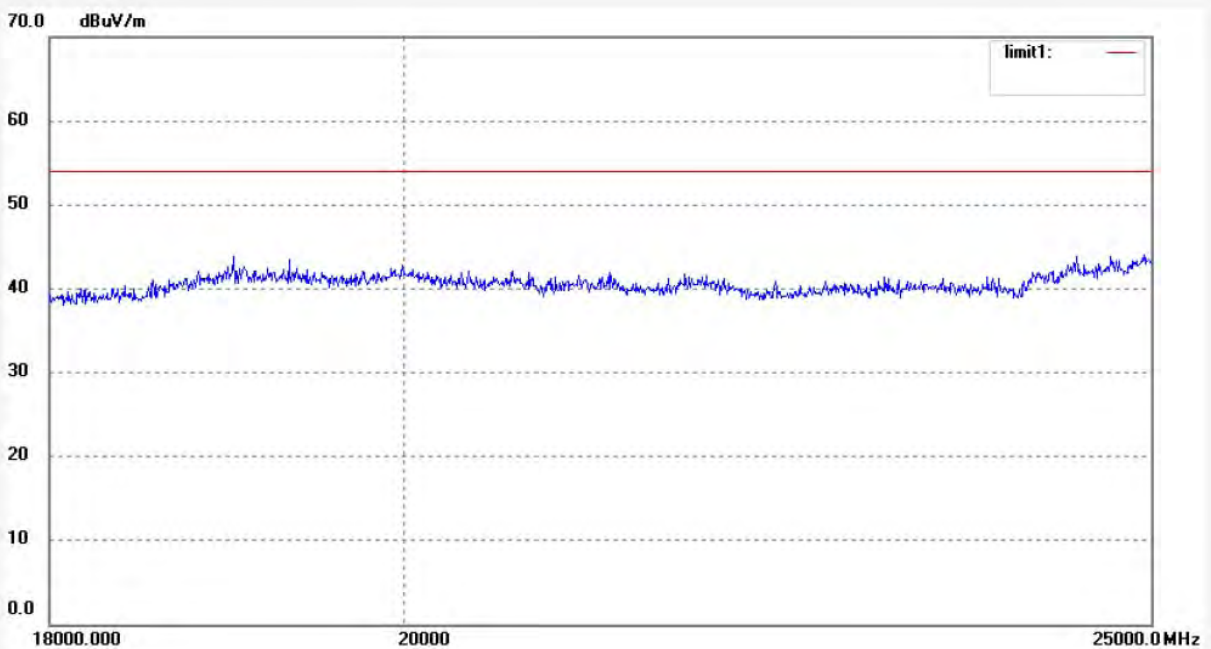

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2541	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/09/07
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

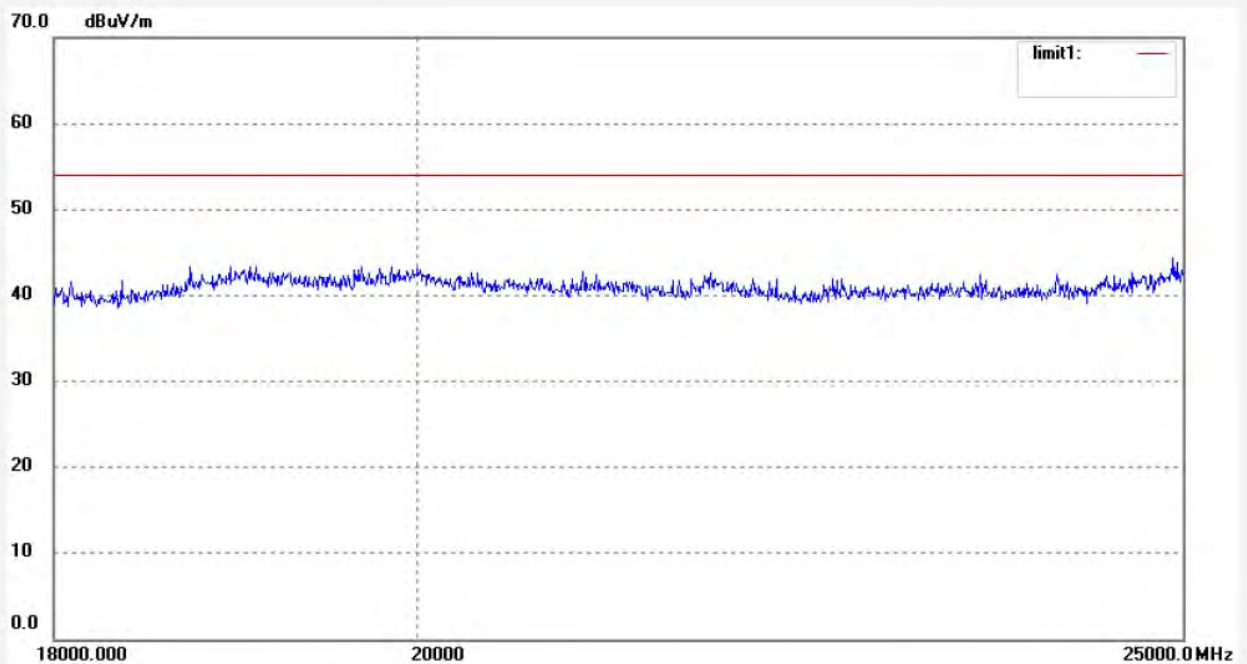

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2496	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/13/53
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

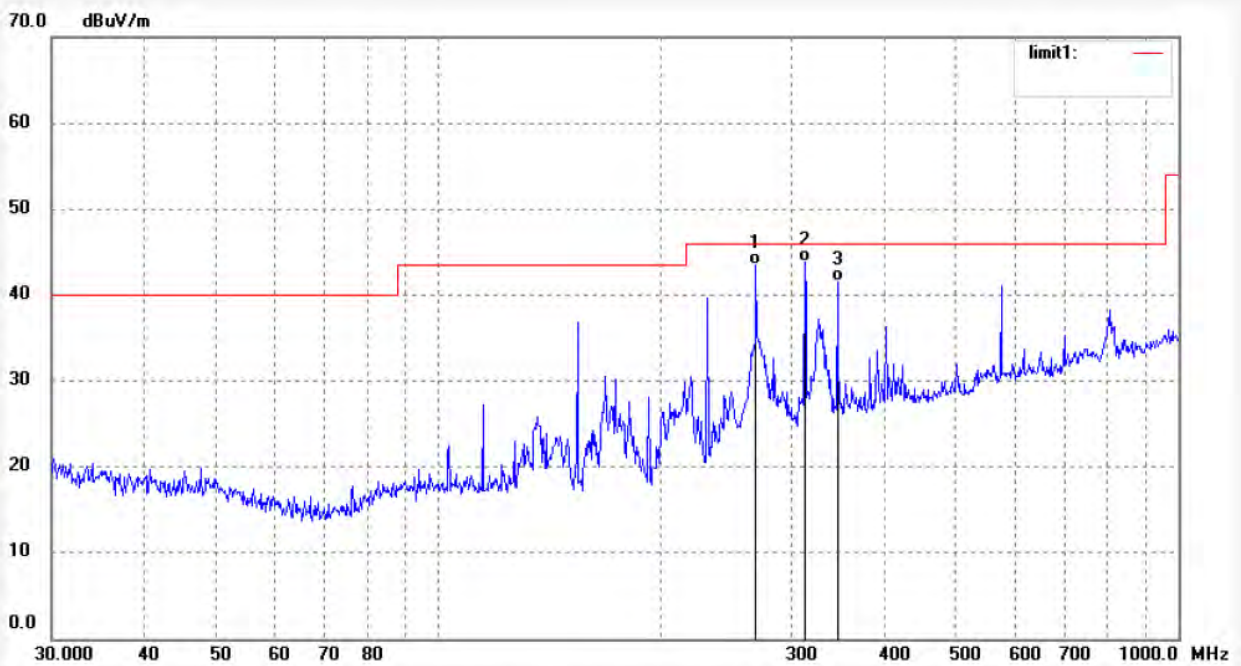

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	268.7212	25.14	18.32	43.46	46.00	-2.54	QP			
2	312.5482	24.78	19.13	43.91	46.00	-2.09	QP			
3	346.0740	21.20	20.37	41.57	46.00	-4.43	QP			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2495	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/09/58
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

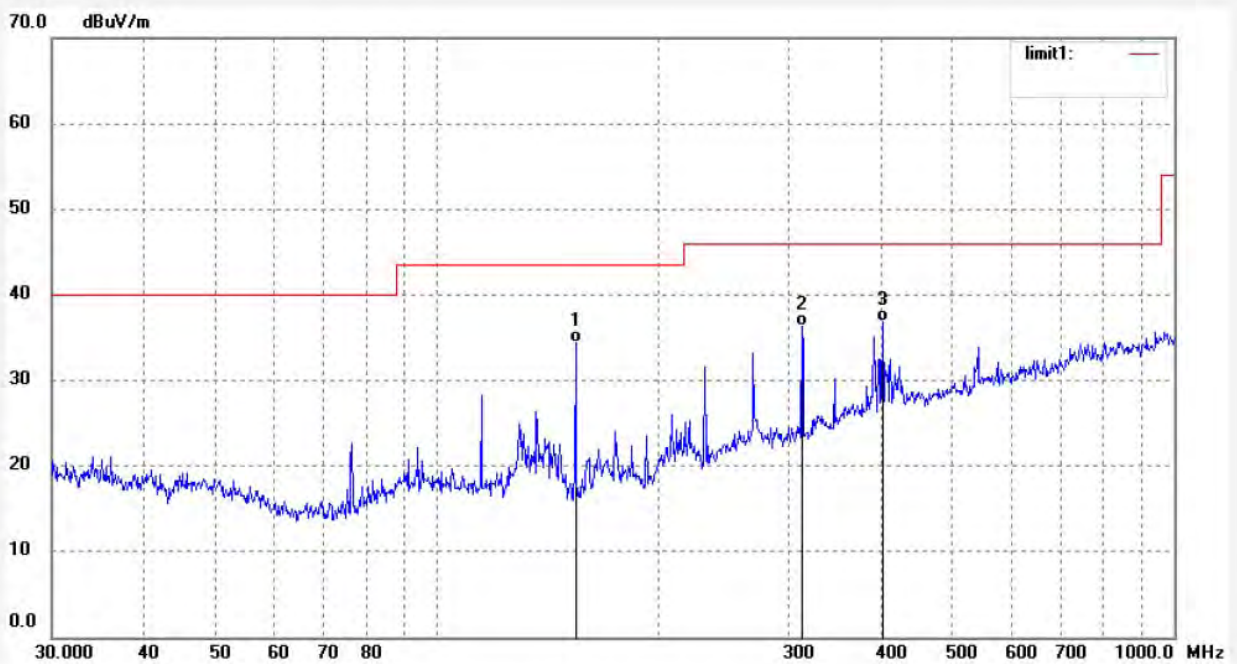

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2427	22.79	11.56	34.35	43.50	-9.15	QP			
2	312.5482	17.18	19.13	36.31	46.00	-9.69	QP			
3	402.5167	14.46	22.39	36.85	46.00	-9.15	QP			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2520  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 49 %  
EUT: Mobile internet device  
Mode: TX Channel 11(802.11g)  
Model: P804  
Manufacturer: Pipo

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 12/10/22/  
Time: 10/41/31  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20122384

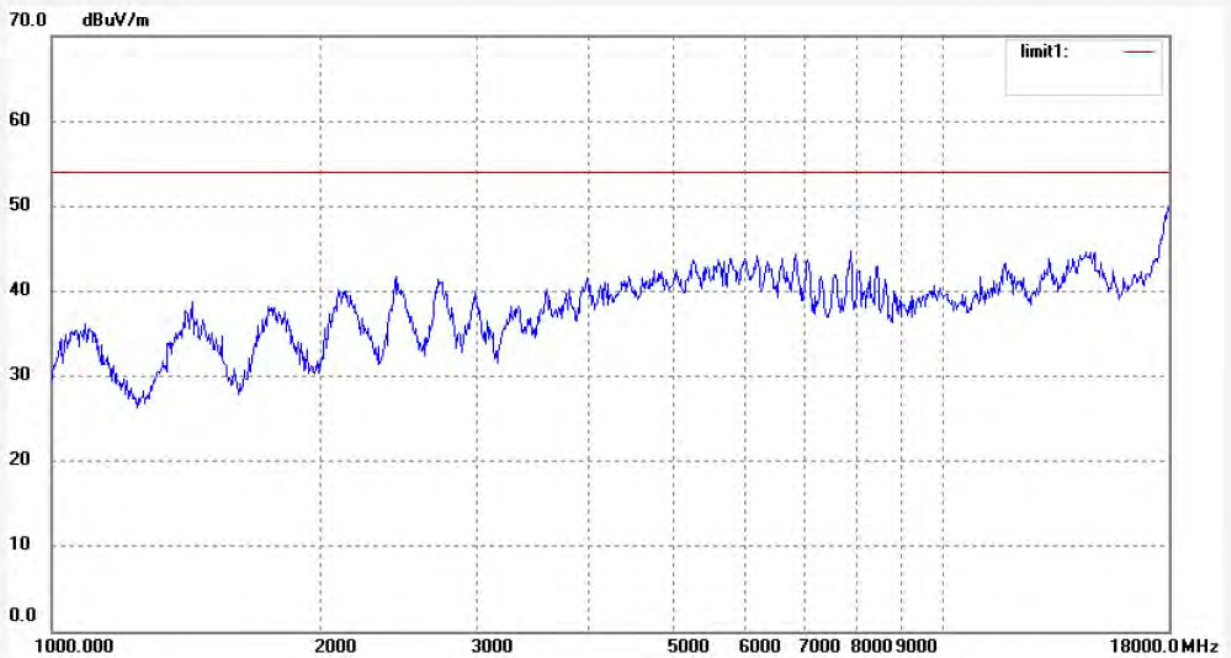

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2519	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 10/38/11
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

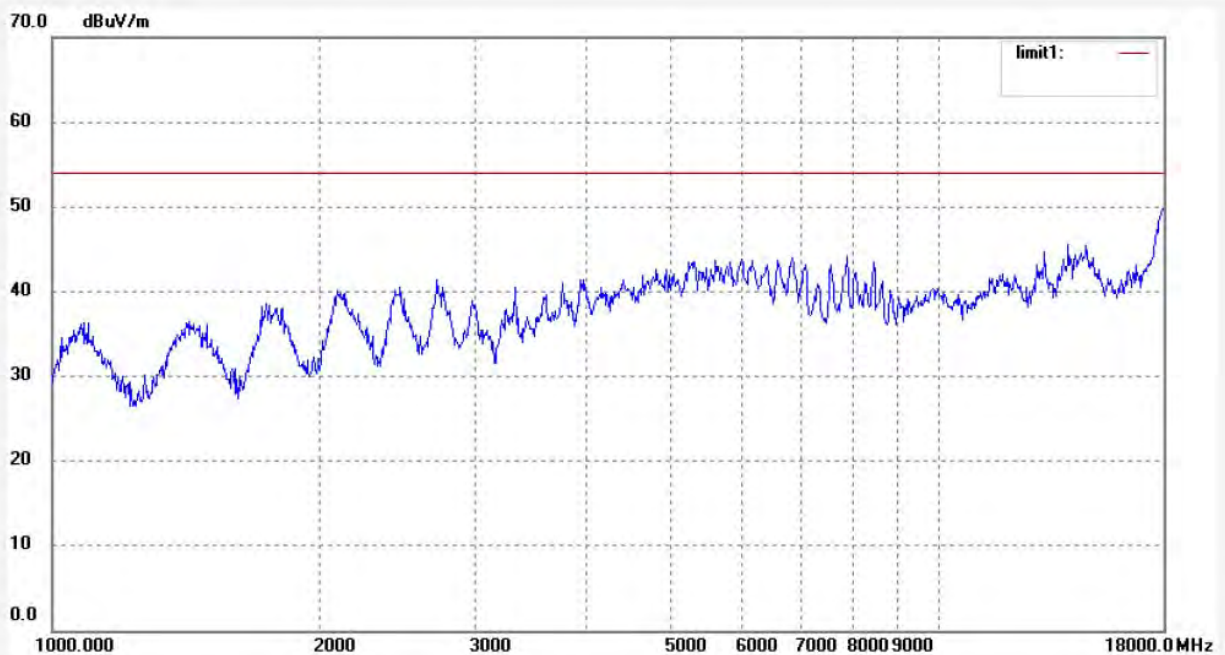

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2543	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/18/56
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

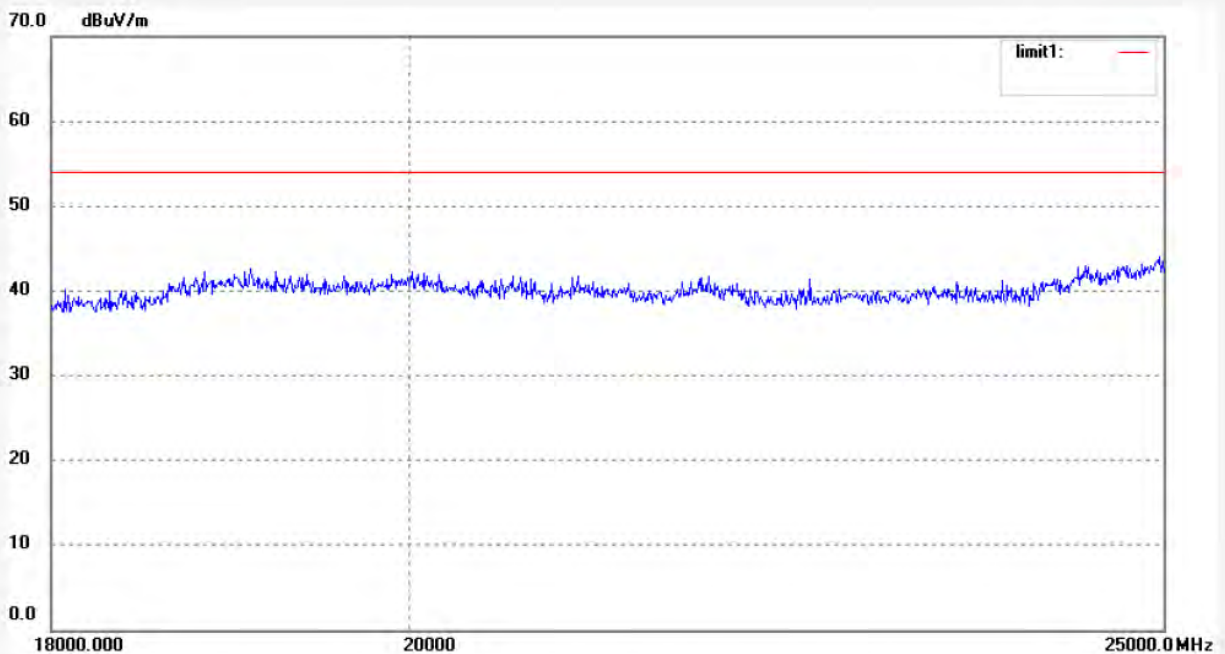

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2544	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/21/48
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

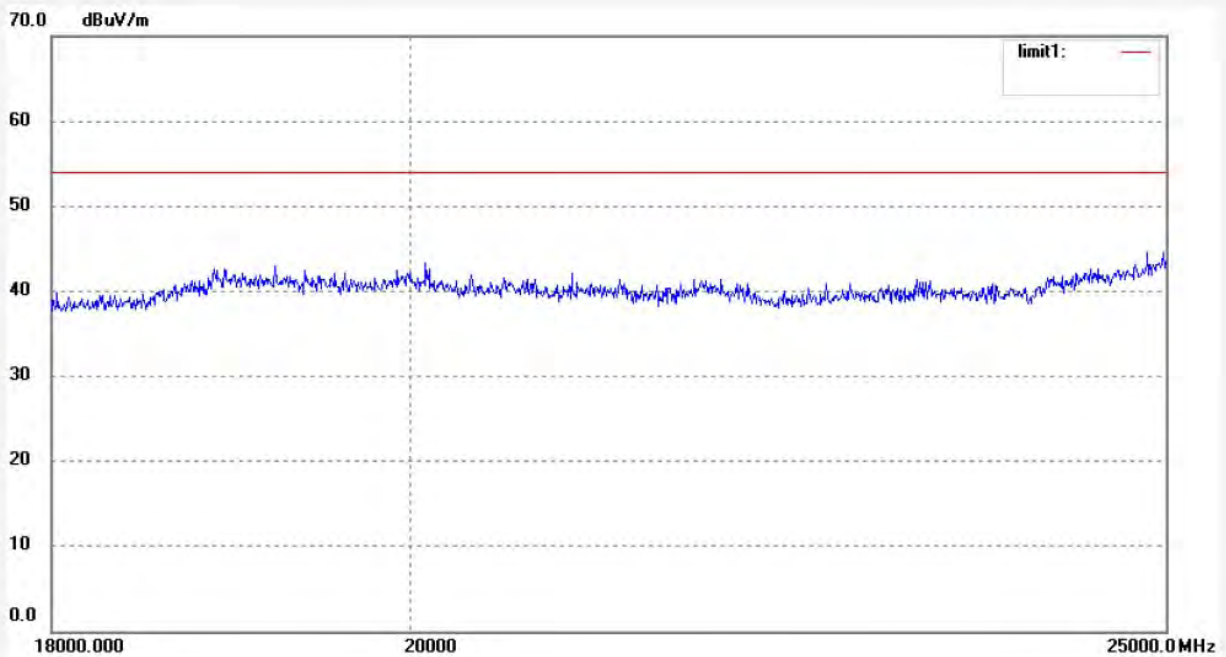

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2497	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/18/24
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

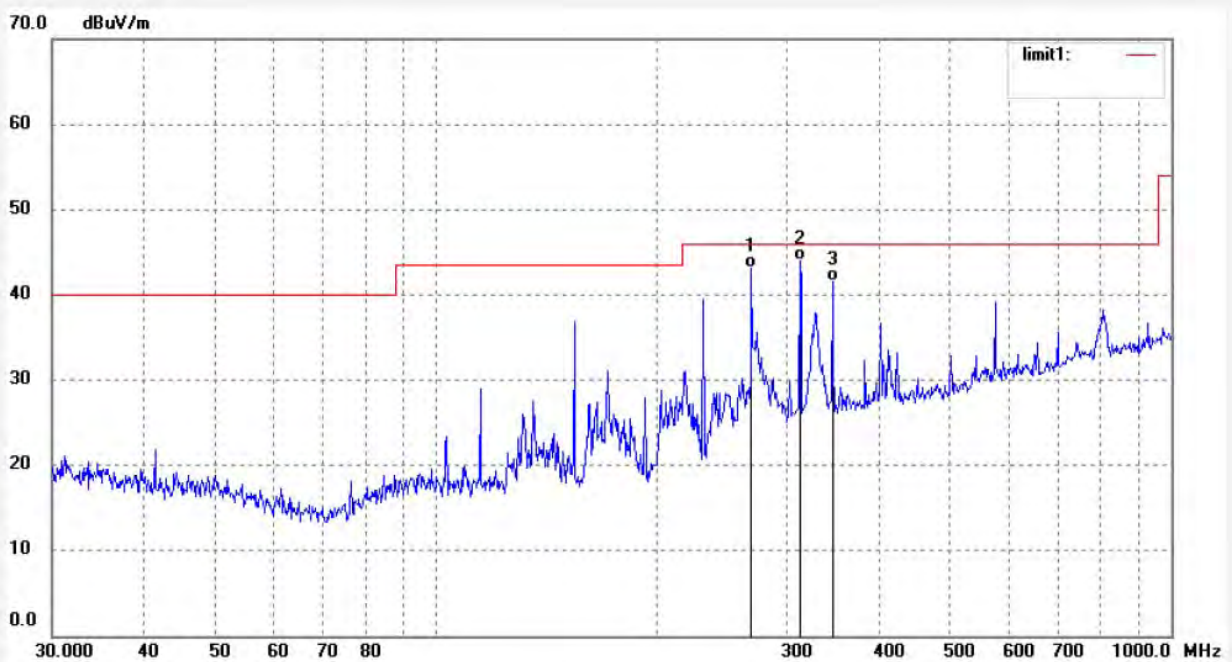

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	268.7212	24.89	18.32	43.21	46.00	-2.79	QP			
2	312.5482	24.87	19.13	44.00	46.00	-2.00	QP			
3	346.0740	21.20	20.37	41.57	46.00	-4.43	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2498	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/21/23
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

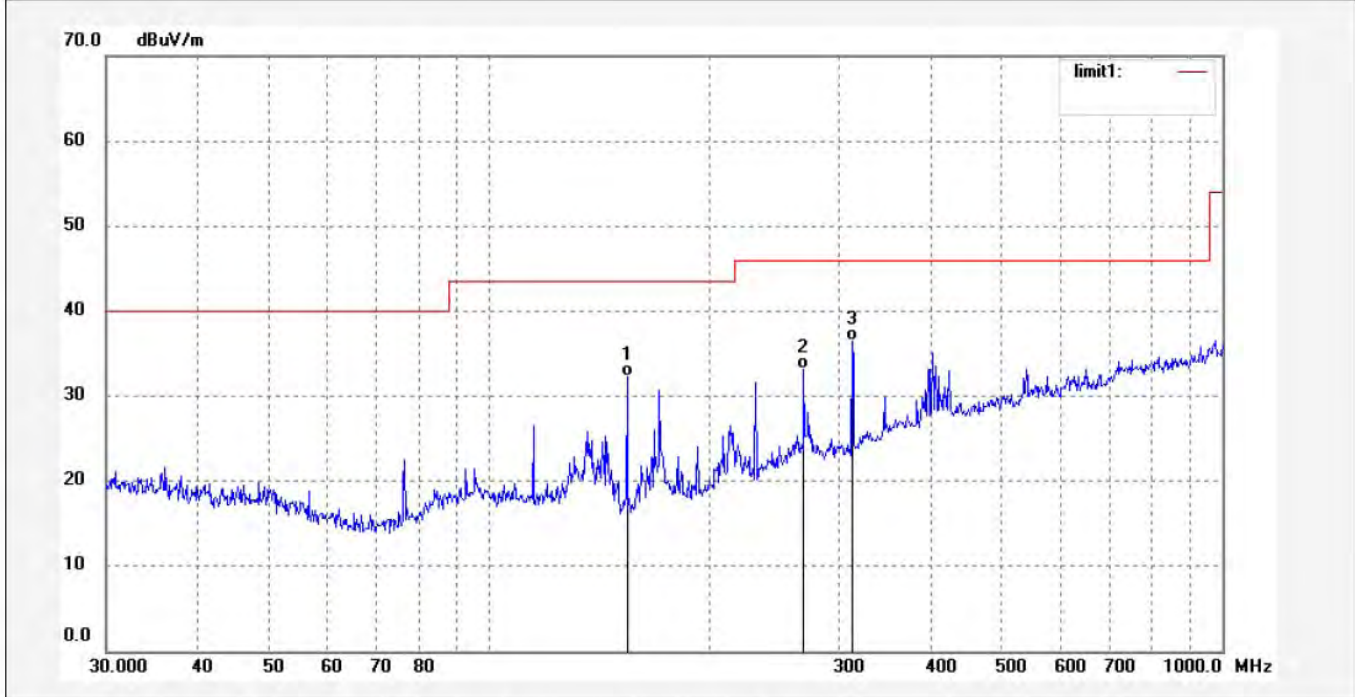

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2428	20.65	11.56	32.21	43.50	-11.29	QP			
2	268.7212	14.78	18.32	33.10	46.00	-12.90	QP			
3	312.5482	17.32	19.13	36.45	46.00	-9.55	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2521	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 10/45/24
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

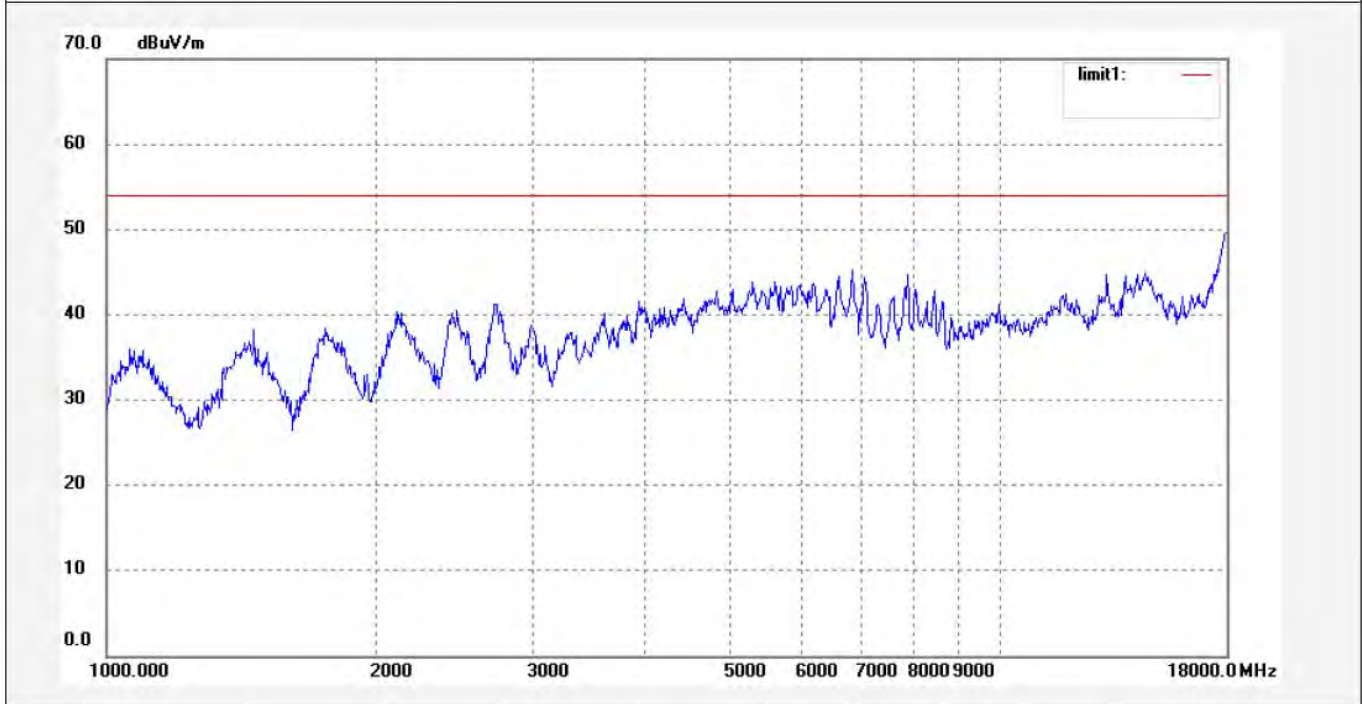

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2522	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 10/48/28
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

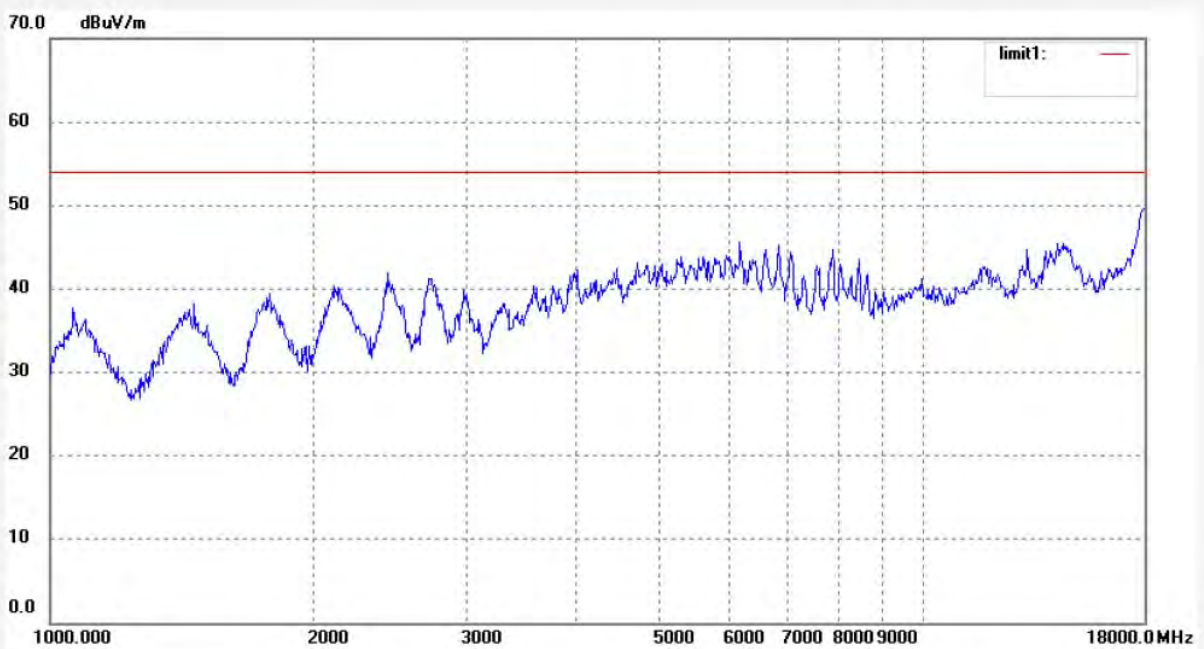

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2546  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 49 %  
EUT: Mobile internet device  
Mode: TX Channel 1(802.11n)  
Model: P804  
Manufacturer: Pipo

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 12/10/22/  
Time: 12/26/14  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20122384

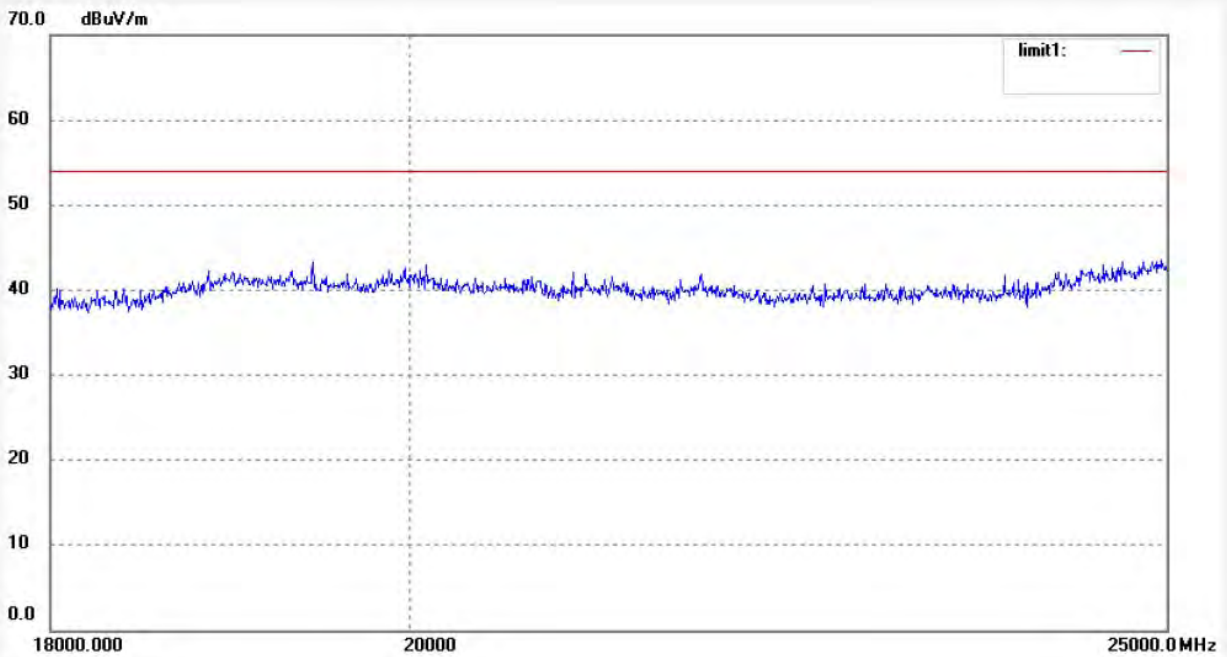

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2545	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/24/29
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

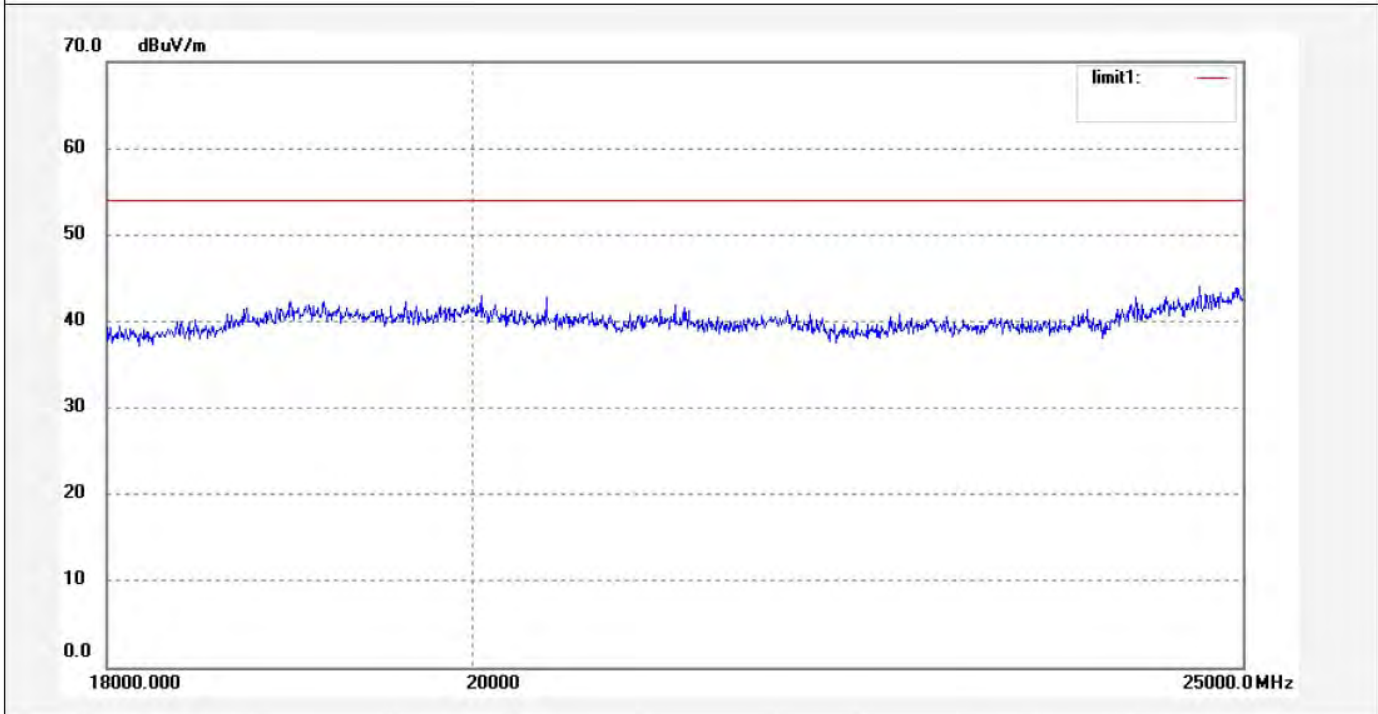

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2500	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/29/57
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

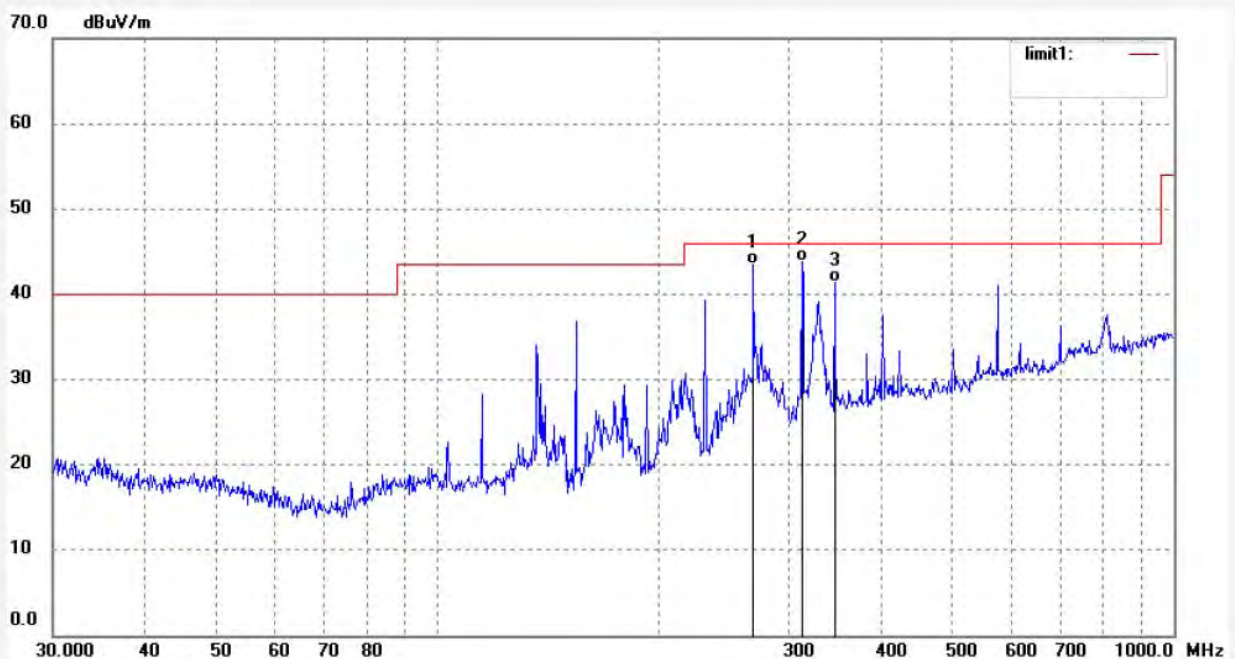

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	268.7212	25.14	18.32	43.46	46.00	-2.54	QP			
2	312.5482	24.78	19.13	43.91	46.00	-2.09	QP			
3	346.0740	20.95	20.37	41.32	46.00	-4.68	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2499	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/25/04
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

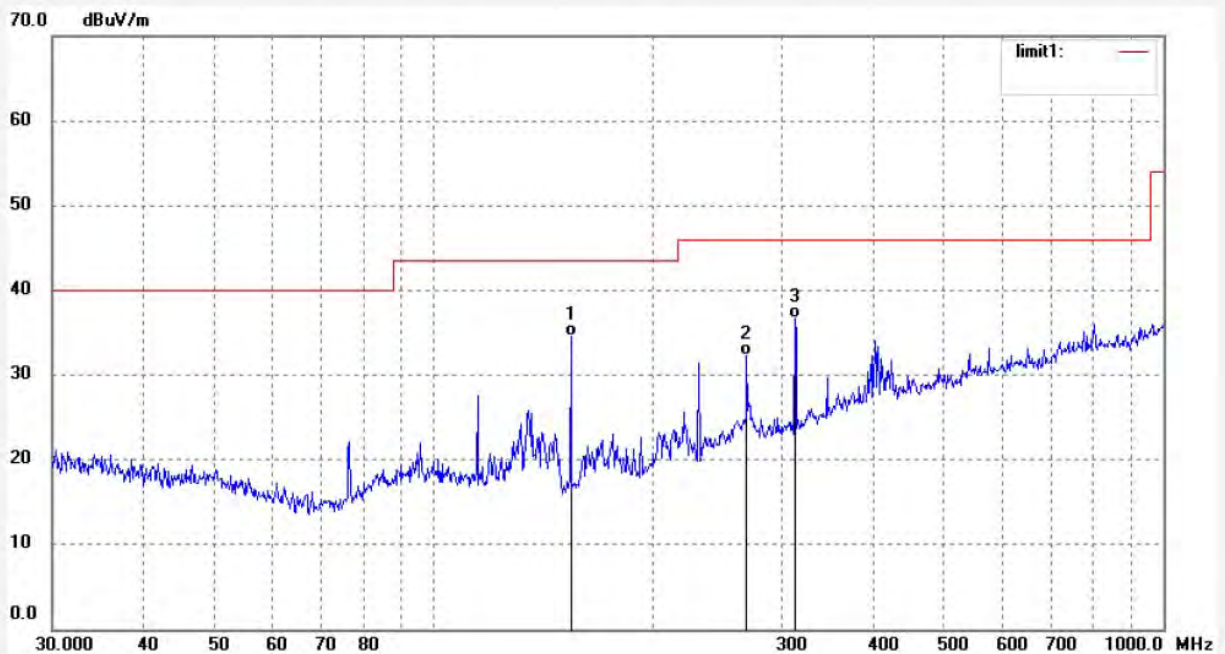

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2427	22.93	11.56	34.49	43.50	-9.01	QP			
2	268.7212	14.03	18.32	32.35	46.00	-13.65	QP			
3	312.5482	17.56	19.13	36.69	46.00	-9.31	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2524	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 10/58/44
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

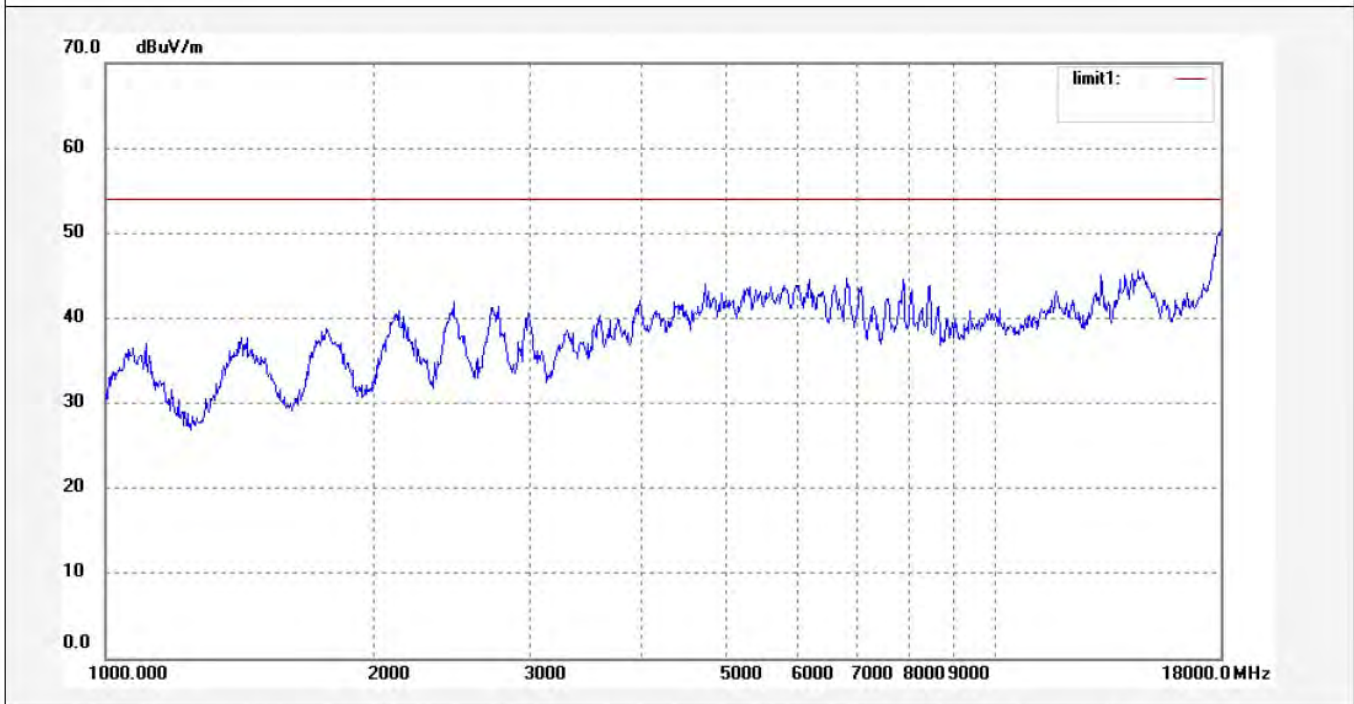

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2523	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 10/51/47
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

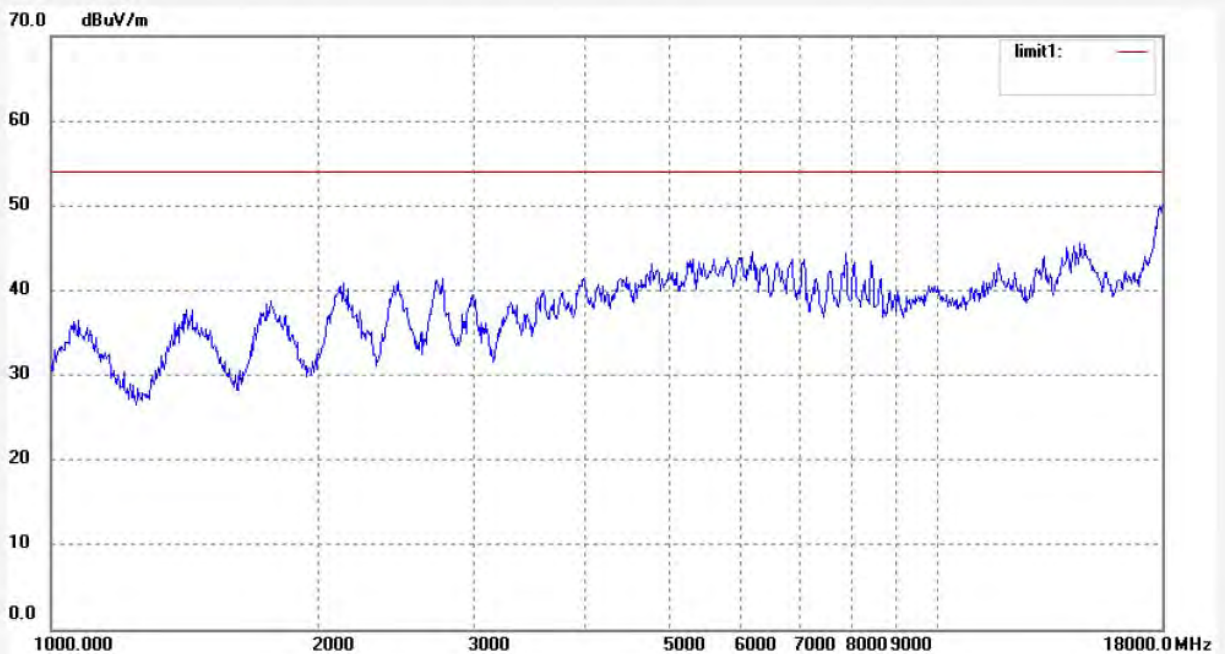

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2547	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/30/57
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

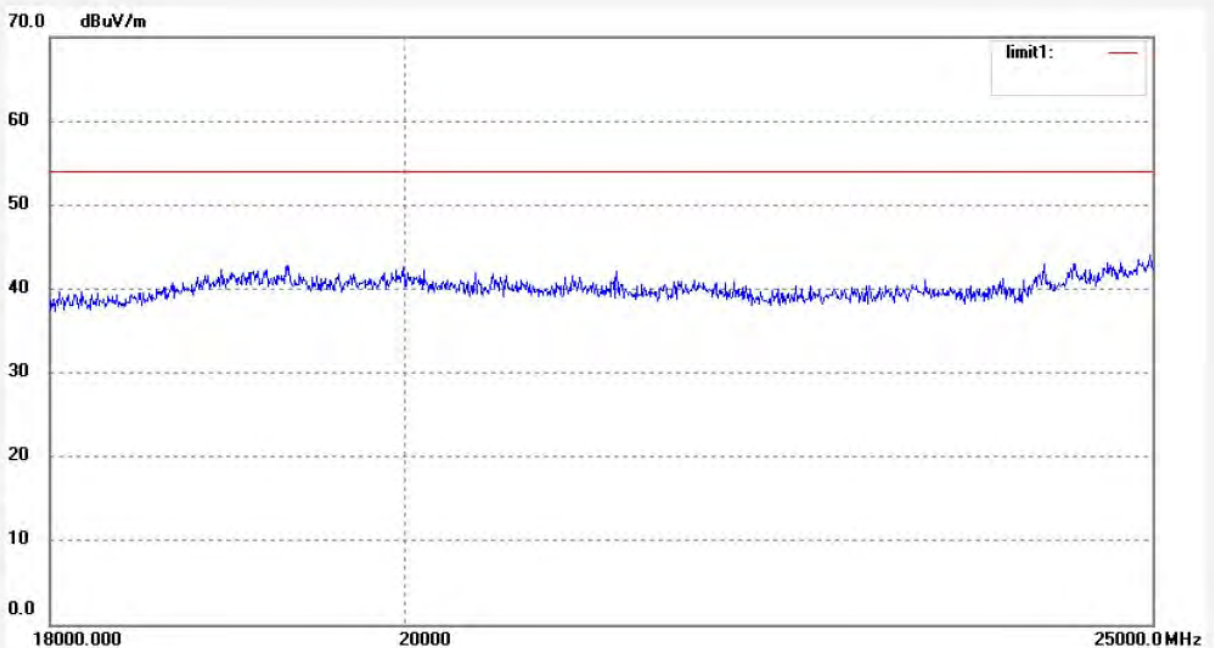

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2548	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/34/06
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

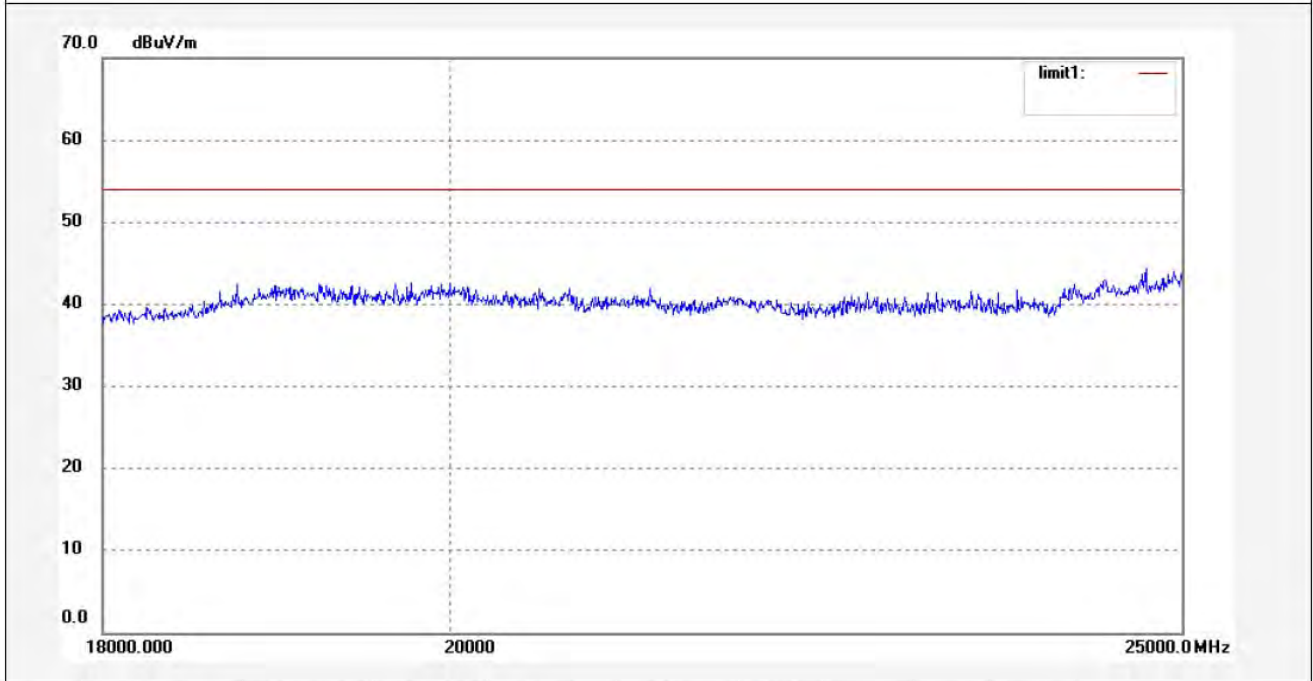

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2501	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/30/54
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

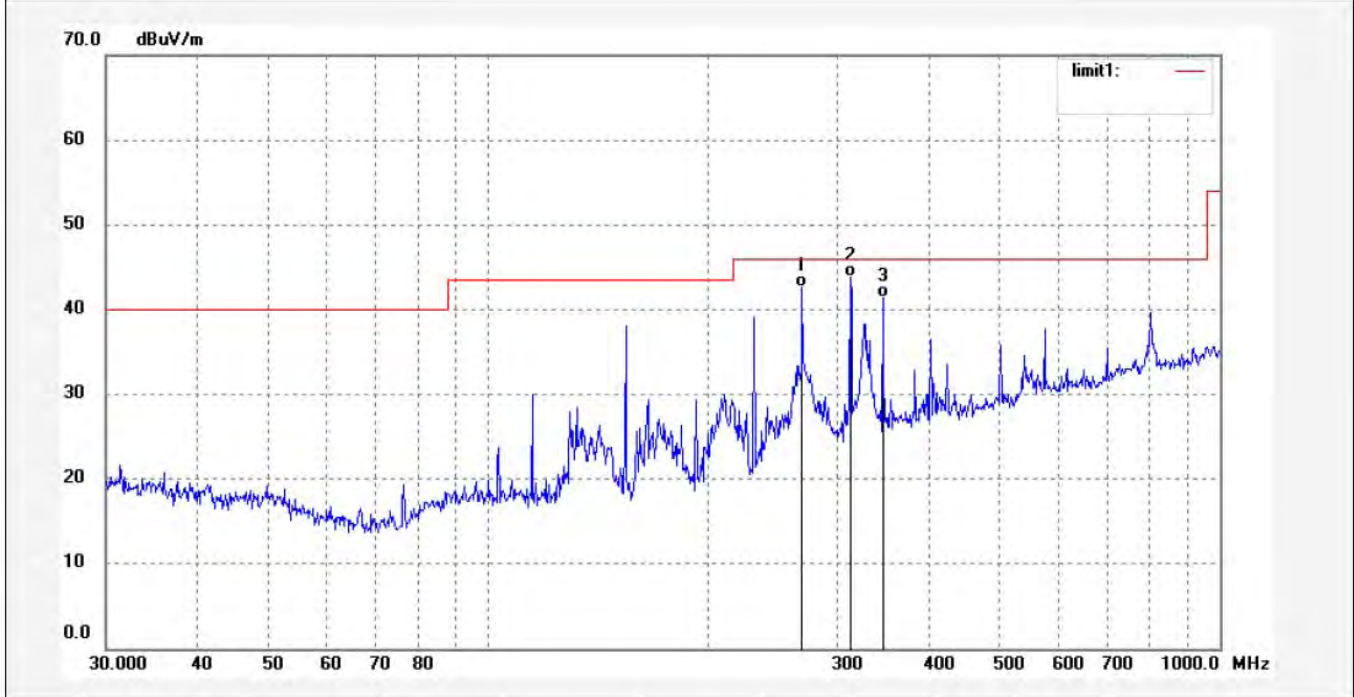

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	268.7212	24.32	18.32	42.64	46.00	-3.36	QP			
2	312.5482	24.79	19.13	43.92	46.00	-2.08	QP			
3	346.0740	21.02	20.37	41.39	46.00	-4.61	QP			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2502  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 49 %  
EUT: Mobile internet device  
Mode: TX Channel 11(802.11n)  
Model: P804  
Manufacturer: Pipo

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 12/10/22/  
Time: 9/33/31  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20122384

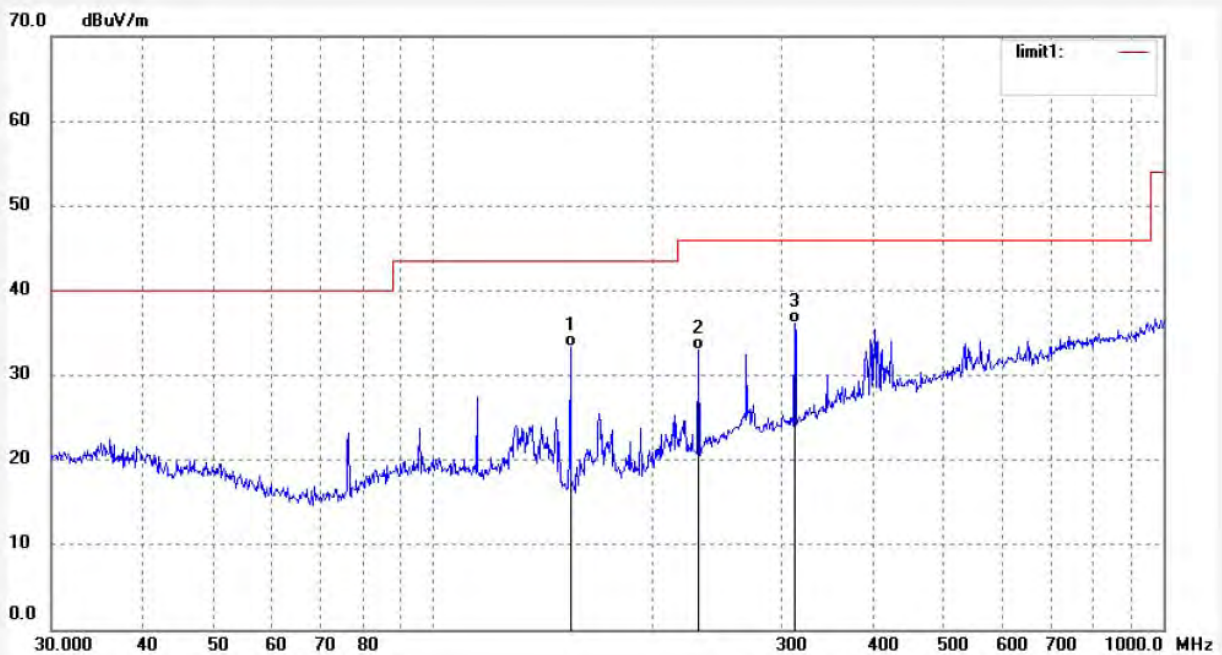

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2428	21.79	11.56	33.35	43.50	-10.15	QP			
2	231.0399	16.98	16.05	33.03	46.00	-12.97	QP			
3	312.5482	17.03	19.13	36.16	46.00	-9.84	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2525	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/02/35
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

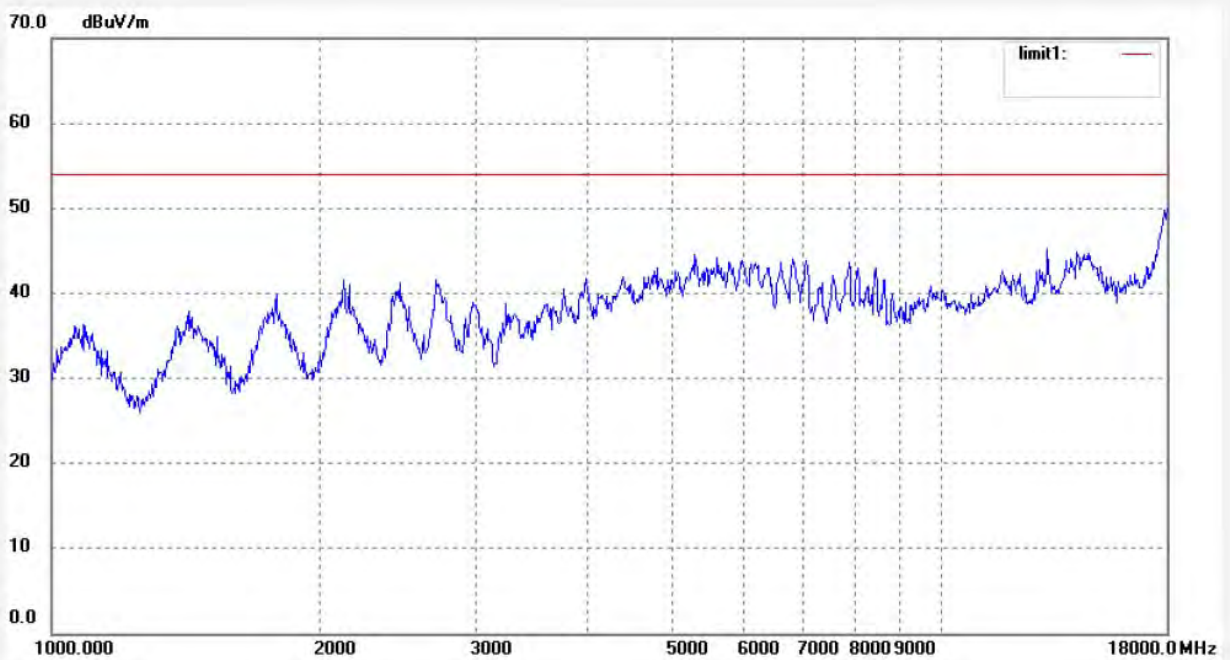

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------





**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2526  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 49 %  
EUT: Mobile internet device  
Mode: TX Channel 11(802.11n)  
Model: P804  
Manufacturer: Pipo

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 12/10/22/  
Time: 11/08/05  
Engineer Signature:  
Distance: 3m

Note: Report No.:ATE20122384

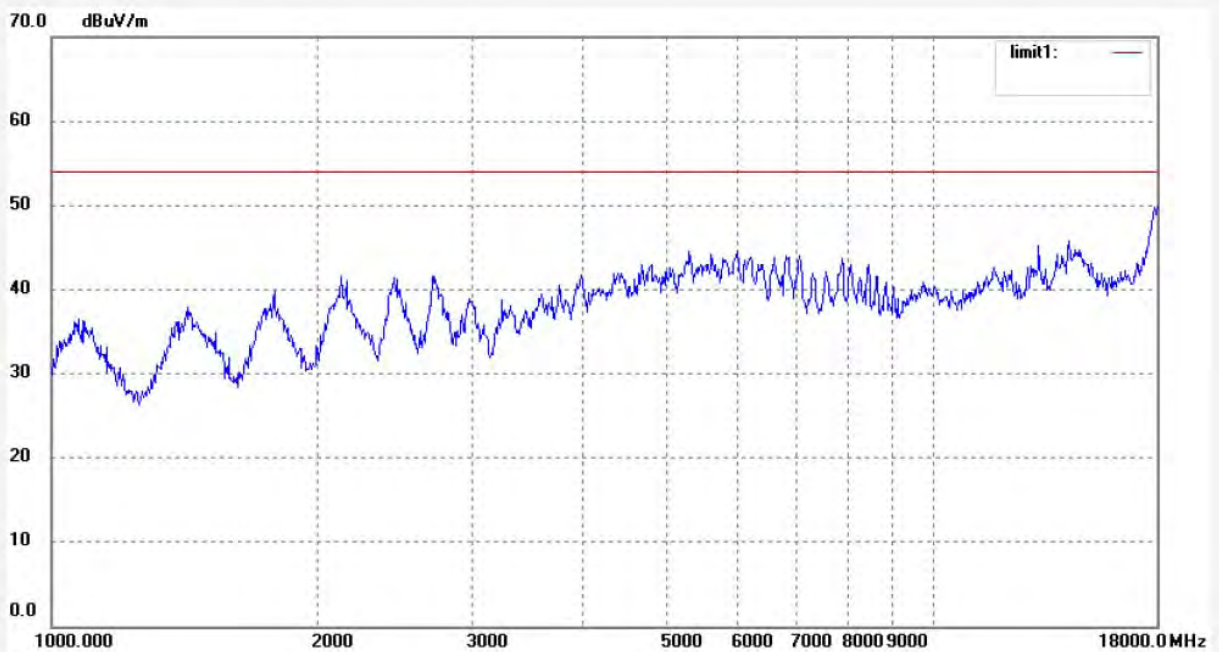

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2550	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/41/36
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

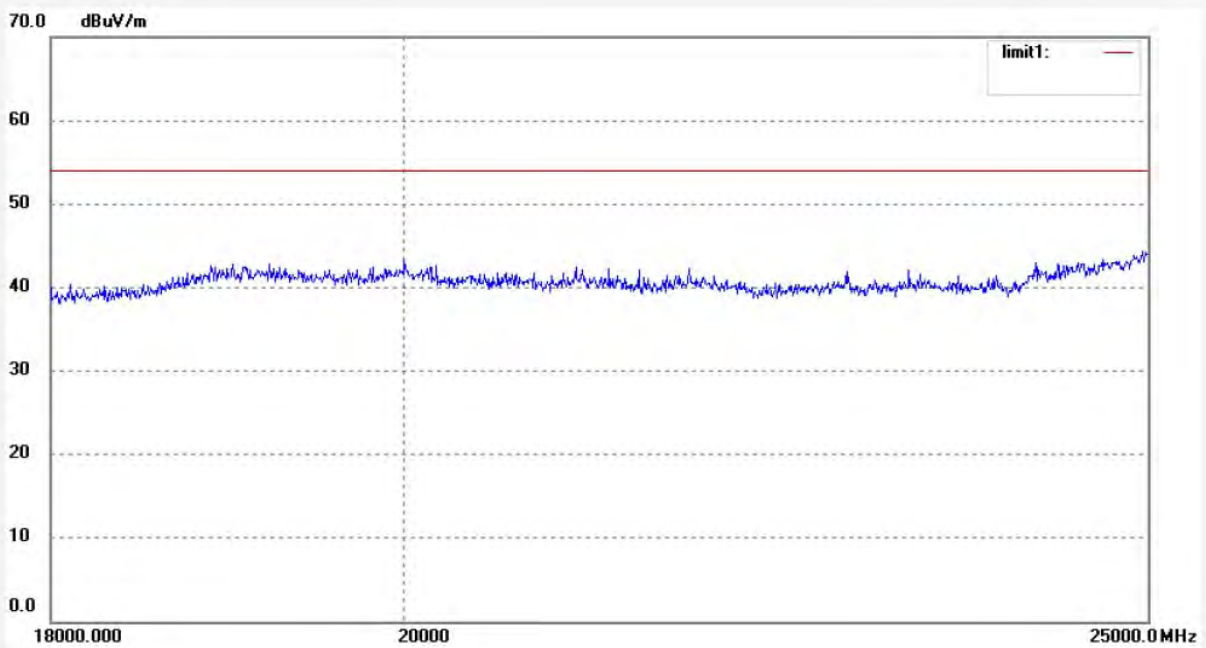

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2549	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/39/01
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

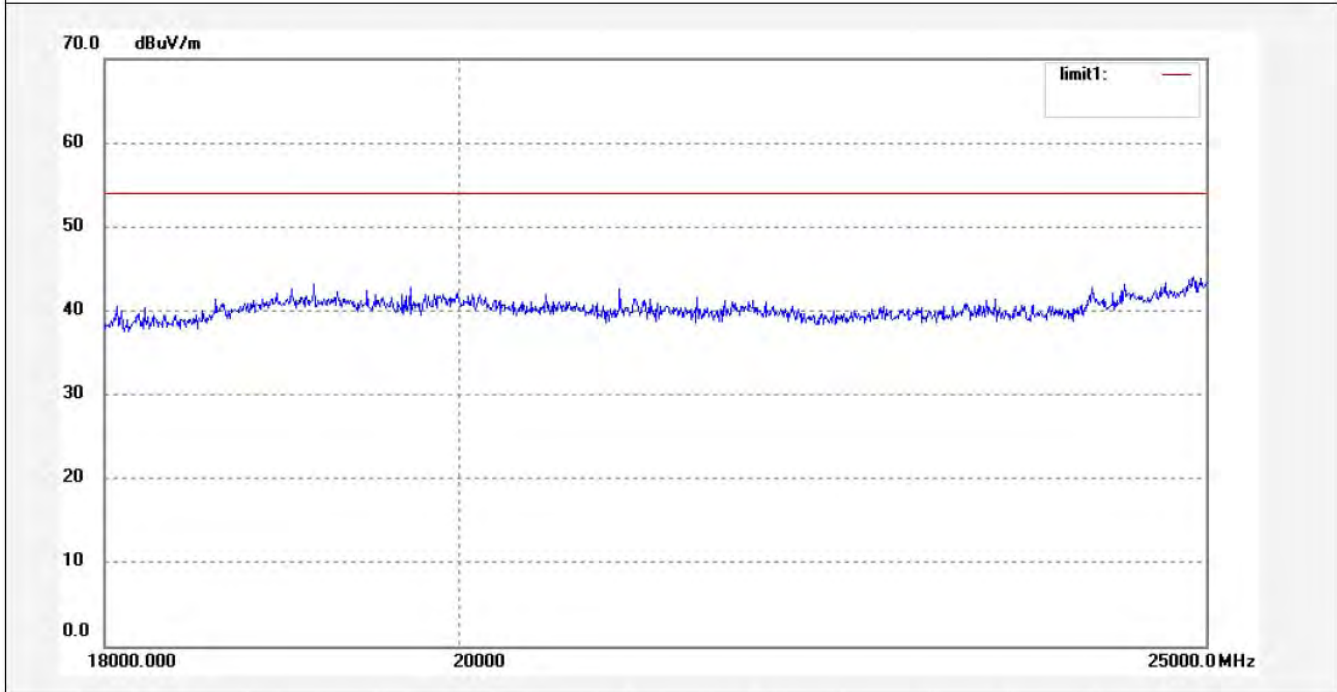

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2504	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/41/44
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

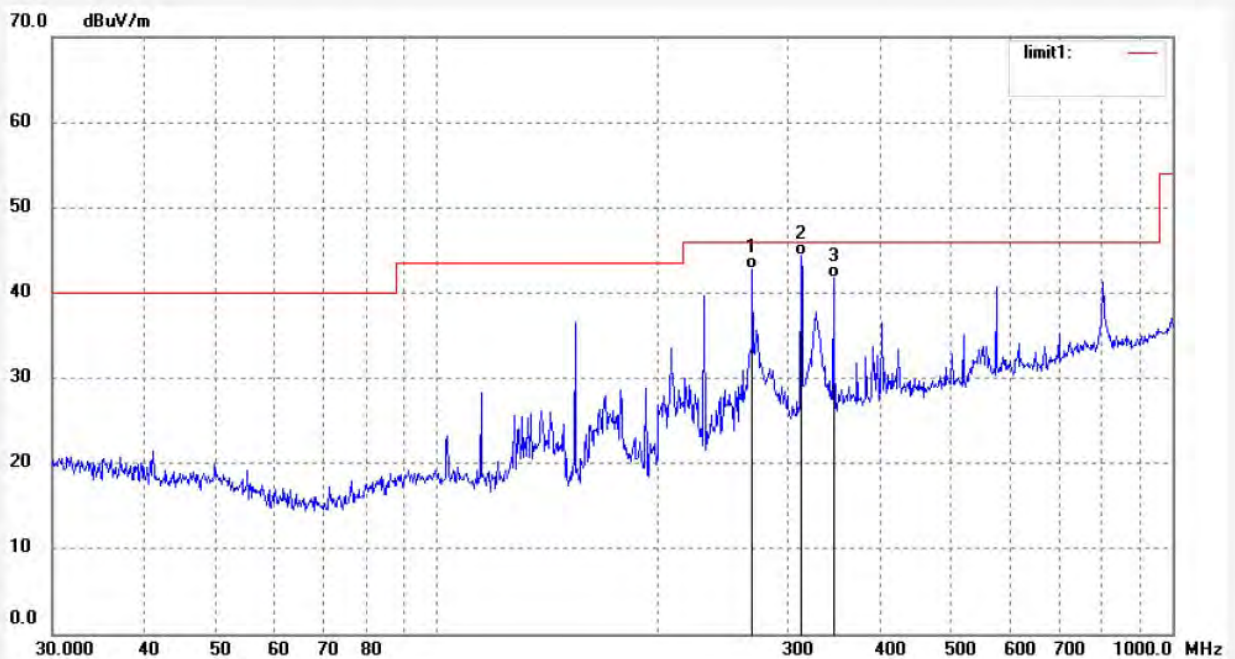

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	268.7212	24.49	18.32	42.81	46.00	-3.19	QP			
2	312.5482	25.31	19.13	44.44	46.00	-1.56	QP			
3	346.0740	21.38	20.37	41.75	46.00	-4.25	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2503	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/38/15
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

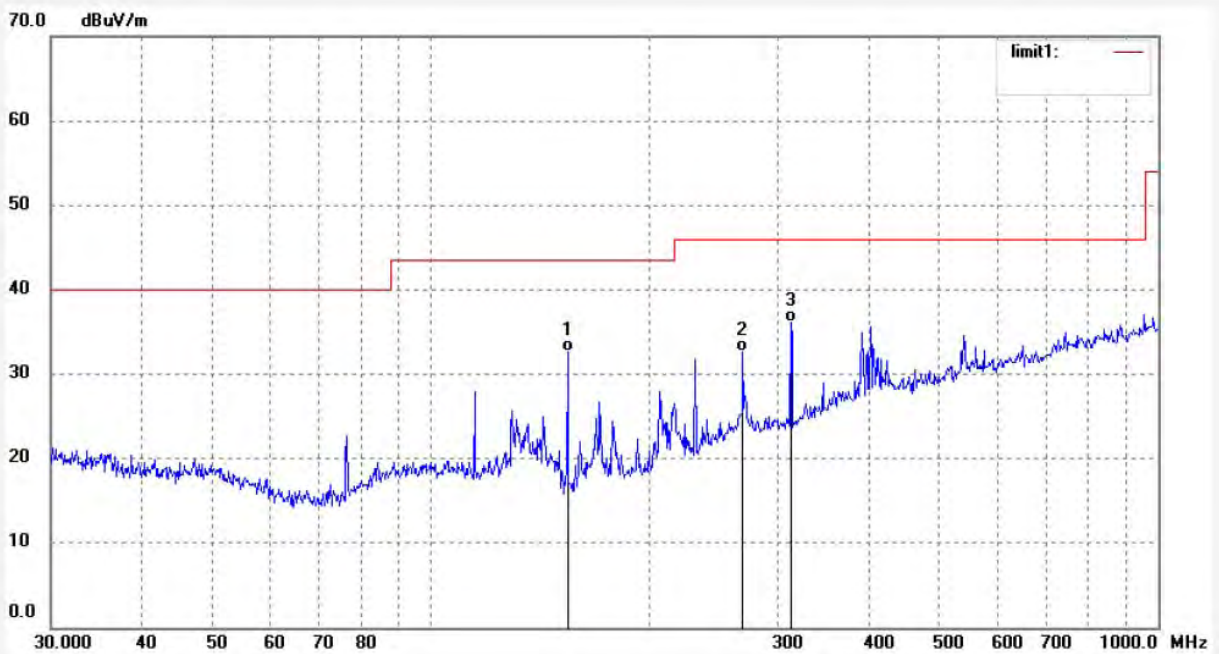

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2427	21.12	11.56	32.68	43.50	-10.82	QP			
2	268.7212	14.29	18.32	32.61	46.00	-13.39	QP			
3	312.5482	17.01	19.13	36.14	46.00	-9.86	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2528	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/14/22
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

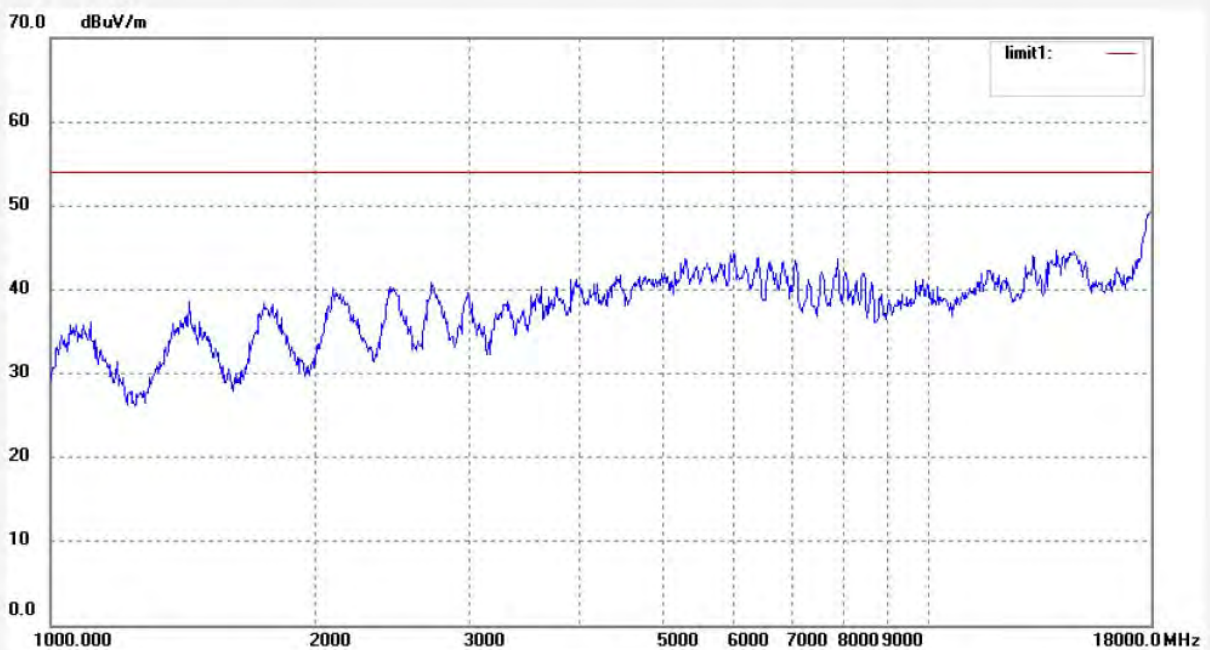

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2527	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/12/26
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

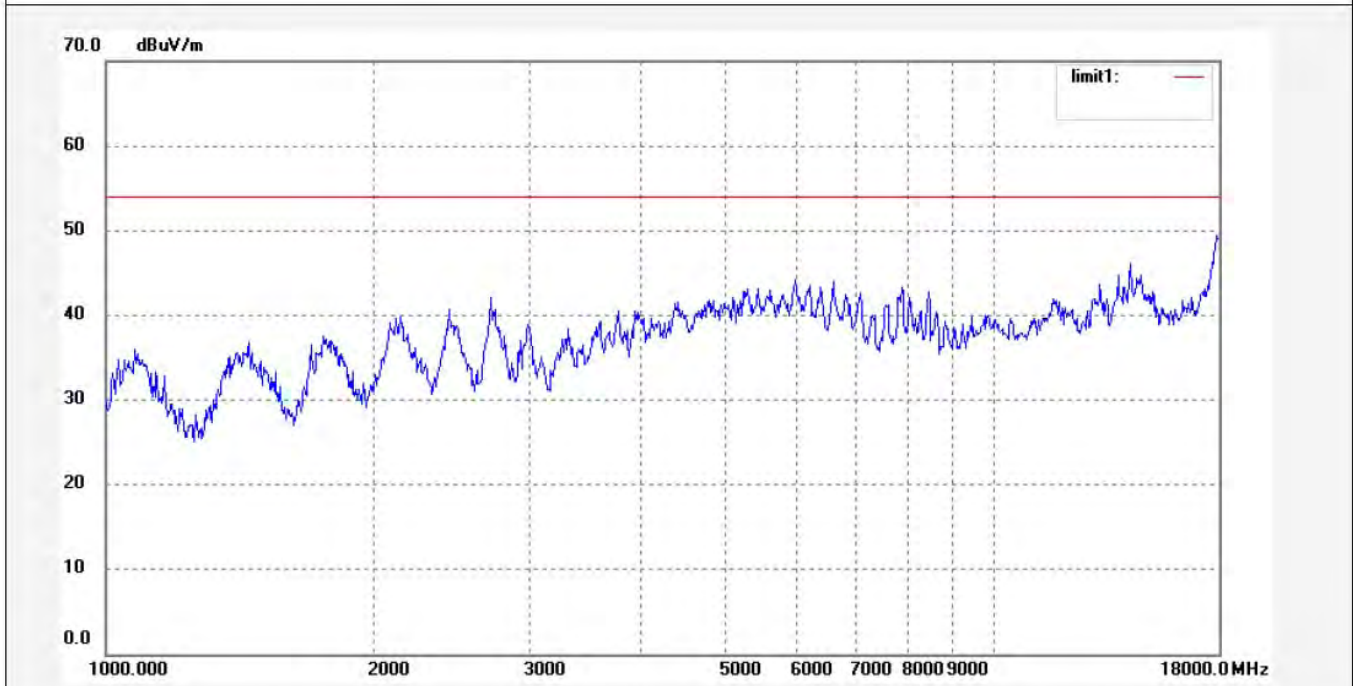

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2551	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/45/37
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

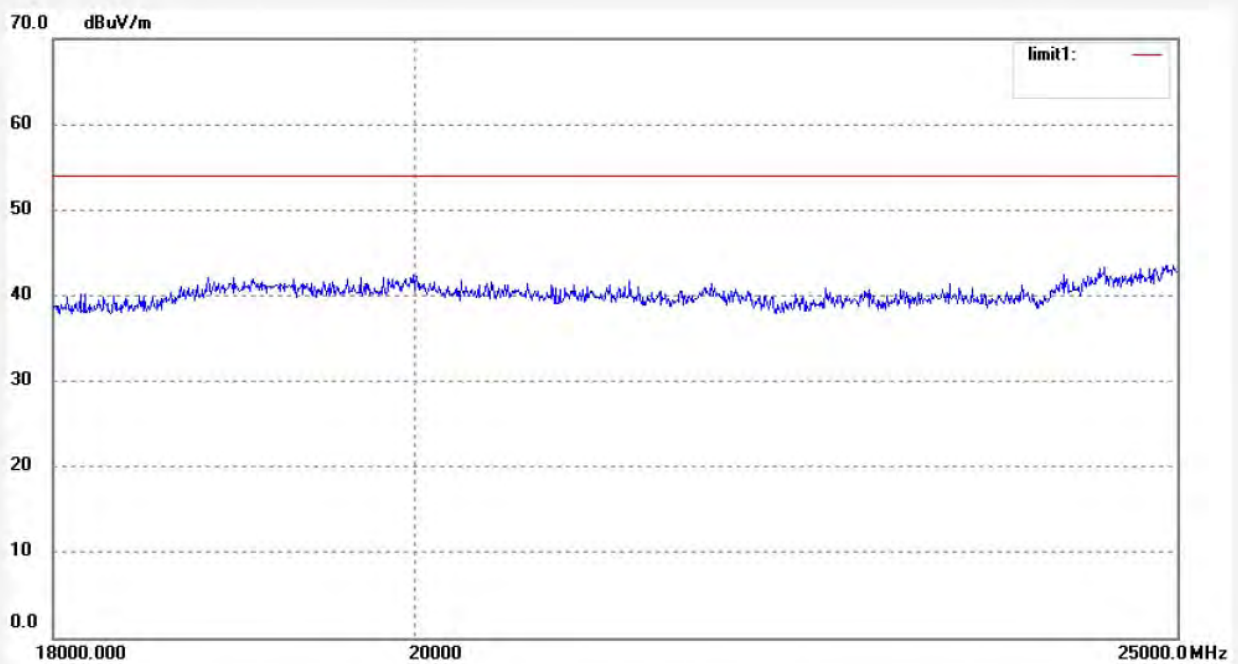

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2552	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/48/28
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

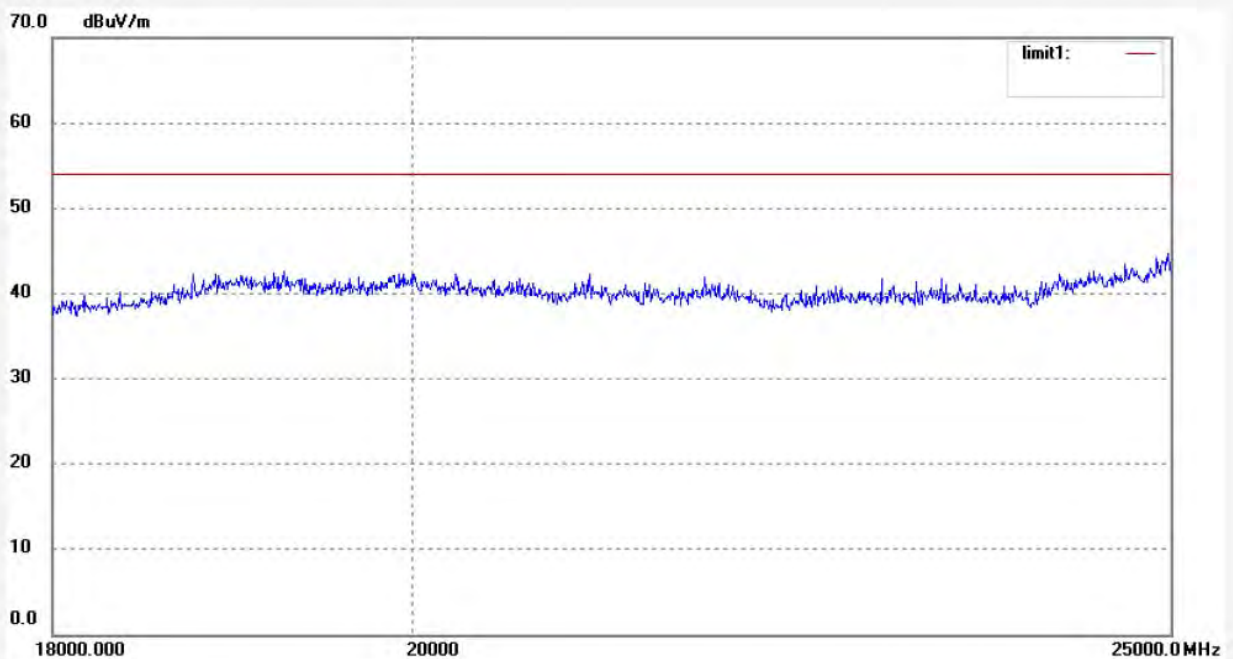

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2505	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/45/51
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

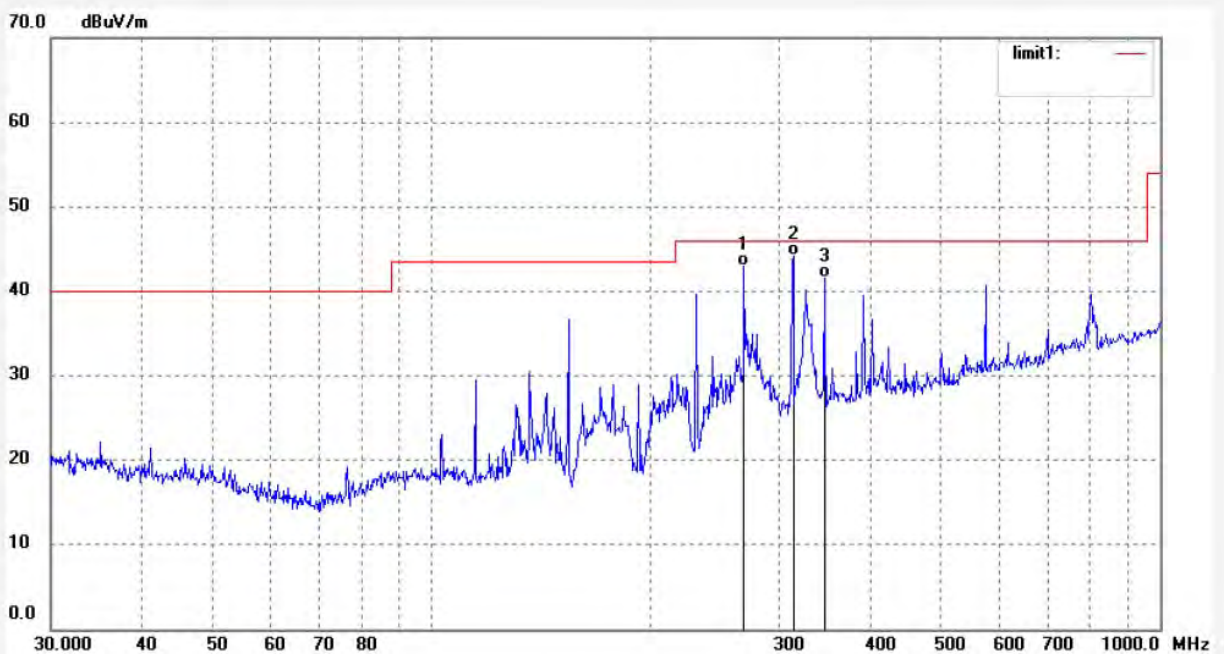

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	268.7212	24.73	18.32	43.05	46.00	-2.95	QP			
2	313.6482	25.00	19.15	44.15	46.00	-1.85	QP			
3	346.0740	21.23	20.37	41.60	46.00	-4.40	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2506	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/49/27
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

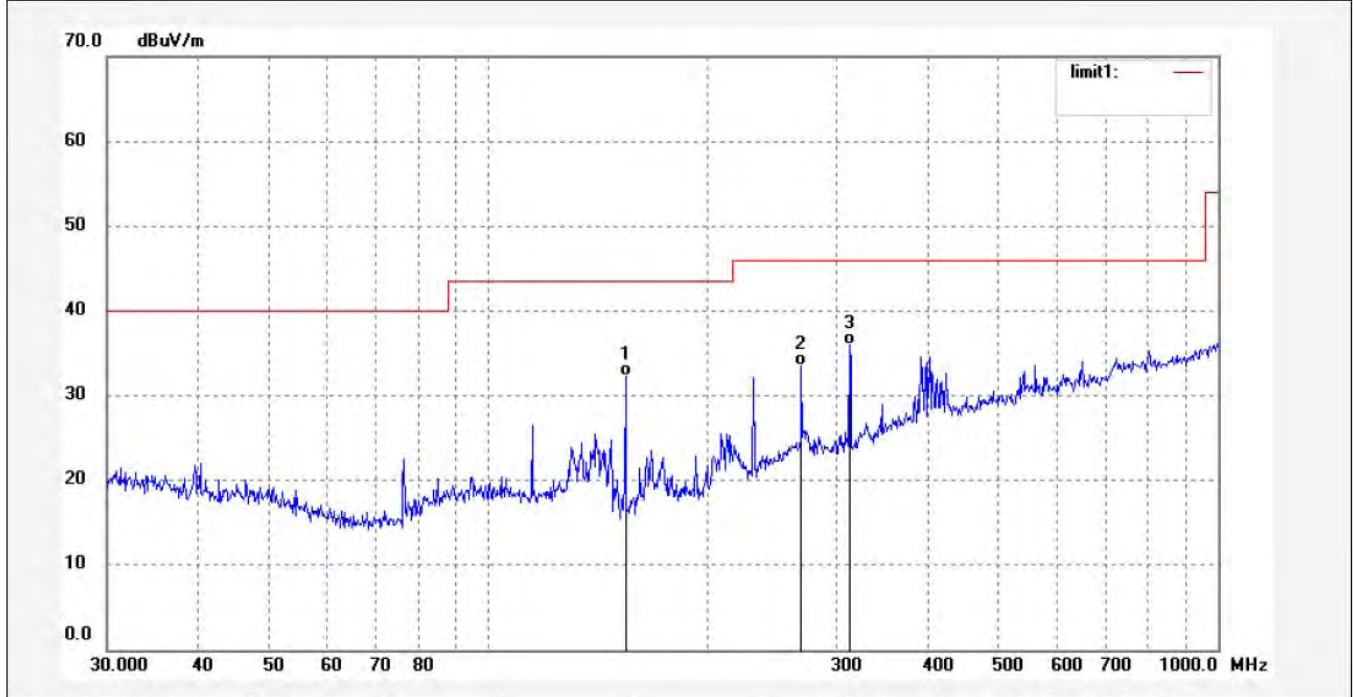

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2428	20.64	11.56	32.20	43.50	-11.30	QP			
2	268.7212	15.20	18.32	33.52	46.00	-12.48	QP			
3	312.5482	16.90	19.13	36.03	46.00	-9.97	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2529	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/17/10
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

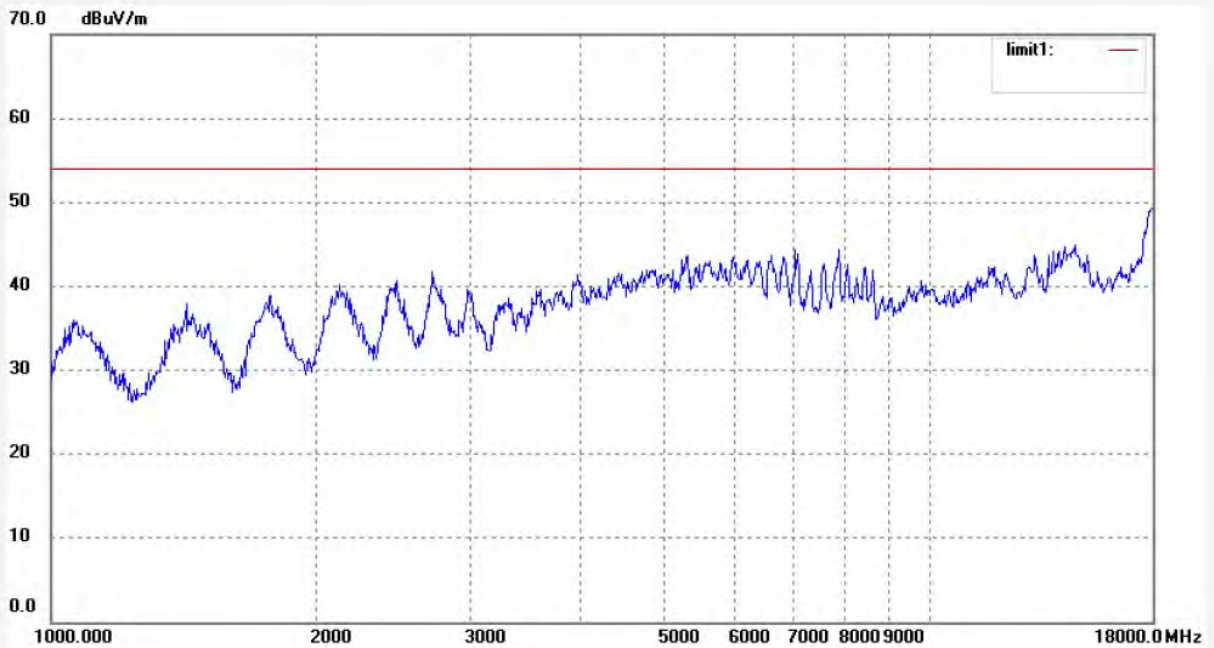

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2530	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/20/04
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

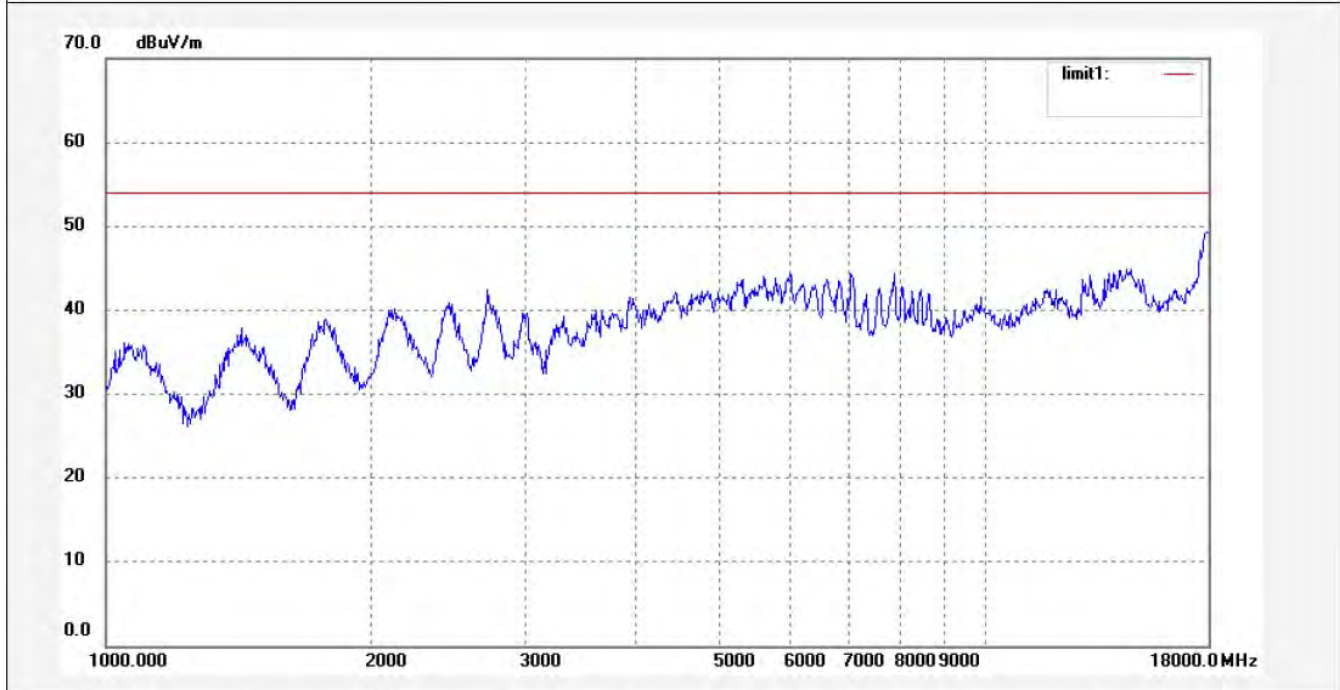

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2554	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/55/36
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

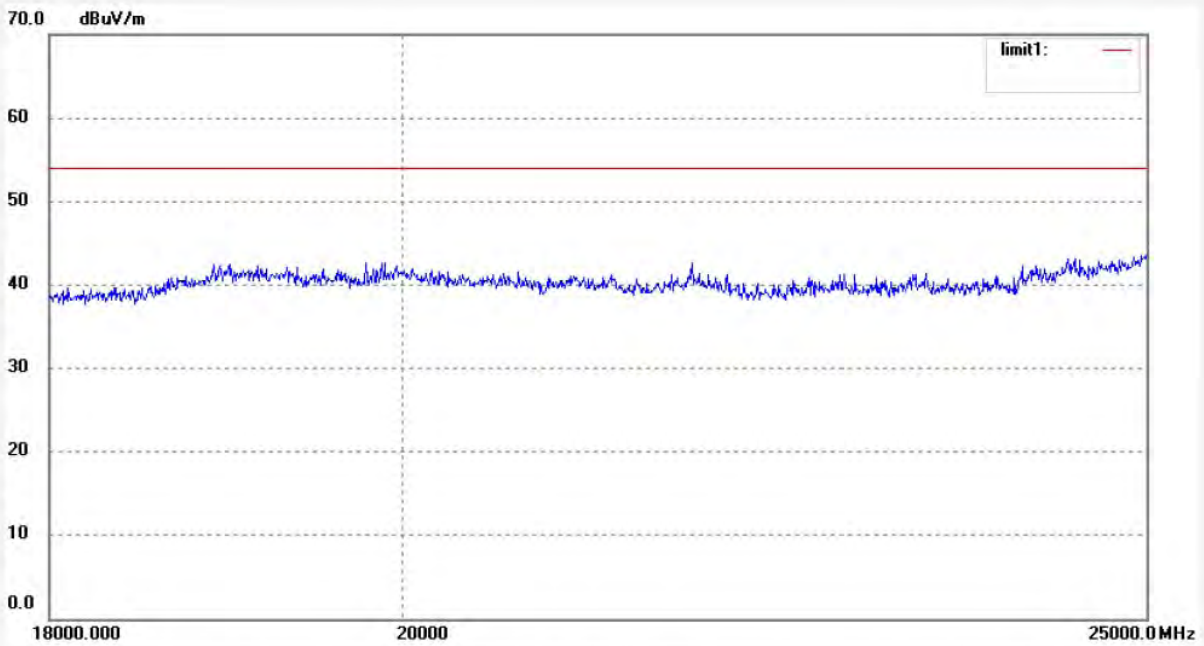

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2553	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/51/34
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

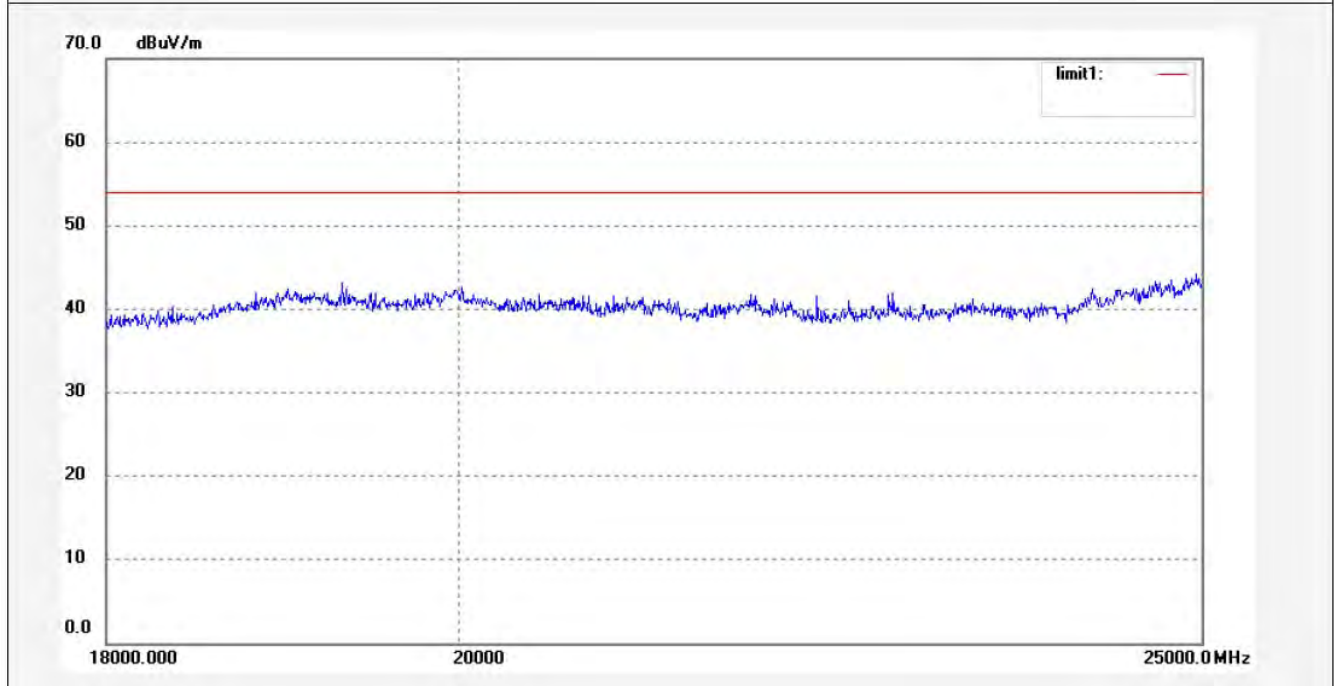

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2508	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/56/45
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

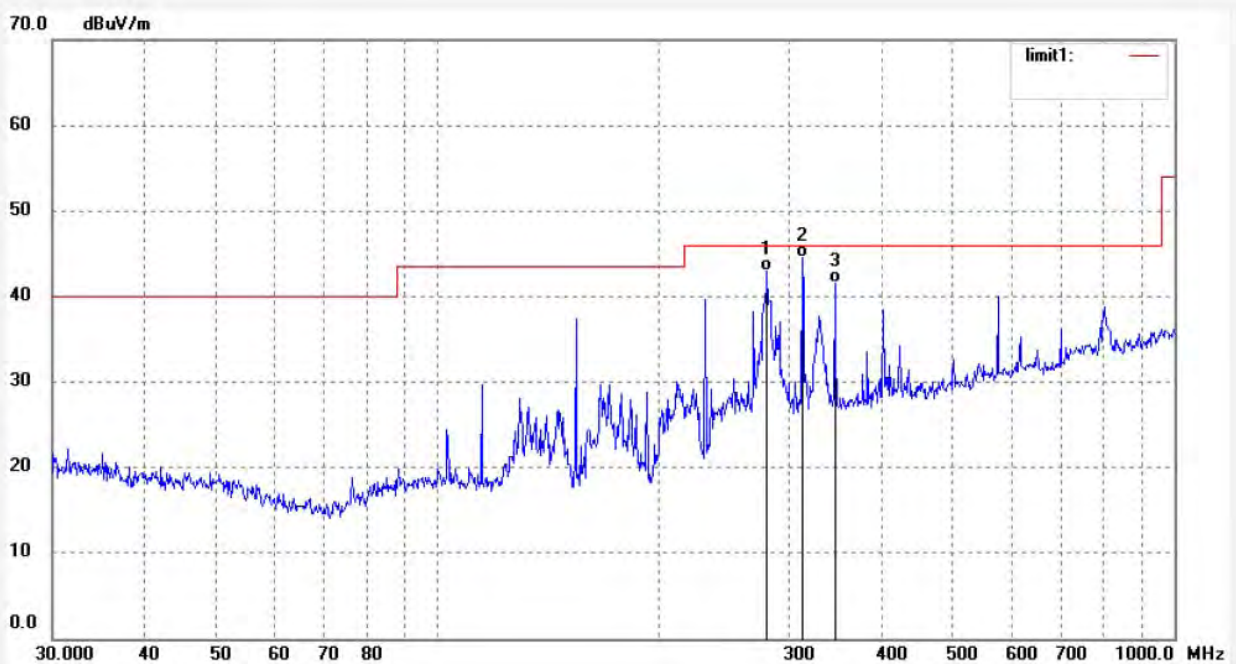

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	280.2936	24.61	18.29	42.90	46.00	-3.10	QP			
2	312.5482	25.46	19.13	44.59	46.00	-1.41	QP			
3	346.0740	21.28	20.37	41.65	46.00	-4.35	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2507	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 9/52/42
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

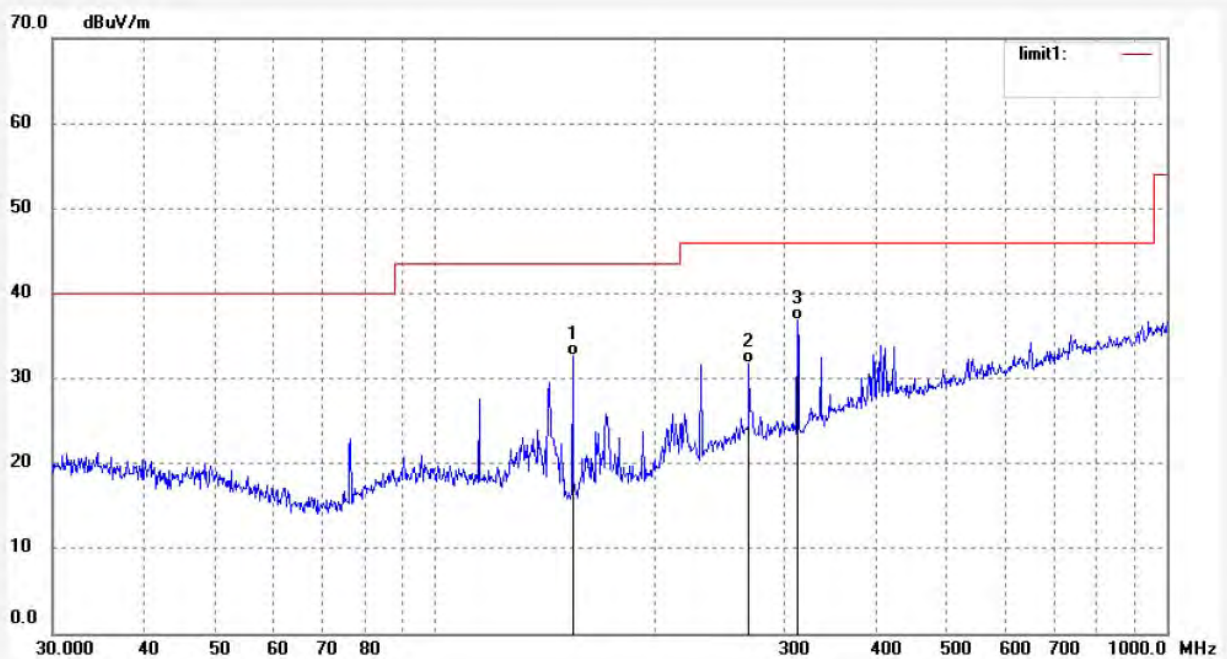

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	154.2427	21.06	11.56	32.62	43.50	-10.88	QP			
2	268.7212	13.50	18.32	31.82	46.00	-14.18	QP			
3	312.5482	17.72	19.13	36.85	46.00	-9.15	QP			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2532	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/28/11
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

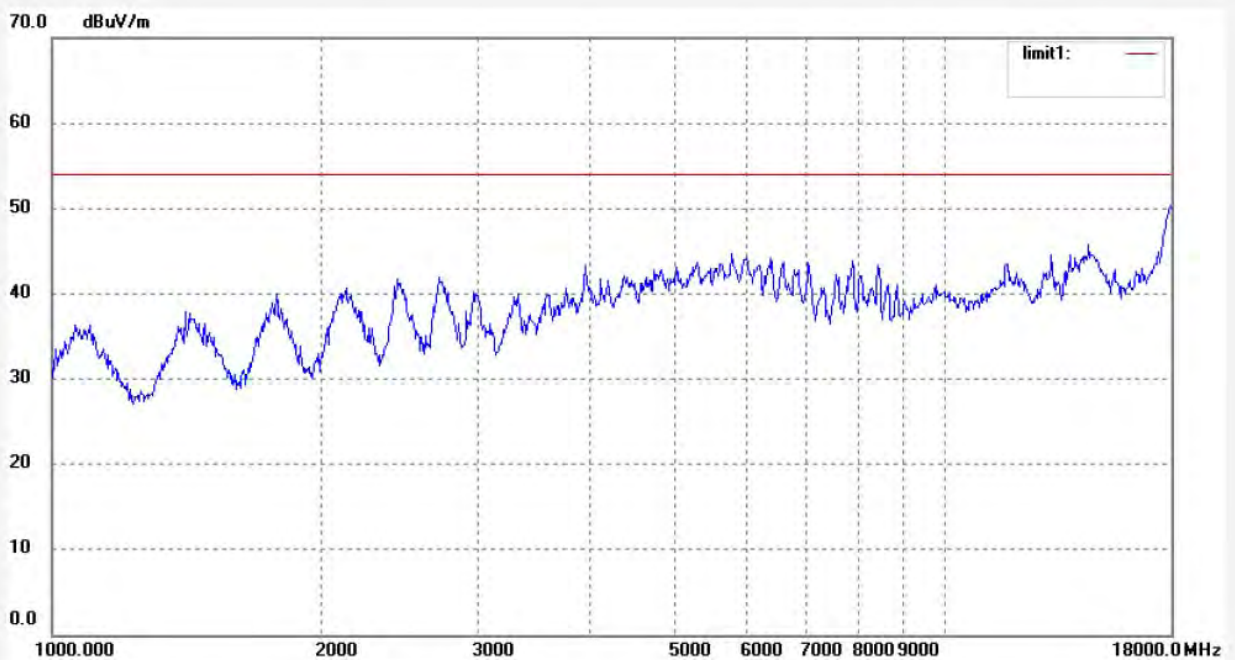

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2531	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 11/23/53
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

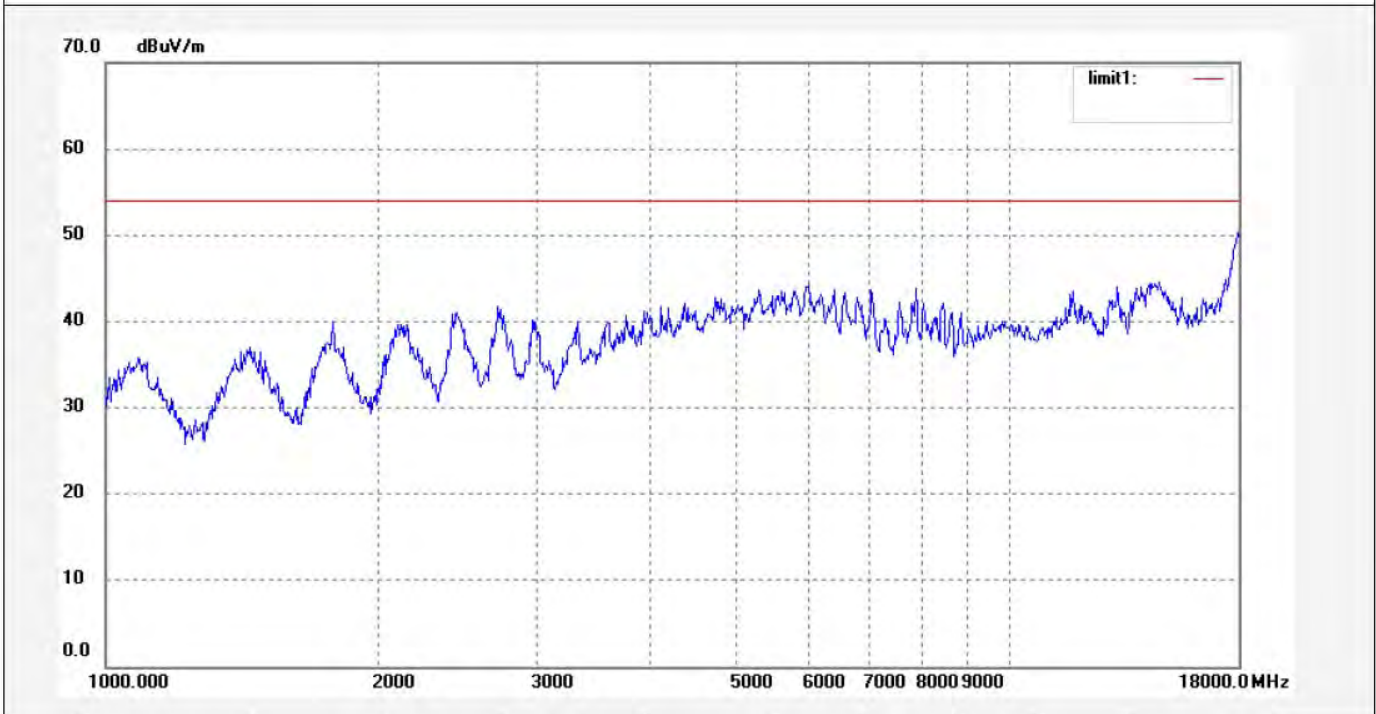

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2555	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 12/58/19
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

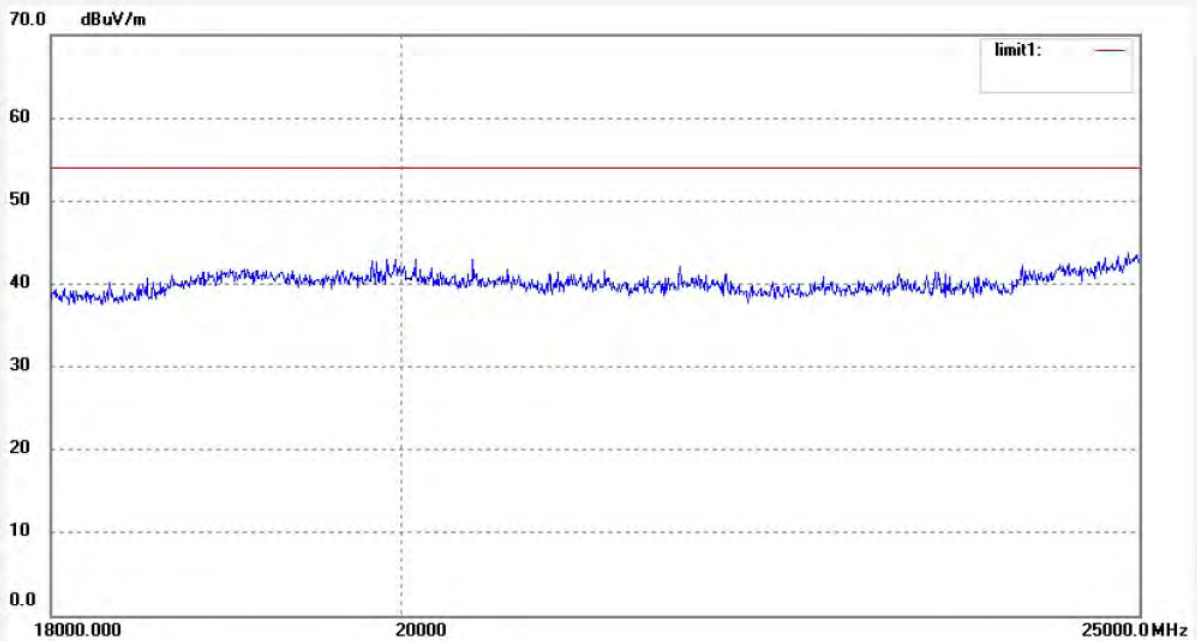

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: star #2556	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/10/22/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 13/02/20
EUT: Mobile internet device	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: P804	
Manufacturer: Pipo	

Note: Report No.:ATE20122384

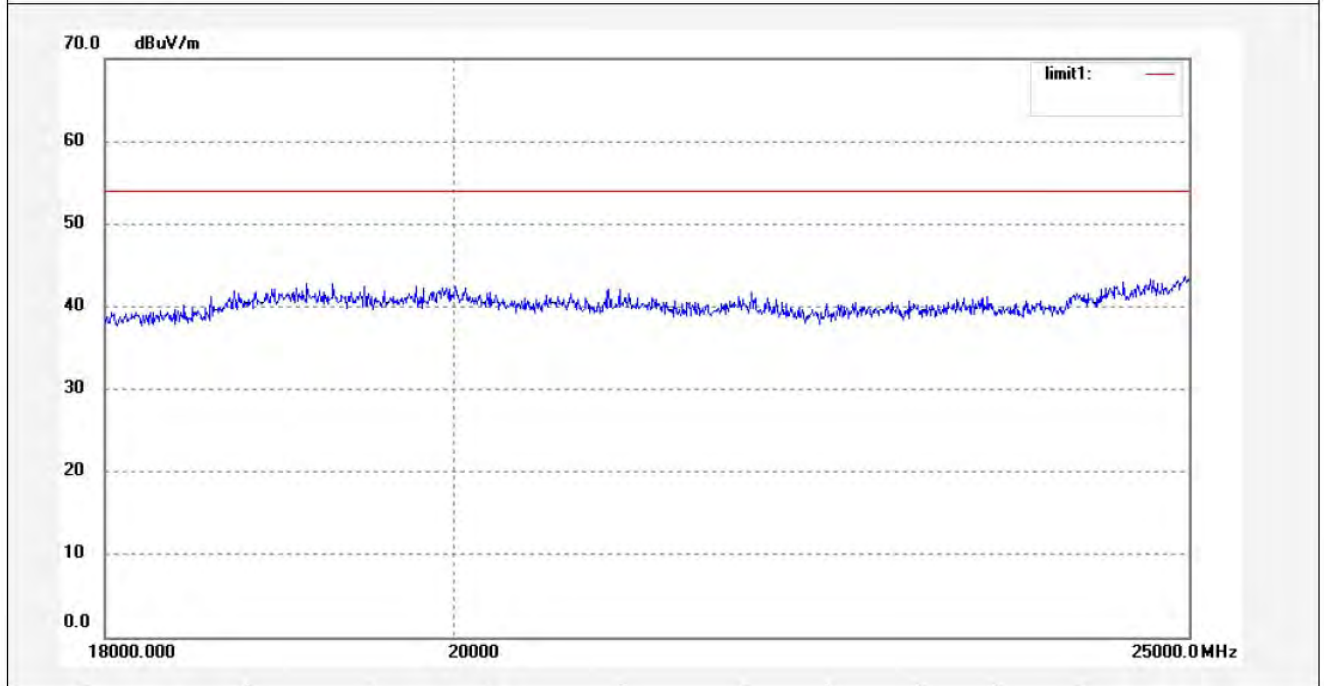


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



## 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

### 10.1. Block Diagram of Test Setup

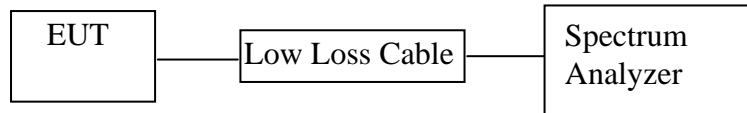

(EUT: Mobile Internet Device)

### 10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 10.3.1. Mobile Internet Device (EUT)

Model Number	:	P804
Serial Number	:	N/A
Manufacturer	:	Pipo Technology Co., Ltd.

## 10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 10.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

## 10.5. Test Procedure

10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

10.5.3. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


10.5.4. The Conducted Spurious Emission was measured and recorded.

## 10.6. Test Result


**Pass.**

The spectrum analyzer plots are attached as below.

### TX 802.11b Channel Low 2412MHz (30MHz-1GHz)

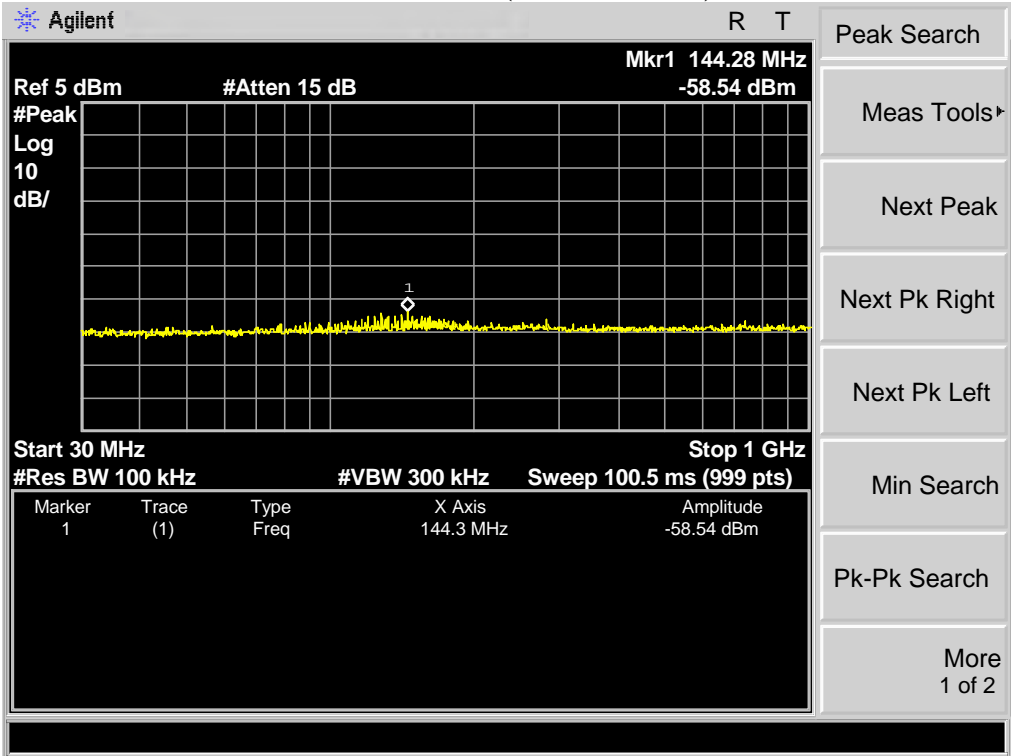


### TX 802.11b Channel Low 2412MHz (1GHz-25GHz)

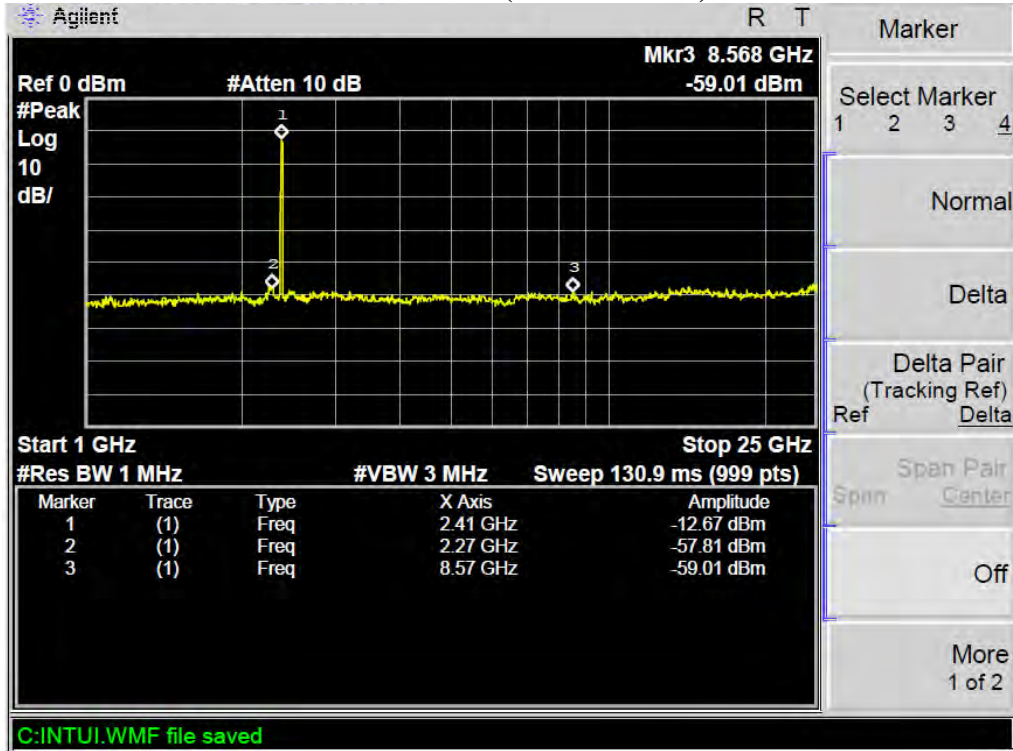





### TX 802.11b Channel Middle 2437MHz (30MHz-1GHz)

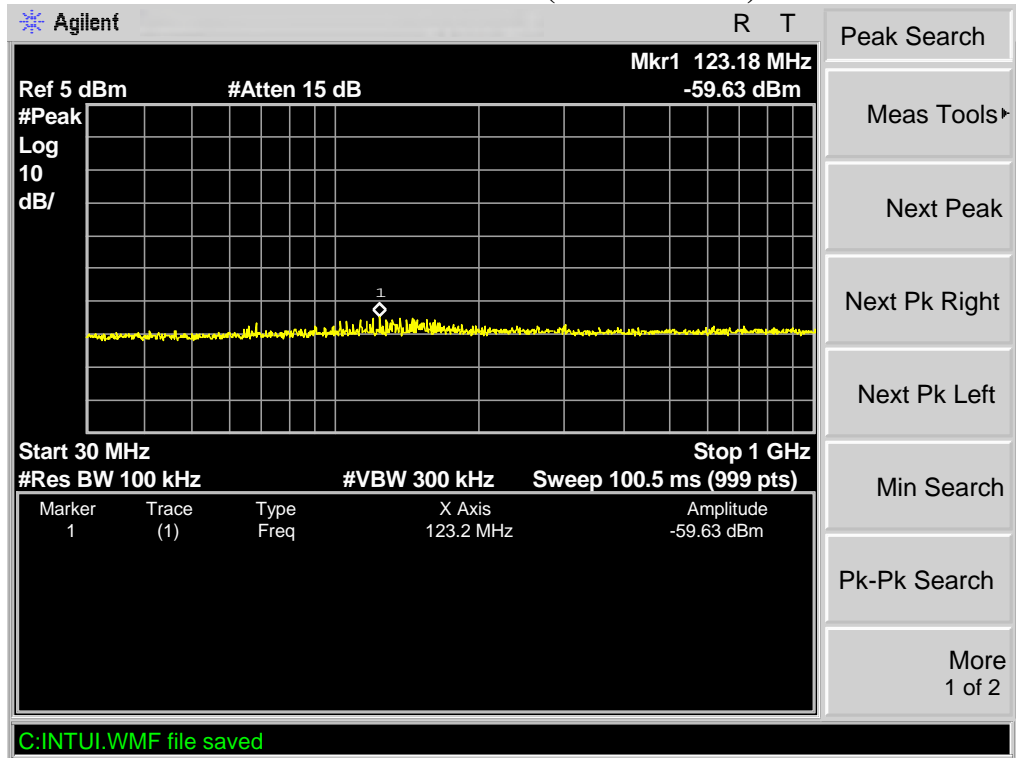


### TX 802.11b Channel Middle 2437MHz (1GHz-25GHz)

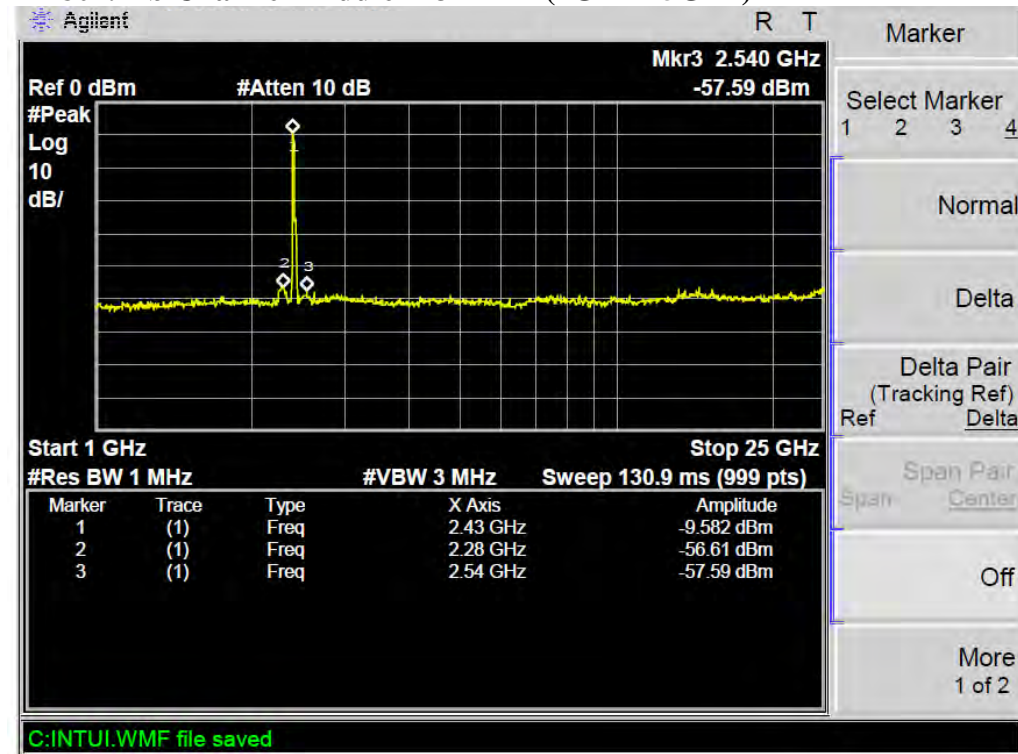


### TX 802.11b Channel High 2462MHz (30MHz-1GHz)

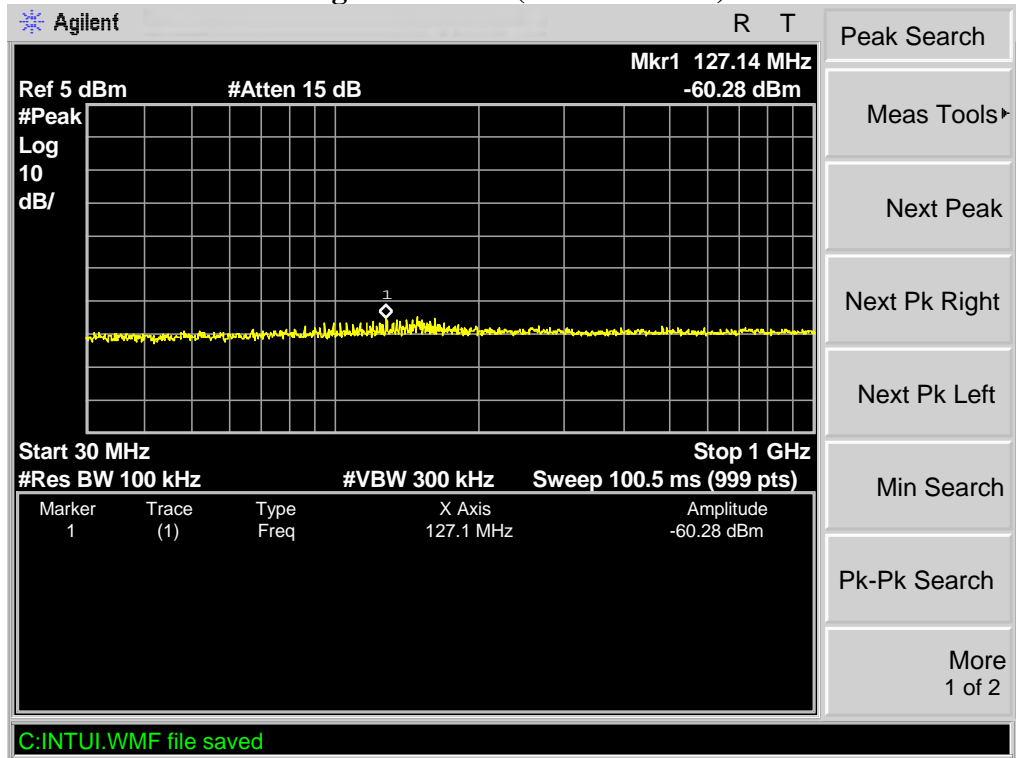


### TX 802.11b Channel High 2462MHz (1GHz-25GHz)

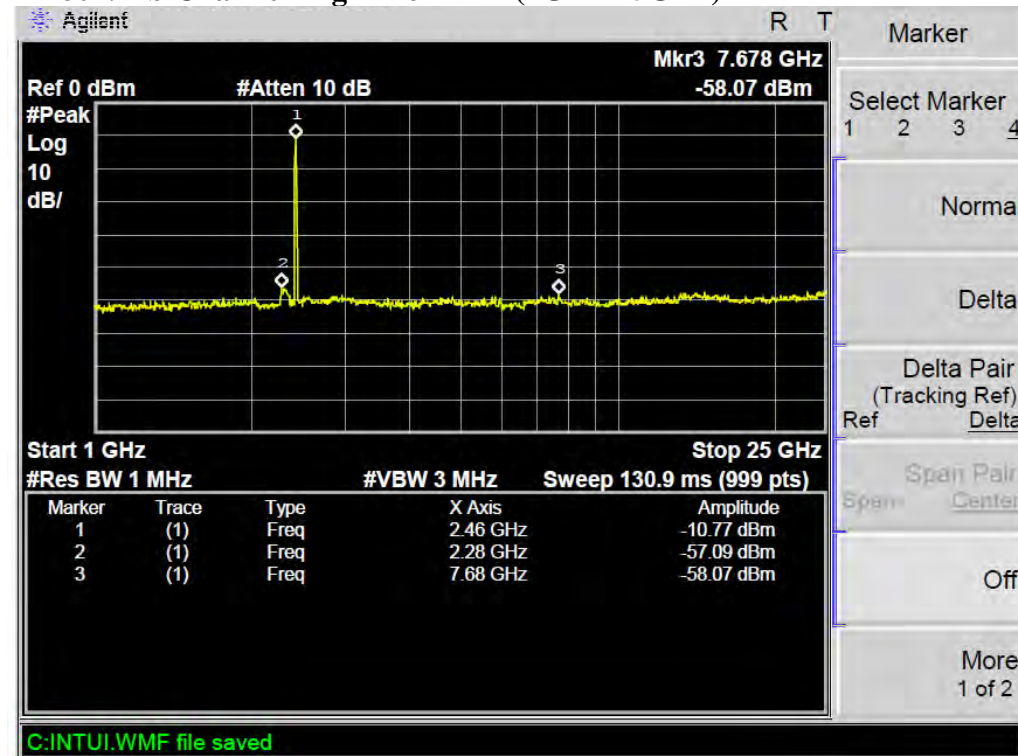

### TX 802.11g Channel Low 2412MHz (30MHz-1GHz)

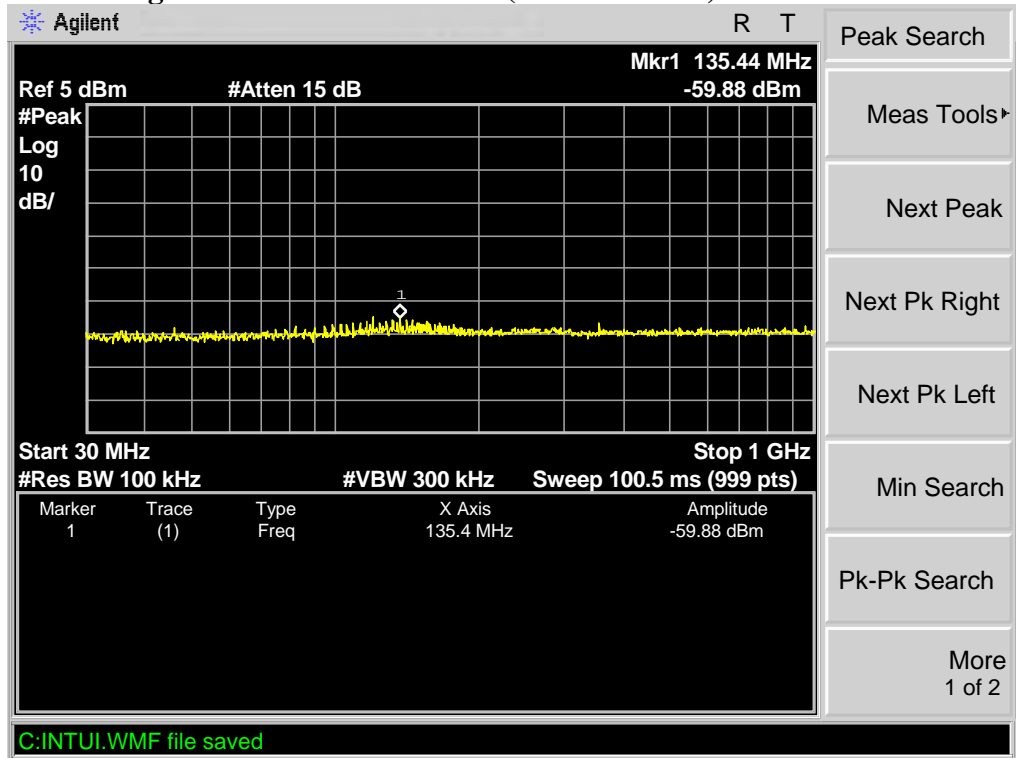


### TX 802.11g Channel Low 2412MHz (1GHz-25GHz)

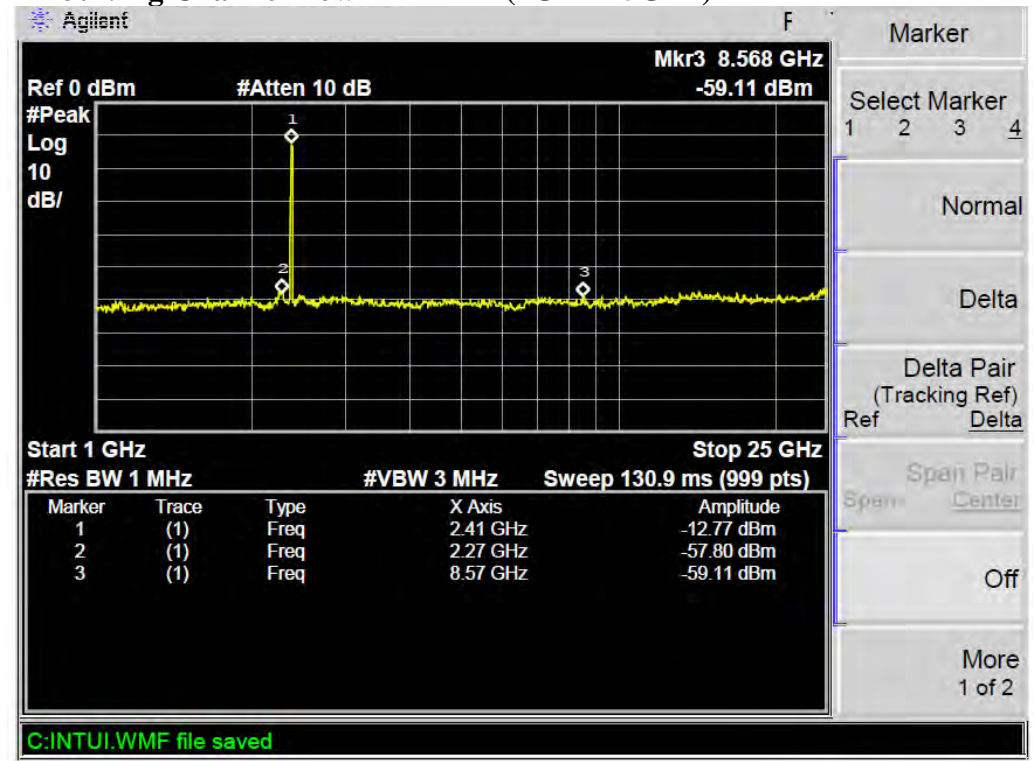




### TX 802.11g Channel Middle 2437MHz (30MHz-1GHz)

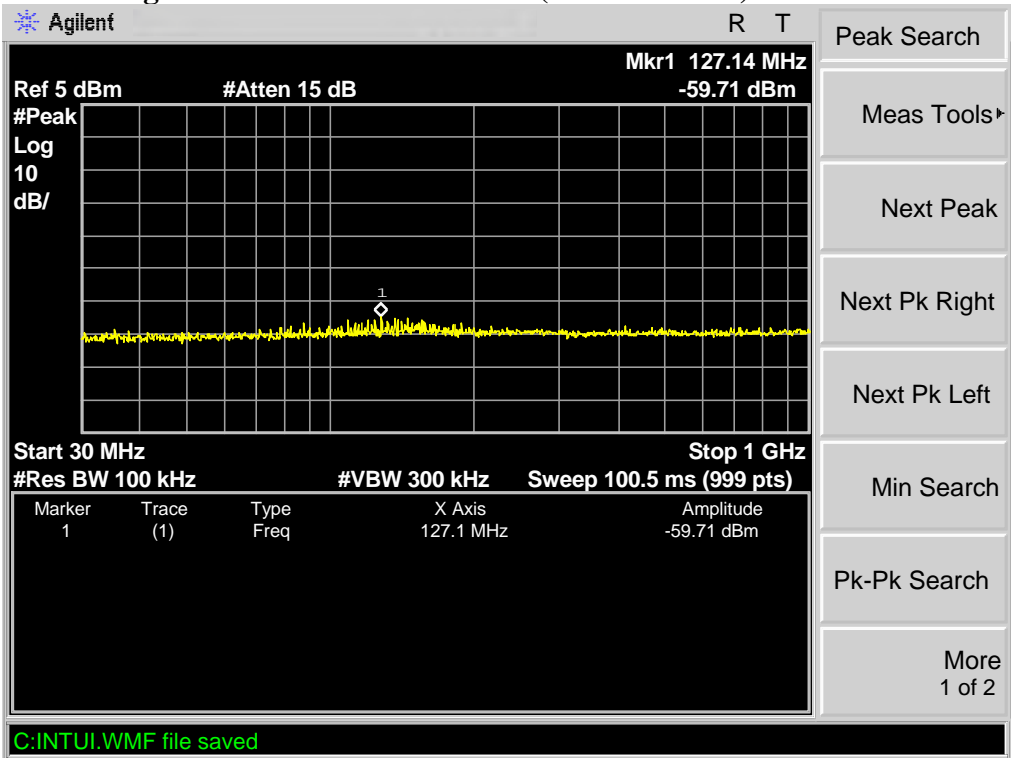


### TX 802.11g Channel Middle 2437MHz




### TX 802.11g Channel High 2462MHz (30MHz-1GHz)

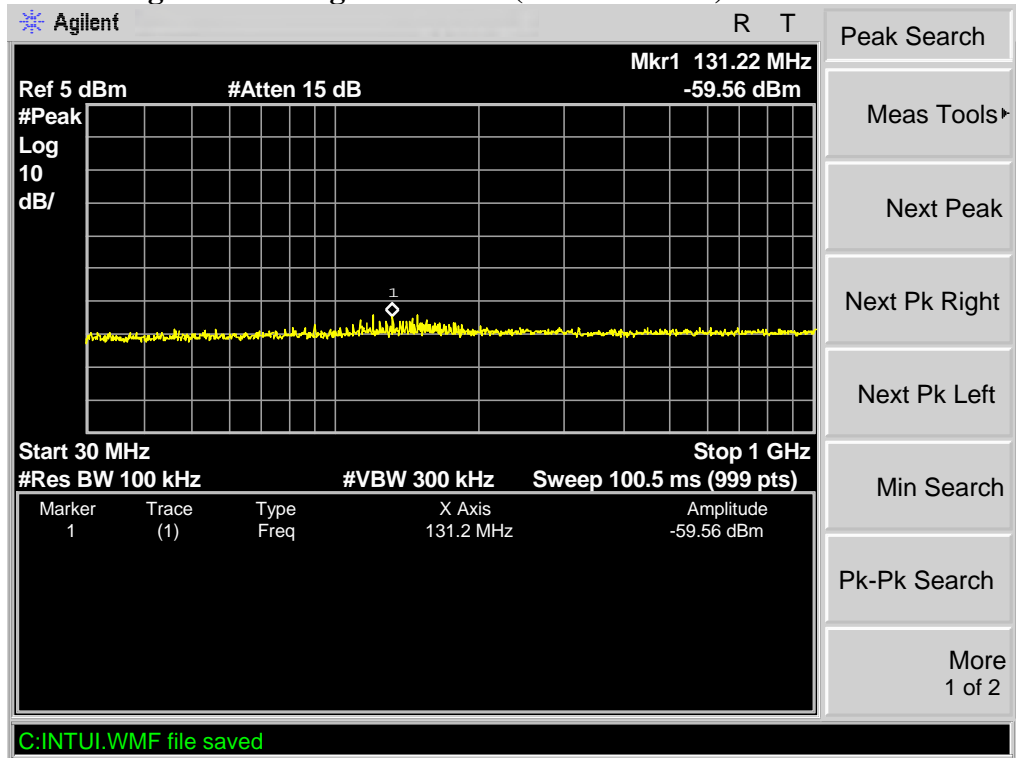


### TX 802.11g Channel High 2462MHz (1GHz-25GHz)

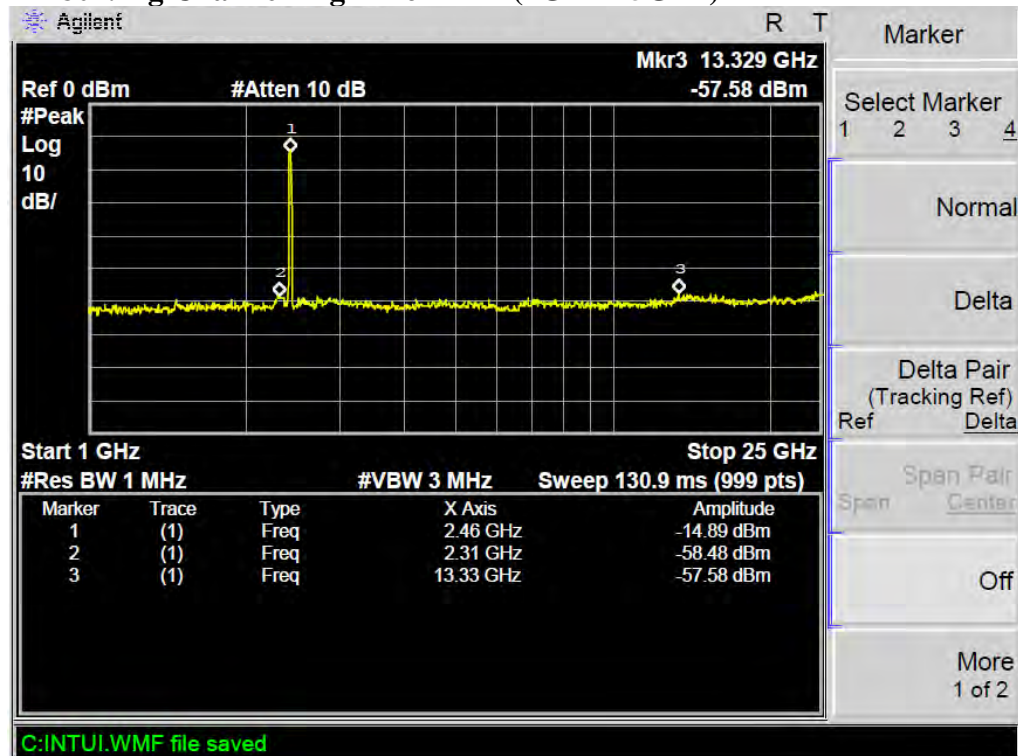

**TX 802.11n Channel Low 2412MHz (20MHz) (30MHz-1GHz)**

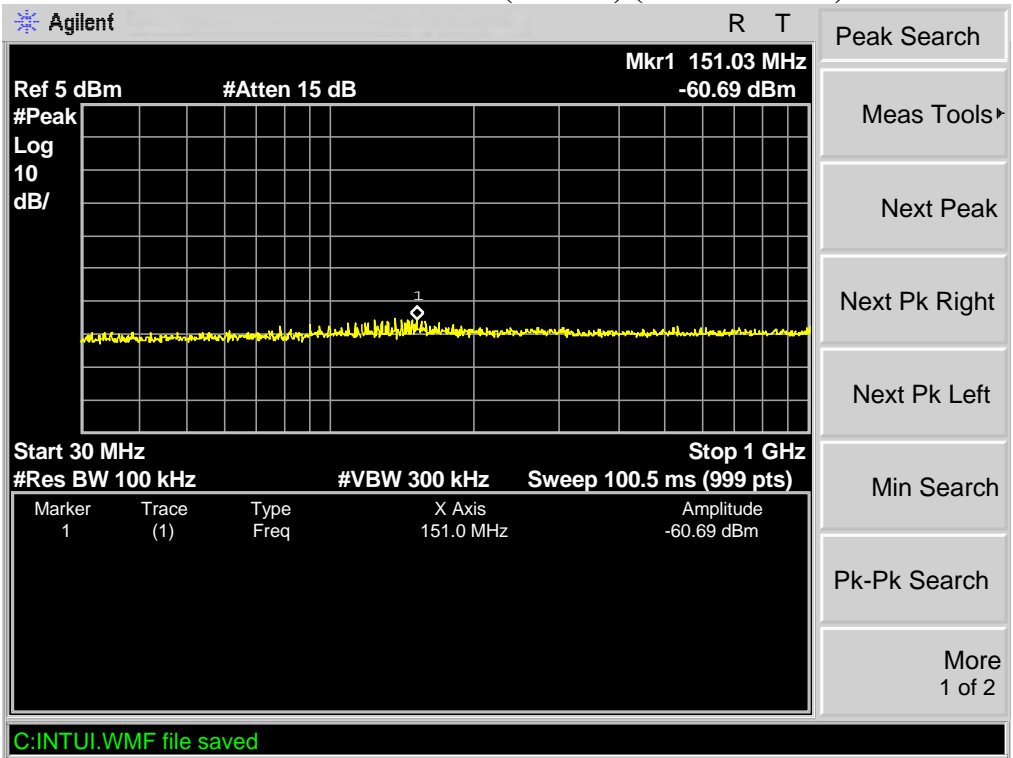


**TX 802.11n Channel Low 2412MHz (20MHz) (1GHz-25GHz)**

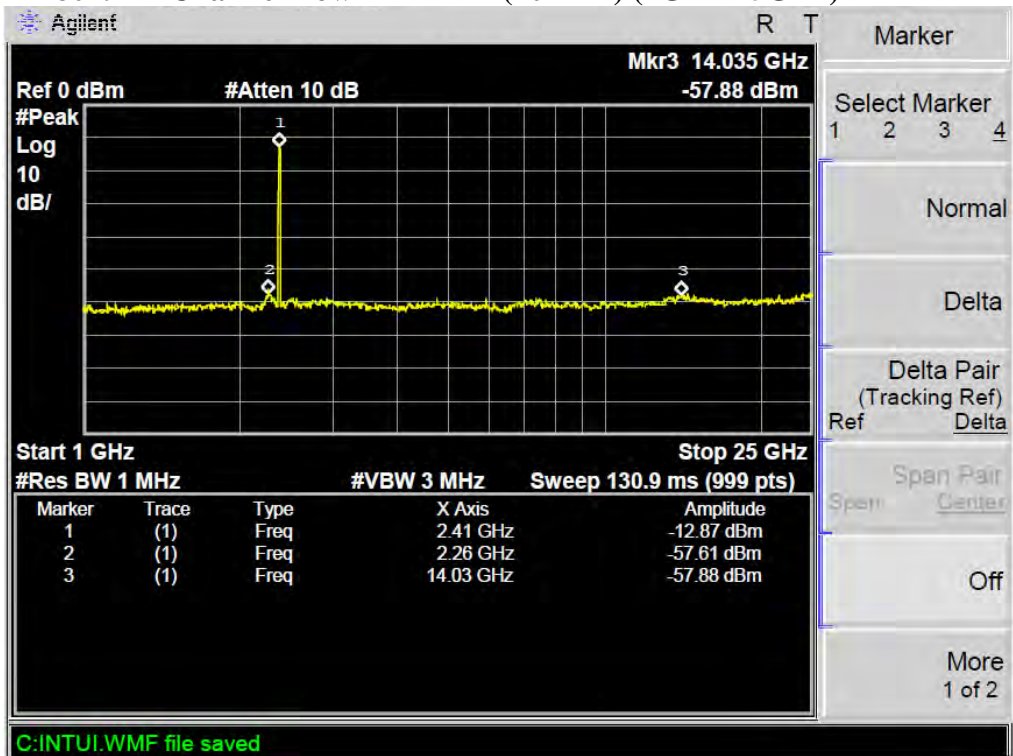





### TX 802.11n Channel Middle 2437MHz (20MHz) (30MHz-1GHz)

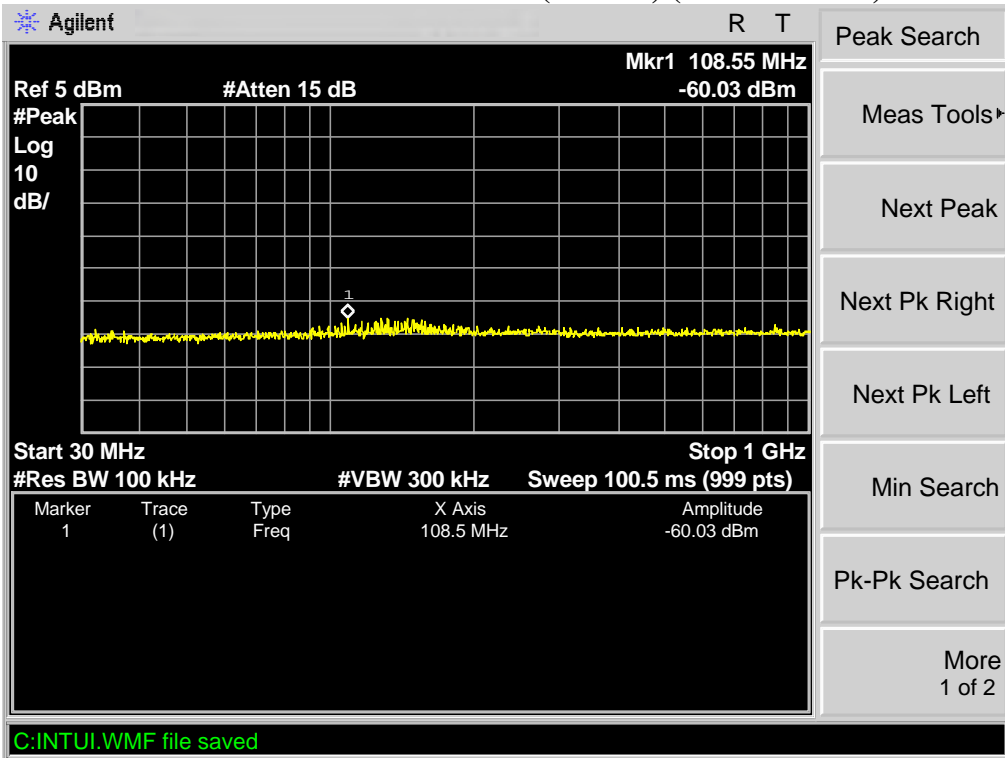


### TX 802.11n Channel Middle 2437MHz (20MHz) (1GHz-25GHz)

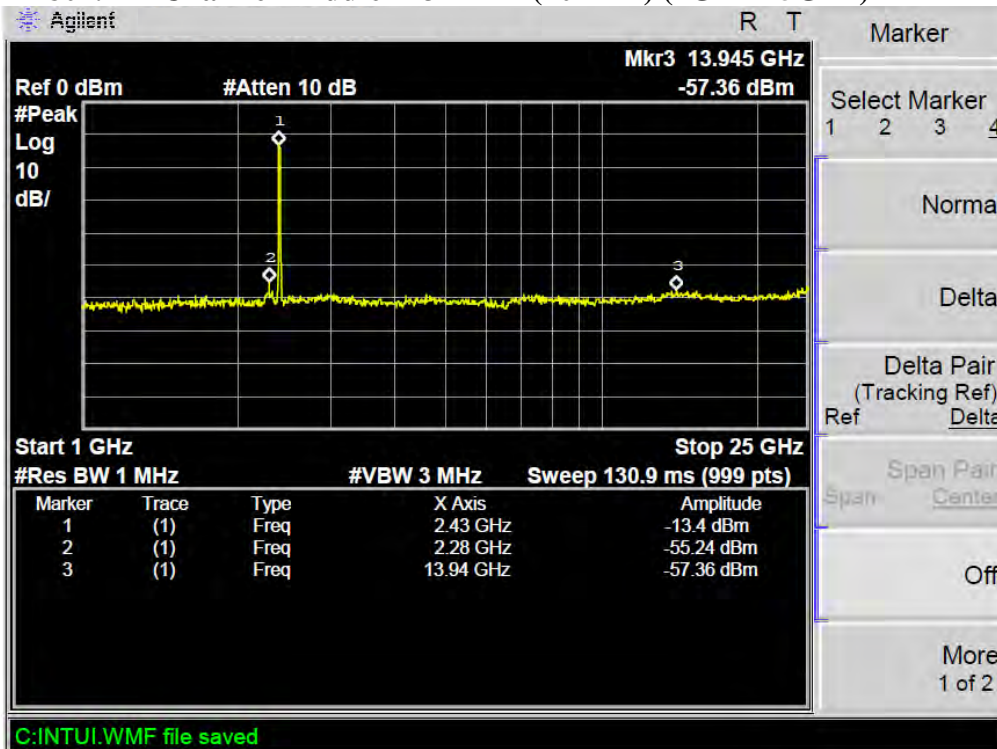


### TX 802.11n Channel High 2462MHz (20MHz) (30MHz-1GHz)

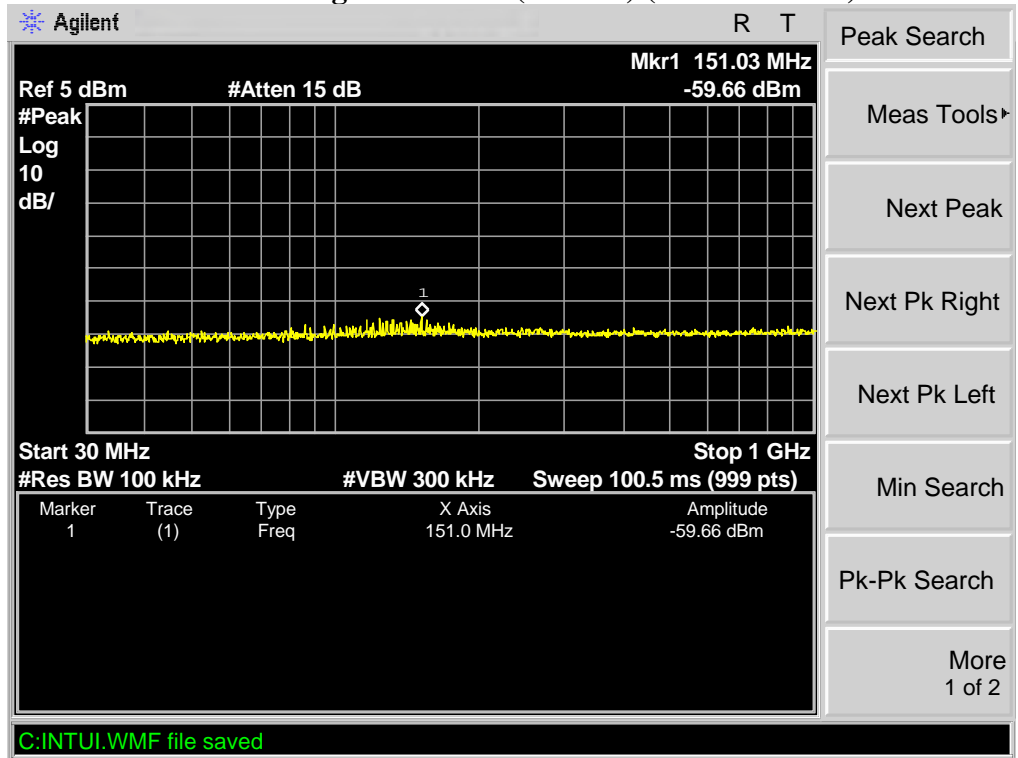


### TX 802.11n Channel High 2462MHz (20MHz) (1GHz-25GHz)

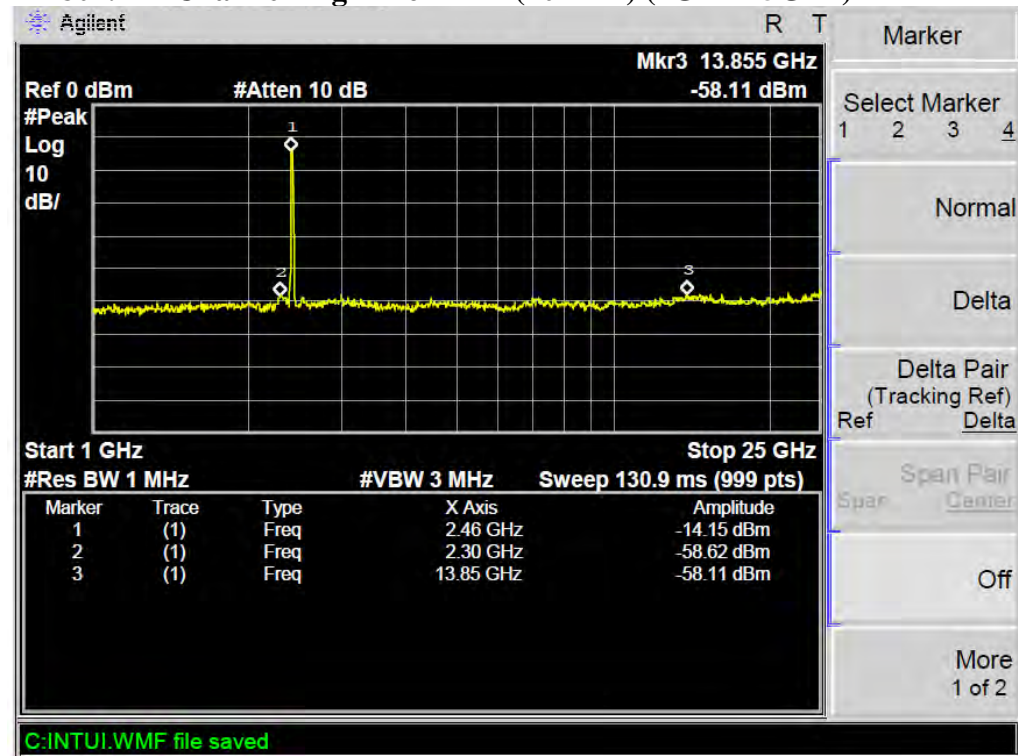

**TX 802.11n Channel Low 2422MHz (40MHz) (30MHz-1GHz)**

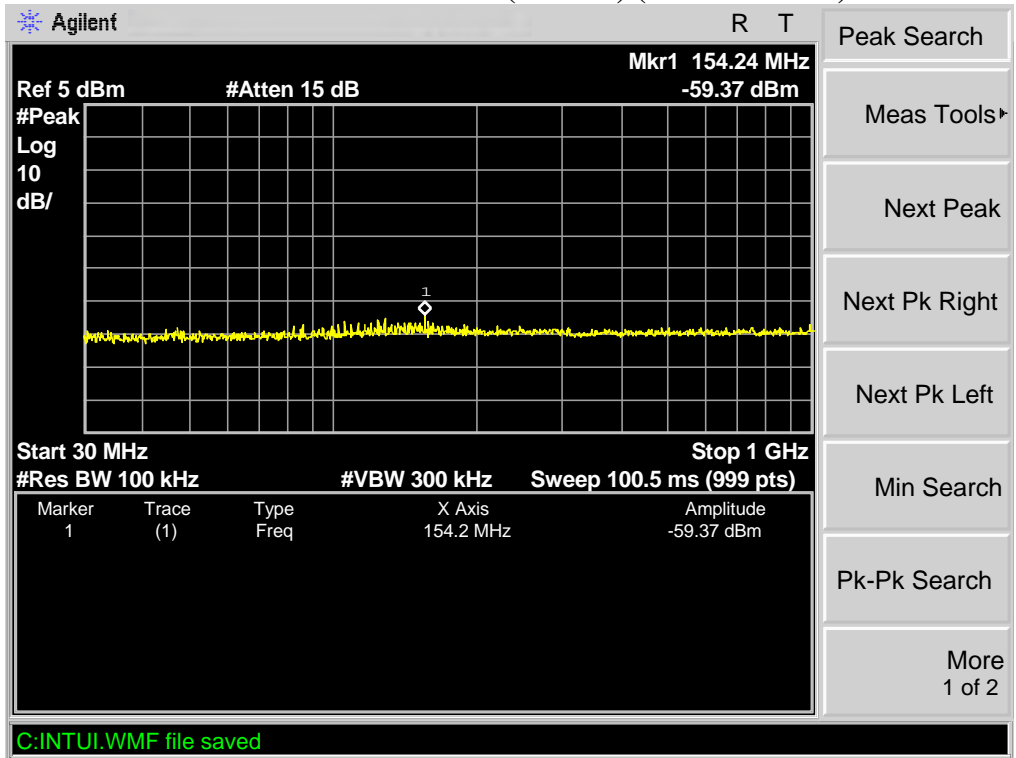


**TX 802.11n Channel Low 2422MHz (40MHz) (1GHz-25GHz)**

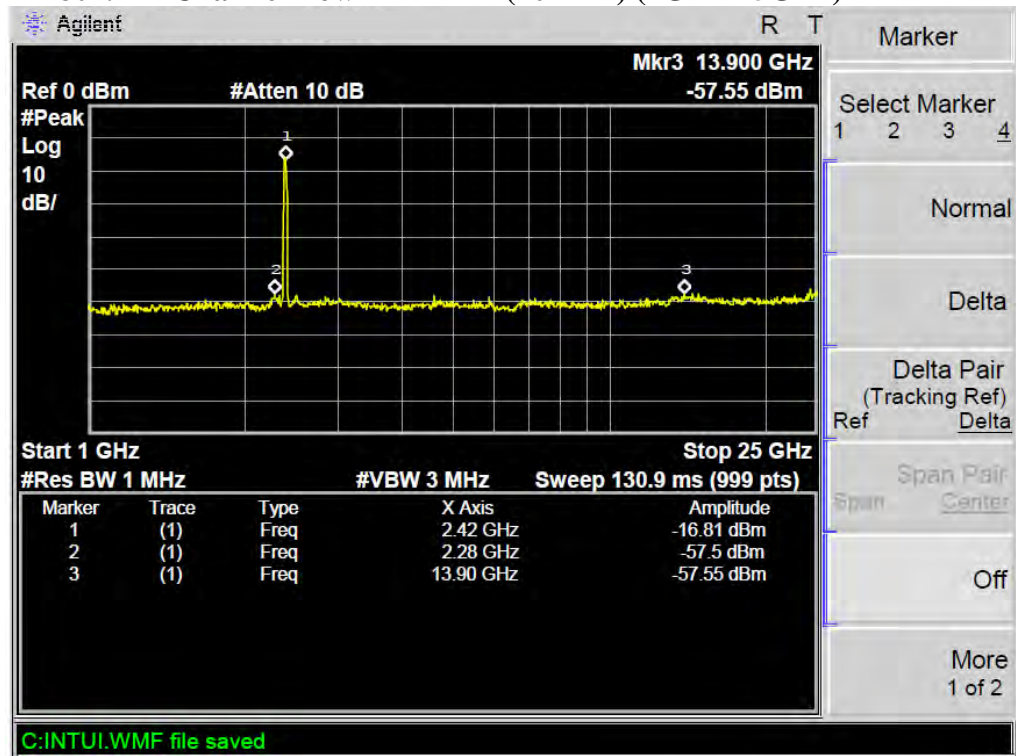





### TX 802.11n Channel Middle 2437MHz (40MHz) (30MHz-1GHz)

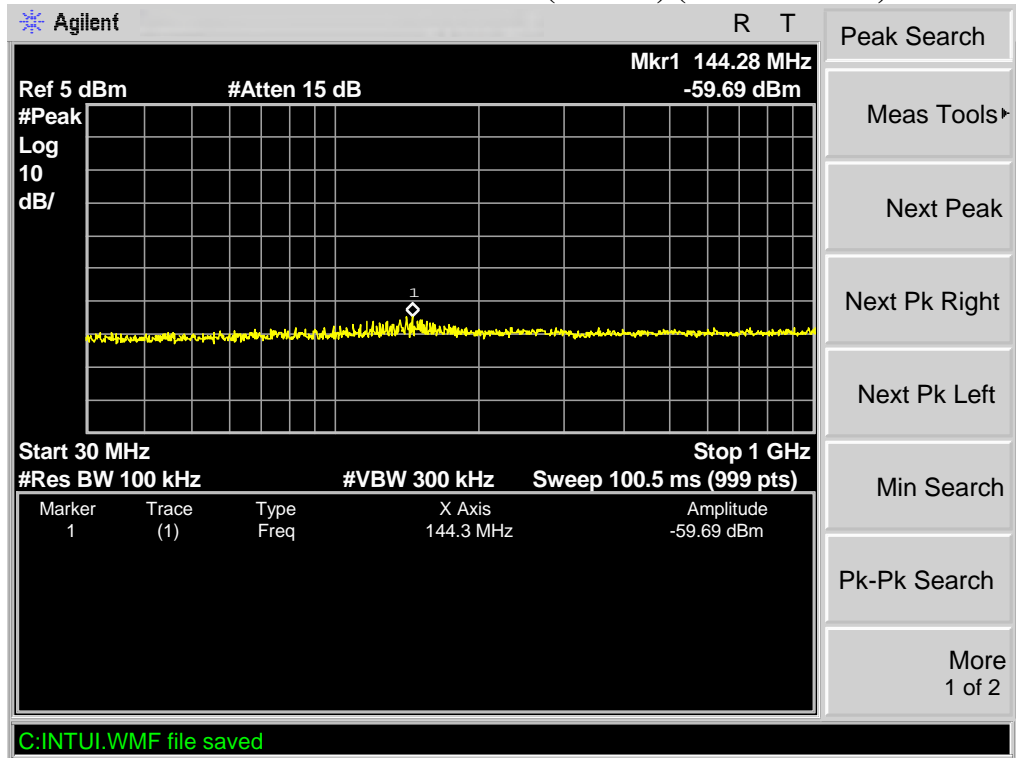


### TX 802.11n Channel Middle 2437MHz (40MHz) (1GHz-25GHz)

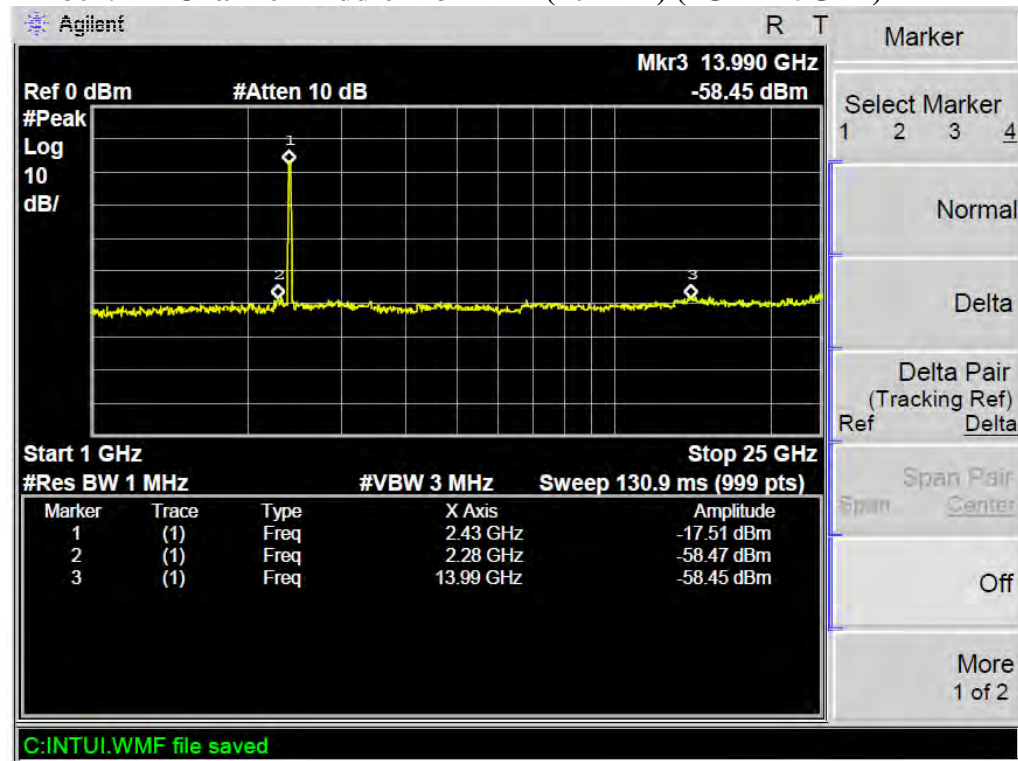

**TX 802.11n Channel High 2452MHz (40MHz) (30MHz-1GHz)**

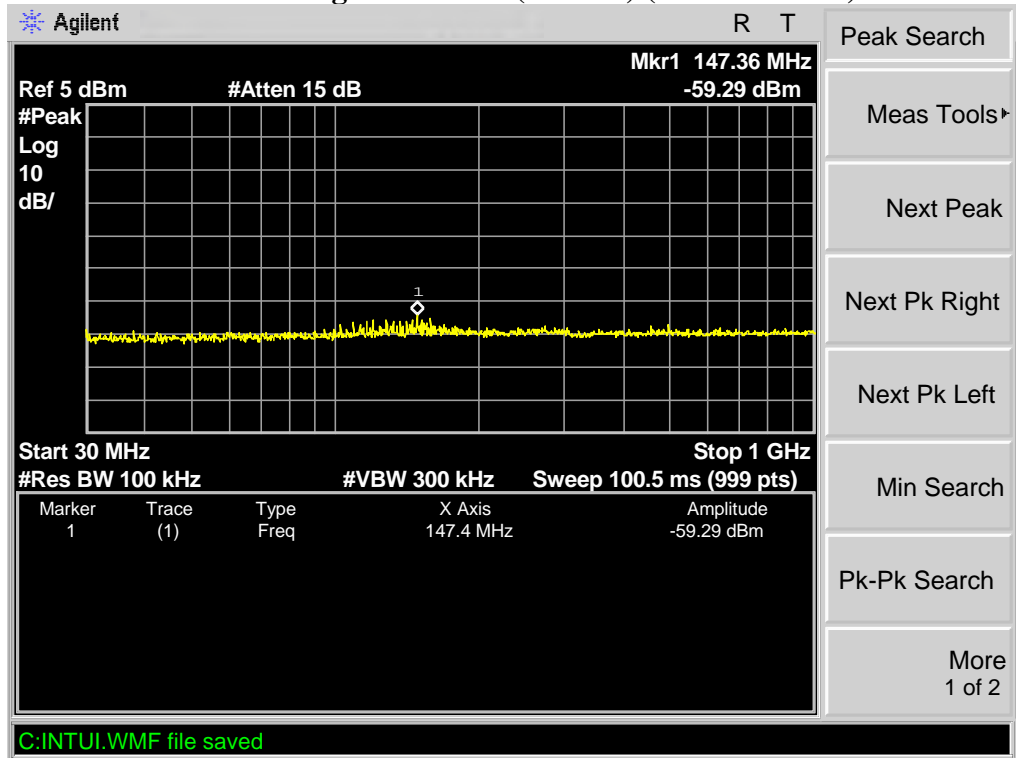

**TX 802.11n Channel High 2452MHz (40MHz) (1GHz-25GHz)**

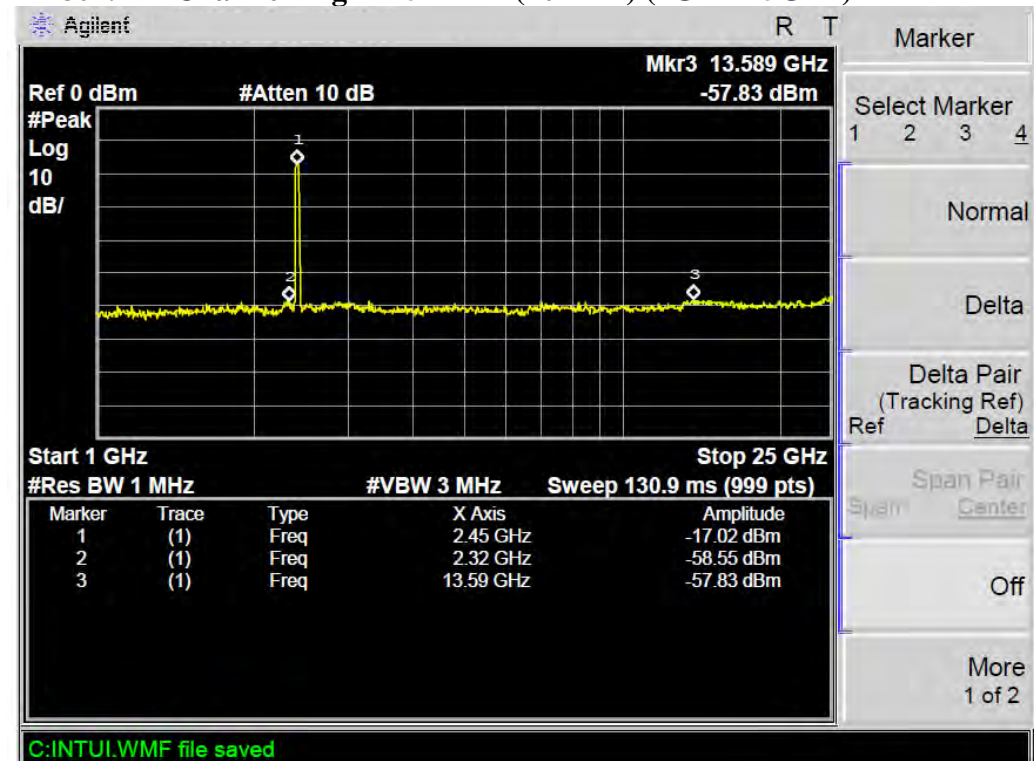


# 11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


## 15 SECTION 15.207(A)

### 11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

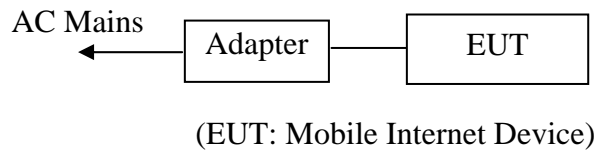

11.1.2.Shielding Room Test Setup Diagram

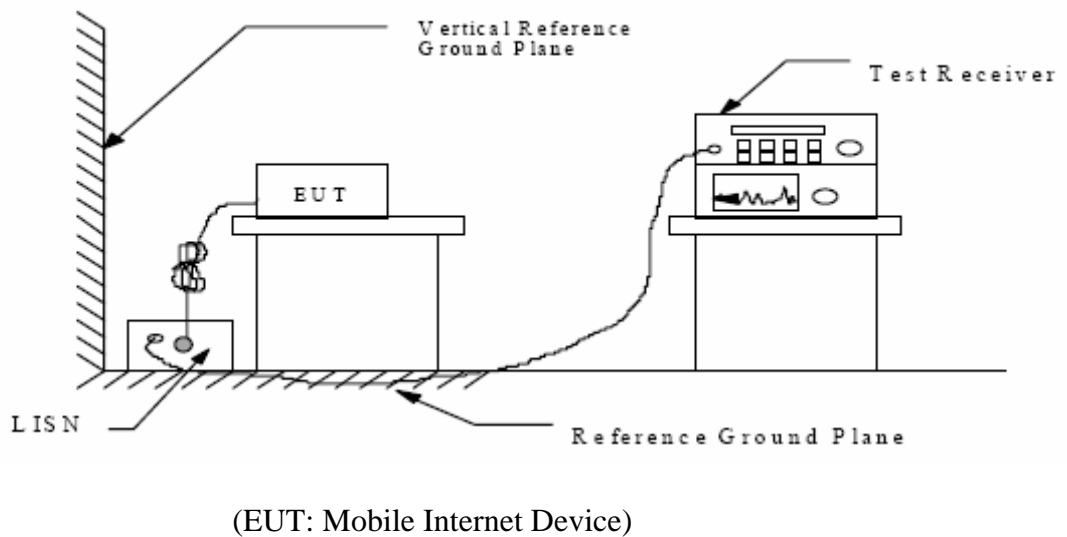

### 11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

\* Decreases with the logarithm of the frequency.



### 11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 11.3.1.Mobile Internet Device (EUT)

Model Number : P804  
Serial Number : N/A  
Manufacturer : Pipo Technology Co., Ltd.

### 11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX & Charging mode measure it.

### 11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

## 11.6. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>October 18, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>Mobile Internet Device</u>	Humidity:	<u>50%</u>
Model No.:	<u>P804</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX &amp; Charging</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Line
0.169760	48.70	65	-16.3	QP	Neutral
0.428605	39.70	57	-17.6	QP	
0.170439	35.20	55	-19.7	AV	
0.426898	27.10	47	-20.2	AV	
0.169760	48.70	65	-16.3	QP	Live
0.428605	39.70	57	-17.6	QP	
0.170439	35.20	55	-19.7	AV	
0.426898	27.10	47	-20.2	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.  
The spectral diagrams are attached as below.


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Mobile internet device M/N:P804  
 Manufacturer: Pipo  
 Operating Condition: Charging & Tx  
 Test Site: 1#Shielding Room  
 Operator: Star  
 Test Specification: N 120V/60Hz  
 Comment: Report No.:ATE20122381  
 Start of Test: 10/18/2012 / 4:21:08PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

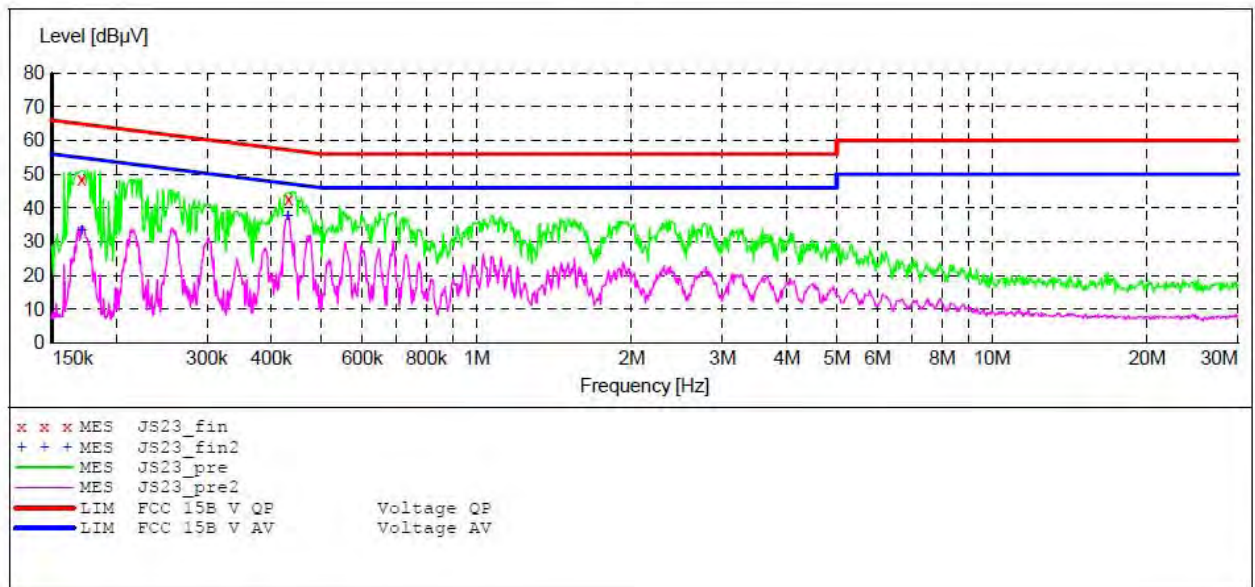

**MEASUREMENT RESULT: "JS23\_fin"**

10/18/2012 4:21PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.171121	48.40	11.1	65	16.5	QP	N	GND
0.432041	42.80	11.9	57	14.4	QP	N	GND

**MEASUREMENT RESULT: "JS23\_fin2"**

10/18/2012 4:21PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.171121	33.20	11.1	55	21.7	AV	N	GND
0.430320	37.70	11.9	47	9.5	AV	N	GND




**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Mobile internet device M/N:P804  
 Manufacturer: Pipo  
 Operating Condition: Charging & Tx  
 Test Site: 1#Shielding Room  
 Operator: Star  
 Test Specification: L 120V/60Hz  
 Comment: Report No.:ATE20122381  
 Start of Test: 10/18/2012 / 4:22:25PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

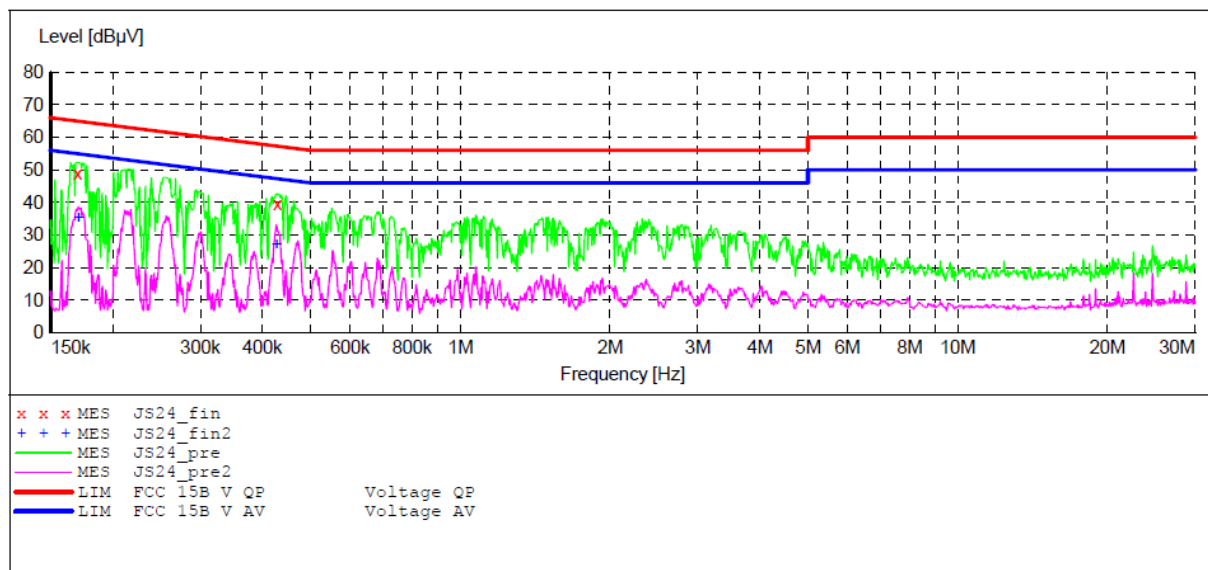

**MEASUREMENT RESULT: "JS24\_fin"**

10/18/2012 4:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.169760	48.70	11.1	65	16.3	QP	L1	GND
0.428605	39.70	11.9	57	17.6	QP	L1	GND

**MEASUREMENT RESULT: "JS24\_fin2"**

10/18/2012 4:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.170439	35.20	11.1	55	19.7	AV	L1	GND
0.426898	27.10	11.9	47	20.2	AV	L1	GND


## 12. ANTENNA REQUIREMENT

### 12.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 12.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

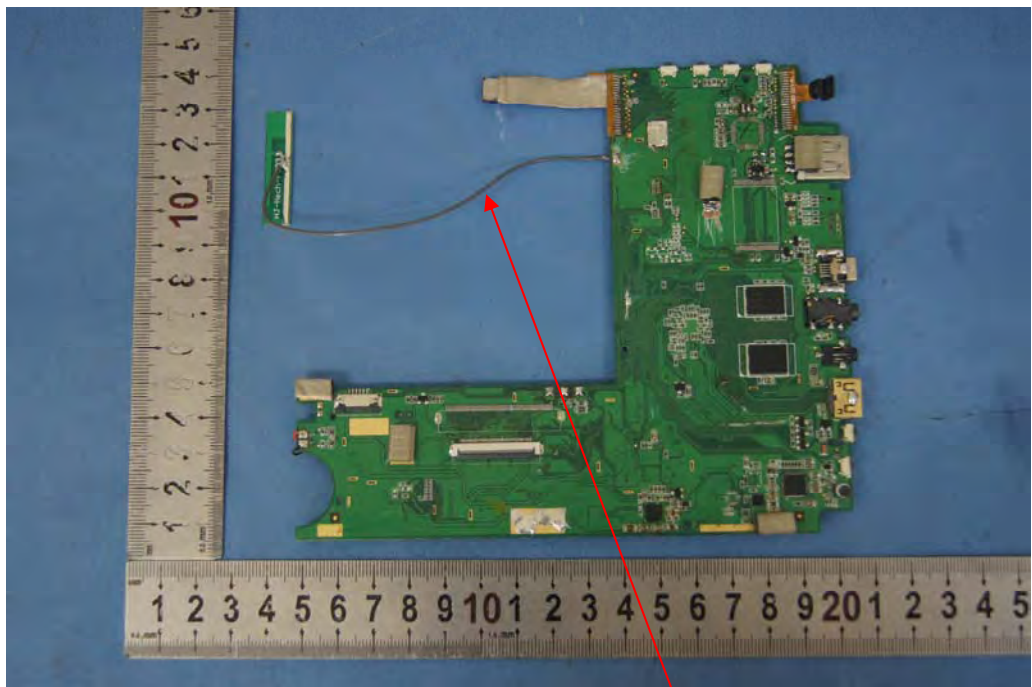

Antenna