



GSM 850-Right Head Cheek High CH251.....	3
GSM 850-Right Head Tilted High CH251.....	5
GSM 850-Left Head Cheek High CH251	6
GSM 850-Left Head Tilted High CH251.....	7
PCS-1900-Right Head Cheek High CH810	8
PCS-1900-Right Head Tilted High CH810	9
PCS 1900-Left Head Cheek High CH810	11
PCS 1900-Left Head Tilted High CH810	12
GSM 850-Body Worn Up High CH251.....	13
GSM 850- Body Worn Down High CH251	14
GPRS 850- Body Worn Up High CH251.....	15
GPRS 850- Body Worn Down High CH251	16
PCS1900- Body Worn Up High CH810.....	18
PCS1900- Body Worn Down High CH810	19
GPRS1900- Body Worn Up High CH810.....	21
GPRS1900- Body Worn Down High CH810	22
GPRS 850- Body Worn display screen Down High CH251	24
GPRS1900- Body Worn display screen Down High CH810	25
WCDMA Band II-Right Head Cheek High CH9538	26
WCDMA Band II-Right Head Tilted High CH9538	27
WCDMA Band II-Left Head Cheek High CH9538	28
WCDMA Band II-Left Head Tilted High CH9538	30
WCDMA Band II-Body Worn Up High CH9538.....	31
WCDMA Band II- Body Worn Down High CH9538.....	32
WCDMA Band II- Body Worn display screen Down High CH9538	34
IEEE 802.11b-Right Head Cheek High CH11.....	35
IEEE 802.11b-Right Head Tilted High CH11	36
IEEE 802.11b-Left Head Cheek High CH11.....	37
IEEE 802.11b-Left Head Tilted High CH11	38
IEEE 802.11b- Body Worn Up High CH11	39
IEEE 802.11b- Body Worn Down High CH11.....	40
IEEE 802.11b- Body Worn display screen Down High CH11.....	41
GSM 850-Body-Hotspot Up High CH251	42
GSM 850-Body-Hotspot Down High CH251	43
GSM 850-Body-Hotspot Bottom High CH251	44
GSM 850-Body-Hotspot Right High CH251	45
GSM 850-Body-Hotspot Left High CH251	46
GPRS850-Body-Hotspot Up High CH251.....	47
GPRS850-Body-Hotspot Down High CH251	48
GPRS850-Body-Hotspot Bottom High CH251	49
GPRS850-Body-Hotspot Right High CH251.....	50
GPRS850-Body-Hotspot Left High CH251.....	51



PCS-1900-Body-Hotspot Up High CH810	52
PCS-1900-Body-Hotspot Down High CH810	53
PCS-1900-Body-Hotspot Bottom High CH810	54
PCS-1900-Body-Hotspot Right High CH810	55
PCS 1900-Body-Hotspot Left High CH810	56
GPRS-1900-Body-Hotspot Up High CH810	57
GPRS-1900-Body-Hotspot Down High CH810	58
GPRS-1900-Body-Hotspot Bottom High CH810	59
GPRS-1900-Body-Hotspot Right High CH810	60
GPRS 1900-Body-Hotspot Left High CH810	61
WCDMA Band II Body-Hotspot Up High CH9538	62
WCDMA Band II Body-Hotspot Down High CH9538	63
WCDMA Band II Body-Hotspot Bottom High CH9538	64
WCDMA Band II Body-Hotspot Right High CH9538	65
WCDMA Band II Body-Hotspot Left High CH9538	66
IEEE 802.11b Body-Hotspot UP High CH11	67
IEEE 802.11b Body-Hotspot Down High CH11	68
IEEE 802.11b Body-Hotspot Top High CH11	69
IEEE 802.11b Body-Hotspot Left High CH11	70
GSM 850- Body Hotspot display screen Up High CH251	71
GSM 850- Body Hotspot display screen Down High CH251	72
GSM850-Body-Hotspot display screen Right High CH251	73
GPRS850-Body-Hotspot display screen Up High CH251	74
GPRS850-Body-Hotspot display screen Down High CH251	75
GPRS850-Body-Hotspot display screen Right High CH251	76
PCS-1900-Body-Hotspot display screenUp High CH810	77
PCS-1900-Body-Hotspot display screenDown High CH810	78
PCS-1900-Body-Hotspot display screen Right High CH810	79
GPRS-1900-Body-Hotspot display screen Up High CH810	80
GPRS-1900-Body-Hotspot display screen Down High CH810	81
GPRS-1900-Body-Hotspot display screen Right High CH810	82
WCDMA Band II Body-Hotspot display screen Up High CH9538	83
WCDMA Band II Body-Hotspot display screen Down High CH9538	84
WCDMA Band II Body-Hotspot display screen Right High CH9538	85
IEEE 802.11b Body-Hotspot display screen UP High CH11	86
IEEE 802.11b Body-Hotspot display screen Down High CH11	87



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Right Head Cheek High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Cheek High CH251/Area Scan (51x81x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.835 mW/g

GSM850/Right Head Cheek High CH251/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 11.332 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.237mW/g

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.857 mW/g

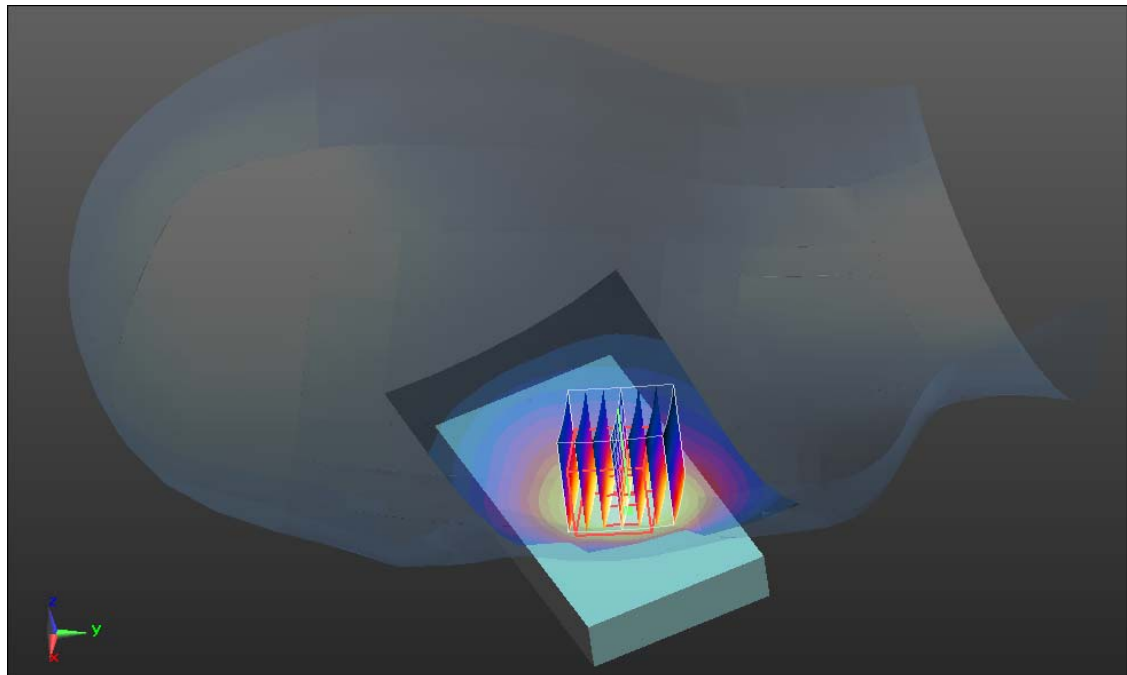

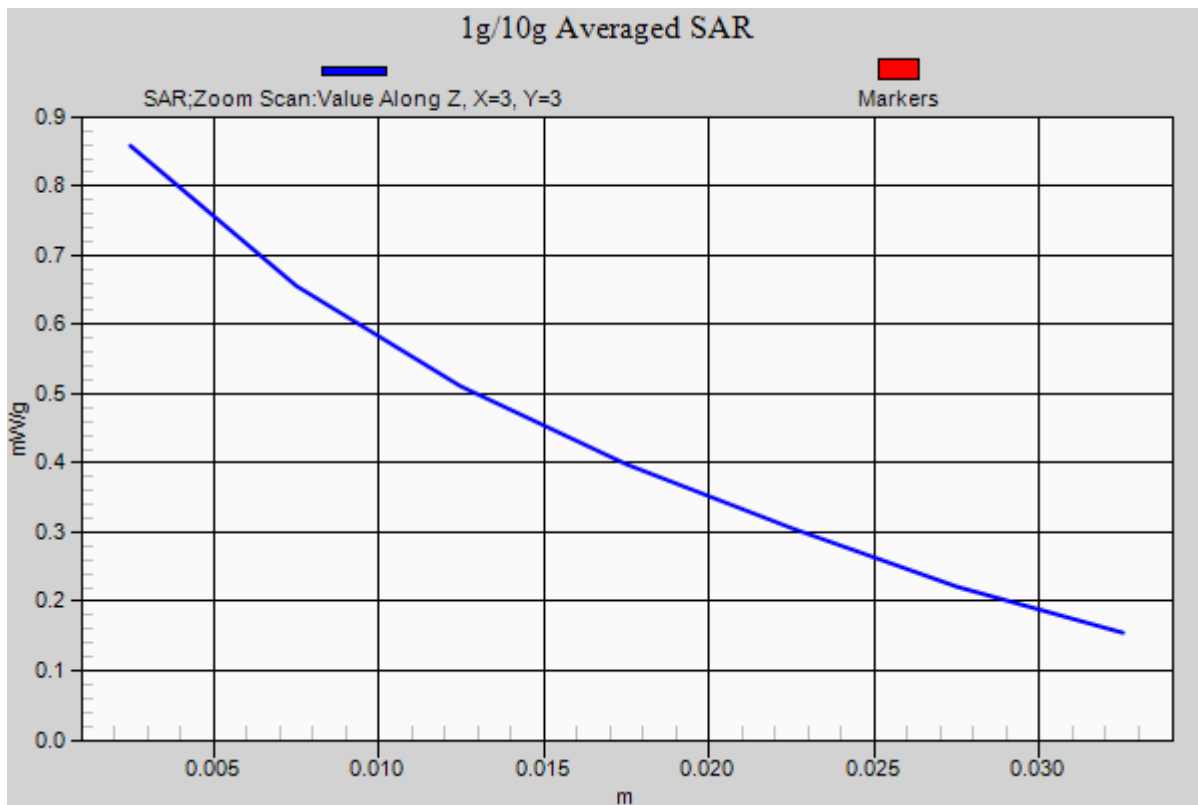



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Right Head Tilted High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Tilted High CH251/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.454 mW/g

GSM850/Right Head Tilted High CH251/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.678 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.5280

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

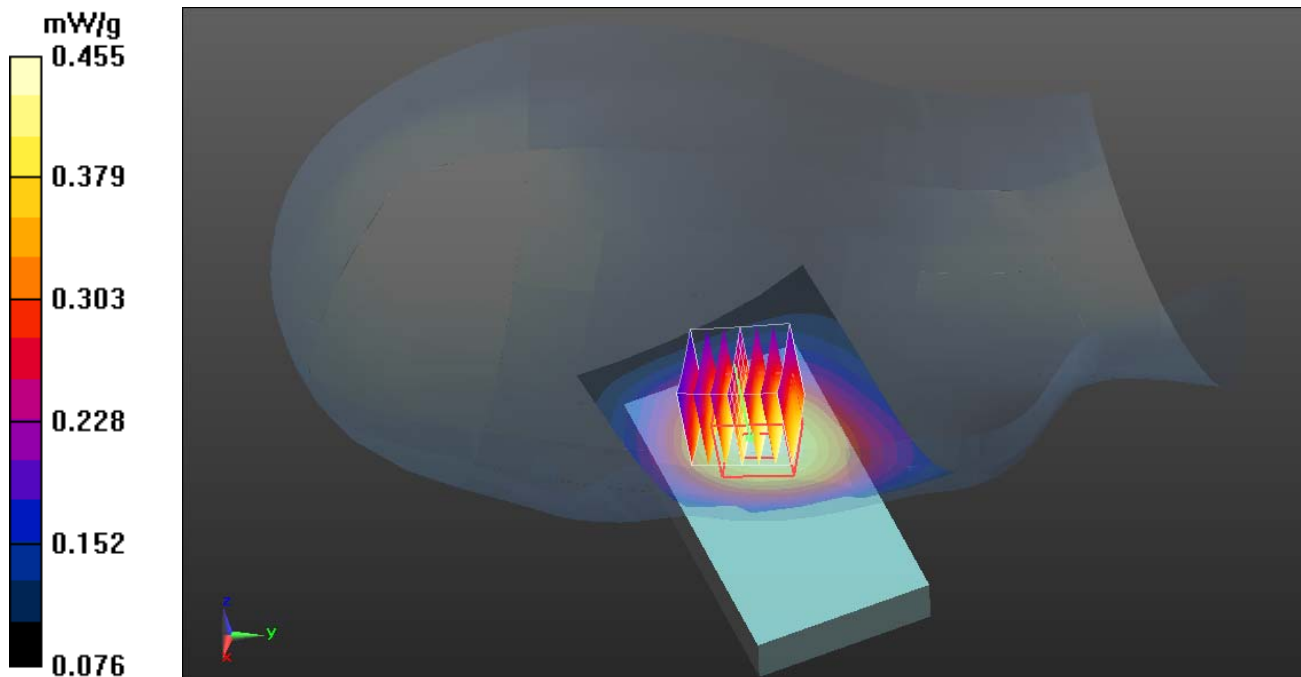



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Left Head Cheek High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Cheek High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.810 mW/g



GSM850/Left Head Cheek High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.826 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.226 mW/g

SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.419 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

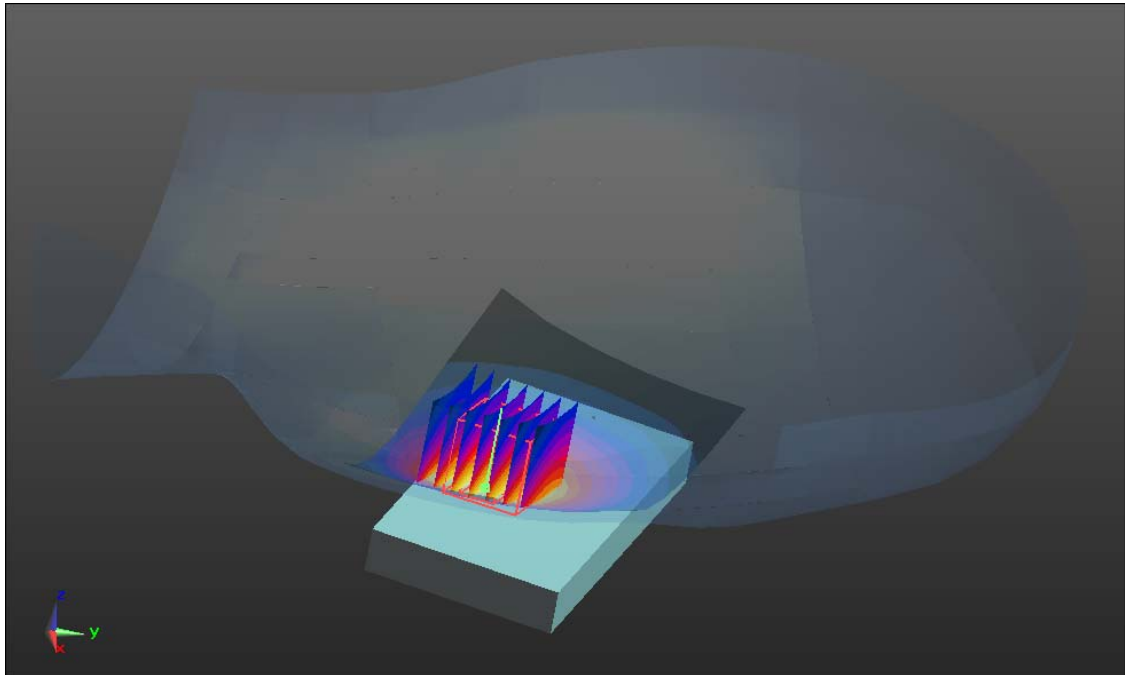



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Left Head Tilted High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Tilted High CH251/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.428 mW/g


GSM850/Left Head Tilted High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.763 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.5010

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

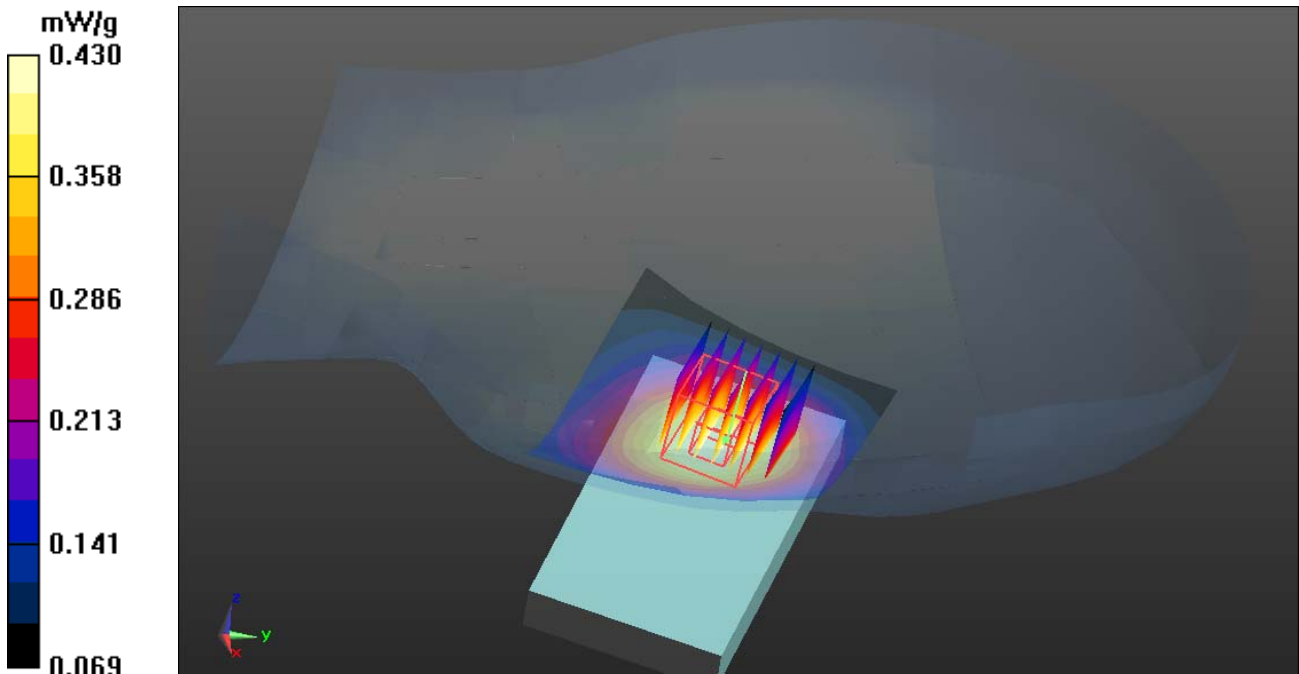



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Right Head Cheek High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek High CH810/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.627 mW/g


PCS1900/Right Head Cheek High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.306 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.655mW/g

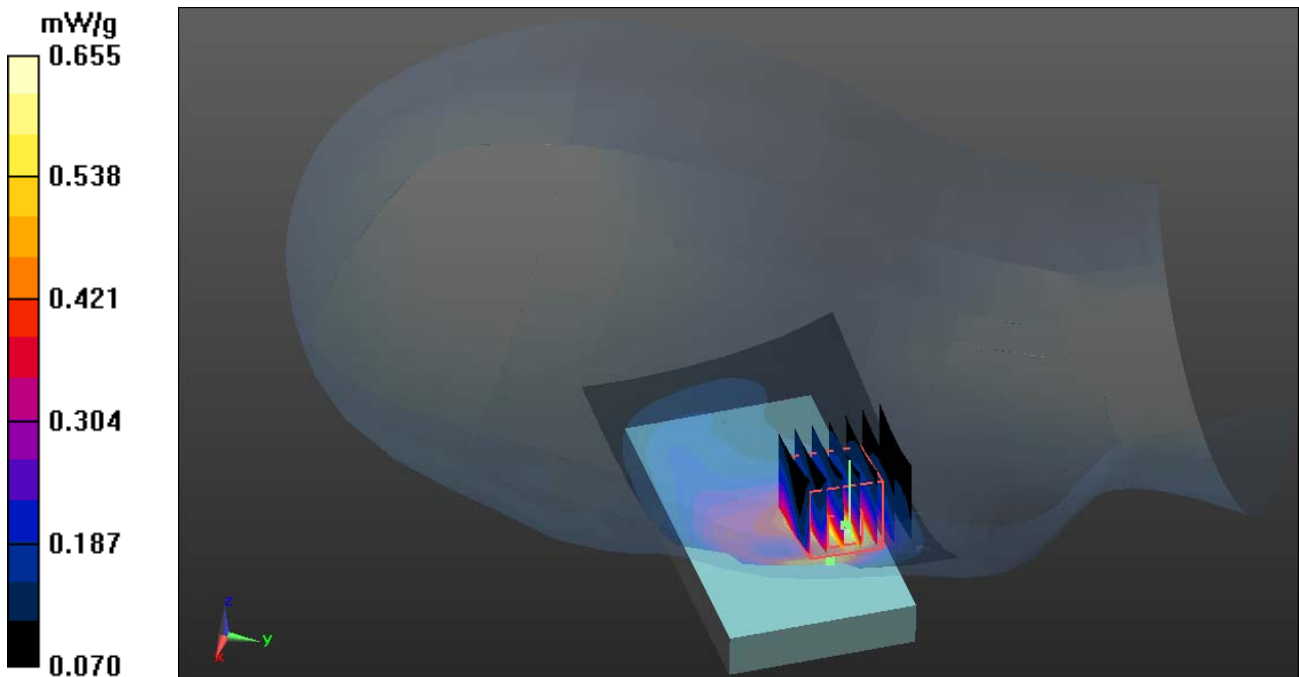



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Right Head Tilted High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.45\text{mho/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Tilted High CH810/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.703 mW/g


PCS1900/Right Head Tilted High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.947 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.456 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

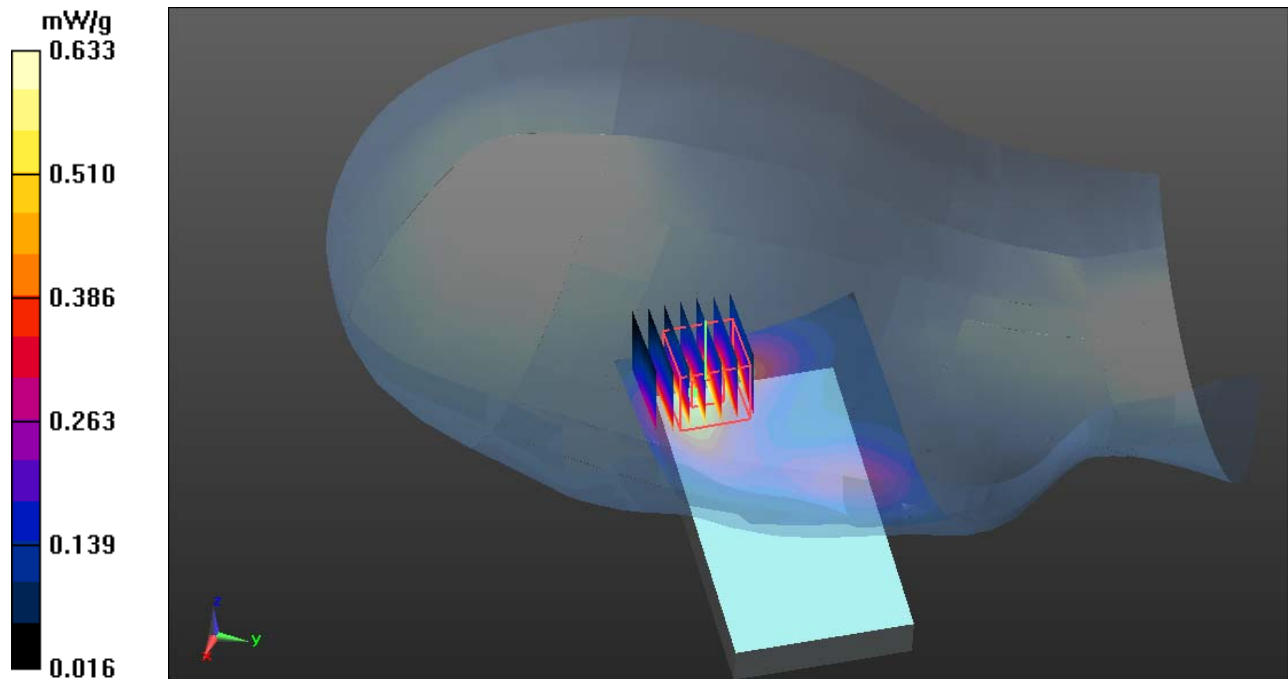

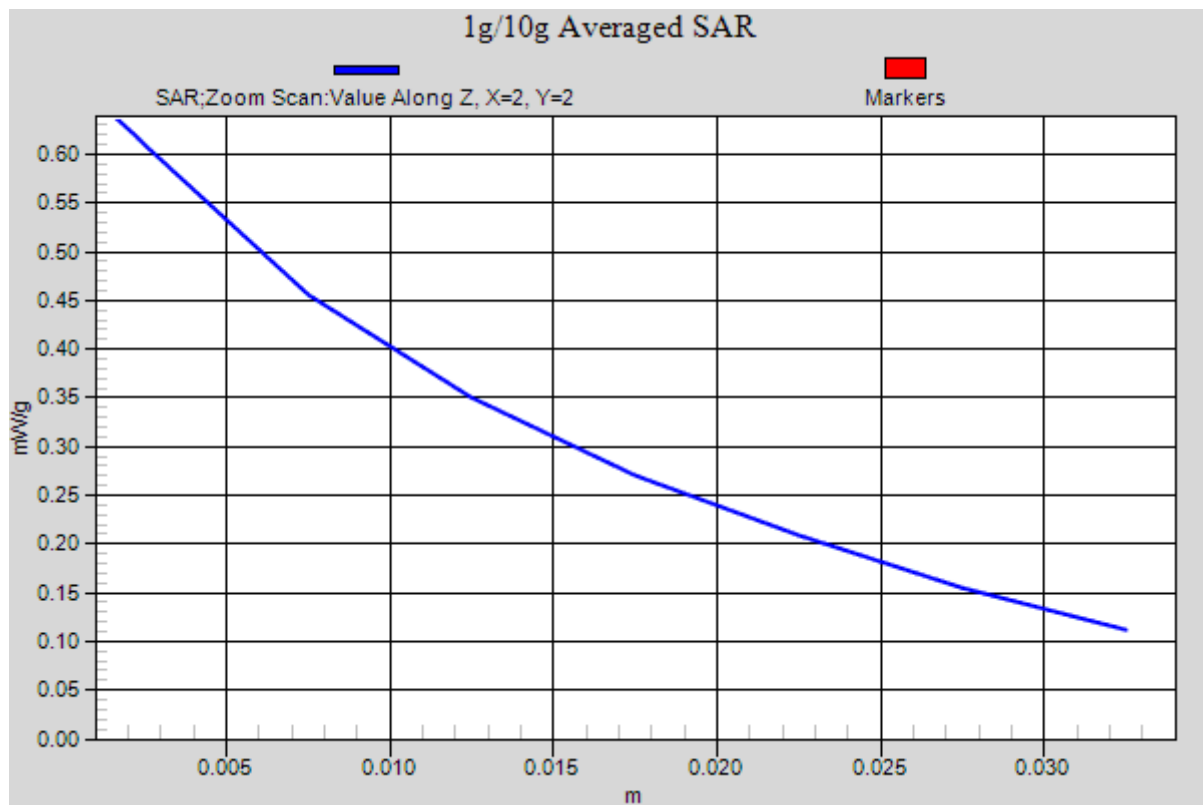



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS 1900-Left Head Cheek High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.45\text{mho/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Cheek High CH810/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.533 mW/g


PCS1900/Left Head Cheek High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.367 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.237mW/g

Maximum value of SAR (measured) = 0.628 mW/g

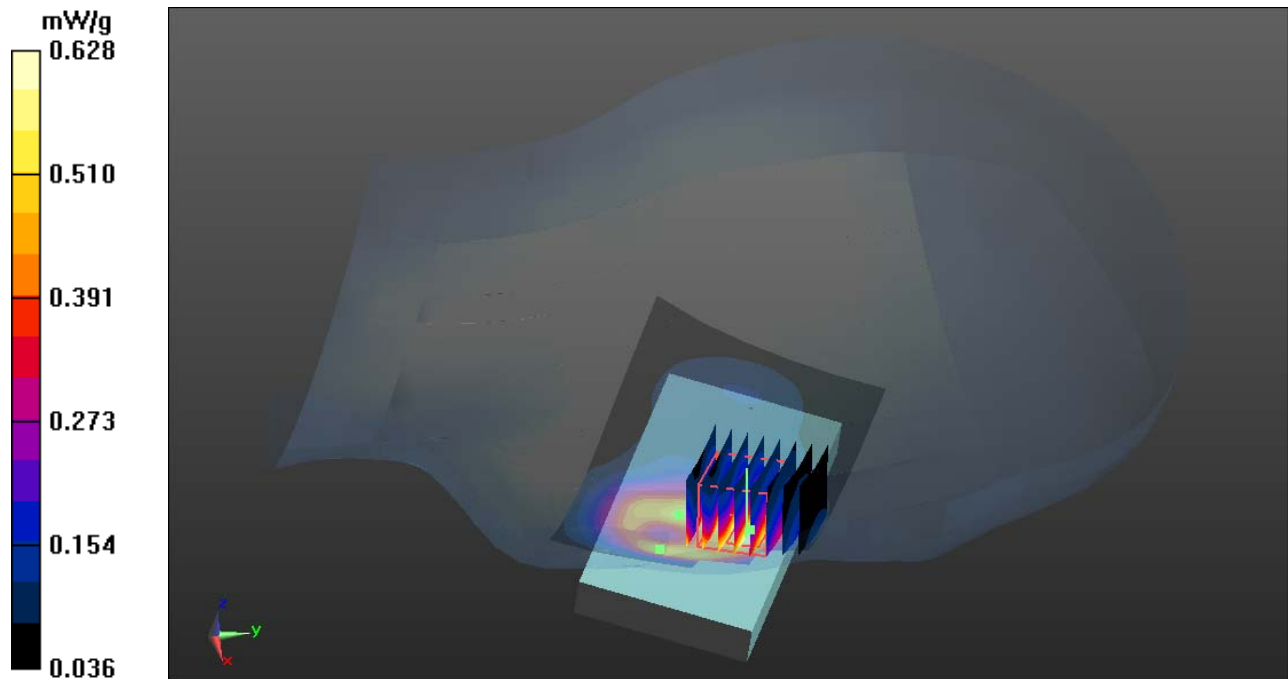



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS 1900-Left Head Tilted High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.45\text{mho/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Tilted High CH810/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.334 mW/g


PCS1900/Left Head Tilted High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

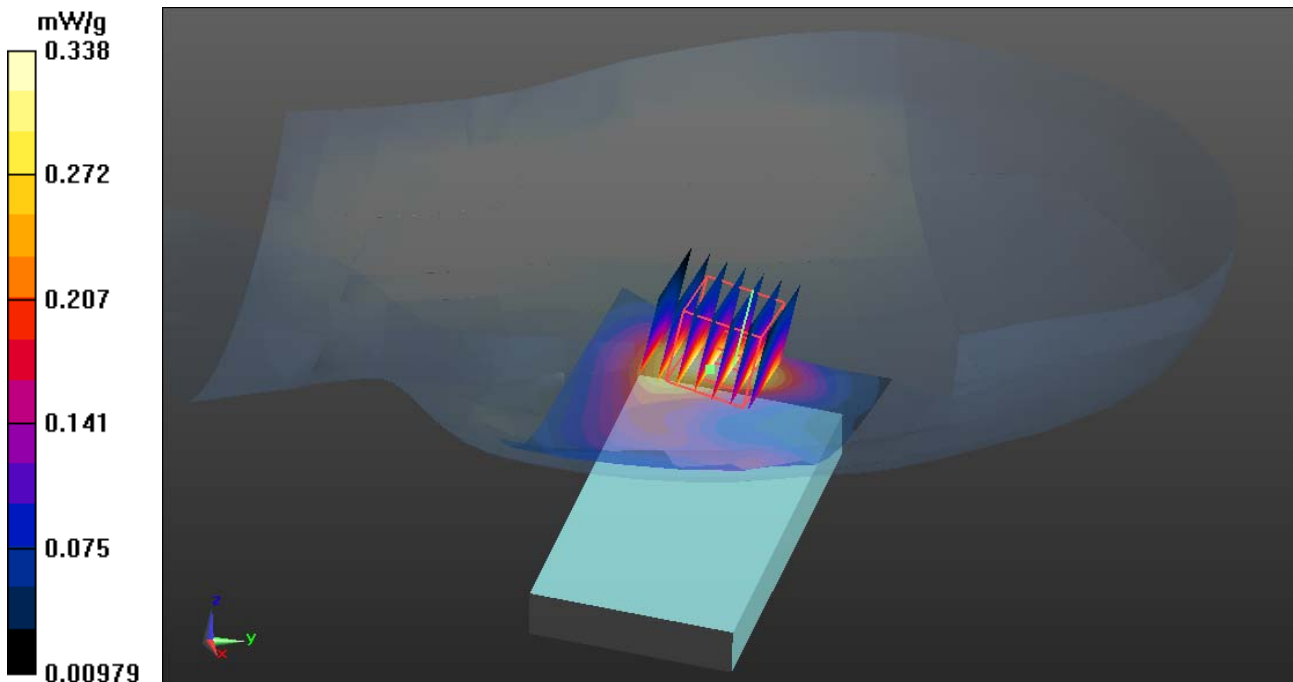



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Body Worn Up High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.746 mW/g


GSM 850/GSM850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.215 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.866 mW/g

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

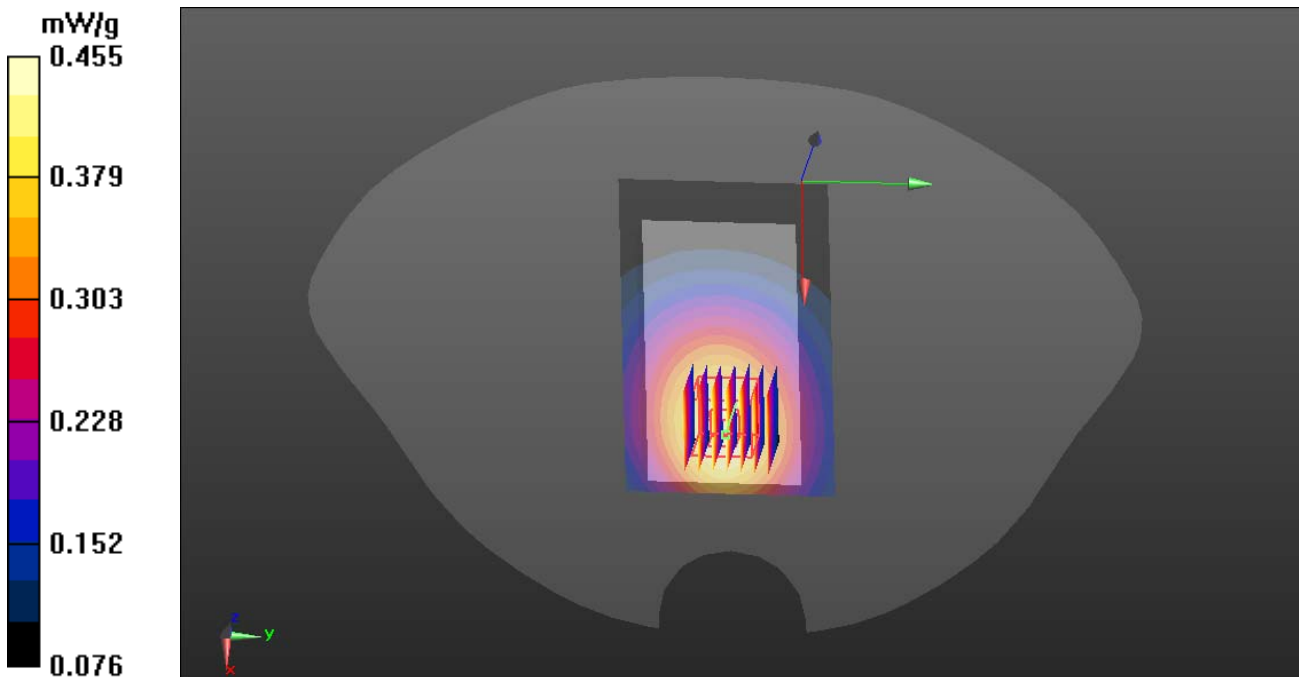



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850- Body Worn Down High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.671 mW/g


GSM 850/GSM850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.131 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.9390

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.678mW/g

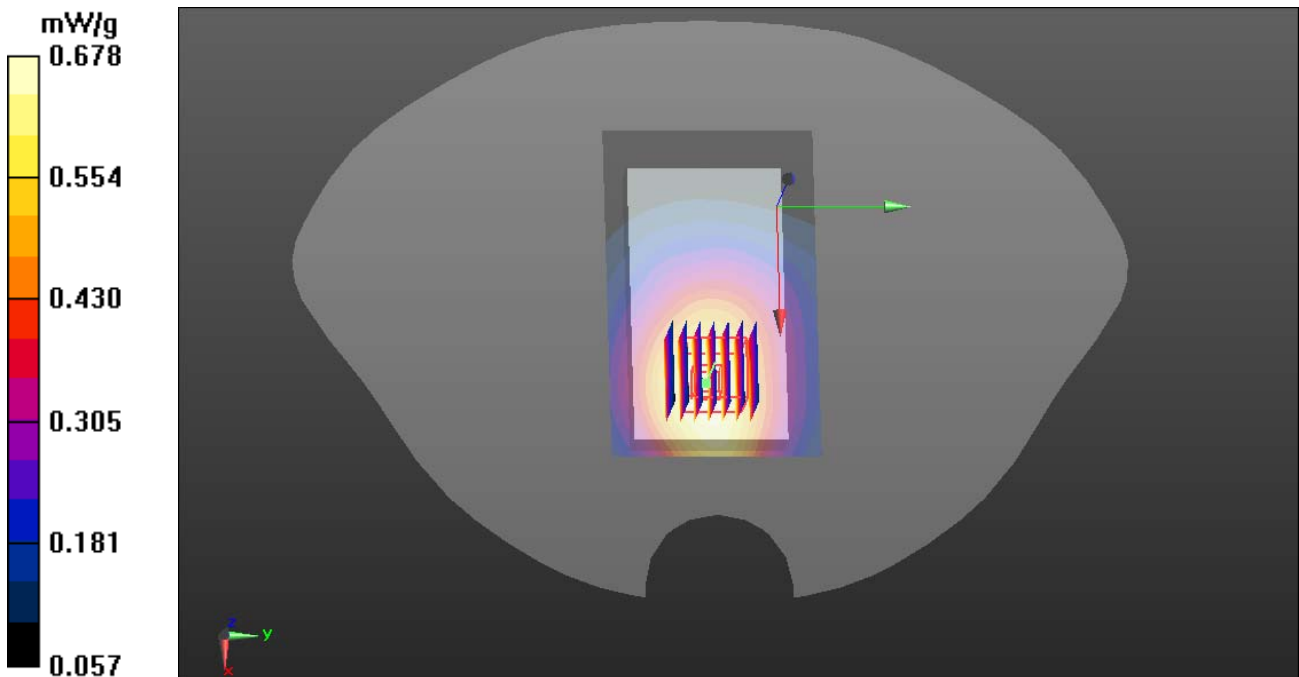



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS 850- Body Worn Up High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.527 mW/g


GPRS 850/GPRS850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.903 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.552 mW/g

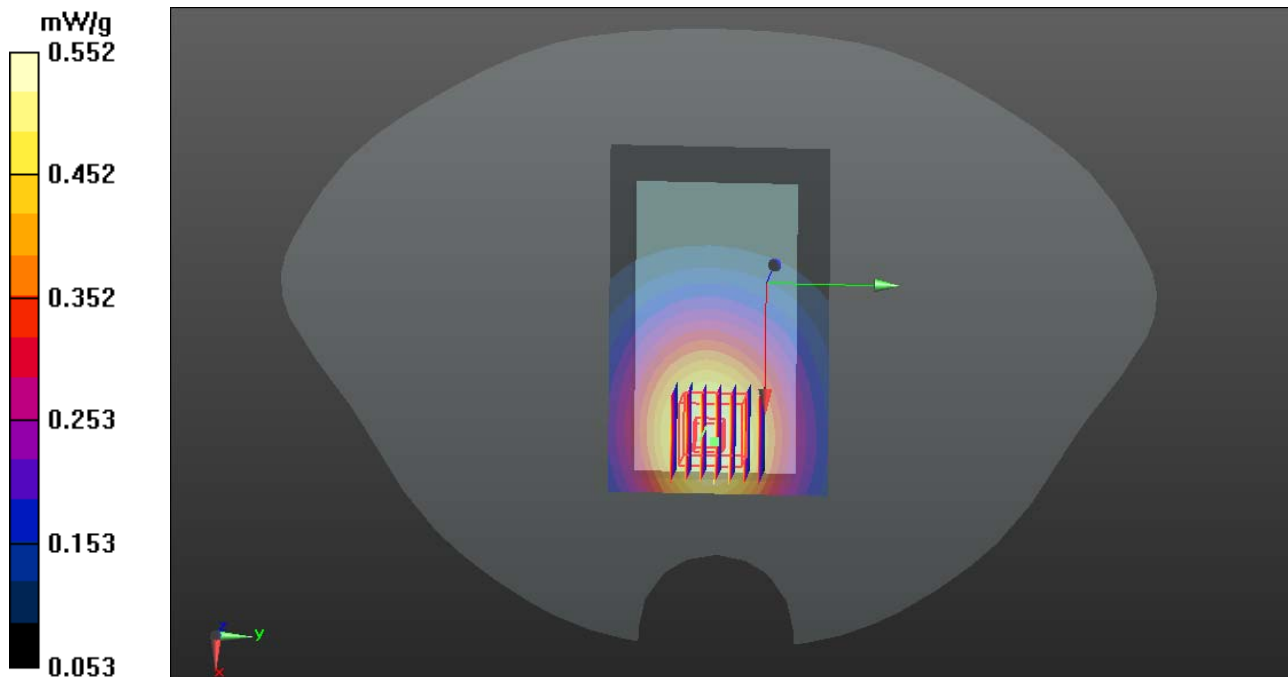



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS 850- Body Worn High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 mW/g

GPRS 850/GPRS850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm


Reference Value = 28.993 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.084 W/kg

SAR(1 g) = 0.541mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

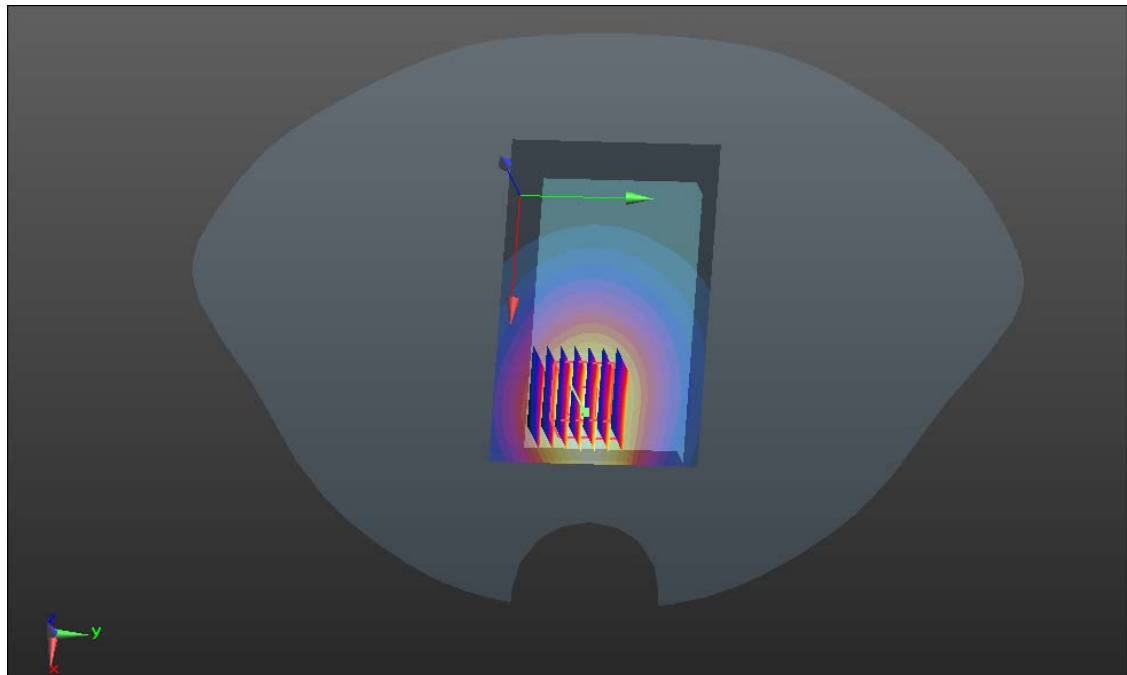

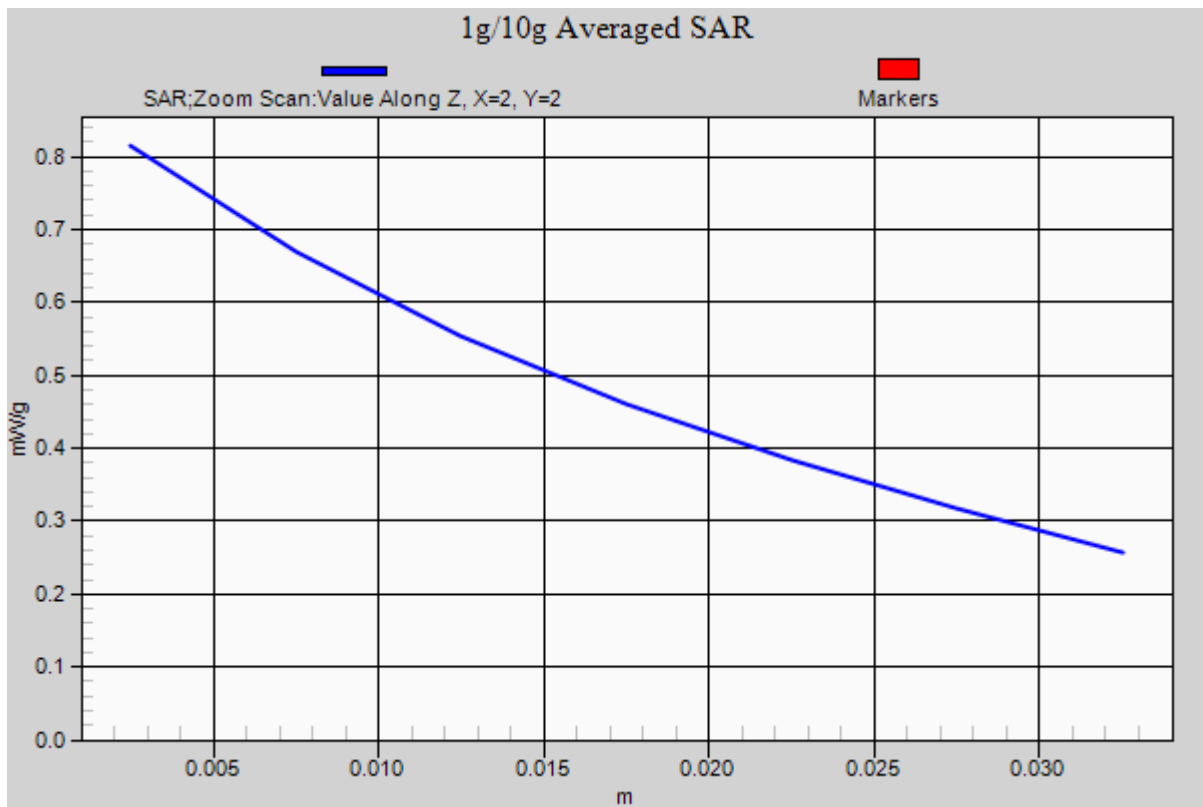



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS1900- Body Worn Up High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/ PCS1900 Body Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.380 mW/g


PCS1900/ PCS1900 Body Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.177 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

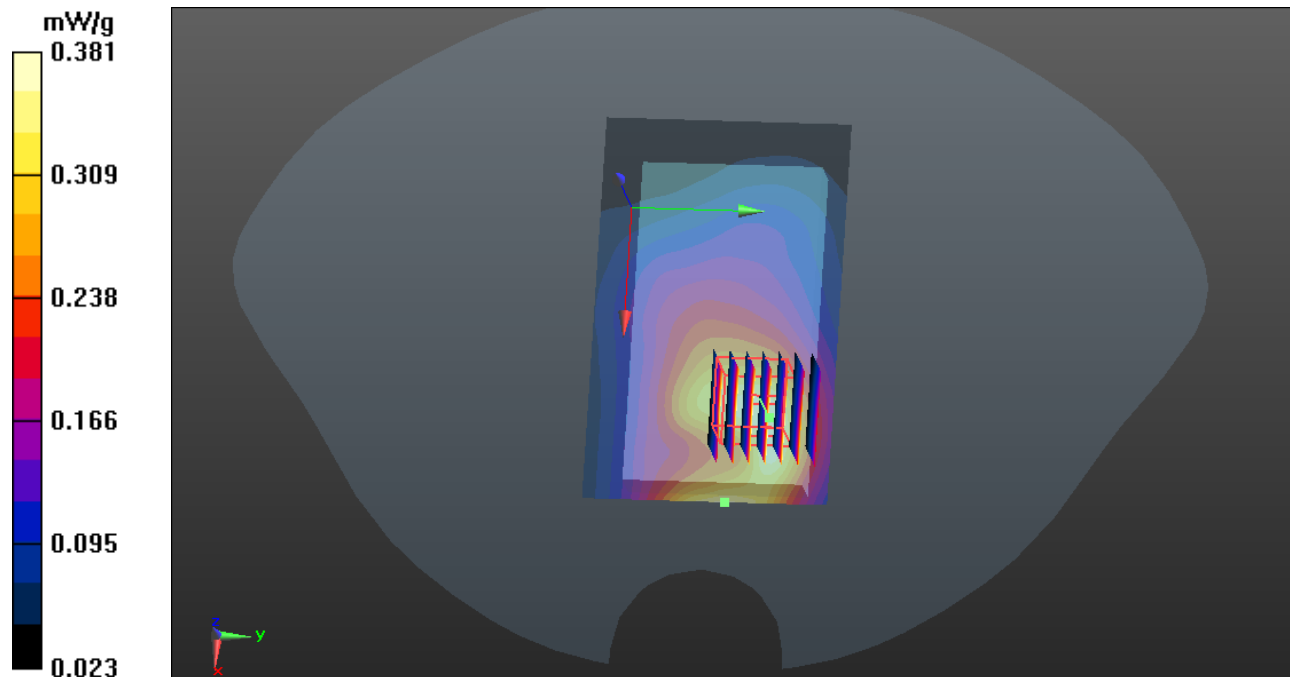



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS1900- Body Worn Down High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/ PCS1900 Body Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.423 mW/g

PCS1900/ PCS1900 Body Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.430mW/g

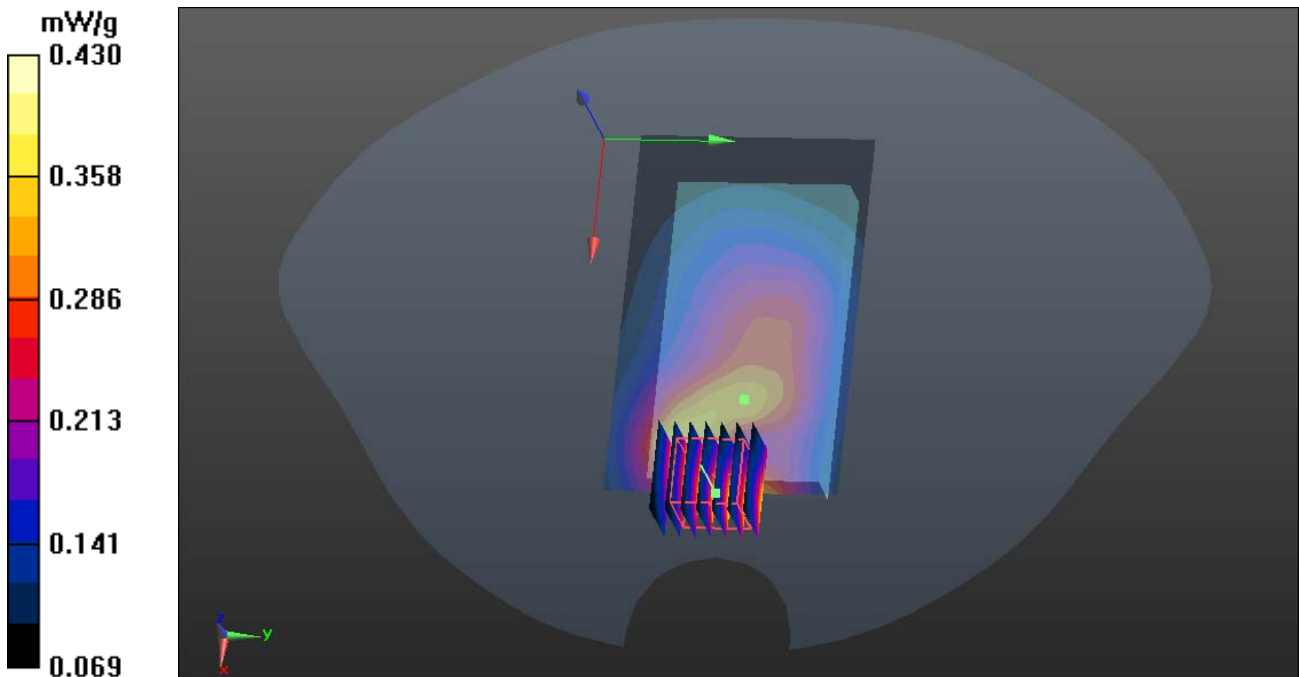

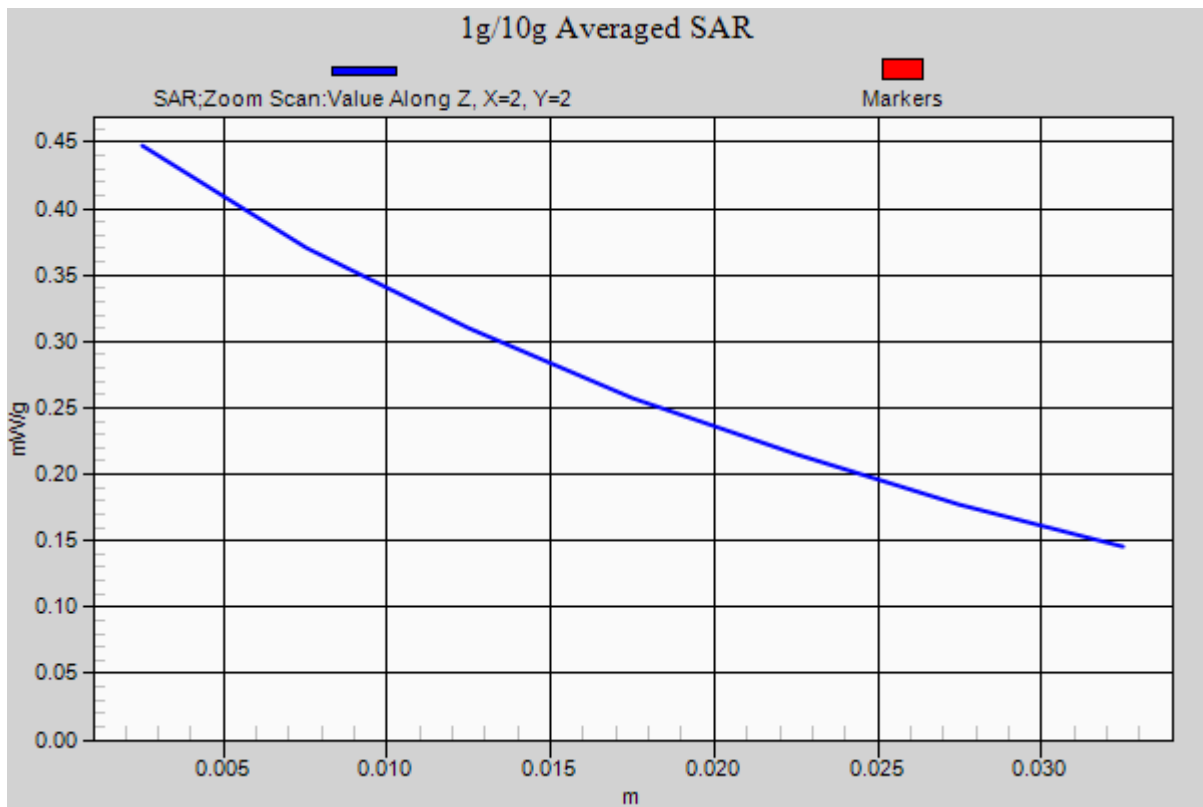



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS1900- Body Worn Up High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/GPRS1900 Body Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 mW/g

GPRS1900/GPRS1900 Body Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.728 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

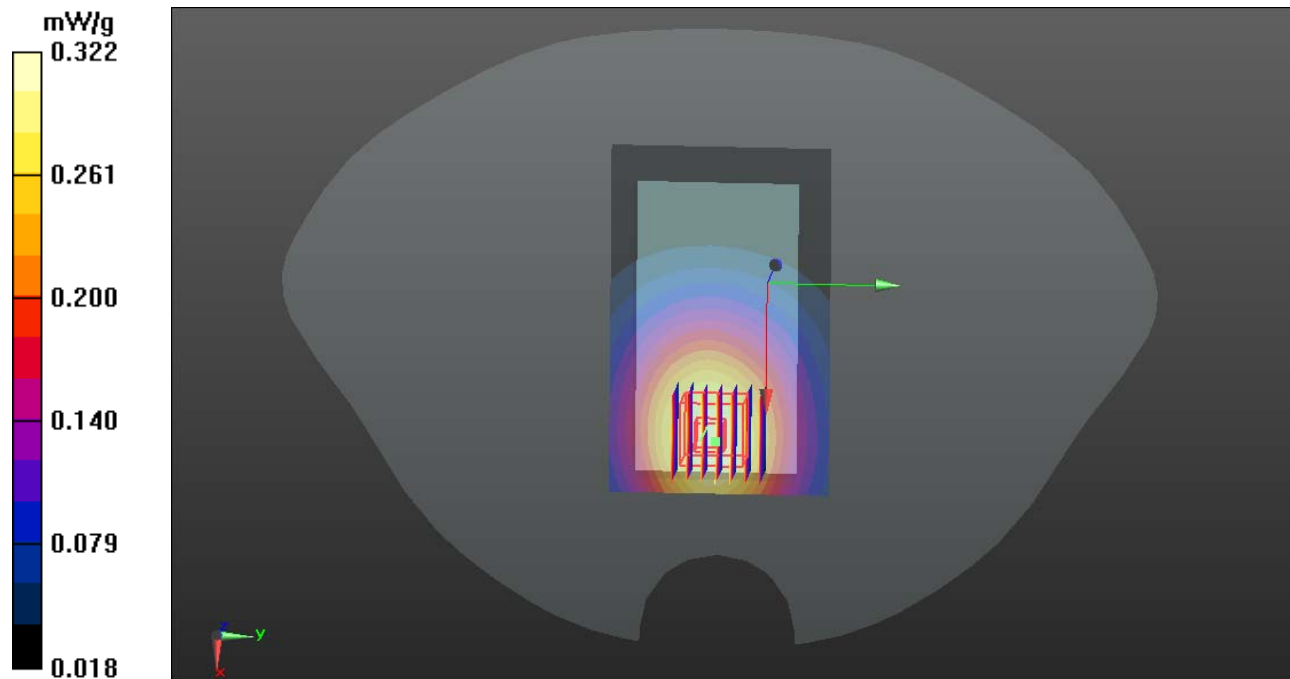



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS1900- Body Worn Down High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/GPRS1900 Body Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.461 mW/g

GPRS1900/GPRS1900 Body Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.020 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

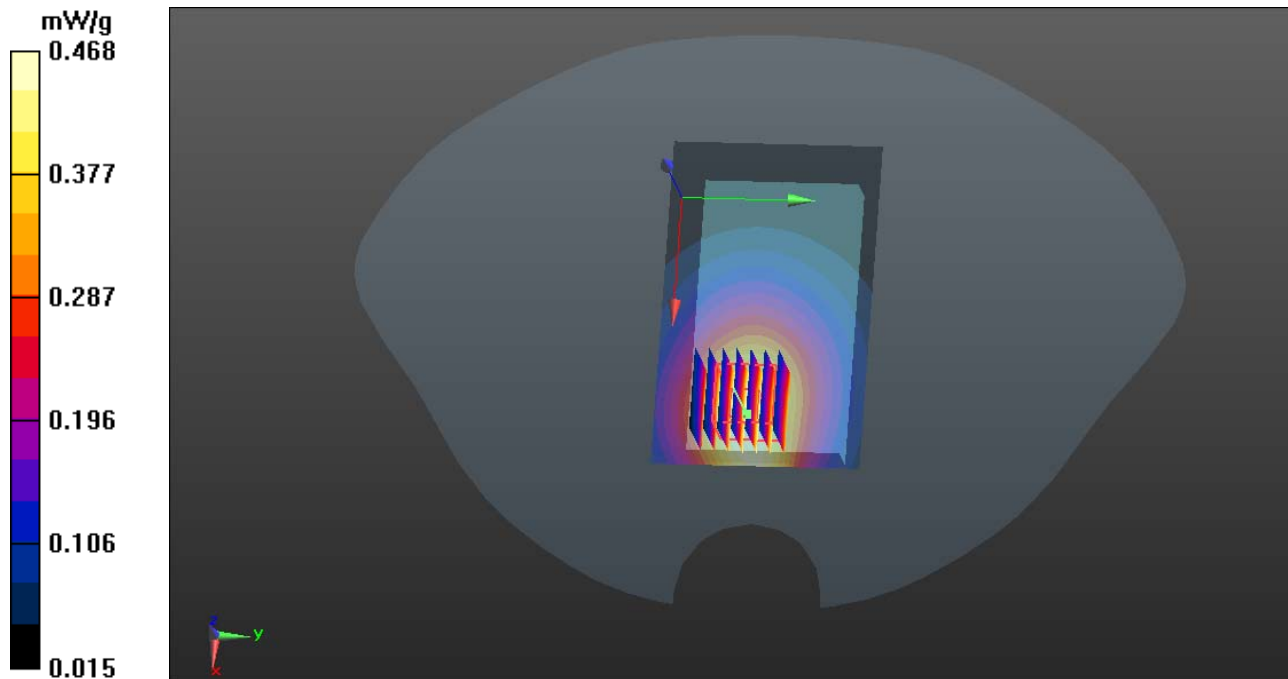

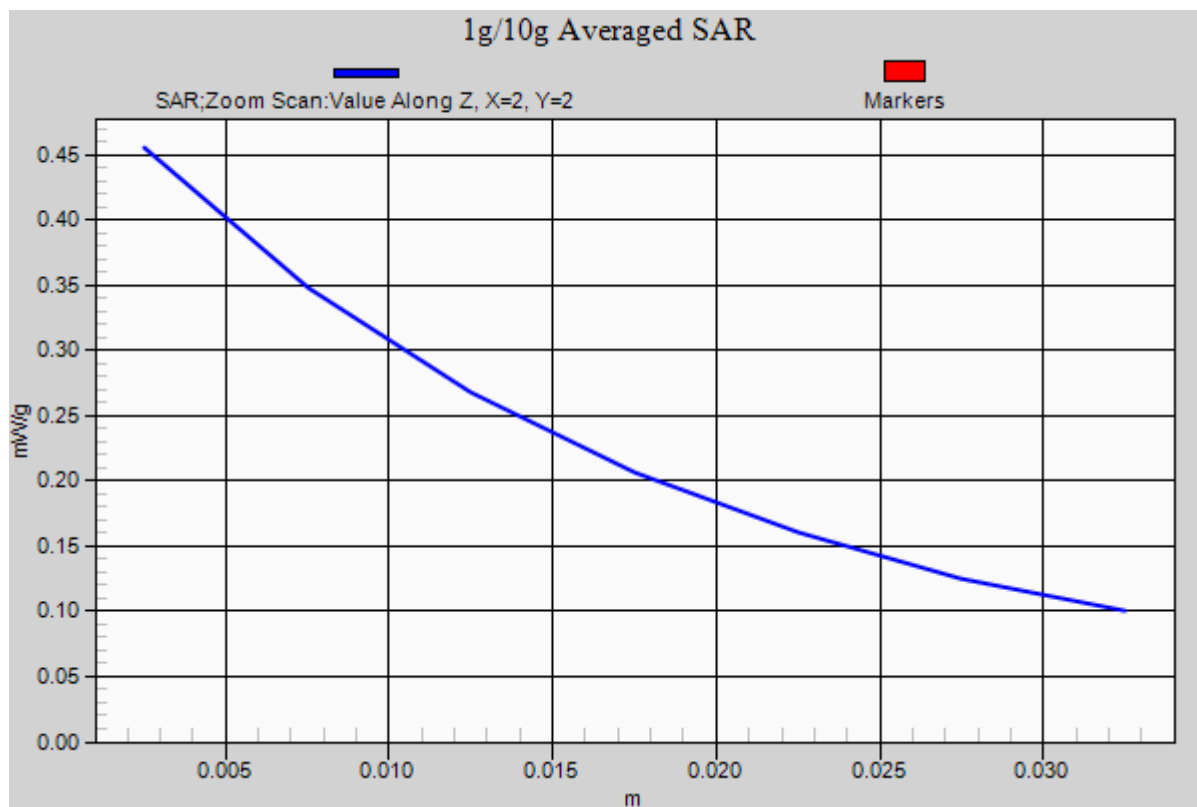



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS 850- Body Worn display screen Down High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body display screen Down High CH251/Area Scan (141x91x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.508 mW/g

GPRS 850/GPRS850 Body display screen Down High CH251/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.993 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.403mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

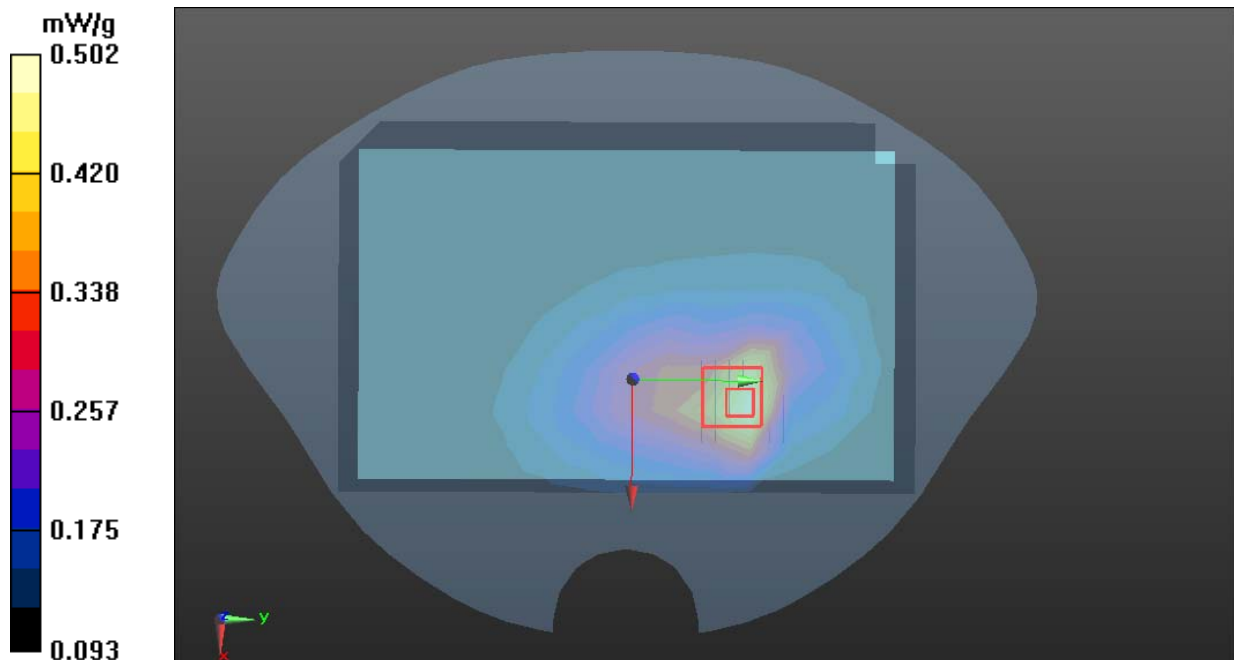



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS1900- Body Worn display screen Down High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/GPRS1900 Body display screen Down High CH810/Area Scan (141x91x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.401 mW/g

GPRS1900/GPRS1900 Body display screen Down High CH810/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.020 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

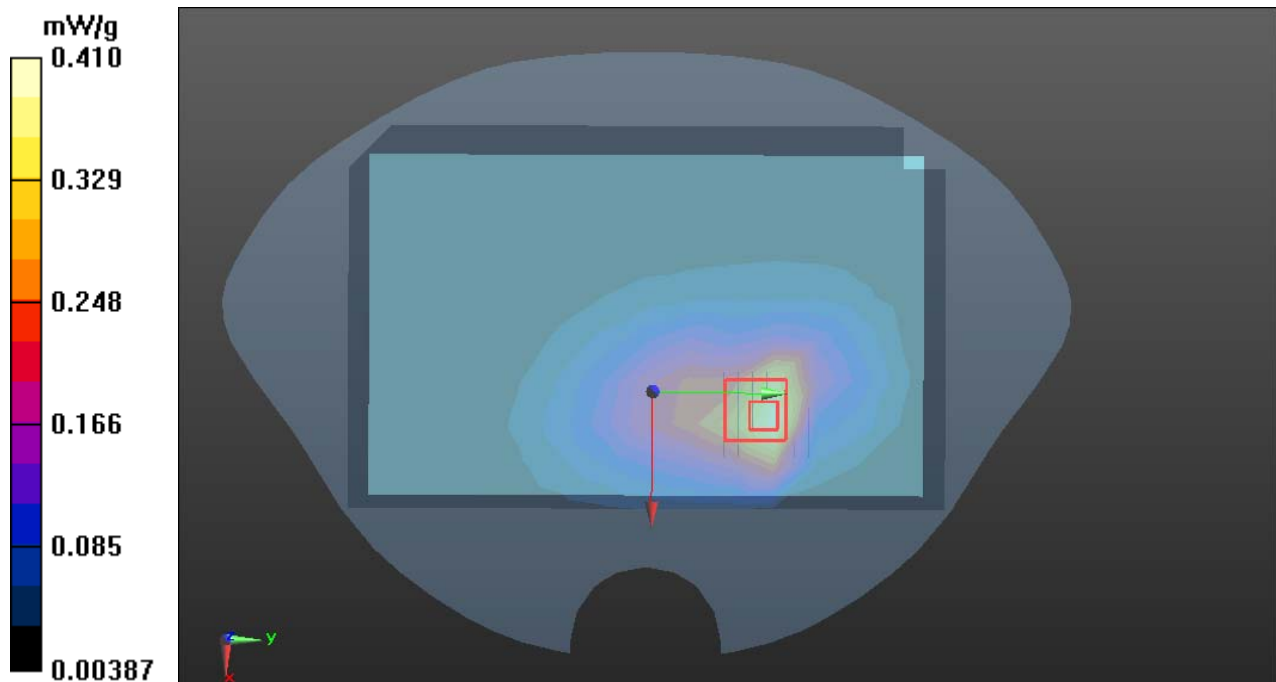



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II-Right Head Cheek High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Right Head Cheek High CH9538/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.806 W/kg


WCDMA/Right Head Cheek High CH9538/Zoom Scan (8x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.490 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.970 mW/g

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.371 mW/g

Maximum value of SAR (measured) = 0.766 W/kg

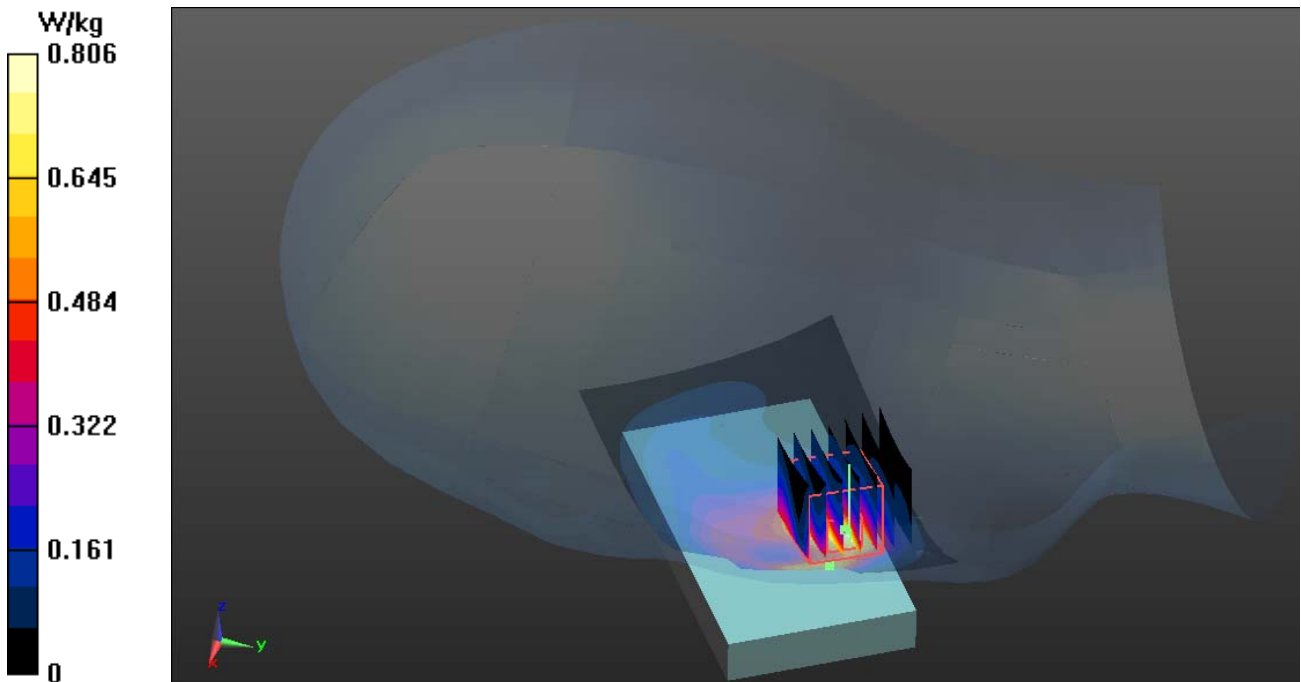



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II-Right Head Tilted High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Right Head Tilted High CH9538/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.451 W/kg


WCDMA/Right Head Tilted High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.918 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.585 mW/g

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.404 W/kg

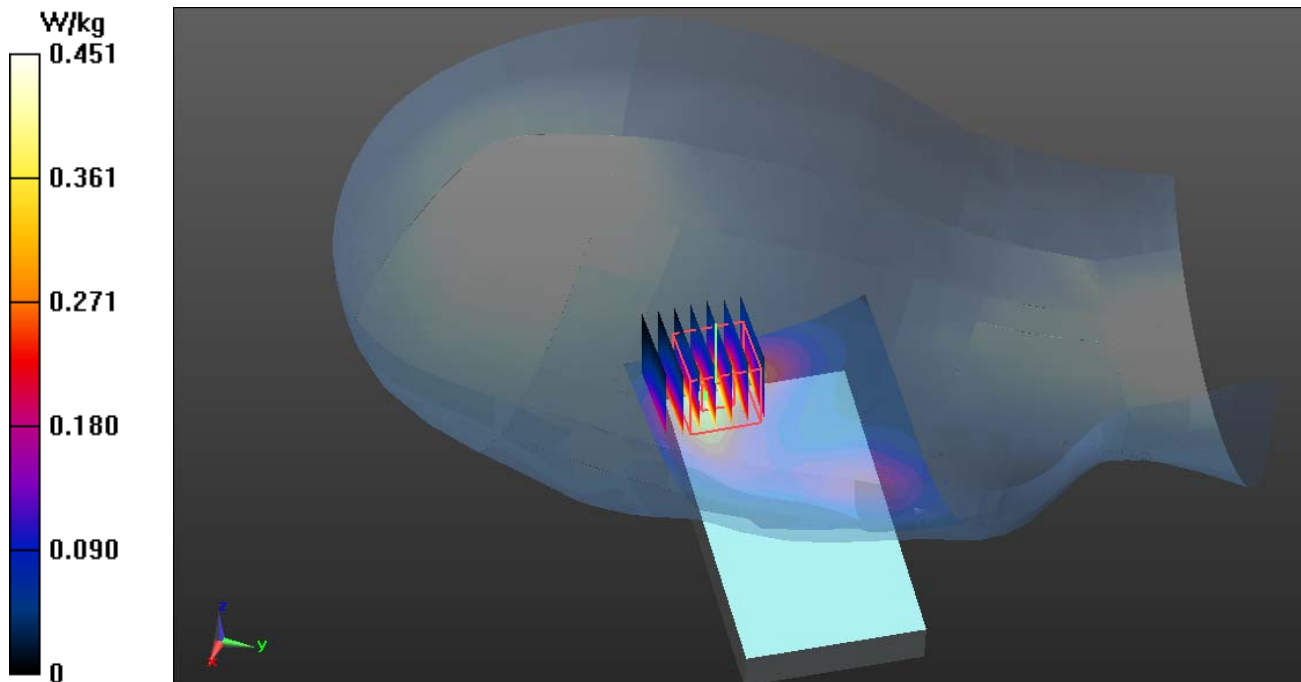



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II-Left Head Cheek High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Left Head Cheek High CH9538/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.952 W/kg


WCDMA/Left Head Cheek High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 10.564 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.270 mW/g

SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 1.01 W/kg

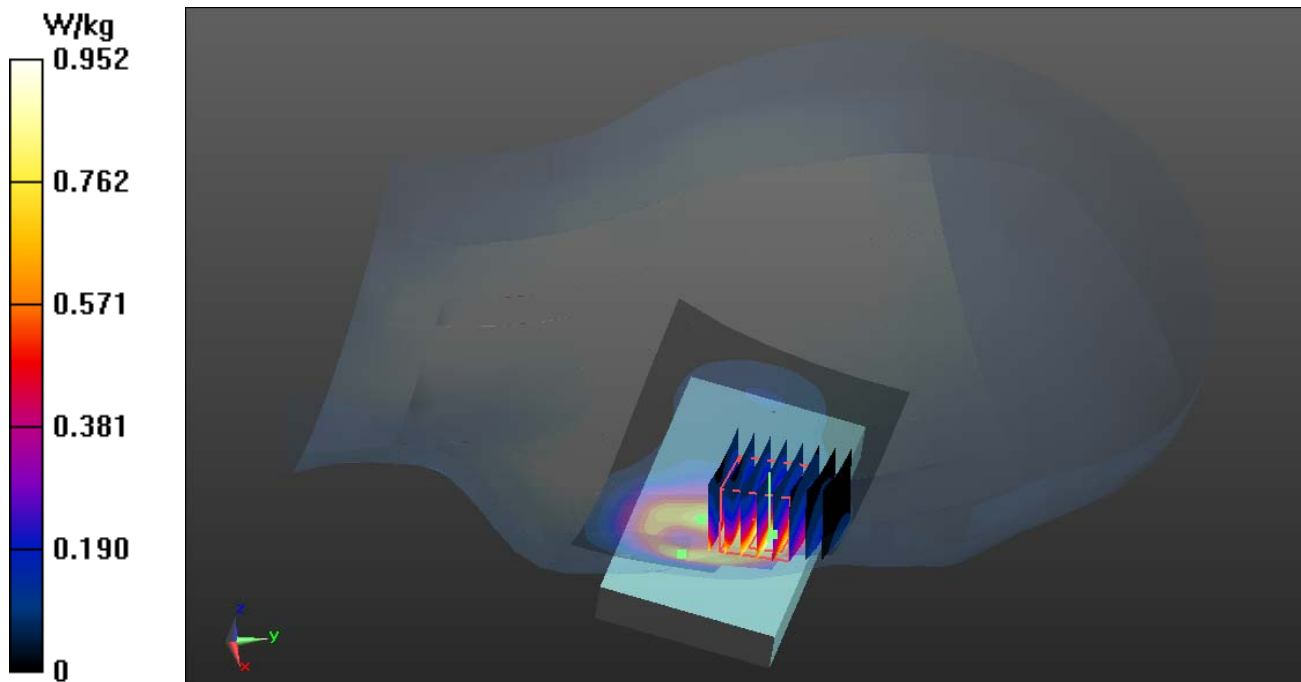

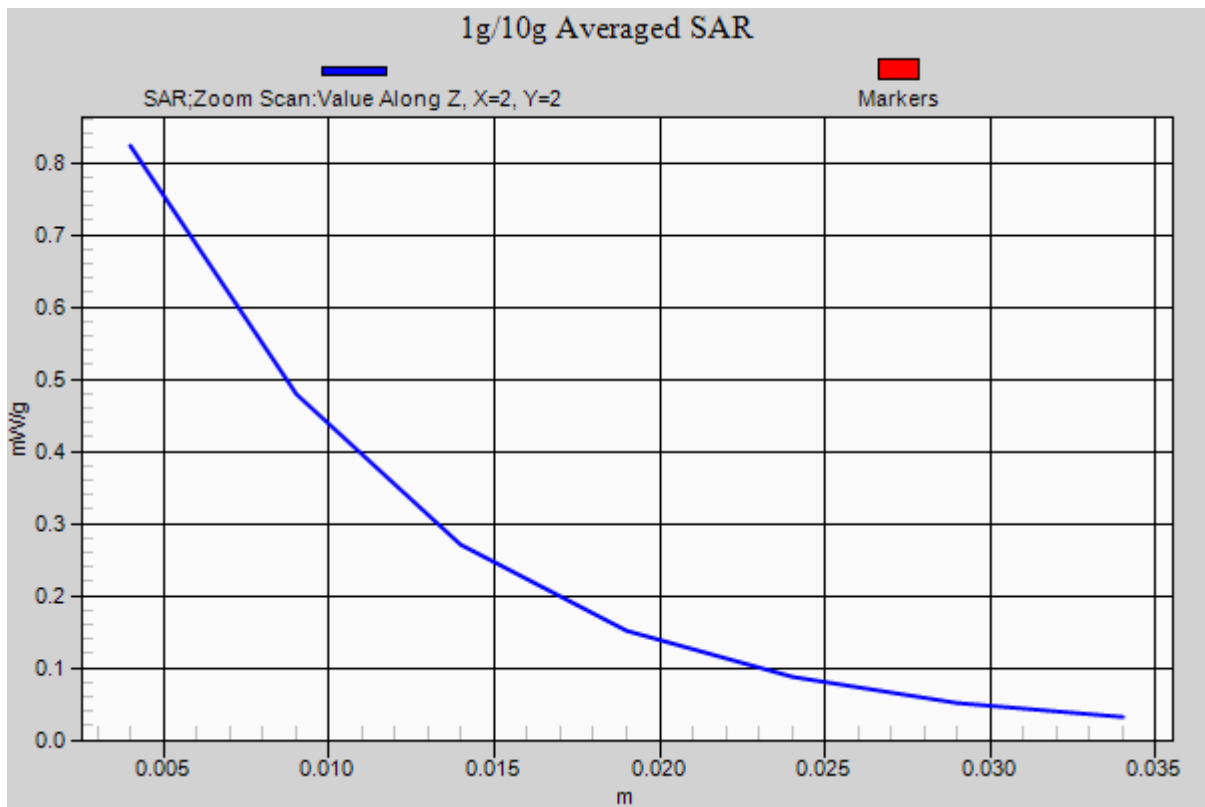



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II-Left Head Tilted High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1907.6$ MHz; 1.403 mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Left Head Tilted High CH9538/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.914 W/kg


WCDMA/Left Head Tilted High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 17.310 V/m; Power Drift = -0.01dB

Peak SAR (extrapolated) = 1.081 mW/g

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.827 W/kg

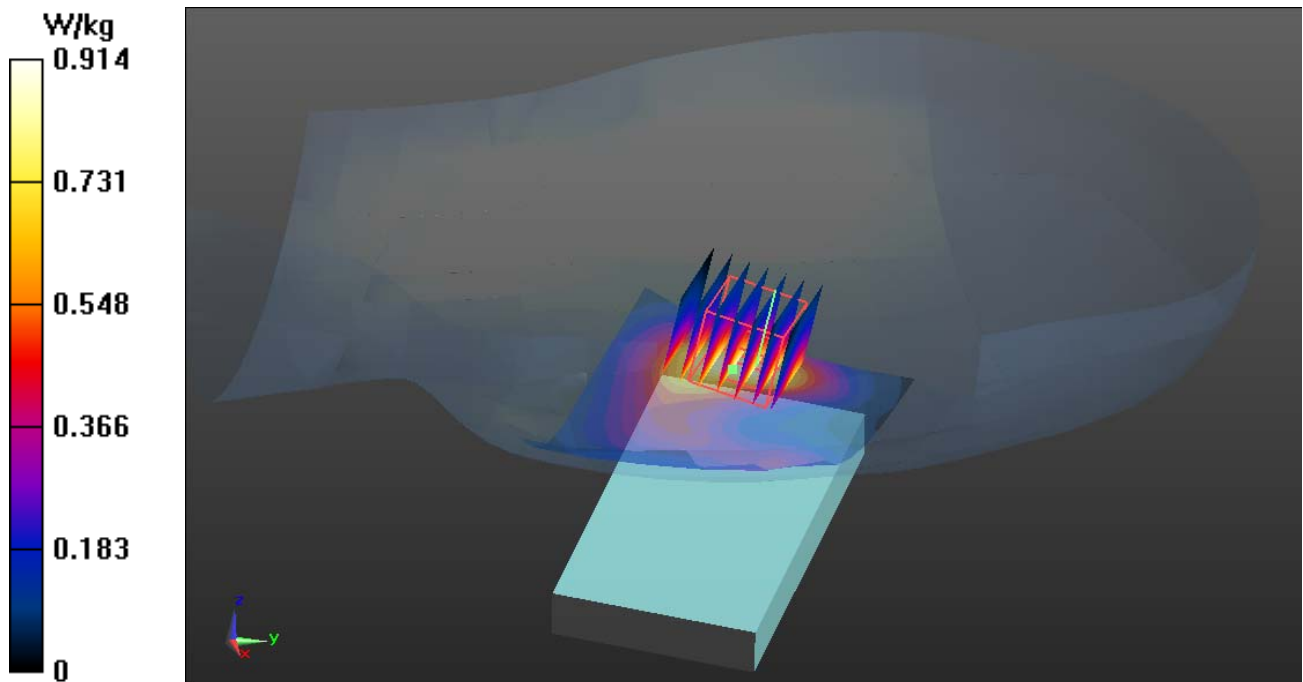



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II-Body Worn Up High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Up High CH9538/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.471 W/kg


WCDMA/Body Up High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 10.724 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.614 mW/g

SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.472 W/kg

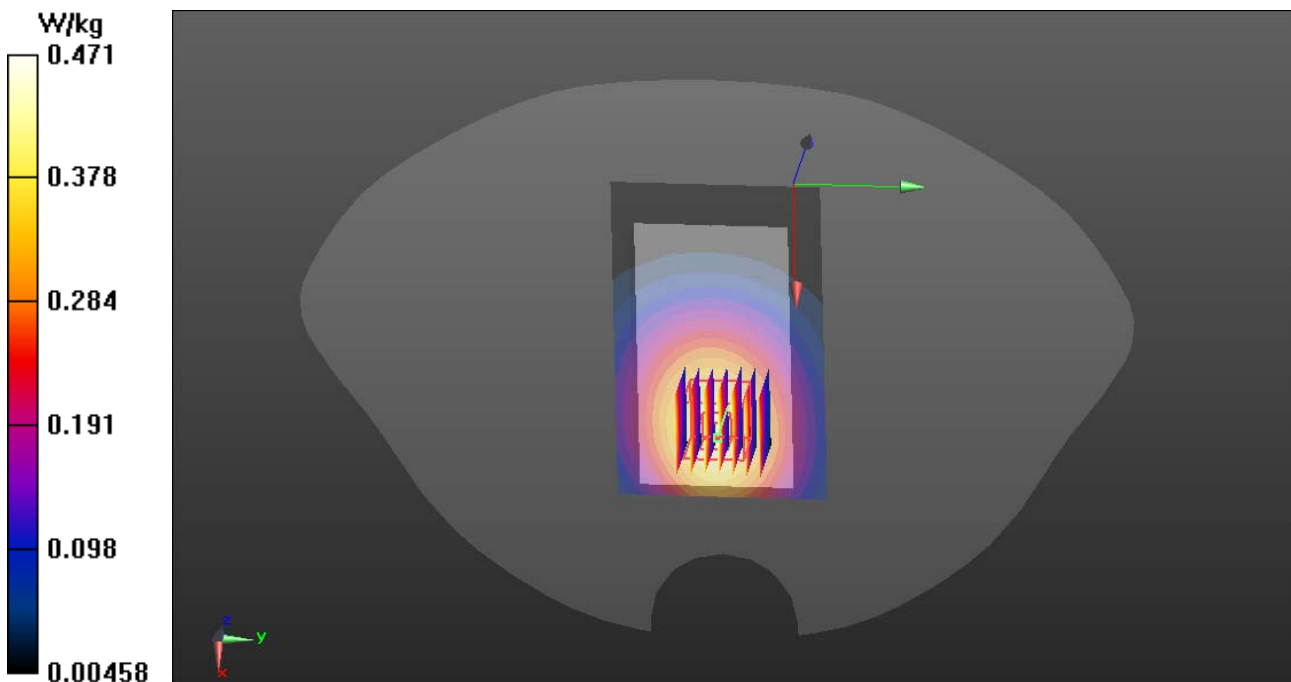



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II- Body Worn Down High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Down High CH9538/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.879 W/kg


WCDMA/Body Down High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 14.275 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.150 mW/g

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.372 mW/g

Maximum value of SAR (measured) = 0.867 W/kg

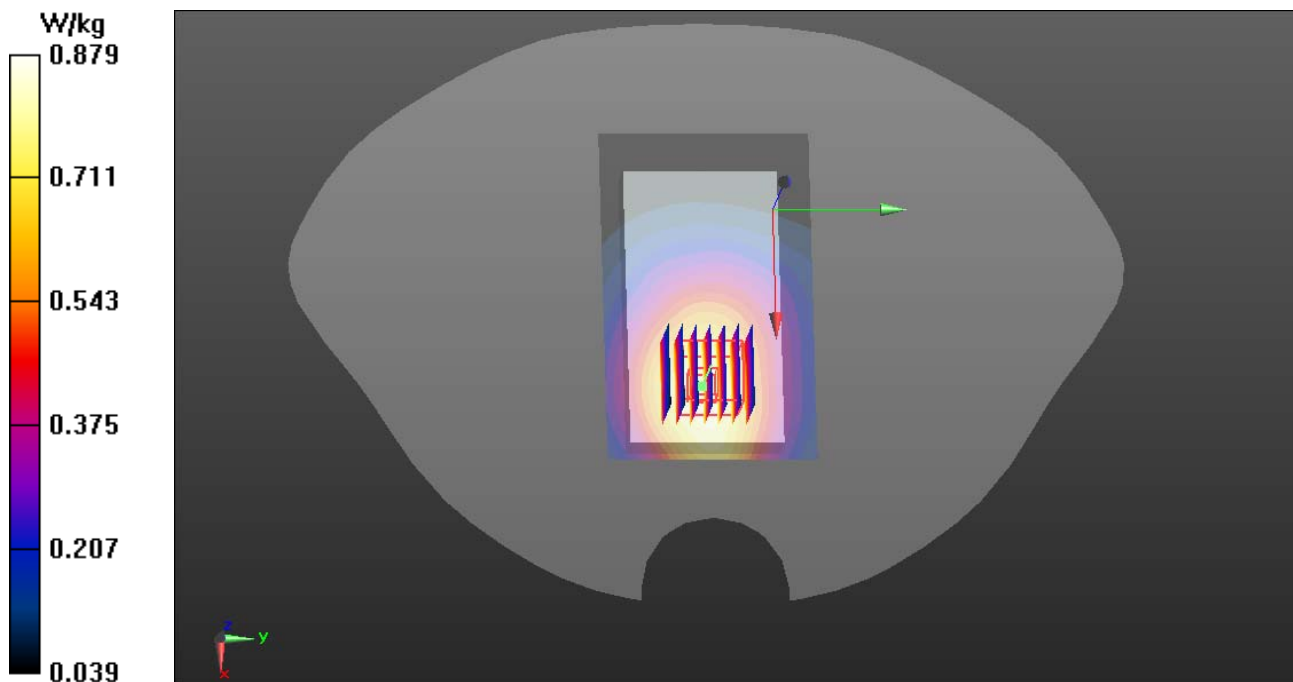

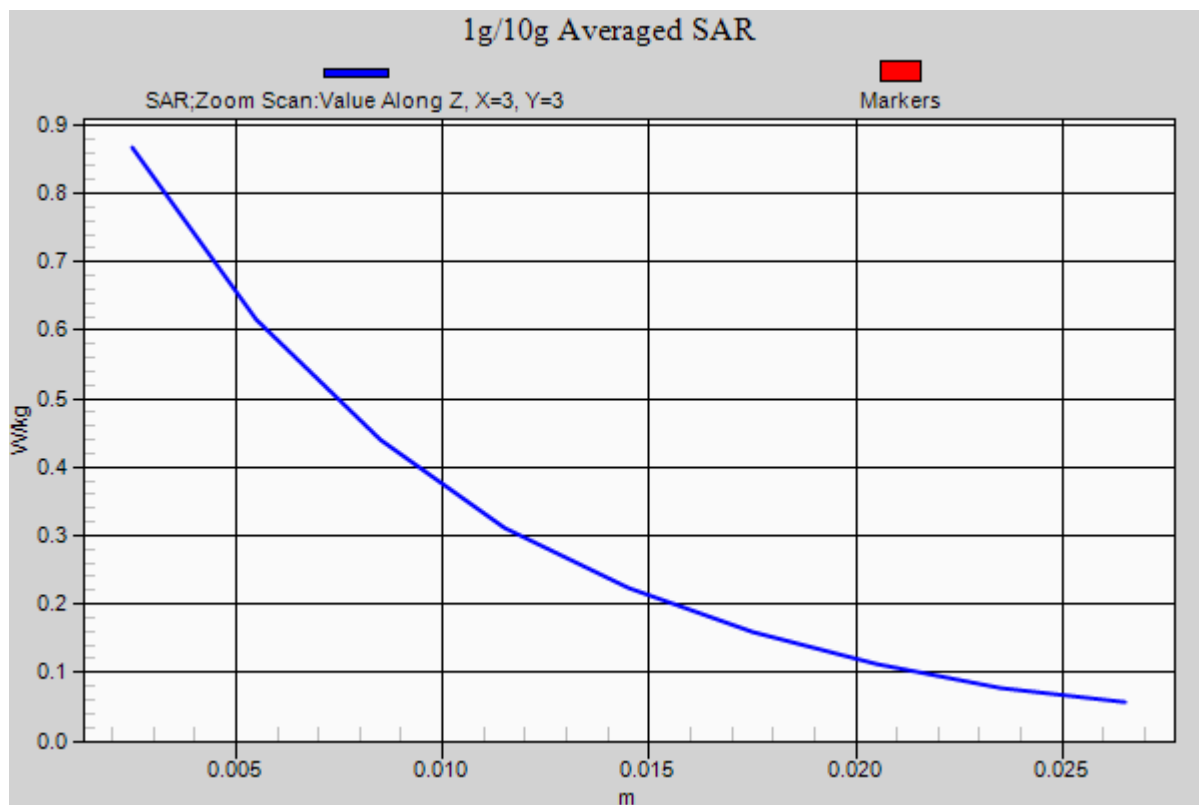



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II- Body Worn display screen Down High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body display screen Down High CH9538/Area Scan (141x91x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.779 W/kg

WCDMA/Body display screen Down High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 17.275 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.950 mW/g

SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.342 mW/g

Maximum value of SAR (measured) = 0.797 W/kg

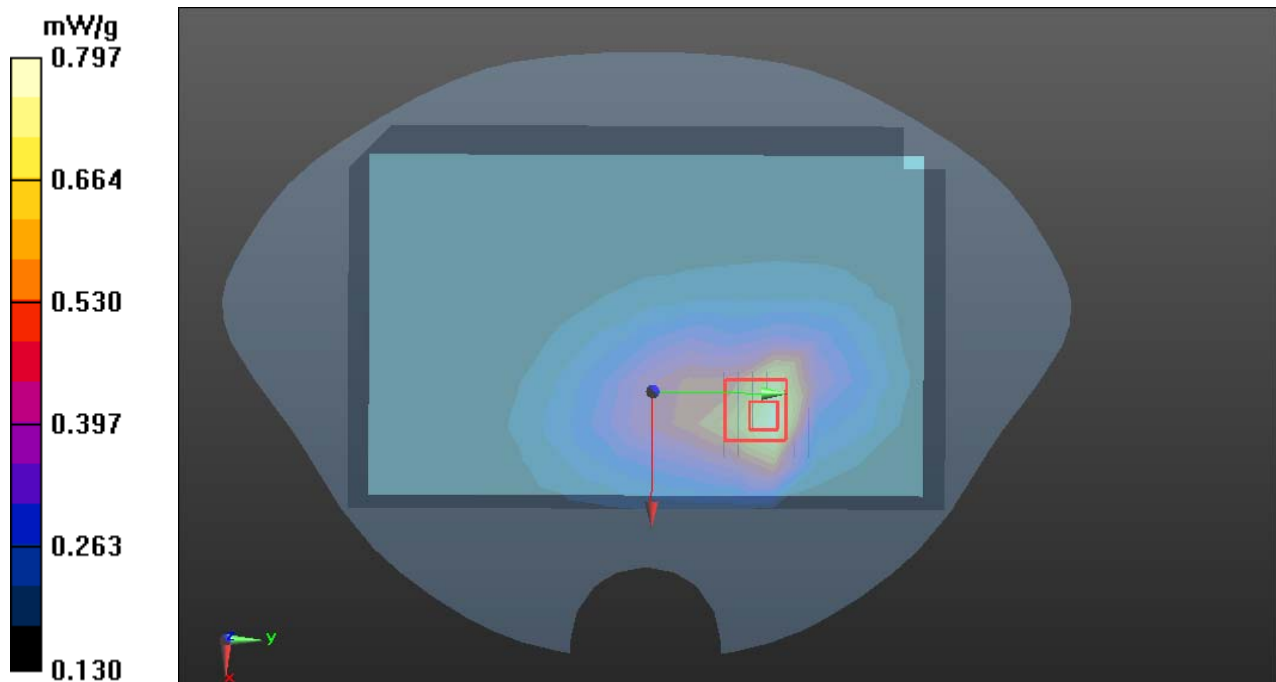



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b-Right Head Cheek High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.818$ mho/m; $\epsilon_r = 37.997$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.07, 7.07, 7.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b/Right Cheek High CH11/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 mW/g


IEEE 802.11b/Right Cheek High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.730 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

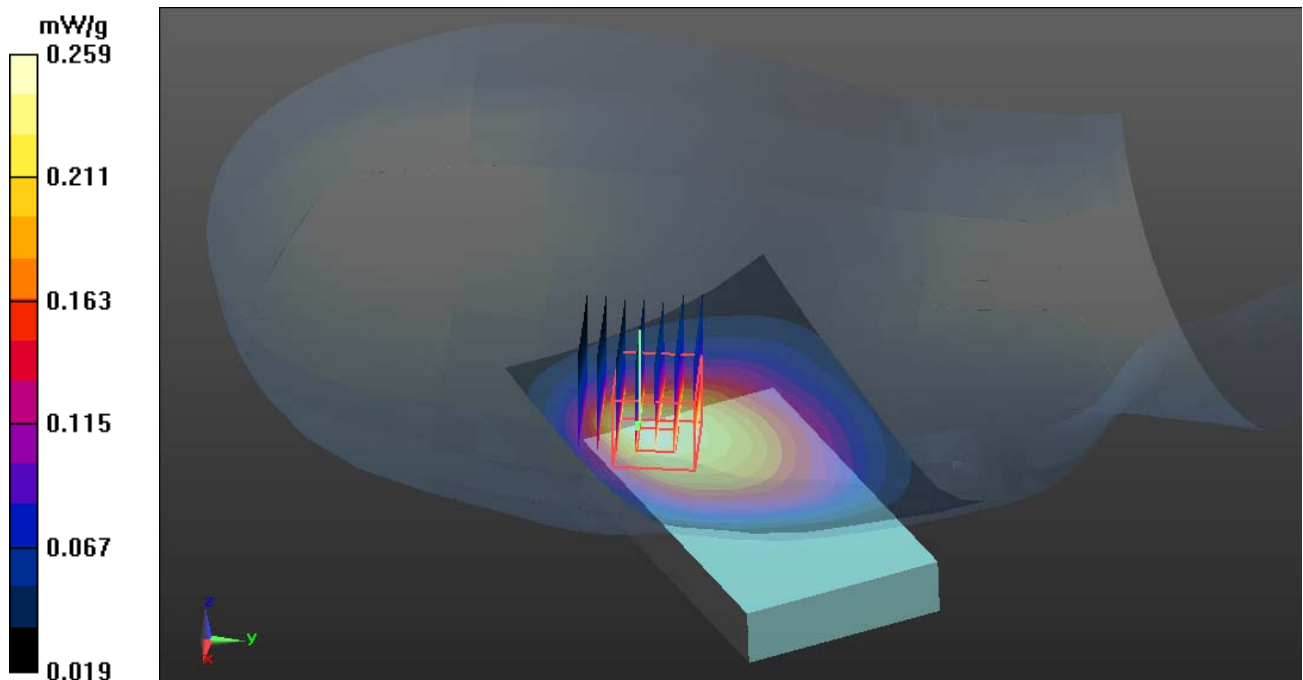



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b-Right Head Tilted High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.817$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.07, 7.07, 7.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b/Right Tilted High CH11/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.462 mW/g


IEEE 802.11b/Right Tilted High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.717 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

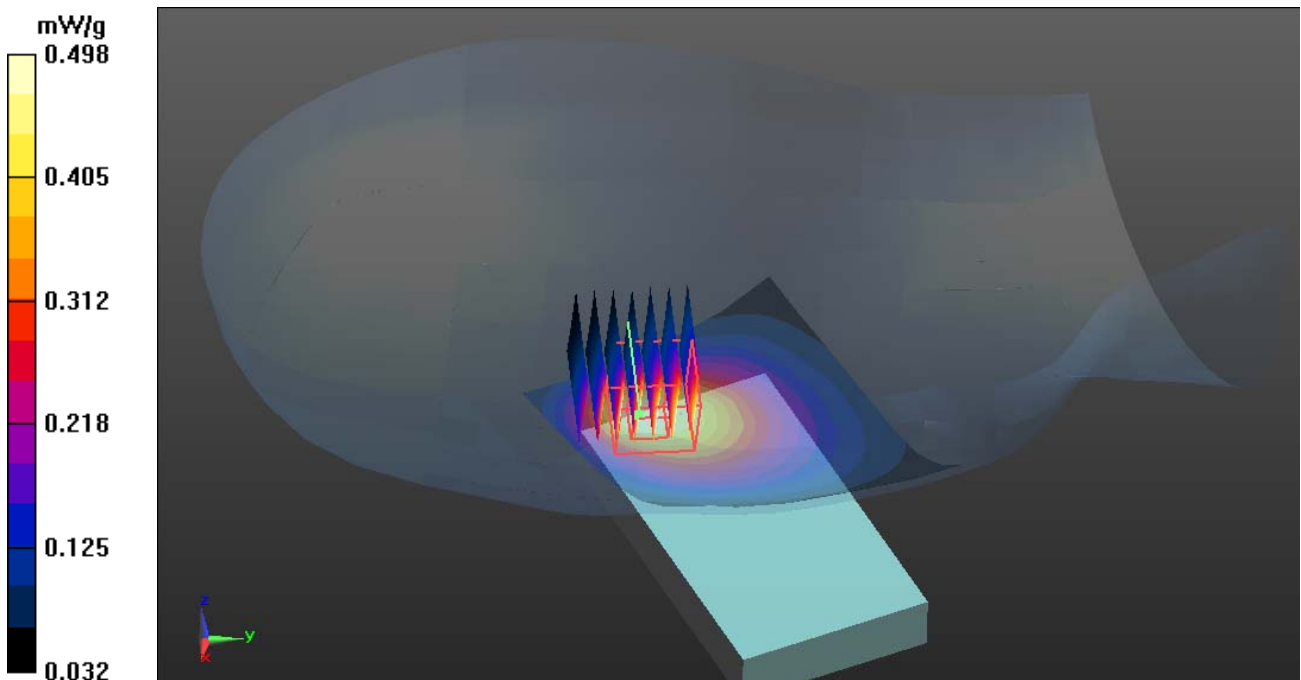



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b-Left Head Cheek High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.823$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.07, 7.07, 7.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /Left Cheek High CH11/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.307 mW/g


IEEE 802.11b /Left Cheek High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.497 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

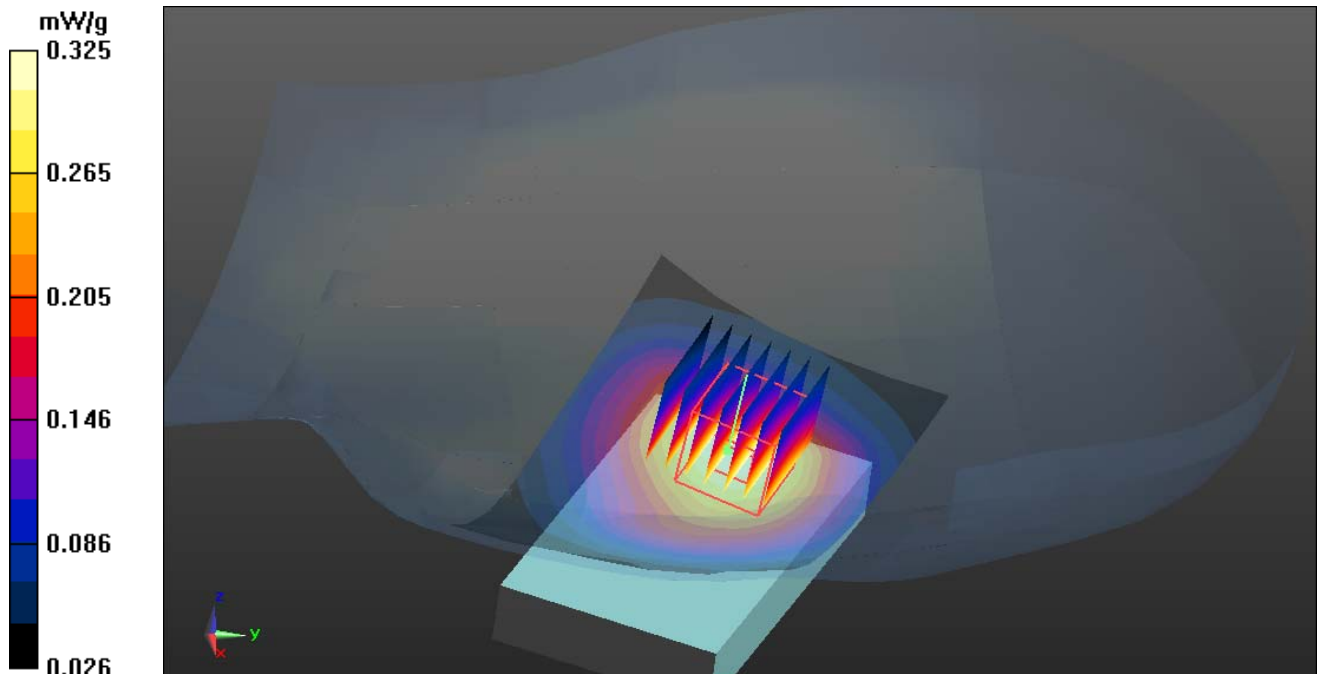



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b-Left Head Tilted High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.823$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.07, 7.07, 7.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /Left Tilted High CH11/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.312 mW/g


IEEE 802.11b /Left Tilted High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.032 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.141 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

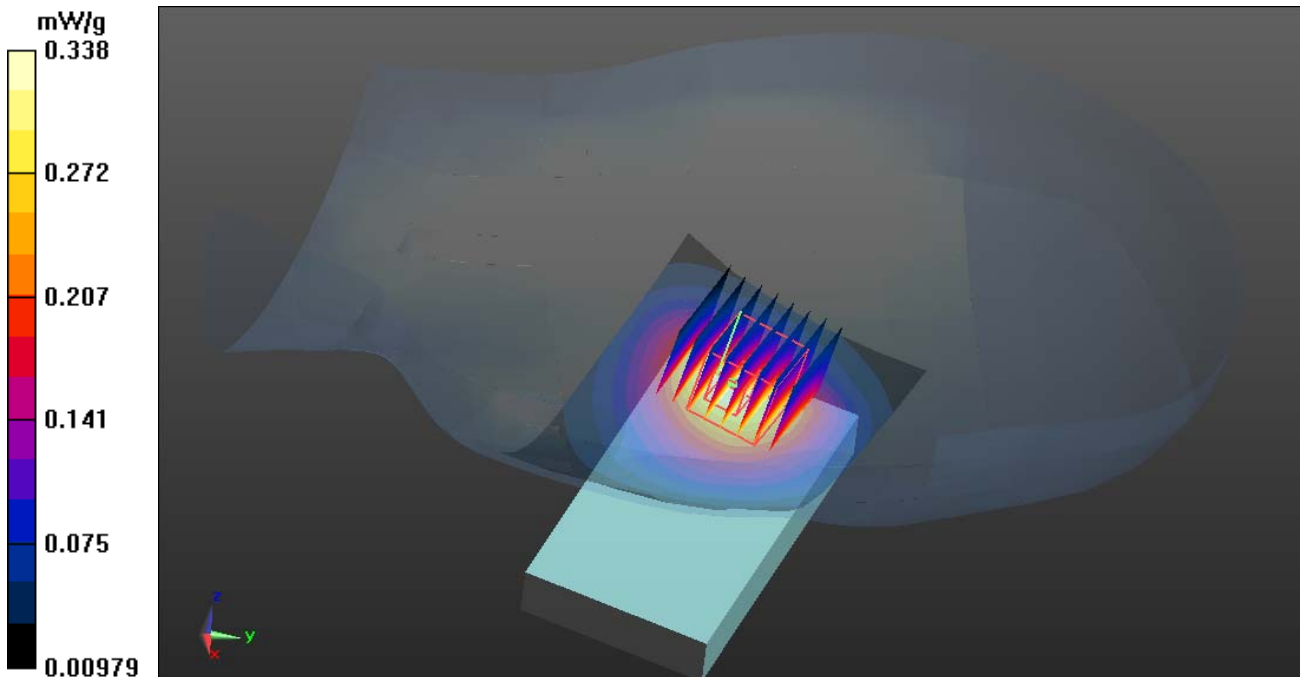



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b- Body Worn Up High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Up High CH11/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 mW/g


IEEE 802.11b /802.11b Body Up High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.268 mW/g

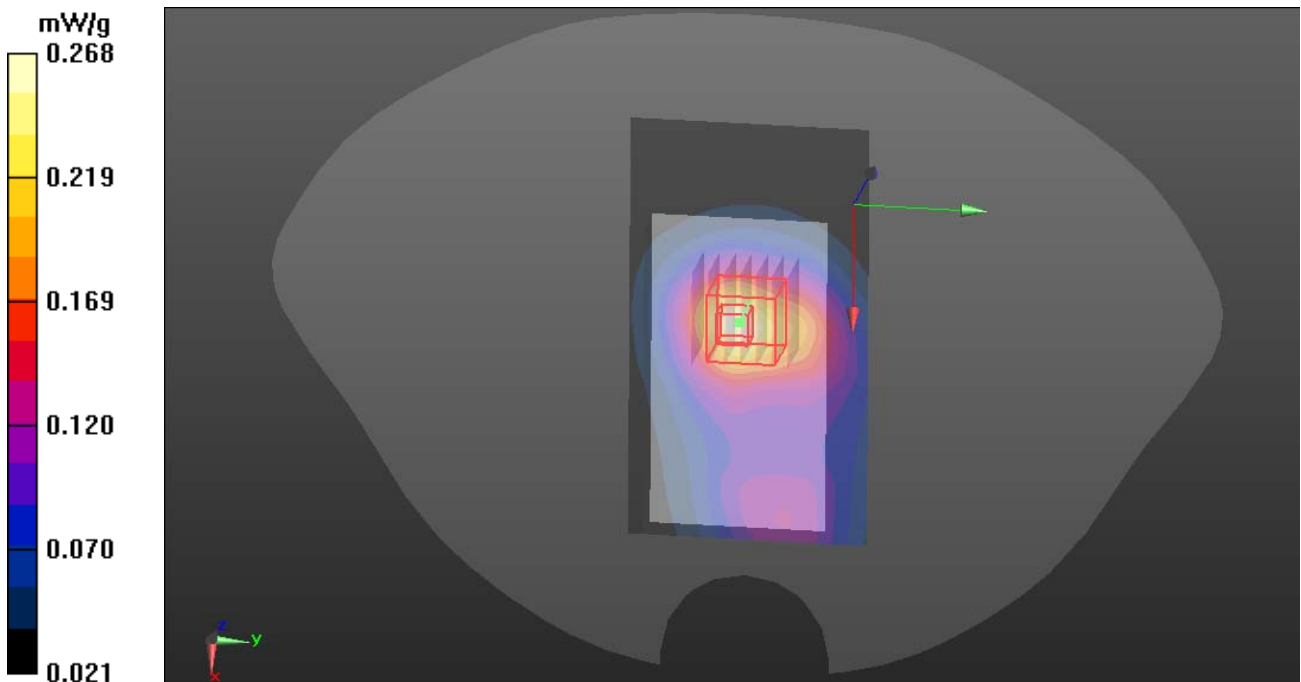



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b- Body Worn Down High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Down High CH11/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.544 mW/g

IEEE 802.11b /802.11b Body Down High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.250 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.597 mW/g

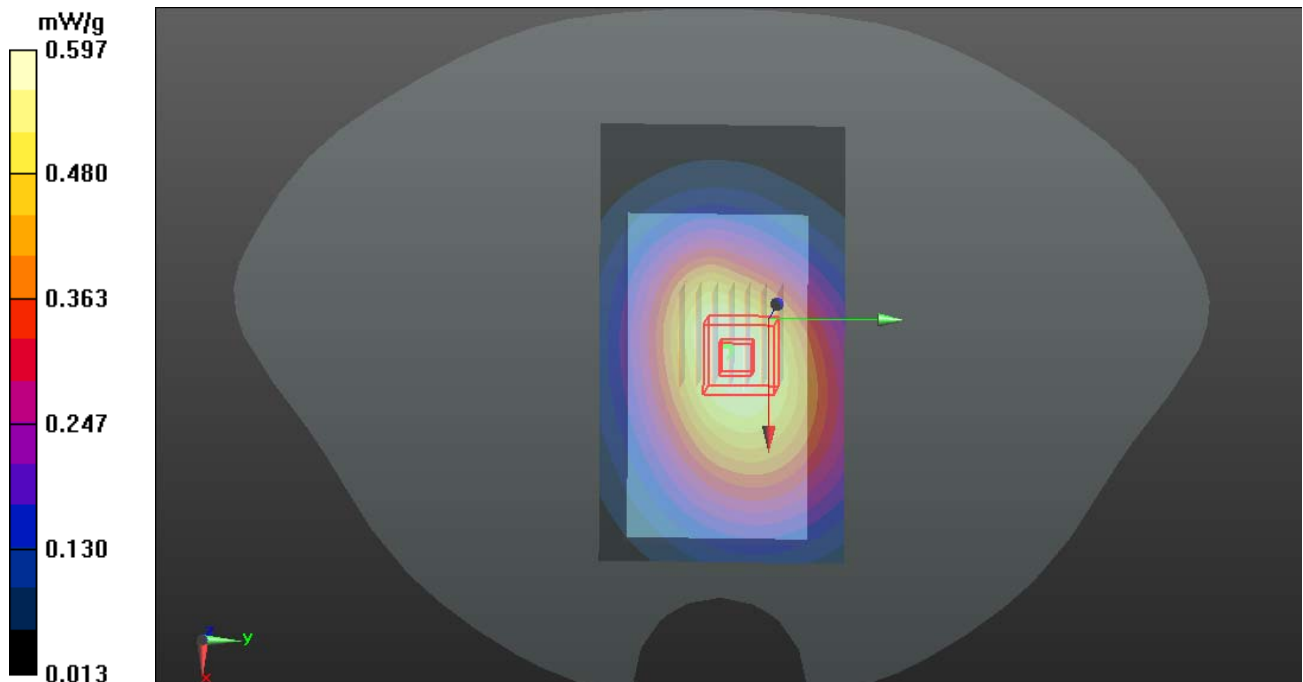



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b- Body Worn display screen Down High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body display screen Down High CH11/Area Scan (141x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.328mW/g

IEEE 802.11b /802.11b Body display screen Down High CH11/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

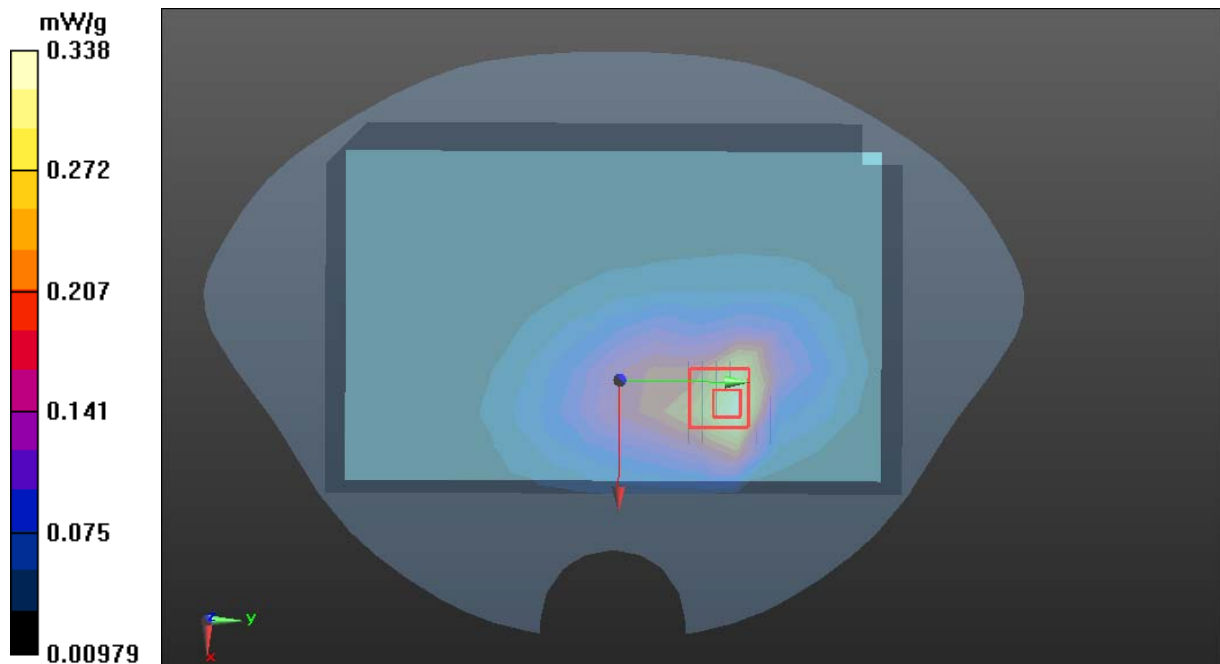



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Body-Hotspot Up High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 mW/g


GSM850/ Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.622 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

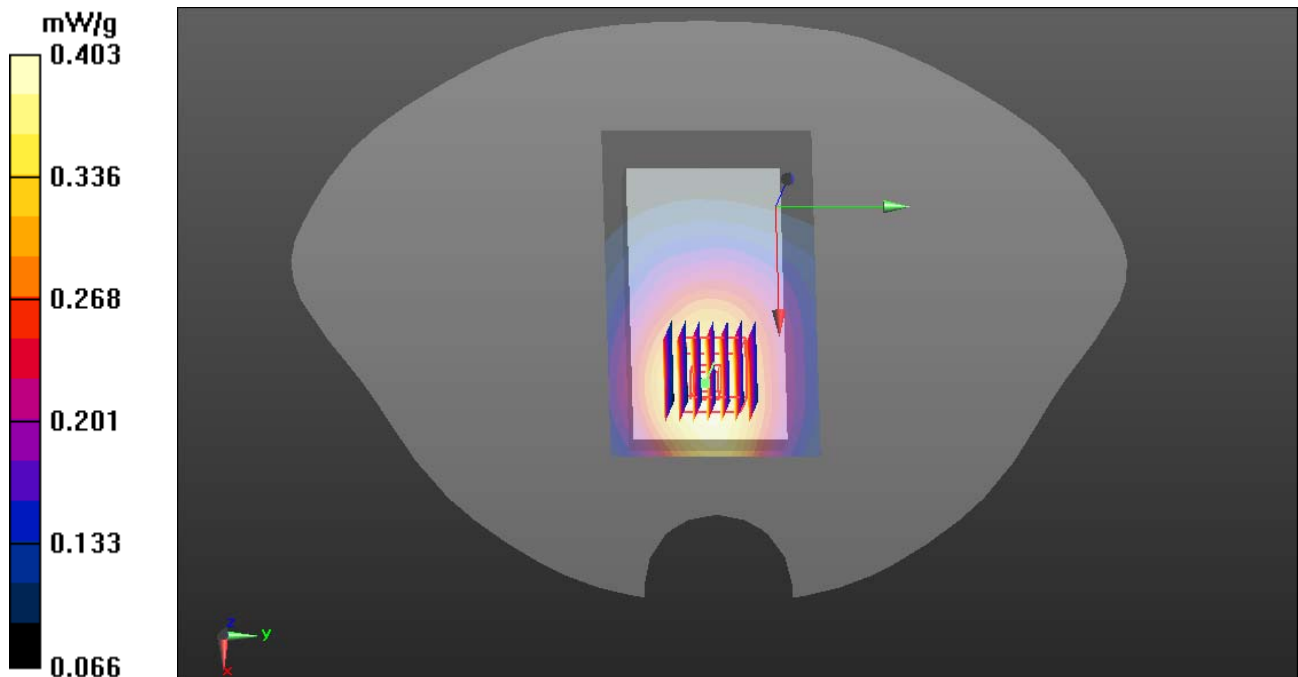



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Body-Hotspot Down High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Down High CH251/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.568 mW/g


GSM850/ Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.693 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

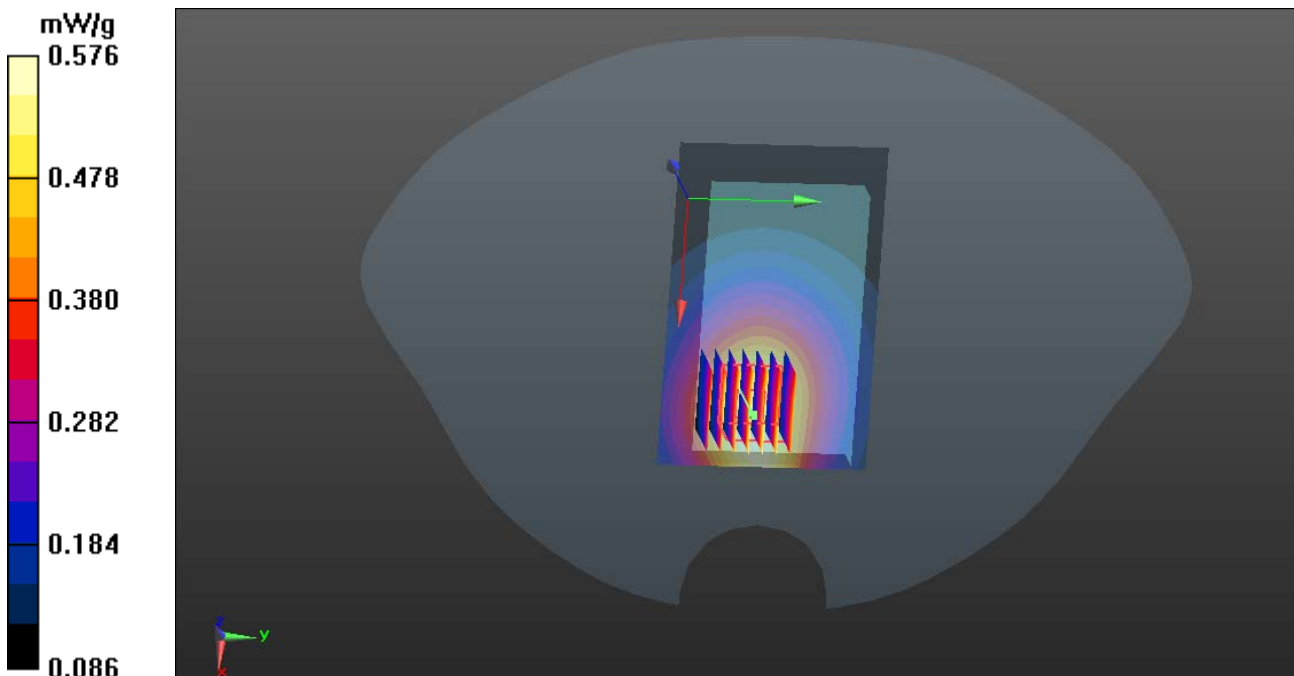



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Body-Hotspot Bottom High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Bottom High CH251/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.459 mW/g


GSM850/ Bottom High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.770 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

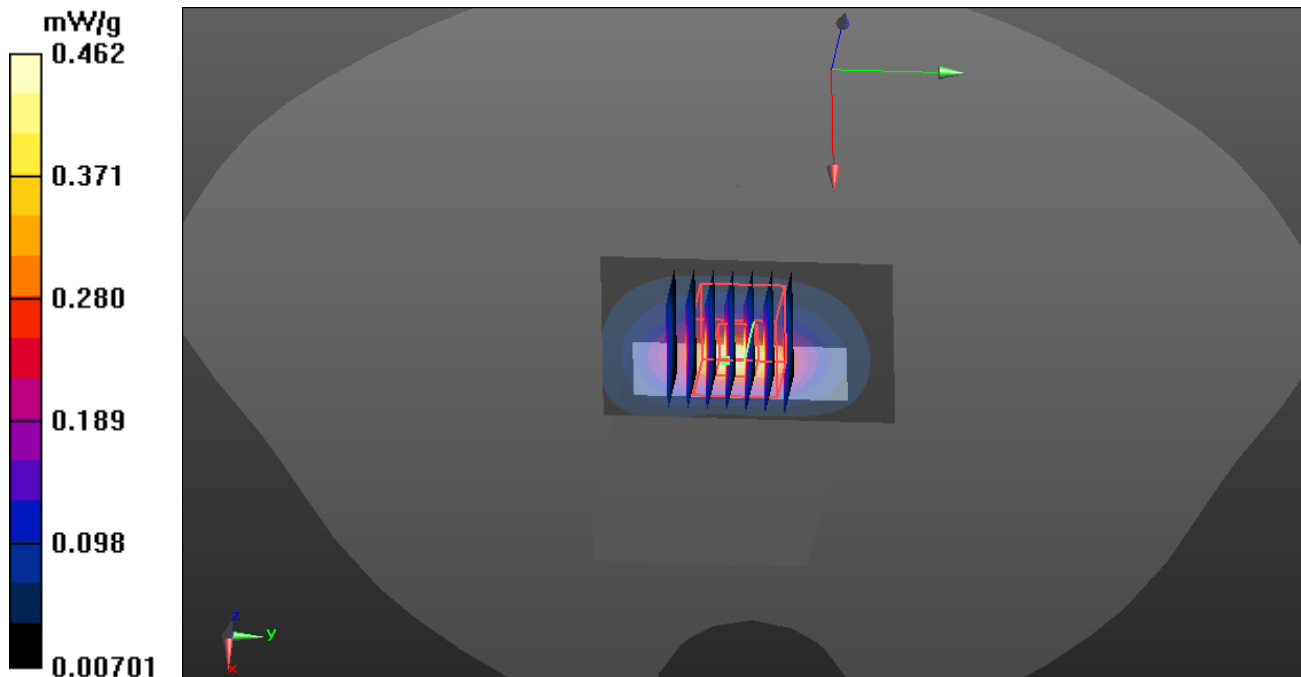



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Body-Hotspot Right High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Right High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.214 mW/g


GSM850/ Right High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.427 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

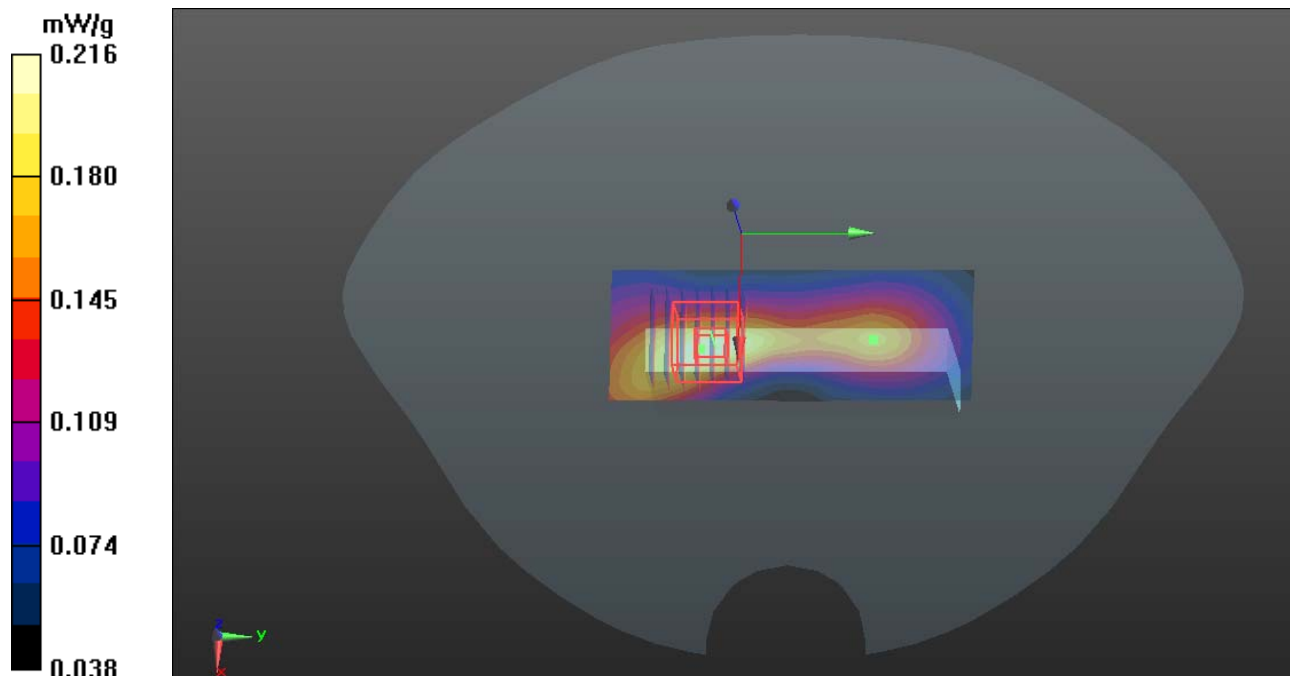



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850-Body-Hotspot Left High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Left High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 mW/g


GSM850/ Left High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.081 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

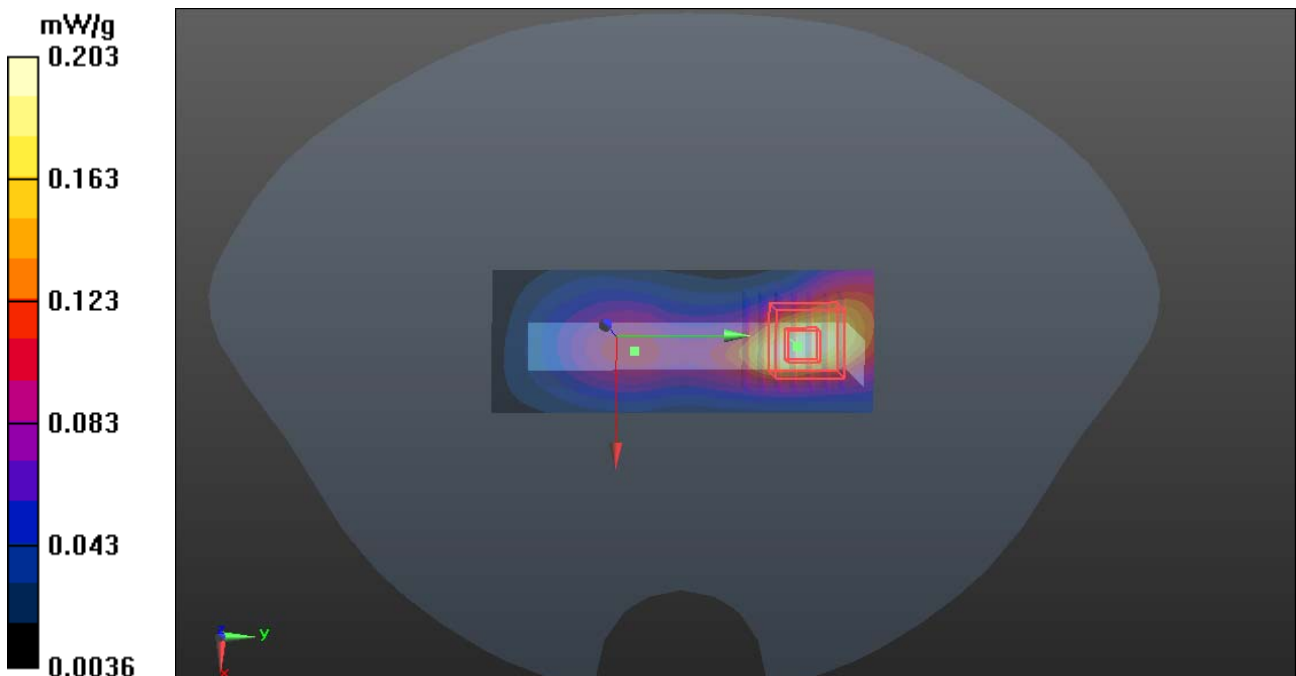



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot Up High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 mW/g


GPRS850/ Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.622 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

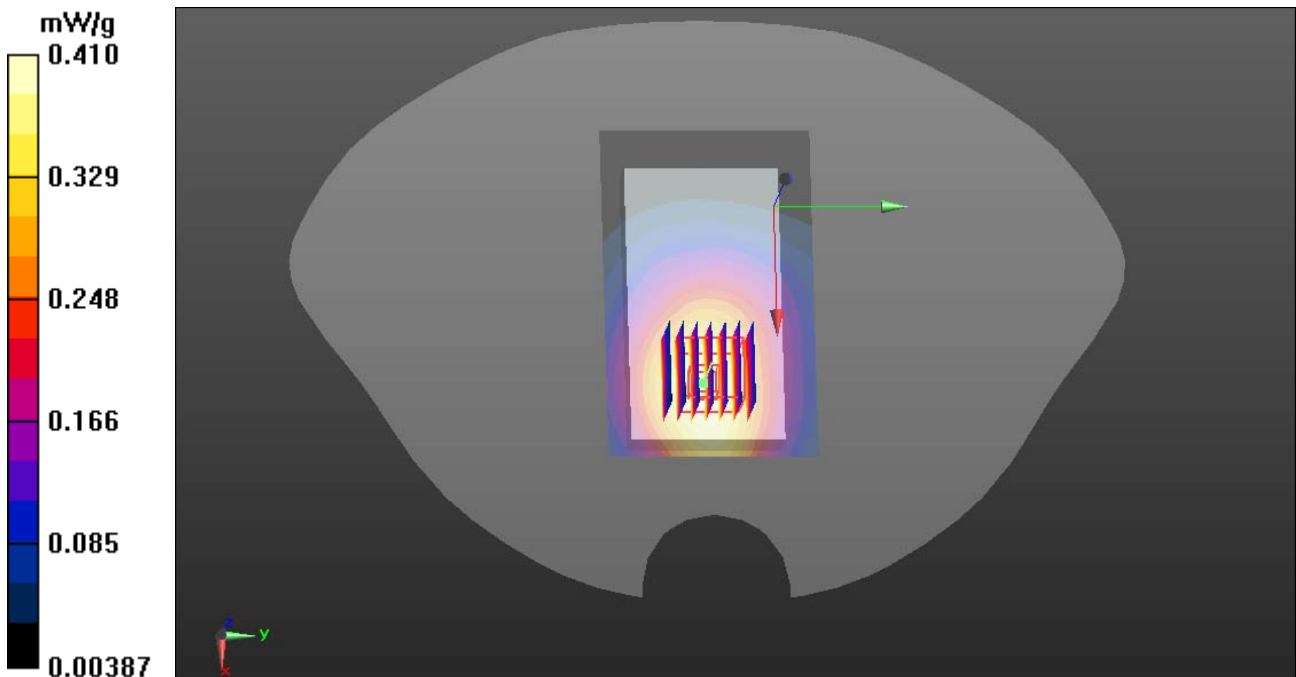



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot Down High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.498 mW/g


GPRS850/ Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.771 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

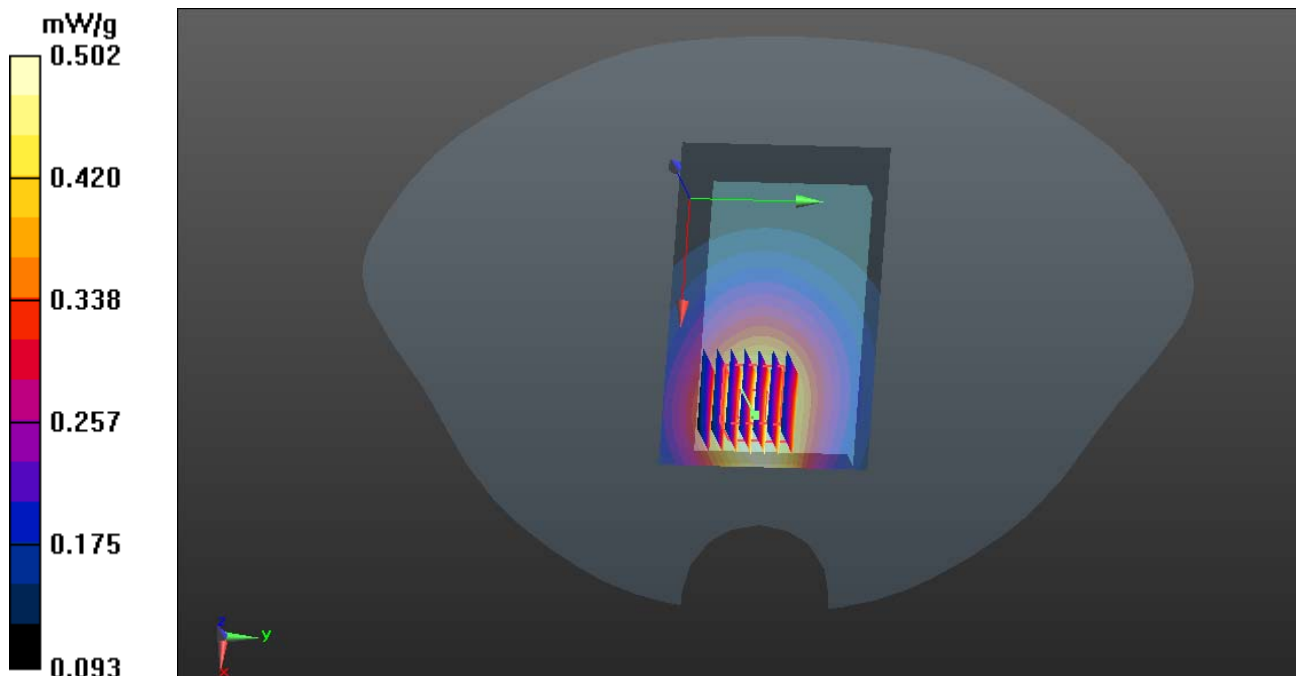



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot Bottom High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Bottom High CH251/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.471 mW/g


GPRS850/ Bottom High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.770 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.337 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

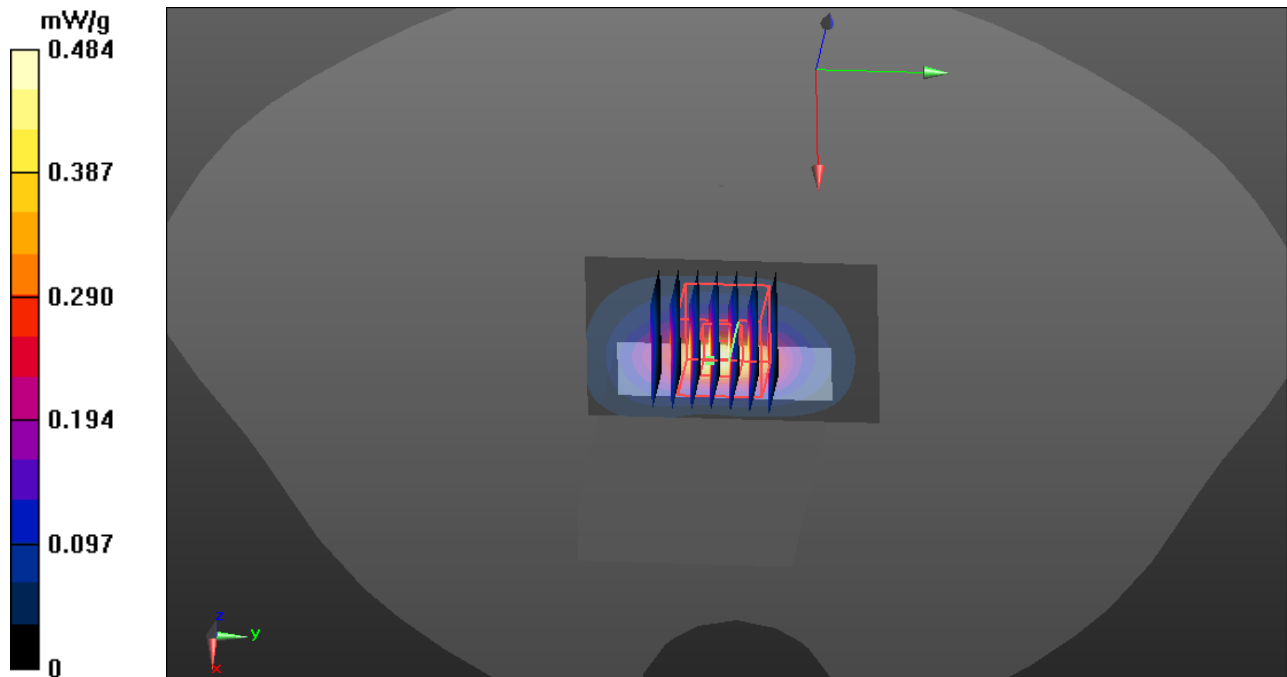



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot Right High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Right High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.221 mW/g


GPRS850/ Right High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.427 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

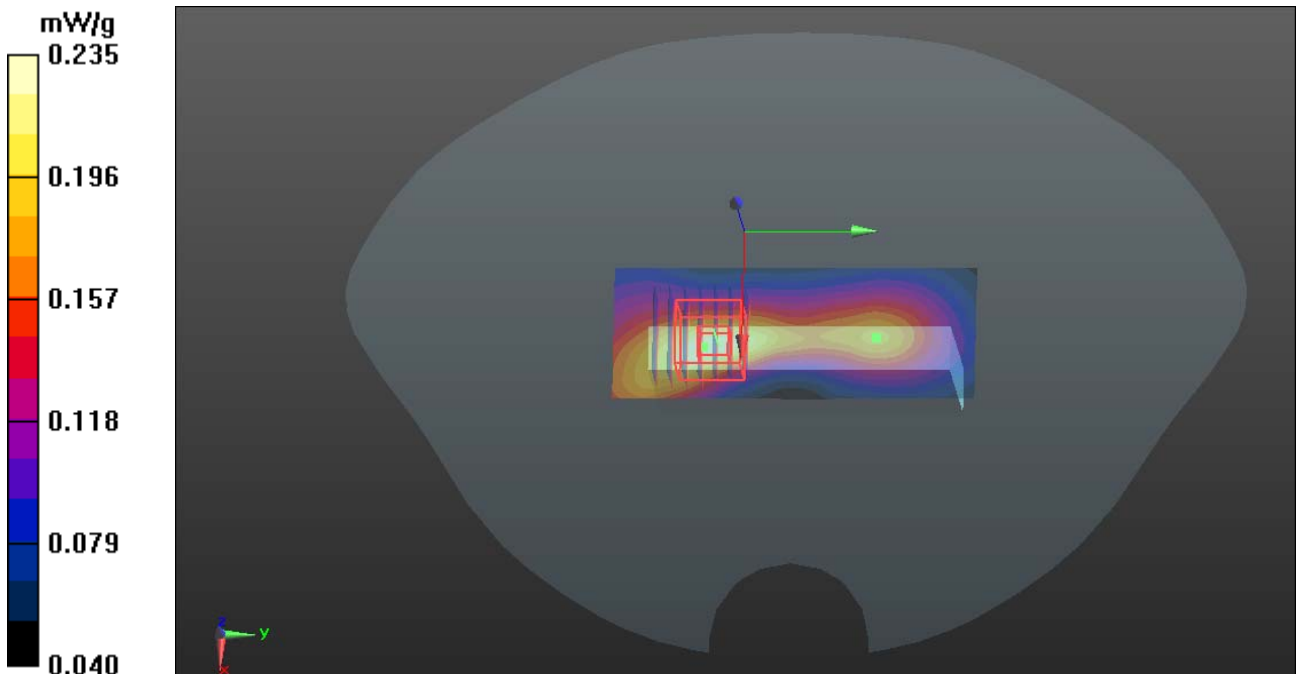



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot Left High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Left High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.322 mW/g


GPRS850/ Left High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.081 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

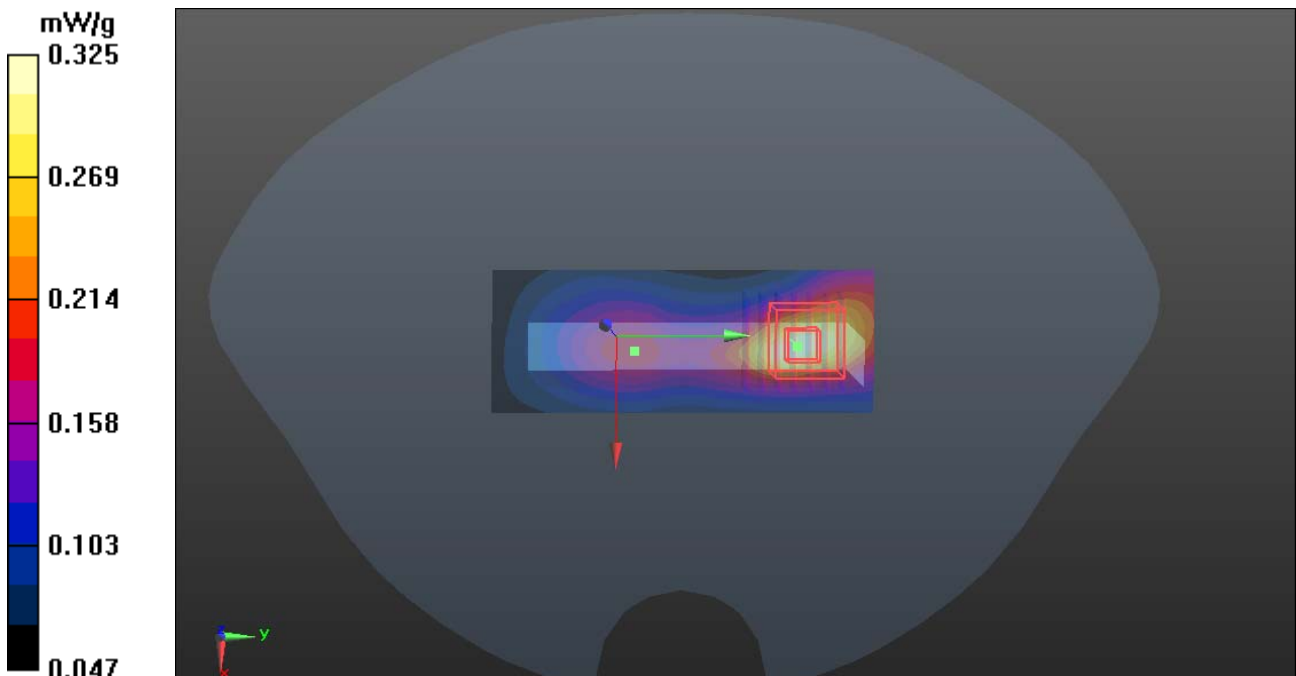



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot Up High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.313 mW/g


PCS1900/ Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.949 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.141 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

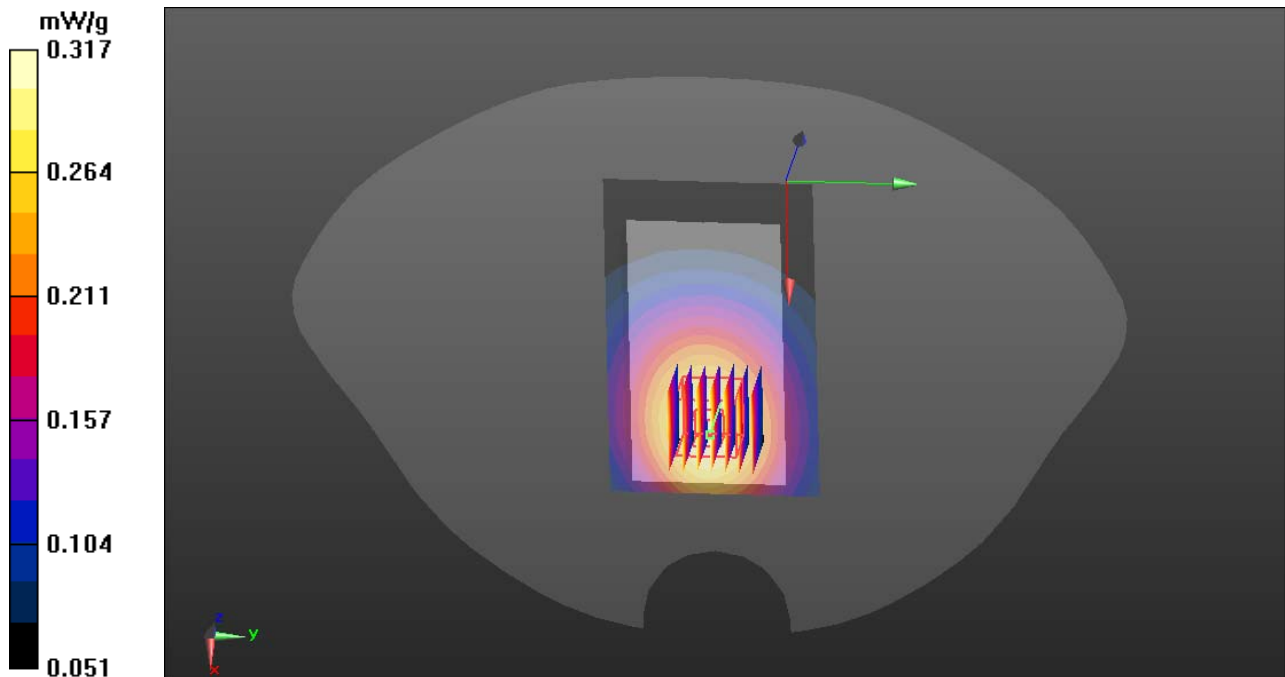



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot Down High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.473 mW/g


PCS1900/ Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.255 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

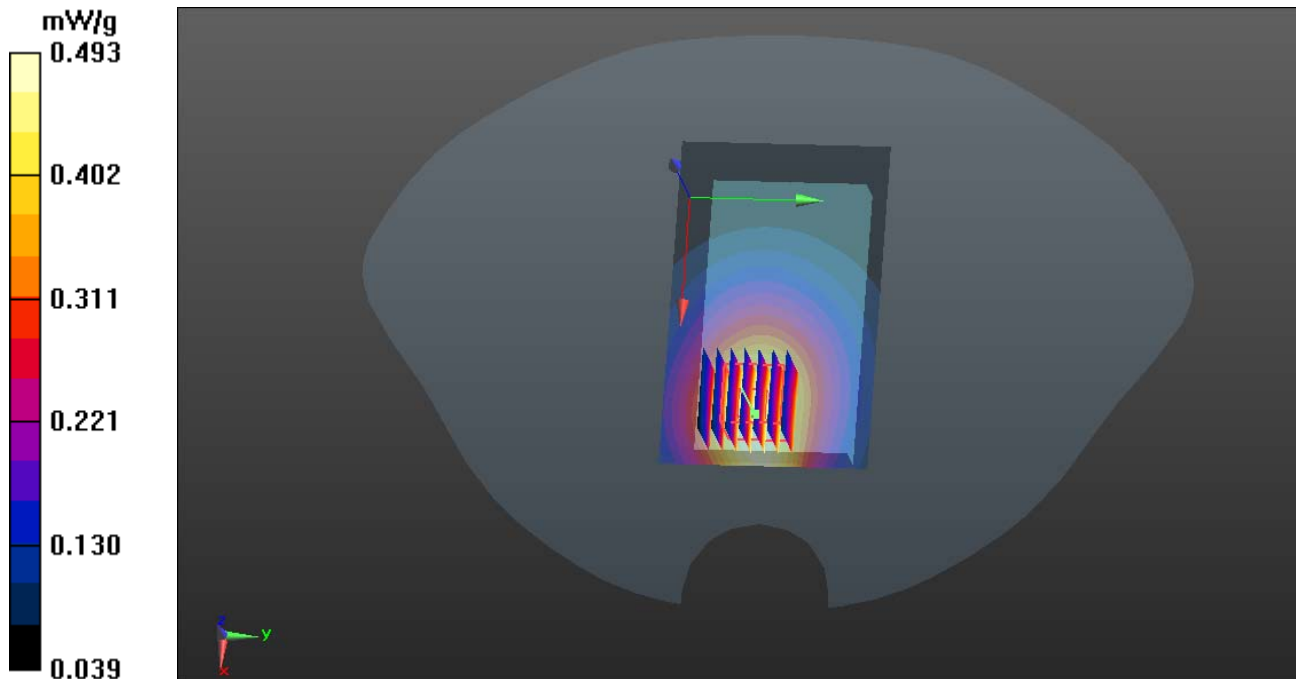



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot Bottom High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Bottom High CH810/Area Scan (51x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.580 mW/g


PCS1900/ Bottom High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.367 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.314mW/g

Maximum value of SAR (measured) = 0.586 mW/g

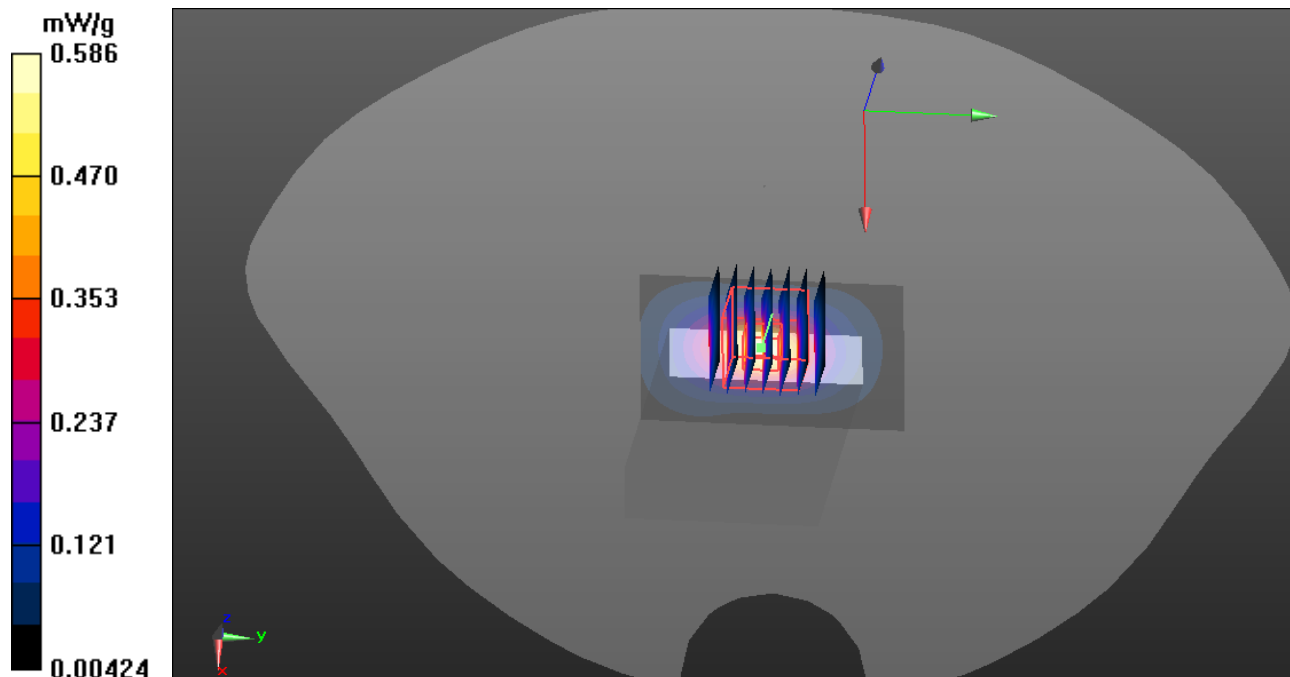



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot Right High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Right High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.244 mW/g


PCS1900/ Right High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.246 mW/g

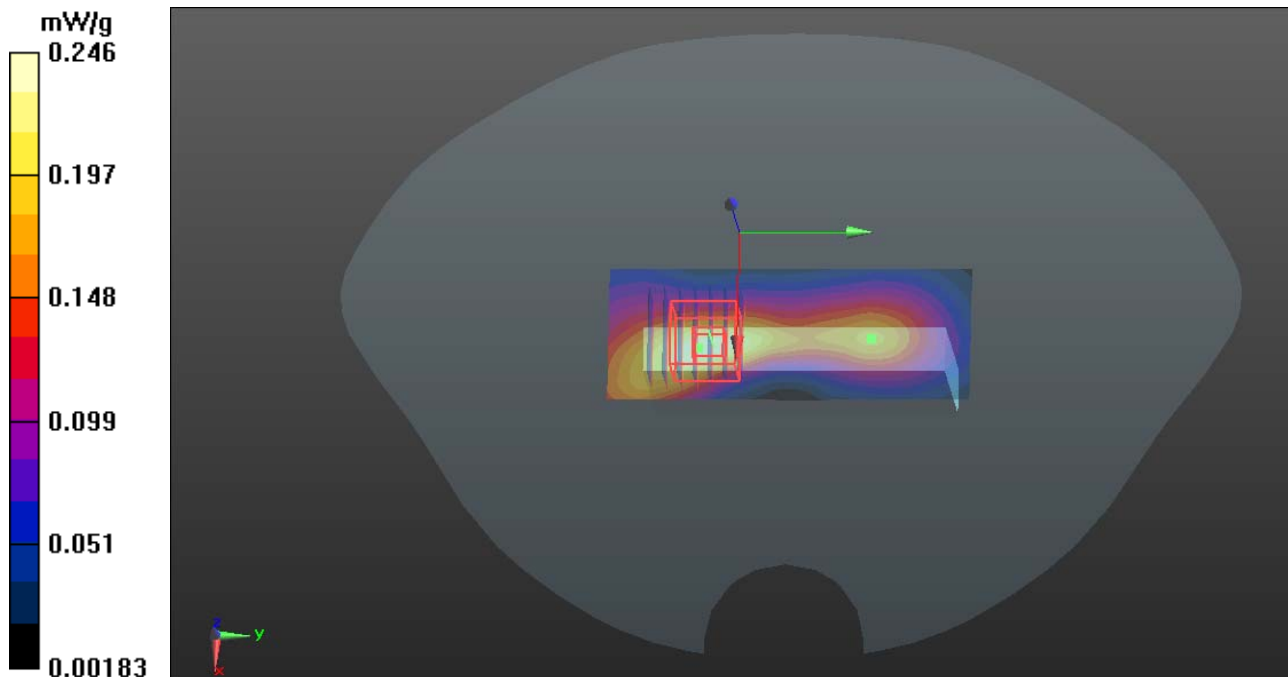



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS 1900-Body-Hotspot Left High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Left High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.201 mW/g


PCS1900/ Left High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.378 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

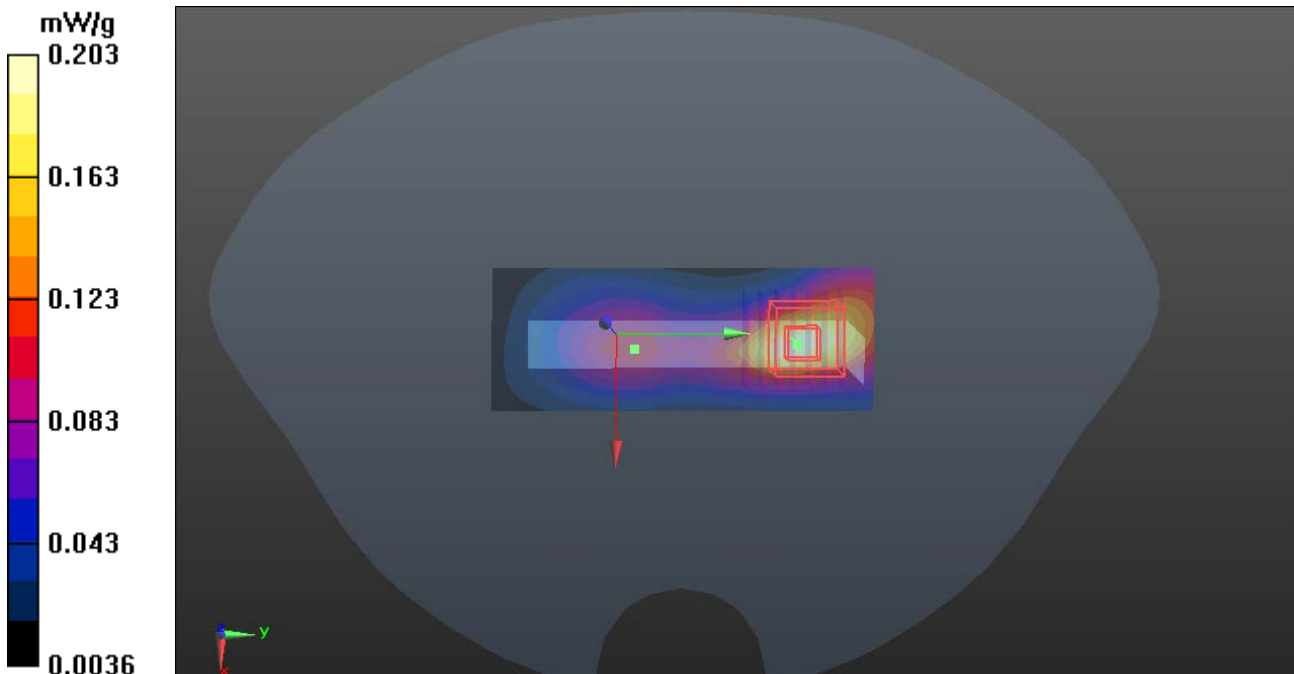



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot Up High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.333 mW/g


GPRS1900/ Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.949 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.336mW/g

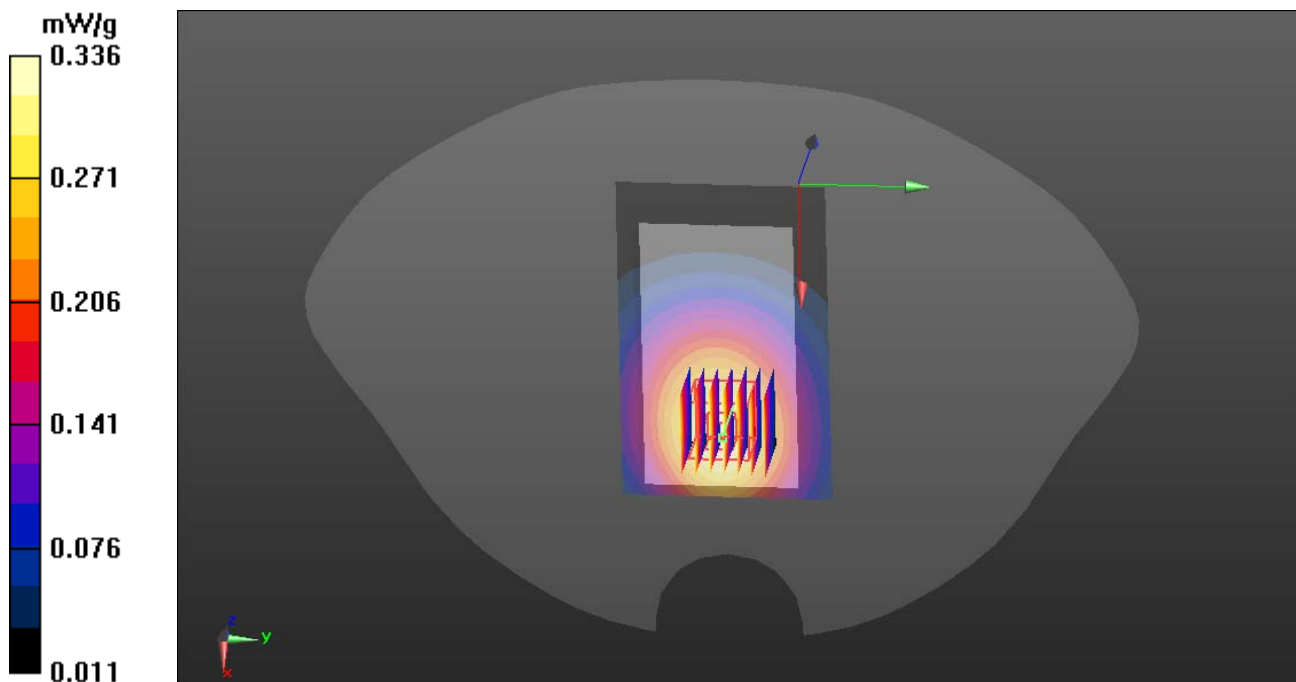



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot Down High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.512 mW/g


GPRS1900/ Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.255 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.516 mW/g

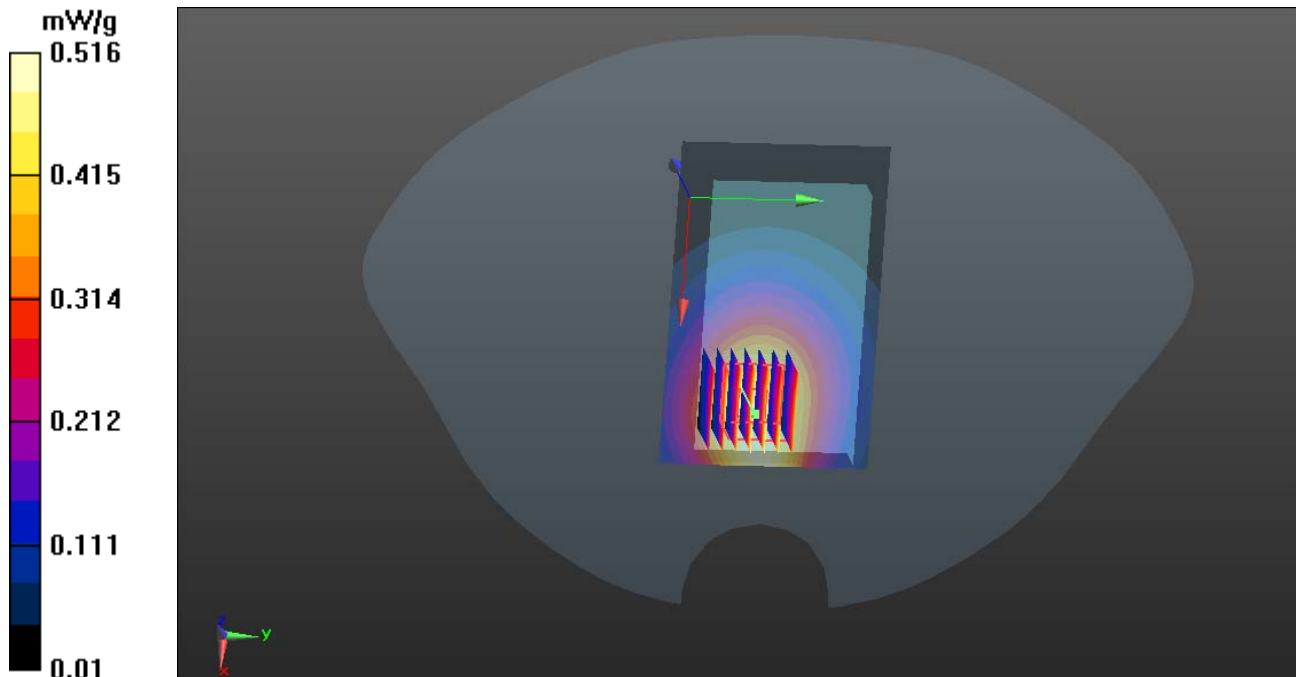



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot Bottom High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Bottom High CH810/Area Scan (51x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.531 mW/g


GPRS1900/ Bottom High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.367 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.307mW/g

Maximum value of SAR (measured) = 0.530 mW/g

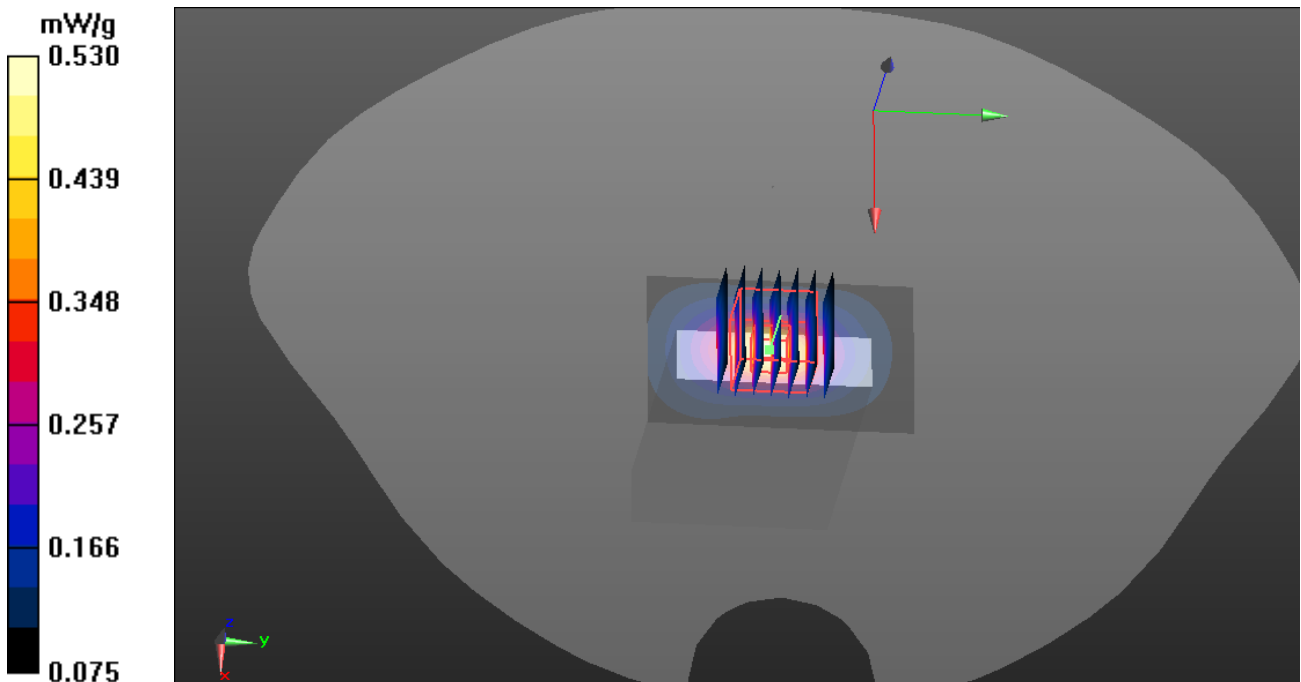



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot Right High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Right High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.214 mW/g


GPRS1900/ Right High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

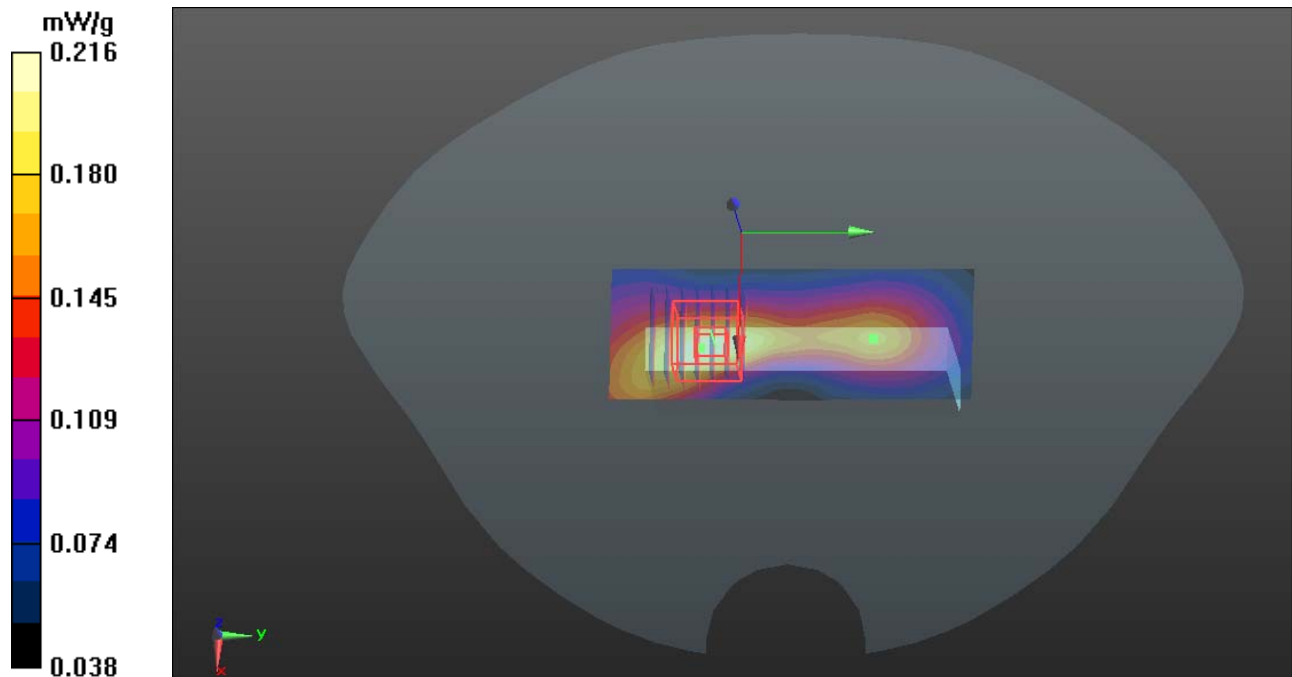



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS 1900-Body-Hotspot Left High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Left High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.202 mW/g


GPRS1900/ Left High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.378 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.418W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

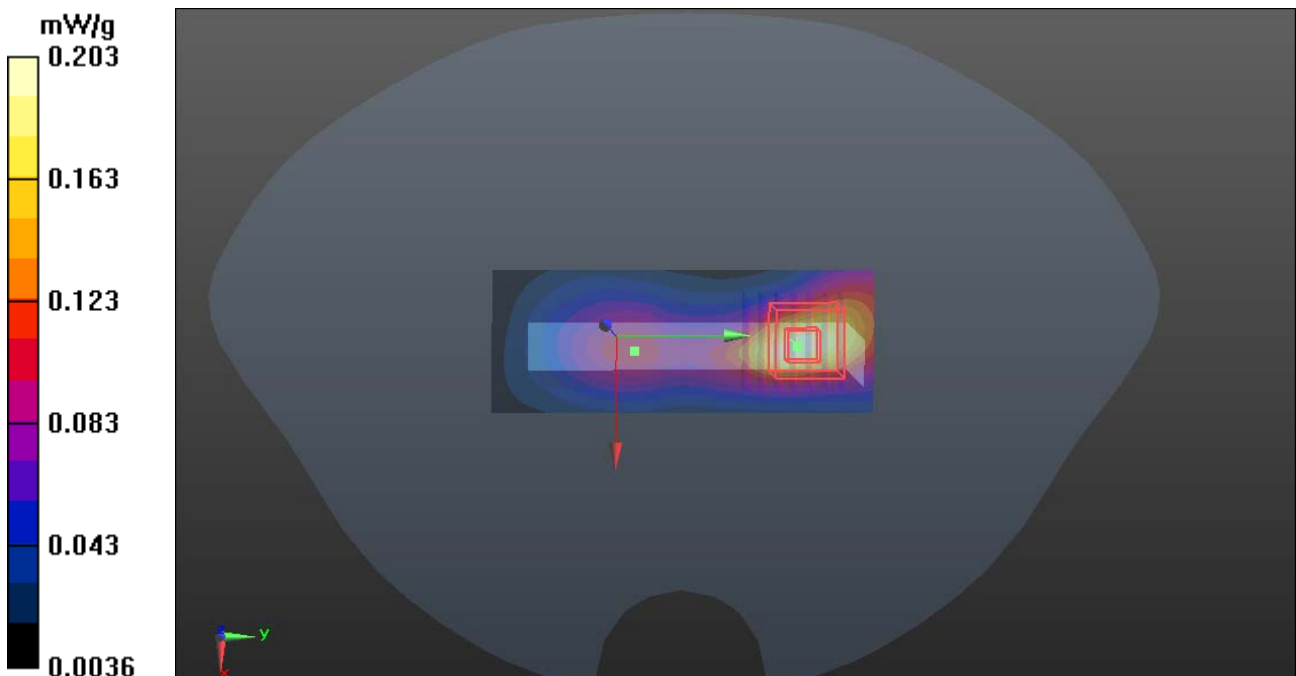



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot Up High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body Up High CH9538/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 mW/g


WCDMA Band II /Body Up High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.363 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.478 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.552 mW/g

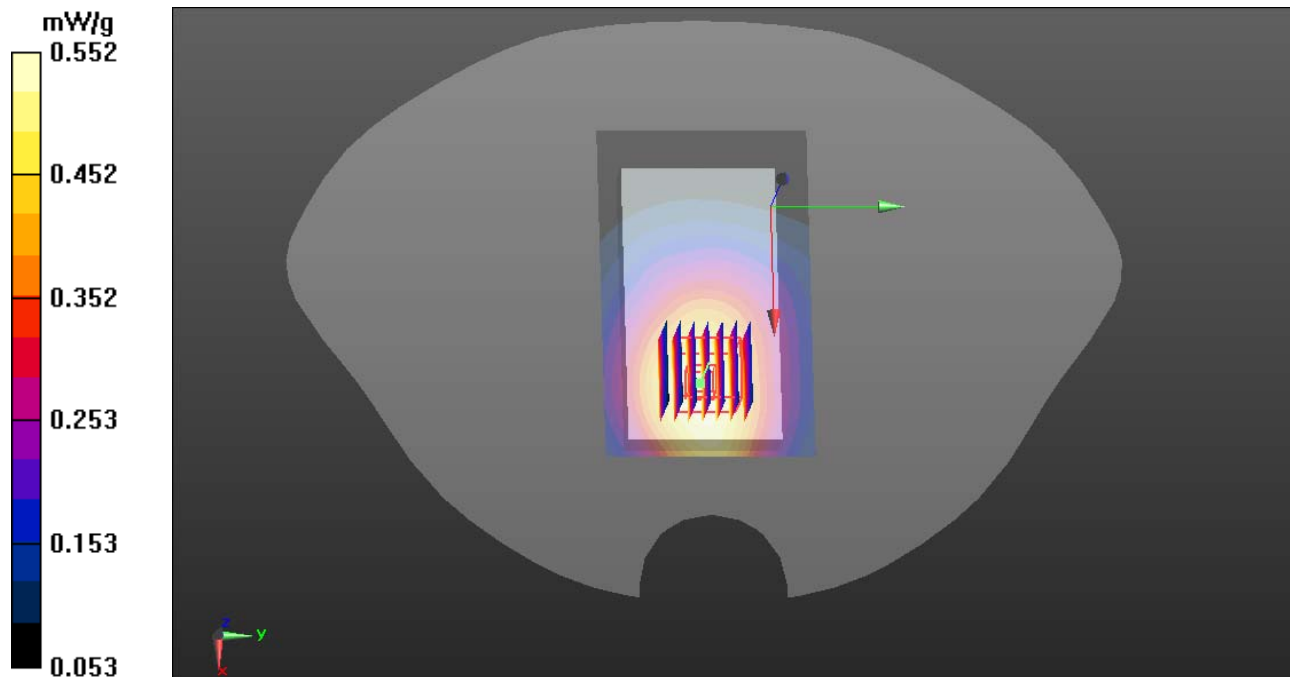



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot Down High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body Down High CH9538/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 mW/g


WCDMA Band II /Body Down High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.426 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.460 mW/g

Maximum value of SAR (measured) = 0.646 mW/g

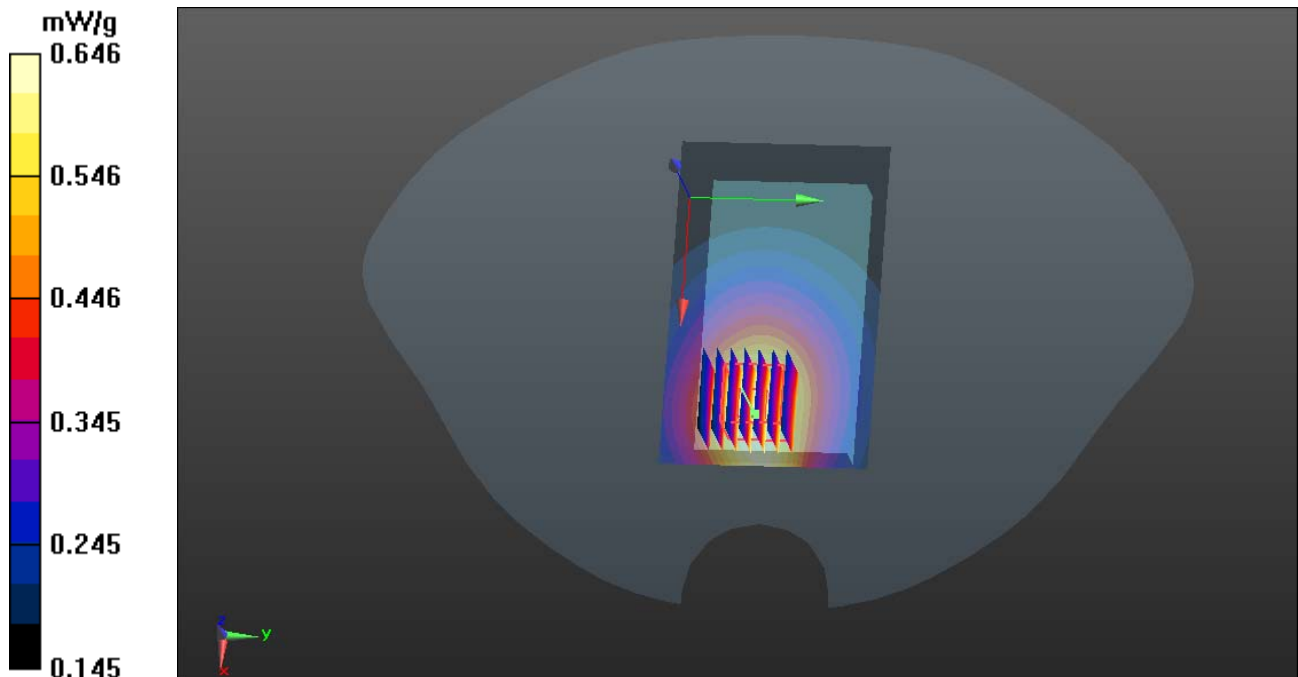



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot Bottom High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Bottom High CH9538/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.498 mW/g


WCDMA Band II/ Bottom High CH9538/ Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.939 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

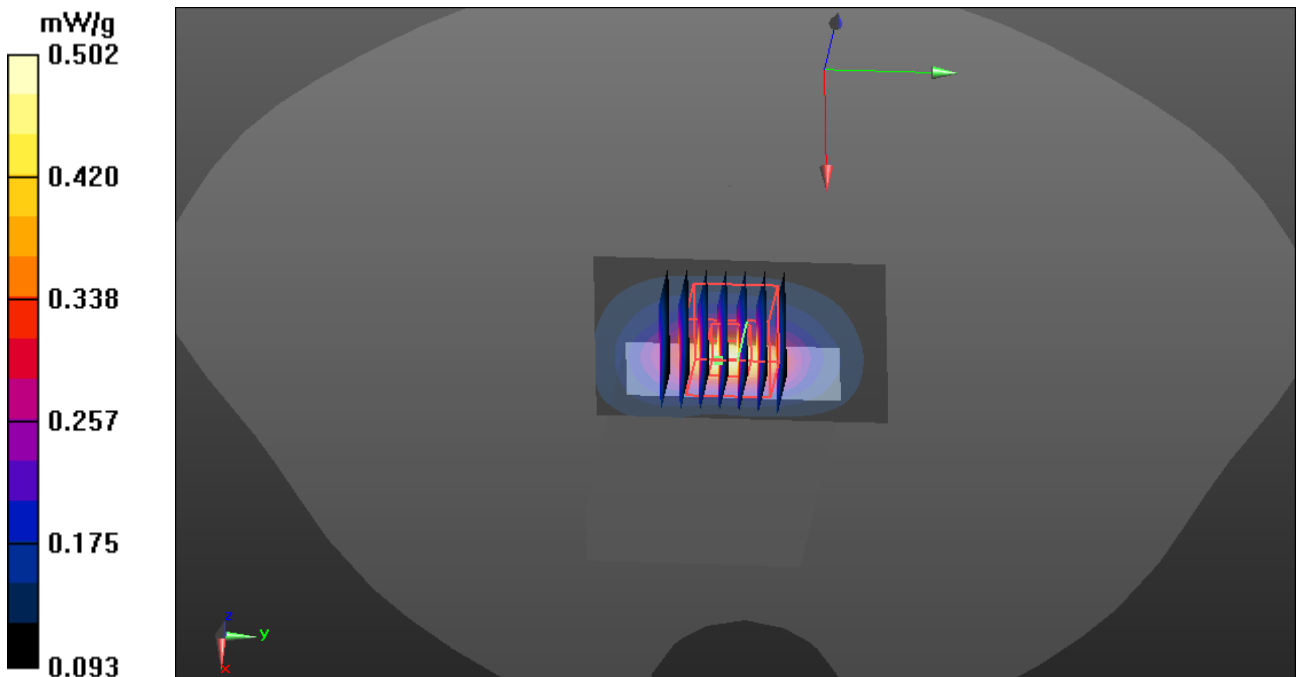



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot Right High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Right High CH9538/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.413 mW/g


WCDMA Band II/ Right High CH9538/ Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.186 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.687 mW/g

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.210mW/g

Maximum value of SAR (measured) = 0.420 mW/g

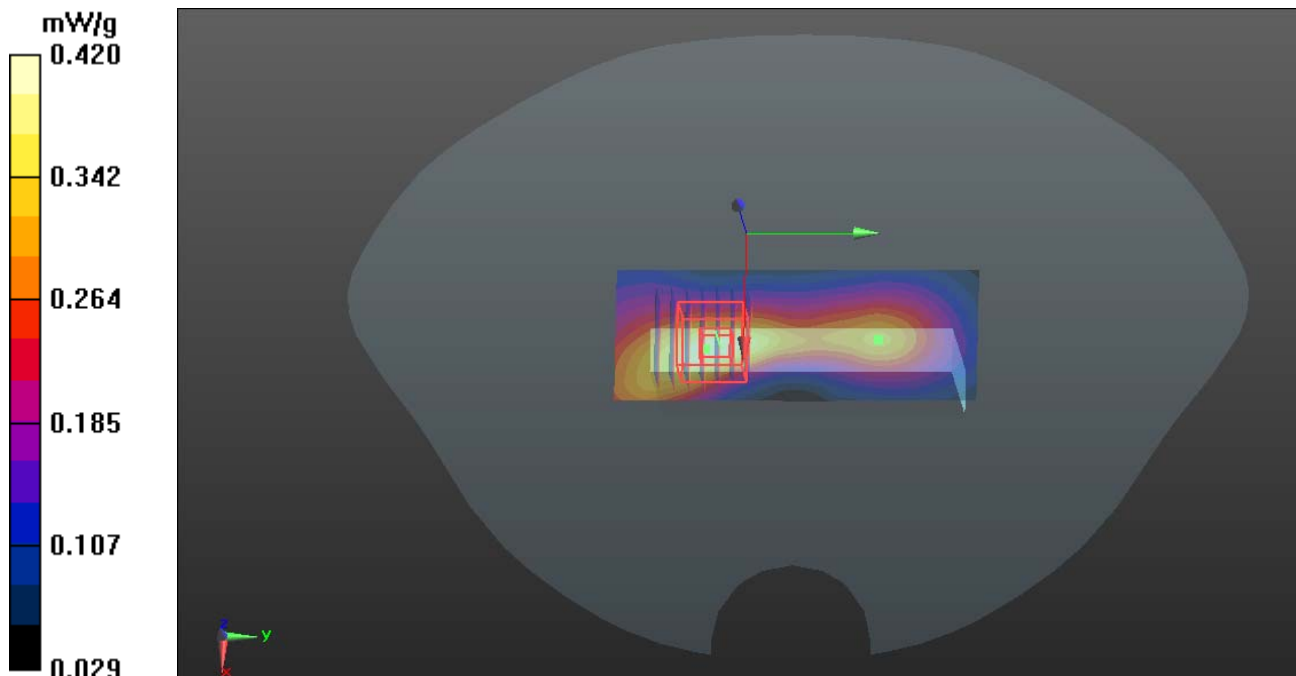



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot Left High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Left High CH9538/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.379 mW/g


WCDMA Band II/ Left High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.276 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

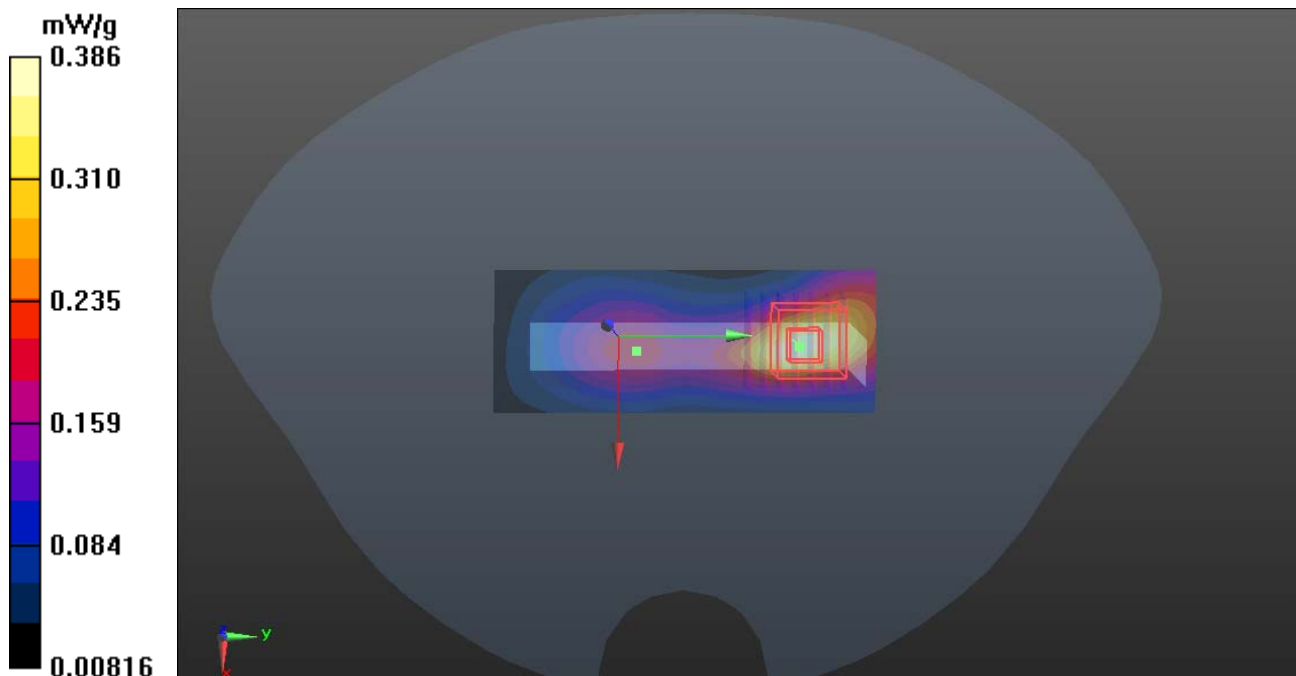



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b Body-Hotspot UP High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.978$ mho/m; $\epsilon_r = 53.231$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/UP Middle CH7/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.252 mW/g

IEEE 802.11b/UP Middle CH7/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.487 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.101mW/g

Maximum value of SAR (measured) = 0.257 mW/g

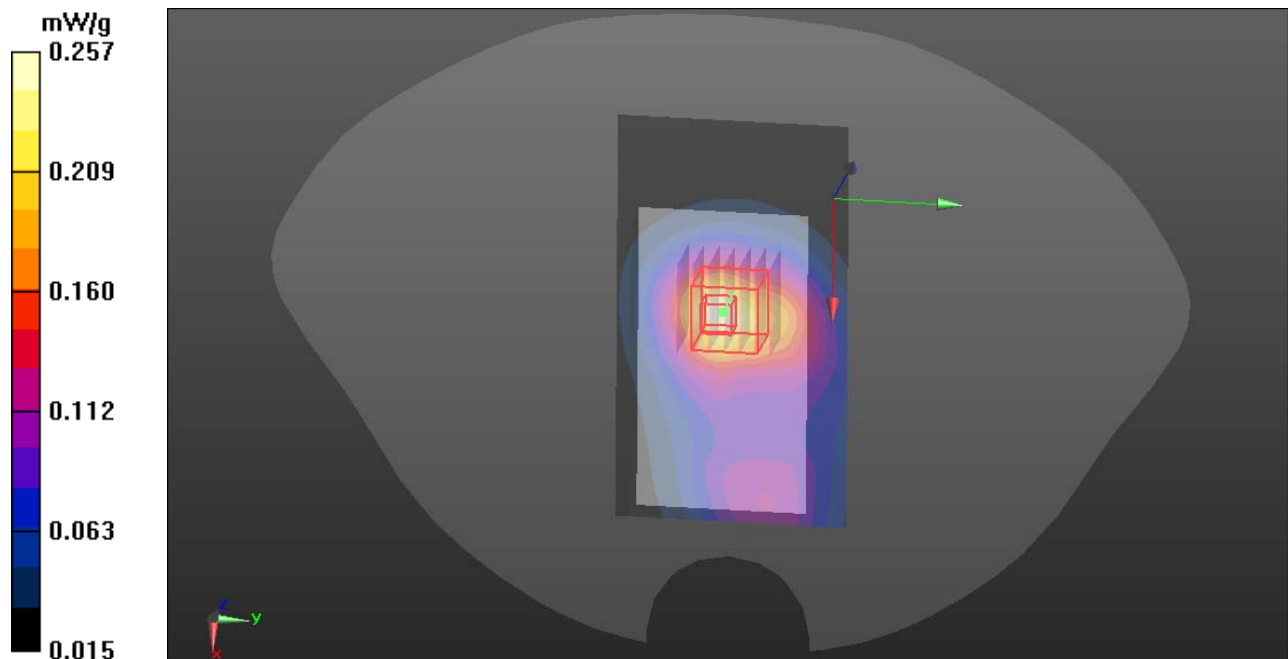



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b Body-Hotspot Down High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Down High CH11/Area Scan (51x81x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.578 mW/g

IEEE 802.11b/ Down Cheek High CH11/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.220 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.583 mW/g

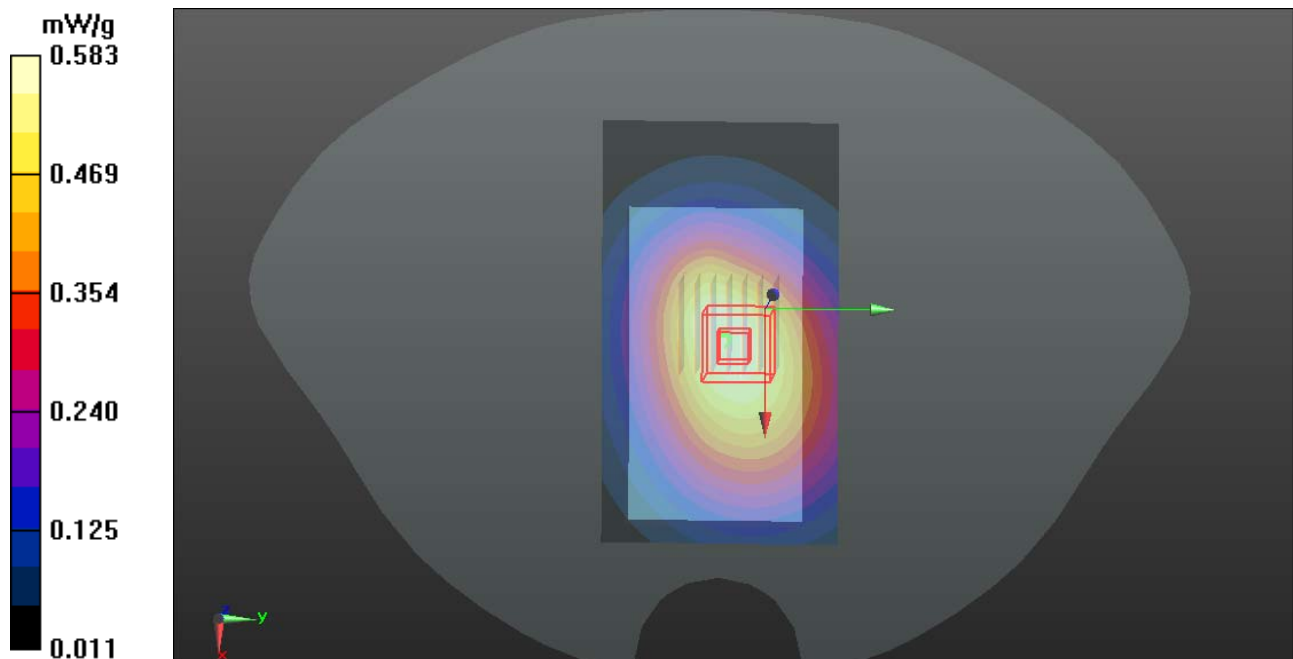



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b Body-Hotspot Top High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 53.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Top Middle CH7/Area Scan (51x31x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.444 mW/g

IEEE 802.11b/ Top Middle CH7/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.317 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.002 W/kg

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

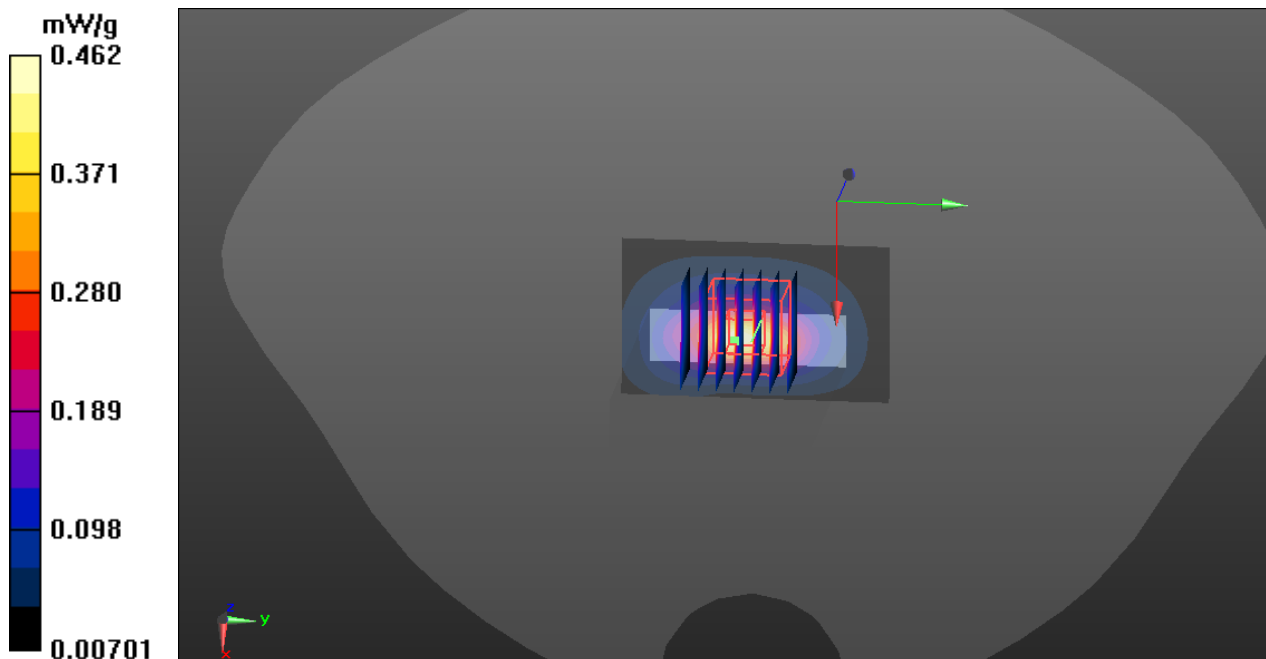



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b Body-Hotspot Left High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 53.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Left High CH11/Area Scan (81x31x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.110 mW/g

IEEE 802.11b/ Left High CH11/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.250 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

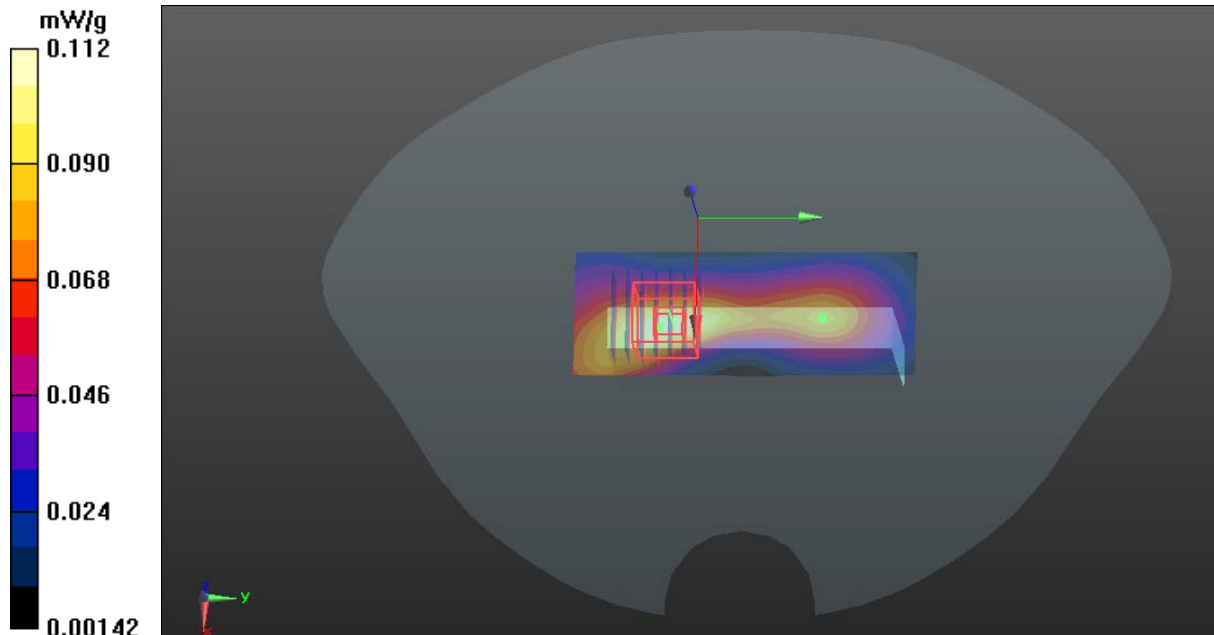



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850- Body Hotspot display screen Up High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/ GSM 850 Body display screen Up High CH251/Area Scan (141x91x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.327 mW/g

GSM 850/ GSM 850 Body display screen Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.903 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

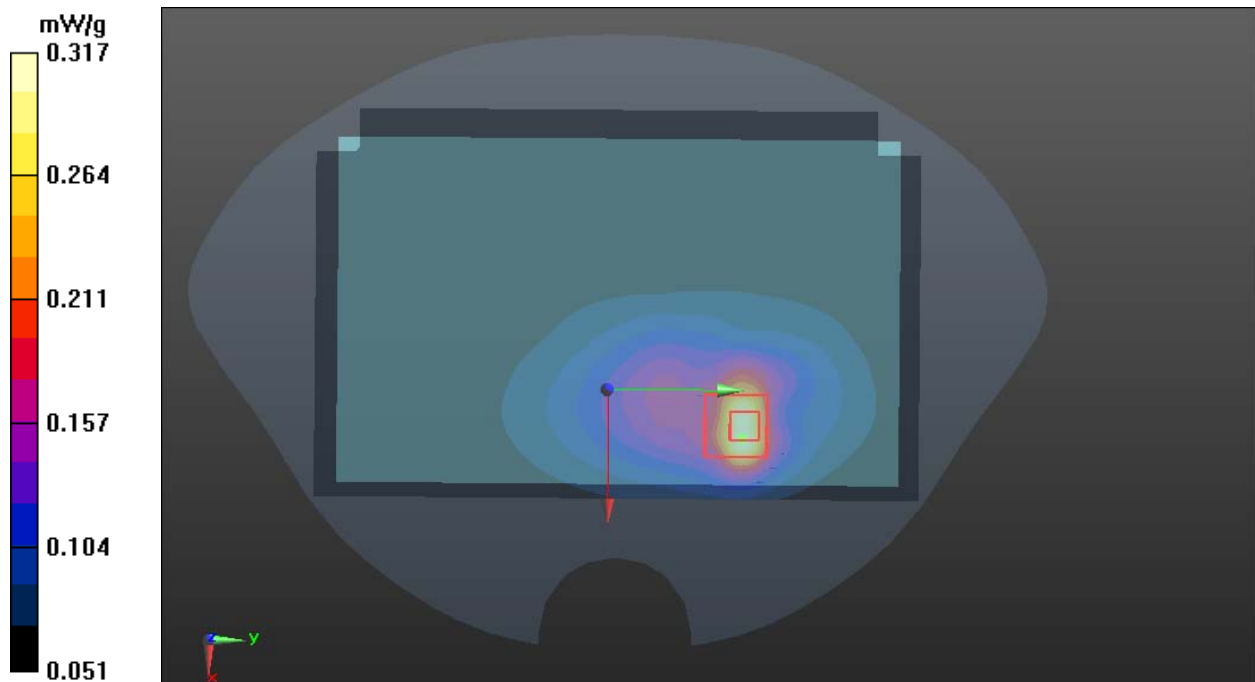



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM 850- Body Hotspot display screen Down High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/ GSM 850 Body display screen Down High CH251/Area Scan (141x91x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.428 mW/g

GSM 850/ GSM 850 Body display screen Down High CH251/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.993 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.439mW/g

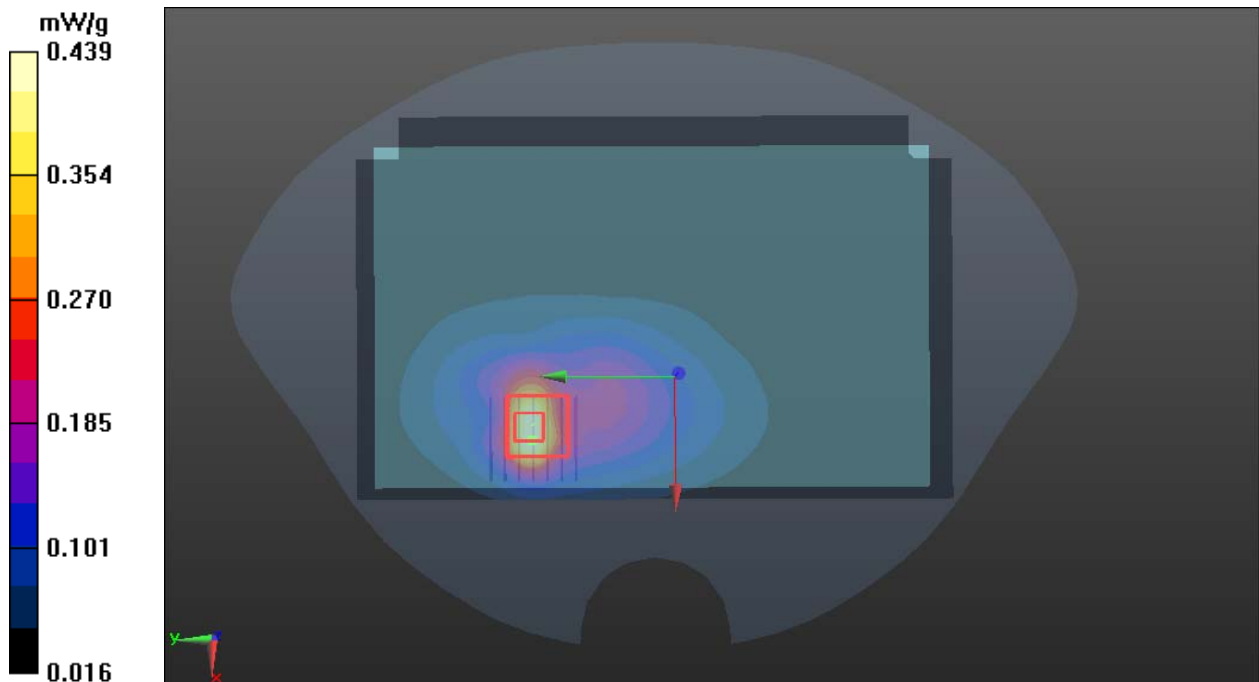



Laboratory: Compliance Certification Services Inc.

September 5, 2012

GSM850-Body-Hotspot display screen Right High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GSM; Communication System Band: GSM850 (824.2 - 848.8 MHz); Frequency: 848.6 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Right display screen High CH251/Area Scan (141x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.235 mW/g


GSM850/ Right display screen High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.427 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

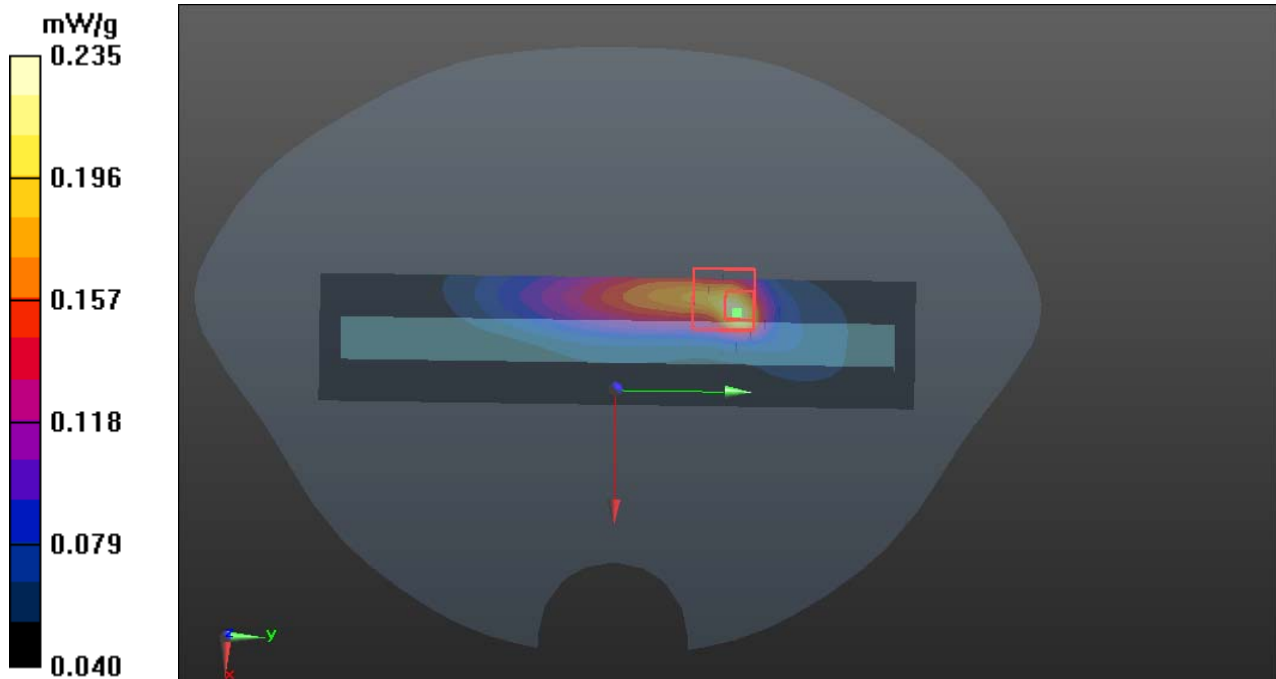



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot display screen Up High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ display screen Up High CH251/Area Scan (141x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 mW/g


GPRS850/ display screen Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.622 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.452 mW/g

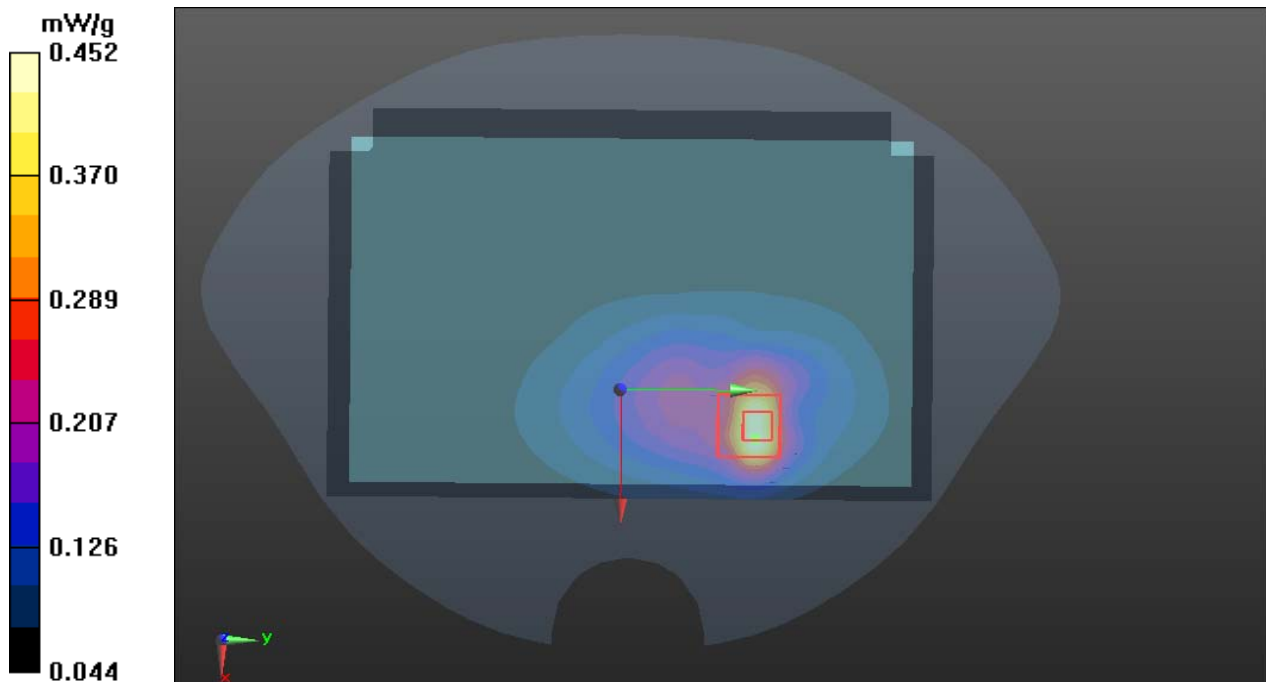



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot display screen Down High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ display screen Down High CH251/Area Scan (141x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.568 mW/g

GPRS850/ display screen Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.871 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

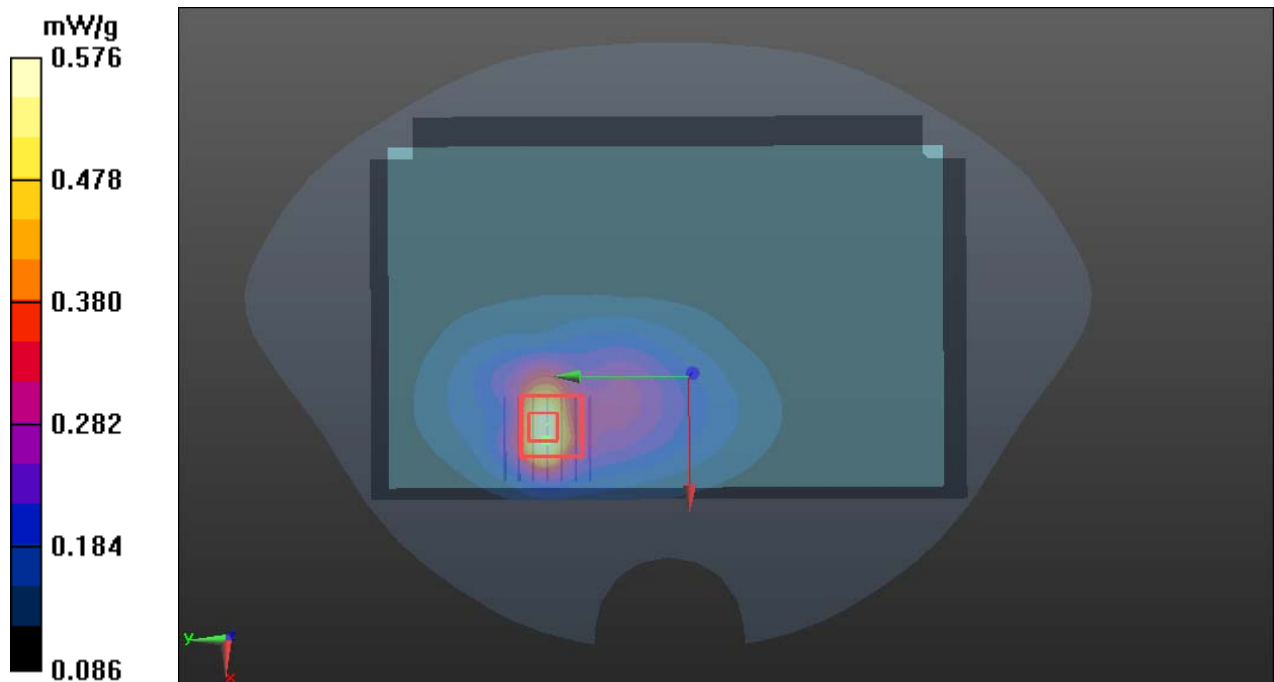



Test Laboratory: Compliance Certification Services Inc.

September 5, 2012

GPRS850-Body-Hotspot display screen Right High CH251

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System PAR: 3.01 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ display screen Right High CH251/Area Scan (141x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 mW/g

GPRS850/ display screen Right High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.427 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

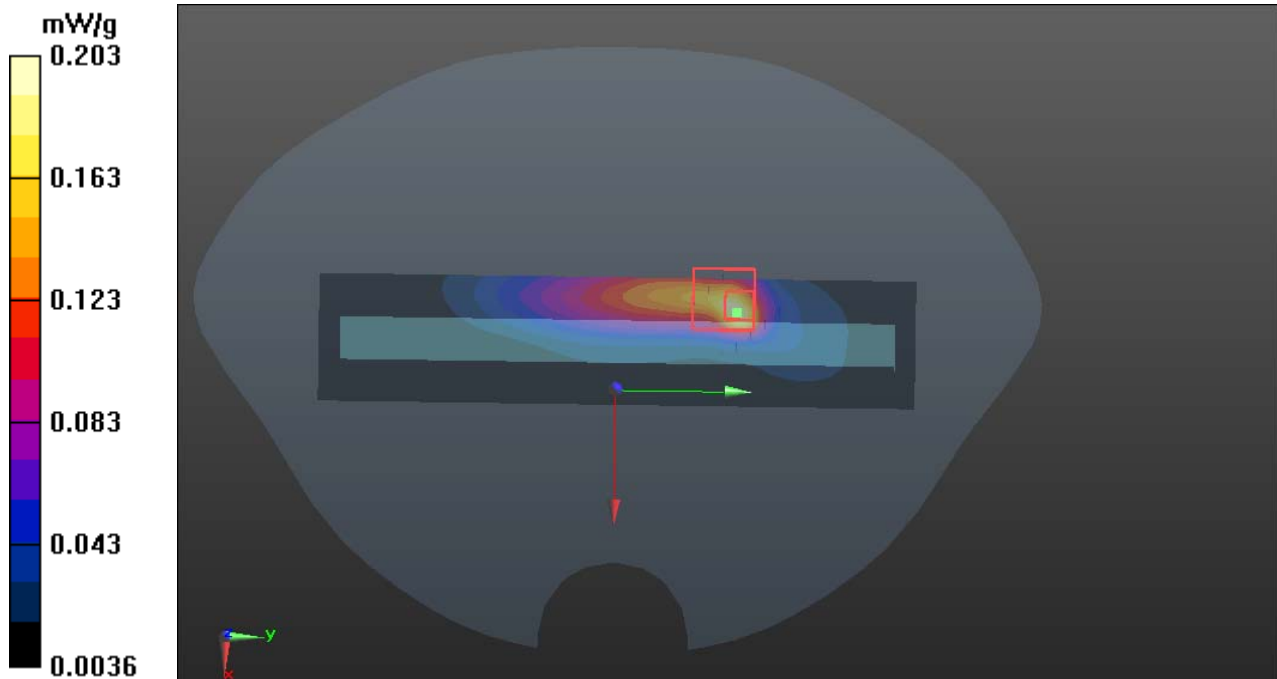



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot display screenUp High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ display screenUp High CH810/Area Scan (141x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.313 mW/g


PCS1900/ display screenUp High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.949 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

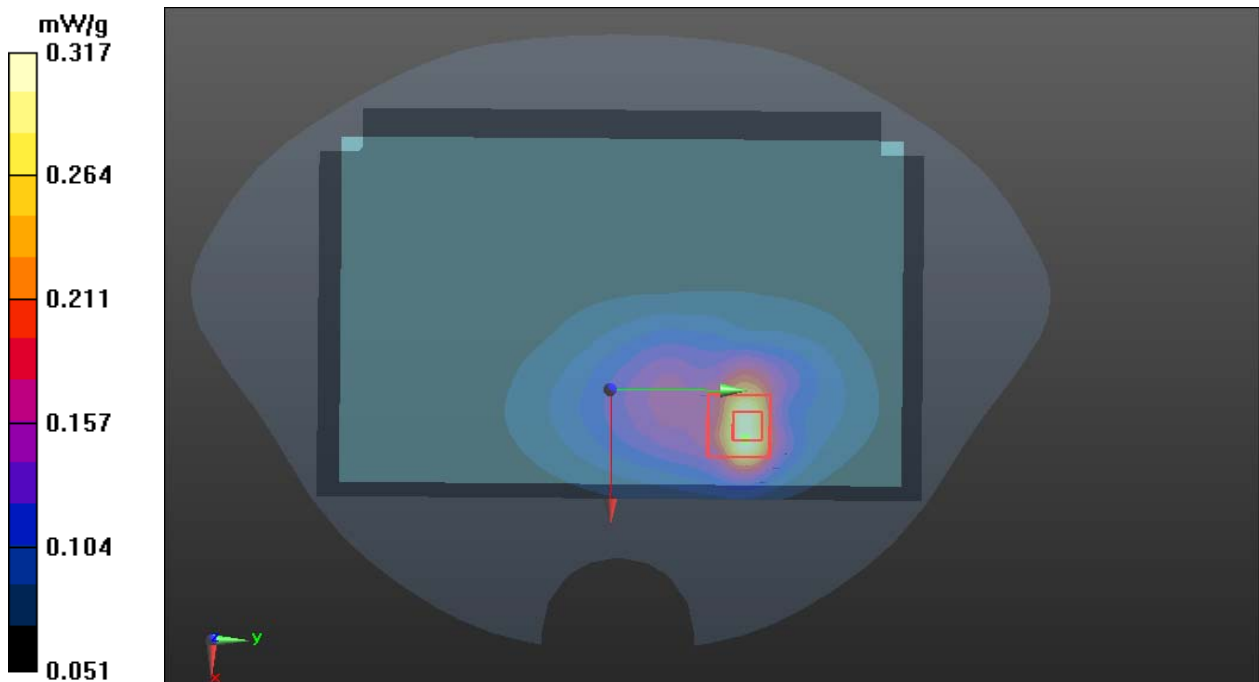



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot display screenDown High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ display screenDown High CH810/Area Scan (141x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.493 mW/g

PCS1900/ display screenDown High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.785 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.447 mW/g

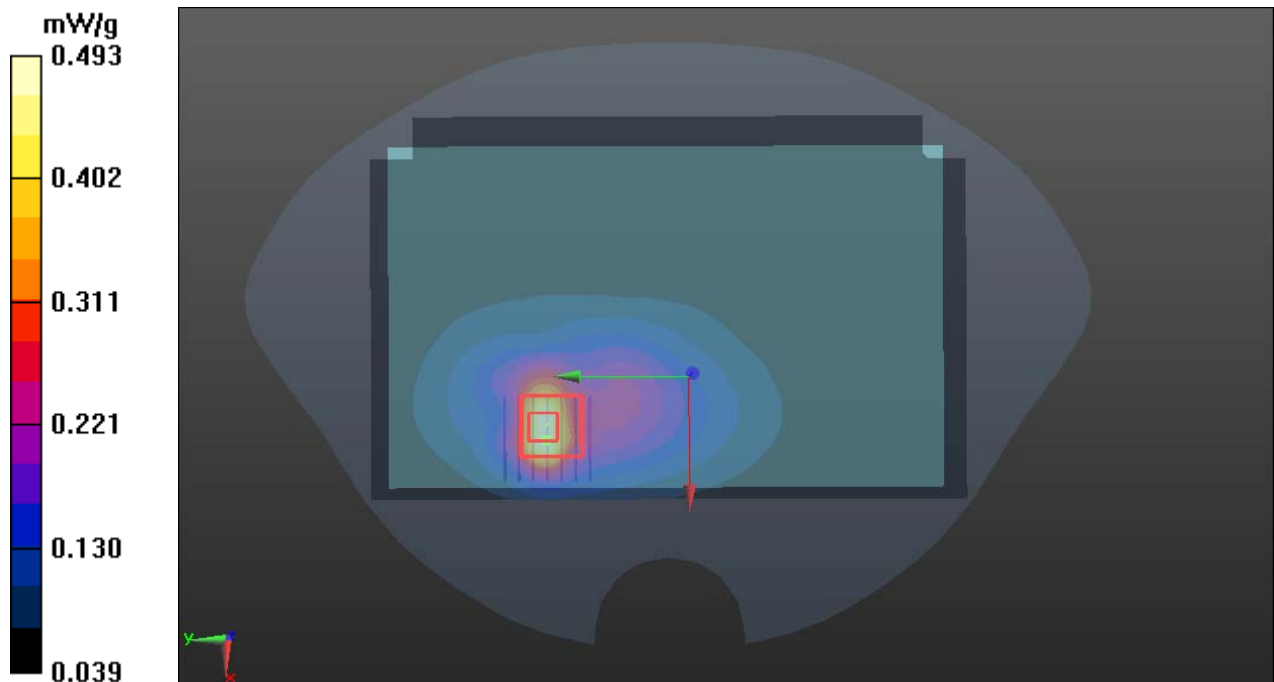



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

PCS-1900-Body-Hotspot display screen Right High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 9.03 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ display screen Right High CH810/Area Scan (141x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.248mW/g


PCS1900/ display screenRight High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.246 mW/g

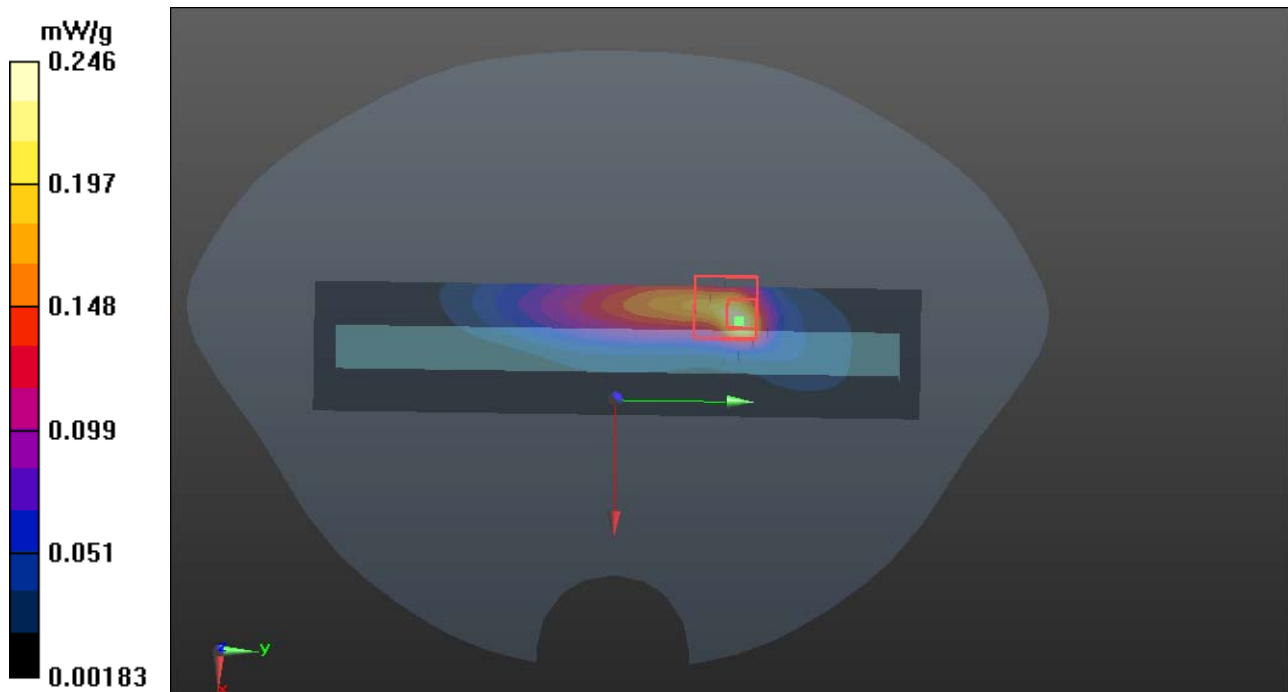



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot display screen Up High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ display screen Up High CH810/Area Scan (141x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.343 mW/g


GPRS1900/ display screen Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.949 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.347mW/g

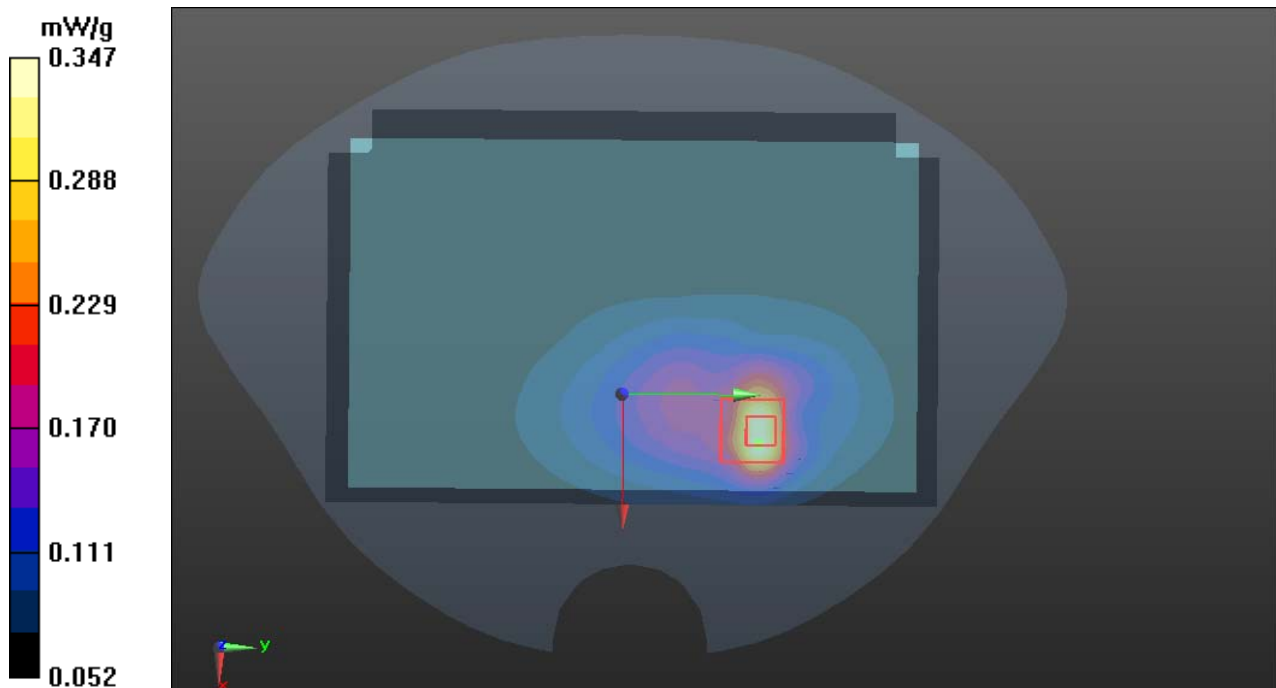



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot display screen Down High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Down display screen High CH810/Area Scan (141x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.592mW/g

GPRS1900/ Down display screen High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.355 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.599 mW/g

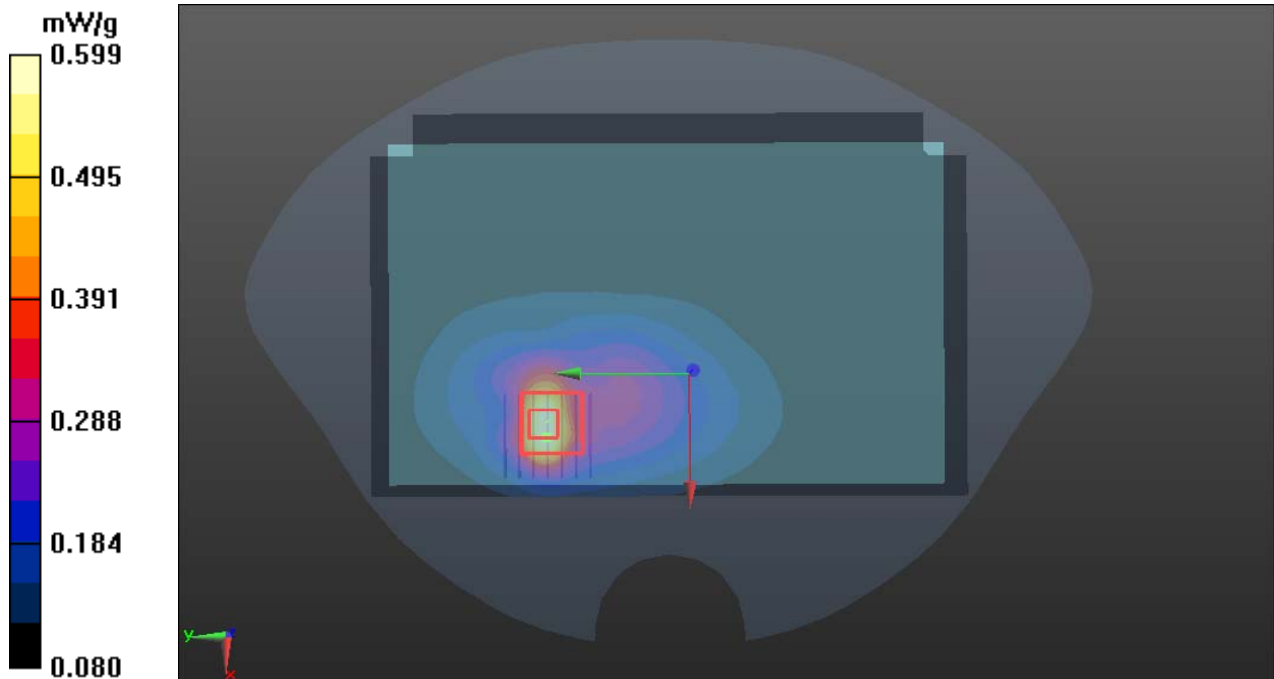



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

GPRS-1900-Body-Hotspot display screen Right High CH810

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System PAR: 3.01dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ display screen Right High CH810/Area Scan (141x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.214 mW/g


GPRS1900/ display screen Right High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

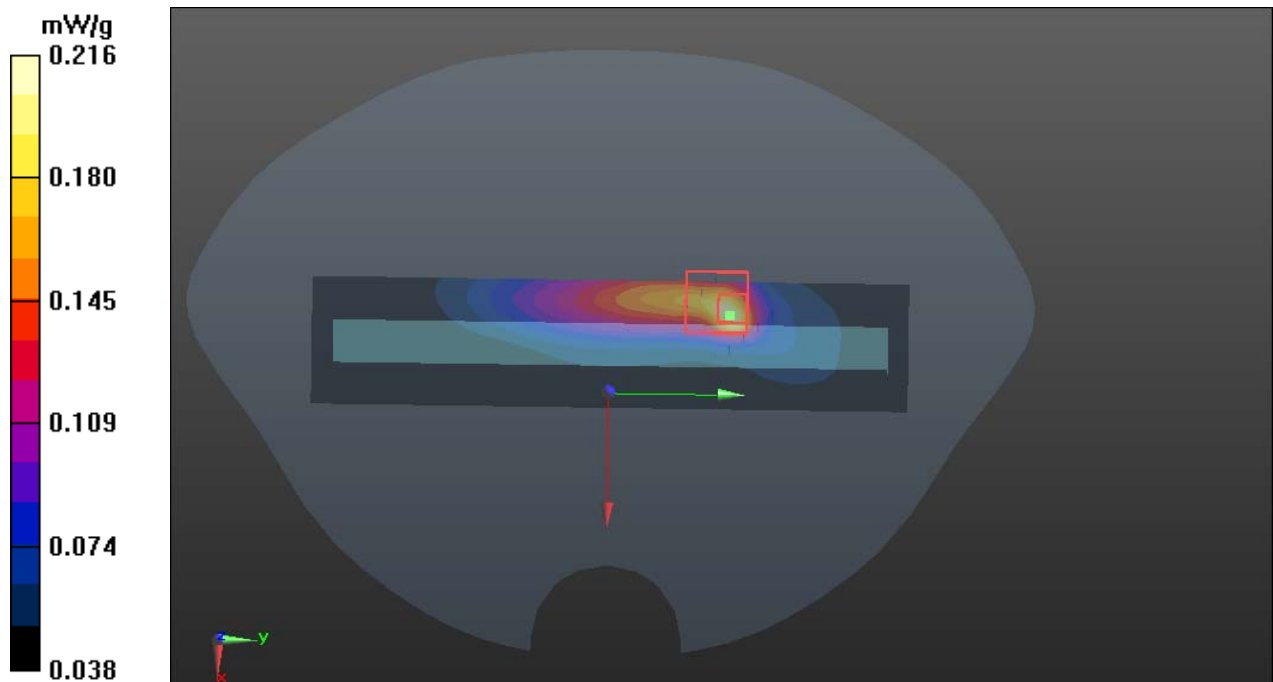



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot display screen Up High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body display screen Up High CH9538/Area Scan (141x91x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.512 mW/g

WCDMA Band II /Body display screen Up High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.363 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.552 mW/g

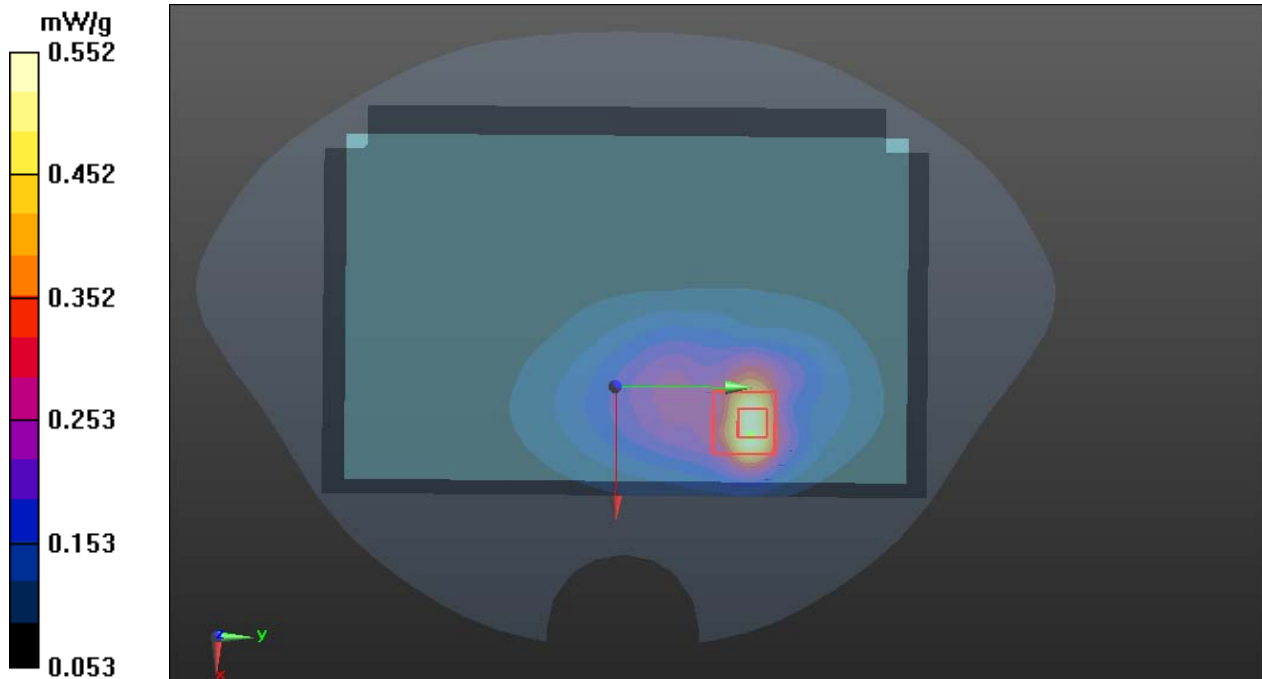



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot display screen Down High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body display screen Down High CH9538/Area Scan (141x91x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.646 mW/g

WCDMA Band II /Body display screen Down High CH9538/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.426 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 0.638 mW/g

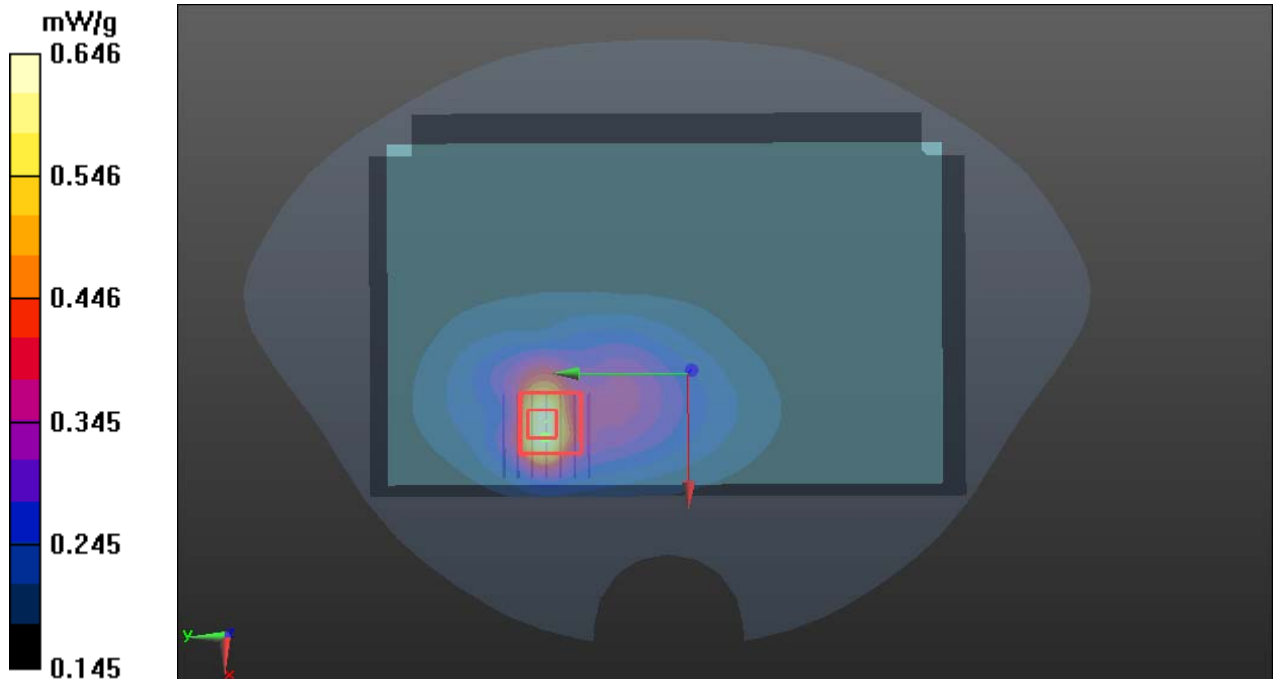



Test Laboratory: Compliance Certification Services Inc.

September 7, 2012

WCDMA Band II Body-Hotspot display screen Right High CH9538

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6 \text{ MHz}$; $\sigma = 1.527 \text{ mho/m}$; $\epsilon_r = 52.807$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ display screen Right High CH9538/Area Scan (141x31x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.420 mW/g

WCDMA Band II/ display screen Right High CH9538/ Zoom Scan (7x7x7)/Cube 0: Measurement grid:



$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.186 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.687 mW/g

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.208mW/g

Maximum value of SAR (measured) = 0.416 mW/g

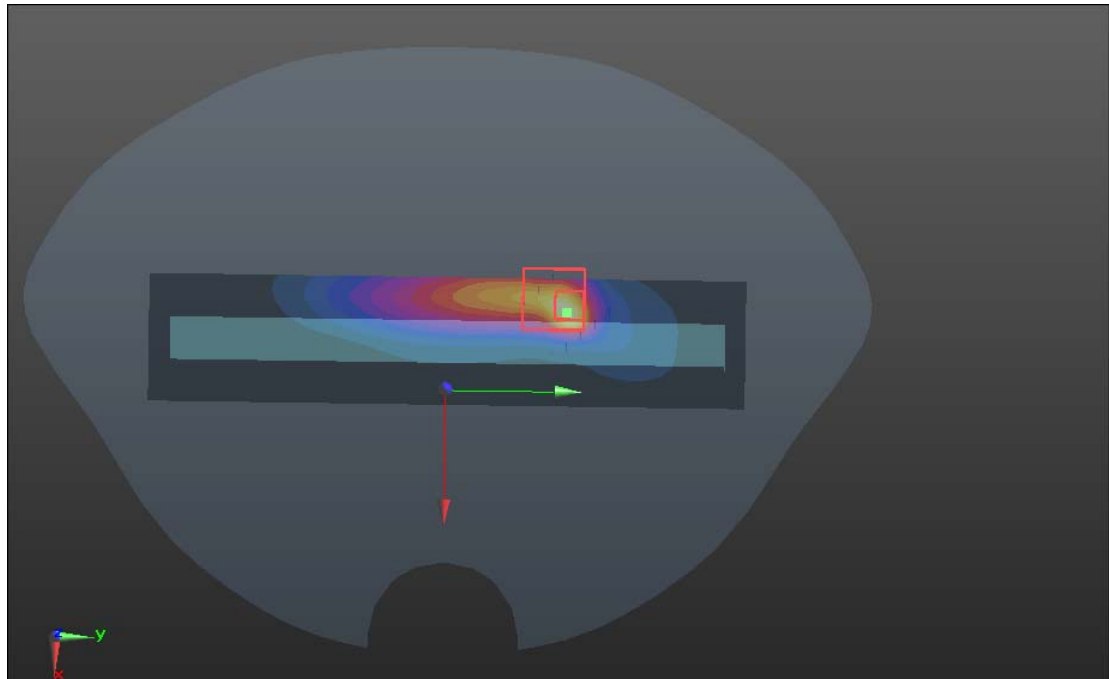



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b Body-Hotspot display screen UP High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.978$ mho/m; $\epsilon_r = 53.231$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/display screen UP Middle CH7/Area Scan (141x91x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.257 mW/g

IEEE 802.11b/display screen UP Middle CH7/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.487 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.075mW/g

Maximum value of SAR (measured) = 0.248 mW/g

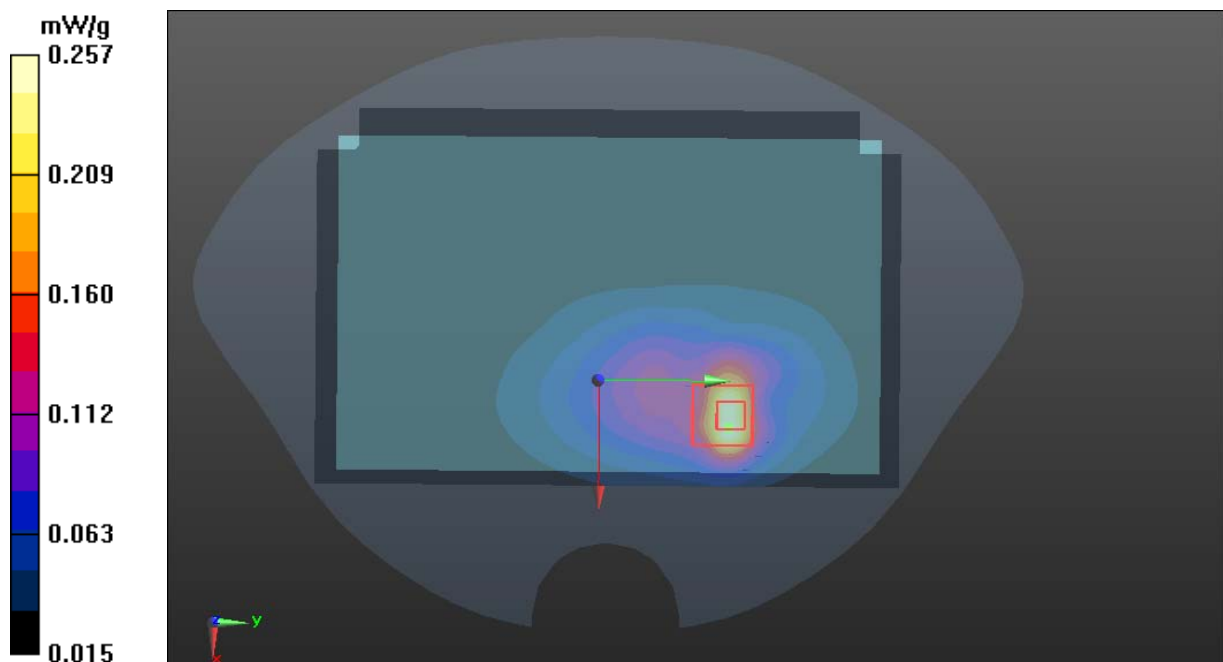



Test Laboratory: Compliance Certification Services Inc.

September 6, 2012

IEEE 802.11b Body-Hotspot display screen Down High CH11

DUT: Trans Phone; Type: TP703; Serial: 865746010015008

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ display screen Down High CH11/Area Scan (141x91x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.583 mW/g

IEEE 802.11b/ display screen Down Cheek High CH11/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.220 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.574 mW/g

