

MEASUREMENT REPORT
of
Bluetooth PCMCIA VISA Presenter

Applicant : TopSeed Technology Corp.
FCC ID : PTITSDL-BT04
Model : TSDL-BT04

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and Subpart C Section 15.247.

Applicant : TopSeed Technology Corp.
Applicant address : 9F-3, No. 16, Jain Ba Road, Chung Ho City, Taipei Hsien, Taiwan 235
Report No. : AA515060554
Test Date : September 09 ~ October 09, 2006

Prepared by:


 Jack Tsai

Approved by:


 Frank Tsai

Conditions of issue :

- (1) *This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.*
- (2) *This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.*
- (3) *This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.*



Federal Communications Commission

Declaration of Conformity

for the following equipment:

Product name : Bluetooth PCMCIA VISA Presenter
 Trade name : Topseed
 Model name : TSDL-BT04

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : AA515060554

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
 including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: Dong Guan Topseed Electronics Co., Ltd.	To be determined
Computer address: XiZhong Rd., XiTou Country, HouJie Town, Dong Guan City, Ganton,China	
ZIP / Postal code	
Contact person:	
Title:	
Internet e-mail address: bellkao@jpcco.con.cn	
Tel / Fax: (0769)-85969500 / (0769)-85969522	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	7
1.4 Configuration of System Under Test	8
1.5 Verify the Frequency and Channel	9
1.6 Test Procedure	10
1.7 Location of the Test Site	10
1.8 General Test Condition	10
 II. Section 15.101(a): Equipment authorization of unintentional radiators	 11
 III. Section 15.203 : Antenna Requirement.....	 12
 IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	 13
 V. Section 15.247(a) : Technical Description of the EUT	 14
 VI. Section 15.247(a)(1) : Carrier Frequency Separation.....	 15
6.1 Test Condition	15
6.2 Test Instruments Configuration	15
6.3 List of Test Instruments	16
6.4 Test Results	16
 VII. Section 15.247(a)(1)(ii) : Number of Hopping Frequencies	 18
7.1 Test Condition	18
7.2 List of Test Instruments	18
7.3 Test Instruments Configuration	18
7.4 Test Results	19

VIII. Section 15.247(a)(1)(ii) : Time of Occupancy (Dwell time)	21
8.1 Test Condition	21
8.2 List of Test Instruments	21
8.3 Test Instruments Configuration	22
8.4 Test Results	22
IX. Section 15.247(a)(1)(ii) : 20dB Bandwidth	26
9.1 Test Condition	26
9.2 Test Instruments Configuration	26
9.3 List of Test Instruments	27
9.4 Test Results	27
X. Section 15.247(b) : Peak Output Power	30
10.1 Test Condition & Setup	30
10.2 List of Test Instruments	30
10.3 Test Results	31
XI. Section 15.247(c) : Band-edge Compliance	32
11.1 Test Condition & Setup	32
11.2 List of Test Instruments	32
11.3 Test Instruments Configuration	33
11.4 Test Results	33
XII. Section 15.247(c) : Spurious Radiated Emissions	36
12.1 Test Condition & Setup	36
12.2 List of Test Instruments	38
12.3 Test Results of Spurious Radiated Emissions	39
XIII. Section 15.247(d) : Power Spectral Density	49
13.1 Test Condition & Setup	49
13.2 Test Instruments Configuration	49
13.3 List of Test Instruments	49
13.4 Test Result of Power Spectral Density	50

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	PTITSDL-BT04
Product Name	:	Bluetooth PCMCIA VISA Presenter
Model	:	TSDL-BT04
Frequency Range	:	2402MHz to 2480MHz
Support Channel	:	79 Channels
Channel Spacing	:	1MHz
Modulation Skill	:	GFSK
Power Type	:	Powered by 3V Lithium battery,

1.3 Test method


EUT Only: (Radiated test)

- (1) Powered by batteries.
- (2) The notebook PC and test fixture is connected by RS-232 cable, and then test fixture connected with EUT setting test mode.
- (3) The Notebook PC and test fixture is moving when test mode set finish. The software provided by the manufacturer, the test is performed under the specific conditions.
- (4) Set different channel (CH1/CH40/CH79) and making EUT to the mode of continuous transmission.

The PCMCIA interface of EUT have not use function, it just store to notebook PC in the same style interface.

1.4 Configuration of System Under Test

1.4.1 Radiated of Unintentional and Intentional

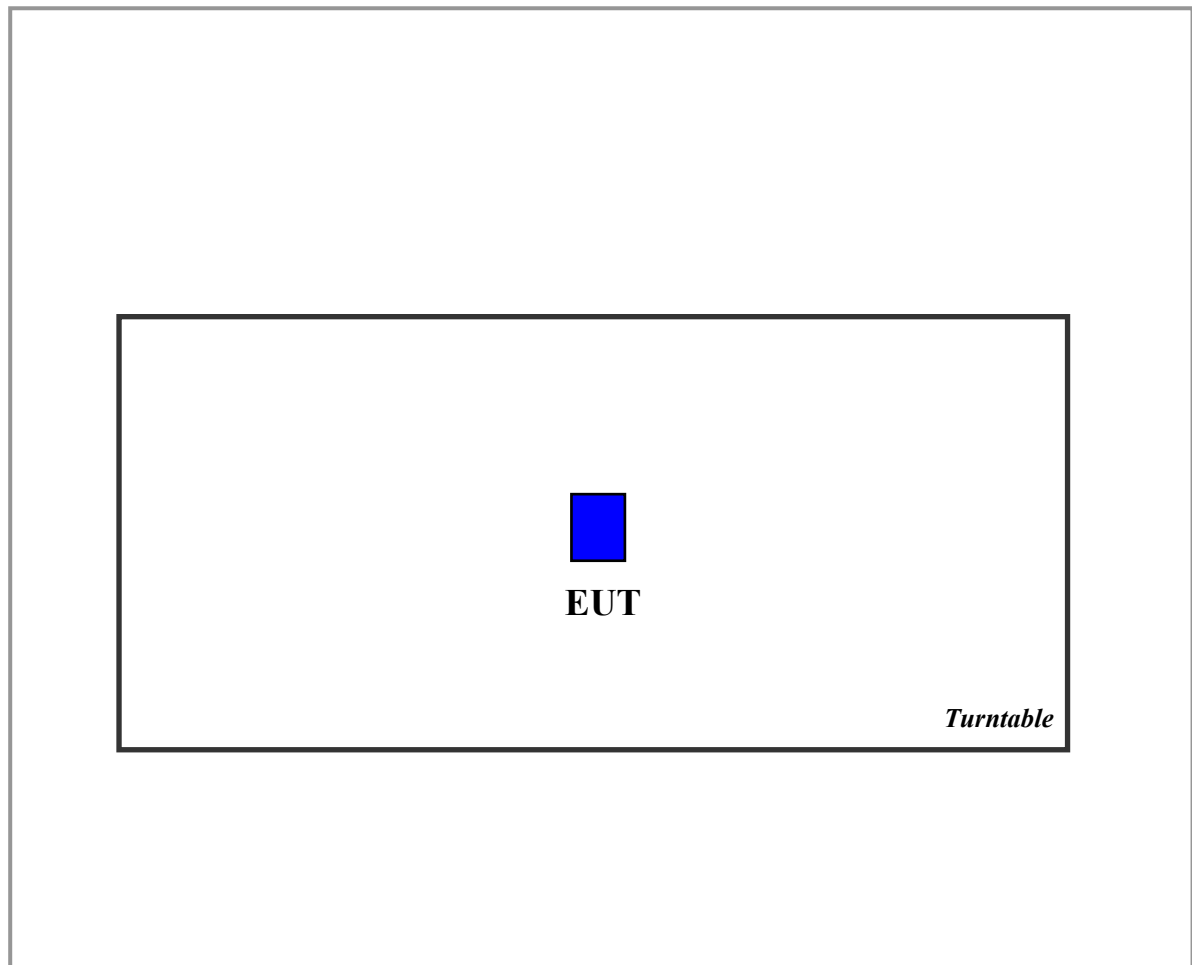

1.5 Verify the Frequency (MHz) and Channel

CH	0	1	2	3	4	5	6	7	8	9
0		2402	2403	2404	2405	2406	2407	2408	2409	2410
1	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420
2	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430
3	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440
4	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450
5	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460
6	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470
7	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480

Note:

1. This is for confirming that all frequencies are in 2.402GHz to 2.480GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.402GHz to 2.480GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 01; Middle: Channel – 40; Bottom: Channel – 79.

1.6 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.7 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79).

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a wireless interface by Bluetooth and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section 15.107 (Conducted limits) and Section 15.109 (Radiated emission limits) is same as Section 15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT has an integrated antenna permanently attached on the PCB, which inside the housing. In addition, there is no external antenna or connector employed. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The EUT operates solely by the battery (3V Lithium battery,).

According to the rule of section 15.207(c), the EUT exempt to the power line conducted test.

4.2 List of Test Instruments

N/A (Not applicable)

4.3 Test Result of Conducted Emissions

N/A (Not applicable)

V. Section 15.247 (a): Technical description of the EUT

Based on the Section 2.1, *Frequency Hopping Spectrum System* is a spread spectrum system in which the carrier has been modulated by a *high speed spreading code* and an *information data stream* with its *known hopping algorithm* and *avoidance method*. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the *operational description* demonstrates the operation principles of the base-band processor employed by the EUT, shows that which is a complete FHSS base-band processor and meets the definition of the *Frequency Hopping Spectrum System*.

VI. Section 15.247(a)(1): Carrier Frequency Separation

6.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = Auto


Detector Function = peak

Trace = max hold

Setting up procedure is written on 1.3 test method.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channel. The limit is specified in one of the subparagraphs of this section. Submit this plot.

6.2 Test Instruments Configuration

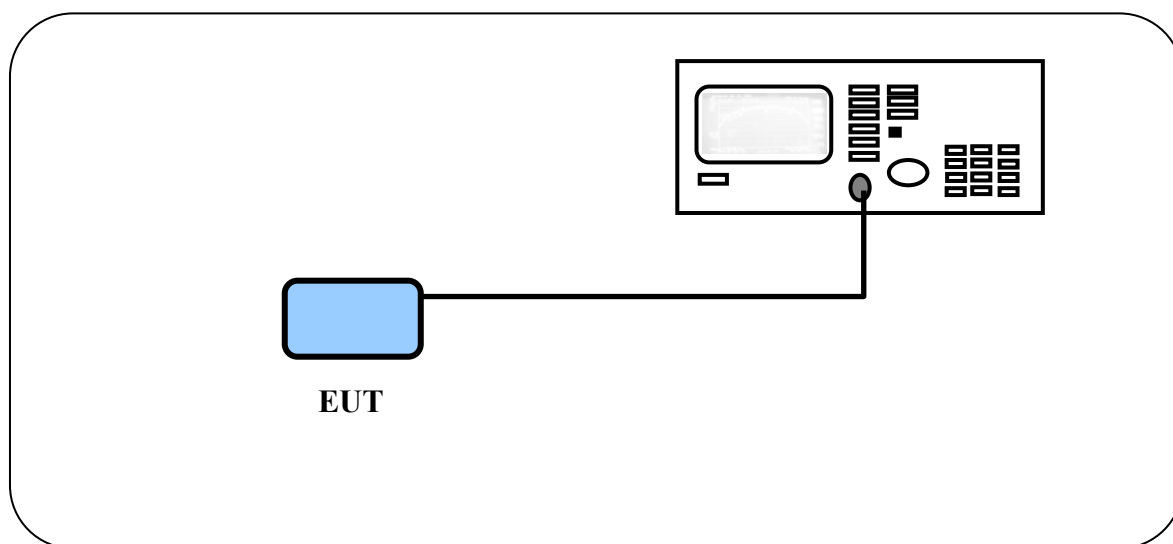

Test Configuration of carrier frequency separation

6.3 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Calibration Date
				Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06

6.4 Test Results


CH	Channel Separation
01	996 kHz
40	996 kHz
79	996 kHz



Ch01

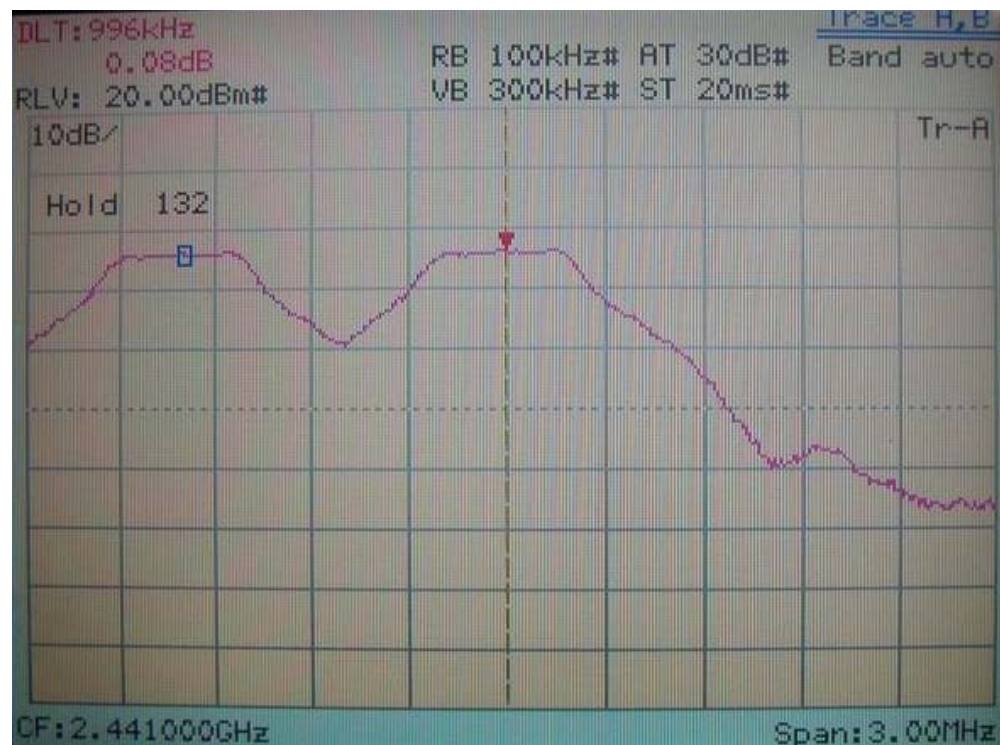

Ch40

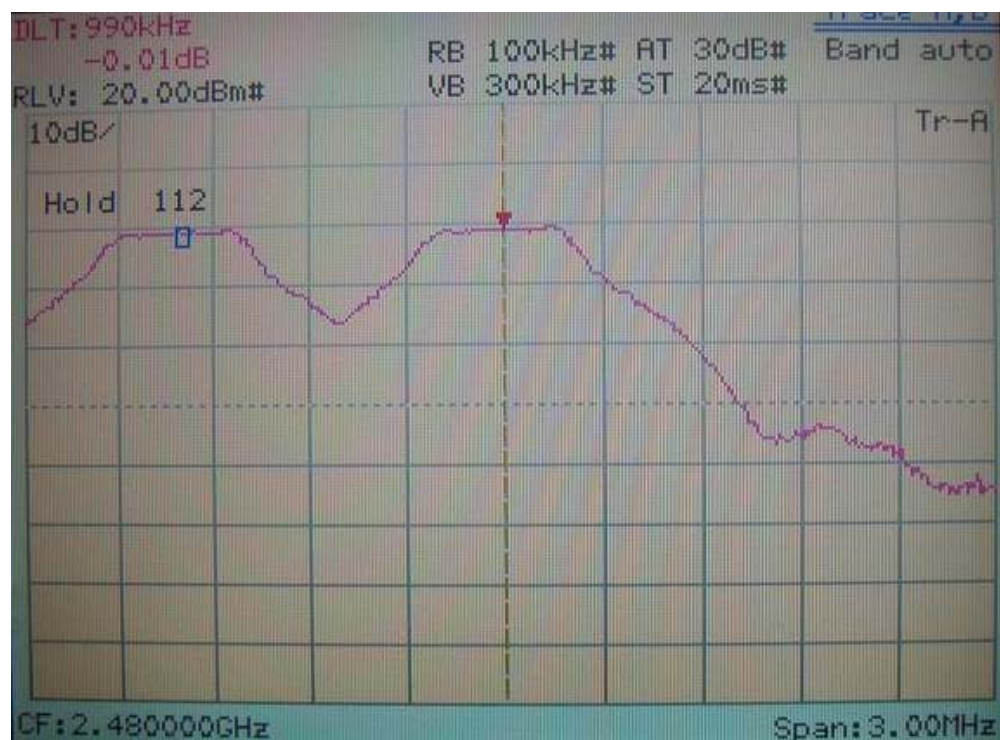

Ch79

VII. Section 15.247(a)(1)(ii) Number of Hopping Frequencies

7.1 Test Condition

The EUT must have its Hopping function enabled. Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections. In order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this section.

7.2 List of Test Instruments



				<u>Calibration Date</u>
<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Next time</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06



7.3 Test Instruments Configuration

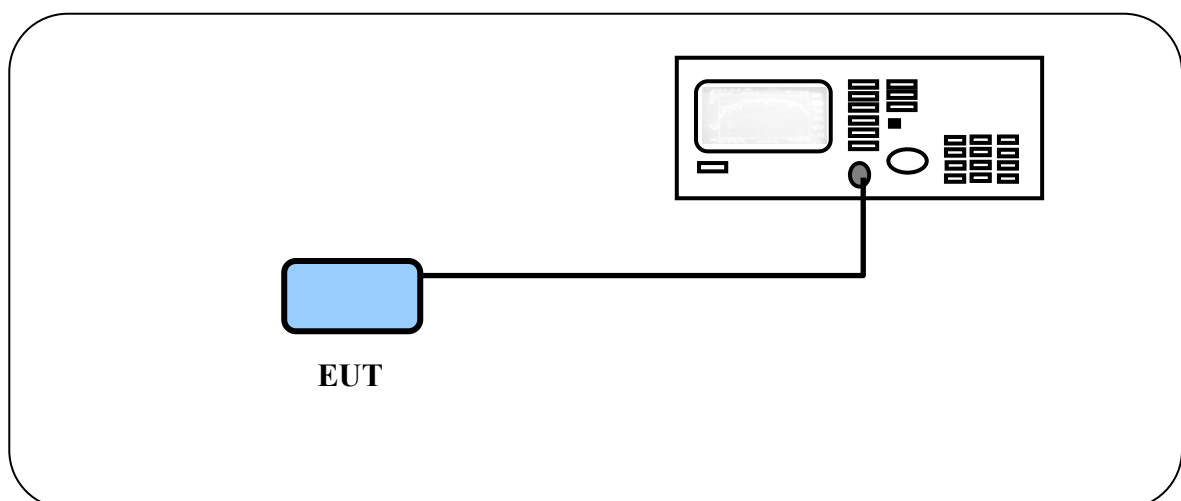

Test Configuration for number of hopping frequencies

7.4 Test Results

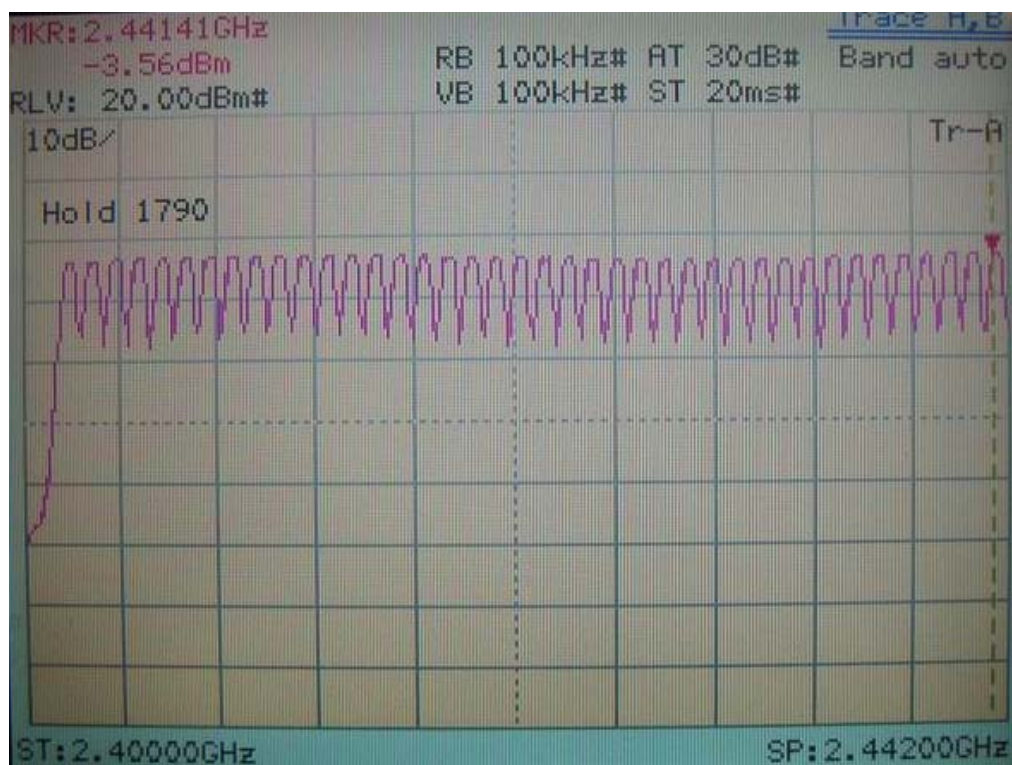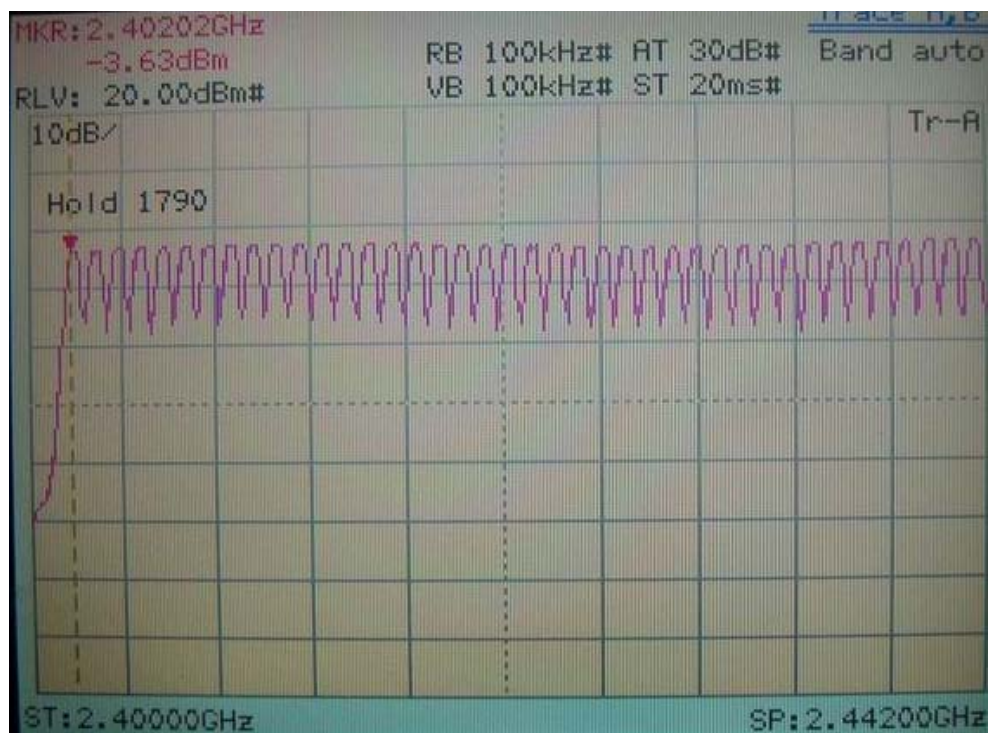

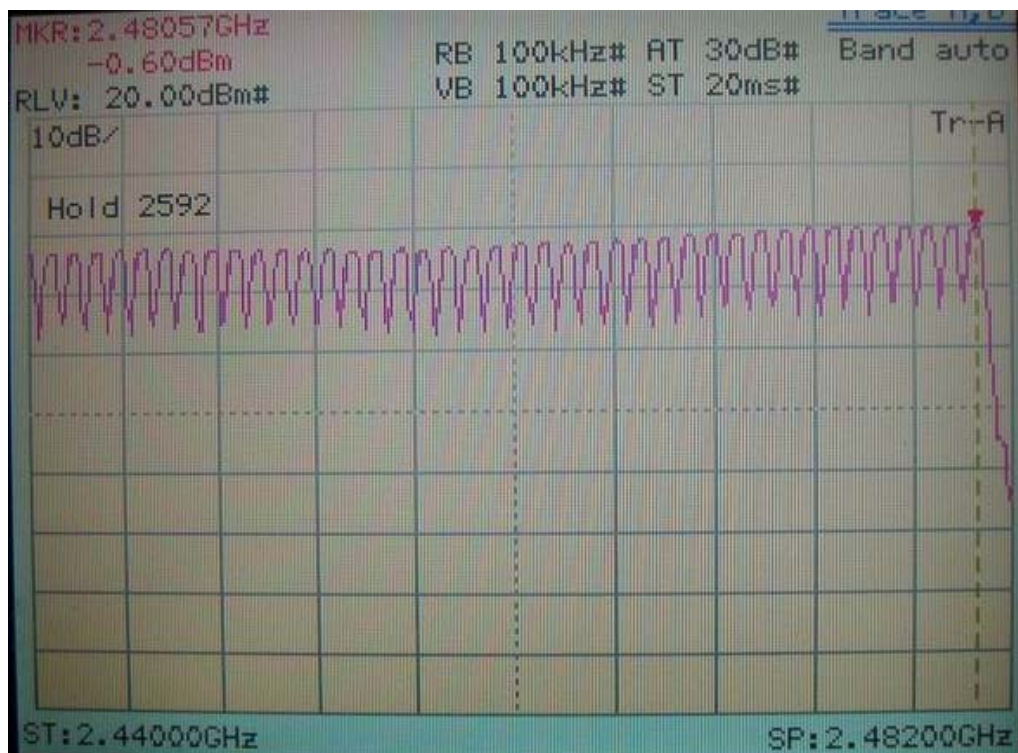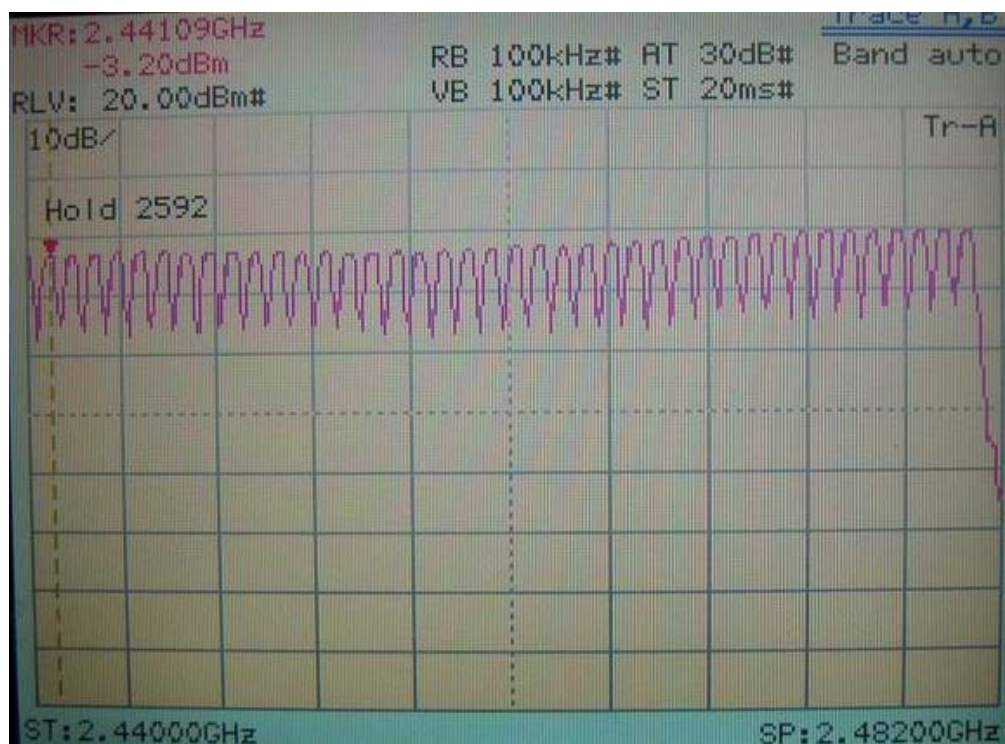

VIII. Section 15.247(a)(1)(ii) Time of Occupancy (Dwell Time)

8.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = zero span, centered on a hopping channel

RBW = 3M

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak


Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

8.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06
Horn Antenna	3115	EMCO	9104-3668	01/23/07
Bluetooth Test Set	MT8852A	ANRITSU	6k00001241	N/A
RF Splitter	ZFSC-2-2500	MINI-CIRCUITS	SF863200403	N/A

8.3 Test Instruments Configuration

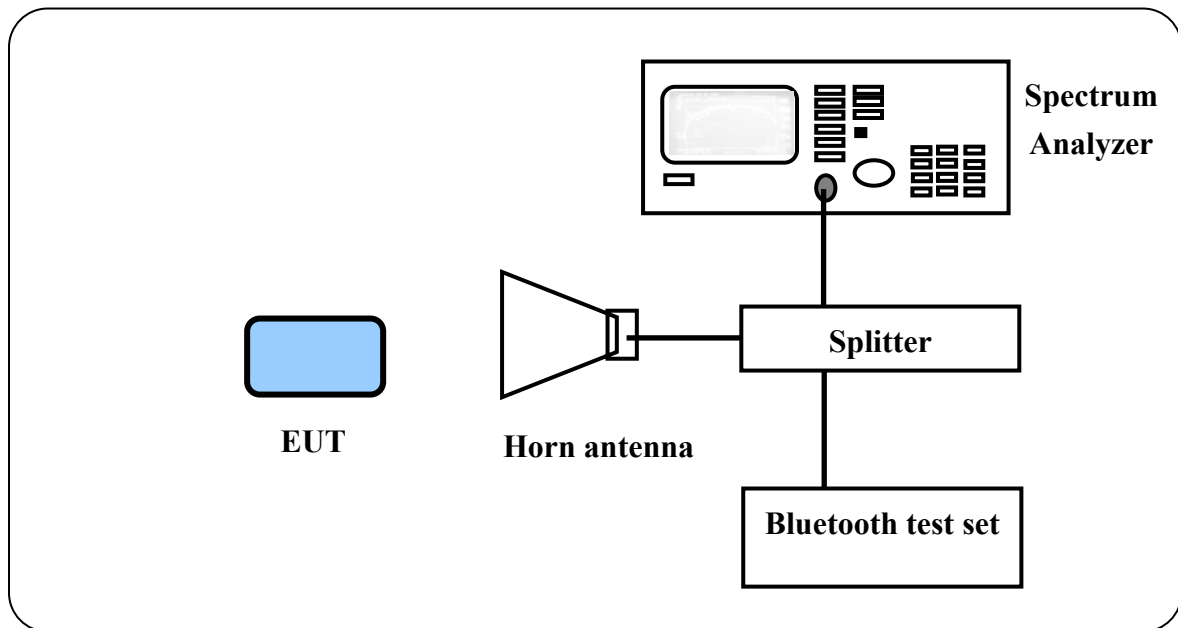

Note:

1. Running Bluetooth test set for Test mode.
2. Spectrum Analyzer record test results.


8.4 Test Results

CH	DH1-Packet (ms)	DH3-Packet (ms)
01	$0.380 \times 31.6 \times 10.12 = 121.52$	$1.650 \times 31.6 \times 5.06 = 263.83$
40	$0.380 \times 31.6 \times 10.12 = 121.52$	$1.650 \times 31.6 \times 5.06 = 263.83$
79	$0.378 \times 31.6 \times 10.12 = 120.88$	$1.650 \times 31.6 \times 5.06 = 263.83$




Note :

1. $0.4 \times 79 = 31.6$ s
2. DH1: $1600 \div 79 \div 2 = 10.12$ ms
3. DH3: $1600 \div 79 \div 4 = 5.06$ ms
4. The EUT just support function of DH1 and DH3.
4. Show as following page.

DH1-Packet

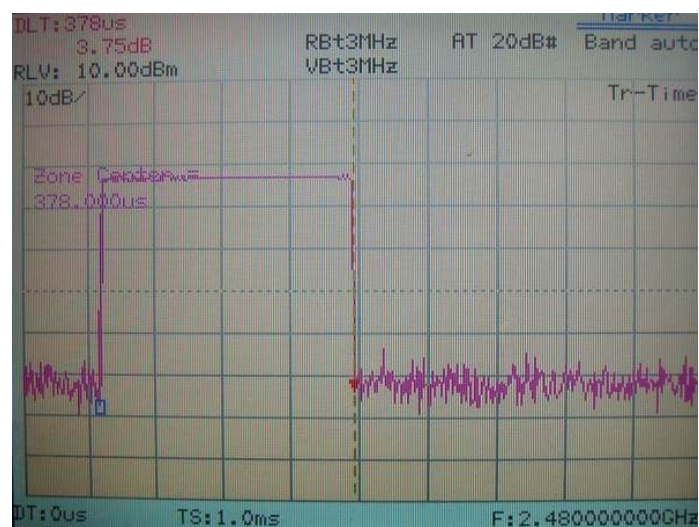

DH3-Packet

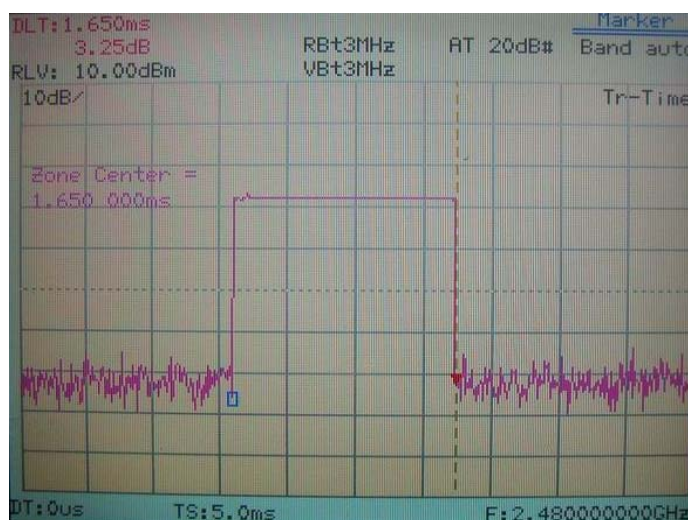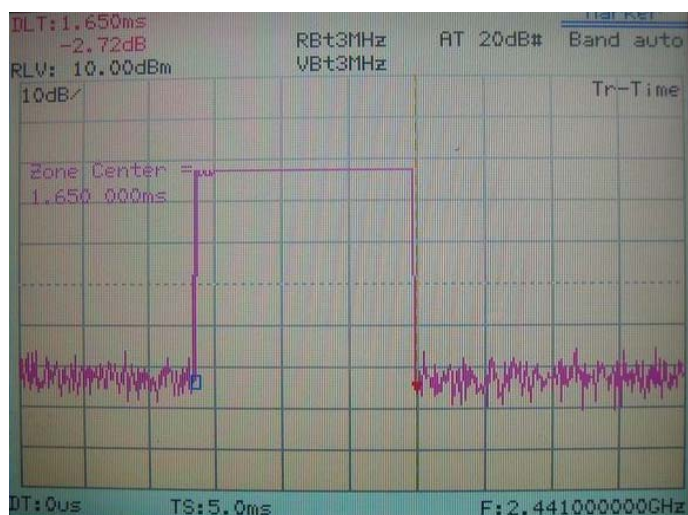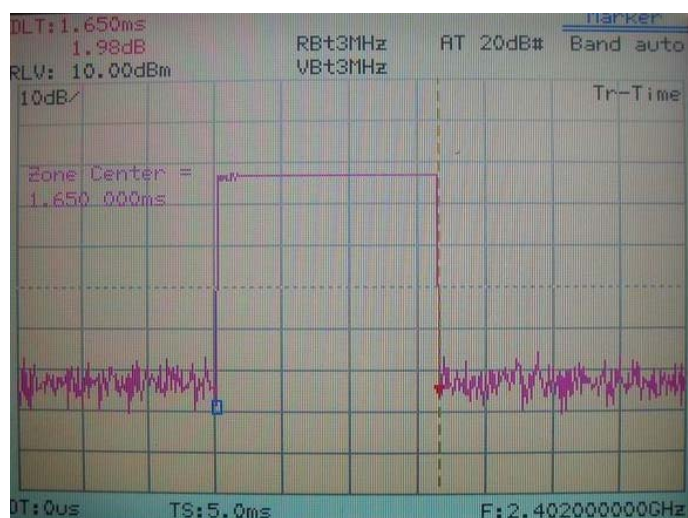

IX. Section 15.247(a)(1)(ii) 20dB Bandwidth

9.1 Test Condition

Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW \geq 1% of the emission bandwidth

VBW \geq RBW


Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s).

9.2 Test Instruments Configuration

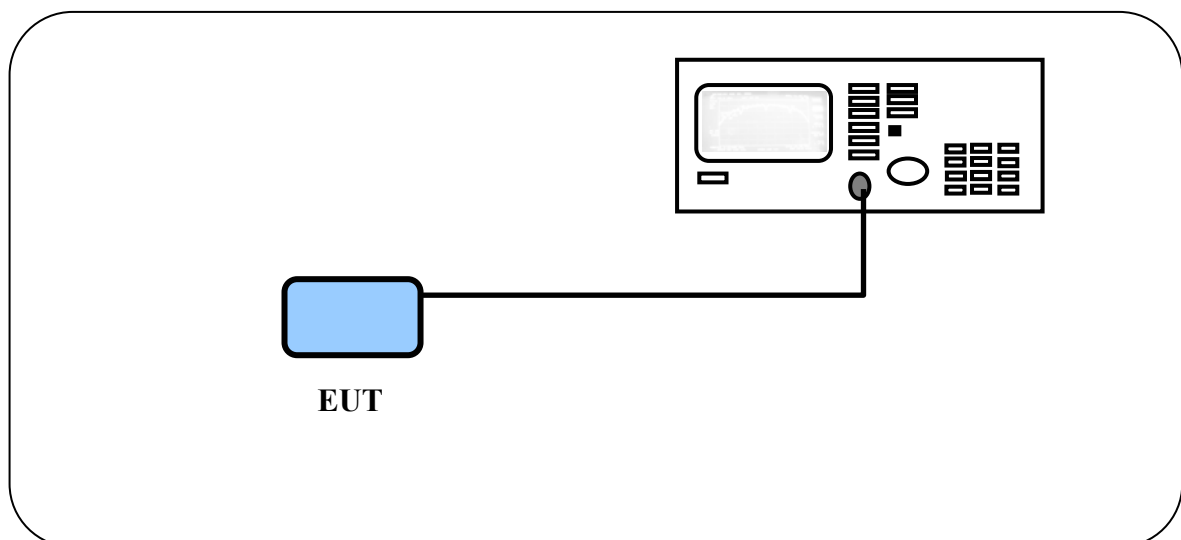

Test Configuration of Bandwidth for Frequency Hopping Spread Spectrum System

9.3 List of Test Instruments

				<u>Calibration Date</u>
Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06

9.4 Test Results

Channel	20dB Bandwidth
CH 01	1.074 MHz
CH 40	1.074 MHz
CH 79	1.080 MHz

Note:


The data in the above table are summarizing the following attachment spectrum analyzer.

20dB BW of Channel 79



X. Section 15.247(b) Peak Output Power

10.1 Test Condition & Setup

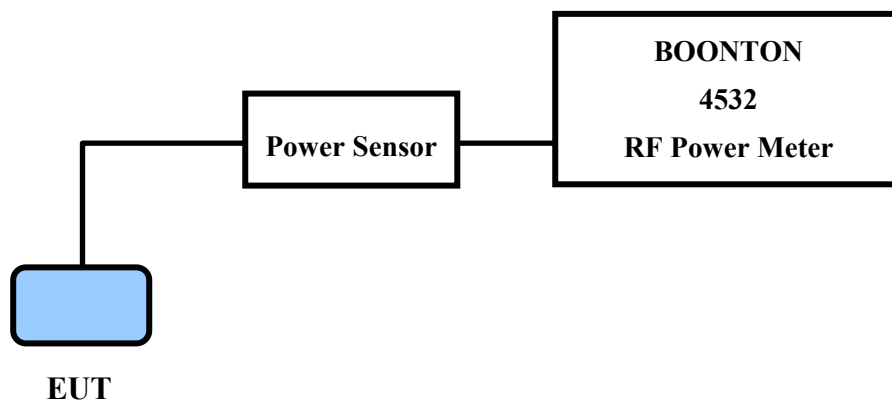

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

10.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
RF Power Meter	4532	BOONTON	117501	05/18/07
Peak Power Sensor	57340	BOONTON	2696	05/18/07

10.3 Test Result

Formula:

RF output power of EUT + |Cable loss| = Output peak power

Channel	RF output	Cable loss	Output peak power	
	dBm	dBm	dBm	mW
CH 01	2.64	1.00	3.64	2.31
CH 40	2.28	1.00	3.28	2.13
CH 79	1.81	1.00	2.81	1.91

XI. Section 15.247(c) Band-edge Compliance

11.1 Test Condition


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

11.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06
Spectrum Analyzer	8564E	HP	3720A00840	11/07/06
Microwave Preamplifier	84125C	HP	US36433002	11/07/06
Horn Antenna	3115	EMCO	9104-3668	01/23/07


11.3 Test Instruments Configuration

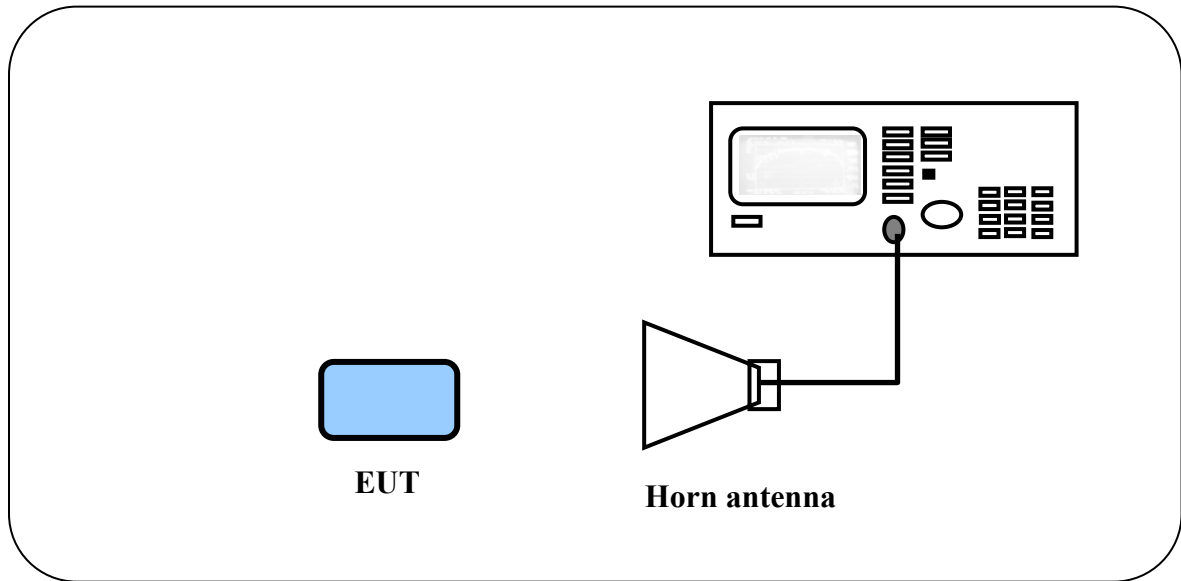

11.4 Test Result of the Bandedge

The following pages show our observations referring to the channel 1 and 79 respectively.

Channel 1

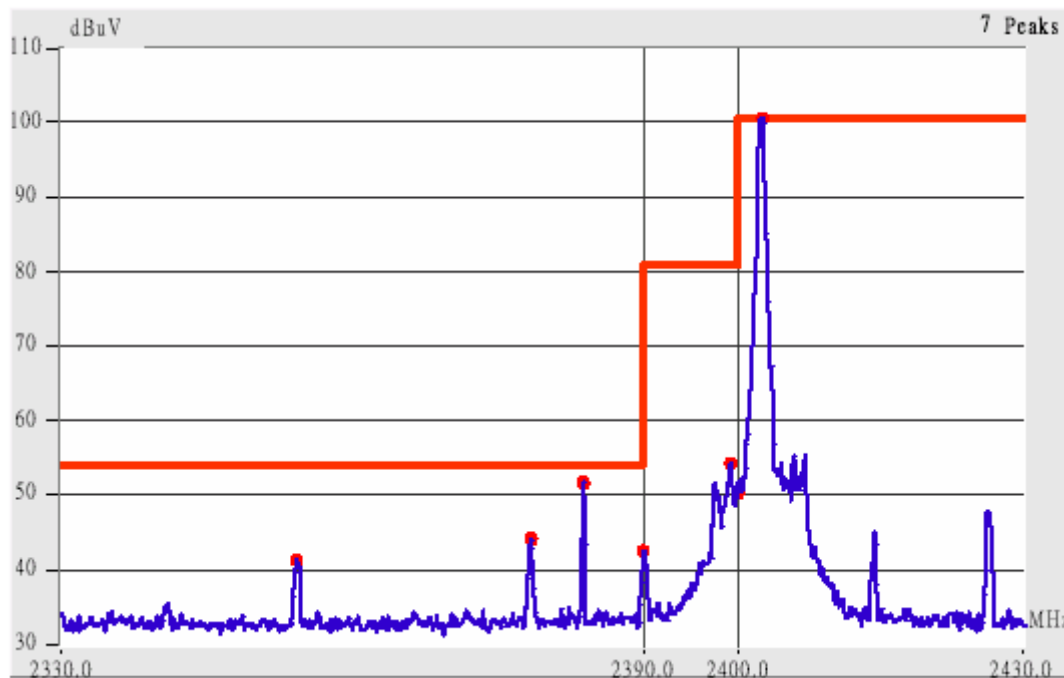


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2353.72	Hor	1.00	192	9.08	46.41	---	73.96	53.96	-7.55
2377.99	Hor	1.00	89	9.15	47.65	---	73.96	53.96	-6.31
2390.02	Hor	1.00	85	9.18	47.02	---	73.96	53.96	-6.94
2353.89	Ver	1.00	267	9.08	46.75	---	73.96	53.96	-7.21
2378.10	Ver	1.00	142	9.15	49.15	---	73.96	53.96	-4.81
2390.02	Ver	1.00	145	9.18	47.68	---	73.96	53.96	-6.28

Channel 79

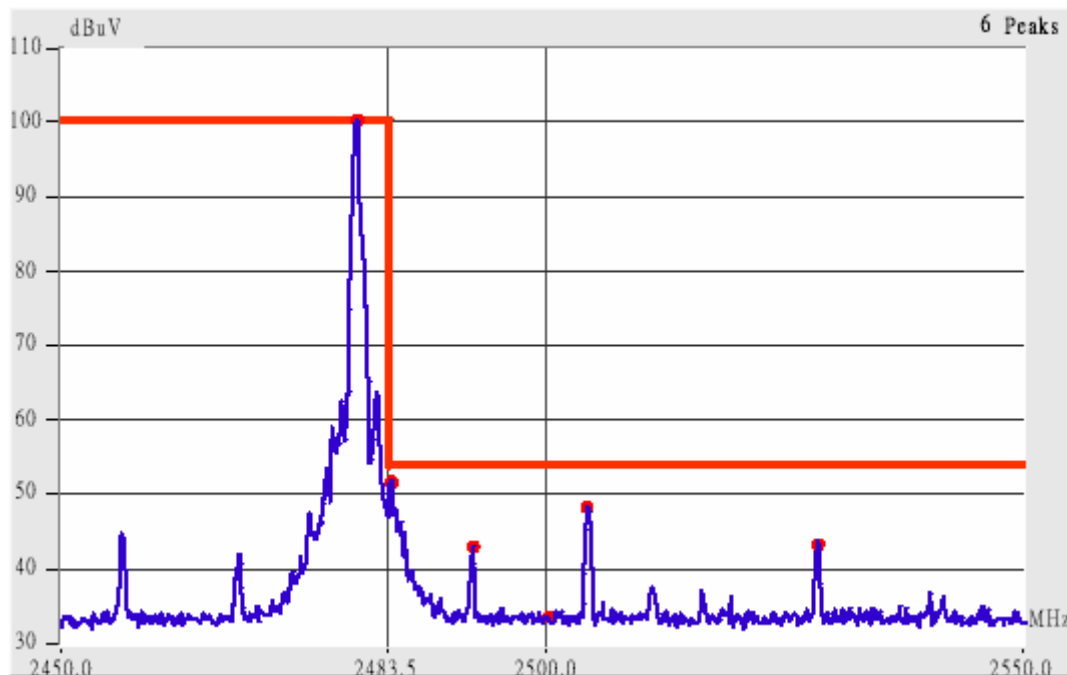

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 79.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.43	Hor	1.00	317	9.44	59.94	52.77	73.96	53.96	-1.19
2492.13	Hor	1.00	319	9.47	49.30	---	73.96	53.96	-4.66
2500.01	Hor	1.00	213	9.49	43.66	---	73.96	53.96	-10.30
2503.97	Hor	1.00	319	9.50	52.33	48.33	73.96	53.96	-5.63
2483.48	Ver	1.00	111	9.44	60.94	52.61	73.96	53.96	-1.35
2491.90	Ver	1.00	119	9.47	49.30	---	73.96	53.96	-4.66
2500.01	Ver	1.00	243	9.49	43.16	---	73.96	53.96	-10.80
2503.89	Ver	1.00	147	9.50	52.33	48.50	73.96	53.96	-5.46

XII. Section 15.247(c) Spurious Radiated Emissions

12.1 Test Condition and Setup

We'd performed the test by the *radiated emission skill*: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G to 25GHz.

At each frequency, the EUT was rotated 360 degrees, stand on **three orthogonal** planes respectively and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79). The setting up procedure is recorded on <1.3 test method>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

12.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	12/01/06
RF Filter Section	85460A	HP	3448A00217	12/01/06
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	11/17/06
Pre-amplifier	PA1F	TRC	1FAC	05/20/07
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/07
Coaxial Cable (Double shielded, 15 Meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/07
Spectrum Analyzer	8564E	HP	3720A00840	11/07/06
Microwave Preamplifier	84125C	HP	US36433002	11/07/06
Horn Antenna	3115	EMCO	9104-3668	01/23/07
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	11/09/06
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	11/09/06
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/26/07
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/07
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	06/20/07
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	06/20/07

12.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following. (worst case)

Test Conditions: Temperature : 25° C Humidity : 73% RH

Test mode: Standby mode for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
236.12	35.16	1.00	257	-4.07	31.09	46.00	-14.91
267.65	40.20	1.00	230	-4.26	35.94	46.00	-10.06
330.70	34.74	1.00	140	-2.95	31.79	46.00	-14.21
408.30	29.08	1.00	220	-0.86	28.22	46.00	-17.78
536.83	25.45	1.00	37	3.98	29.43	46.00	-16.57

Test mode: Standby mode for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
136.70	35.90	1.00	116	-2.81	33.09	43.50	-10.41
185.20	32.58	1.00	102	-3.74	28.84	43.50	-14.66
267.65	42.14	1.00	0	-4.26	37.88	46.00	-8.12
536.83	32.97	1.00	194	3.98	36.95	46.00	-9.05
675.05	25.99	1.00	289	8.69	34.68	46.00	-11.32

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: Standby mode for 1GHz to 26.5GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
6312.50	1.00	65	25.57	---	18.70	44.27	---	73.96	53.96	-9.69
9882.50	1.00	247	22.40	---	23.09	45.49	---	73.96	53.96	-8.47
19172.29	1.00	178	45.82	---	1.57	47.39	---	73.96	53.96	-6.57
22451.87	1.00	326	44.49	---	3.78	48.27	---	73.96	53.96	-5.69
24686.67	1.00	209	45.49	---	3.01	48.50	---	73.96	53.96	-5.46

Test mode: Standby mode for 1GHz to 26.5GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
6319.58	1.00	178	26.57	---	18.70	45.27	---	73.96	53.96	-8.69
9209.58	1.00	202	20.91	---	23.51	44.42	---	73.96	53.96	-9.54
19540.62	1.00	134	47.32	---	1.70	49.02	---	73.96	53.96	-4.94
21927.71	1.00	305	47.16	---	3.08	50.24	---	73.96	53.96	-3.72
24552.08	1.00	153	48.66	---	2.47	51.13	---	73.96	53.96	-2.83

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: BT CH01 for 30MHz to 1GHz [Horizontal] Z

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
143.97	32.41	1.00	27	-3.18	29.23	43.50	-14.27
267.65	38.66	1.00	217	-4.26	34.40	46.00	-11.60
342.82	38.01	1.00	0	-2.79	35.22	46.00	-10.78
381.62	34.67	1.00	7	-1.75	32.92	46.00	-13.08
427.70	34.81	1.00	0	-0.06	34.75	46.00	-11.25
488.32	32.72	1.00	140	1.95	34.67	46.00	-11.33

Test mode: BT CH01 for 30MHz to 1GHz [Vertical] Y

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
136.70	35.09	1.00	83	-2.81	32.28	43.50	-11.22
267.65	37.44	1.00	307	-4.26	33.18	46.00	-12.82
291.90	37.62	1.00	0	-3.70	33.92	46.00	-12.08
536.83	30.37	1.00	195	3.98	34.35	46.00	-11.65
672.62	25.90	1.00	195	8.63	34.53	46.00	-11.47
730.82	25.56	1.00	182	9.84	35.40	46.00	-10.60

Test mode: BT CH01 for 1GHz to 26.5GHz [Horizontal] Z

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2681.25	1.00	70	34.83	---	9.83	44.66	---	73.96	53.96	-9.30
9608.12	1.00	264	35.77	---	11.47	47.24	---	73.96	53.96	-6.72
12012.71	1.00	191	37.27	---	10.01	47.28	---	73.96	53.96	-6.68
19214.79	1.00	84	46.49	---	1.60	48.09	---	73.96	53.96	-5.87
21619.58	1.00	111	44.99	---	2.79	47.78	---	73.96	53.96	-6.18
24020.83	1.00	30	45.32	---	3.14	48.46	---	73.96	53.96	-5.50

Test mode: BT CH01 for 1GHz to 26.5GHz [Vertical] Y

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2622.92	1.00	48	35.17	---	9.72	44.89	---	73.96	53.96	-9.07
9608.12	1.00	21	36.77	---	11.47	48.24	---	73.96	53.96	-5.72
12012.71	1.00	299	38.10	---	10.01	48.11	---	73.96	53.96	-5.85
19214.79	1.00	93	47.32	---	1.60	48.92	---	73.96	53.96	-5.04
21619.58	1.00	307	45.82	---	2.79	48.61	---	73.96	53.96	-5.35
24020.83	1.00	201	44.99	---	3.14	48.13	---	73.96	53.96	-5.83

Test mode: BT CH40 for 30MHz to 1GHz [Horizontal] X

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
136.70	29.02	1.00	93	-2.81	26.21	43.50	-17.29
267.65	38.89	1.00	203	-4.26	34.63	46.00	-11.37
306.45	38.29	1.00	137	-3.26	35.03	46.00	-10.97
342.82	40.93	1.00	0	-2.79	38.14	46.00	-7.86
379.20	36.18	1.00	0	-1.82	34.36	46.00	-11.64
439.82	31.13	1.00	0	0.43	31.56	46.00	-14.44

Test mode: BT CH40 for 30MHz to 1GHz [Vertical] Y

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
136.70	34.62	1.00	122	-2.81	31.81	43.50	-11.69
265.23	36.84	1.00	228	-4.26	32.58	46.00	-13.42
289.47	37.71	1.00	0	-3.79	33.92	46.00	-12.08
483.47	32.82	1.00	0	1.81	34.63	46.00	-11.37
536.83	30.67	1.00	195	3.98	34.65	46.00	-11.35
730.82	25.85	1.00	195	9.84	35.69	46.00	-10.31

Test mode: BT CH40 for 1GHz to 26.5GHz [Horizontal] X

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2535.42	1.00	76	36.16	---	9.56	45.72	---	73.96	53.96	-8.24
9765.21	1.00	148	36.28	---	11.90	48.18	---	73.96	53.96	-5.78
12206.04	1.00	267	38.44	---	9.79	48.23	---	73.96	53.96	-5.73
19526.46	1.00	265	45.66	---	1.70	47.36	---	73.96	53.96	-6.60
21970.21	1.00	148	45.32	---	2.95	48.27	---	73.96	53.96	-5.69
24410.42	1.00	314	47.15	---	3.10	50.25	---	73.96	53.96	-3.71

Test mode: BT CH40 for 1GHz to 26.5GHz [Vertical]-Y

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2154.17	1.00	327	36.17	---	8.52	44.69	---	73.96	53.96	-9.27
9765.21	1.00	67	36.94	---	11.90	48.84	---	73.96	53.96	-5.12
12206.04	1.00	115	38.61	---	9.79	48.40	---	73.96	53.96	-5.56
19526.46	1.00	114	46.82	---	1.70	48.52	---	73.96	53.96	-5.44
21970.21	1.00	305	46.32	---	2.95	49.27	---	73.96	53.96	-4.69
24410.42	1.00	255	45.99	---	3.10	49.09	---	73.96	53.96	-4.87

Test mode: BT CH79 for 30MHz to 1GHz [Horizontal]-Z

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
136.70	29.73	1.00	251	-2.81	26.92	43.50	-16.58
240.97	32.57	1.00	106	-3.99	28.58	46.00	-17.42
267.65	37.60	1.00	238	-4.26	33.34	46.00	-12.66
340.40	35.71	1.00	0	-2.82	32.89	46.00	-13.11
391.32	37.33	1.00	17	-1.46	35.87	46.00	-10.13
467.20	33.93	1.00	215	1.60	35.53	46.00	-10.47

Test mode: BT CH79 for 30MHz to 1GHz [Vertical] Y

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
136.70	36.08	1.00	110	-2.81	33.27	43.50	-10.23
180.35	31.61	1.00	123	-3.79	27.82	43.50	-15.68
265.23	39.62	1.00	270	-4.26	35.36	46.00	-10.64
439.82	39.35	1.00	220	0.43	39.78	46.00	-6.22
536.83	30.60	1.00	183	3.98	34.58	46.00	-11.42
675.05	26.61	1.00	183	8.69	35.30	46.00	-10.70

Test mode: BT CH79 for 1GHz to 26.5GHz [Horizontal] Z

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2335.42	1.00	108	36.50	---	9.03	45.53	---	73.96	53.96	-8.43
9922.29	1.00	184	35.28	---	11.66	46.94	---	73.96	53.96	-7.02
12399.37	1.00	87	37.10	---	9.02	46.12	---	73.96	53.96	-7.84
19799.17	1.00	188	45.66	---	1.90	47.56	---	73.96	53.96	-6.40
22320.83	1.00	81	44.49	---	3.33	47.82	---	73.96	53.96	-6.14
24800.00	1.00	26	45.82	---	2.22	48.04	---	73.96	53.96	-5.92

Test mode: BT CH79 for 1GHz to 26.5GHz [Vertical] Y


<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2335.42	1.00	40	37.33	---	9.03	46.36	---	73.96	53.96	-7.60
9922.29	1.00	87	35.11	---	11.66	46.77	---	73.96	53.96	-7.19
12399.37	1.00	199	37.94	---	9.02	46.96	---	73.96	53.96	-7.00
19799.17	1.00	356	46.82	---	1.90	48.72	---	73.96	53.96	-5.24
22320.83	1.00	159	44.82	---	3.33	48.15	---	73.96	53.96	-5.81
24800.00	1.00	3	46.49	---	2.22	48.71	---	73.96	53.96	-5.25

XIII. Section 15.247(d): Power Spectral Density

13.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

13.2 Test Instruments Configuration

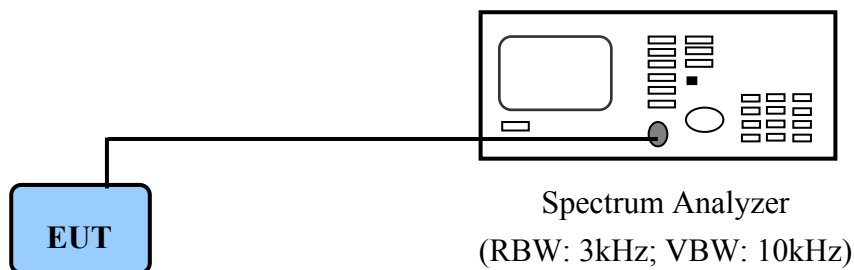

PC to control the EUT at maximal power output and channel number and set antenna kit

13.3 List of Test Instruments

				<u>Calibration Date</u>
<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Next time</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06

13.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-11.42	1.00	-10.42	8.00	-18.42
CH 40	-11.68	1.00	-10.68	8.00	-18.68
CH 79	-12.23	1.00	-11.23	8.00	-19.23

Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density for CH01

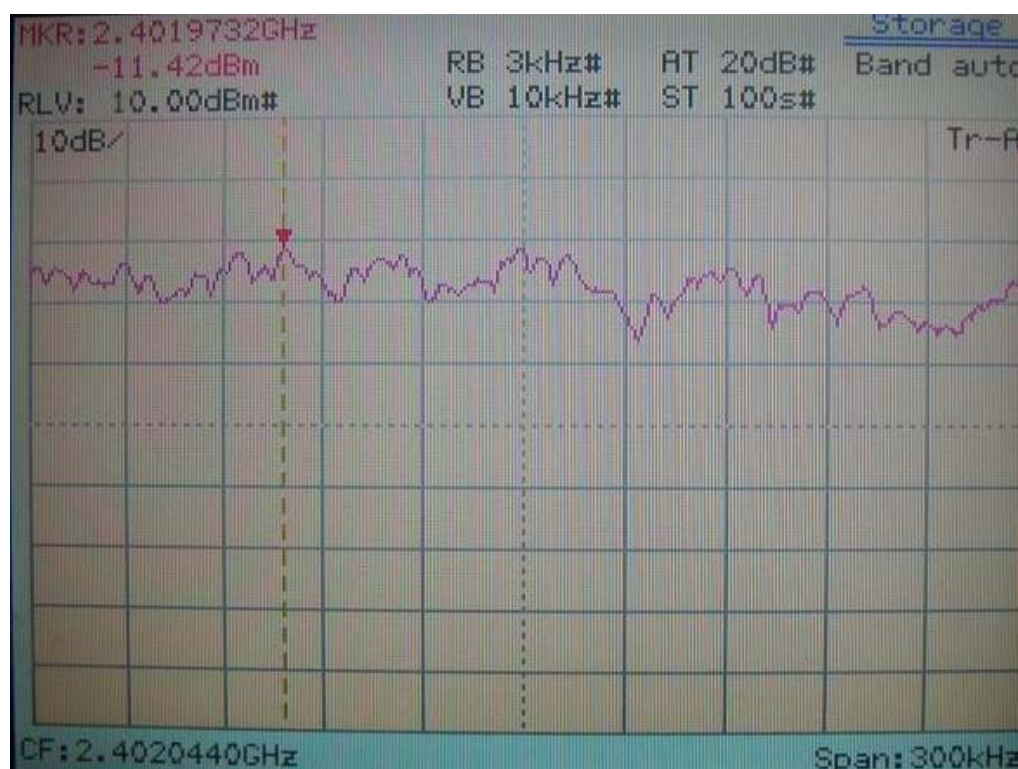

Power Spectral Density for CH40



Power Spectral Density for CH79

