

UMTS Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/Rel.99_RMC 12.2kbps/Ch 9262/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.106 mW/g

Rear/Rel.99_RMC 12.2kbps/Ch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.691 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.9130

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.569 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.398 mW/g

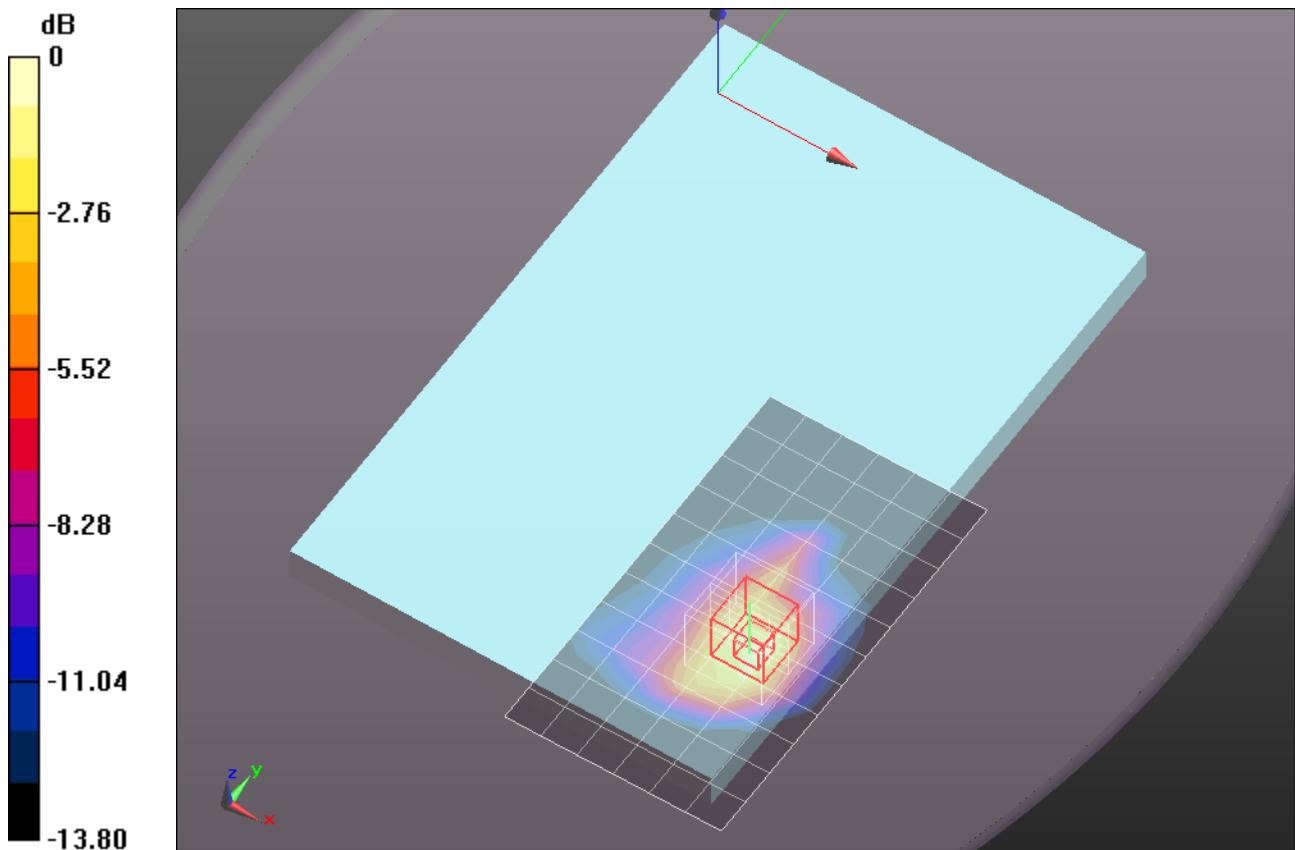

0 dB = 1.400mW/g = 2.92 dB mW/g

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/Rel.99_RMC 12.2kbps/Ch 9400/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.018 mW/g


Rear/Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.555 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.8690

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 1.360 mW/g

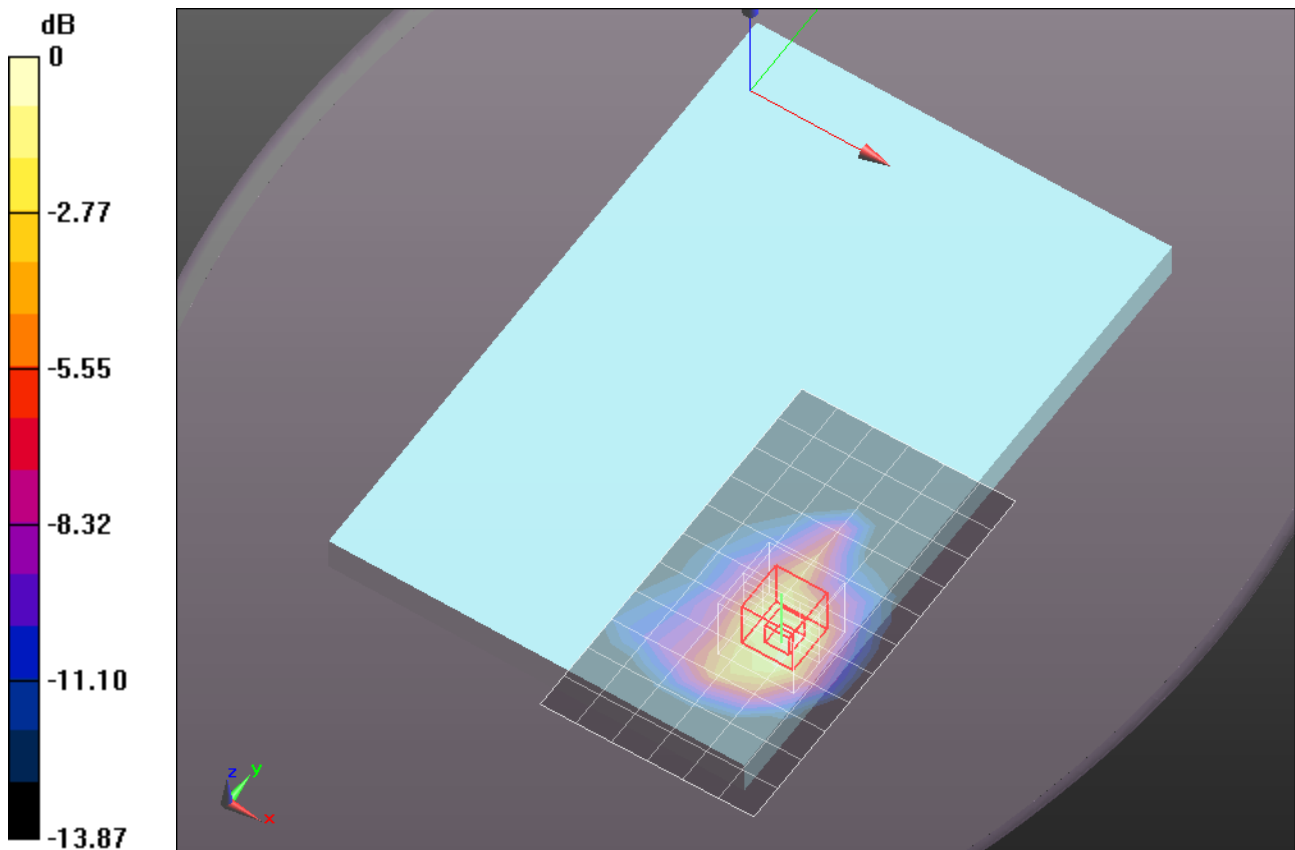

0 dB = 1.360mW/g = 2.67 dB mW/g

UMTS Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.537$ mho/m; $\epsilon_r = 51.832$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear/Rel.99_RMC 12.2kbps/Ch 9538/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.852 mW/g

Rear/Rel.99_RMC 12.2kbps/Ch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.557 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.0290

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.583 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.429 mW/g

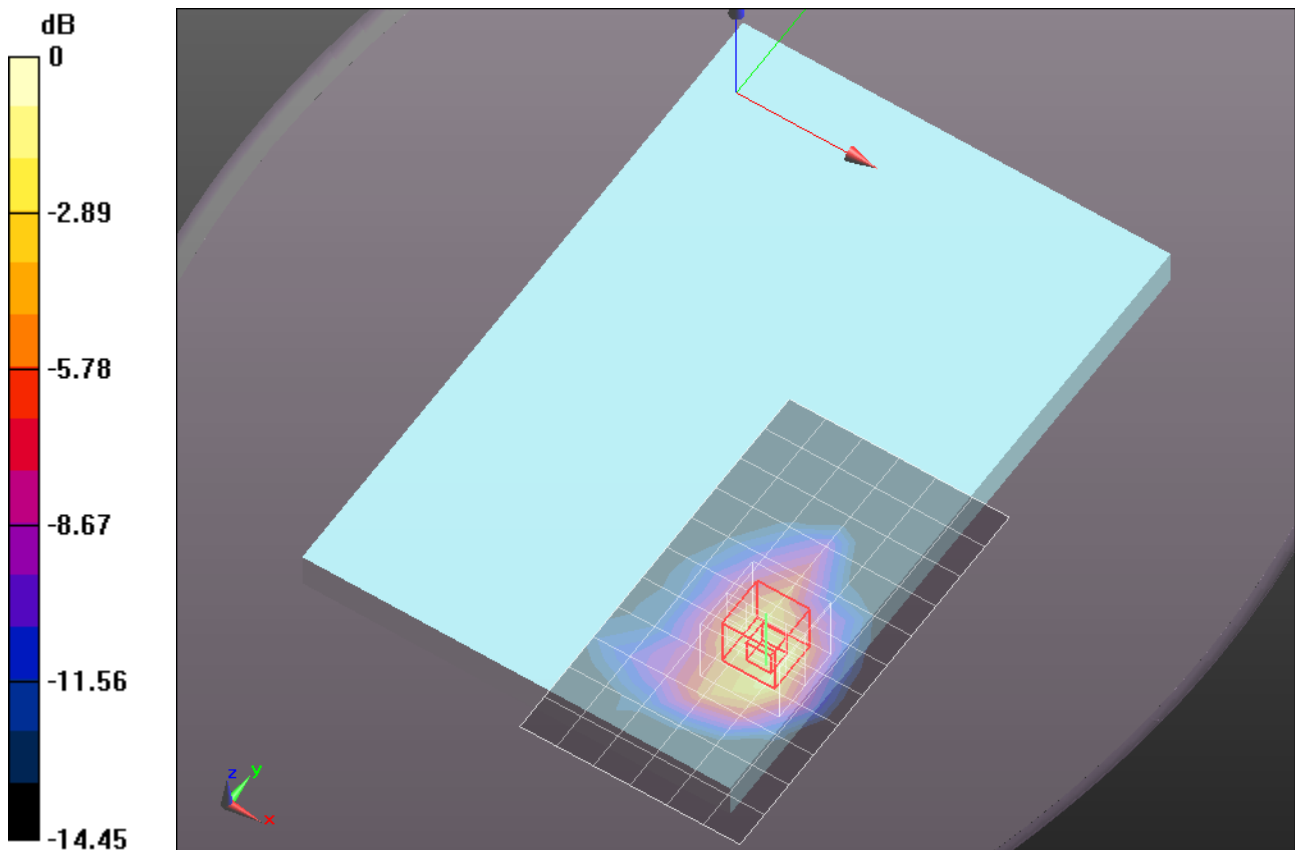

0 dB = 1.430mW/g = 3.11 dB mW/g

UMTS Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9262/Area Scan (10x14x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.607 mW/g

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9262/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.665 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.2750

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.662 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.575 mW/g

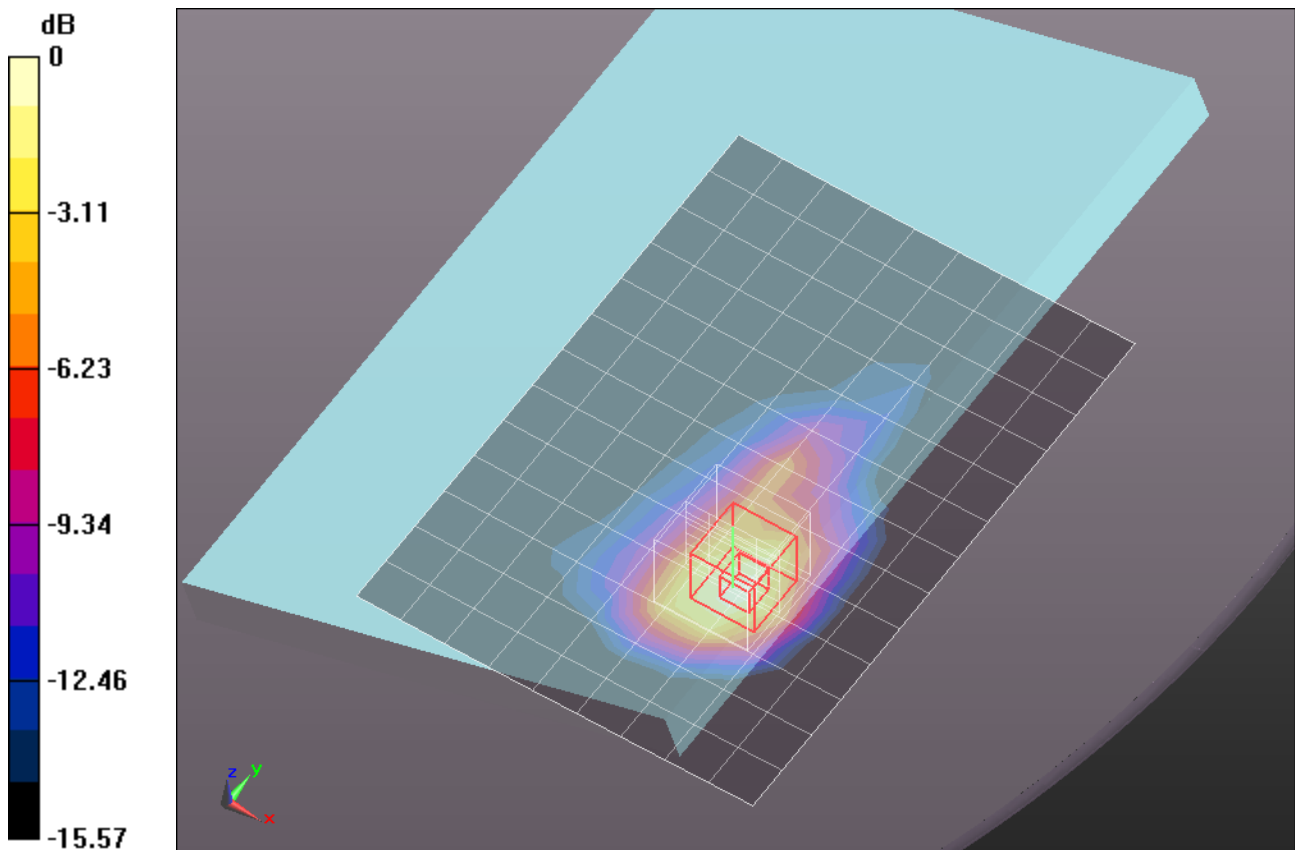

0 dB = 1.580mW/g = 3.97 dB mW/g

UMTS Band II


Frequency: 1852.4 MHz; Duty Cycle: 1:1

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9262/Z Scan (1x1x21): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.631 mW/g

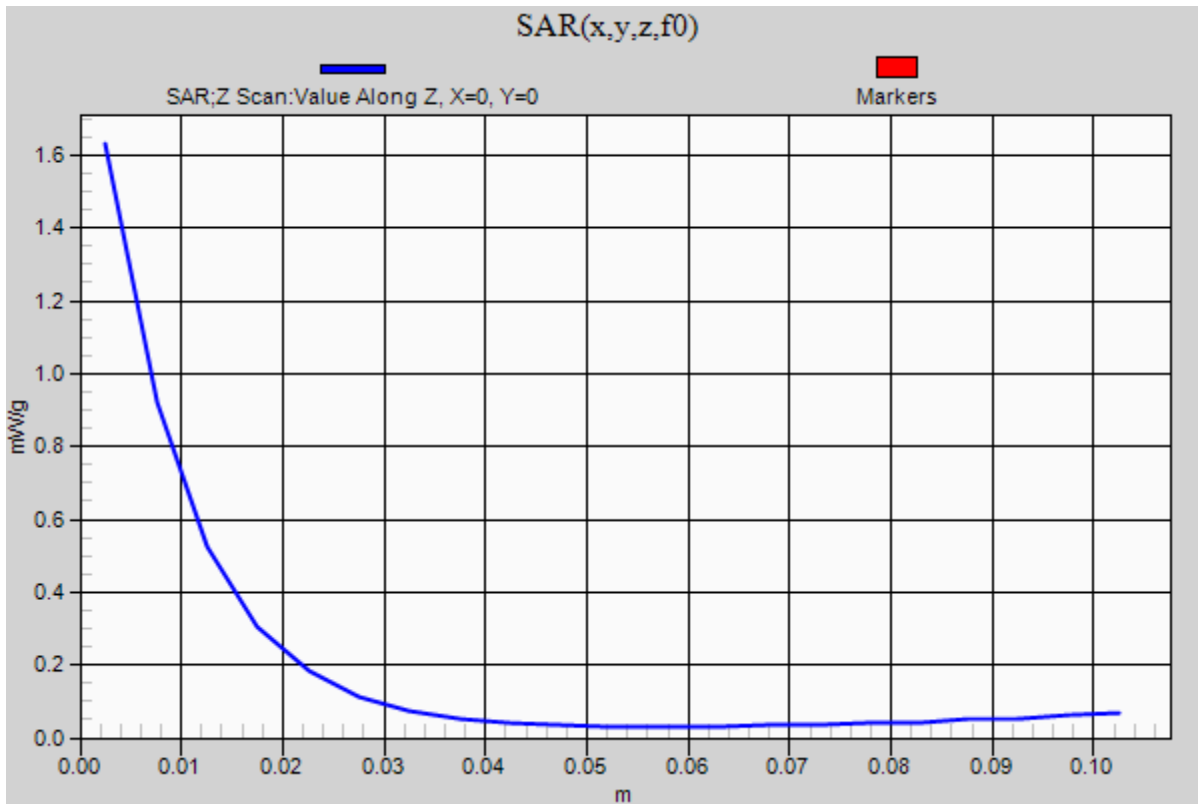

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9400/Area Scan (10x14x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.571 mW/g

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.719 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.1790

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.635 mW/g

Maximum value of SAR (measured) = 1.543 mW/g

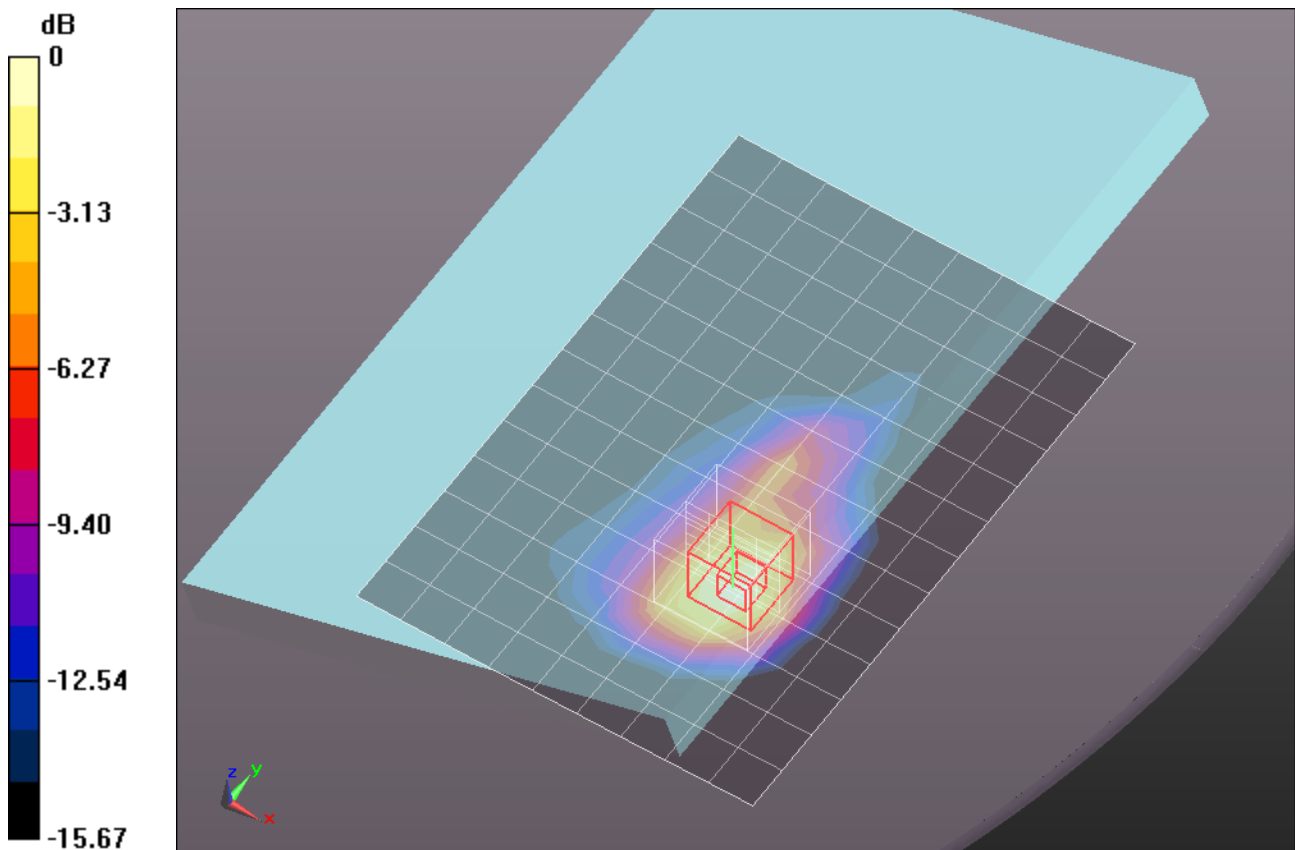

0 dB = 1.540mW/g = 3.75 dB mW/g

UMTS Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.537$ mho/m; $\epsilon_r = 51.832$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9538/Area Scan (10x14x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.591 mW/g

Rear 20degTilt@Edge 1/Rel.99_RMC 12.2kbps/Ch 9538/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.671 V/m; Power Drift = 0.0029 dB

Peak SAR (extrapolated) = 2.2290

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.639 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.577 mW/g

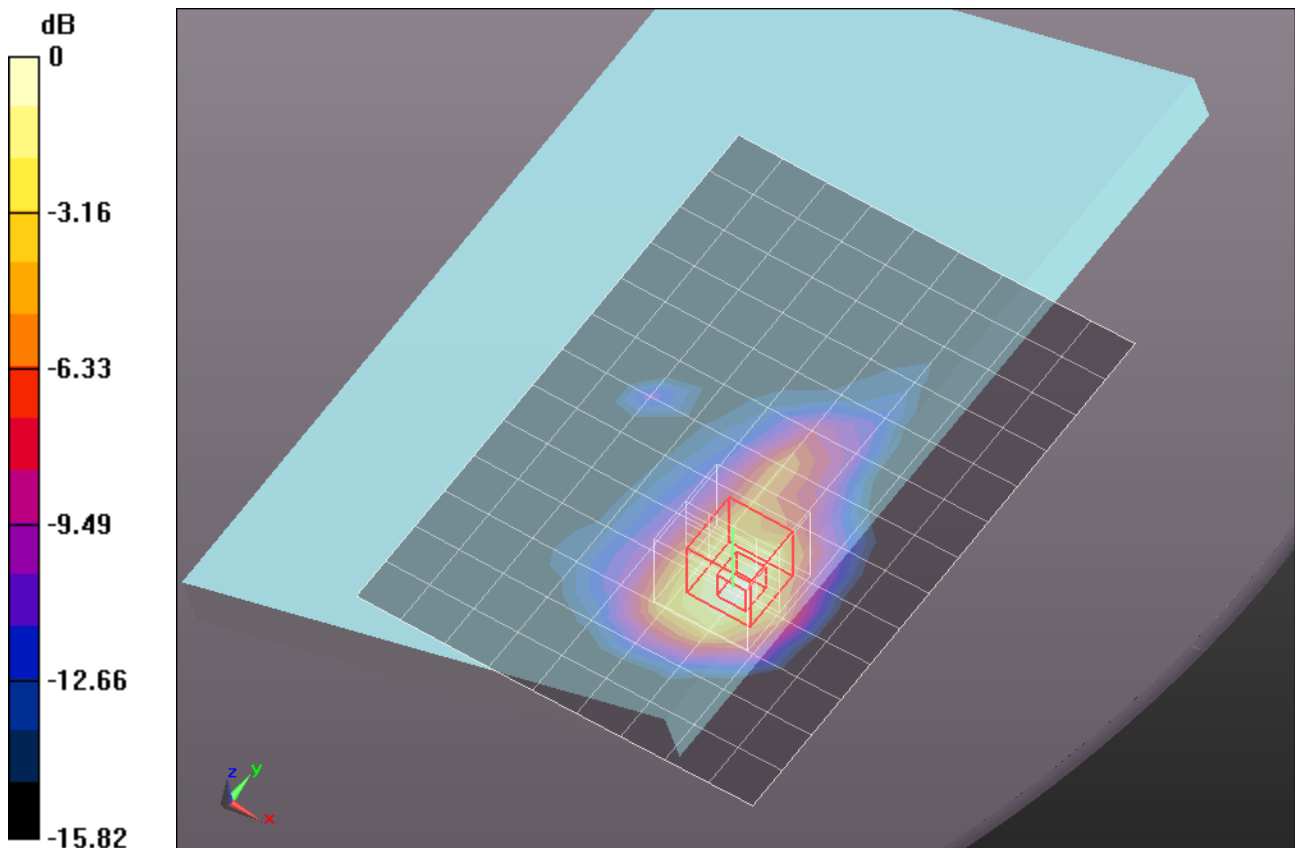

0 dB = 1.580mW/g = 3.97 dB mW/g

W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn500; Calibrated: 6/13/2012
- Probe: EX3DV4 - SN3749; ConvF(6.97, 6.97, 6.97); Calibrated: 1/27/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1017

Rear 20 deg Tilt @ Edge 1/HSPA Sub-test5/Ch 9262/Area Scan (9x14x1): Measurement

grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.54 mW/g

Rear 20 deg Tilt @ Edge 1/HSPA Sub-test5/Ch 9262/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.90 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.696 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.69 mW/g

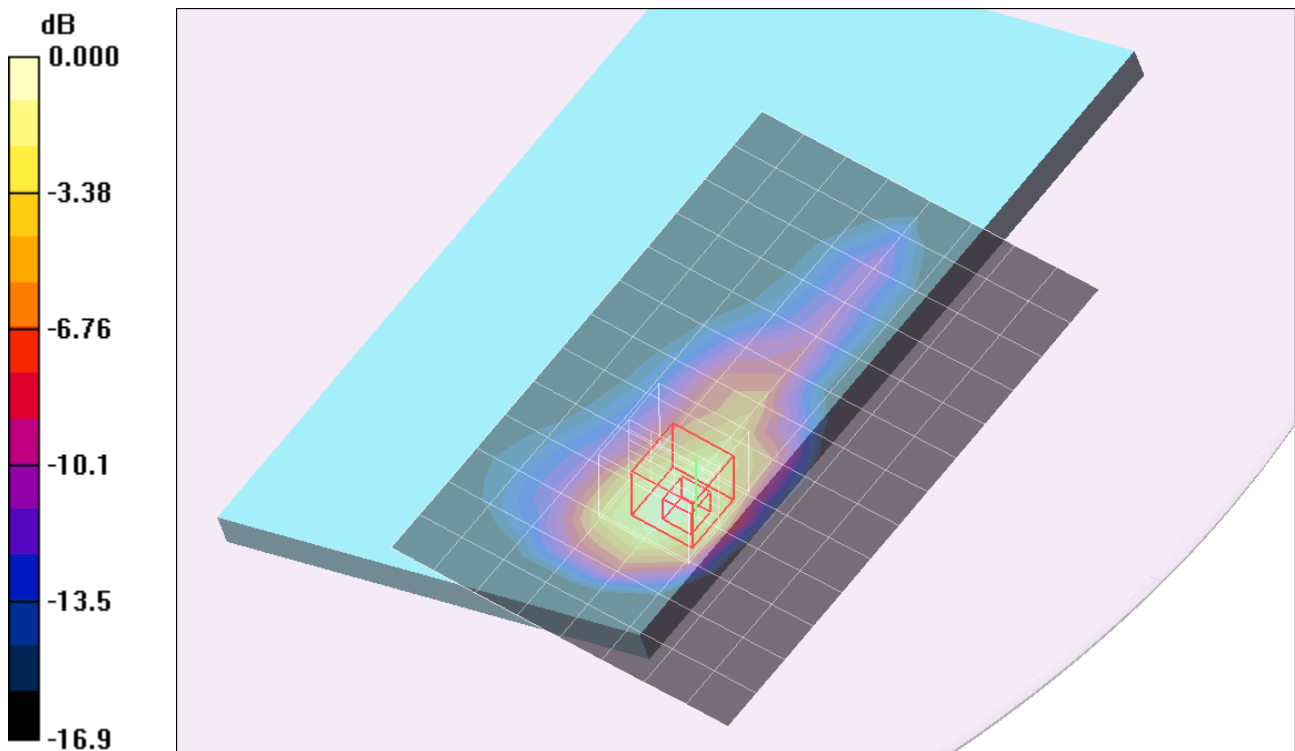

0 dB = 1.69mW/g


W-CDMA Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1

Rear 20 deg Tilt @ Edge 1/HSPA Sub-test5/Ch 9262/Z Scan (1x1x21): Measurement grid:
dx=20mm, dy=20mm, dz=5mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.54 mW/g

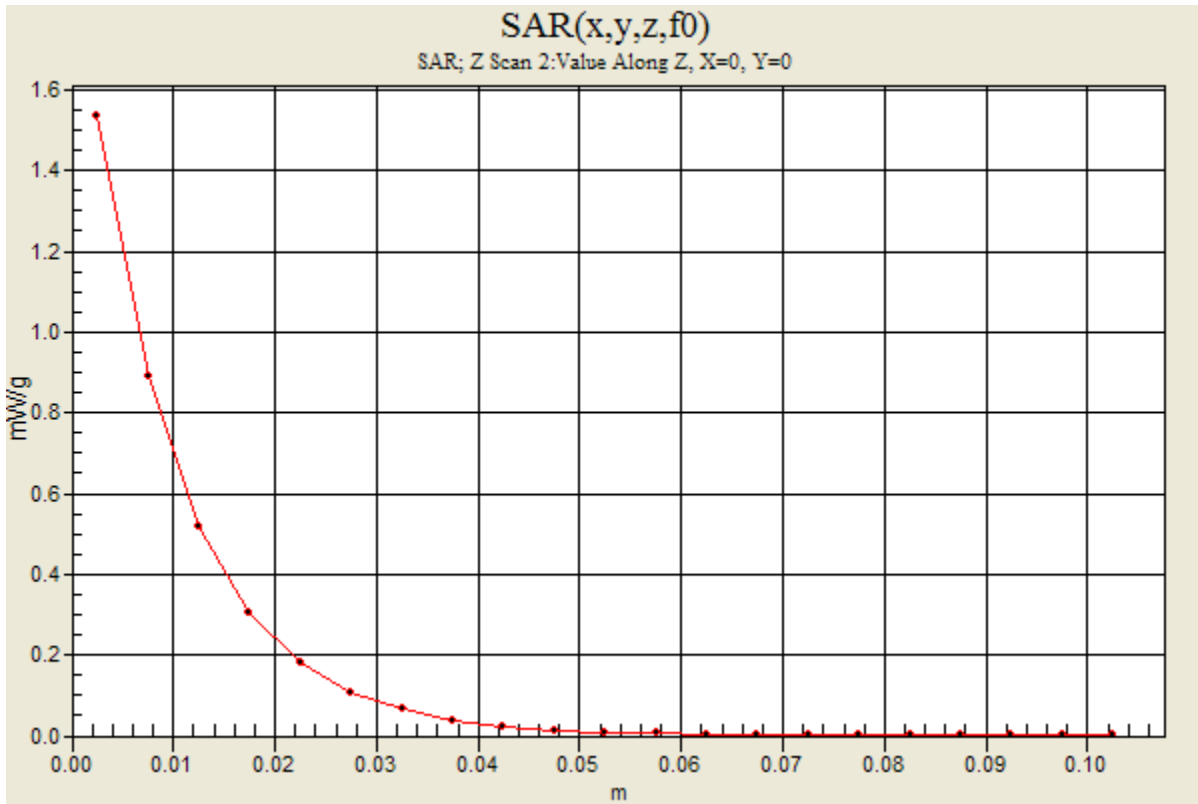

UMTS Band II

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/Rel.99_RMC 12.2kbps/Ch 9262/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.793 mW/g

Edge 1/Rel.99_RMC 12.2kbps/Ch 9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.131 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.0770

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.505 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.606 mW/g

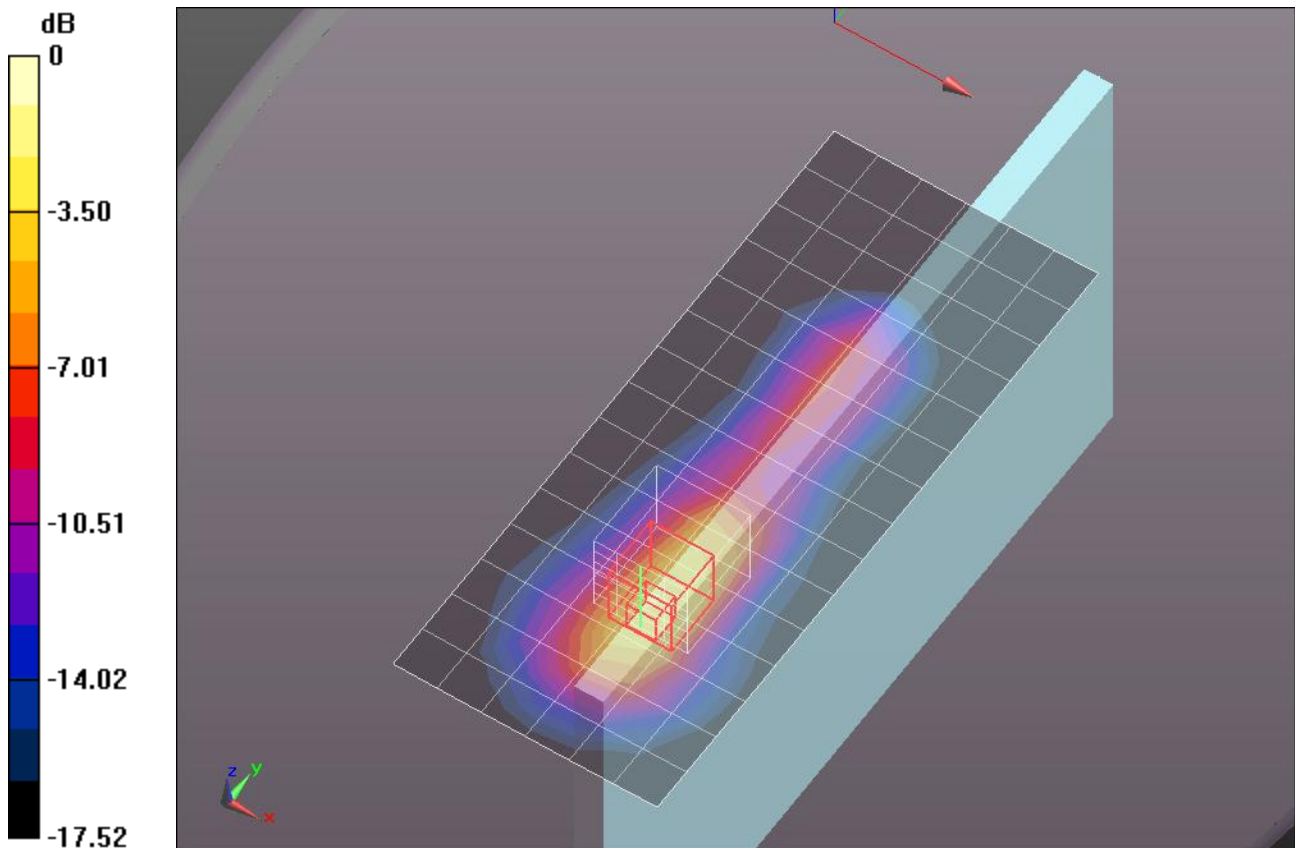

0 dB = 1.610mW/g = 4.14 dB mW/g

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/Rel.99_RMC 12.2kbps/Ch 9400/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.888 mW/g

Edge 1/Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.513 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.1100

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 1.525 mW/g

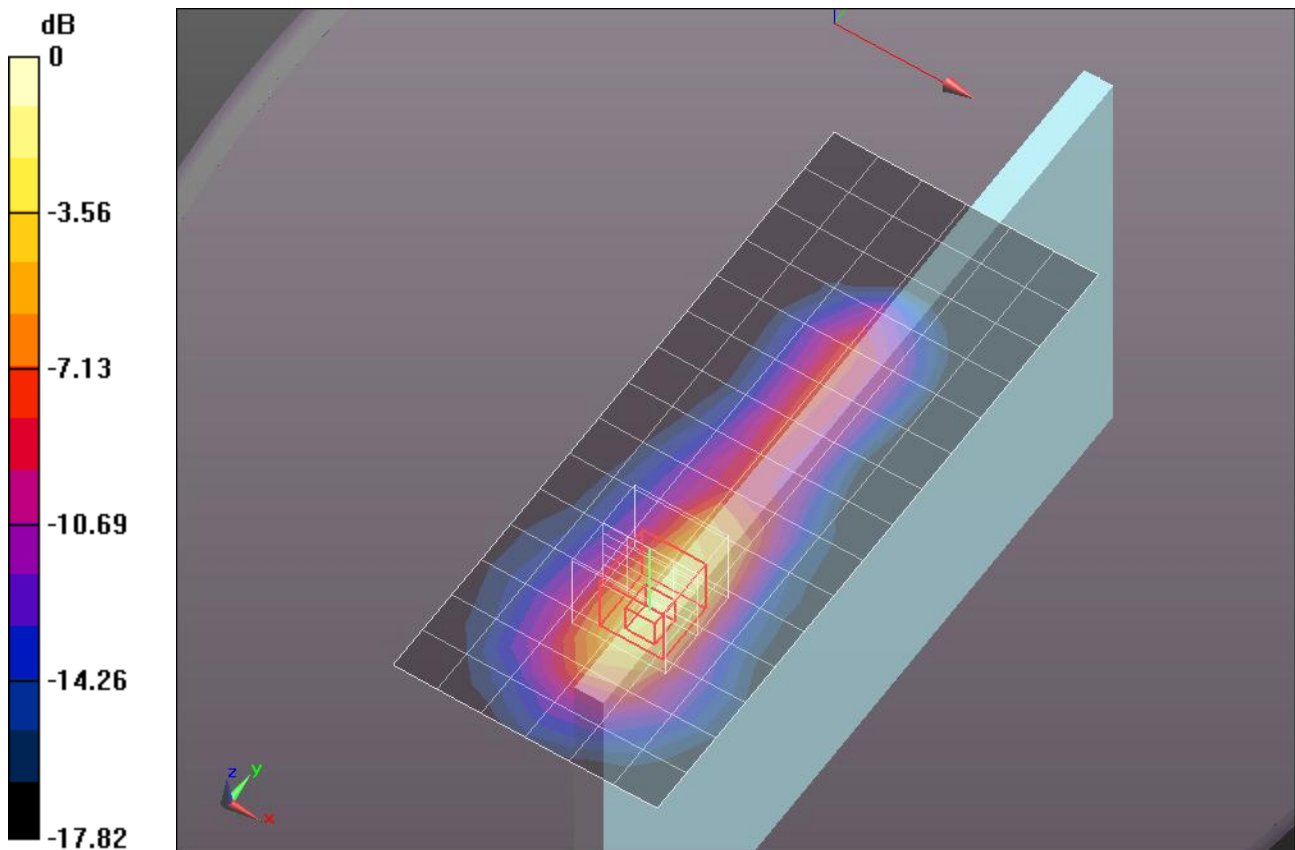

0 dB = 1.530mW/g = 3.69 dB mW/g

UMTS Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.537$ mho/m; $\epsilon_r = 51.832$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1/Rel.99_RMC 12.2kbps/Ch 9538/Area Scan (7x16x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.901 mW/g

Edge 1/Rel.99_RMC 12.2kbps/Ch 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.216 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.3220

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.551 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.833 mW/g

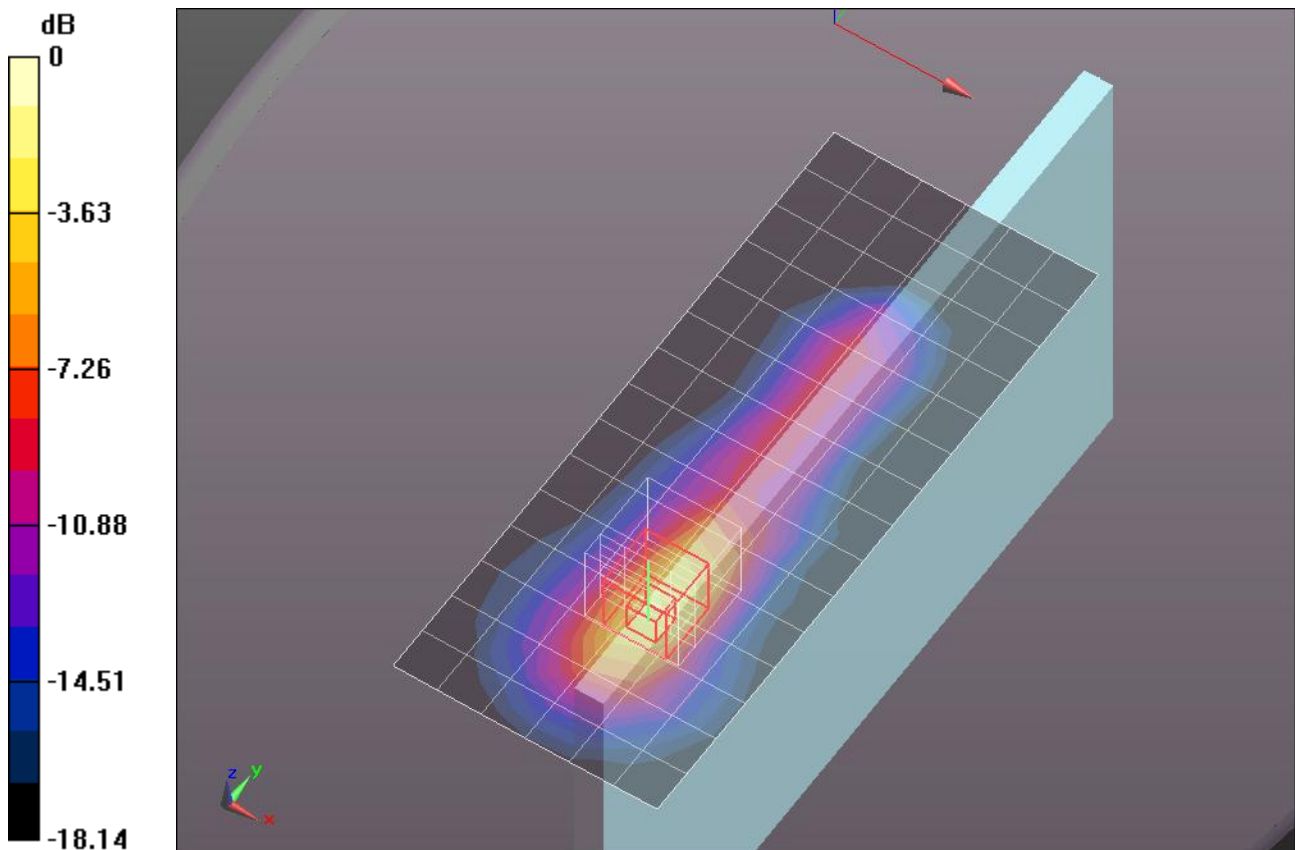

0 dB = 1.830mW/g = 5.25 dB mW/g

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 4/Rel.99_RMC 12.2kbps/Ch 9400/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 mW/g

Edge 4/Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.377 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.5150

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

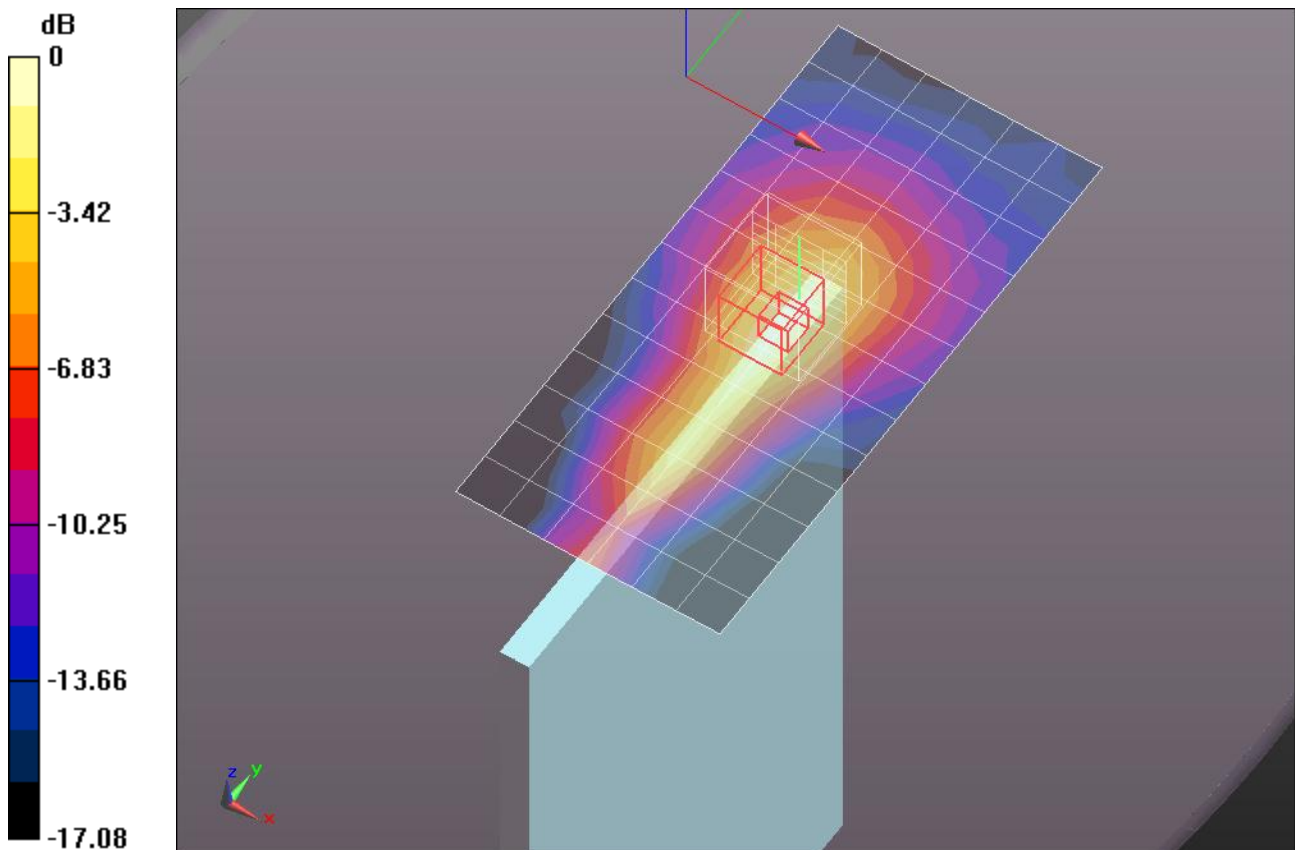

0 dB = 0.260mW/g = -11.70 dB mW/g

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Rear with 17mm Separation Dist./Rel99_RMC 12.2kbps/Ch 9400/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.272 mW/g

Rear with 17mm Separation Dist./Rel99_RMC 12.2kbps/Ch 9400/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.639 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.3510

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

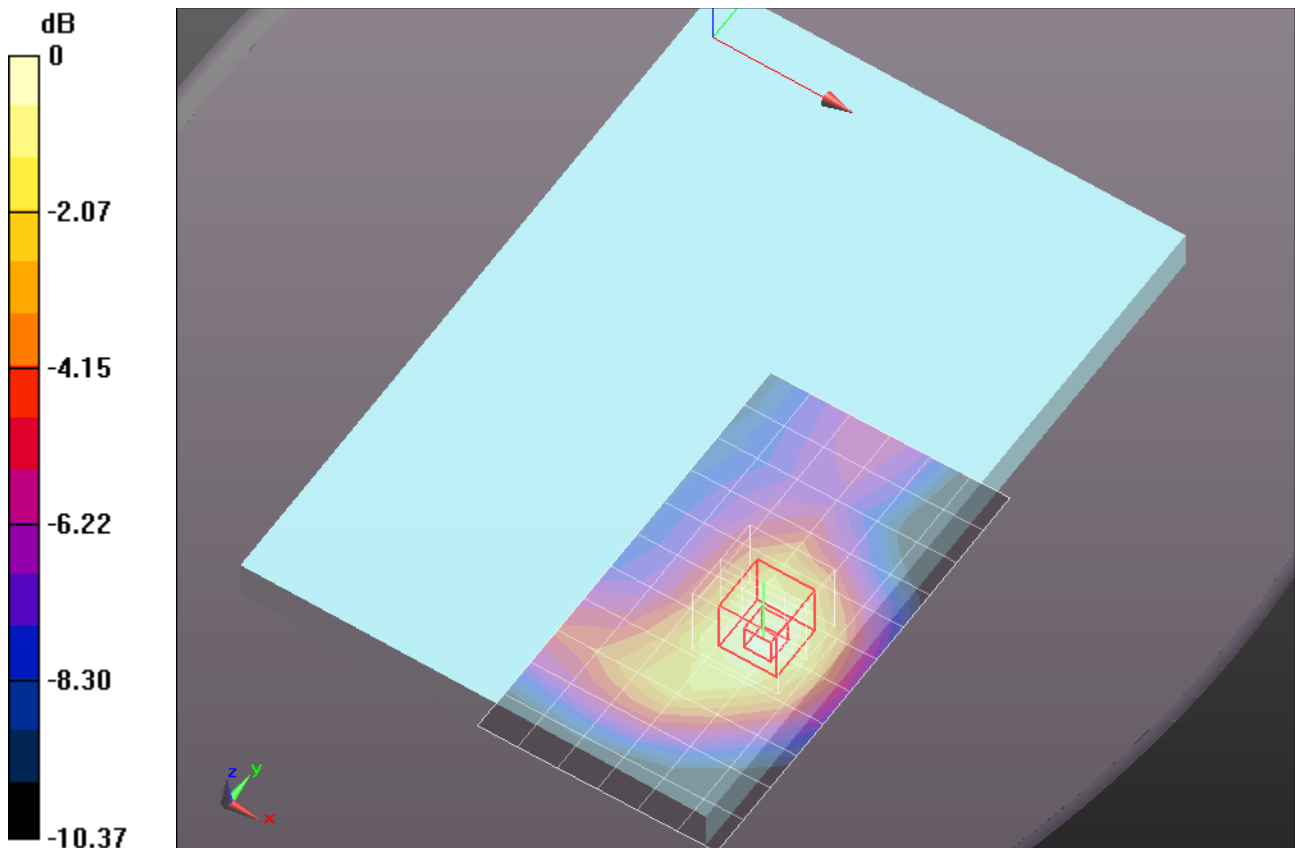

0 dB = 0.280mW/g = -11.06 dB mW/g

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 1 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Area Scan

(8x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.230 mW/g

Edge 1 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.493 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.2910

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.234 mW/g

Edge 1 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan



(5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.493 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.1610

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

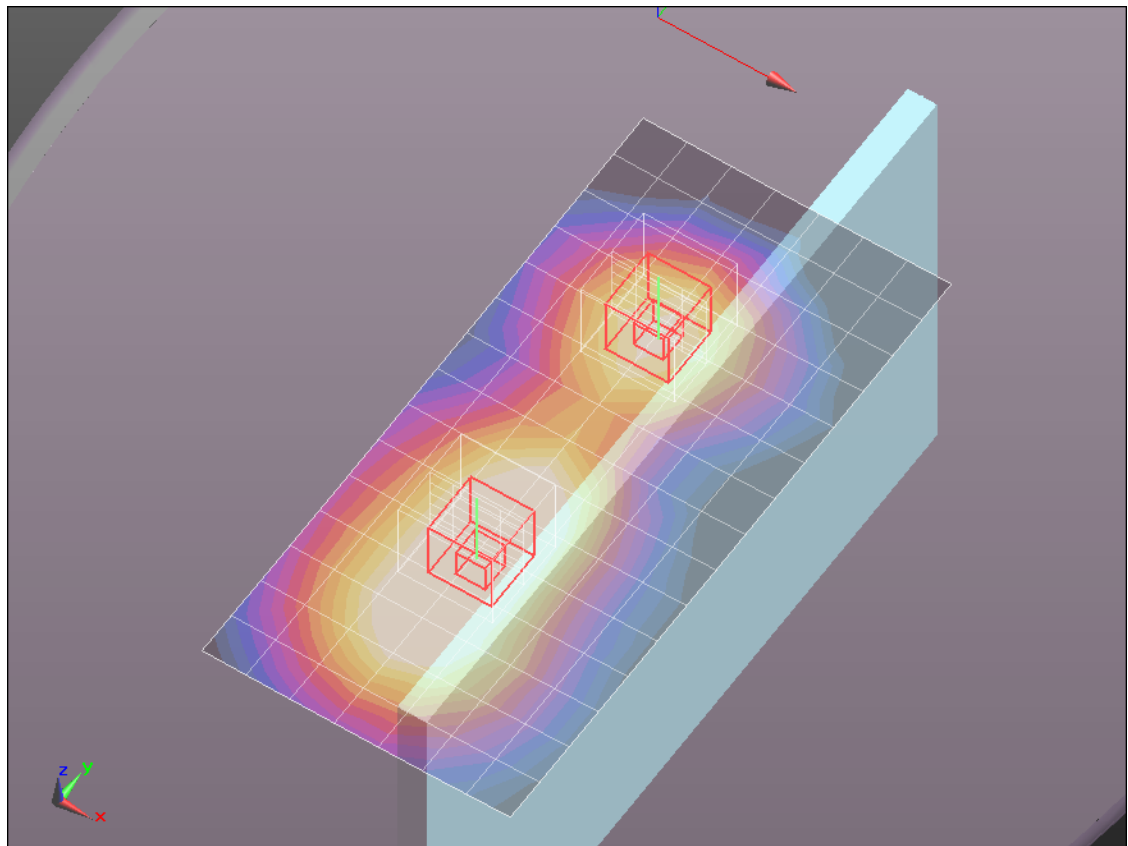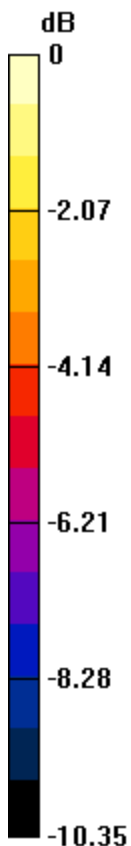

$$0 \text{ dB} = 0.130 \text{ mW/g} = -17.72 \text{ dB mW/g}$$

UMTS Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.508$ mho/m; $\epsilon_r = 51.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1259; Calibrated: 2/13/2012
- Probe: EX3DV4 - SN3686; ConvF(7.04, 7.04, 7.04); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118

Edge 4 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Area Scan

(7x16x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.062 mW/g

Edge 4 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.469 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0870

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.070 mW/g

Edge 4 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan

(5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.469 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0650

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

Edge 4 with 17mm Separation Dist./Rel.99_RMC 12.2kbps/Ch 9400/Zoom Scan


(5x5x7)/Cube 2: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.469 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0670

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

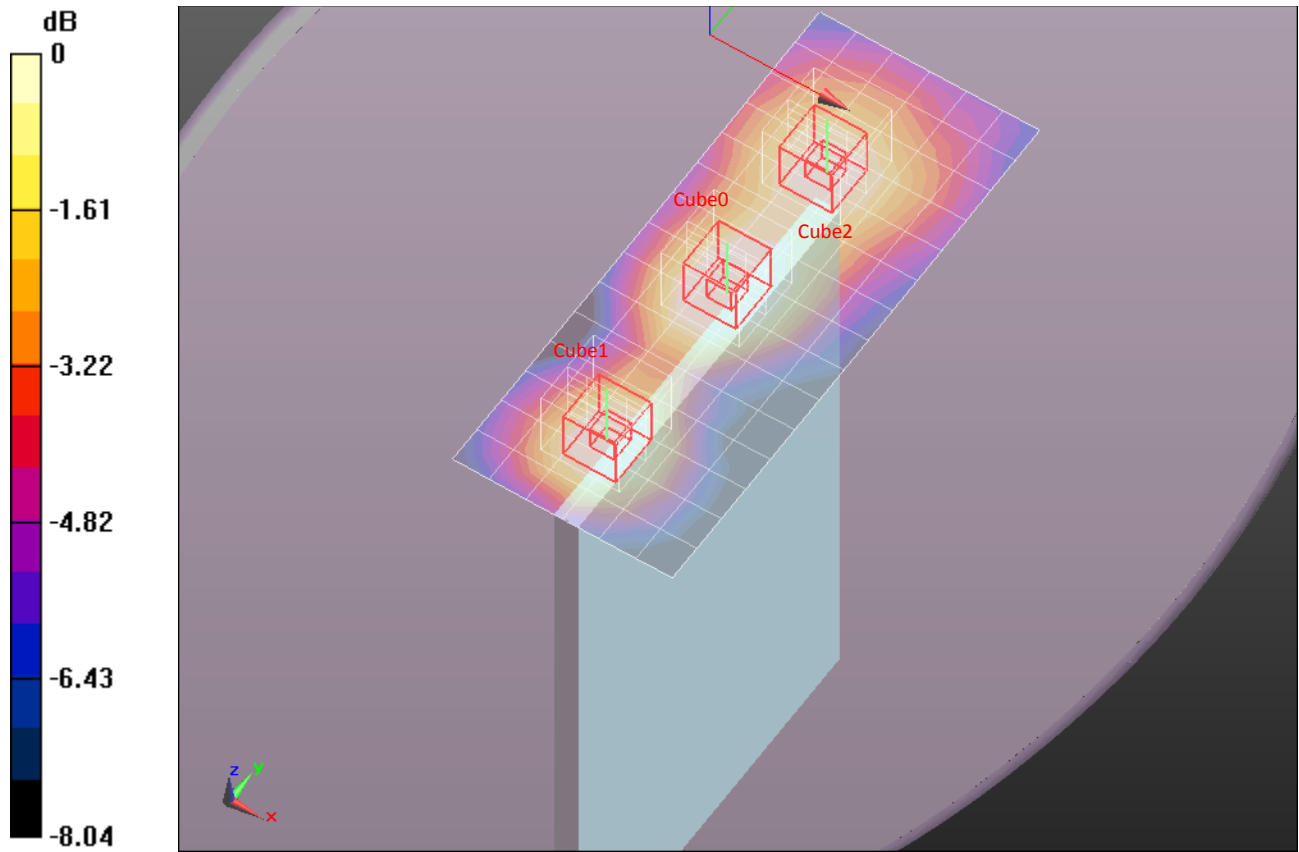

0 dB = 0.050mW/g = -26.02 dB mW/g