

WiFi 5.2 GHz band

Frequency: 5180 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.31$ mho/m; $\epsilon_r = 50.521$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 36/Area Scan (13x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.113 mW/g


Rear/Ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.683 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.4370

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

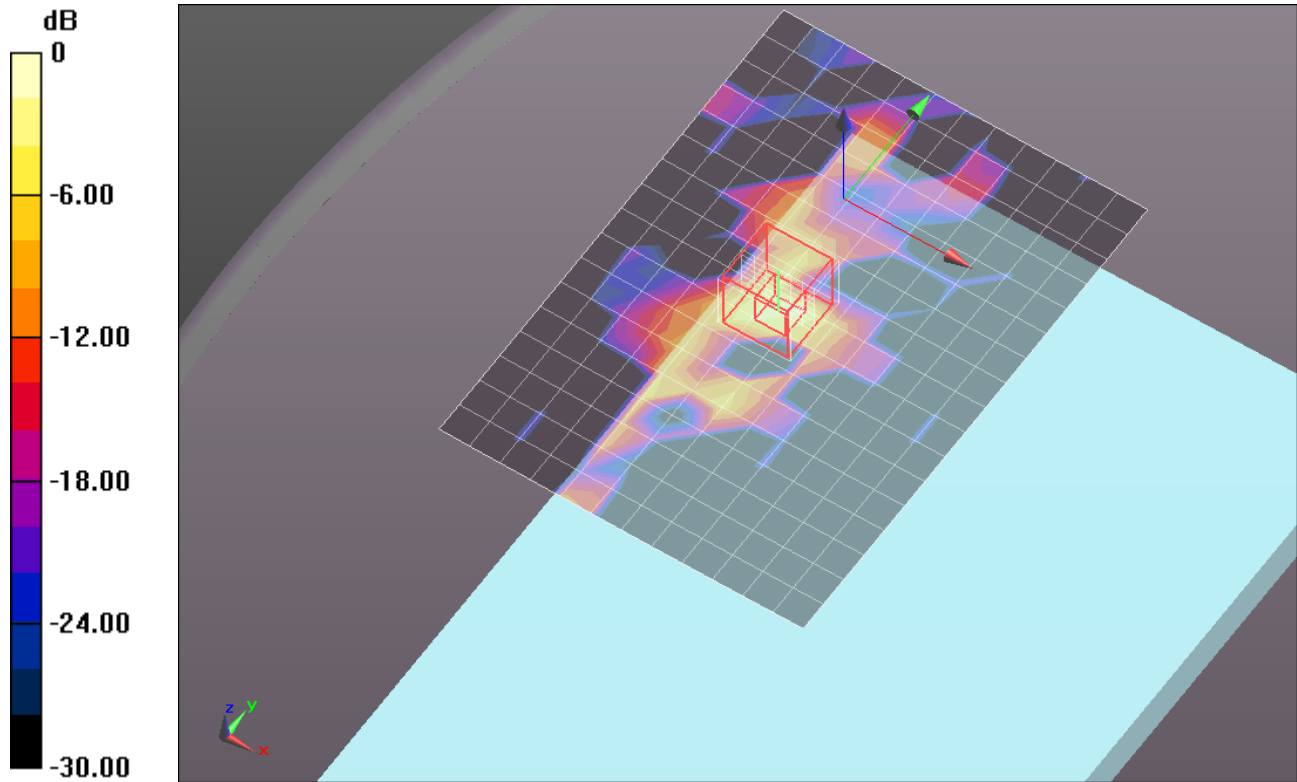

0 dB = 0.250mW/g = -12.04 dB mW/g

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.258$ mho/m; $\epsilon_r = 50.601$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 48/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.166 mW/g


Rear/Ch 48/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.200 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.2800

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

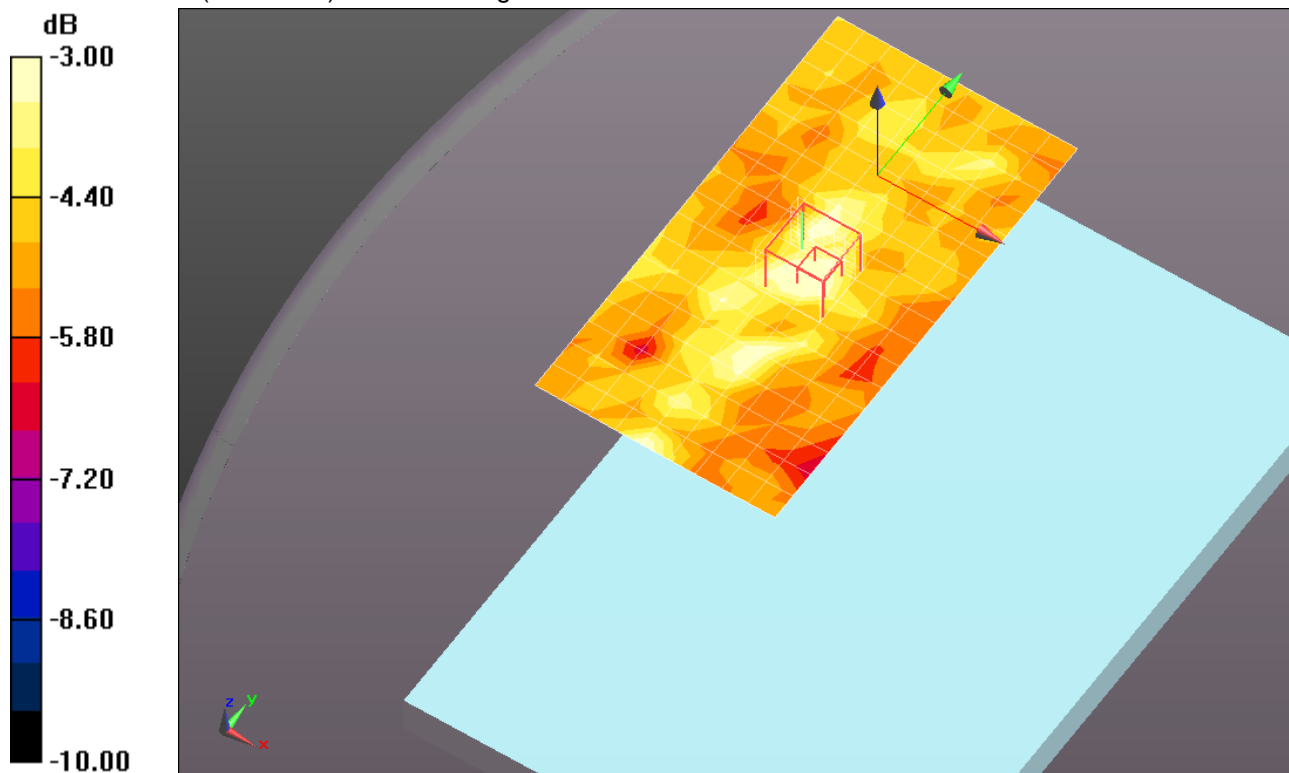

0 dB = 0.280mW/g = -11.06 dB mW/g

WiFi 5.2 GHz band

Frequency: 5180 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 5.31 \text{ mho/m}$; $\epsilon_r = 50.521$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 36/Area Scan (13x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.077 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 4.251 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.4520

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

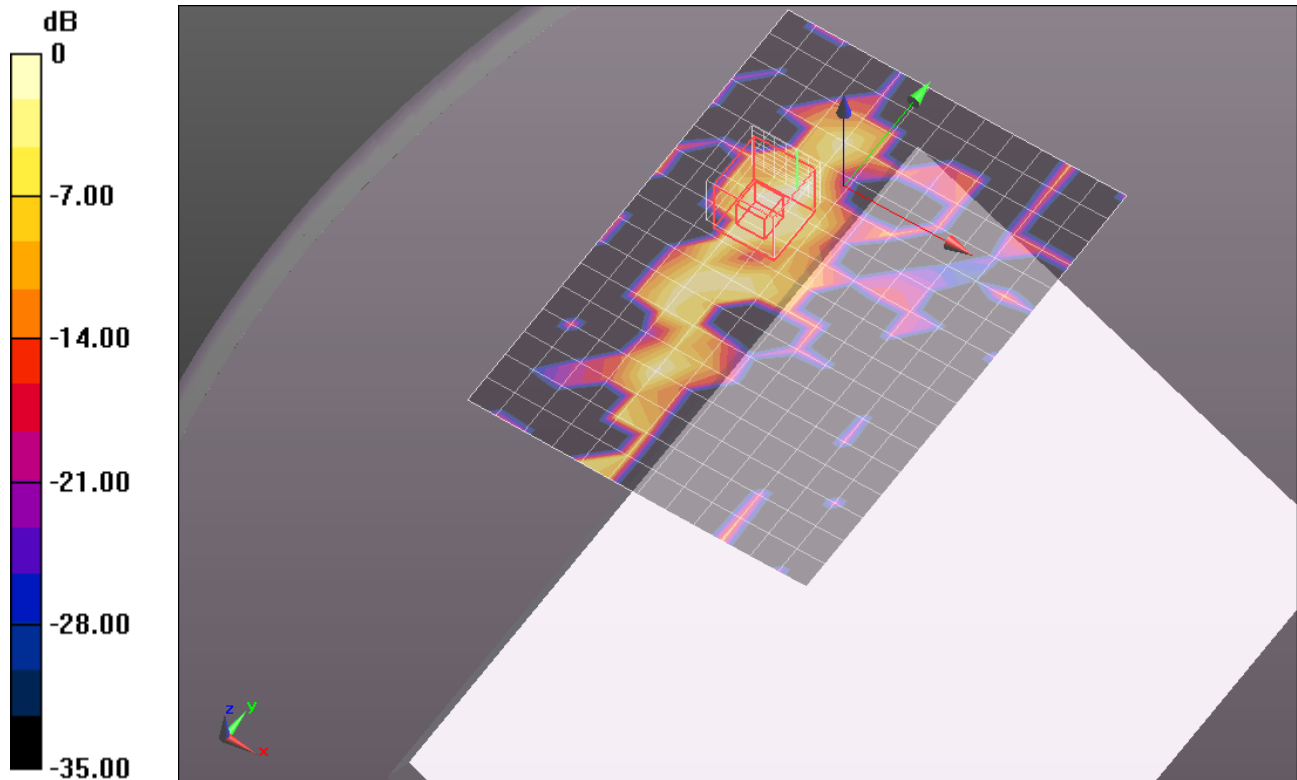

0 dB = 0.090mW/g = -20.92 dB mW/g

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 5.258 \text{ mho/m}$; $\epsilon_r = 50.601$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 1/Ch 48/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.154 mW/g


Rear 20 deg. tilt @ Edge 1/Ch 48/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.837 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.5900

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.175 mW/g

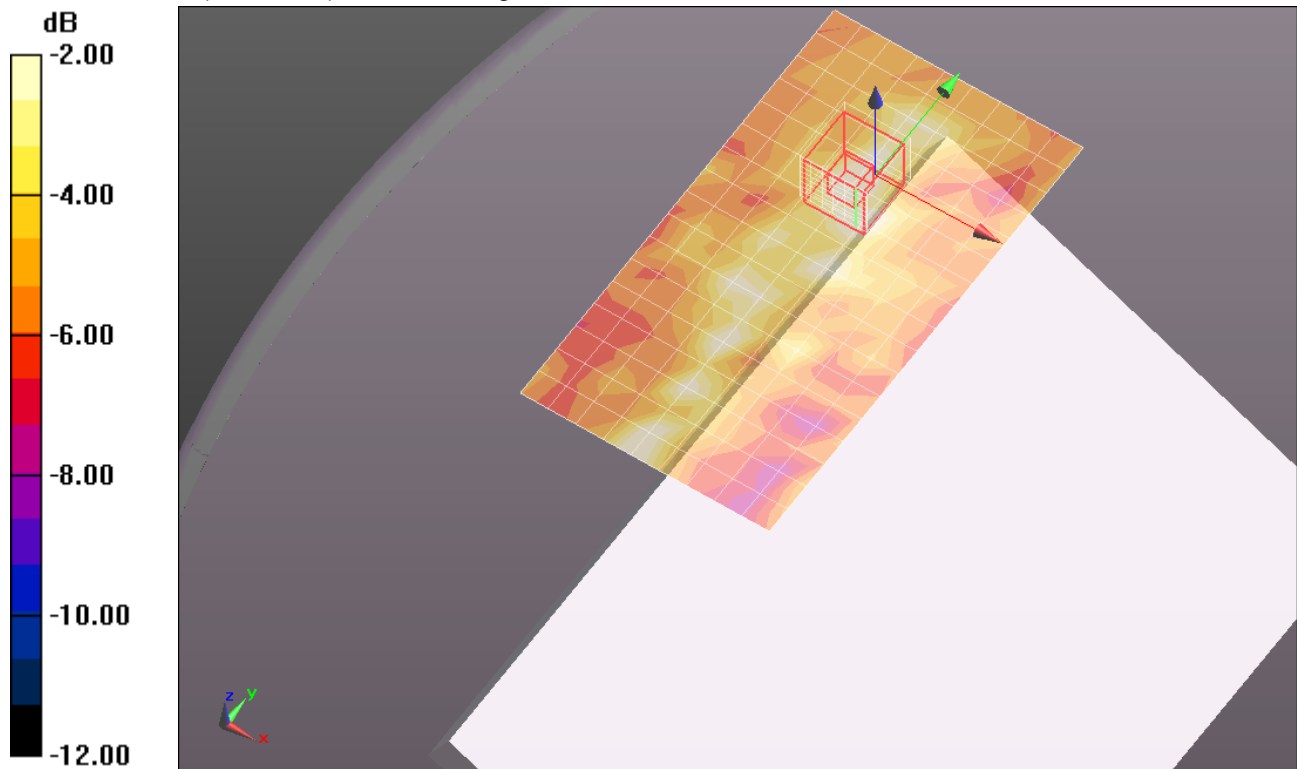

0 dB = 0.180mW/g = -14.89 dB mW/g

WiFi 5.2 GHz band


Frequency: 5180 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.159$ mho/m; $\epsilon_r = 50.668$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 36/Area Scan (10x19x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.356 mW/g

Edge 3/Ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 14.200 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 3.0460
SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.070 mW/g
 Maximum value of SAR (measured) = 1.029 mW/g

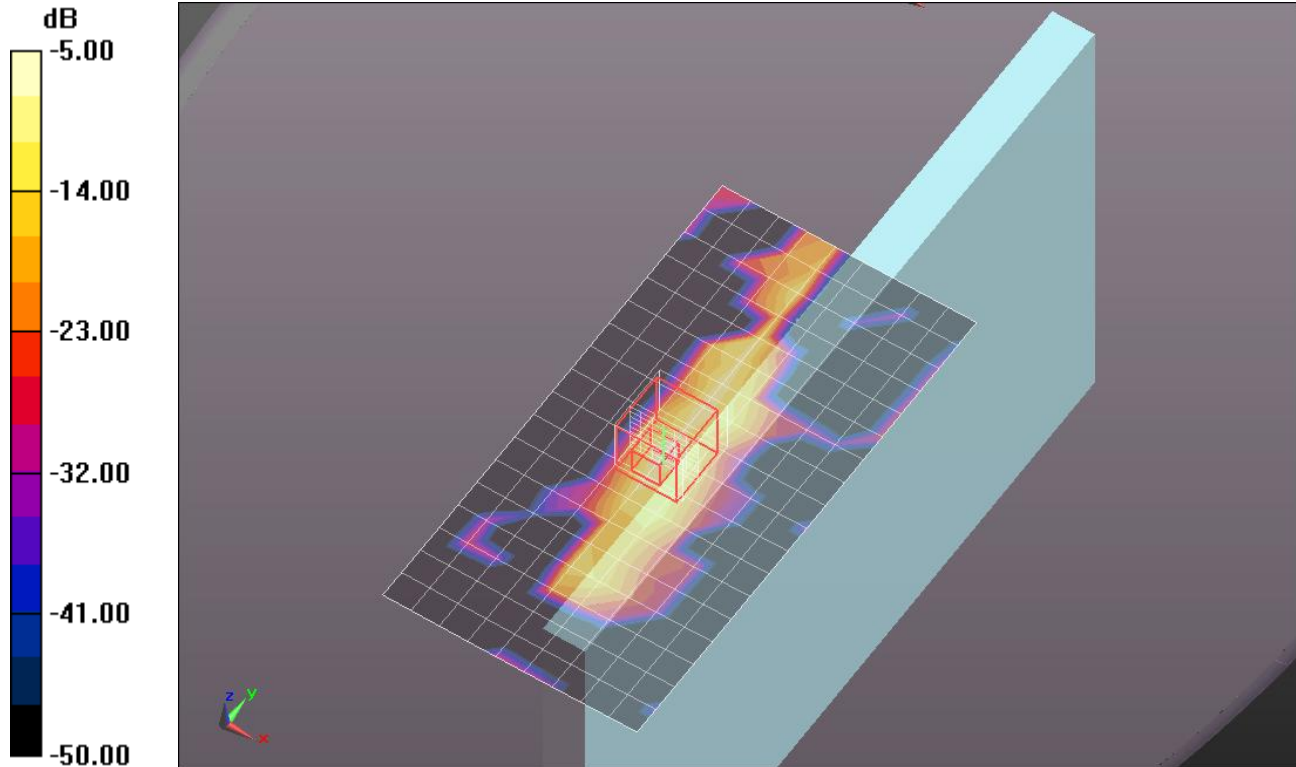


0 dB = 1.030mW/g = 0.26 dB mW/g

WiFi 5.2 GHz band

Frequency: 5180 MHz; Duty Cycle: 1:1

Edge 3/Ch 36 2/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.011 mW/g

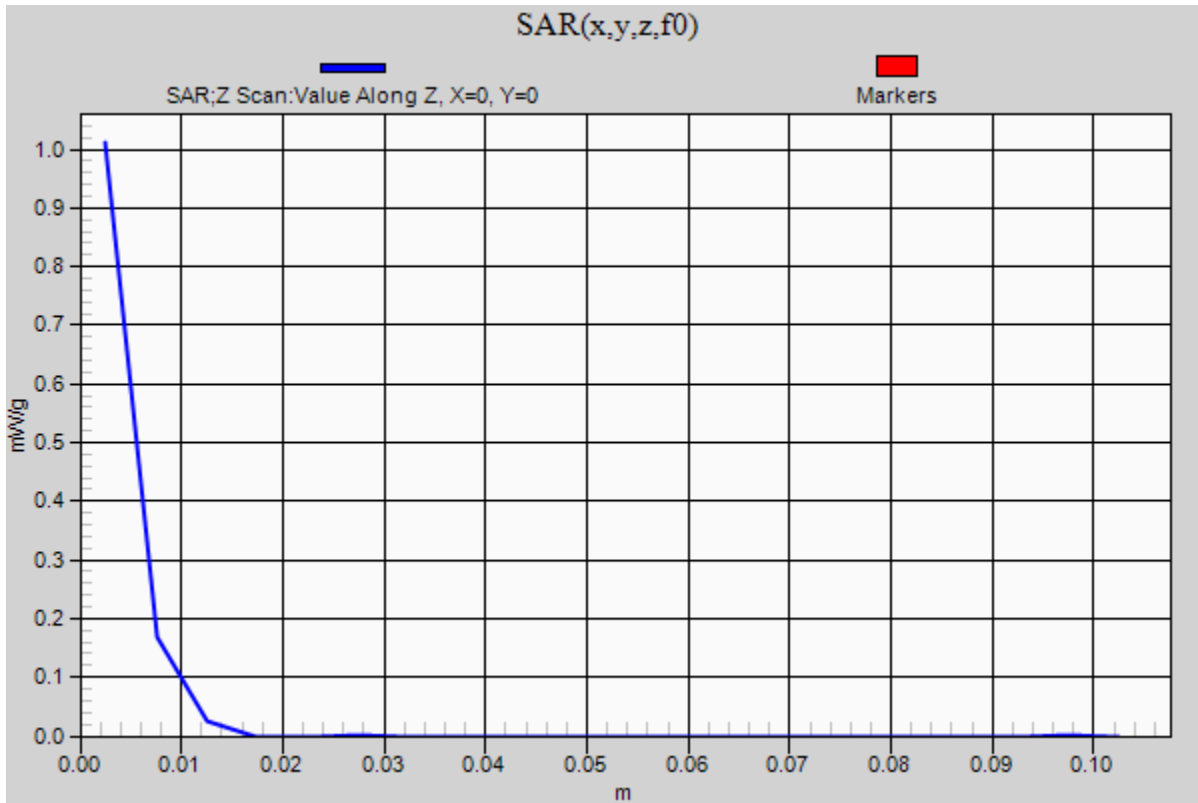

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.258$ mho/m; $\epsilon_r = 50.601$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 48 /Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.256 mW/g


Edge 3/Ch 48 /Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.084 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.8470

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.500 mW/g

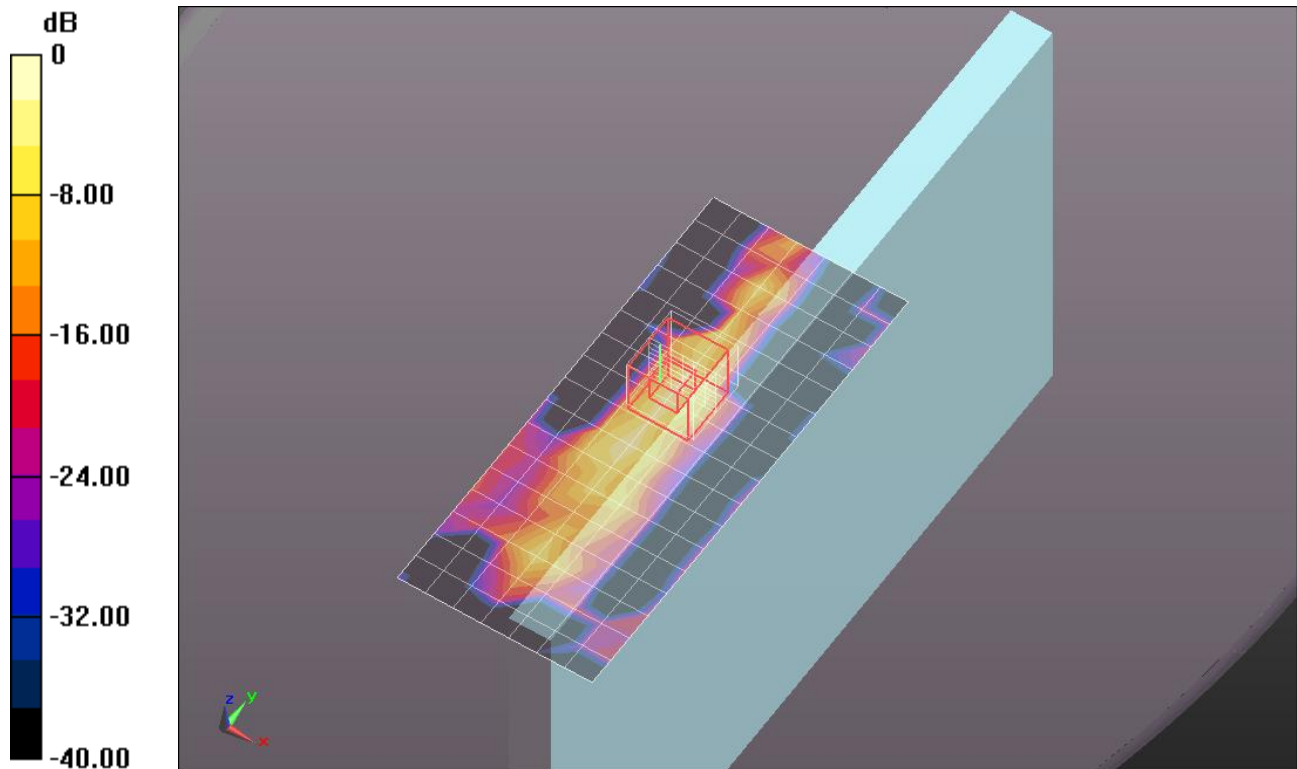

0 dB = 0.500mW/g = -6.02 dB mW/g

WiFi 5.3 GHz band

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.41$ mho/m; $\epsilon_r = 50.346$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 52/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.181 mW/g


Rear/Ch 52/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.429 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.8460

SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

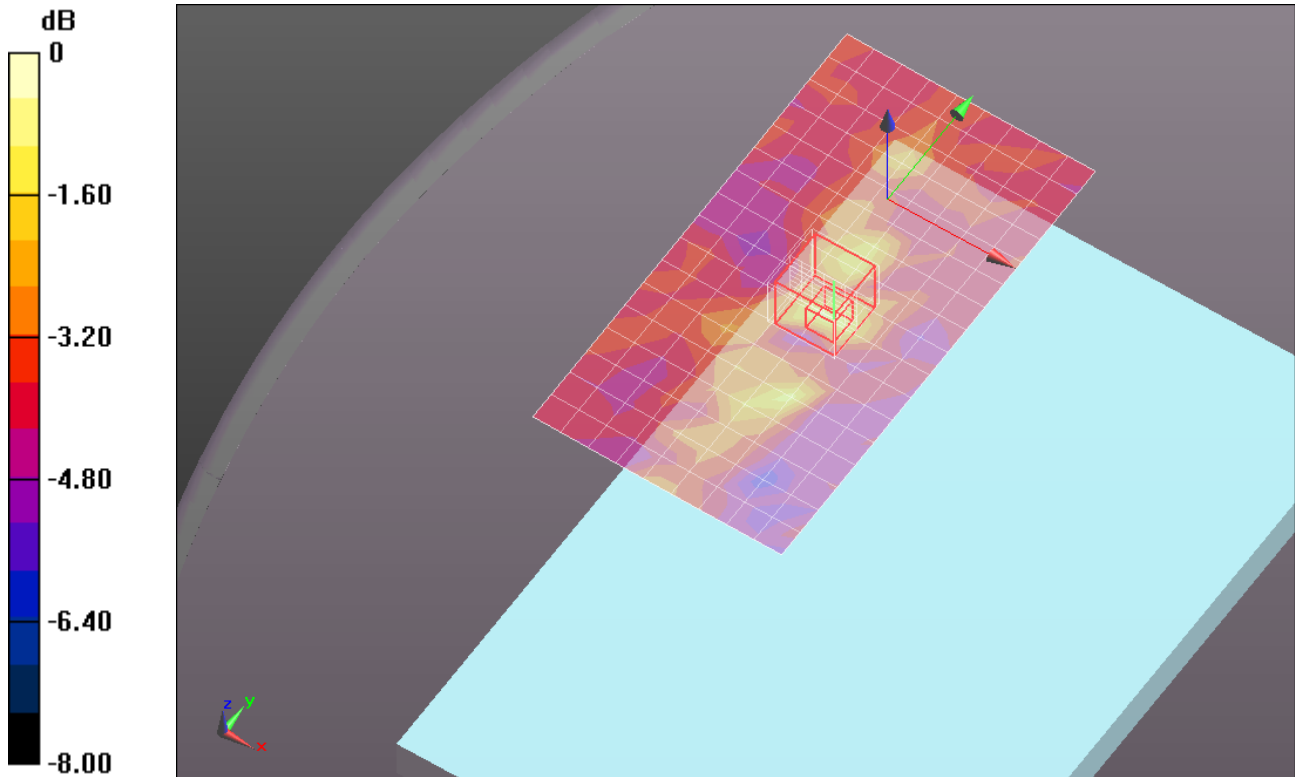

0 dB = 0.220mW/g = -13.15 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.352$ mho/m; $\epsilon_r = 50.448$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 64/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.142 mW/g


Rear/Ch 64/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.040 V/m; Power Drift = 0.0018 dB

Peak SAR (extrapolated) = 0.2600

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.163 mW/g

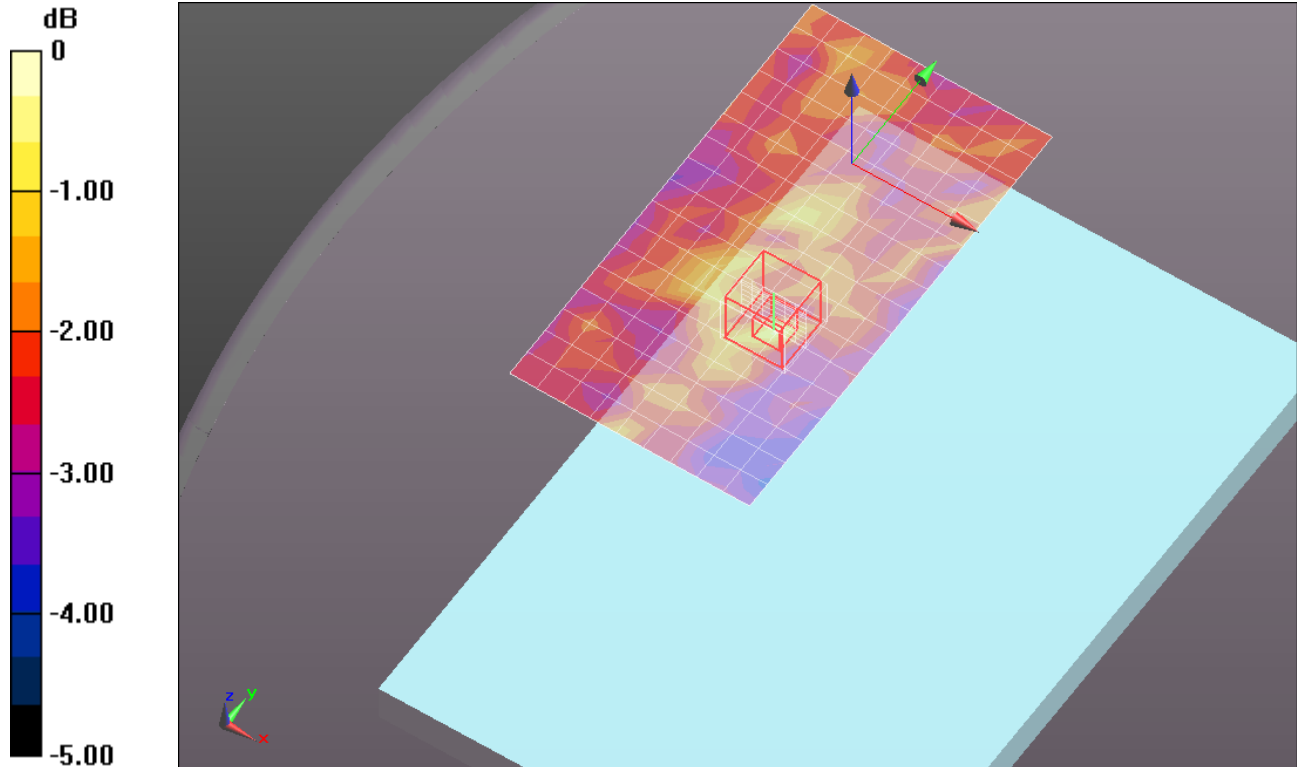

0 dB = 0.160mW/g = -15.92 dB mW/g

WiFi 5.3 GHz band

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.41 \text{ mho/m}$; $\epsilon_r = 50.346$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 1/Ch 52/Area Scan (10x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.129 mW/g


Rear 20 deg. tilt @ Edge 1/Ch 52/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 5.475 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.3320

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

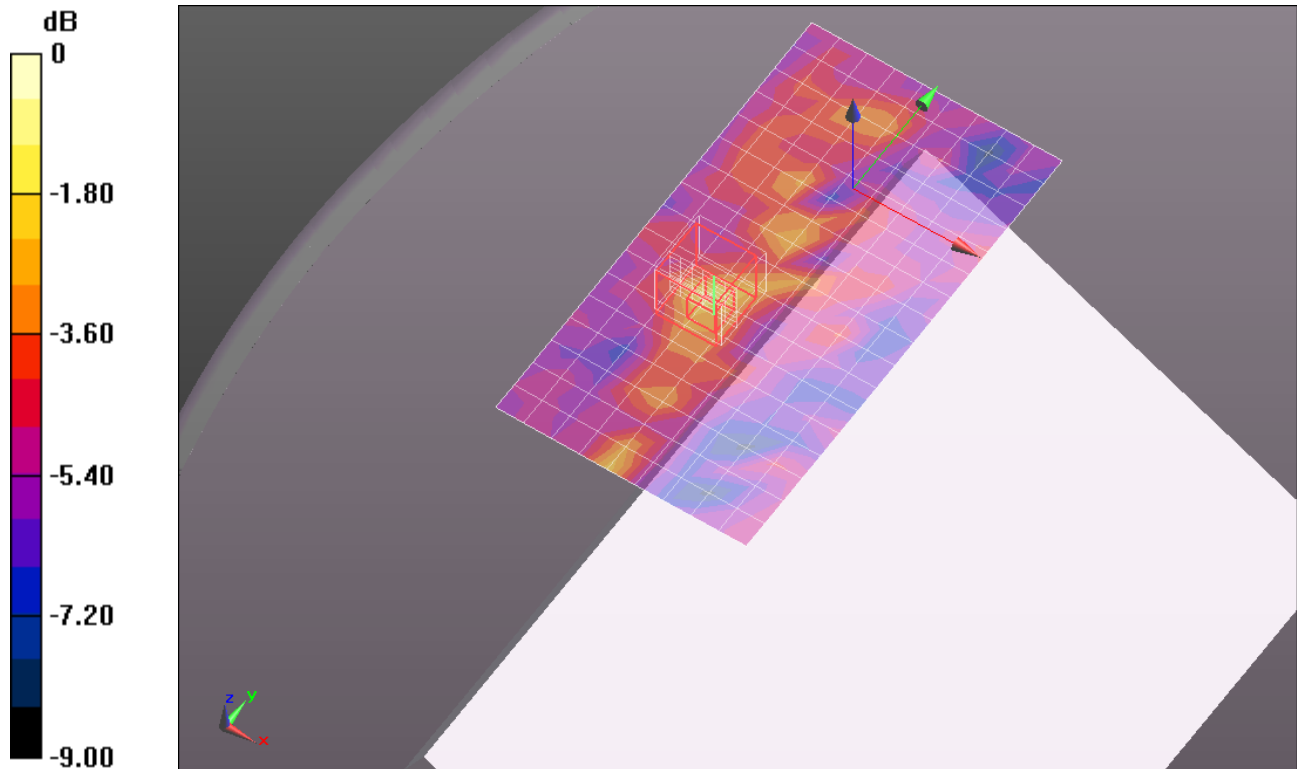

0 dB = 0.160mW/g = -15.92 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.352$ mho/m; $\epsilon_r = 50.448$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 64/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.245 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 64/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.460 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.3170

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.087 mW/g

Maximum value of SAR (measured) = 0.341 mW/g

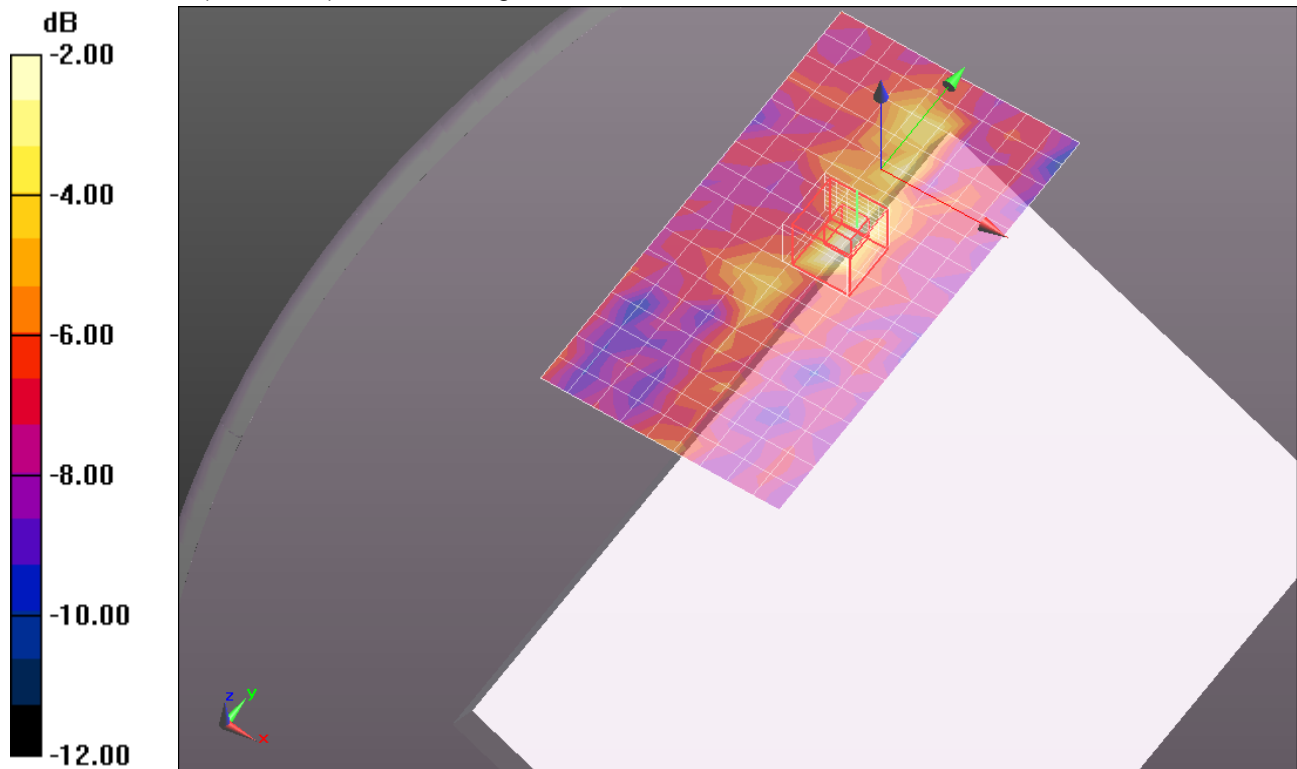


0 dB = 0.340mW/g = -9.37 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1

Edge 3/Ch 64/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.178 mW/g

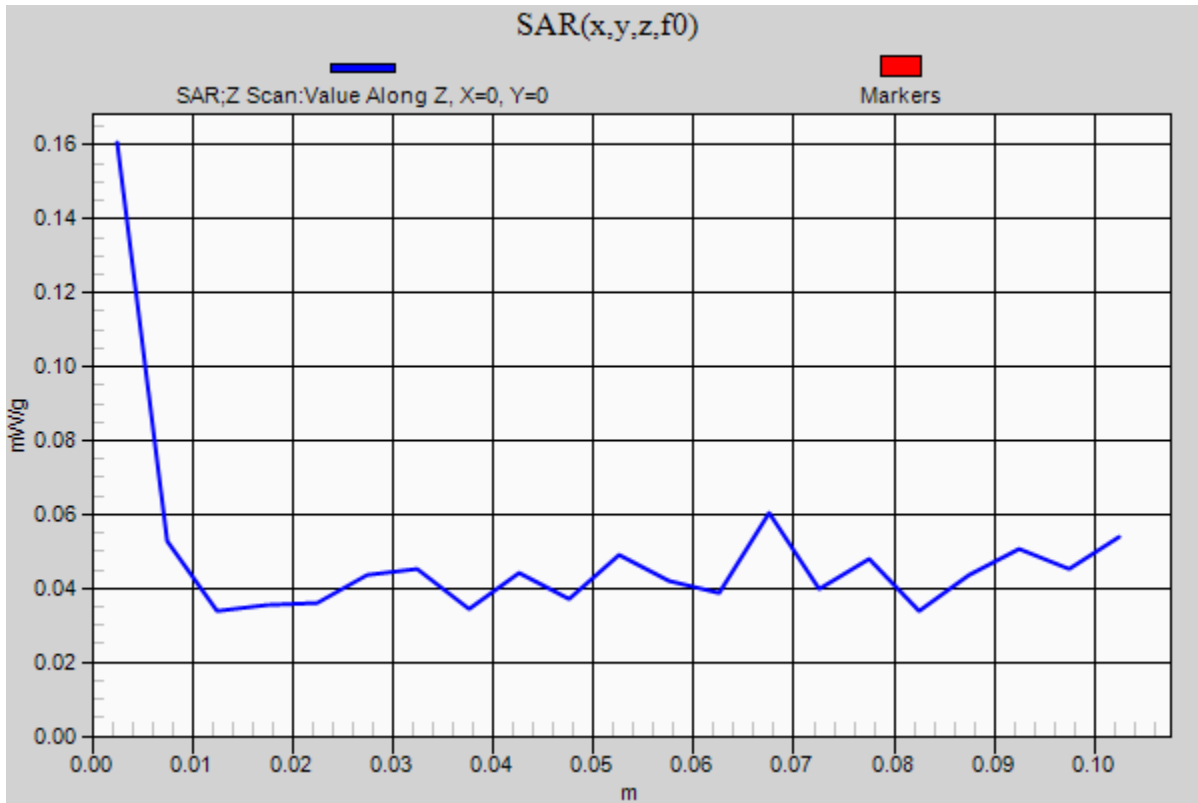

WiFi 5.3 GHz band

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.268 \text{ mho/m}$; $\epsilon_r = 50.556$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 52/Area Scan (8x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.256 mW/g


Edge 3/Ch 52/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 6.355 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.7320

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

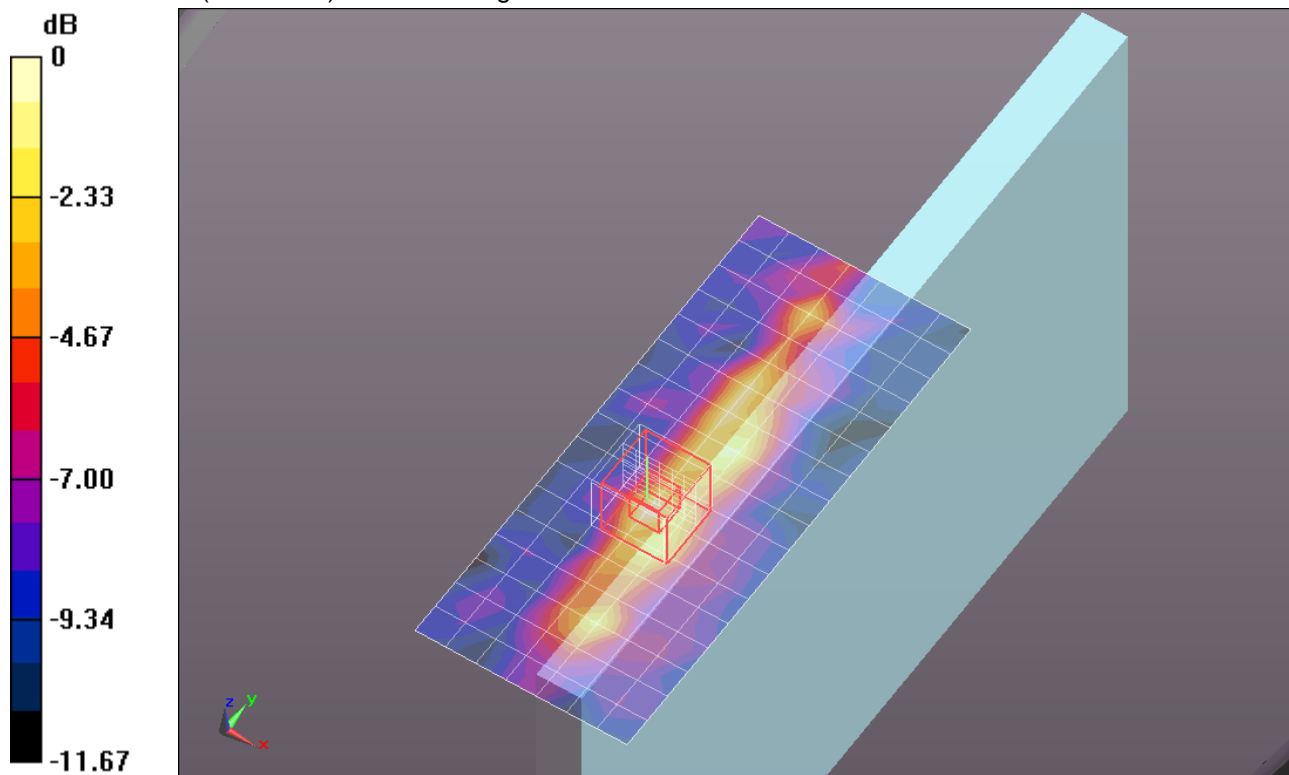

0 dB = 0.240mW/g = -12.40 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.352$ mho/m; $\epsilon_r = 50.448$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 64/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.170 mW/g


Edge 3/Ch 64/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.137 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.4720

SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

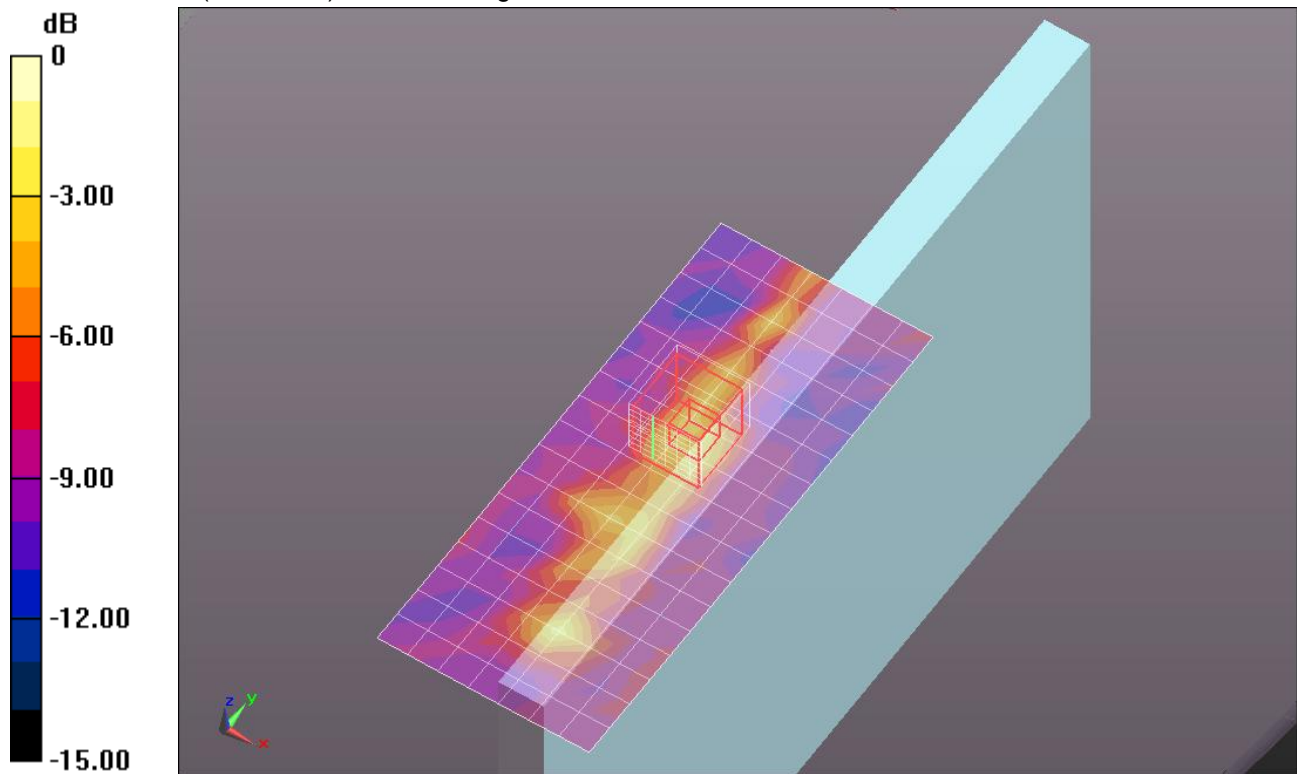

0 dB = 0.260mW/g = -11.70 dB mW/g

WiFi 5.5 GHz band

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.597$ mho/m; $\epsilon_r = 50.142$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.49, 3.49, 3.49); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 104/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.169 mW/g


Rear/Ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.945 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.2940

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

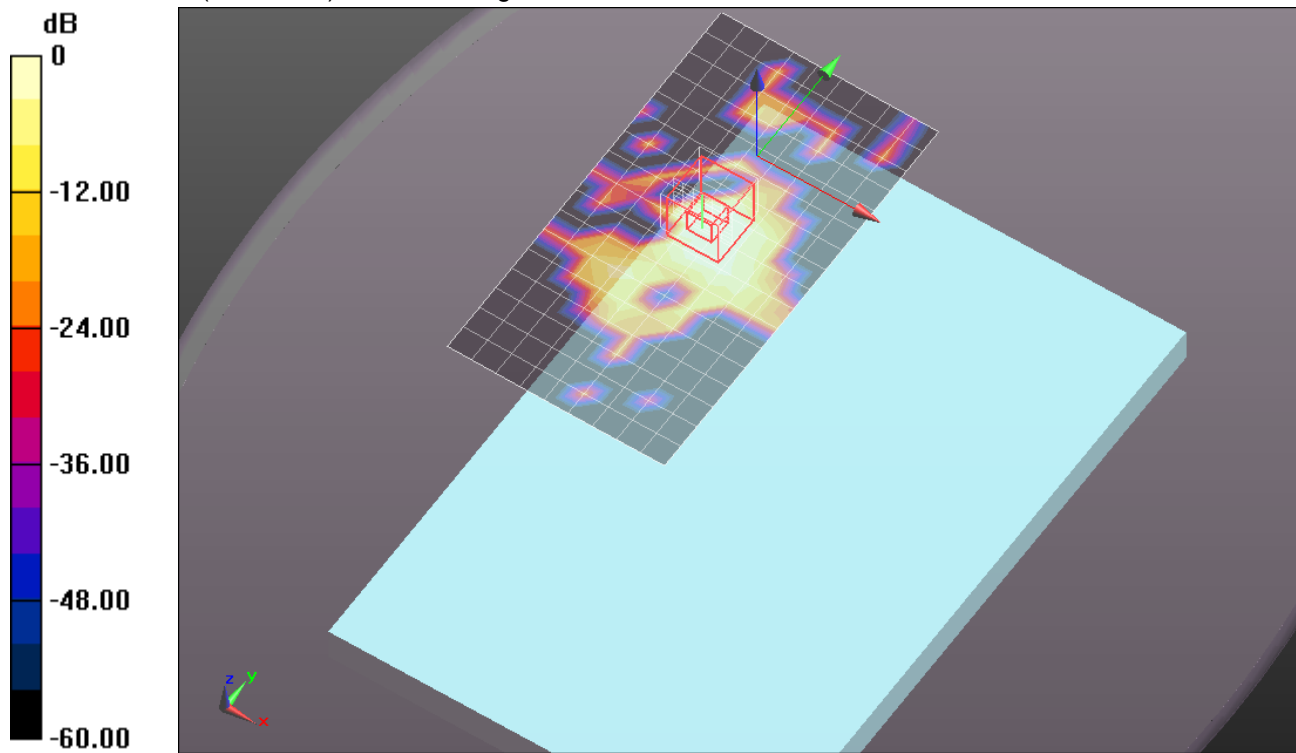

0 dB = 0.160mW/g = -15.92 dB mW/g

WiFi 5.5 GHz band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.708$ mho/m; $\epsilon_r = 50.015$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 116/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.498 mW/g


Rear/Ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.249 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.6520

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.515 mW/g

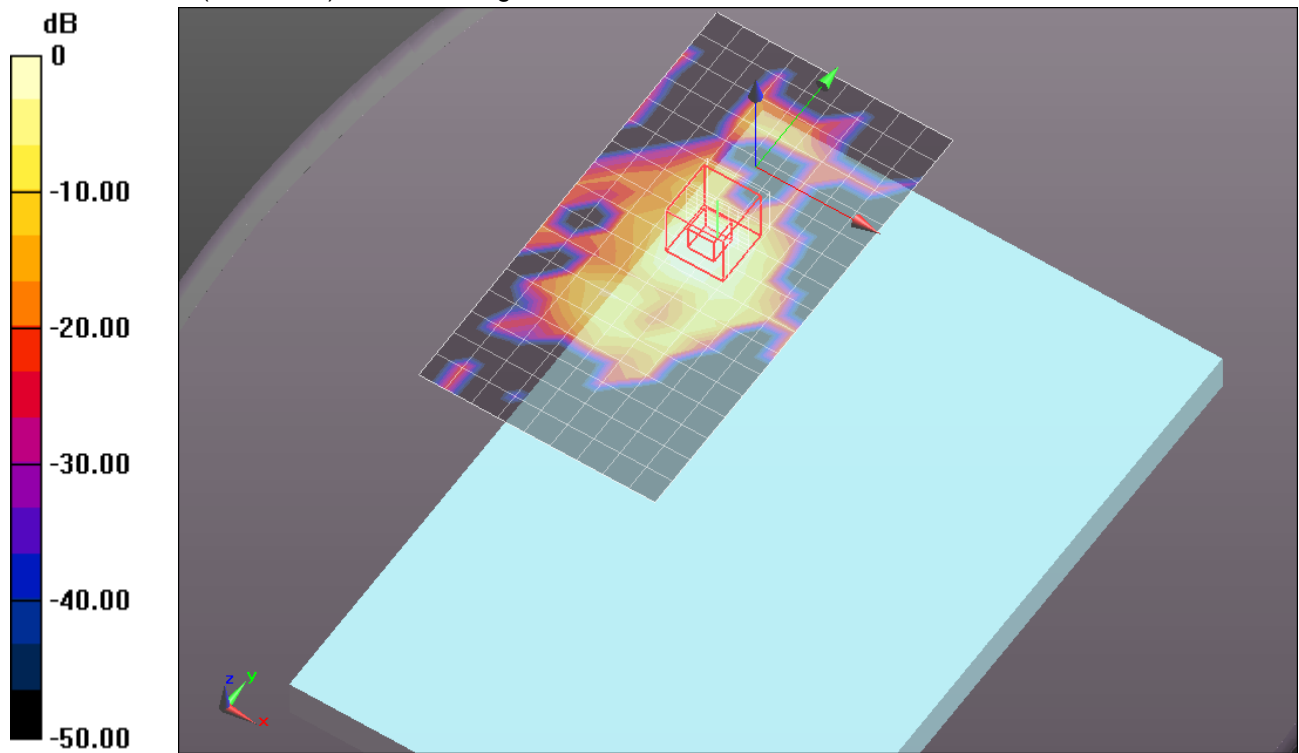

0 dB = 0.520mW/g = -5.68 dB mW/g

WiFi 5.5 GHz band


Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5620$ MHz; $\sigma = 5.853$ mho/m; $\epsilon_r = 49.811$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 124/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.210 mW/g

Rear/Ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 6.505 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.5000
SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.049 mW/g
 Maximum value of SAR (measured) = 0.253 mW/g

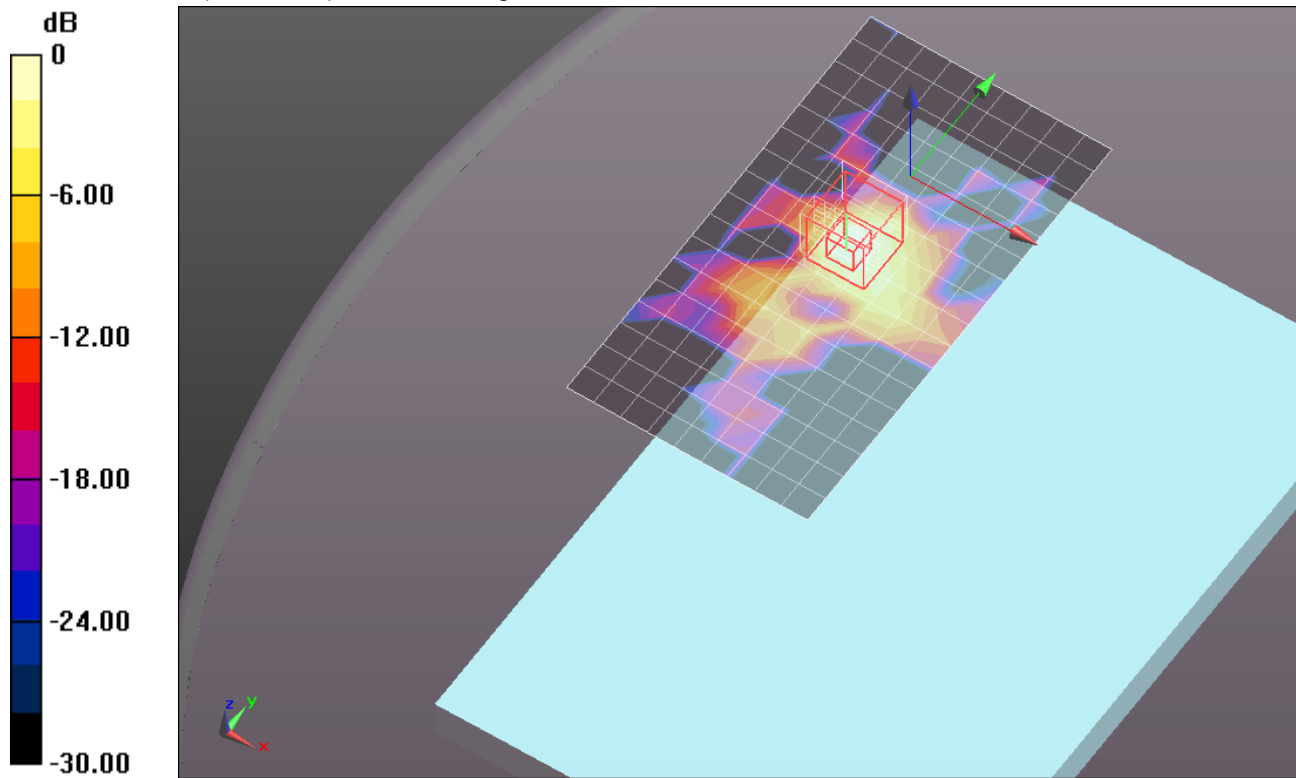

0 dB = 0.250mW/g = -12.04 dB mW/g

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.826$ mho/m; $\epsilon_r = 49.879$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 136/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.356 mW/g


Rear/Ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.687 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.8630

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.550 mW/g

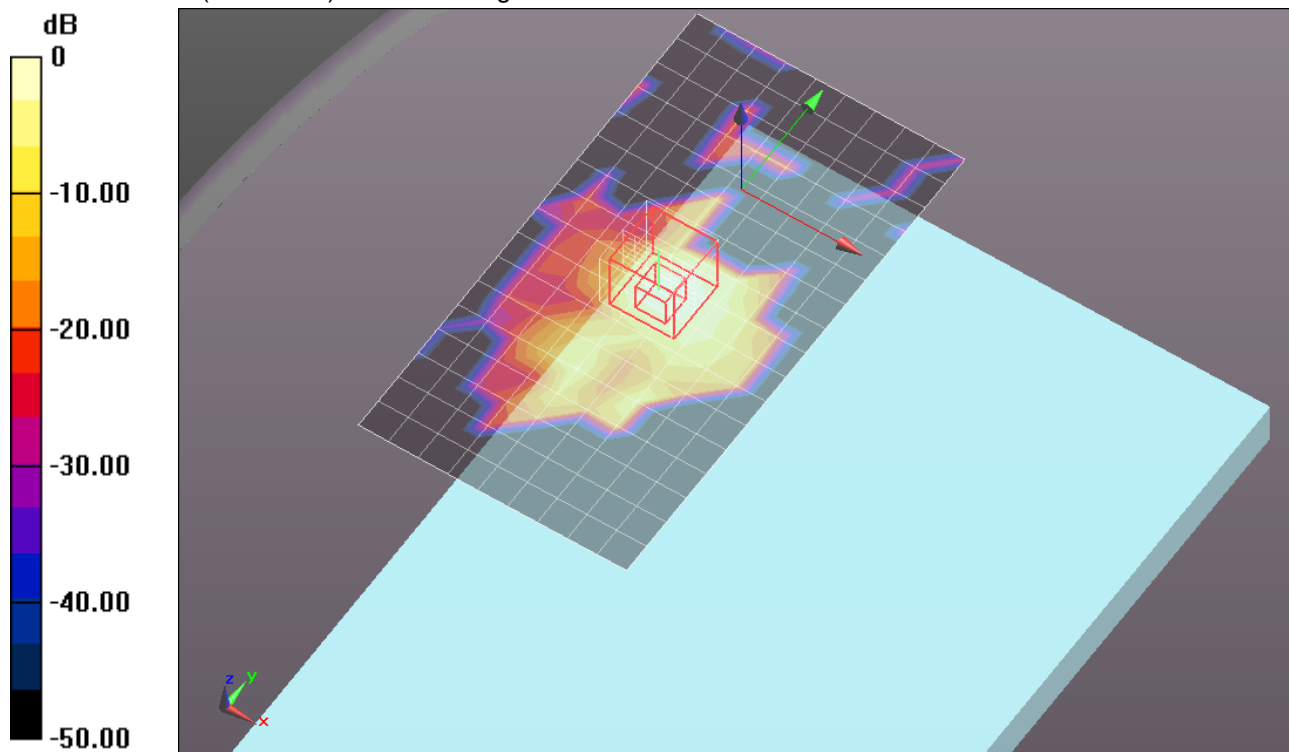

0 dB = 0.550mW/g = -5.19 dB mW/g

WiFi 5.5 GHz band

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.754$ mho/m; $\epsilon_r = 51.084$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.49, 3.49, 3.49); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 104/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.174 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.955 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.3250

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.189 mW/g

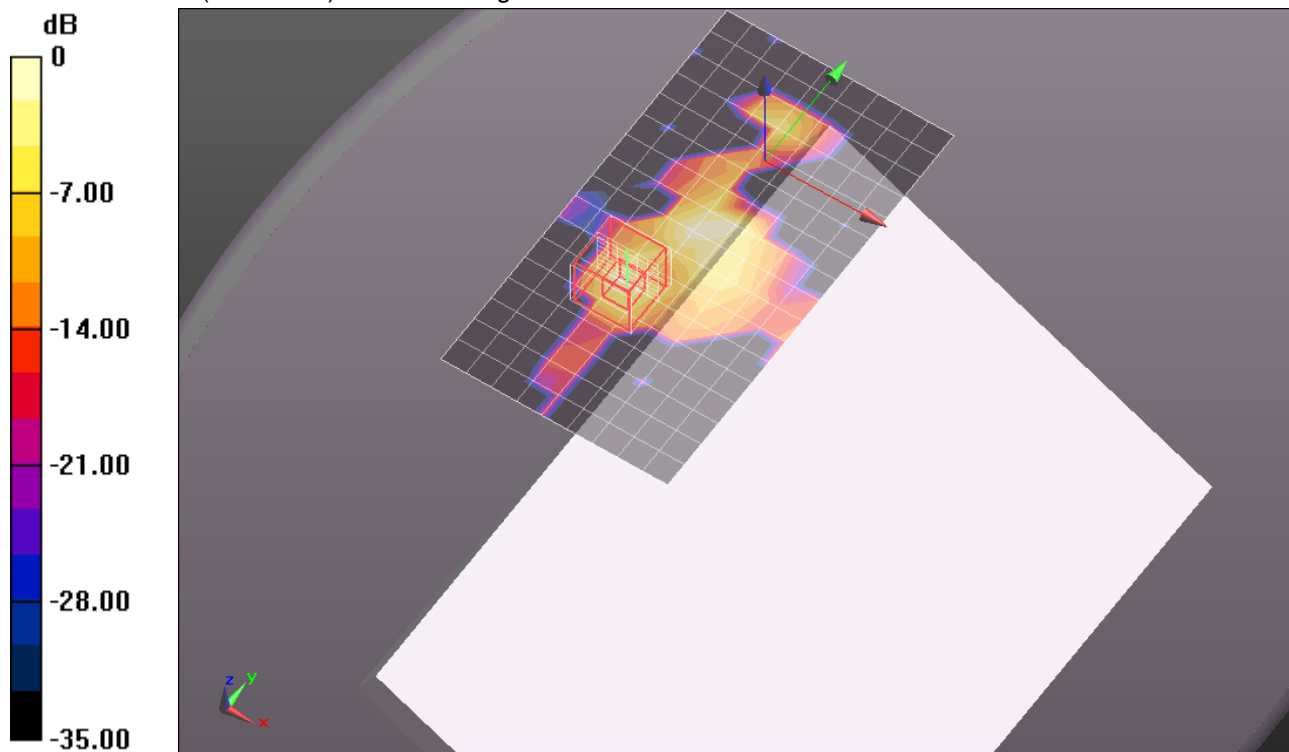

0 dB = 0.190mW/g = -14.42 dB mW/g

WiFi 5.5 GHz band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.847 \text{ mho/m}$; $\epsilon_r = 50.961$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 116/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.353 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.567 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.6650

SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.372 mW/g

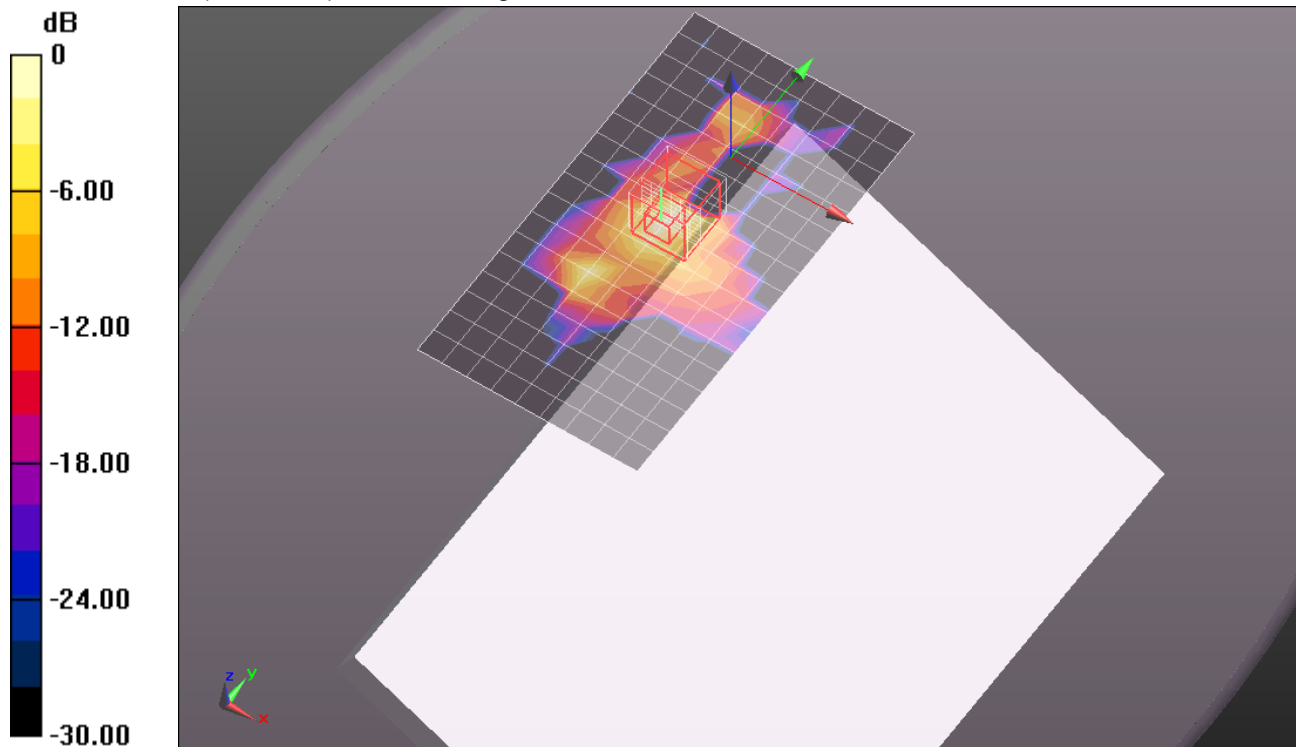

0 dB = 0.370mW/g = -8.64 dB mW/g

WiFi 5.5 GHz band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5620$ MHz; $\sigma = 5.853$ mho/m; $\epsilon_r = 49.811$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 1/Ch 124/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.233 mW/g


Rear 20 deg. tilt @ Edge 1/Ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.261 V/m; Power Drift = 0.0093 dB

Peak SAR (extrapolated) = 0.5710

SAR(1 g) = 0.126 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

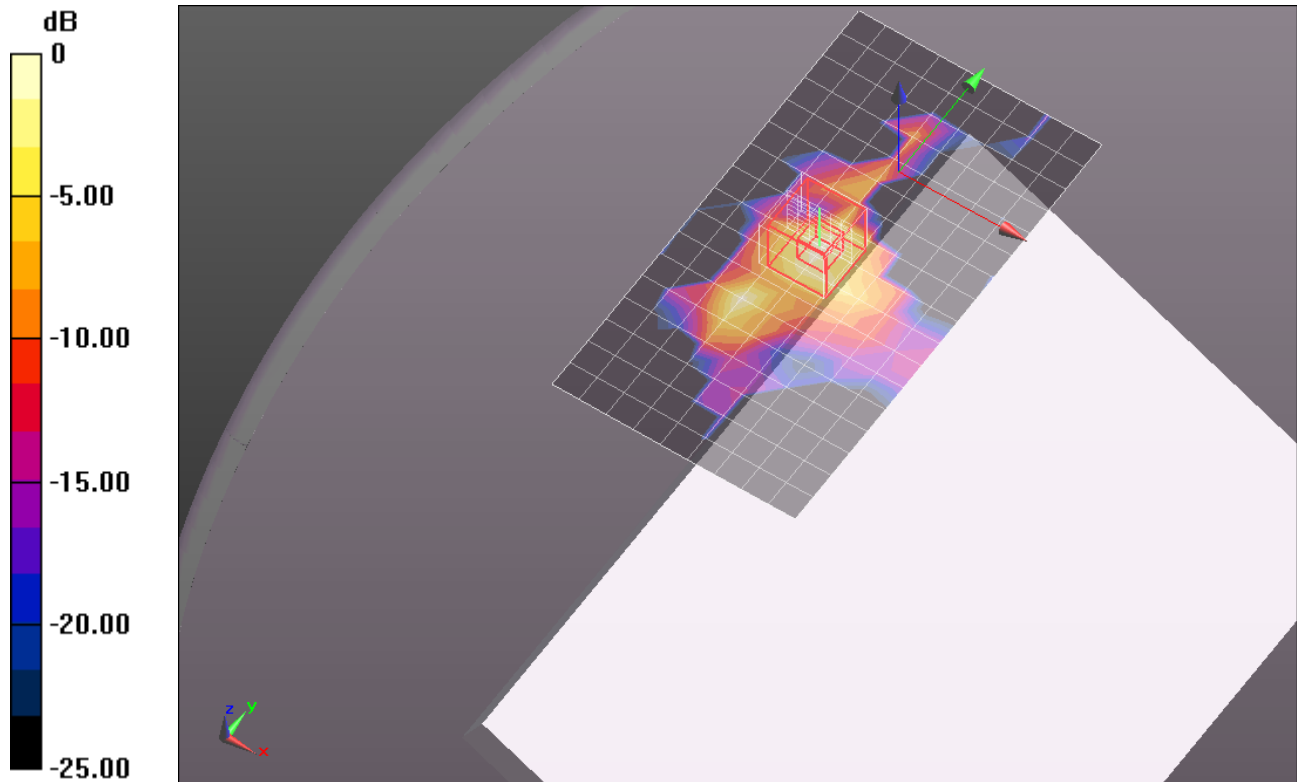

0 dB = 0.240mW/g = -12.40 dB mW/g

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.976$ mho/m; $\epsilon_r = 50.804$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 136/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.381 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.857 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.7750

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

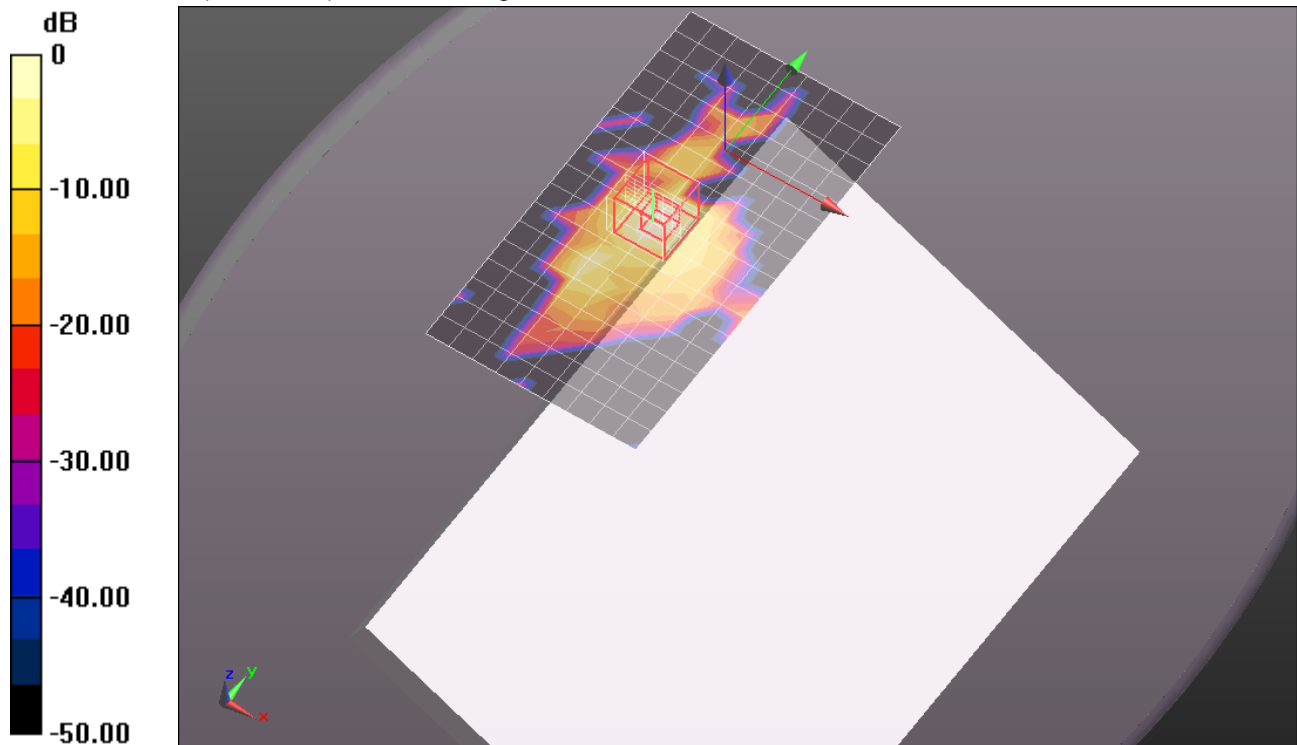

0 dB = 0.410mW/g = -7.74 dB mW/g

WiFi 5.5 GHz band


Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.685$ mho/m; $\epsilon_r = 51.28$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.49, 3.49, 3.49); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 104/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.526 mW/g

Edge 3/Ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 10.477 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 1.5310
SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.092 mW/g
 Maximum value of SAR (measured) = 0.536 mW/g

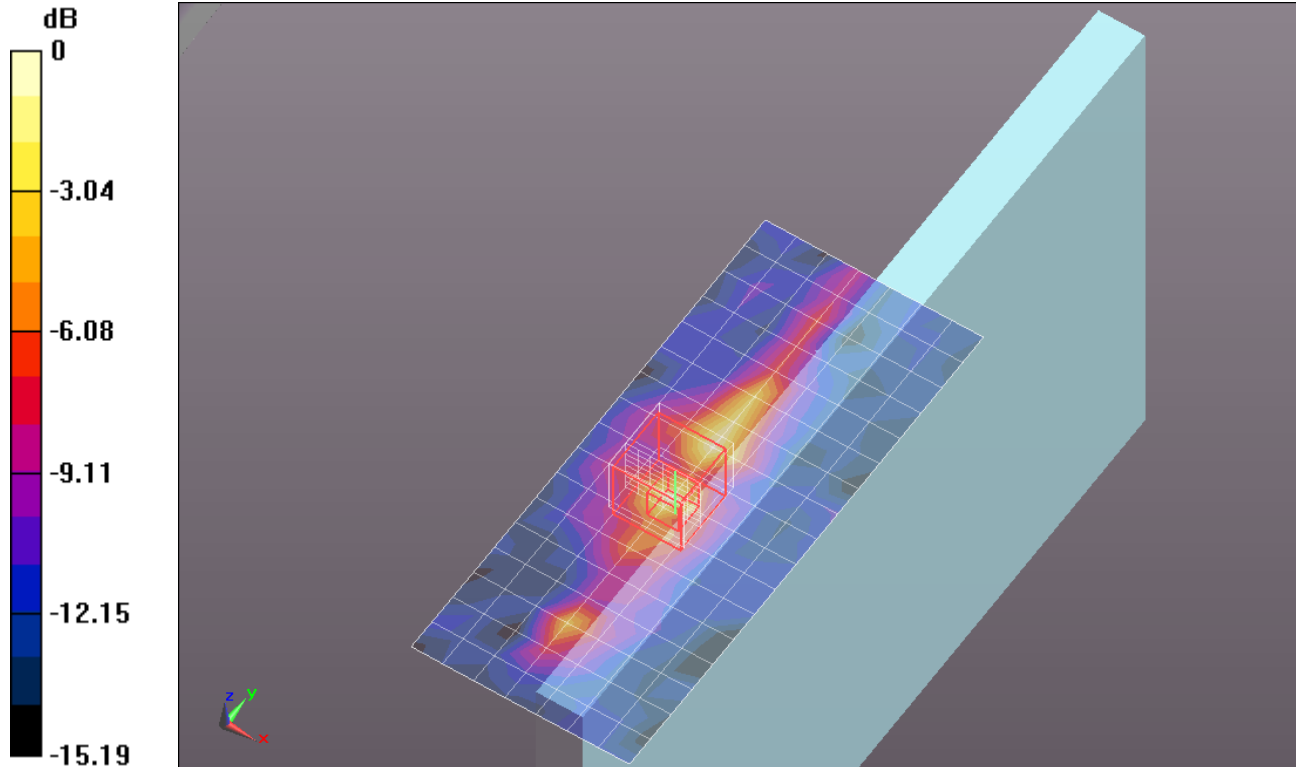

0 dB = 0.540mW/g = -5.35 dB mW/g

WiFi 5.5 GHz band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.805 \text{ mho/m}$; $\epsilon_r = 51.067$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 116/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.595 mW/g


Edge 3/Ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.535 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.1290

SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.606 mW/g

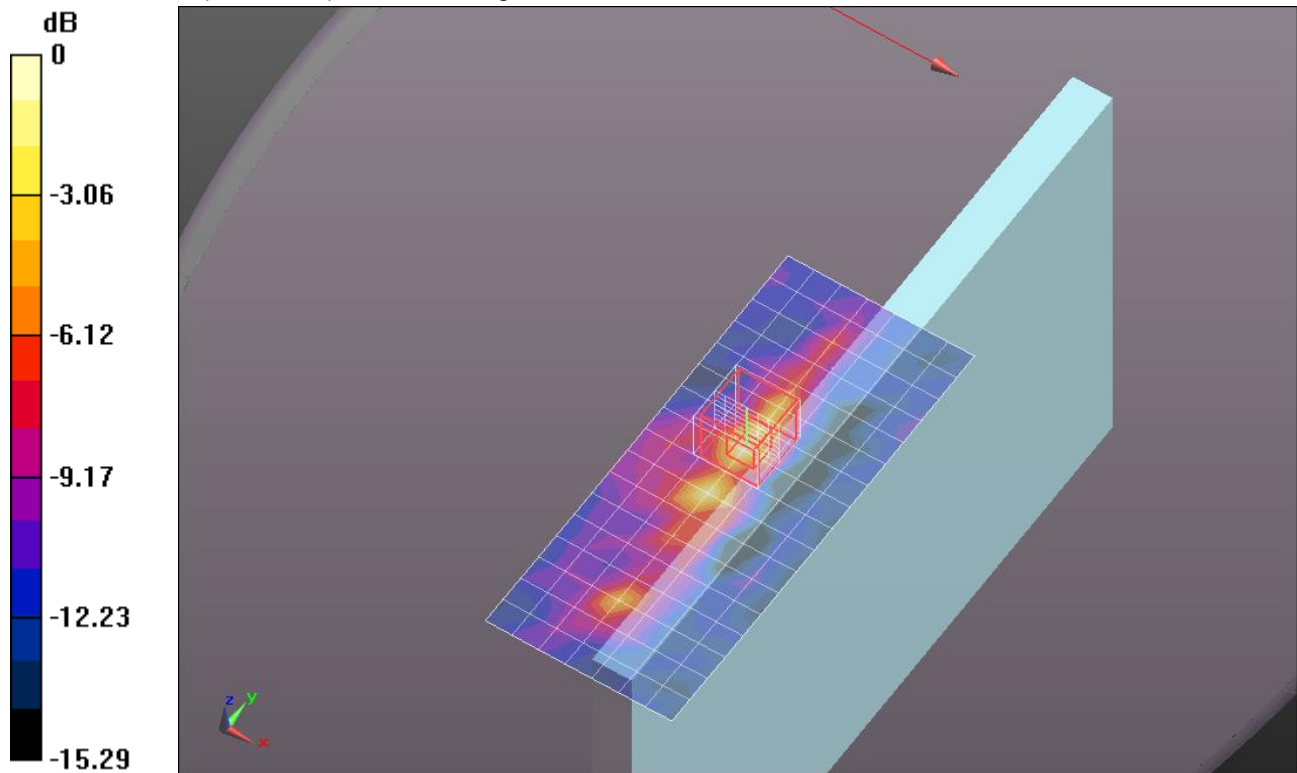

0 dB = 0.610mW/g = -4.29 dB mW/g

WiFi 5.5 GHz band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5620$ MHz; $\sigma = 5.841$ mho/m; $\epsilon_r = 51.121$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 124/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.229 mW/g


Edge 3/Ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 16.261 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.3110

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

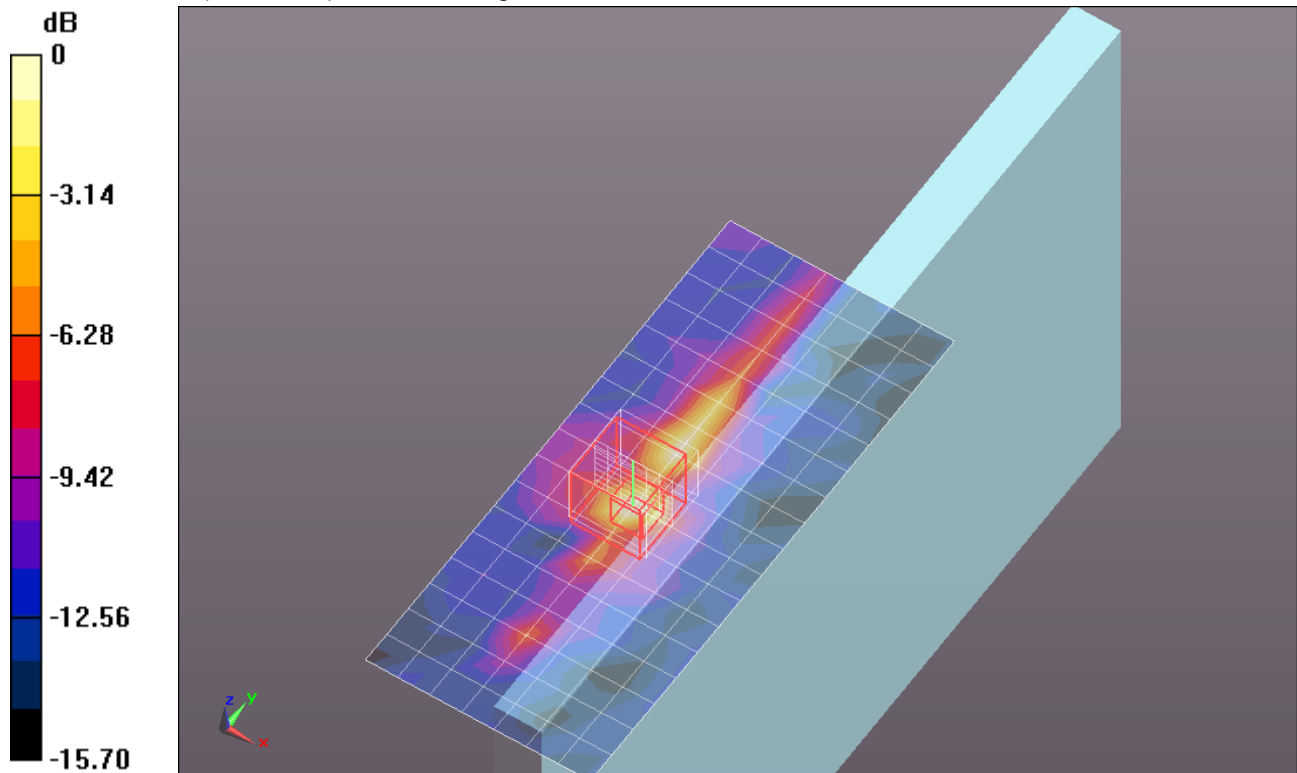

0 dB = 0.780mW/g = -2.16 dB mW/g

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.913$ mho/m; $\epsilon_r = 50.908$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 136/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.278 mW/g


Edge 3/Ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 15.555 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.3250

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 1.191 mW/g

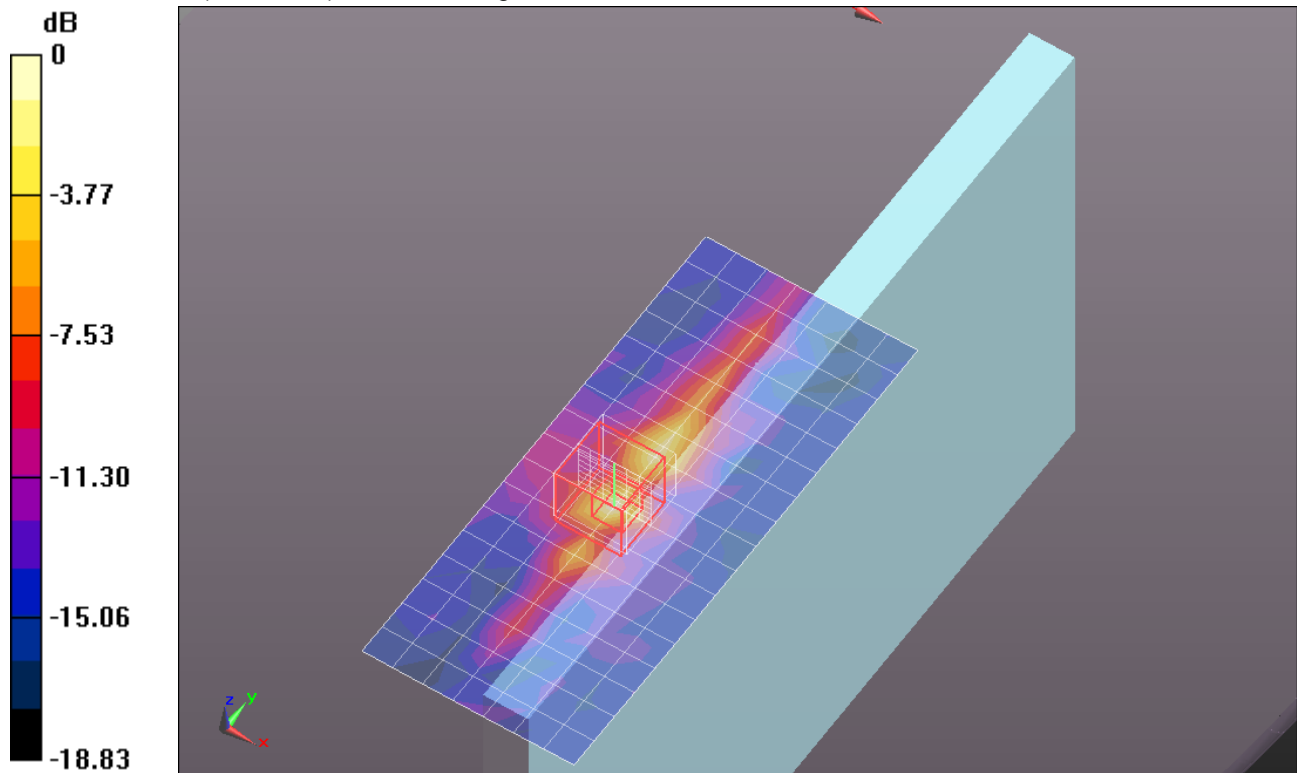


0 dB = 1.190mW/g = 1.51 dB mW/g

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1

Edge 3/Ch 136/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.279 mW/g

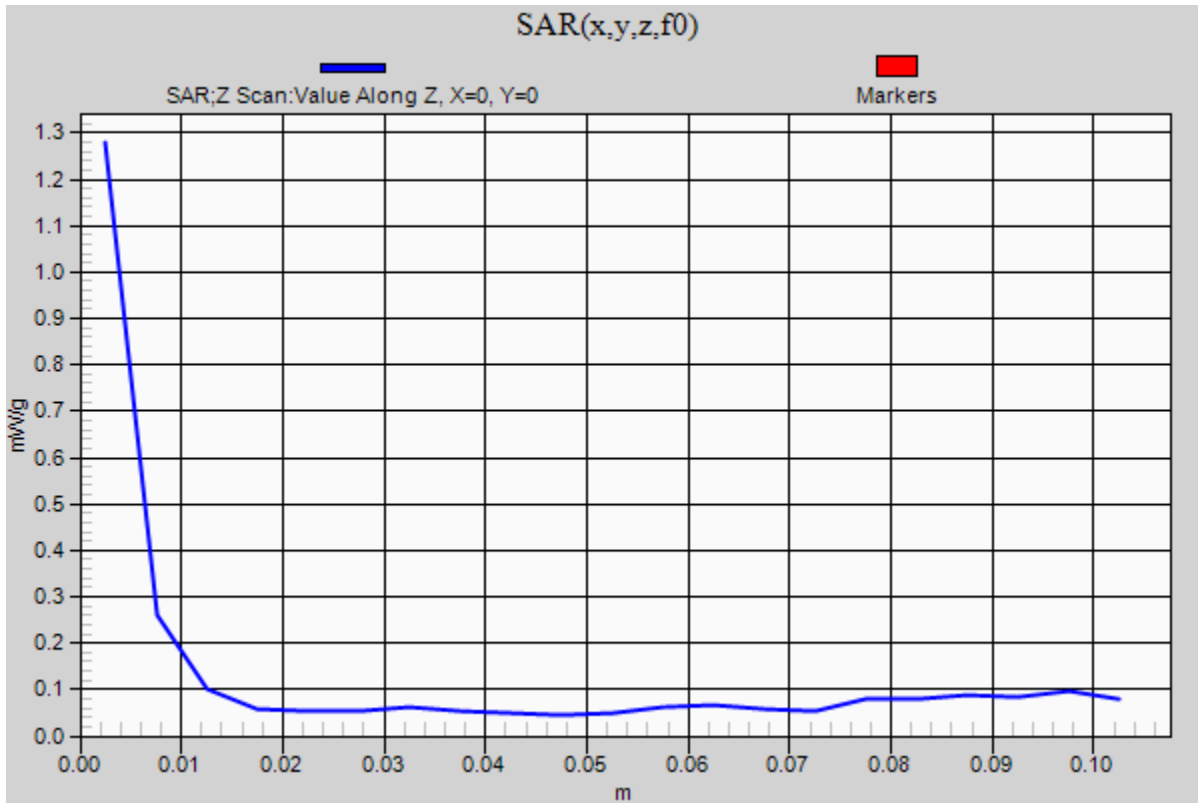

WiFi 5.8 GHz band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.063$ mho/m; $\epsilon_r = 50.721$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 149/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.316 mW/g


Rear/Ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.935 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.8340

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

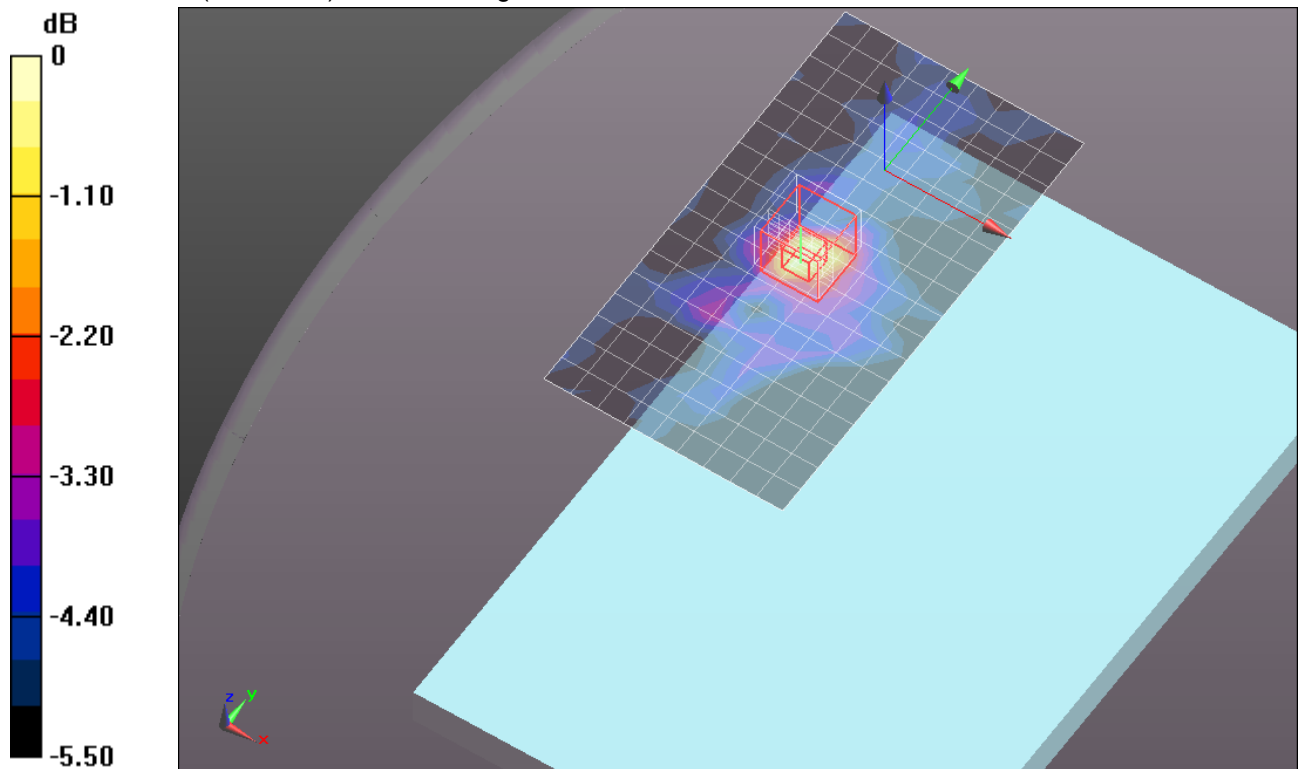

0 dB = 0.360mW/g = -8.87 dB mW/g

WiFi 5.8 GHz band


Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.028 \text{ mho/m}$; $\epsilon_r = 50.774$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 157/Area Scan (10x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.241 mW/g

Rear/Ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$
 Reference Value = 7.091 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.5270
SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.170 mW/g
 Maximum value of SAR (measured) = 0.280 mW/g

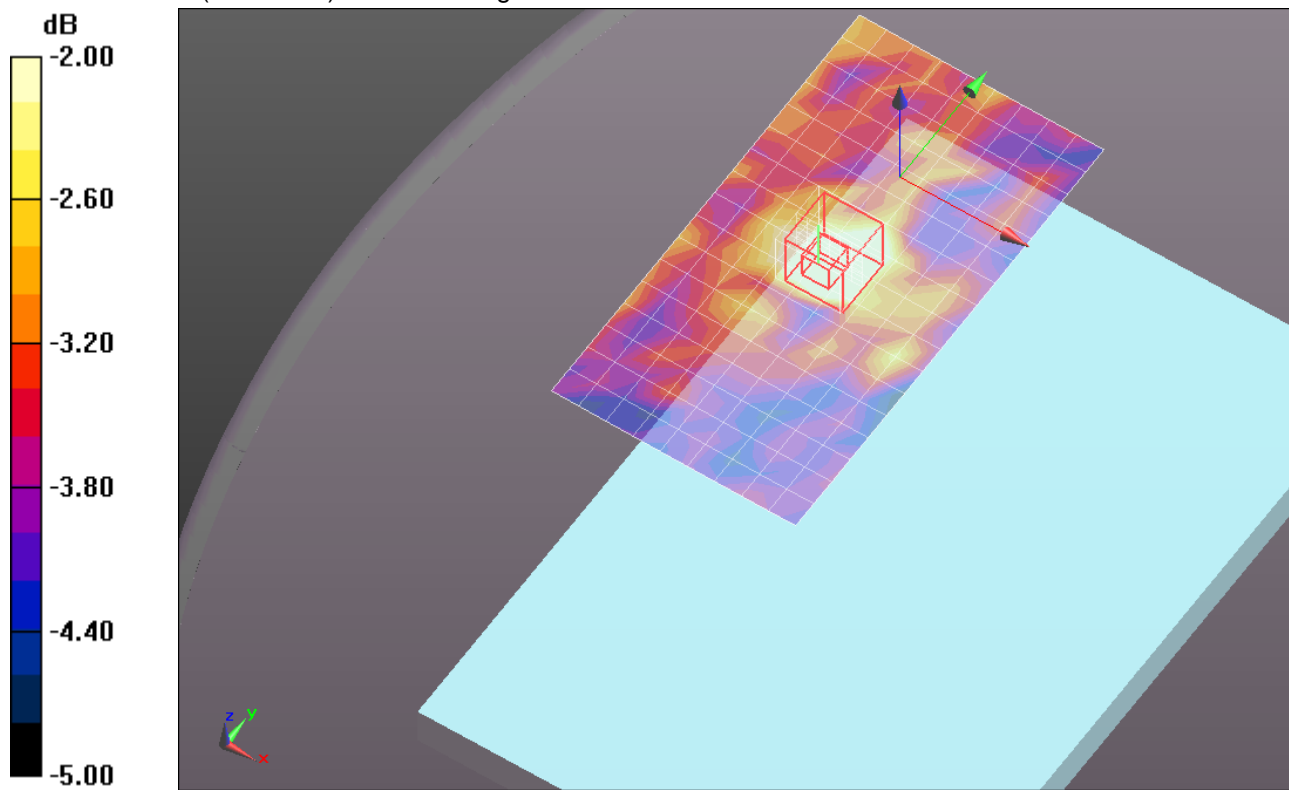

0 dB = 0.280mW/g = -11.06 dB mW/g

WiFi 5.8 GHz band


Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.187 \text{ mho/m}$; $\epsilon_r = 50.563$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 165/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.283 mW/g

Rear/Ch 165/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 7.299 V/m; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.6190
SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.176 mW/g
 Maximum value of SAR (measured) = 0.428 mW/g

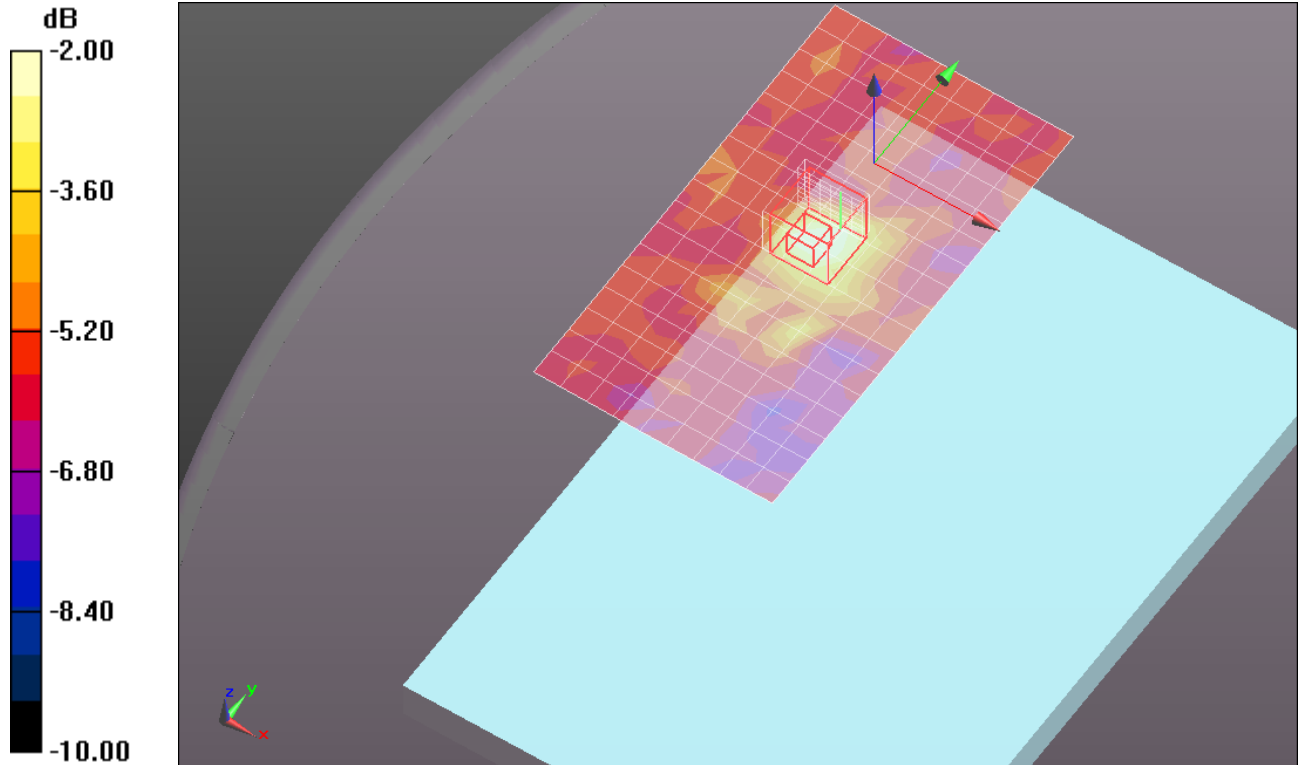

0 dB = 0.430mW/g = -7.33 dB mW/g

WiFi 5.8 GHz band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.002 \text{ mho/m}$; $\epsilon_r = 49.593$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 1/Ch 149/Area Scan (10x18x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.179 mW/g

Rear 20 deg. tilt @ Edge 1/Ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=4\text{mm}$,


$dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 6.241 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.3280

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.217 mW/g

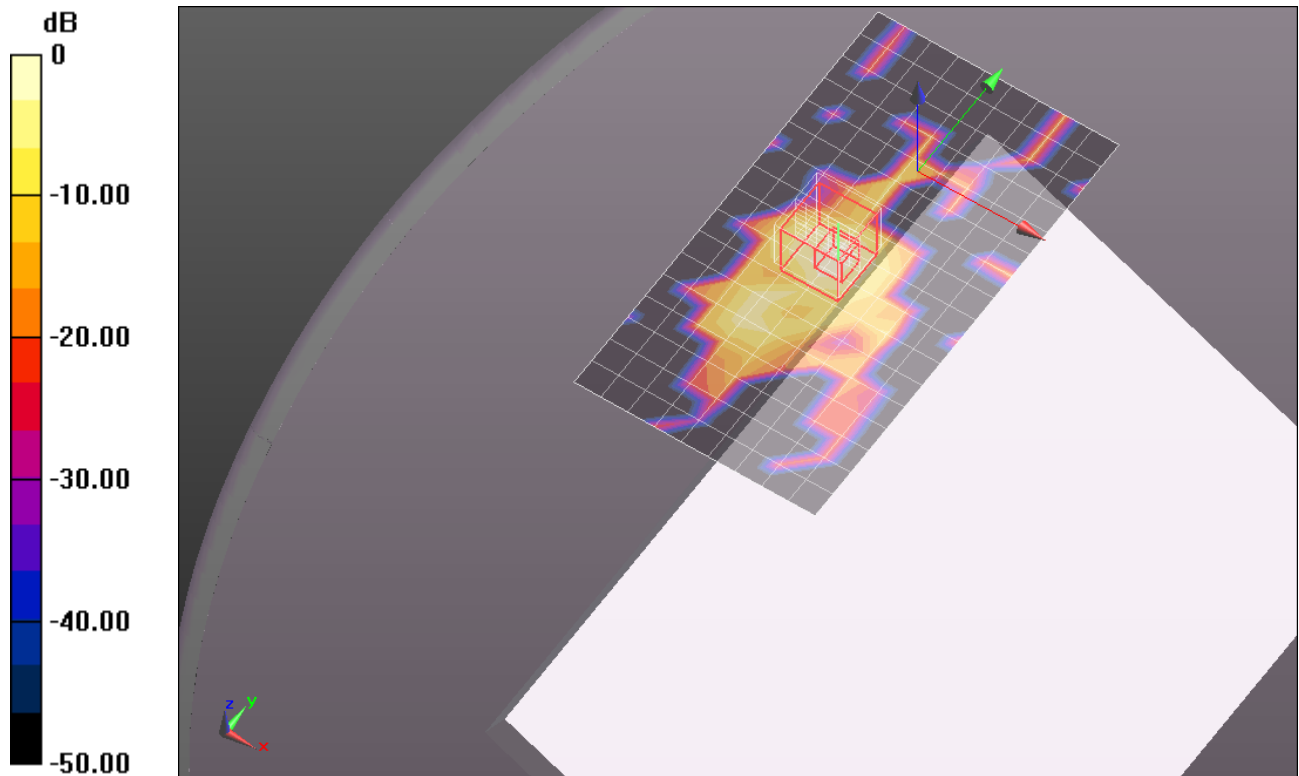

0 dB = 0.220mW/g = -13.15 dB mW/g

WiFi 5.8 GHz band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.116 \text{ mho/m}$; $\epsilon_r = 50.639$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 157/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.257 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.971 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.5420

SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

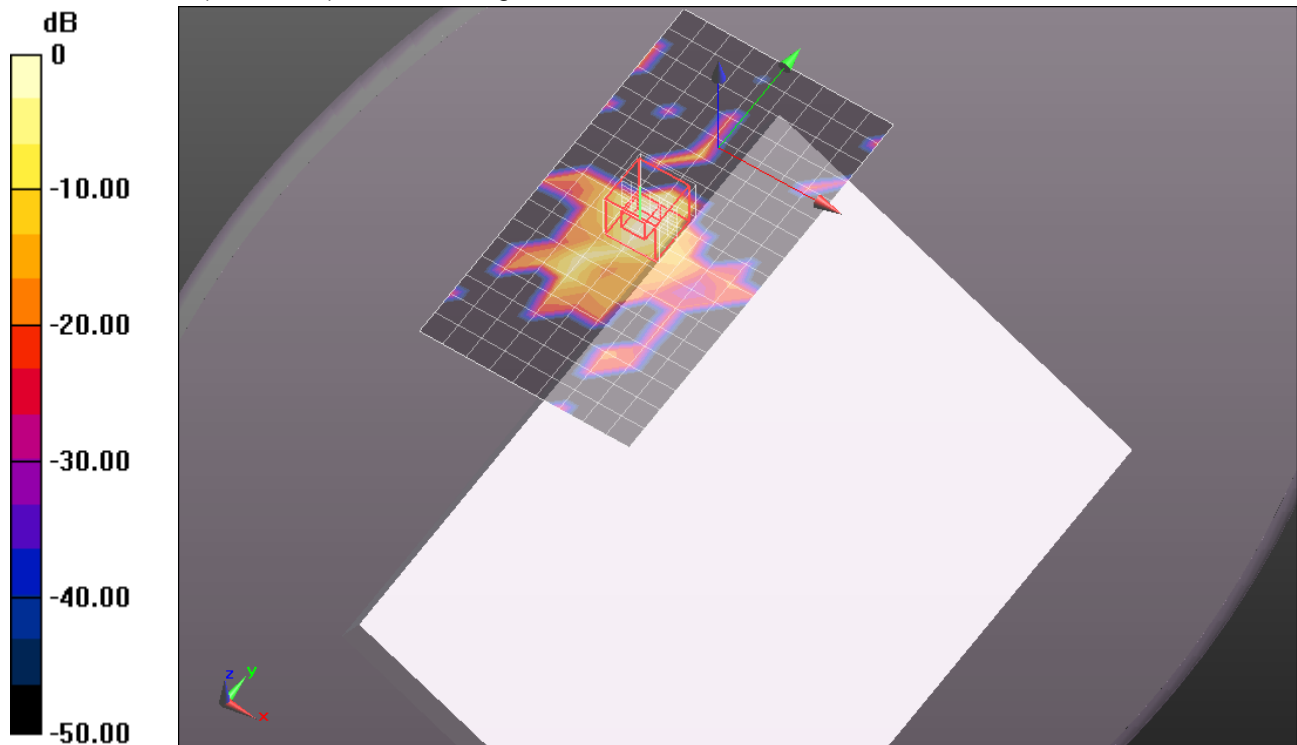

0 dB = 0.300mW/g = -10.46 dB mW/g

WiFi 5.8 GHz band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5825$ MHz; $\sigma = 6.187$ mho/m; $\epsilon_r = 50.563$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 165/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.268 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 165/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.948 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.5080

SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

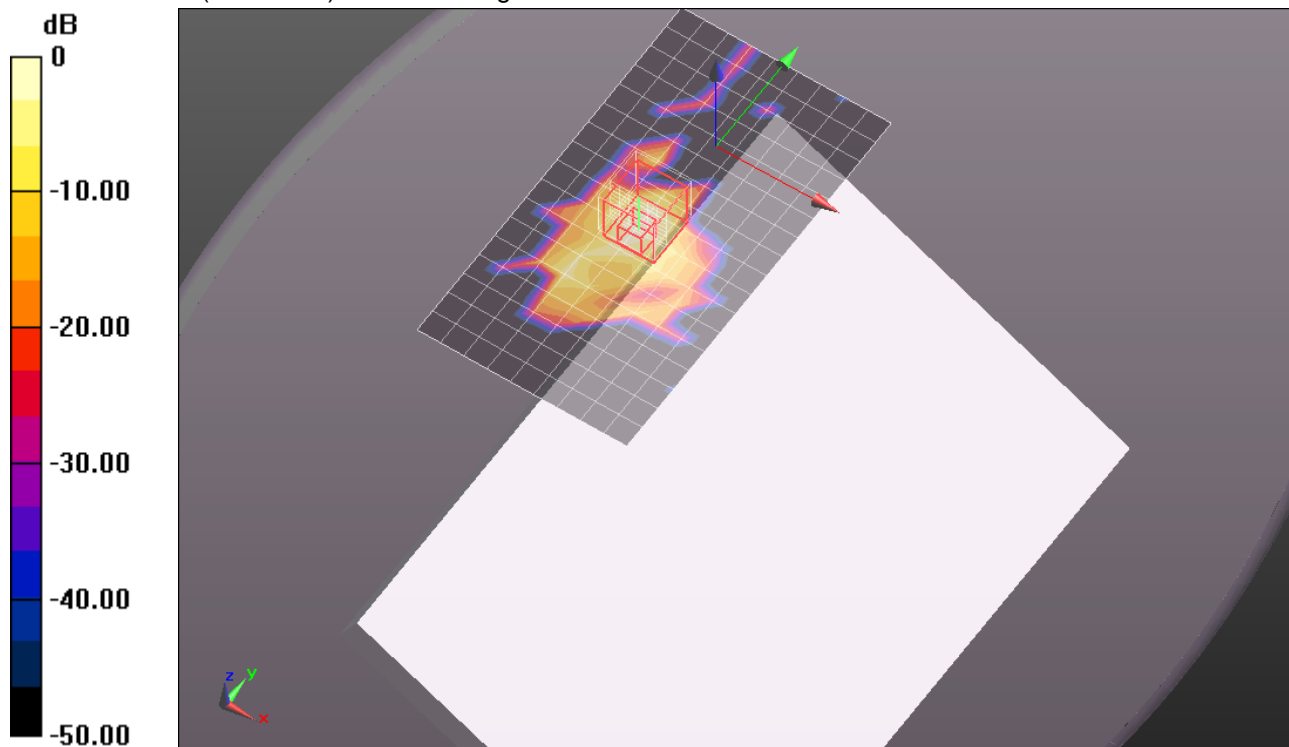

0 dB = 0.270mW/g = -11.37 dB mW/g

WiFi 5.8 GHz band


Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6 \text{ mho/m}$; $\epsilon_r = 50.95$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 149/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 1.108 mW/g

Edge 3/Ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 14.869 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 3.1560
SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.123 mW/g
 Maximum value of SAR (measured) = 1.100 mW/g

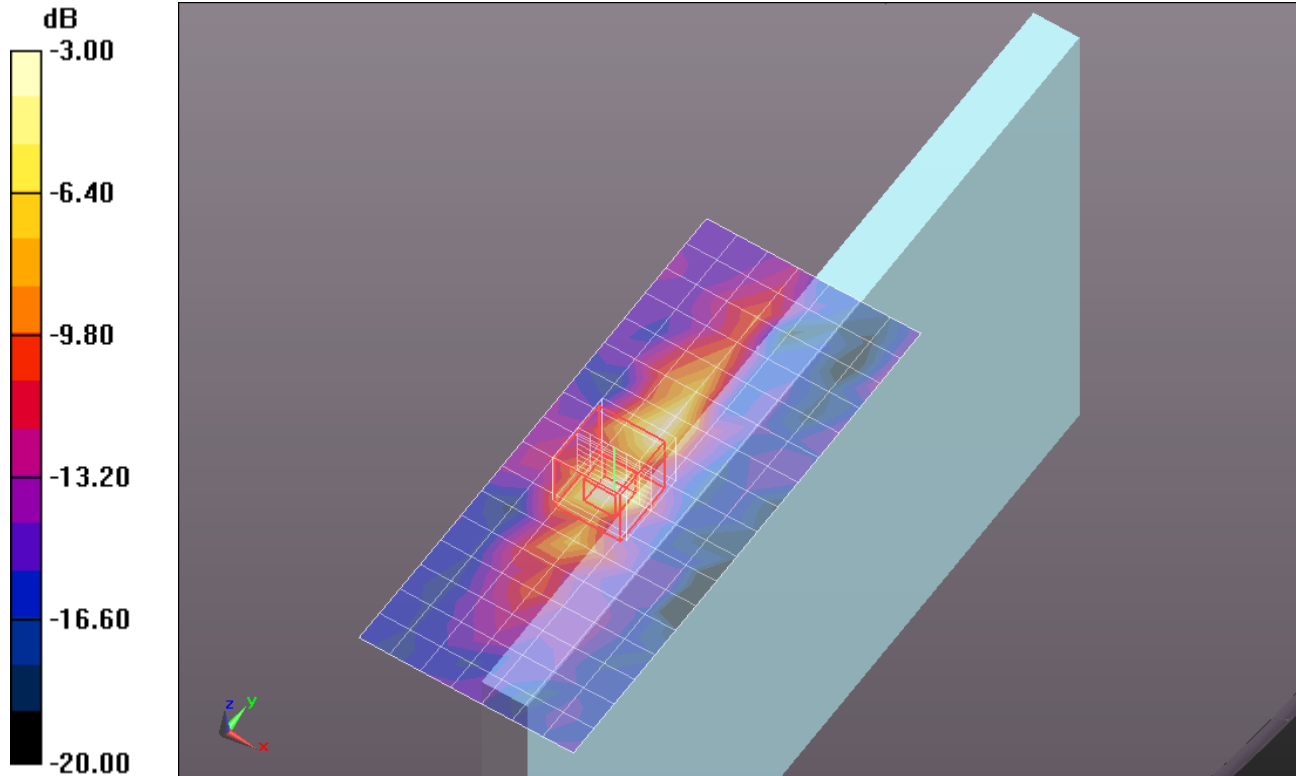


0 dB = 1.100mW/g = 0.83 dB mW/g

WiFi 5.8 GHz band

Frequency: 5745 MHz; Duty Cycle: 1:1

Edge 3/Ch 149/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.095 mW/g

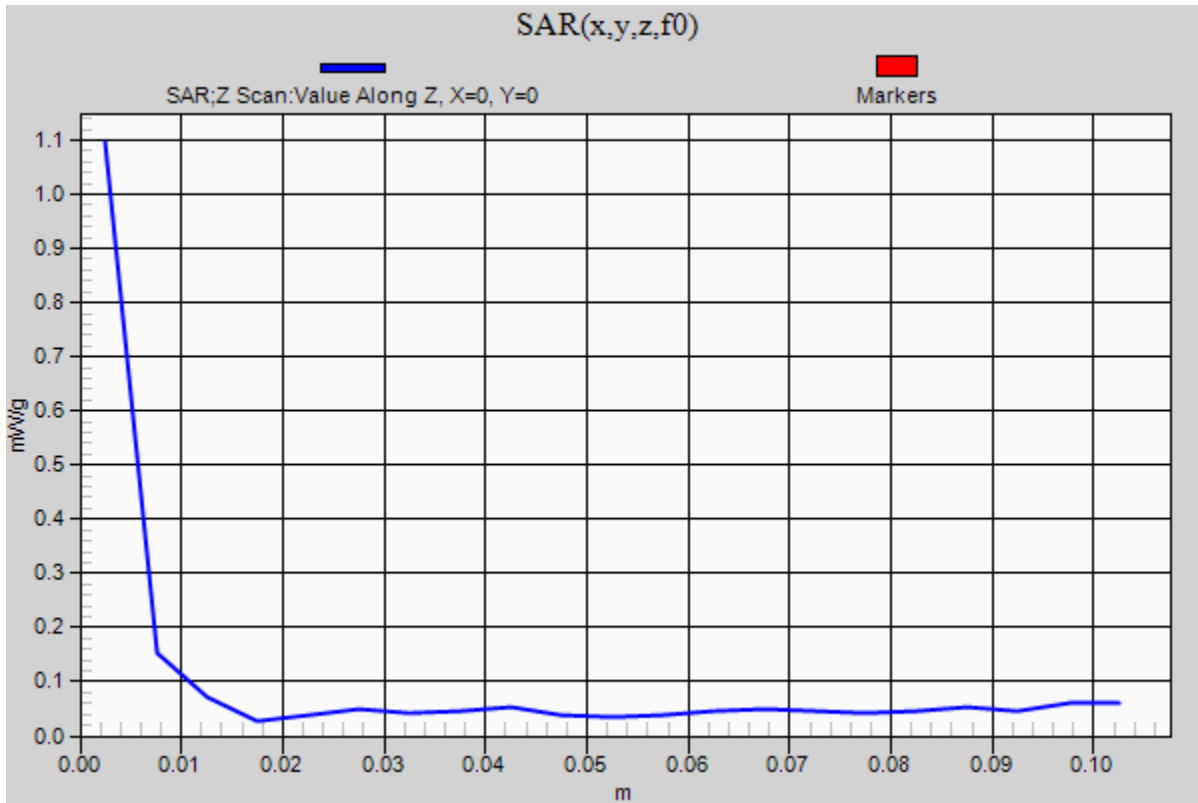

WiFi 5.8 GHz band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.028$ mho/m; $\epsilon_r = 50.774$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 157/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.930 mW/g


Edge 3/Ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 13.583 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.1420

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.934 mW/g

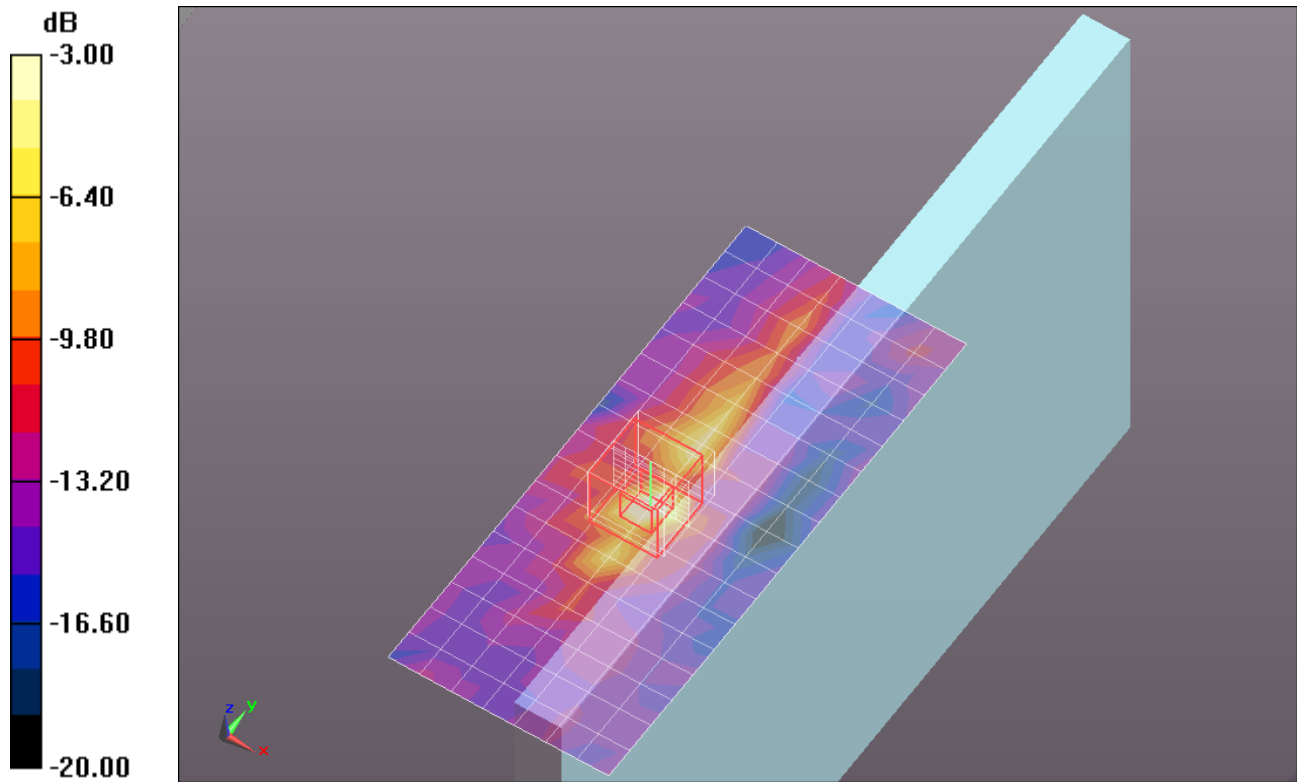

0 dB = 0.930mW/g = -0.63 dB mW/g

WiFi 5.8 GHz band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.173 \text{ mho/m}$; $\epsilon_r = 50.611$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 165/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.796 mW/g


Edge 3/Ch 165/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.544 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.1180

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.863 mW/g

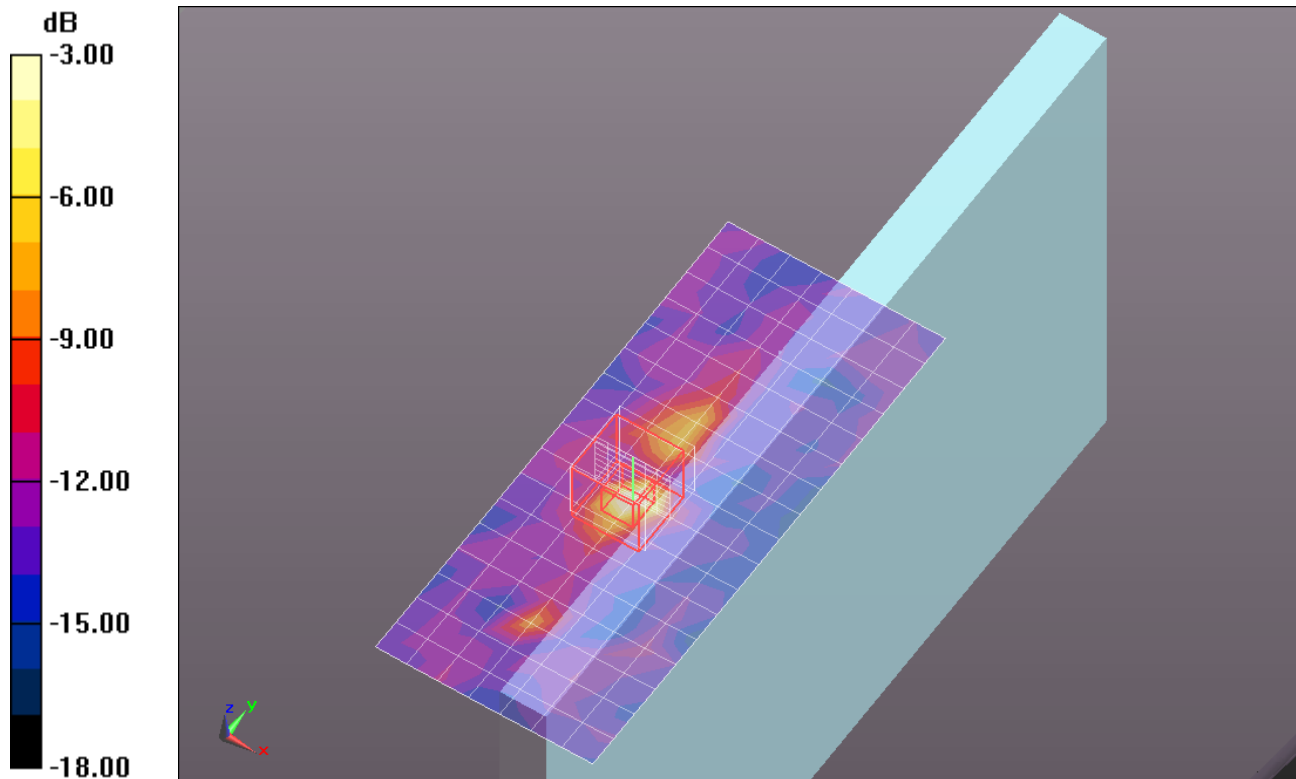

0 dB = 0.860mW/g = -1.31 dB mW/g