



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Broadcom Corporation
Applicant Address	190 Mathilda Place, Sunnyvale, CA 94086 USA
FCC ID	QDS-BRCM1067
Manufacturer's company	Hon Hai PRECISION IND. CO., LTD.
Manufacturer Address	5F-1, 5 Hsin-An road Hsinchu, Science-Based Industrial Park, Taiwan, R.O.C.

Product Name	802.11 abgn WLAN + Bluetooth Card
Brand Name	Broadcom
Model Name	BCM94330LGA
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jun. 04, 2012
Final Test Date	Jul. 17, 2012
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C** and KDB 558074 – 20120118.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	6
3.9. Test Configurations	7
4. TEST RESULT	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Peak Output Power Measurement	14
4.3. Hopping Channel Separation Measurement	16
4.4. Number of Hopping Frequency Measurement.....	24
4.5. Dwell Time Measurement.....	27
4.6. Radiated Emissions Measurement	40
4.7. Band Edge Emissions Measurement	49
4.8. Antenna Requirements	52
5. LIST OF MEASURING EQUIPMENTS	53
6. TEST LOCATION.....	55
7. TAF CERTIFICATE OF ACCREDITATION	56
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B4
APPENDIX C. CO-LOCATION REPORT.....	C1 ~ C3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR260412AC	Rev. 01	Initial issue of report	Jul. 25, 2012

1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11abgn WLAN + Bluetooth Card
Brand Name : Broadcom
Model Name : BCM94330LGA
Applicant : Broadcom Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 04, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.49 dB
4.2	15.247(b)(1)	Peak Conducted Output Power	Complies	20.50 dB
4.3	-	Average Output Power	-	-
4.4	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.5	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.6	15.247(a)(1)	Dwell Time	Complies	-
4.7	15.247(d)	Radiated Emissions	Complies	4.46 dB
4.8	15.247(d)	Band Edge Emissions	Complies	7.56 dB
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From host system
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -QPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	For Bluetooth 1.0 : 0.88 MHz For Bluetooth 2.1 + EDR : 1.20MHz
Conducted Output Power	For Bluetooth 1.0 : 9.32 dBm For Bluetooth 2.1 + EDR : 9.50 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna


Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
A	WhaYu	-	PIFA Antenna	I-pex	2.4GHz	3
B	WhaYu	-	PIFA Antenna	I-pex	5GHz	4.3

Note: The EUT has two antennas. One for 2.4GHz band use, the other for 5GHz band use.

<2.4GHz WALN function with Bluetooth function:>

For IEEE 802.11b/g/n Mode: (1TX, 1RX)

Only Ant. A can be used as transmitting/receiving antenna.

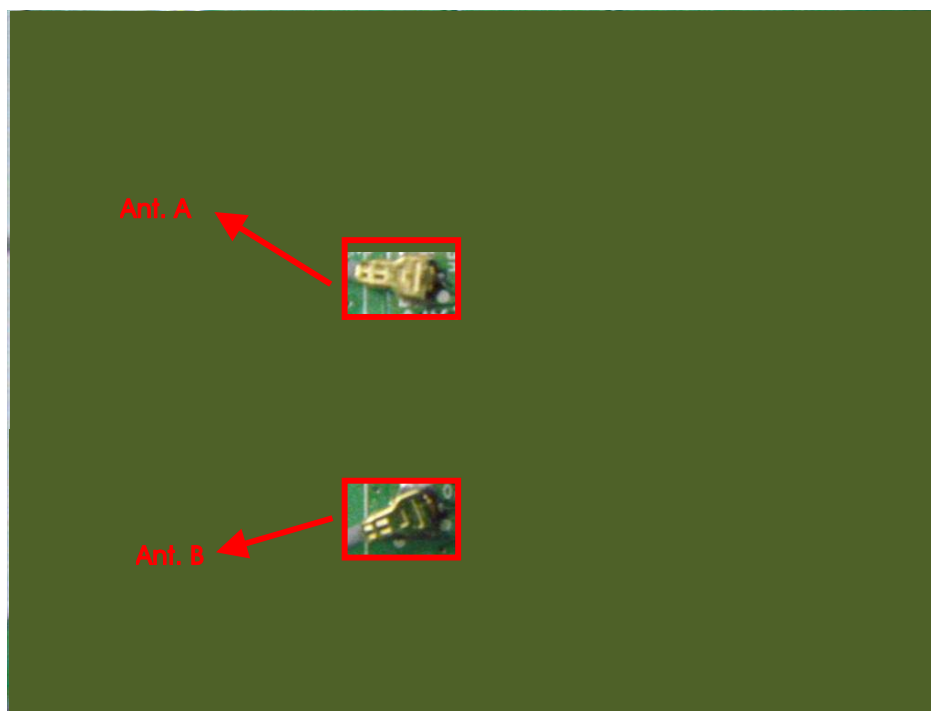

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For Bluetooth 1.0 :

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	1 Mbps	Hopping 0~78	-
Peak Output Power	GFSK	1 Mbps	0/39/78	A
Average Output Power	GFSK	1 Mbps	0/39/78	A
Hopping Channel Separation	GFSK	1 Mbps	0~1/39~40/77~78	A
Number of Hopping Frequency	GFSK	1 Mbps	0~78	A
Dwell Time	DH1/DH3/DH5	1 Mbps	0/39/78	A
Radiated Emissions Below 1GHz	GFSK	1 Mbps	39	A
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	A
Band Edge Emissions	GFSK	1 Mbps	0/78	A

For Bluetooth 2.1 + EDR :

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	3 Mbps	Hopping 0~78	-
Peak Output Power	8DPSK	3 Mbps	0/39/78	A
Average Output Power	8DPSK	3 Mbps	0/39/78	A
Hopping Channel Separation	8DPSK	3 Mbps	0~1/39~40/77~78	A
Number of Hopping Frequency	8DPSK	3 Mbps	0~78	A
Dwell Time	3DH1/3DH3/3DH5	3Mbps	0/39/78	A
Radiated Emissions Below 1GHz	8DPSK	3 Mbps	39	A
Radiated Emissions Above 1GHz	8DPSK	3 Mbps	0/39/78	A
Band Edge Emissions	8DPSK	3 Mbps	0/78	A

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	LATITUDE E6500	PDN:5JNCT A00
Mouse	Logitech M90	M-U0026	DoC
Wireless AP	BELKIN	WG7016G22-LF-AK	DoC
EARPHONES	E-books	E-EPC040	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Bluetooth 1.0 :

Power Parameters of Bluetooth

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	10	10	10

For Bluetooth 2.1 + EDR :

Power Parameters of Bluetooth


Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	10	10	10

During the test, "Bluetest" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

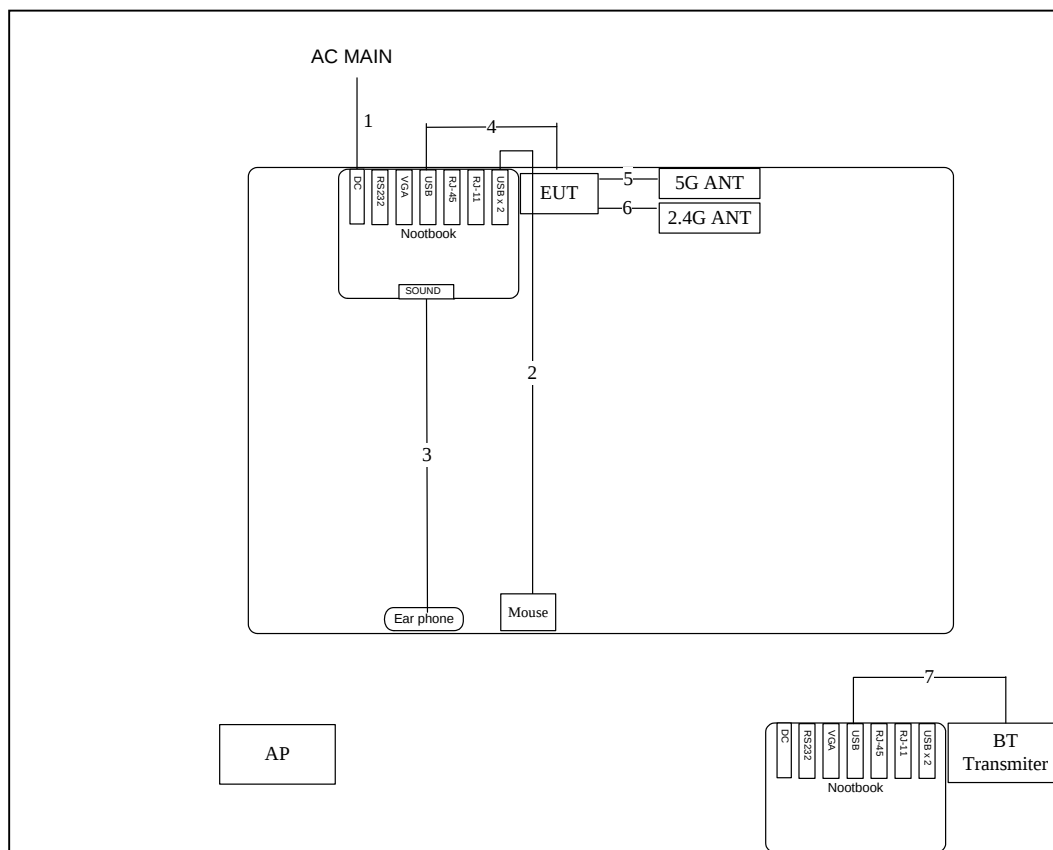


Item	Connection	Shield	Length
1	Power cable	No	2.6M
2	USB cable	No	1.8M
3	Earphone cable	No	1.1M
4	RS-232 cable	Yes	1.95M
5	Antenna cable	Yes	0.11M
6	Antenna cable	Yes	1.8M
7	RS-232 cable	Yes	1.95M

Test Configuration: above 1GHz

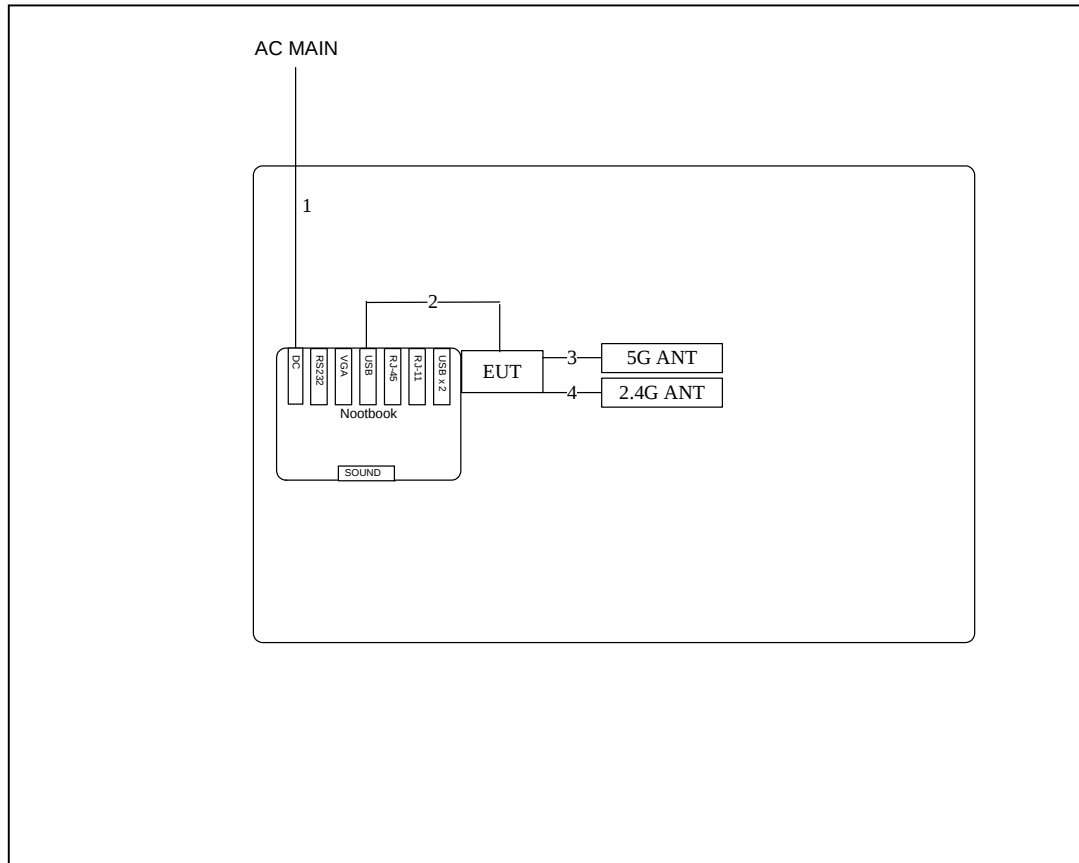

Item	Connection	Shield	Length
1	Power cable	No	2.6M
2	Antenna cable	Yes	0.11M
3	Antenna cable	Yes	1.8M
4	RS-232 cable	Yes	1.95M

3.9.2. AC Power Line Conduction Emissions Test Configuration

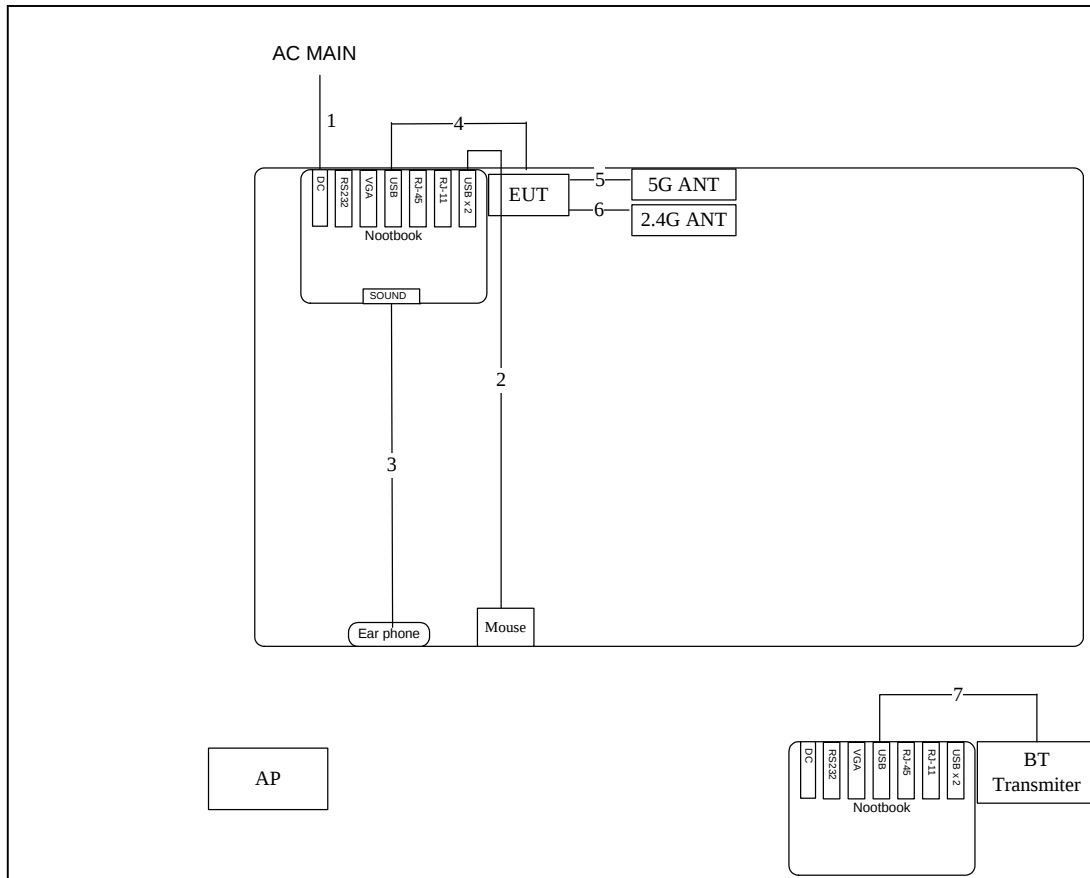

Item	Connection	Shield	Length
1	Power cable	No	2.6M
2	USB cable	No	1.8M
3	Earphone cable	No	1.1M
4	RS-232 cable	Yes	1.95M
5	Antenna cable	Yes	0.11M
6	Antenna cable	Yes	1.8M
7	RS-232 cable	Yes	1.95M

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

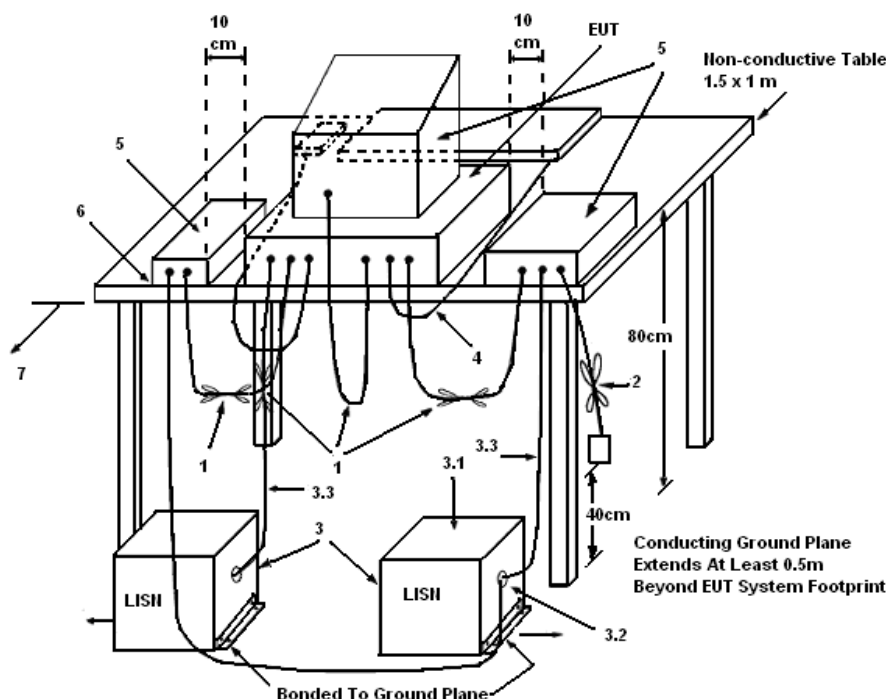

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	57%
Test Engineer	Kane Liu	Phase	Line
Configuration	Normal Link		

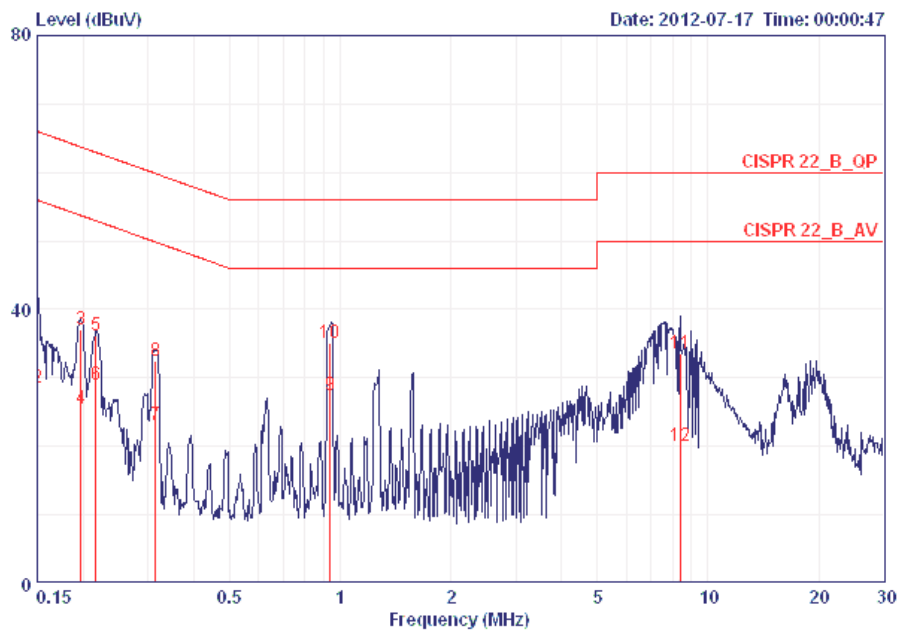

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	39.38	-26.62	66.00	39.02	0.16	0.20	LINE	QP
2	0.15000	28.47	-27.53	56.00	28.11	0.16	0.20	LINE	AVERAGE
3	0.19758	36.95	-26.76	63.71	36.60	0.15	0.20	LINE	QP
4	0.19758	25.45	-28.26	53.71	25.10	0.15	0.20	LINE	AVERAGE
5	0.21620	36.23	-26.73	62.96	35.88	0.15	0.20	LINE	QP
6	0.21620	28.93	-24.03	52.96	28.58	0.15	0.20	LINE	AVERAGE
7	0.31495	23.15	-26.69	49.84	22.80	0.15	0.20	LINE	AVERAGE
8	0.31495	32.58	-27.26	59.84	32.23	0.15	0.20	LINE	QP
9	0.94009	27.51	-18.49	46.00	27.14	0.17	0.20	LINE	AVERAGE
10	0.94009	35.20	-20.80	56.00	34.83	0.17	0.20	LINE	QP
11	8.412	33.56	-26.44	60.00	32.93	0.31	0.32	LINE	QP
12	8.412	20.08	-29.92	50.00	19.45	0.31	0.32	LINE	AVERAGE

Temperature	22°C	Humidity	57%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	Normal Link		

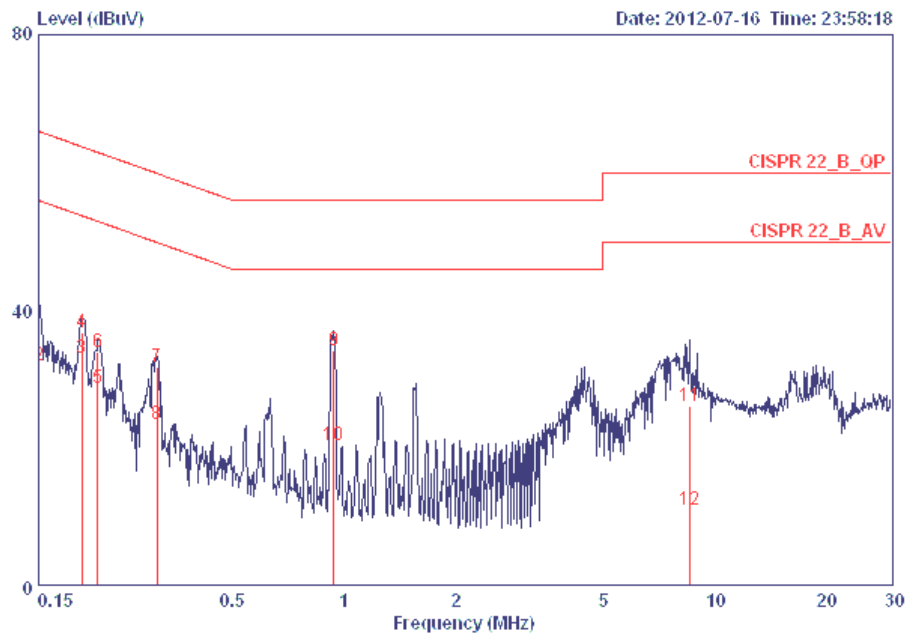

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	38.47	-27.53	66.00	38.19	0.08	0.20	NEUTRAL	QP
2	0.15000	32.00	-24.00	56.00	31.72	0.08	0.20	NEUTRAL	AVERAGE
3	0.19654	33.16	-20.60	53.76	32.88	0.08	0.20	NEUTRAL	AVERAGE
4	0.19654	36.82	-26.94	63.76	36.54	0.08	0.20	NEUTRAL	QP
5	0.21620	28.77	-24.19	52.96	28.49	0.08	0.20	NEUTRAL	AVERAGE
6	0.21620	33.94	-29.02	62.96	33.66	0.08	0.20	NEUTRAL	QP
7	0.31328	31.88	-28.00	59.88	31.60	0.08	0.20	NEUTRAL	QP
8	0.31328	23.63	-26.25	49.88	23.35	0.08	0.20	NEUTRAL	AVERAGE
9	0.93810	34.19	-21.81	56.00	33.90	0.09	0.20	NEUTRAL	QP
10	0.93810	20.51	-25.49	46.00	20.22	0.09	0.20	NEUTRAL	AVERAGE
11	8.546	26.19	-33.81	60.00	25.68	0.21	0.30	NEUTRAL	QP
12	8.546	11.19	-38.81	50.00	10.68	0.21	0.30	NEUTRAL	AVERAGE

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

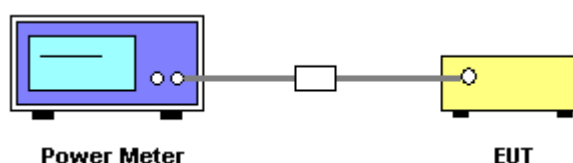

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	24°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	GFSK / 8DPSK
Test Date	Jun. 30, 2012		

For Bluetooth 1.0 :

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	8.56	30.00	Complies
39	2441 MHz	9.17	30.00	Complies
78	2480 MHz	9.32	30.00	Complies

For Bluetooth 2.1 + EDR :

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	8.78	30.00	Complies
39	2441 MHz	9.34	30.00	Complies
78	2480 MHz	9.50	30.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

4.3.4. Test Setup Layout

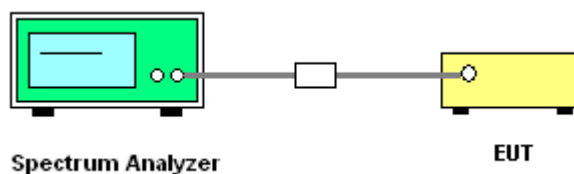

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation

Temperature	24°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	GFSK / 8DPSK

For Bluetooth 1.0 :

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.01	0.67	0.88	Complies
2441 MHz	1.00	0.92	0.61	0.85	Complies
2480 MHz	1.00	0.92	0.62	0.84	Complies


For Bluetooth 2.1 + EDR :

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	2/3 of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.31	0.87	1.20	Complies
2441 MHz	1.00	1.31	0.87	1.20	Complies
2480 MHz	1.00	1.32	0.88	1.20	Complies


Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

For Bluetooth 1.0 :


20 dB Bandwidth Plot on Channel 0 / 2402 MHz

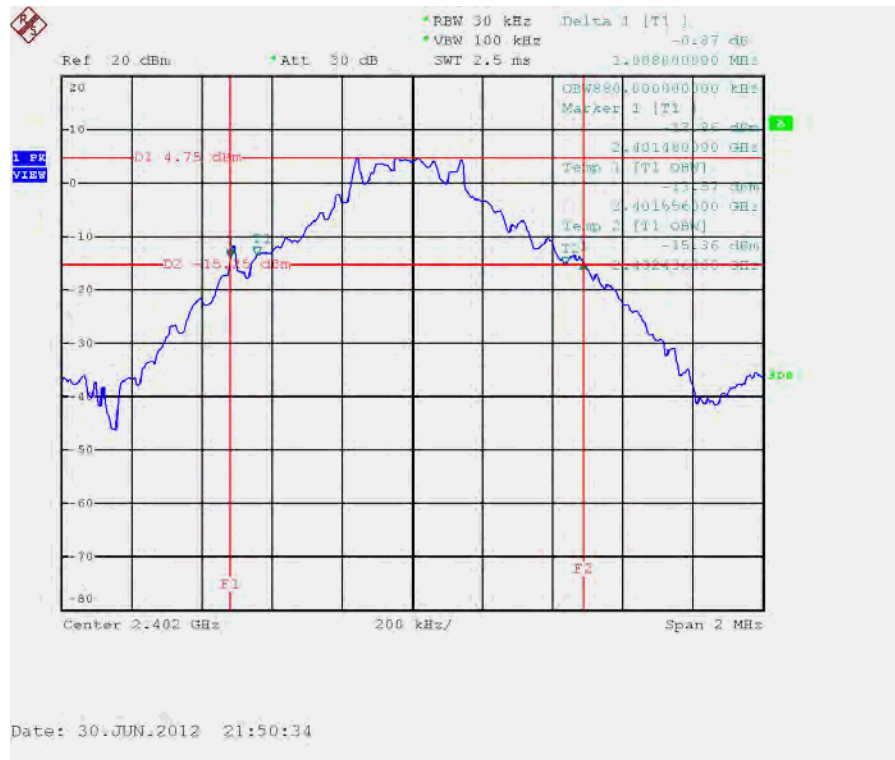


20 dB Bandwidth Plot on Channel 39 / 2441 MHz

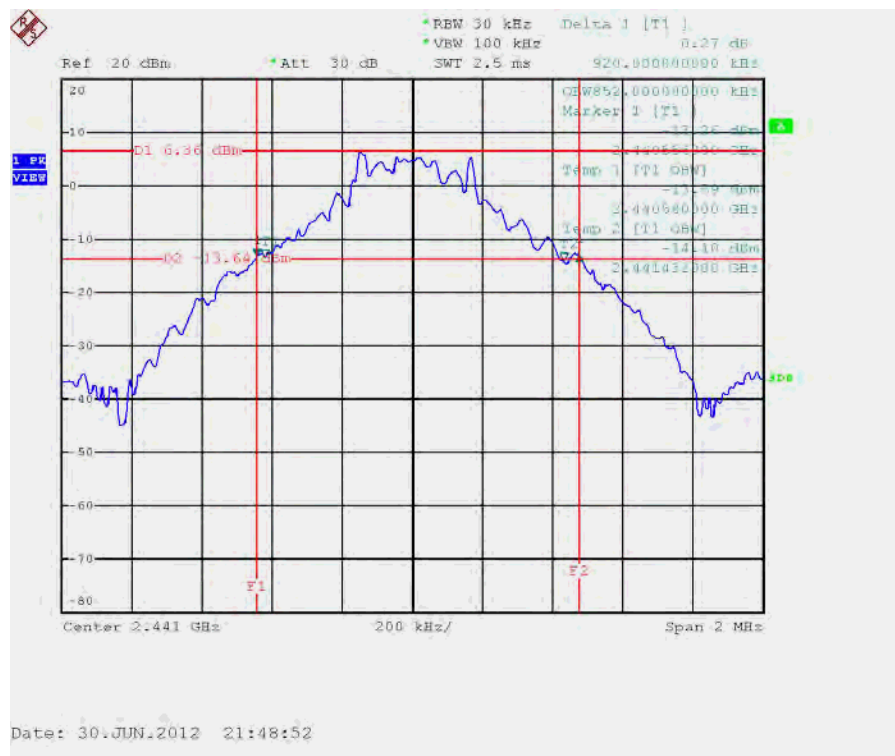


20 dB Bandwidth Plot on Channel 78 / 2480 MHz

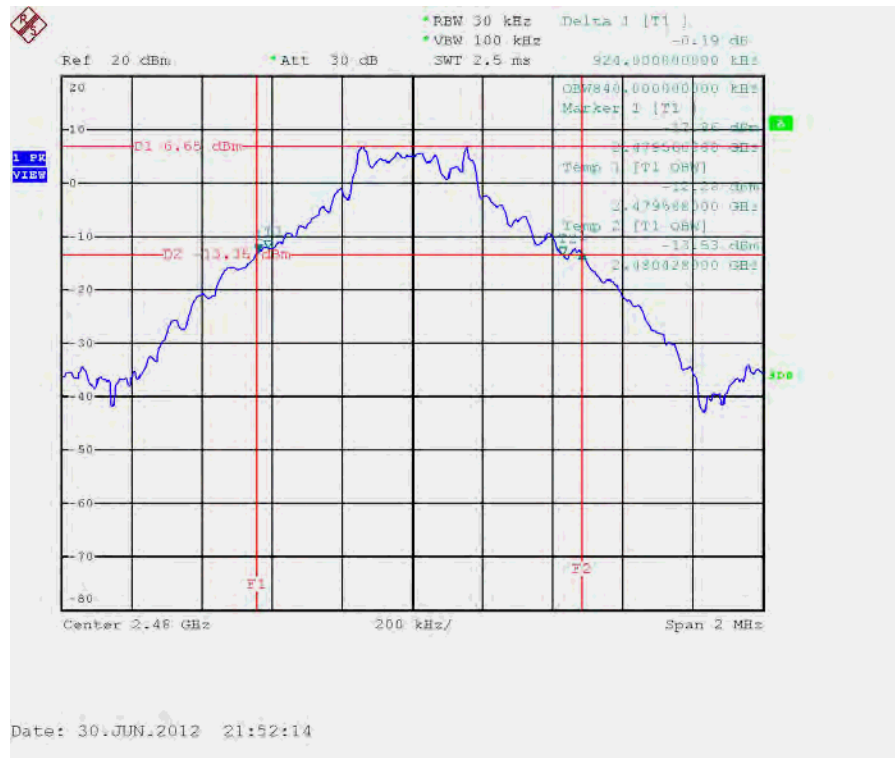

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

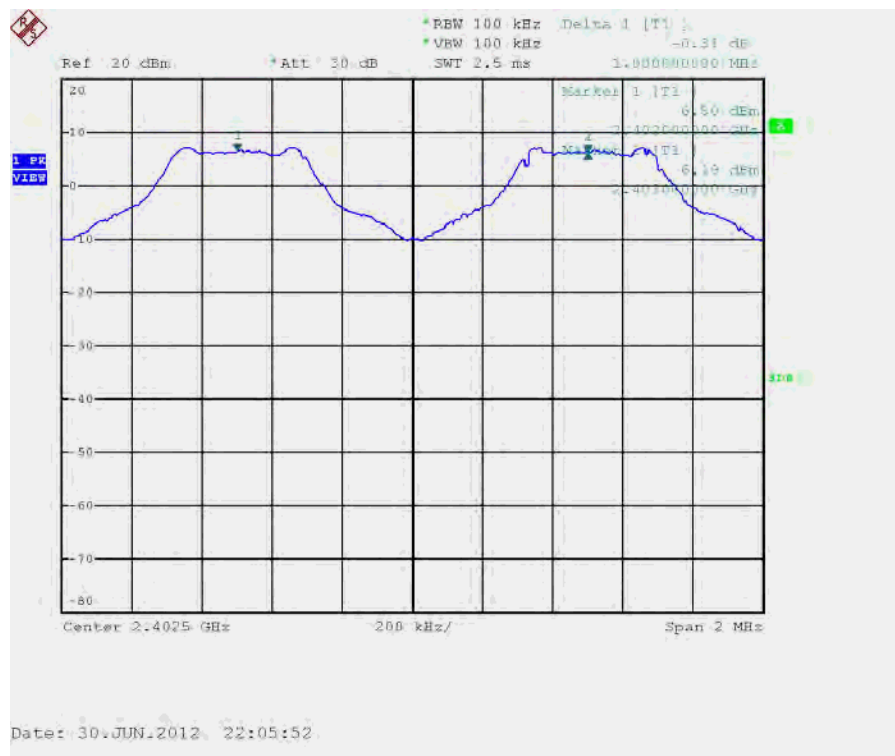


Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

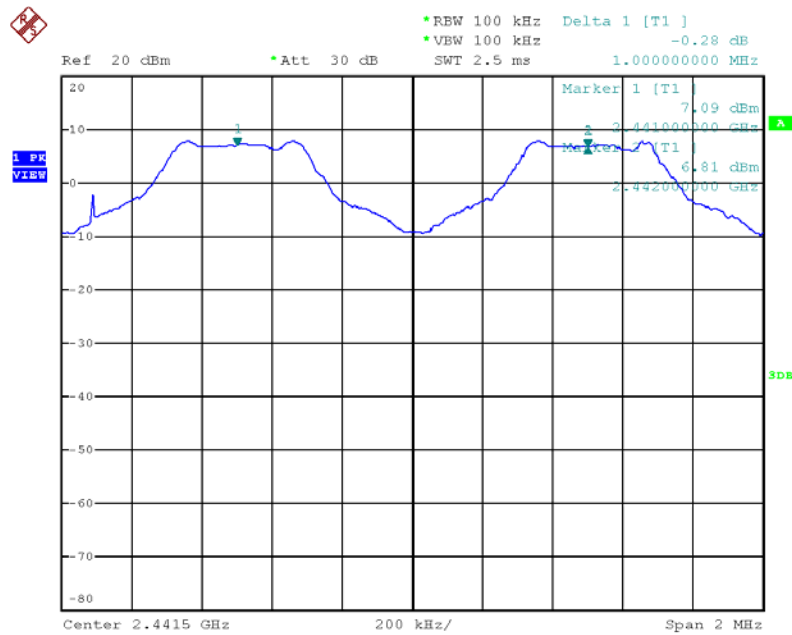

Date: 30.JUN.2012 22:07:47

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

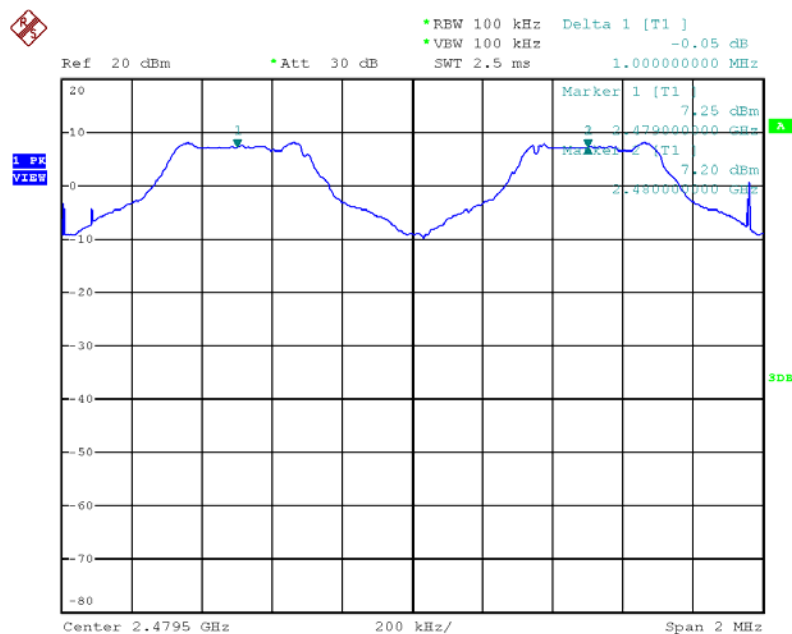


Date: 30.JUN.2012 22:09:00

For Bluetooth 2.1 + EDR :

20 dB Bandwidth Plot on Channel 0 / 2402 MHz



20 dB Bandwidth Plot on Channel 39 / 2441 MHz

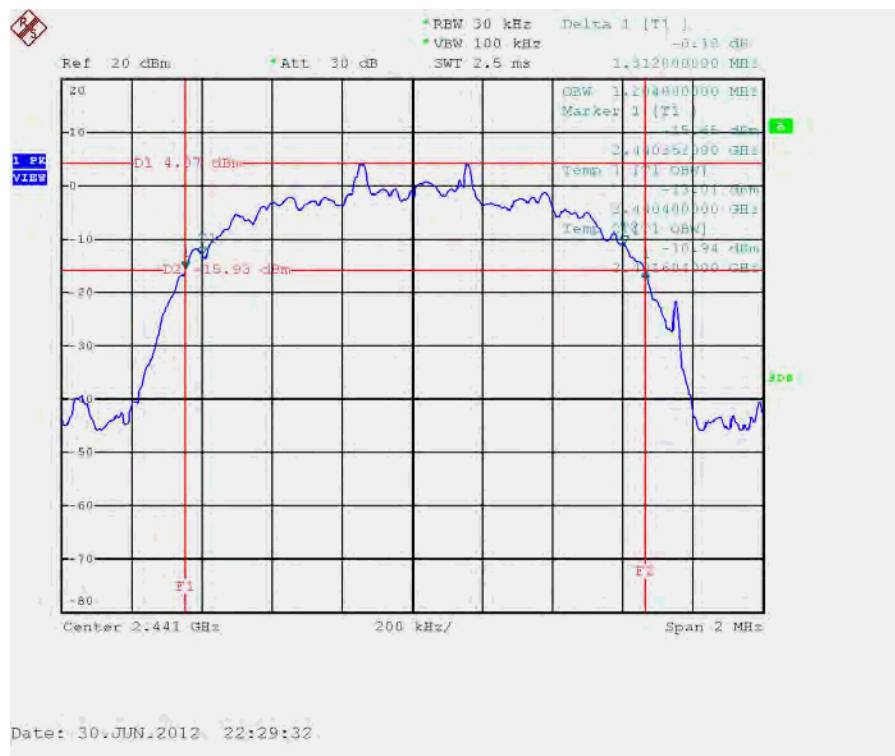



Ref: 20 dBm Att: 30 dB BW: 30 kHz Delta: 1 [T1] 0.97 dB
 VBW: 100 kHz SWT: 2.5 ms 1.324800000 MHz


Marker 1 [F1] 2.47244000 GHz -15.74 dBm
 Temp 1 [T1: BW] 2.473404000 GHz -10.97 dBm
 Marker 2 [F2] 2.47653000 GHz -10.97 dBm

Center 2.48 GHz 200 kHz/ Span 2 MHz

Date: 30 JUN 2012 22:27:54


[illegible]

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

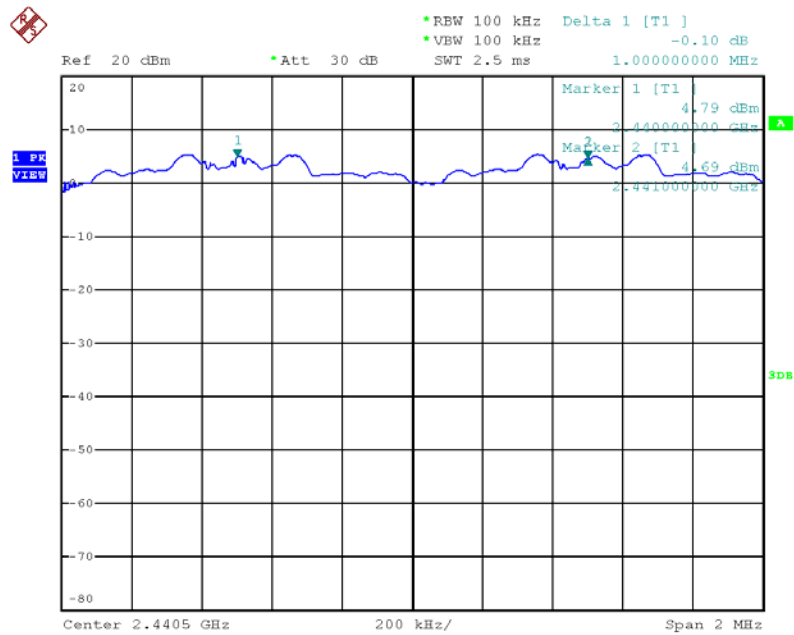

Date: 30.JUN.2012 22:13:57

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

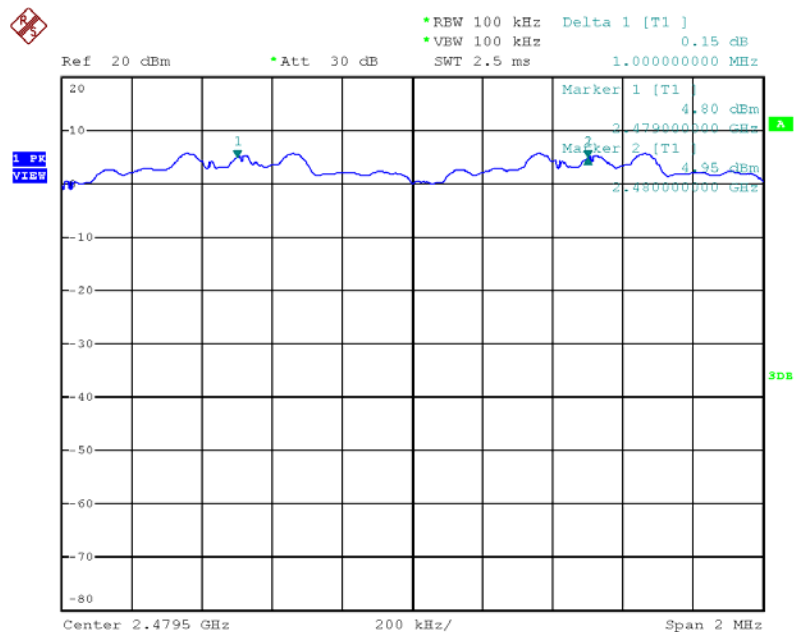

Date: 30.JUN.2012 22:12:16

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1MHz
VB	1MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1MHz and the video bandwidth of 1MHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

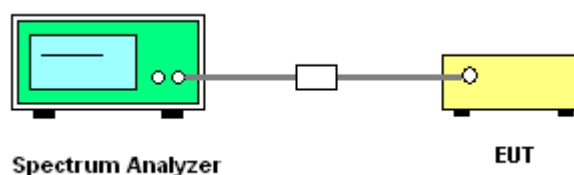

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	24°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	GFSK / 8DPSK

For Bluetooth 1.0 :


Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	75	Complies

For Bluetooth 2.1 + EDR :

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies

For Bluetooth 1.0 :


Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

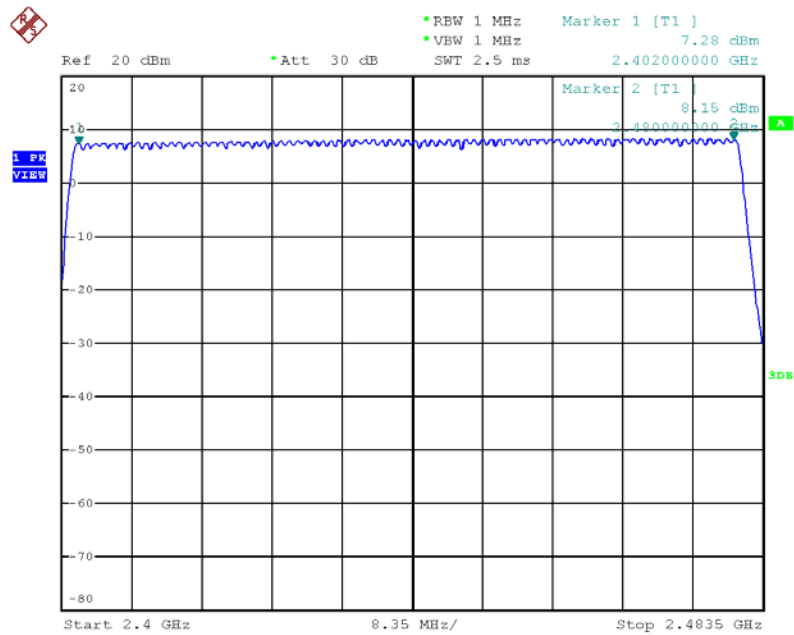

Date: 30.JUN.2012 22:03:44

For Bluetooth 2.1 + EDR :

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

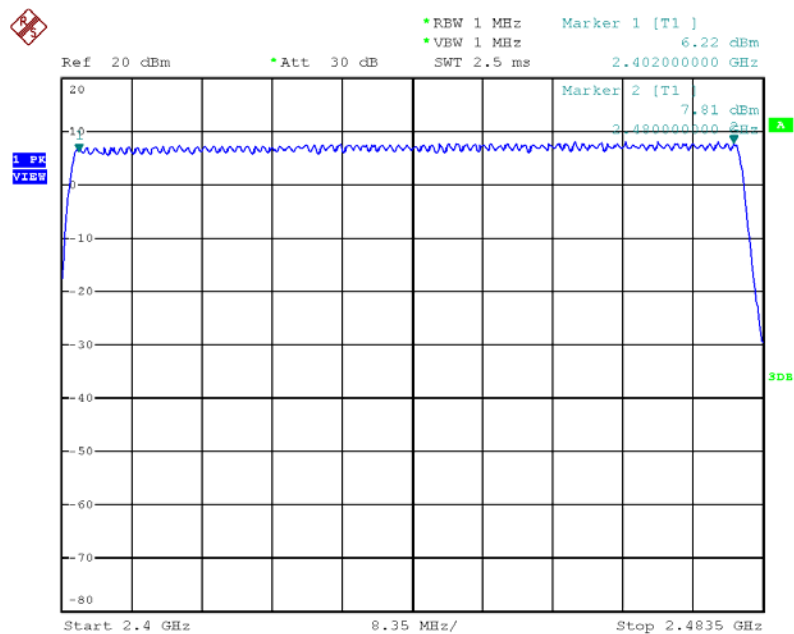

Date: 30.JUN.2012 22:25:18

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for 3DH5, 3DH3 and 3DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.

4.5.4. Test Setup Layout

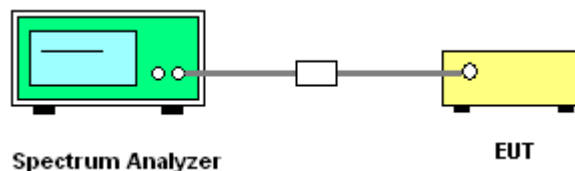

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

For Bluetooth 1.0 :

Temperature	24°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	Bluetooth / DH1, DH3, DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.9000	0.3093	0.4000	Complies
DH3	2402 MHz	1.6500	0.2640	0.4000	Complies
DH1	2402 MHz	0.3900	0.1248	0.4000	Complies
DH5	2441 MHz	2.9000	0.3093	0.4000	Complies
DH3	2441 MHz	1.6500	0.2640	0.4000	Complies
DH1	2441 MHz	0.3900	0.1248	0.4000	Complies
DH5	2480 MHz	2.9000	0.3093	0.4000	Complies
DH3	2480 MHz	1.6500	0.2640	0.4000	Complies
DH1	2480 MHz	0.3900	0.1248	0.4000	Complies

Note: Pulse Duration * Number of Pulses*(Dwell time / measure time)

Remark:

Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.

Average Hopping Channel = hops / sweep time

For Bluetooth 2.1 + EDR :

Temperature	24°C	Humidity	63%
Test Engineer	Satoshi Yang	Configurations	Bluetooth / 3DH1, 3DH3, 3DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9000	0.3093	0.4000	Complies
3DH3	2402 MHz	1.6500	0.2640	0.4000	Complies
3DH1	2402 MHz	0.3900	0.1248	0.4000	Complies
3DH5	2441 MHz	2.9000	0.3093	0.4000	Complies
3DH3	2441 MHz	1.6500	0.2640	0.4000	Complies
3DH1	2441 MHz	0.3900	0.1248	0.4000	Complies
3DH5	2480 MHz	2.9000	0.3093	0.4000	Complies
3DH3	2480 MHz	1.6500	0.2640	0.4000	Complies
3DH1	2480 MHz	0.3900	0.1248	0.4000	Complies

Note: Pulse Duration * Number of Pulses*(Dwell time / measure time)

Remark:


Dwell Time= 79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.

Average Hopping Channel = hops / sweep time


For Bluetooth 1.0 :

Dwell Time Plot on Channel 0 / DH1 / 2402 MHz

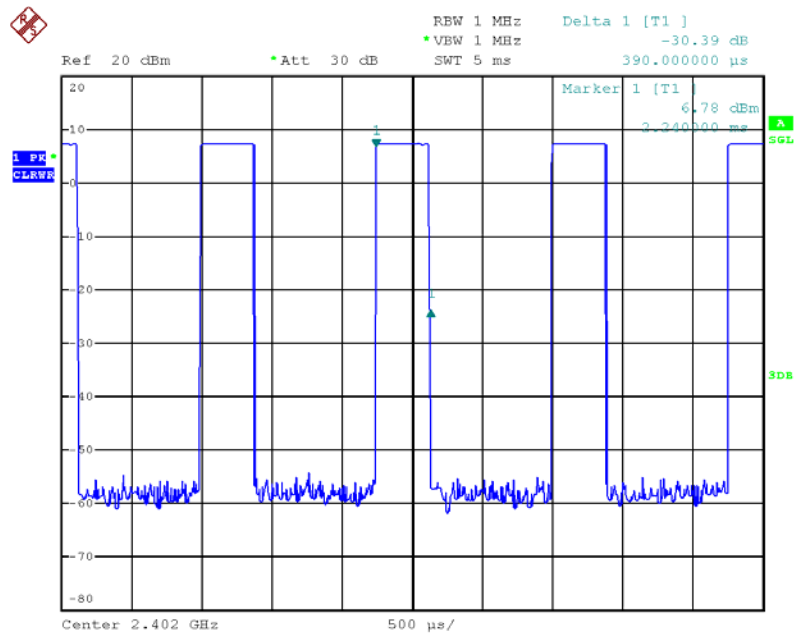


Date: 30.JUN.2012 22:01:43

Dwell Time Plot on Channel 39 / DH1 / 2441 MHz

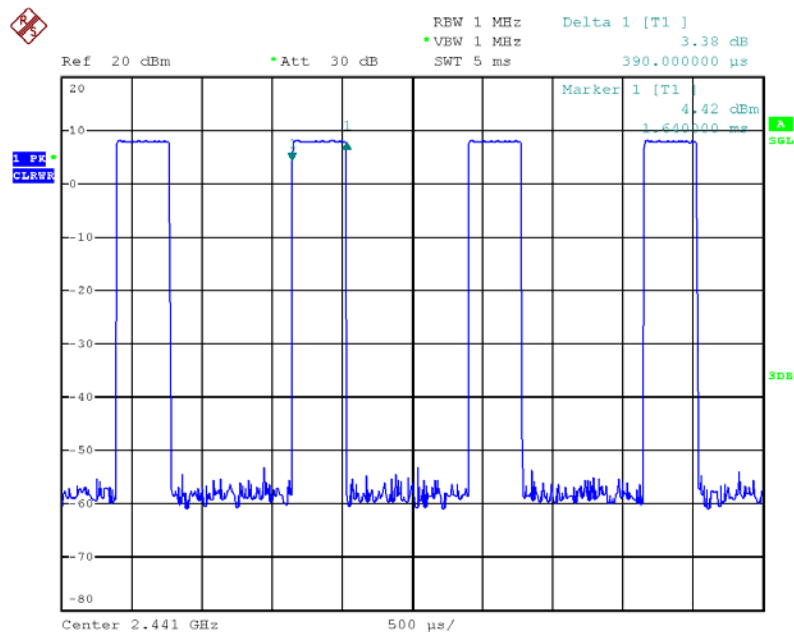


Date: 30.JUN.2012 22:00:54

Dwell Time Plot on Channel 78 / DH1 / 2480 MHz

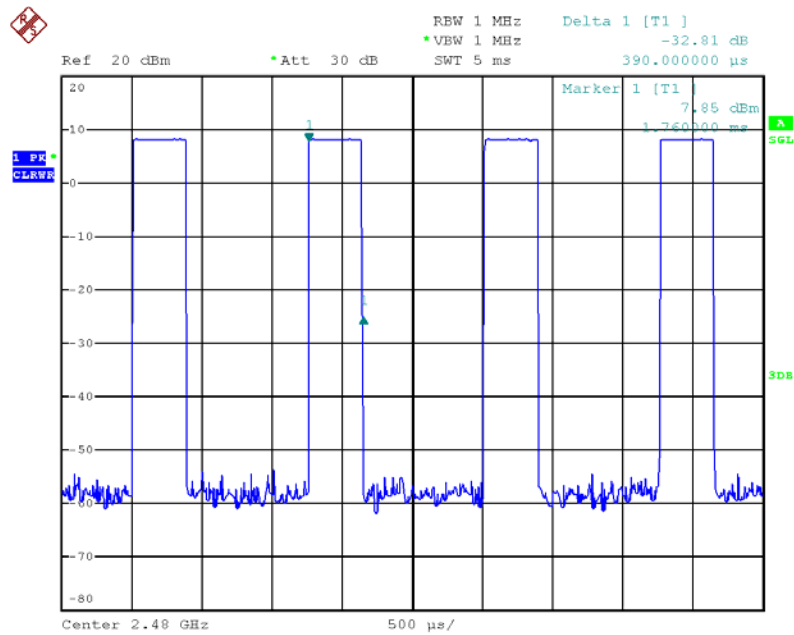


Date: 30.JUN.2012 22:00:15

Dwell Time Plot on Channel 0 / DH3 / 2402 MHz

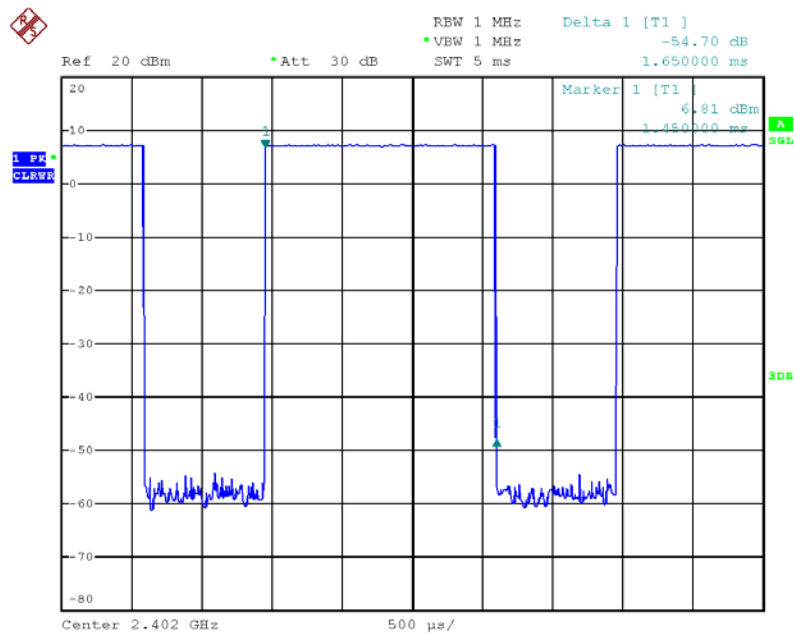


Date: 30.JUN.2012 21:56:32

Dwell Time Plot on Channel 39 / DH3 / 2441 MHz

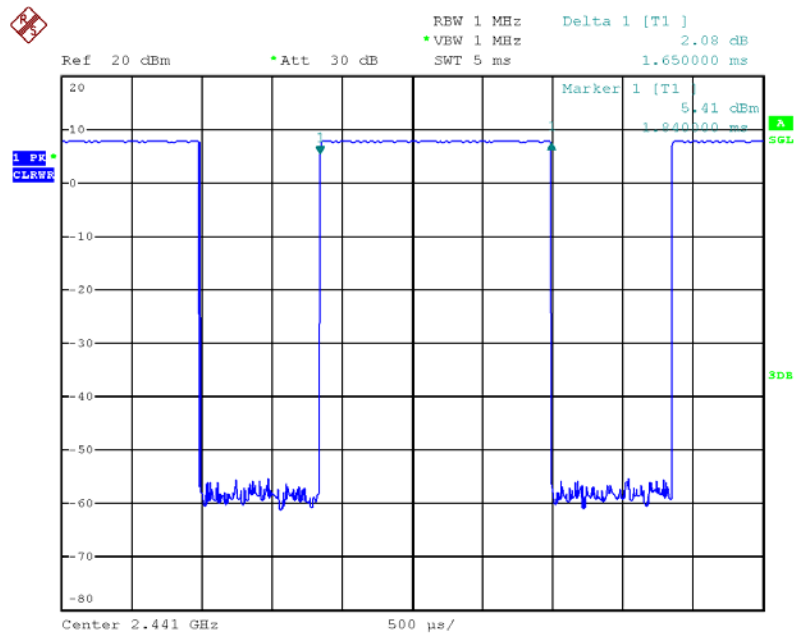


Date: 30.JUN.2012 21:57:24

Dwell Time Plot on Channel 78 / DH3 / 2480 MHz

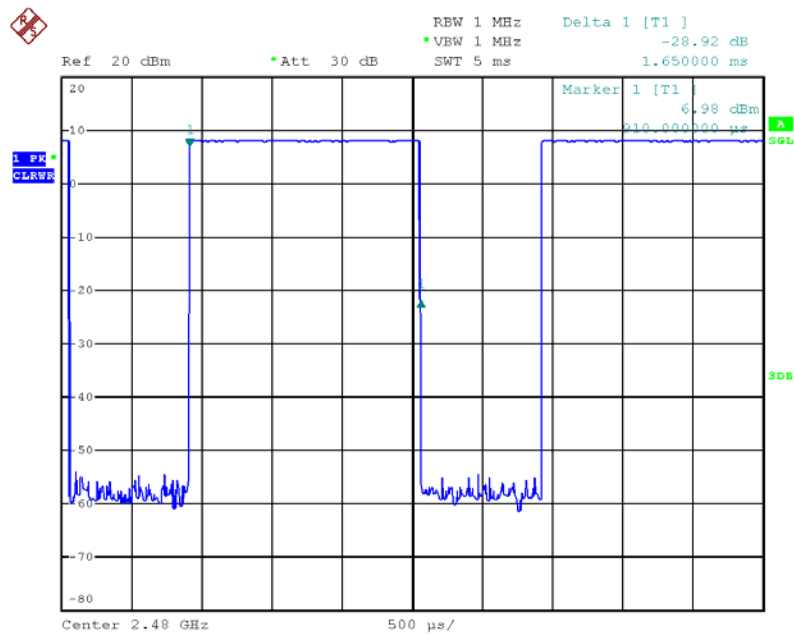


Date: 30.JUN.2012 21:58:21

Dwell Time Plot on Channel 0 / DH5 / 2402 MHz

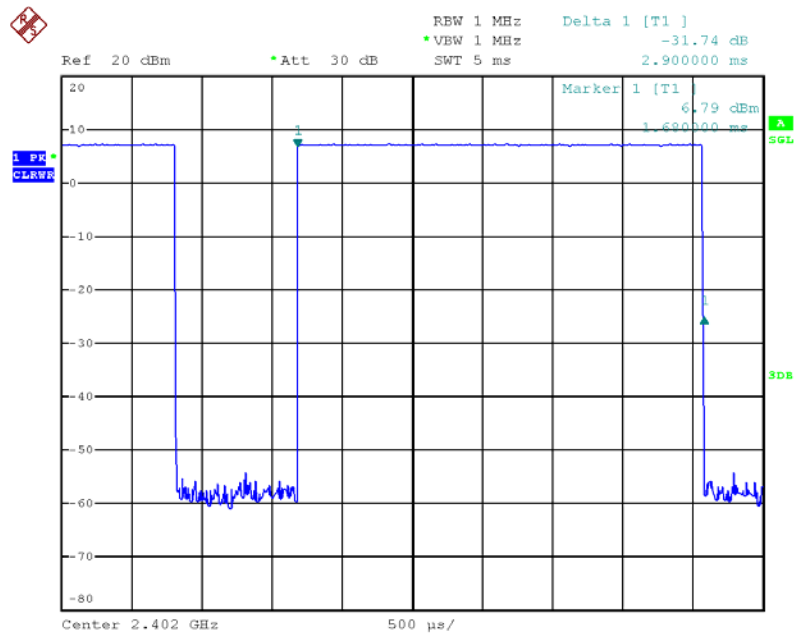


Date: 30.JUN.2012 21:55:39

Dwell Time Plot on Channel 39 / DH5 / 2441 MHz

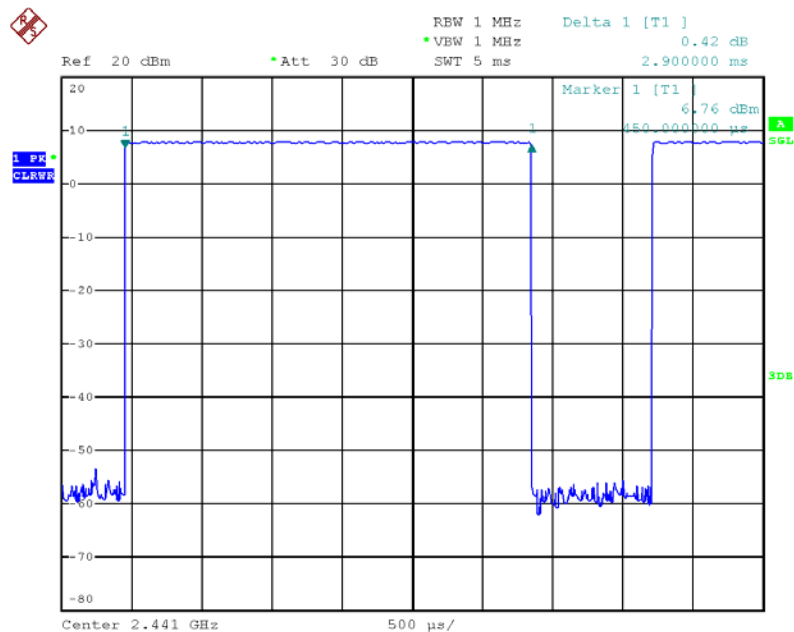

Date: 30.JUN.2012 21:54:51


Dwell Time Plot on Channel 78 / DH5 / 2480 MHz

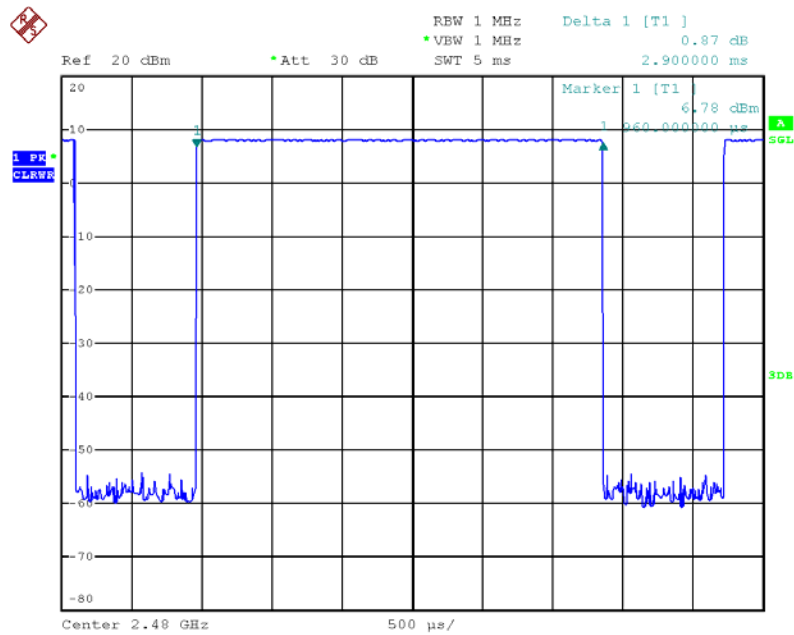

Date: 30.JUN.2012 21:53:50


For Bluetooth 2.1 + EDR :

Dwell Time Plot on Channel 0 / 3DH1 / 2402 MHz

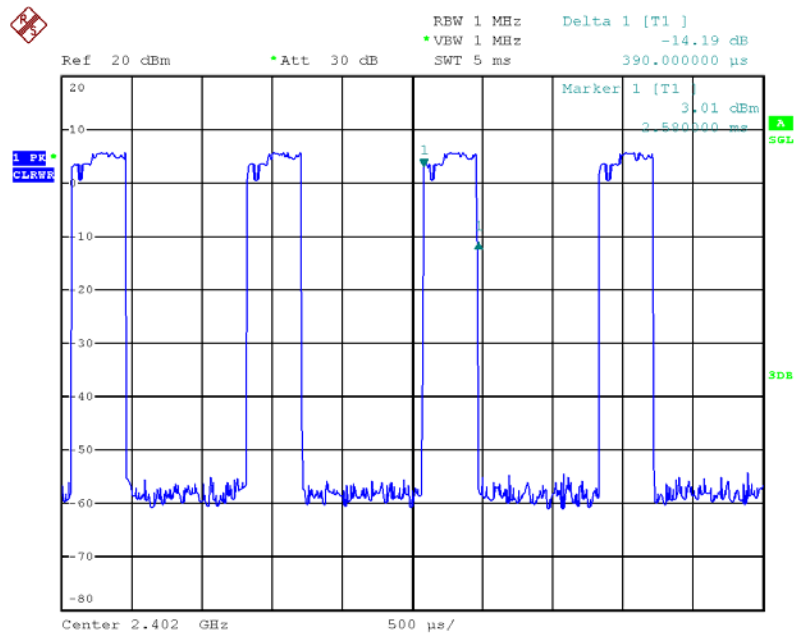


Date: 30.JUN.2012 22:18:21

Dwell Time Plot on Channel 39 / 3DH1 / 2441 MHz

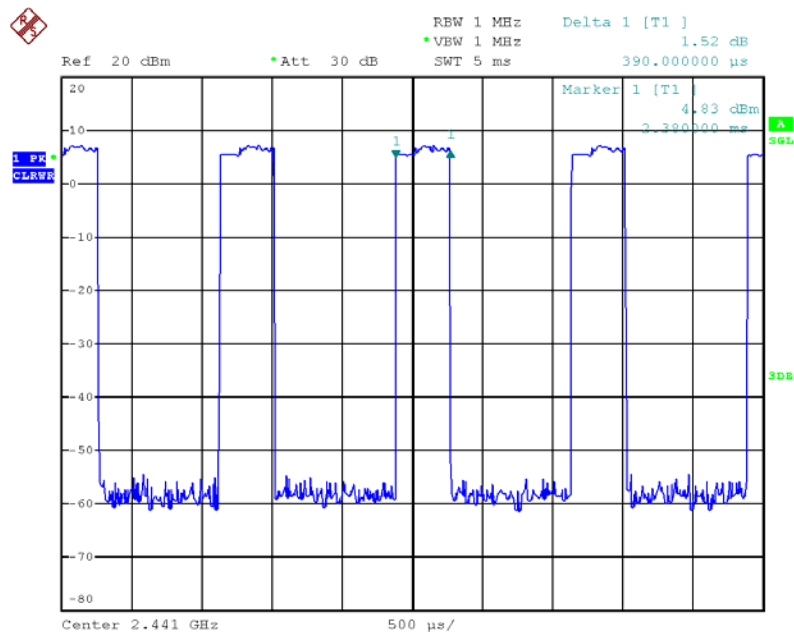


Date: 30.JUN.2012 22:20:16

Dwell Time Plot on Channel 78 / 3DH1 / 2480 MHz

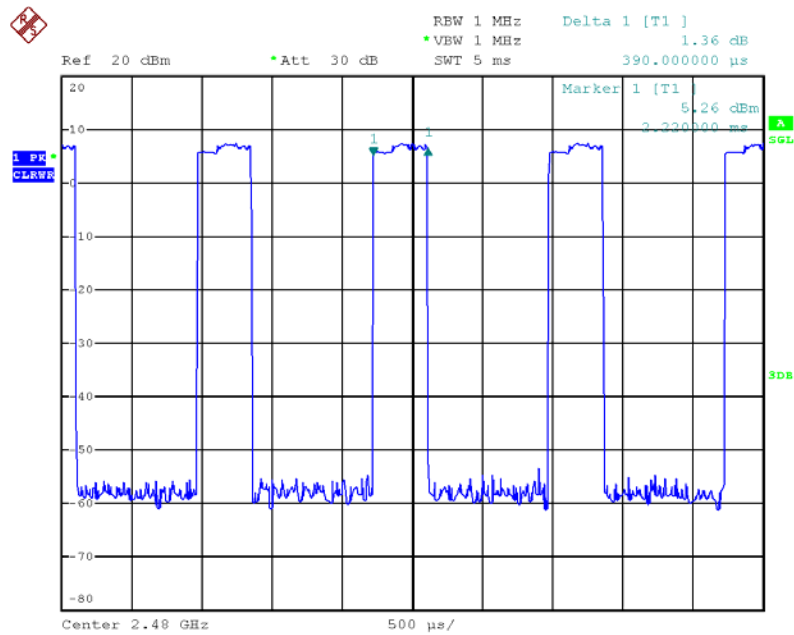


Date: 30.JUN.2012 22:23:14

Dwell Time Plot on Channel 0 / 3DH3 / 2402 MHz

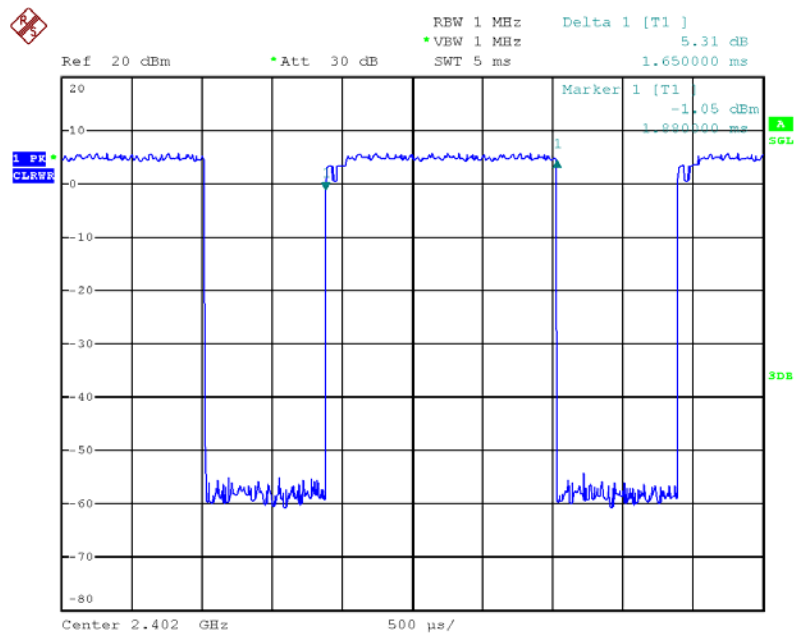


Date: 30.JUN.2012 22:17:33

Dwell Time Plot on Channel 39 / 3DH3 / 2441 MHz

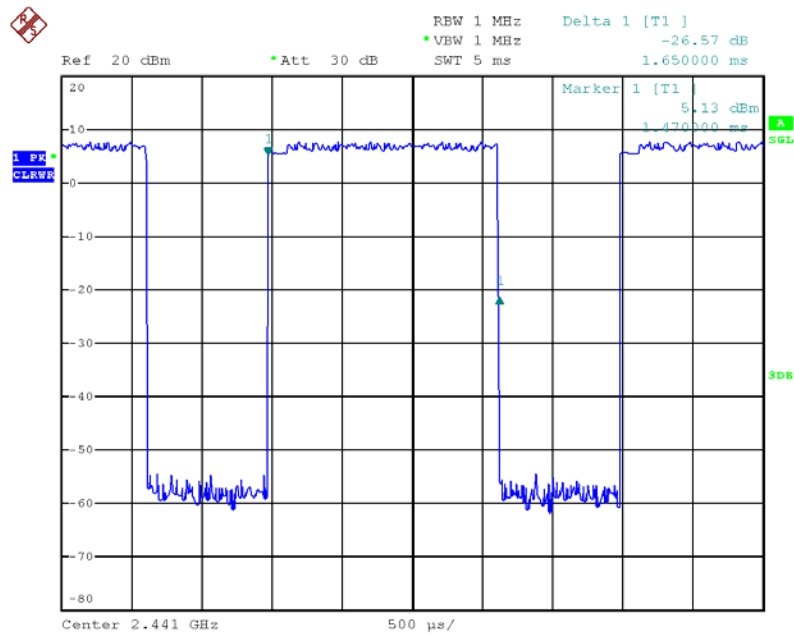


Date: 30.JUN.2012 22:20:58

Dwell Time Plot on Channel 78 / 3DH3 / 2480 MHz

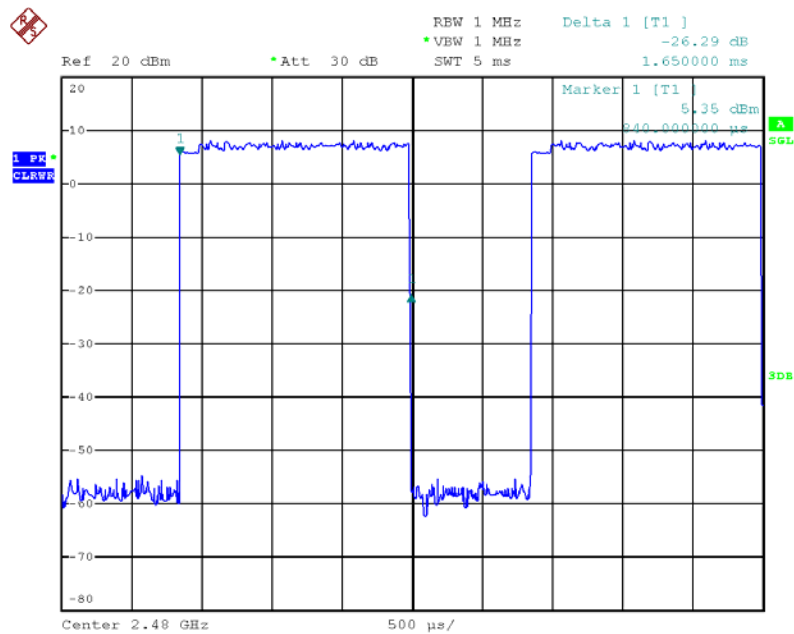


Date: 30.JUN.2012 22:22:42

Dwell Time Plot on Channel 0 / 3DH5 / 2402 MHz

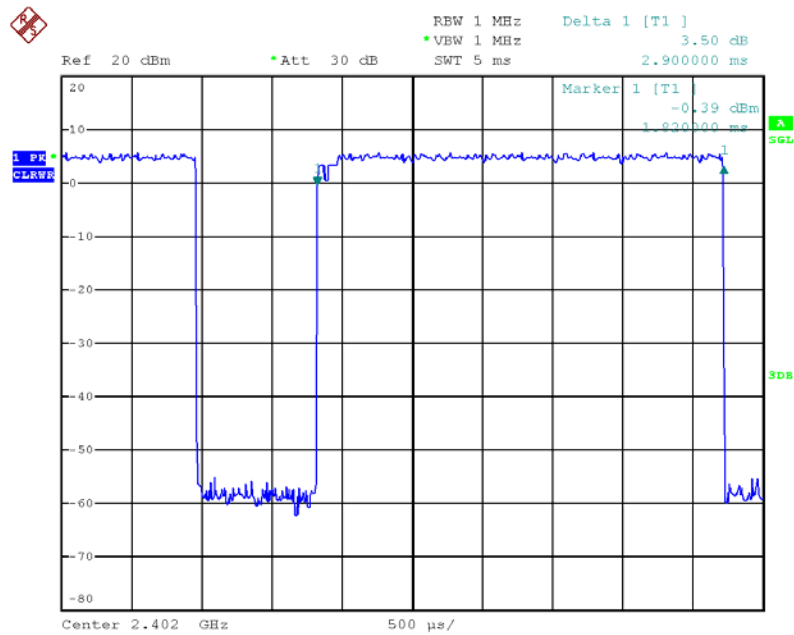


Date: 30.JUN.2012 22:16:47

Dwell Time Plot on Channel 39 / 3DH5 / 2441 MHz

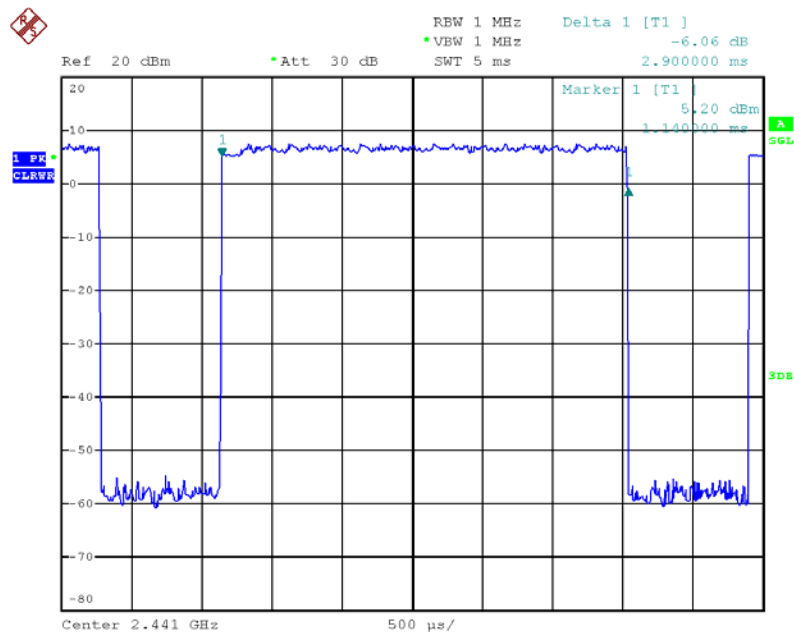

Date: 30.JUN.2012 22:21:31

Dwell Time Plot on Channel 78 / 3DH5 / 2480 MHz

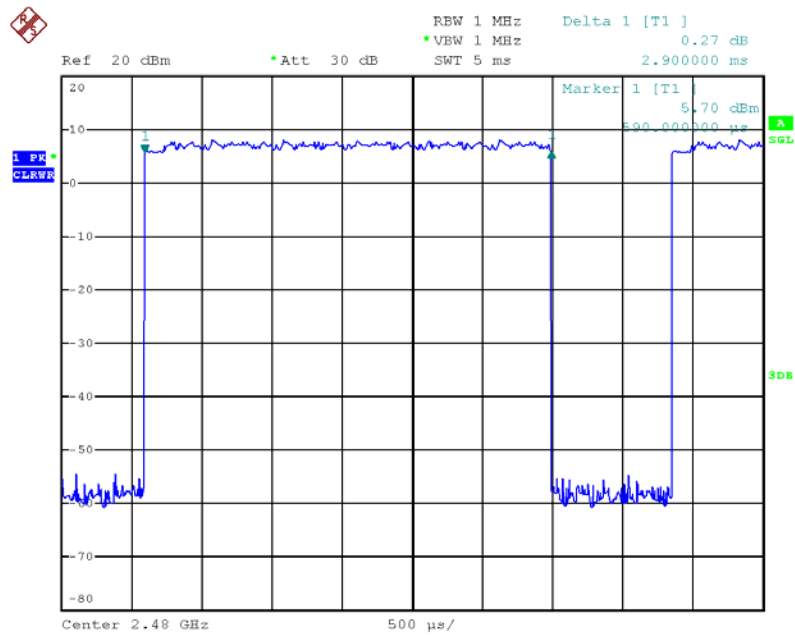

Date: 30.JUN.2012 22:22:07

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

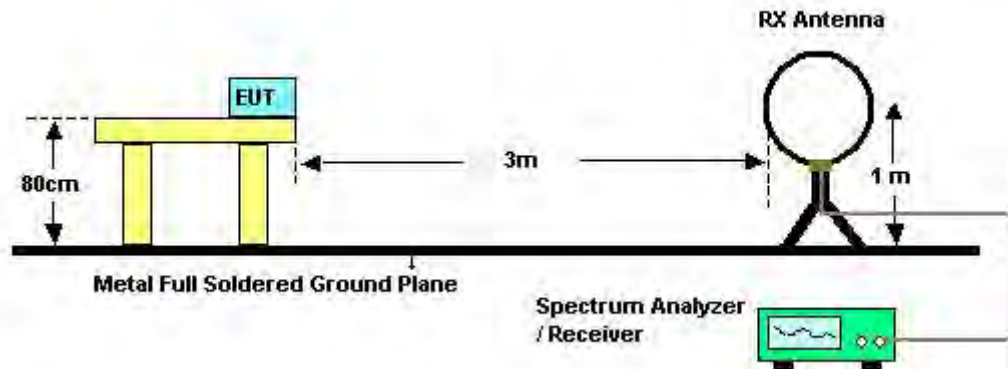

For radiated emissions above 1GHz

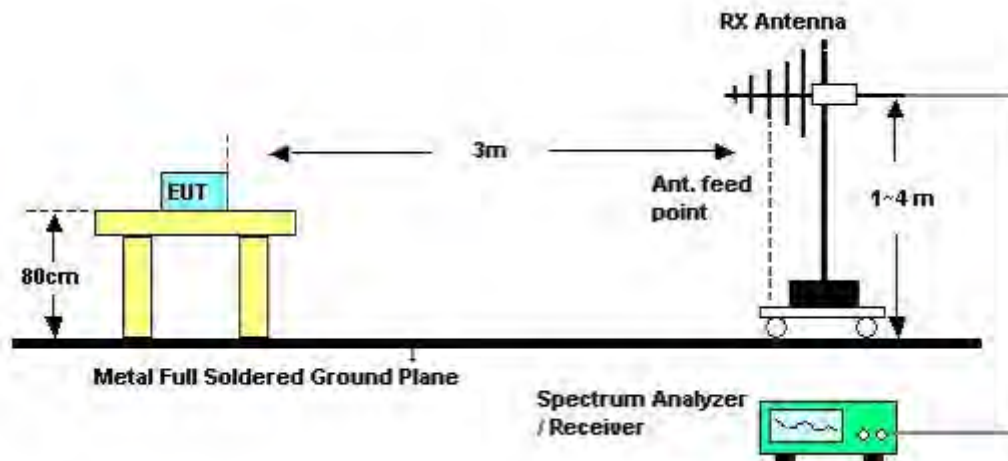

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	Normal Link
Test Date	Jul. 06, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	Normal Link

Horizontal

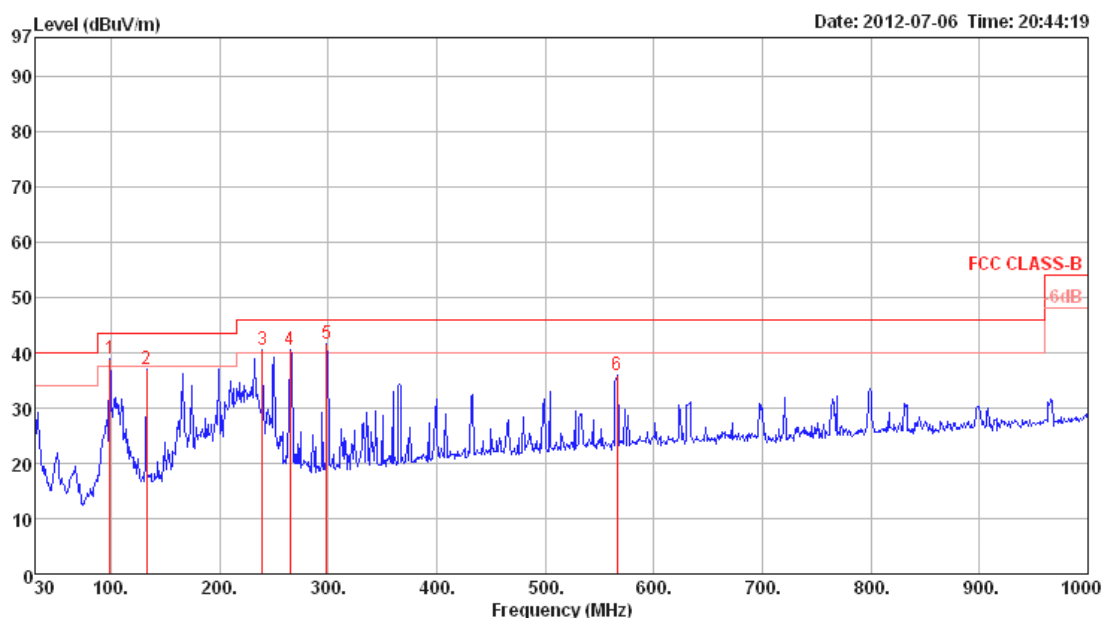

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	98.87	38.89	43.50	-4.61	54.53	1.18	10.79	27.61	Peak	100	0	HORIZONTAL
2	132.82	37.01	43.50	-6.49	50.83	1.33	12.28	27.43	Peak	100	0	HORIZONTAL
3	239.52	40.60	46.00	-5.40	53.78	1.86	11.98	27.02	Peak	100	0	HORIZONTAL
4	264.74	40.59	46.00	-5.41	52.66	1.96	12.94	26.97	Peak	100	0	HORIZONTAL
5	298.69	41.54	46.00	-4.46	52.99	2.10	13.35	26.90	Peak	100	0	HORIZONTAL
6	566.41	35.94	46.00	-10.06	42.83	2.83	18.38	28.10	Peak	100	0	HORIZONTAL

Vertical

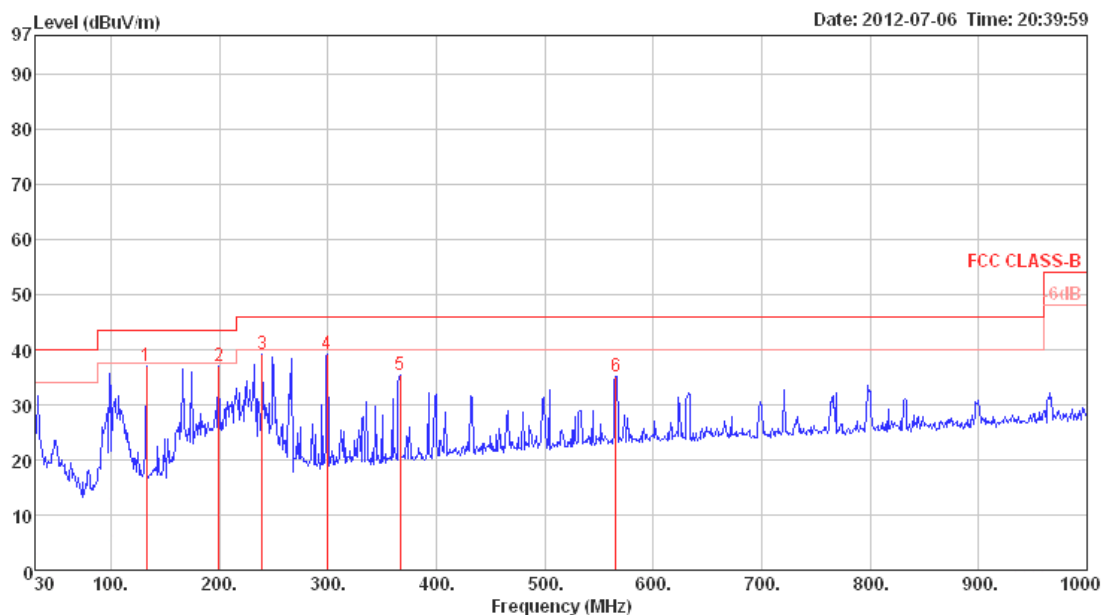

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	132.82	37.02	43.50	-6.48	50.84	1.33	12.28	27.43	Peak	400	0 VERTICAL
2	199.75	37.07	43.50	-6.43	53.42	1.70	9.05	27.10	Peak	400	0 VERTICAL
3	239.52	39.09	46.00	-6.91	52.27	1.86	11.98	27.02	Peak	400	0 VERTICAL
4	299.66	39.05	46.00	-6.95	50.49	2.10	13.36	26.90	Peak	400	0 VERTICAL
5	366.59	35.27	46.00	-10.73	45.24	2.23	15.17	27.37	Peak	400	0 VERTICAL
6	565.44	35.16	46.00	-10.84	42.06	2.83	18.37	28.10	Peak	400	0 VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	Channel 0
Test Date	Jul. 09, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.27	31.52	54.00	-22.48	27.15	6.21	33.36	35.20	Average	100	132	HORIZONTAL
2	4803.84	45.76	74.00	-28.24	41.39	6.21	33.36	35.20	Peak	100	132	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.75	46.16	74.00	-27.84	41.79	6.21	33.36	35.20	Peak	100	331	VERTICAL
2	4803.77	32.62	54.00	-21.38	28.25	6.21	33.36	35.20	Average	100	331	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	Channel 39
Test Date	Jul. 09, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.50	45.92	74.00	-28.08	41.35	6.29	33.48	35.20	Peak	100	35	HORIZONTAL
2	4882.39	32.99	54.00	-21.01	28.42	6.29	33.48	35.20	Average	100	35	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.53	46.20	74.00	-27.80	41.63	6.29	33.48	35.20	Peak	100	244	VERTICAL
2	4882.47	33.06	54.00	-20.94	28.49	6.29	33.48	35.20	Average	100	244	VERTICAL

Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	Channel 78
Test Date	Jul. 09, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	4960.23	32.38	54.00	-21.62	27.57	6.37	33.64	35.20	Average	100	352	HORIZONTAL
2	4960.52	46.95	74.00	-27.05	42.14	6.37	33.64	35.20	Peak	100	352	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	4960.34	47.11	74.00	-26.89	42.30	6.37	33.64	35.20	Peak	100	169	VERTICAL
2	4960.41	32.32	54.00	-21.68	27.51	6.37	33.64	35.20	Average	100	169	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	Channel 0, 39, 78
Test Date	Jul. 09, 2012		

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.40	55.71	74.00	-18.29	23.52	4.14	28.05	0.00	Peak	100	32	VERTICAL
2	2390.00	43.77	54.00	-10.23	11.58	4.14	28.05	0.00	Average	100	32	VERTICAL
3	2402.00				56.59	4.14	28.09	0.00	Average	100	32	VERTICAL
4	2402.00				70.33	4.14	28.09	0.00	Peak	100	32	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.50	55.41	74.00	-18.59	23.22	4.14	28.05	0.00	Peak	100	172	HORIZONTAL
2	2390.00	43.67	54.00	-10.33	11.48	4.14	28.05	0.00	Average	100	172	HORIZONTAL
3	2441.00				56.15	4.18	28.18	0.00	Average	100	172	HORIZONTAL
4	2441.30				69.93	4.18	28.18	0.00	Peak	100	172	HORIZONTAL
5	2483.50	44.02	54.00	-9.98	11.55	4.21	28.26	0.00	Average	100	172	HORIZONTAL
6	2487.70	56.83	74.00	-17.17	24.30	4.23	28.30	0.00	Peak	100	172	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00				56.24	4.21	28.26	0.00	Average	100	186	HORIZONTAL
2	2480.00				69.91	4.21	28.26	0.00	Peak	100	186	HORIZONTAL
3	2483.50	46.44	54.00	-7.56	13.97	4.21	28.26	0.00	Average	100	186	HORIZONTAL
4	2483.76	58.40	74.00	-15.60	25.93	4.21	28.26	0.00	Peak	100	186	HORIZONTAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Plot on Channel 0 / 2402 MHz

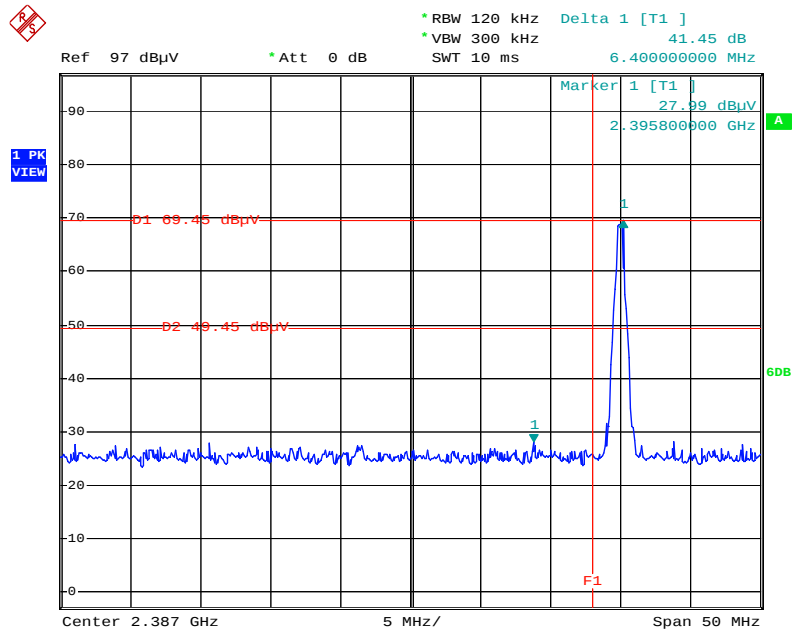

Date: 9.JUL.2012 21:02:16

Plot on Channel 78 / 2480 MHz

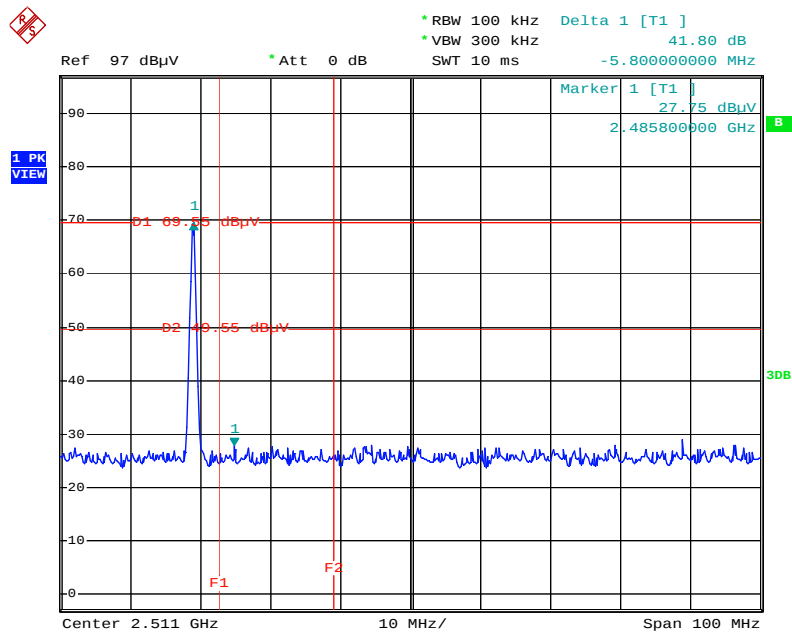

Date: 9.JUL.2012 21:09:25

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 29, 2011	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 29, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2011	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz-40GHz	Nov. 22, 2011	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
Signal generator	R&S	SMU200A	102782	10MHz-40GHz	Jun. 07, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071187	1GHz ~ 18GHz	May 09, 2012	Conducted (TH01-CB)
Horn Antenna	COM-POWER	AH-118	071042	1GHz ~ 18GHz	Nov. 01, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz ~ 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: * Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix


Appendix A. Test Photos

1. Photographs of Conducted Emissions Test Configuration

FRONT VIEW



REAR VIEW

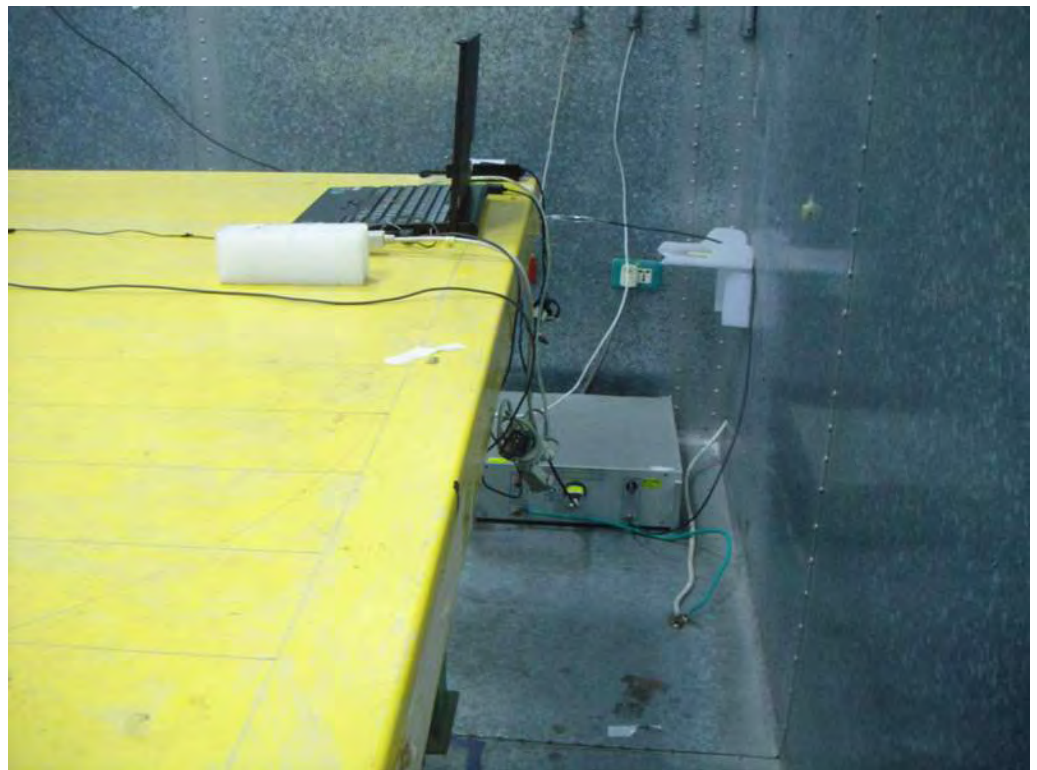

2. Photographs of Radiated Emissions Test Configuration

Test Configuration: 9kHz ~30MHz

FRONT VIEW



REAR VIEW



Test Configuration: 30MHz~1GHz

FRONT VIEW




REAR VIEW




Test Configuration: Above 1GHz

FRONT VIEW

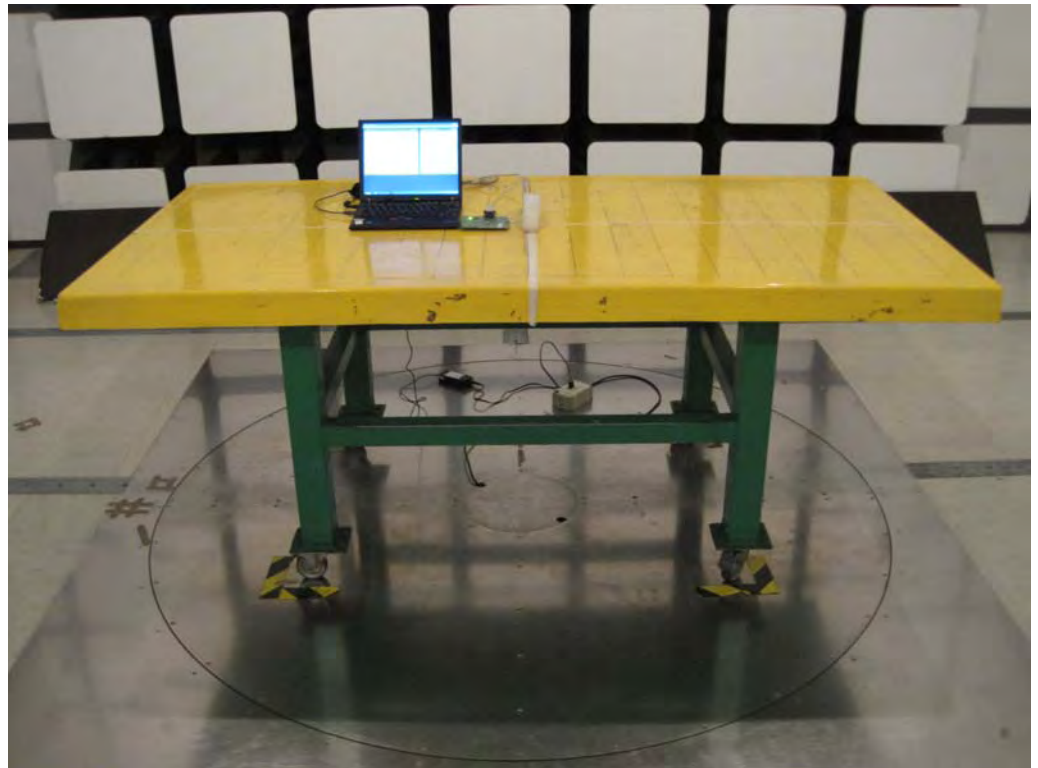

REAR VIEW

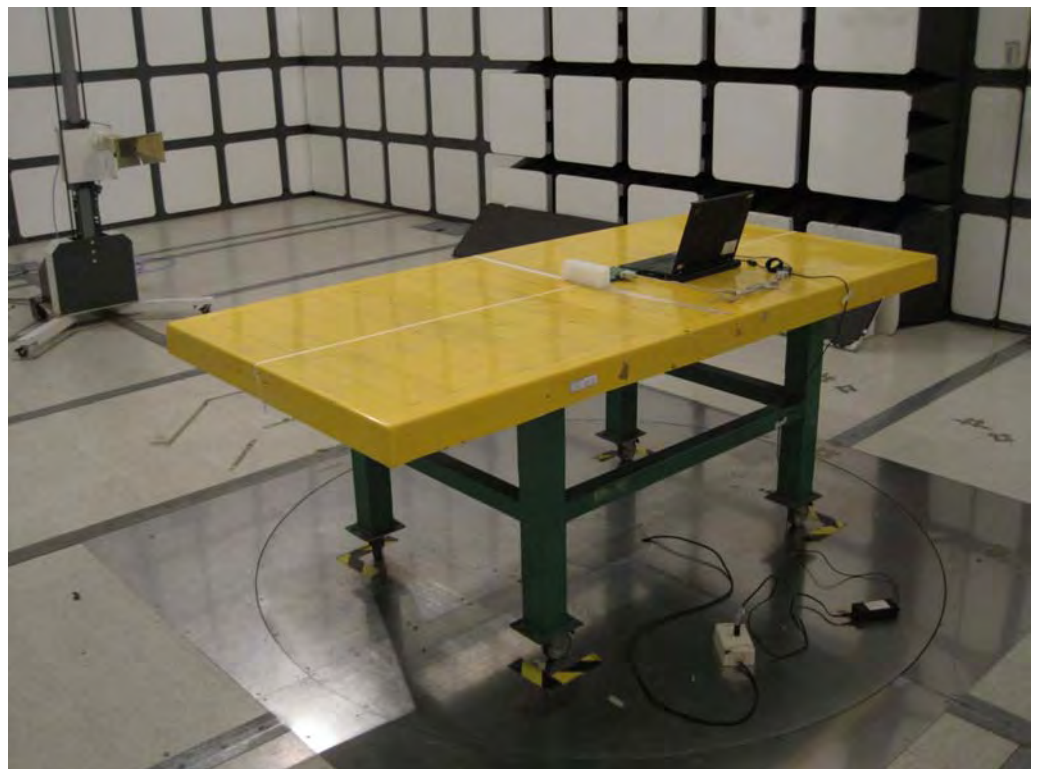

Appendix B. Maximum Permissible Exposure

1. Maximum Permissible Exposure

1.1. Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.25 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

1.2. MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Average RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

1.3. Calculated Result and Limit

For 5GHz UNII Band:

Antenna Type : PIFA Antenna

Max Conducted Power for IEEE 802.11a : 13.38dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
4.30	2.6915	13.3800	21.7771	0.011667	1	Complies

Note: Directional Antenna Gain = Test Antenna Gain + 10 log (Antenna quantity)

For 5GHz ISM Band:

Antenna Type : PIFA Antenna

Max Conducted Power for IEEE 802.11a: 13.25dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
4.30	2.6915	13.2500	21.1349	0.011323	1	Complies

Note: Directional Antenna Gain = Test Antenna Gain + 10 log (Antenna quantity)

For 2.4GHz Band:

Antenna Type : PIFA Antenna

Max Conducted Power for IEEE 802.11b : 15.82 dBm

Directional Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
3	1.9953	15.8200	38.1944	0.015169	1	Complies

Note: Directional Antenna Gain = Test Antenna Gain + 10 log (Antenna quantity)

For Bluetooth 1.0 :

Antenna Type : PIFA Antenna

Max Conducted Power for Bluetooth : 9.32 dBm

Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
3	1.9953	9.3200	8.5507	0.003396	1	Complies

For Bluetooth 2.1 +EDR :

Antenna Type : PIFA Antenna

Max Conducted Power for Bluetooth : 9.50 dBm

Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
3	1.9953	9.5000	8.9125	0.003540	1	Complies

For Bluetooth 4.0 :

Antenna Type : PIFA Antenna

Max Conducted Power for Bluetooth : 7.80 dBm

Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power (dBm)	Average Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
3	1.9953	7.8000	6.0256	0.002393	1	Complies

CONCLUSION:

Both of the WLAN 5GHz Band and Bluetooth can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density


Therefore, the worst-case situation is $0.011667 / 1 + 0.003540 / 1 = 0.015207$, which is less than "1". This confirmed that the device comply with FCC 1.1310 MPE limit.

Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	21°C	Humidity	56.4%
Test Engineer	Benson Peng	Configurations	5G + BT

Horizontal

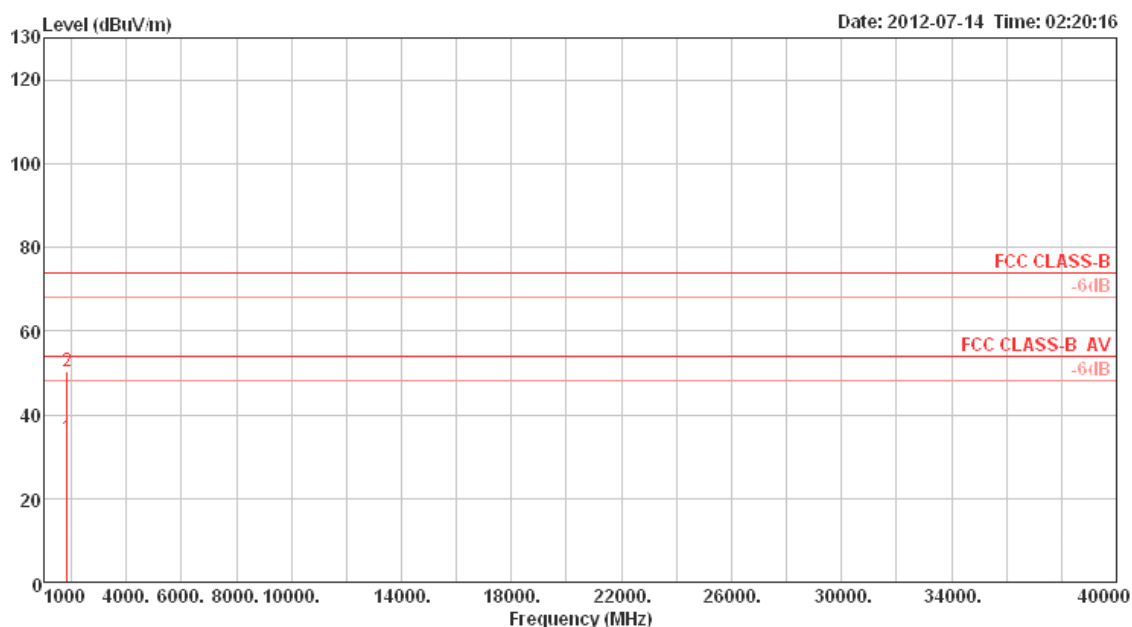

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1842.20	34.56	54.00	-19.44	38.98	3.85	26.63	34.90	Average	100	351	HORIZONTAL
2	1842.20	50.16	74.00	-23.84	54.58	3.85	26.63	34.90	Peak	100	351	HORIZONTAL

Vertical

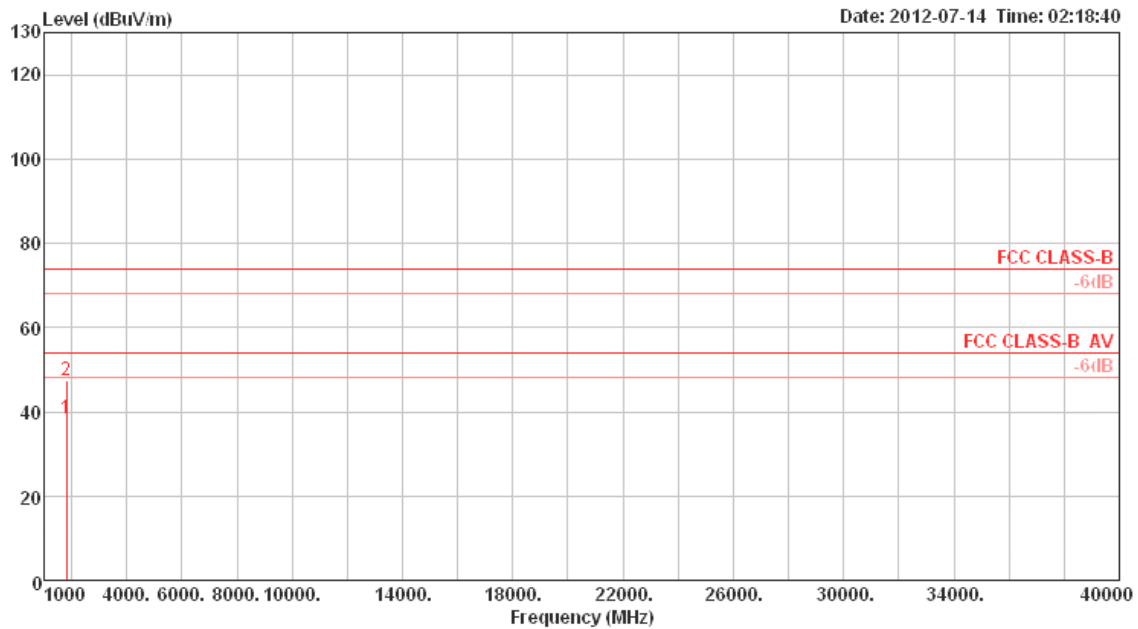

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1808.20	38.45	54.00	-15.55	43.02	3.80	26.53	34.90 Average	105	228	VERTICAL
2	1808.20	47.60	74.00	-26.40	52.17	3.80	26.53	34.90 Peak	105	228	VERTICAL