



FCC/IC RF Test Report

APPLICANT : Wistron Corporation
EQUIPMENT : Tablet PC
BRAND NAME : Lenovo
MODEL NAME : TP00065A
FCC ID : PU5-TP00065A
IC : 4182A-TP00065A
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a partial report which is included the radiated band edges and spurious emission measurement test items. The product was received on Jul. 22, 2014 and testing was completed on Sep. 20, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID: PU5-TP00065A

IC: 4182A-TP00065A

Page Number : 1 of 29

Report Issued Date : Sep. 26, 2014

Report Version : Rev. 01

Report Template No.: BU5-FR15EWL Version 1.1

Report Template No.: BU5-CR210WL5G Version 1.1



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

 1.1 Applicant.....5

 1.2 Manufacturer.....5

 1.3 Feature of Equipment Under Test.....5

 1.4 Product Specification of Equipment Under Test.....7

 1.5 Modification of EUT.....8

 1.6 Testing Location.....9

 1.7 Applicable Standards.....9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....10

 2.1 Carrier Frequency and Channel.....11

 2.2 Pre-Scanned RF Power.....12

 2.3 Test Mode.....18

 2.4 Connection Diagram of Test System.....21

 2.5 EUT Operation Test Setup.....21

3 TEST RESULT.....22

 3.1 Unwanted Emissions Measurement.....22

 3.2 Automatically Discontinue Transmission.....27

4 LIST OF MEASURING EQUIPMENT.....28

5 UNCERTAINTY OF EVALUATION.....29

APPENDIX A. TEST RESULT OF RADIATED TEST RESULTS

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.407(b)	RSS-210 A9.3	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band)&15.209(a)	Pass	Under limit 0.03 dB at 5350.440 MHz



1 General Description

1.1 Applicant

Wistron Corporation

21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan R.O.C.

1.2 Manufacturer

Wistron Corporation

21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan R.O.C.

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	Lenovo
Model Name	TP00065A
DUT Description	A tablet (PAD) computer, contains 802.11a/b/g/n/ac and Bluetooth transceiver (radio module)
FCC ID	PU5-TP00065A
IC	4182A-TP00065A
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.0 EDR/LE
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



Antenna Information					
Antenna 1	Manufacturer	High-tek			
	P/N		025.9004Q.0011		025.9004R.0011
	Antenna Type		PIFA Antenna		PIFA Antenna
	Peak gain	Main Antenna :	WLAN(2.4GHz):	Aux. Antenna :	WLAN(2.4GHz): -0.33dBi
			0.06dBi		Bluetooth : -0.33dBi
		WLAN(5GHz): 1.66dBi		WLAN(5GHz): 1.70dBi	
Antenna 2	Manufacturer	WNC			
	P/N		025.9004O.0001		025.9004O.0001
	Antenna Type		PIFA Antenna		PIFA Antenna
	Peak gain	Main Antenna :	WLAN(2.4GHz):	Aux. Antenna :	WLAN (2.4GHz): -0.35dBi
			0.06dBi		Bluetooth:-0.35dBi
		WLAN(5GHz): 1.42Bi		WLAN(5GHz): 1.49dBi	



1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz
Maximum Output Power	<p><5180 MHz ~ 5240 MHz></p> <p><Ant. 1> 802.11a : 15.92 dBm / 0.0391 W</p> <p><Ant. 2> 802.11a : 15.88 dBm / 0.0387 W</p> <p><SISO Ant. 1> 802.11n HT20 : 15.94 dBm / 0.0393 W 802.11n HT40 : 16.23 dBm / 0.0420 W 802.11ac VHT20: 15.80 dBm / 0.0380 W 802.11ac VHT40: 16.12 dBm / 0.0409 W 802.11ac VHT80: 12.75 dBm / 0.0188 W</p> <p><SISO Ant. 2> 802.11n HT20 : 15.78 dBm / 0.0378 W 802.11n HT40 : 16.32 dBm / 0.0429 W 802.11ac VHT20: 15.75 dBm / 0.0376 W 802.11ac VHT40: 16.22 dBm / 0.0419 W 802.11ac VHT80: 12.65 dBm / 0.0184 W</p> <p><MIMO Ant. 1 + 2> 802.11n HT20 : 15.07 dBm / 0.0321 W 802.11n HT40 : 16.43 dBm / 0.0440 W 802.11ac VHT20: 15.45 dBm / 0.0351 W 802.11ac VHT40: 16.36 dBm / 0.0433 W 802.11ac VHT80: 13.20 dBm / 0.0209 W</p> <p><5260 MHz ~ 5320 MHz></p> <p><Ant. 1> 802.11a : 15.94 dBm / 0.0393 W</p> <p><Ant. 2> 802.11a : 15.85 dBm / 0.0385 W</p> <p><SISO Ant. 1> 802.11n HT20 : 15.87 dBm / 0.0386 W 802.11n HT40 : 16.18 dBm / 0.0414 W 802.11ac VHT20: 15.82 dBm / 0.0382 W 802.11ac VHT40: 16.07 dBm / 0.0405 W 802.11ac VHT80: 13.03 dBm / 0.0201 W</p> <p><SISO Ant. 2> 802.11n HT20 : 15.83 dBm / 0.0383 W 802.11n HT40 : 16.15 dBm / 0.0412 W 802.11ac VHT20: 15.76 dBm / 0.0377 W 802.11ac VHT40: 16.00 dBm / 0.0398 W 802.11ac VHT80: 12.72 dBm / 0.0187 W</p> <p><MIMO Ant. 1 + 2> 802.11n HT20 : 15.66 dBm / 0.0368 W 802.11n HT40 : 16.36 dBm / 0.0433 W 802.11ac VHT20: 15.99 dBm / 0.0397 W 802.11ac VHT40: 16.08 dBm / 0.0406 W 802.11ac VHT80: 13.19 dBm / 0.0208 W</p>



Product Specification subjective to this standard			
Maximum Output Power	5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz <Ant. 1> 802.11a : 16.29 dBm / 0.0426 W <Ant. 2> 802.11a : 16.25 dBm / 0.0422 W <SISO Ant. 1> 802.11n HT20 : 16.11 dBm / 0.0408 W 802.11n HT40 : 16.42 dBm / 0.0439 W 802.11ac VHT20: 16.42 dBm / 0.0439 W 802.11ac VHT40: 16.34 dBm / 0.0431 W 802.11ac VHT80: 13.10 dBm / 0.0204 W <SISO Ant. 2> 802.11n HT20 : 16.09 dBm / 0.0406 W 802.11n HT40 : 16.47 dBm / 0.0444 W 802.11ac VHT20: 16.32 dBm / 0.0429 W 802.11ac VHT40: 16.26 dBm / 0.0423 W 802.11ac VHT80: 13.02 dBm / 0.0200 W <MIMO Ant. 1 + 2> 802.11n HT20 : 16.36 dBm / 0.0433 W 802.11n HT40 : 16.34 dBm / 0.0431 W 802.11ac VHT20: 16.37 dBm / 0.0434 W 802.11ac VHT40: 16.33 dBm / 0.0430 W 802.11ac VHT80: 14.45 dBm / 0.0279 W		
	Type of Modulation 802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Function Description		Chain Port 1	Chain Port 2
	802.11 a	V	V
	802.11 n/ac SISO	V	V
	802.11 n/ac MIMO	V	V

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		IC Registration No.
	TH02-HY	03CH06-HY	4086B-1

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ IC RSS-210 Issued 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radio-communication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.



2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240
	42	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54	5270	62	5310
	56	5280	64	5320
	58	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5600 MHz and 5650-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102	5510	116	5580
	104	5520	132	5660
	106	5530	134	5670
	108	5540	136	5680
	110	5550	140	5700

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

<Ant. 1>

Channel	Frequency	5GHz 802.11a Average Power (dBm) (800ns)	
		Data Rate	
		6 Mbps	
CH 036	5180 MHz	13.88	
CH 044	5220 MHz	15.77	
CH 048	5240 MHz	15.92	
CH 052	5260 MHz	15.87	
CH 060	5300 MHz	15.94	
CH 064	5320 MHz	13.85	
CH 100	5500 MHz	13.47	
CH 116	5580 MHz	16.29	
CH 140	5700 MHz	12.60	

<SISO Ant. 1>

Channel	Frequency	5GHz 802.11n HT20 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 036	5180 MHz	13.76	
CH 044	5220 MHz	15.81	
CH 048	5240 MHz	15.94	
CH 052	5260 MHz	15.83	
CH 060	5300 MHz	15.87	
CH 064	5320 MHz	13.81	
CH 100	5500 MHz	13.44	
CH 116	5580 MHz	16.11	
CH 140	5700 MHz	12.88	



Channel	Frequency	5GHz 802.11n HT40 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 038	5190MHz	12.32	
CH 046	5230MHz	16.23	
CH 054	5270MHz	16.18	
CH 062	5310MHz	13.07	
CH 102	5510MHz	13.41	
CH 110	5550MHz	16.42	
CH 134	5670MHz	14.81	

Channel	Frequency	5GHz 802.11ac VHT20 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 036	5180 MHz	13.72	
CH 044	5220 MHz	15.80	
CH 048	5240 MHz	15.73	
CH 052	5260 MHz	15.82	
CH 060	5300 MHz	15.80	
CH 064	5320 MHz	13.72	
CH 100	5500 MHz	13.39	
CH 116	5580 MHz	16.42	
CH 140	5700 MHz	12.75	

Channel	Frequency	5GHz 802.11ac VHT40 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 038	5190MHz	12.39	
CH 046	5230MHz	16.12	
CH 054	5270MHz	16.07	
CH 062	5310MHz	13.30	
CH 102	5510MHz	13.43	
CH 110	5550MHz	16.34	
CH 134	5670MHz	14.97	

Channel	Frequency	5GHz 802.11ac VHT80 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 42	5210MHz	12.75	
CH 58	5290MHz	13.03	
CH 106	5530MHz	13.10	



<Ant. 2>

Channel	Frequency	5GHz 802.11a Average Power (dBm) (800ns)	
		Data Rate	
		6 Mbps	
CH 036	5180 MHz	13.82	
CH 044	5220 MHz	15.75	
CH 048	5240 MHz	15.88	
CH 052	5260 MHz	15.85	
CH 060	5300 MHz	15.80	
CH 064	5320 MHz	13.75	
CH 100	5500 MHz	13.44	
CH 116	5580 MHz	16.25	
CH 140	5700 MHz	12.56	

SISO <Ant. Port 2>

Channel	Frequency	5GHz 802.11n HT20 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 036	5180 MHz	13.91	
CH 044	5220 MHz	15.78	
CH 048	5240 MHz	15.66	
CH 052	5260 MHz	15.78	
CH 060	5300 MHz	15.83	
CH 064	5320 MHz	13.61	
CH 100	5500 MHz	13.38	
CH 116	5580 MHz	16.09	
CH 140	5700 MHz	12.59	

Channel	Frequency	5GHz 802.11n HT40 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 038	5190MHz	12.34	
CH 046	5230MHz	16.23	
CH 054	5270MHz	16.15	
CH 062	5310MHz	13.48	
CH 102	5510MHz	13.19	
CH 110	5550MHz	16.40	
CH 134	5670MHz	14.34	



Channel	Frequency	5GHz 802.11ac VHT20 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 036	5180 MHz	13.67	
CH 044	5220 MHz	15.75	
CH 048	5240 MHz	15.67	
CH 052	5260 MHz	15.76	
CH 060	5300 MHz	15.71	
CH 064	5320 MHz	13.65	
CH 100	5500 MHz	13.32	
CH 116	5580 MHz	16.32	
CH 140	5700 MHz	12.70	

Channel	Frequency	5GHz 802.11ac VHT40 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 038	5190MHz	12.36	
CH 046	5230MHz	16.22	
CH 054	5270MHz	16.00	
CH 062	5310MHz	13.17	
CH 102	5510MHz	13.46	
CH 110	5550MHz	16.26	
CH 134	5670MHz	14.91	

Channel	Frequency	5GHz 802.11ac VHT80 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 42	5210MHz	12.65	
CH 58	5290MHz	12.72	
CH 106	5530MHz	13.02	



<MIMO Ant. 1+2>

Channel	Frequency	5GHz 802.11n HT20 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 036	5180 MHz	13.99	
CH 044	5220 MHz	15.00	
CH 048	5240 MHz	15.07	
CH 052	5260 MHz	15.66	
CH 060	5300 MHz	15.55	
CH 064	5320 MHz	13.99	
CH 100	5500 MHz	13.48	
CH 116	5580 MHz	16.36	
CH 140	5700 MHz	12.44	

Channel	Frequency	5GHz 802.11n HT40 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 038	5190MHz	13.26	
CH 046	5230MHz	16.43	
CH 054	5270MHz	16.36	
CH 062	5310MHz	15.20	
CH 102	5510MHz	14.78	
CH 110	5550MHz	16.33	
CH 134	5670MHz	16.34	

Channel	Frequency	5GHz 802.11ac VHT20 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 036	5180 MHz	13.77	
CH 044	5220 MHz	15.45	
CH 048	5240 MHz	15.43	
CH 052	5260 MHz	15.92	
CH 060	5300 MHz	15.99	
CH 064	5320 MHz	13.99	
CH 100	5500 MHz	13.27	
CH 116	5580 MHz	16.37	
CH 140	5700 MHz	12.99	



Channel	Frequency	5GHz 802.11ac VHT40 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 038	5190MHz	13.03	
CH 046	5230MHz	16.36	
CH 054	5270MHz	16.08	
CH 062	5310MHz	15.48	
CH 102	5510MHz	14.69	
CH 110	5550MHz	16.27	
CH 134	5670MHz	16.33	

Channel	Frequency	5GHz 802.11ac VHT80 Average Power (dBm) (800ns)	
		Data Rate	
		MCS0	
CH 42	5210MHz	13.20	
CH 58	5290MHz	13.19	
CH 106	5530MHz	14.45	

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.



2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

Test Cases				
	Test Items	Mode	Data rate	Test Channel
Conducted TCs	Output Power	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
		802.11ac VHT20	MCS0	L/M/H
		802.11ac VHT40	MCS0	L/M/H
		802.11ac VHT80	MCS0	M
Radiated TCs	Radiated Band Edge	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
		802.11ac VHT80	MCS0	M
	Radiated Spurious Emission	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
		802.11ac VHT80	MCS0	M



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134




Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	-
M	Middle	42	58	106
H	High	-	-	-

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

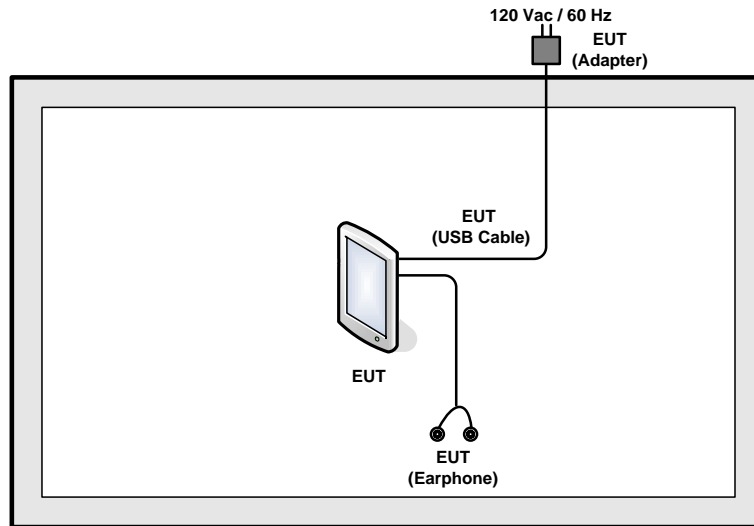

2.5 EUT Operation Test Setup

For WLAN function, programmed RF utility, "Continuous Tx" make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.



3 Test Result

3.1 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.1.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBµV/m)
-17	78.3
- 27	68.3

(3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold



(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	98.57	-	-	3kHz
2	802.11a	98.57	-	-	3kHz
1	802.11n HT20	98.47	-	-	3kHz
2	802.11n HT20	98.46	-	-	3kHz
1	802.11n HT40	97.53	948	1.05	3kHz
2	802.11n HT40	96.93	948	1.05	3kHz
1	802.11n VHT80	94.07	444	2.25	3kHz
2	802.11n VHT80	94.07	444	2.25	3kHz
1+2	802.11n HT40 for Ant1	97.25	990	1.01	3kHz
1+2	802.11n HT20 for Ant2	97.06	990	1.01	3kHz
1+2	802.11n HT40 for Ant1	94.66	496	2.02	3kHz
1+2	802.11n HT40 for Ant2	94.7	500	2.00	3kHz
1+2	802.11n VHT80 for Ant1	90.14	256	3.91	10kHz
1+2	802.11n VHT80 for Ant2	90.85	258	3.88	10kHz


2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.1.4 Test Setup


For radiated emissions below 30MHz

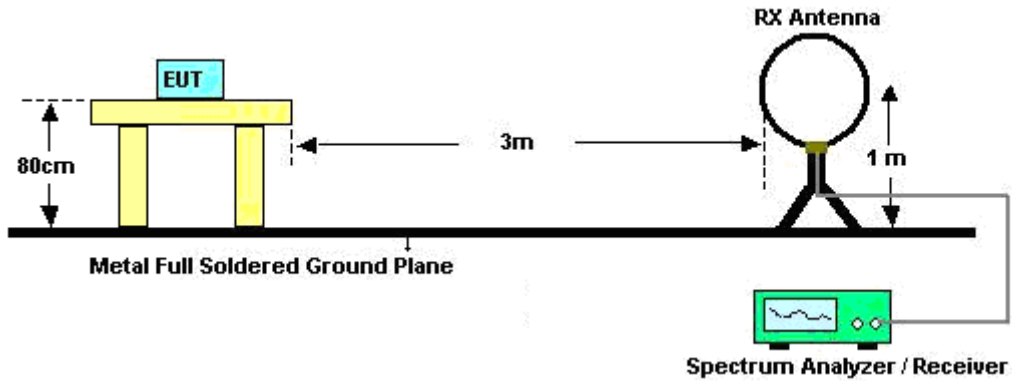

For radiated emissions from 30MHz to 1GHz

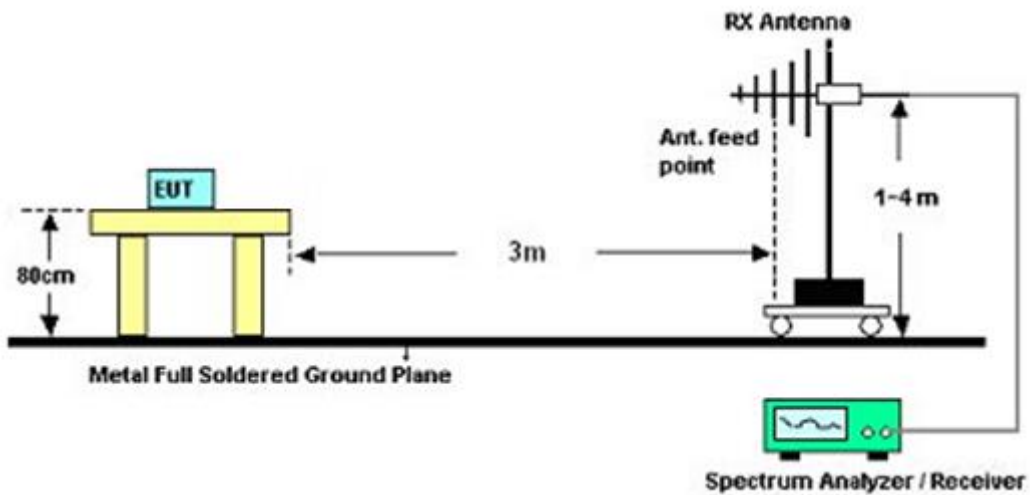

For radiated emissions above 1GHz

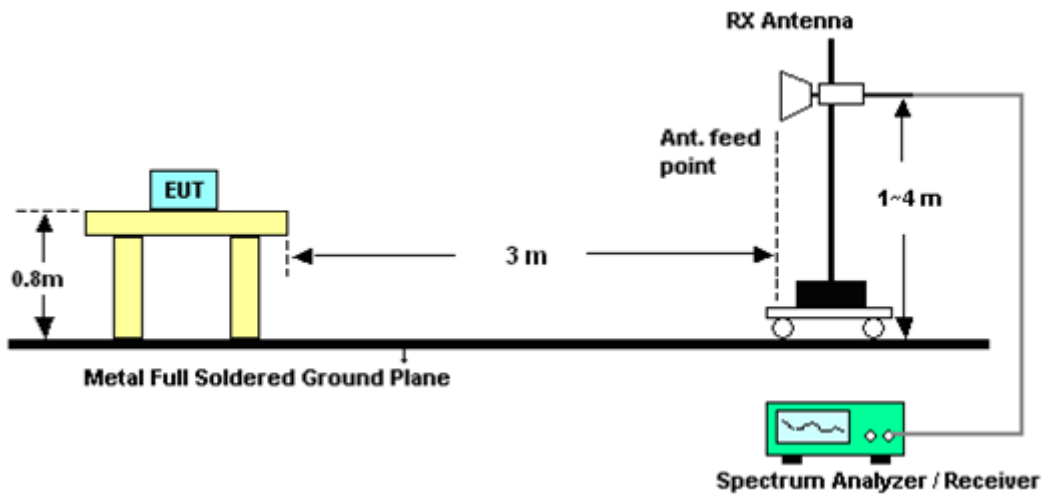

3.1.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.1.6 Test Result

Please refer to appendix A as below.



3.2 Automatically Discontinue Transmission

3.2.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 17, 2013	Aug. 02, 2014	Aug. 16, 2014	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 17, 2013	Aug. 02, 2014	Aug. 16, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Sep. 07, 2014~ Sep. 20, 2014	Jun. 08, 2015	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Oct. 10, 2013	Sep. 07, 2014~ Sep. 20, 2014	Oct. 09, 2014	Radiation (03CH05-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Apr. 16, 2014	Sep. 07, 2014~ Sep. 20, 2014	Apr. 15, 2015	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Oct. 03, 2013	Sep. 07, 2014~ Sep. 20, 2014	Oct. 02, 2014	Radiation (03CH05-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	100kHz~18GHz	Jul. 07, 2014	Sep. 07, 2014~ Sep. 20, 2014	Jul. 06, 2015	Radiation (03CH05-HY)
Preamplifier	EMCI	EMC011830	980148	DC~18GHz	Jun. 23, 2014	Sep. 07, 2014~ Sep. 20, 2014	Jun. 22, 2015	Radiation (03CH05-HY)
Preamplifier	COM-POWER	PA-103	161075	9kHz~30MHz	Apr. 15, 2014	Sep. 07, 2014~ Sep. 20, 2014	Apr. 14, 2015	Radiation (03CH05-HY)
Preamplifier	Miteq	TTA0204	1872107	18GHz~40GHz	May 23, 2014	Sep. 07, 2014~ Sep. 20, 2014	May 22, 2015	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Sep. 07, 2014~ Sep. 20, 2014	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Sep. 07, 2014~ Sep. 20, 2014	N/A	Radiation (03CH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10
-------------------------------------------------------------------------	------