



# FCC RF Test Report

**APPLICANT** : Wistron Corporation  
**EQUIPMENT** : Notebook Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : TP00076BUC  
**FCC ID** : PU5-TP00076BUC  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)

Equipment: AriPrime EM7455 and Intel 8260NGW tested inside of Lenovo Notebook PC.

This is a partial report which is included the conducted output power ERP/EIRP, and radiated test items. The product was received on Nov. 25, 2015 and testing was completed on Jan. 16, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PU5-TP00076BUC

Page Number : 1 of 15

Report Issued Date : Feb. 22, 2016

Report Version : Rev. 02

Report Template No.: BU5-FG22/24/27 Version 1.1



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 6

    1.6 Maximum ERP/EIRP Power..... 6

    1.7 Testing Location ..... 7

    1.8 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Test Mode..... 8

    2.2 Connection Diagram of Test System ..... 8

    2.3 Support Unit used in test configuration ..... 9

**3 CONDUCTED TEST RESULT ..... 10**

    3.1 Measuring Instruments..... 10

    3.2 Test Setup ..... 10

    3.3 Test Result of Conducted Test..... 10

    3.4 Conducted Output Power and ERP/EIRP ..... 11

**4 RADIATED SPURIOUS EMISSION ..... 12**

    4.1 Radiated Test Items ..... 12

    4.2 Field Strength of Spurious Radiation Measurement ..... 13

**5 LIST OF MEASURING EQUIPMENT ..... 14**

**6 UNCERTAINTY OF EVALUATION ..... 15**

**APPENDIX A. TEST RESULTS OF CONDUCTED TEST**

**APPENDIX B. TEST RESULTS OF RADIATED TEST**

**APPENDIX C. TEST SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG5O1701-03A	Rev. 01	Initial issue of report	Feb. 19, 2016
FG5O1701-03A	Rev. 02	Adding FCC ID information for module in section 1.3	Feb. 22, 2016



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
4.2	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 27.52 dB at 1696.000 MHz



# 1 General Description

## 1.1 Applicant

**Wistron Corporation**

21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan R.O.C.

## 1.2 Manufacturer

**Wistron Corporation**

21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan R.O.C.

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Notebook Computer
<b>Brand Name</b>	Lenovo
<b>Model Name</b>	TP00076BUC
<b>FCC ID</b>	PU5-TP00076BUC
<b>Integrated WWAN Module</b>	Brand Name: Sierra Model Name: EM7455 FCC ID: N7NEM7455
<b>Integrated WLAN Module</b>	Brand Name: Intel Model Name: 8260NGW FCC ID: PD98260NG
<b>EUT supports Radios application</b>	WCDMA/HSPA/LTE WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.1 EDR/LE
<b>EUT Stage</b>	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. Equipment: AriPrime EM7455 and Intel 8260NGW tested inside of Lenovo Notebook PC.

EM7455		3G & LTE	
Manufacturer	Jieng Tai	Peak gain	3.67
P/N	025.900AG.0011	Type	PIFA



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	<b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
<b>Rx Frequency</b>	<b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>WCDMA:</b> Band V: 22.40 dBm Band II: 22.55 dBm Band IV: 22.52 dBm
<b>Antenna Gain</b>	Cellular Band: 0.54 dBi PCS Band: 0.62 dBi AWS Band: 1.01 dBi
<b>Type of Modulation</b>	WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum ERP/EIRP Power

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1199
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2075
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2254



### 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH03-HY	03CH12-HY

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

### 2.2 Connection Diagram of Test System

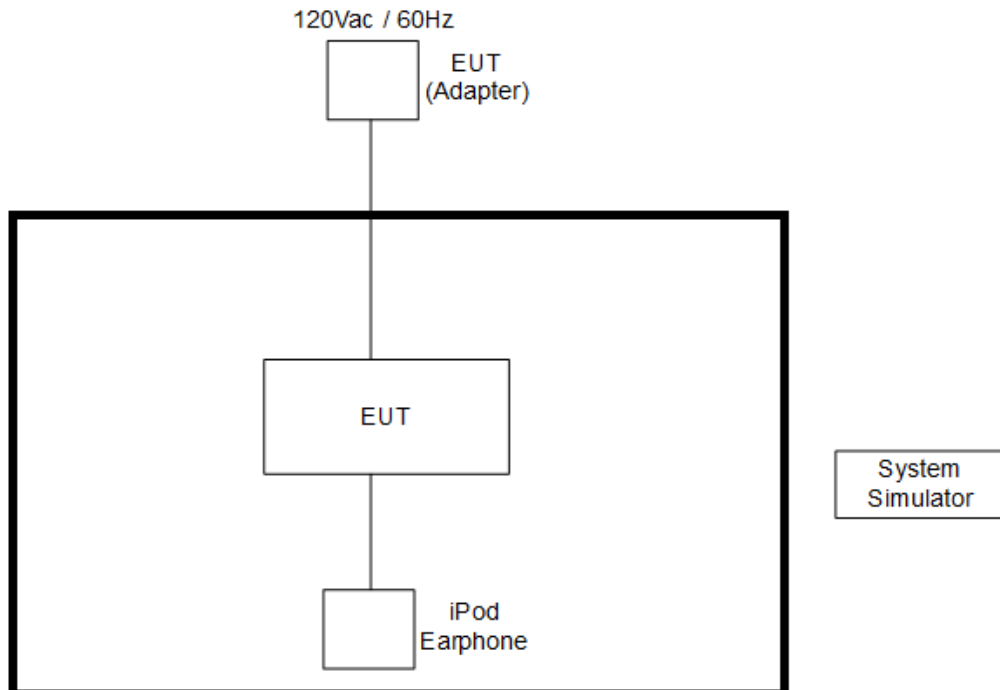





### 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A


### 3 Conducted Test Result

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2 Test Setup

##### 3.2.1 Conducted Output Power

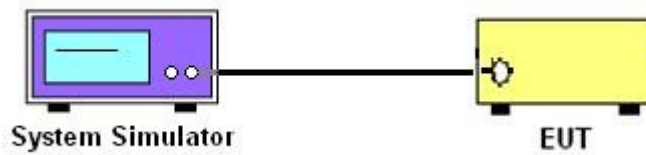

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and ERP/EIRP

#### 3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

## 4 Radiated Spurious Emission


### 4.1 Radiated Test Items

#### 4.1.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.2 Test Setup

For radiated test from 30MHz to 1GHz

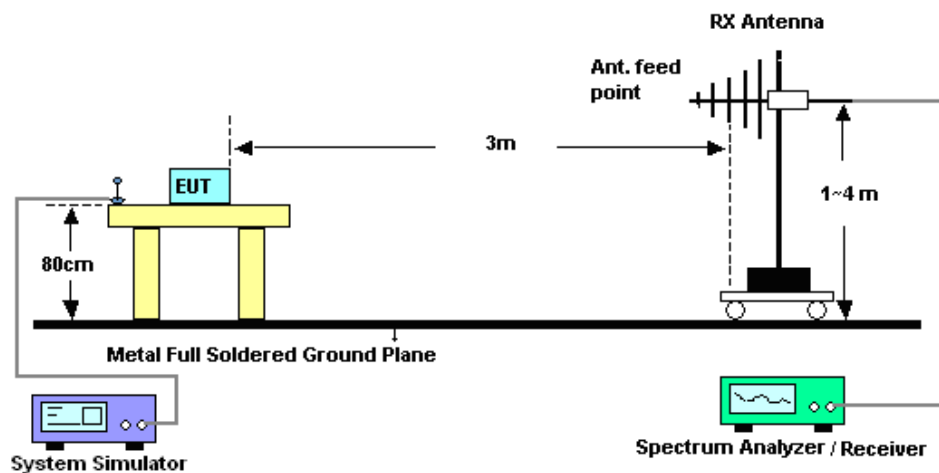

For radiated test above 1GHz

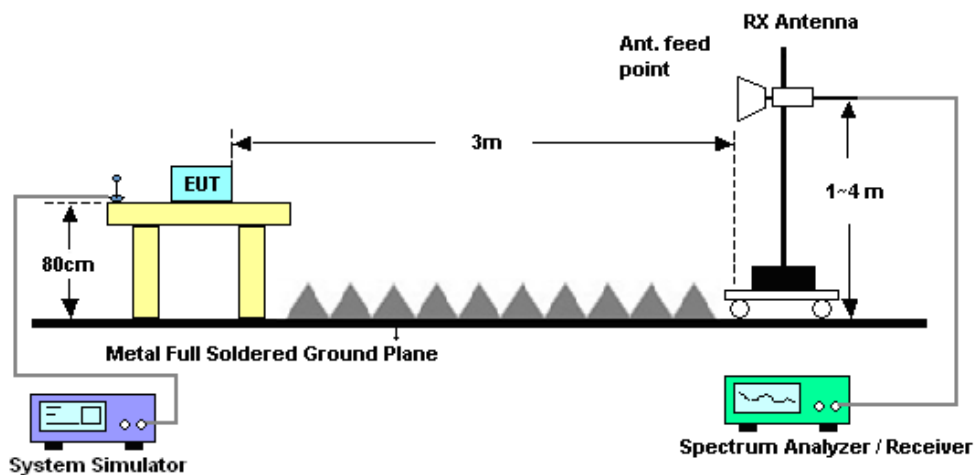

#### 4.1.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.2 Field Strength of Spurious Radiation Measurement

### 4.2.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	Sonoma-Instrument	310 N	187282	10MHz~1GHz	Dec. 31, 2015	Jan. 11, 2016~ Jan. 16, 2016	Dec. 30, 2016	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D	37059	30MHz~1GHz	Dec. 29, 2015	Jan. 11, 2016~ Jan. 16, 2016	Dec. 28, 2016	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 21, 2015	Jan. 11, 2016~ Jan. 16, 2016	Dec. 20, 2016	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 02, 2015	Jan. 11, 2016~ Jan. 16, 2016	Nov. 01, 2016	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Jan. 11, 2016~ Jan. 16, 2016	Nov. 01, 2016	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP140349	N/A	Nov. 17, 2015	Jan. 11, 2016~ Jan. 16, 2016	Nov. 16, 2016	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103A	161075	10MHz~1GHz	Apr. 09, 2015	Jan. 11, 2016~ Jan. 16, 2016	Apr. 08, 2016	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Jan. 05, 2016	Jan. 11, 2016~ Jan. 16, 2016	Jan. 04, 2017	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 11, 2016~ Jan. 16, 2016	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jan. 11, 2016~ Jan. 16, 2016	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0-360 degre	N/A	Jan. 11, 2016~ Jan. 16, 2016	N/A	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	Apr. 22, 2015	Jan. 11, 2016~ Jan. 16, 2016	Apr. 21, 2016	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2015	Jan. 11, 2016~ Jan. 16, 2016	May 21, 2016	Radiation (03CH12-HY)
Base Station	Agilent	E5515C	MY50266977	GSM/GPRS/WC DMA	May 14, 2015	Dec. 03, 2015 ~ Jan. 15, 2016	May 13, 2016	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.10
---	------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	22.38	22.33	22.40	22.55	22.43	22.30	22.47	22.52	22.50
HSDPA Subtest-1	22.01	22.16	22.06	22.23	22.10	22.05	22.00	22.02	22.11
HSDPA Subtest-2	22.02	22.11	22.04	22.08	22.08	22.04	22.01	22.04	22.08
HSDPA Subtest-3	21.54	21.56	21.84	21.73	21.50	21.50	21.56	21.90	21.60
HSDPA Subtest-4	21.52	21.58	21.75	21.62	21.60	21.55	21.55	21.88	21.54
HSUPA Subtest-1	22.06	22.27	22.00	22.11	22.17	22.08	22.11	22.25	22.07
HSUPA Subtest-2	20.89	20.87	20.73	21.46	21.48	21.37	20.66	20.93	20.44
HSUPA Subtest-3	21.00	21.03	21.39	21.05	21.14	21.02	21.18	21.46	21.23
HSUPA Subtest-4	21.21	21.05	21.46	21.44	21.43	21.44	20.76	20.97	20.54
HSUPA Subtest-5	22.12	22.26	22.38	22.07	22.09	22.05	22.00	22.48	22.22

### ERP/EIRP

Modes	WCDMA Band V (RMC 12.2Kbps)			WCDMA Band II (RMC 12.2Kbps)			WCDMA Band IV (RMC12.2Kbps)		
	4132 (Low)	4182 (Mid)	4233 (High)	9262 (Low)	9400 (Mid)	9538 (High)	1312 (Low)	1413 (Mid)	1513 (High)
Channel	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
Conducted Power (dBm)	22.38	22.33	22.4	22.55	22.43	22.3	22.47	22.52	22.5
Conducted Power (Watts)	0.1730	0.1710	0.1738	0.1799	0.1750	0.1698	0.1766	0.1786	0.1778
EIRP(dBm)	20.77	20.72	20.79	23.17	23.05	22.92	23.48	23.53	23.51
EIRP(Watts)	0.1194	0.1180	0.1199	0.2075	0.2018	0.1959	0.2228	0.2254	0.2244





## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-43.28	-13	-30.28	-52.93	-45.01	0.98	4.86	H
	2480	-52.65	-13	-39.65	-66.11	-54.56	1.28	5.34	H
	3304	-55.65	-13	-42.65	-71.57	-59.09	1.54	7.14	H
	1656	-43.22	-13	-30.22	-52.93	-44.95	0.98	4.86	V
	2480	-52.65	-13	-39.65	-66.11	-54.56	1.28	5.34	V
	3304	-55.67	-13	-42.67	-71.57	-59.11	1.54	7.14	V
Middle	1672	-41.53	-13	-28.53	-51.25	-43.21	0.99	4.82	H
	2512	-50.34	-13	-37.34	-63.91	-52.31	1.29	5.41	H
	3344	-55.48	-13	-42.48	-71.13	-59.09	1.56	7.31	H
	1672	-40.63	-13	-27.63	-49.77	-42.31	0.99	4.82	V
	2512	-50.83	-13	-37.83	-64.19	-52.8	1.29	5.41	V
	3344	-57.07	-13	-44.07	-72.48	-60.68	1.56	7.31	V
Highest	1696	-40.52	-13	-27.52	-50.41	-42.12	1.00	4.75	H
	2536	-49.83	-13	-36.83	-63.42	-51.81	1.30	5.43	H
	3392	-54.10	-13	-41.10	-69.83	-57.9	1.57	7.52	H
	1696	-40.60	-13	-27.60	-49.78	-42.2	1.00	4.75	V
	2536	-50.23	-13	-37.23	-62.71	-52.21	1.30	5.43	V
	3392	-56.61	-13	-43.61	-72.14	-60.41	1.57	7.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-51.97	-13	-38.97	-69.39	-58.55	1.67	8.24	H
	5555	-54.03	-13	-41.03	-75.74	-61.1	2.66	9.72	H
	7410	-47.62	-13	-34.62	-75.94	-56.78	2.46	11.62	H
	3704	-52.77	-13	-39.77	-70.08	-59.35	1.67	8.24	V
	5555	-52.24	-13	-39.24	-74.04	-59.31	2.66	9.72	V
	7410	-47.49	-13	-34.49	-75.41	-56.65	2.46	11.62	V
Middle	3763	-49.92	-13	-36.92	-67.67	-56.55	1.69	8.32	H
	5639	-53.80	-13	-40.80	-75.53	-60.85	2.71	9.76	H
	7522	-47.63	-13	-34.63	-75.67	-57.02	2.42	11.81	H
	3763	-48.72	-13	-35.72	-66.18	-55.35	1.69	8.32	V
	5639	-51.28	-13	-38.28	-73.2	-58.33	2.71	9.76	V
	7522	-47.51	-13	-34.51	-75.34	-56.9	2.42	11.81	V
Highest	3812	-53.84	-13	-40.84	-72.66	-60.51	1.70	8.37	H
	5723	-52.81	-13	-39.81	-74.63	-59.85	2.75	9.79	H
	7627	-48.84	-13	-35.84	-76.33	-58.33	2.39	11.88	H
	3812	-52.23	-13	-39.23	-69.6	-58.9	1.70	8.37	V
	5723	-48.08	-13	-35.08	-70.79	-55.12	2.75	9.79	V
	7627	-48.19	-13	-35.19	-75.67	-57.68	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-43.78	-13	-30.78	-59.83	-49.88	1.58	7.68	H
	5135	-54.53	-13	-41.53	-75.19	-61.82	2.41	9.70	H
	6850	-51.03	-13	-38.03	-76.08	-59.01	2.64	10.62	H
	3427	-46.11	-13	-33.11	-61.93	-52.21	1.58	7.68	V
	5135	-51.83	-13	-38.83	-72.74	-59.12	2.41	9.70	V
	6850	-50.16	-13	-37.16	-75.97	-58.14	2.64	10.62	V
Middle	3462	-42.47	-13	-29.47	-58.97	-48.71	1.59	7.83	H
	5198	-54.14	-13	-41.14	-74.88	-61.39	2.45	9.70	H
	6927	-50.93	-13	-37.93	-76.27	-59.03	2.61	10.71	H
	3462	-45.23	-13	-32.23	-61.42	-51.47	1.59	7.83	V
	5198	-53.53	-13	-40.53	-74.64	-60.78	2.45	9.70	V
	6927	-50.31	-13	-37.31	-76.27	-58.41	2.61	10.71	V
Highest	3504	-42.69	-13	-29.69	-59.58	-49.09	1.61	8.00	H
	5254	-55.67	-13	-42.67	-75.97	-62.89	2.48	9.70	H
	7011	-49.97	-13	-36.97	-75.68	-58.21	2.59	10.82	H
	3504	-43.96	-13	-30.96	-60.47	-50.36	1.61	8.00	V
	5254	-54.58	-13	-41.58	-75.23	-61.8	2.48	9.70	V
	7011	-49.35	-13	-36.35	-75.55	-57.59	2.59	10.82	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.