



TESTING CERT #3478.01



TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Brand Name	Intel® Dual Band Wireless-AC 8265
Model Name	8265D2W
Serial Number	TA#: J10070-002 WF MAC: 34:13:E8:53:75:00 BT MAC: 34:13:E8:53:75:04 (see section 4)
FCC/IC ID	FCC ID: PD98265D2 IC ID: 1000M-8265D2
Antenna type	SkyCross WIMAX/WLAN Reference Antenna
Hardware/Software Version	HW: WsP1216 cfg15.2SD Op SW: 99.0.19.1
Date of Sample Receipt	2016-04-27
Date of Test	2016-05-12
Features	802.11 a/b/g/n/ac Wireless LAN + BT 4.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15E RSS 247 issue 1 (see section 1)
---------------------	---

Test Report number	160321-02.TR06
Revision Control	Rev. 00

The test results relate only to the samples tested.

The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by

Reviewed by

Olivier FARGANT
(RF Test Lead)

Jose M. FORTES
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab
425 rue de Goa – Cargo B6 – 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees.....	3
3. Environmental Conditions.....	3
4. Test samples.....	4
5. EUT features	4
6. Remarks and comments.....	4
7. Test Verdicts summary.....	5
8. Document Revision History	5
Annex A. Test & System Description	6
A.1 TEST CONDITIONS	6
A.2 MEASUREMENT SYSTEM	6
A.3 TEST EQUIPMENT LIST.....	7
A.4 MEASUREMENT UNCERTAINTY EVALUATION.....	7
Annex B. Test Results.....	8
B.1 TEST RESULTS FOR DYNAMIC FREQUENCY SELECTION (DFS)	8
Annex C. Photographs.....	10

1. Standards, reference documents and applicable test methods

1. FCC 47 CFR part 15 - Subpart E – Unlicensed National Information Infrastructure Devices.
2. FCC OET KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02 – Compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.
3. RSS-247 Issue 1 — Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices.
4. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA).
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm listed by the FCC, with Designation Number FR0011.
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by IC, with IC Assigned Code 1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22°C ± 2°C
Humidity	38% ± 5%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of reception
#01	160321-02.S02	Wi-Fi/BT Module	8265D2W	WF MAC: 34:13:E8:53:75:00, BT MAC: 34:13:E8:53:75:04	2016-04-27
	160321-02.S12	Socket	D2W	8882-043	2016-04-27
	160321-01.S11	Extender board	PCB00495	ASS00495-001 4950414-028	2016-04-14
	15051101.S11	AC/DC Adapter	SPU60-102	087411640 1350	2016-01-07
	160107-01.S16	Desktop	DELL OptiPlex 960	07990499 1249	2015-05-12

5. EUT features

These are the detailed bands and modes supported by the Equipment Under Test:

802.11b/g/n	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac	5.2GHz (5150.0 – 5250.0 MHz)
	5.3GHz (5250.0 – 5350.0 MHz)
	5.6GHz (5470.0 – 5725.0 MHz)
	5.8GHz (5725.0 – 5850.0 MHz)
BDR/EDR/BLE 4.2	2.4GHz (2400.0 – 2483.5 MHz)

6. Remarks and comments

1. The operating mode of the sample is client only without radar detection.
2. The maximum antenna gain is 5dBi.

7. Test Verdicts summary

FCC part	RSS part	Test name	Verdict
15.407 (h) (2)	RSS-247 part 6.3	Non Occupancy Period	NA
		DFS Detection Threshold	NA
		Channel Availability Check Time	NA
		Uniform Spreading	NA
		U-NII Detection Bandwidth	NA
		DFS Detection Threshold	NA
		Channel Closing Transmission Time	P
		Channel Move Time	P
		U-NII Detection Bandwidth	NA

P: Pass
 F: Fail
 NM: Not Measured
 NA: Not Applicable

8. Document Revision History

Revision #	Date	Modified by	Details
Rev. 00	2016-06-14	A. Del Real	First Issue

Annex A. Test & System Description

A.1 Test Conditions


The EUT power supply was provided by the Extender test board, $V_{nominal} = 3.3 V_{DC}$. The Intel ProSet Wifi software was used to set the EUT in normal operation mode.

A.2 Measurement system

Measurements were performed using the following setups, made in accordance to the general provisions of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02.

The EUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. A second laptop computer was used to configure the access point on the DFS channels; a channel was selected randomly by the access point. To enable channel loading, this second laptop computer is also used as a server host, a video was streamed on the EUT.

Conducted Setup

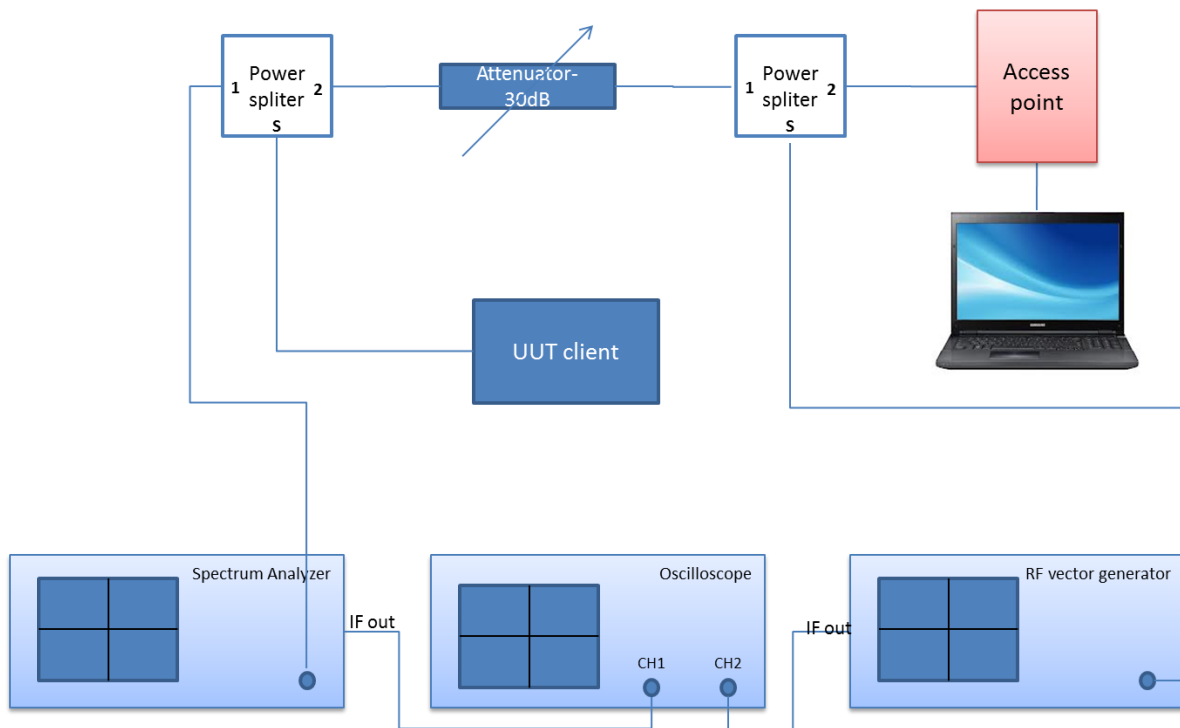

A.3 Test Equipment List

Conducted Setup

ID#	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0033	Spectrum analyzer	FSV40	101072	Rohde & Schwarz	2016-01-20	2018-01-20
0017	Vector Signal Generator	SMJ100A	100458	Rohde & Schwarz	2015-10-21	2017-10-21
0312	Digital Oscilloscope	RTE1052	101135	Rohde & Schwarz	2015-05-25	2017-03-25
0261	Access point*	Aironet IOS	FTX134390GV	Cisco	NA	NA
-	Laptop DELL	Lattitude 5440	-	DELL	NA	NA

*: FCC ID: LDK102061

A.4 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:

Measurement type	Uncertainty
Time domain	± 1 ms

Annex B. Test Results

B.1 Test results for Dynamic Frequency Selection (DFS)

Test procedure

The conducted setup shown on §A.2 *Measurement system* was used to measure the Channel Closing Transmission Time and Channel Move Time.

The *Client Device* (UUT) is set up to associate with the *Master Device*. The channel loading test file is streamed from the *Master Device* to the *Client Device*. Radar test waveforms generated with the vector signal generator are injected into the *Master* on the operating channel above the DFS detection threshold. Observations are done on the transmissions of the UUT at the end of the radar burst on the Operating Channel for a duration greater than 10 seconds. We measured the transmissions from the UUT during the observation time, after radar detection occurs the Channel Move Time and Channel Closing Transmission Time are recorded.

Results tables

Tested Channel: 52, Frequency: 5260 MHz

Test item	Results	Limit
Channel Closing Transmission Time	< 73.794 ms	200 ms + an aggregate of 60ms over remaining 10 seconds period.
Channel Move Time	73.794 ms	10 seconds

Results screenshot

