

WCDMA

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 41.144$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(8.32, 8.32, 8.32) @ 1880 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/UMTS Band II/Main

Ant/ch9800_0mm/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.939 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/UMTS Band II/Main

Ant/ch9800_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 1.22 W/kg

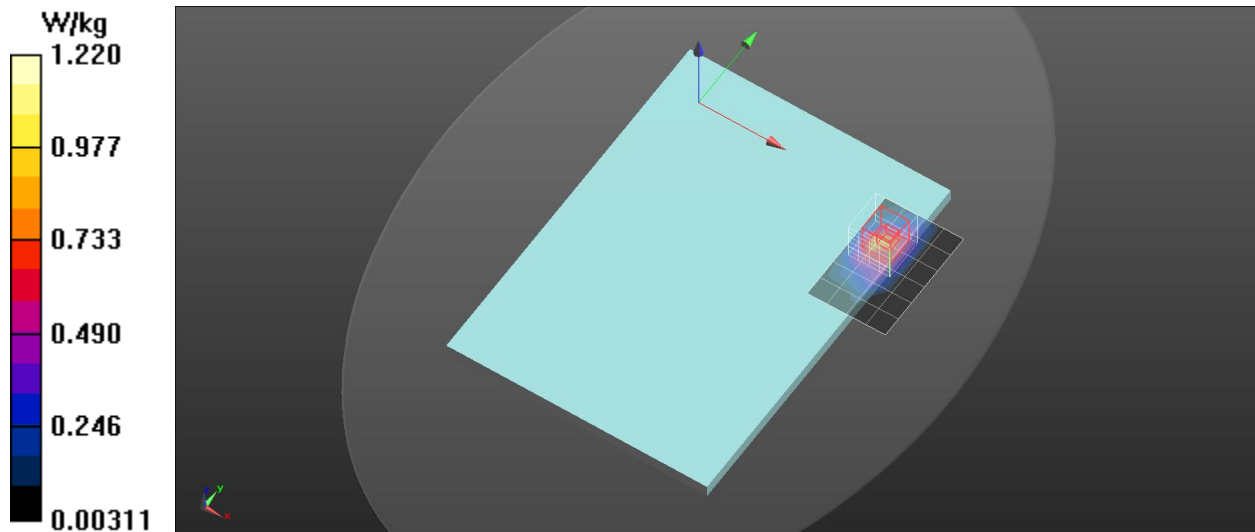

WCDMA

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(8.63, 8.63, 8.63) @ 1752.6 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/UMTS Band IV/Main

Ant/ch1738_0mm/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.853 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/UMTS Band IV/Main

Ant/ch1738_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 37.7%

Maximum value of SAR (measured) = 1.09 W/kg

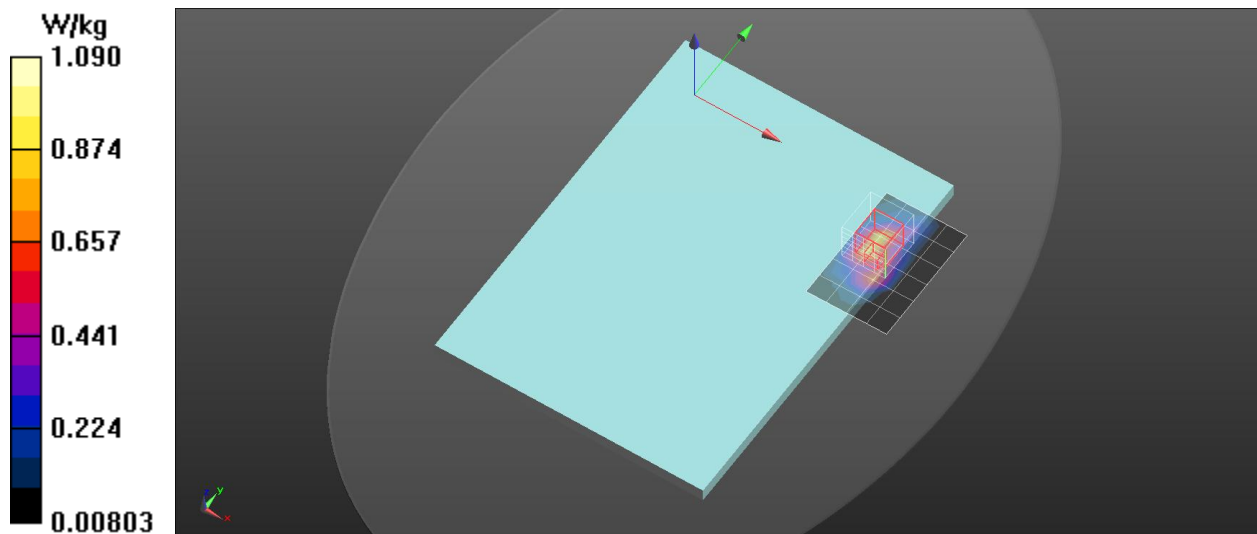

WCDMA

Frequency: 836.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.403$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(9.96, 9.96, 9.96) @ 836.4 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/UMTS Band V/Main

Ant/ch4407_0mm/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.463 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/UMTS Band V/Main

Ant/ch4407_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 36.7%

Maximum value of SAR (measured) = 0.384 W/kg

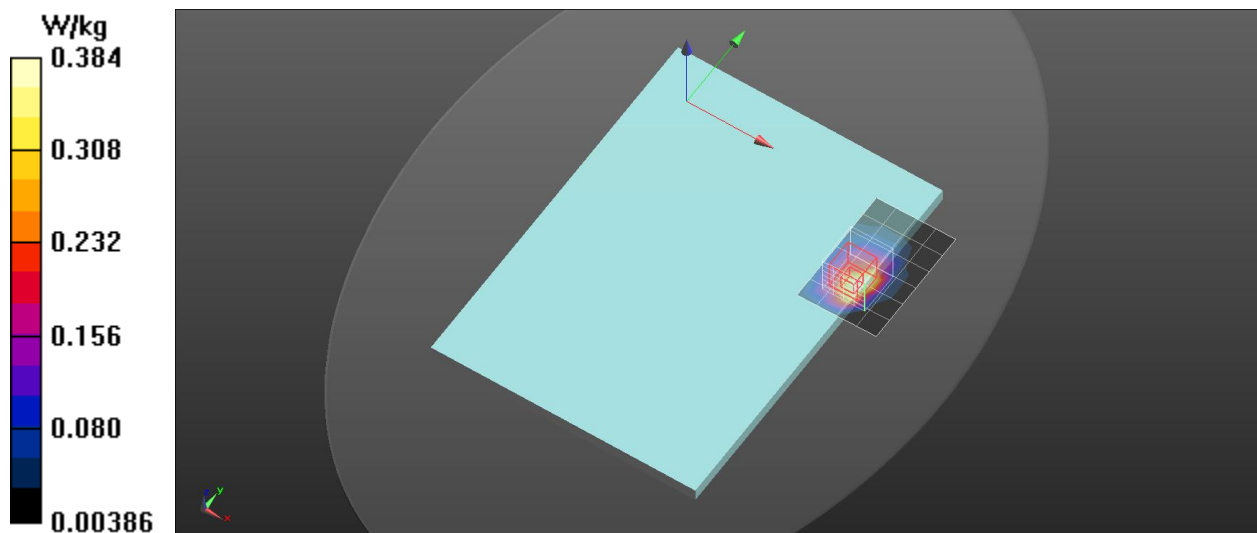

LTE

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 41.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(8.32, 8.32, 8.32) @ 1860 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 2/Main

Ant/ch18700_0mm 1RB/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.848 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 2/Main

Ant/ch18700_0mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 1.10 W/kg

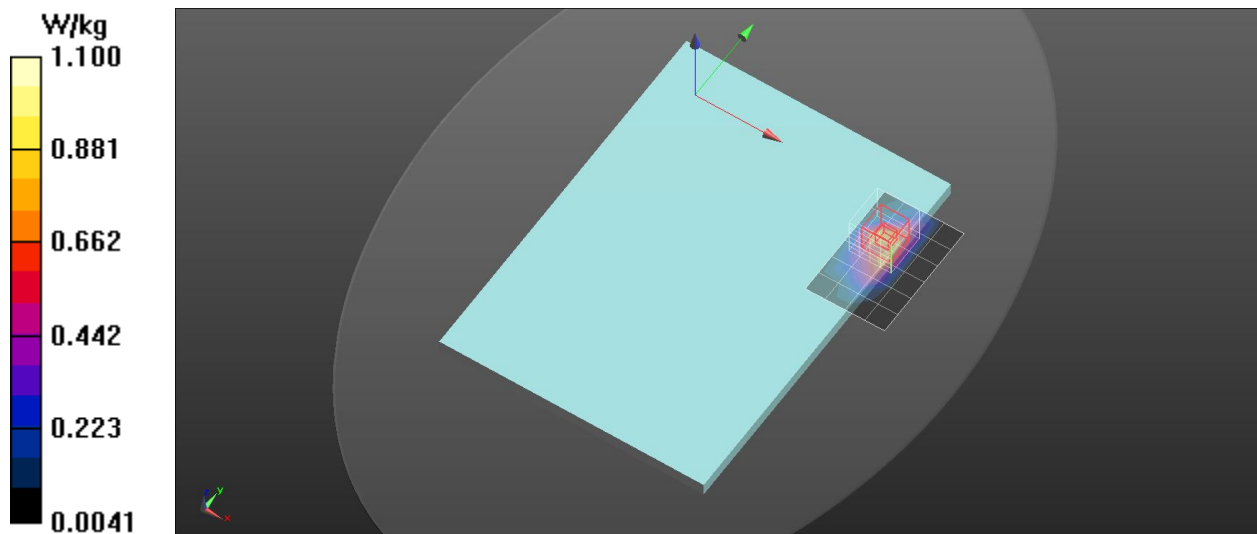

LTE

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 41.746$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(8.63, 8.63, 8.63) @ 1732.5 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 4/Main

Ant/ch20175_0mm 1RB/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.756 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 4/Main

Ant/ch20175_0mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 0.945 W/kg

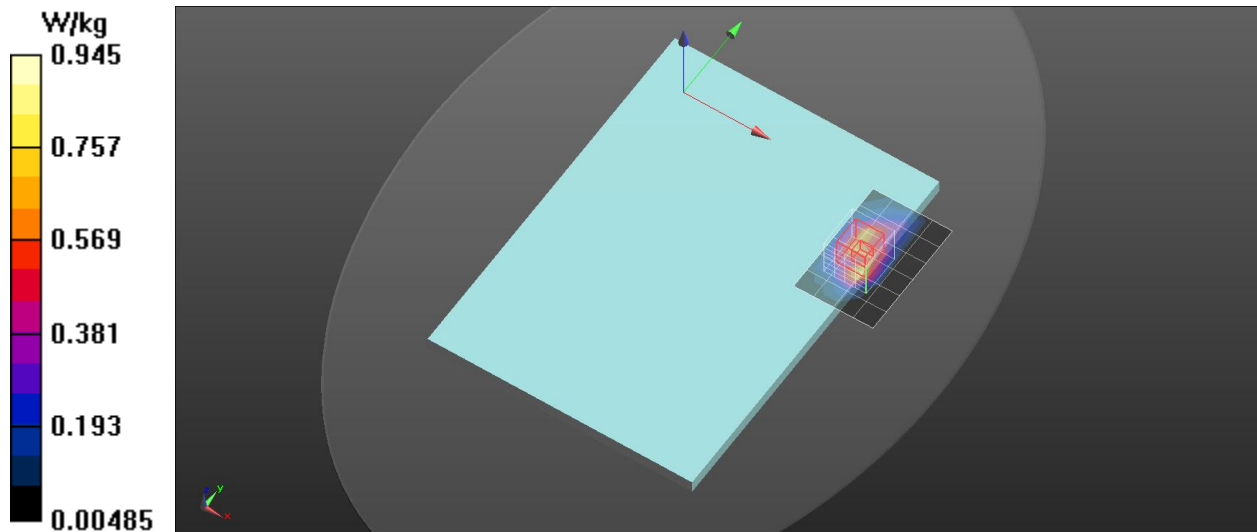

LTE

Frequency: 844 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 43.343$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(9.96, 9.96, 9.96) @ 844 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 5/Main

Ant/ch20600_0mm 1RB/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.411 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 5/Main

Ant/ch20600_0mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 36.3%

Maximum value of SAR (measured) = 0.378 W/kg

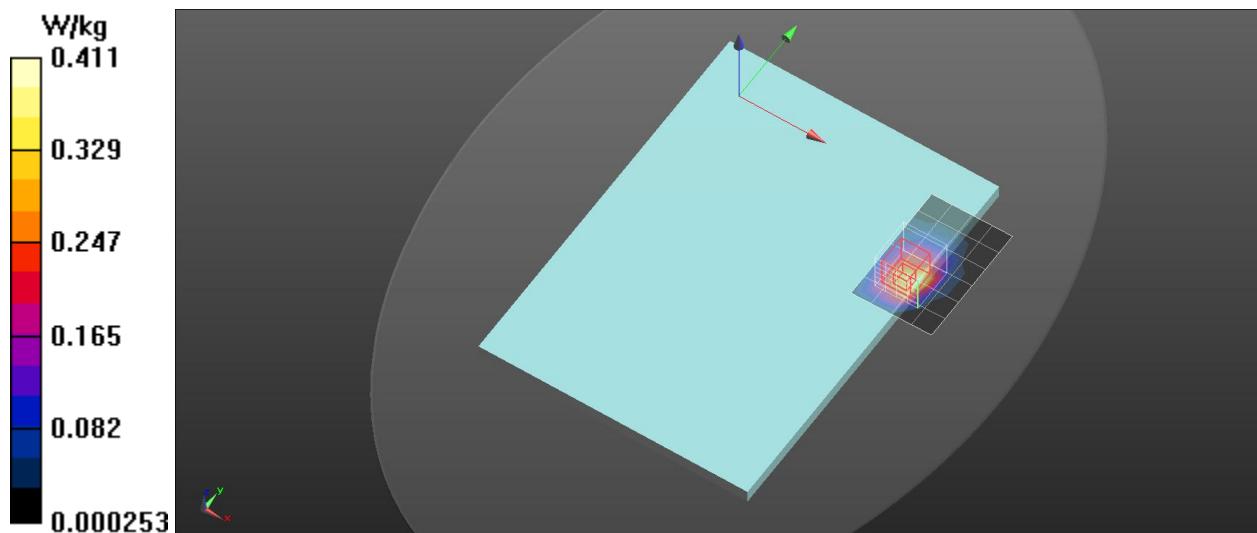

LTE

Frequency: 2560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 37.602$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(7.44, 7.44, 7.44) @ 2560 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor off/Notebook Computer/Tablet PC/Edge2/LTE Band 7/Main

Ant/ch21350_0mm 1RB/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.633 W/kg

P-Sensor off/Notebook Computer/Tablet PC/Edge2/LTE Band 7/Main

Ant/ch21350_0mm 1RB/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.280 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 37.7%

Maximum value of SAR (measured) = 0.976 W/kg

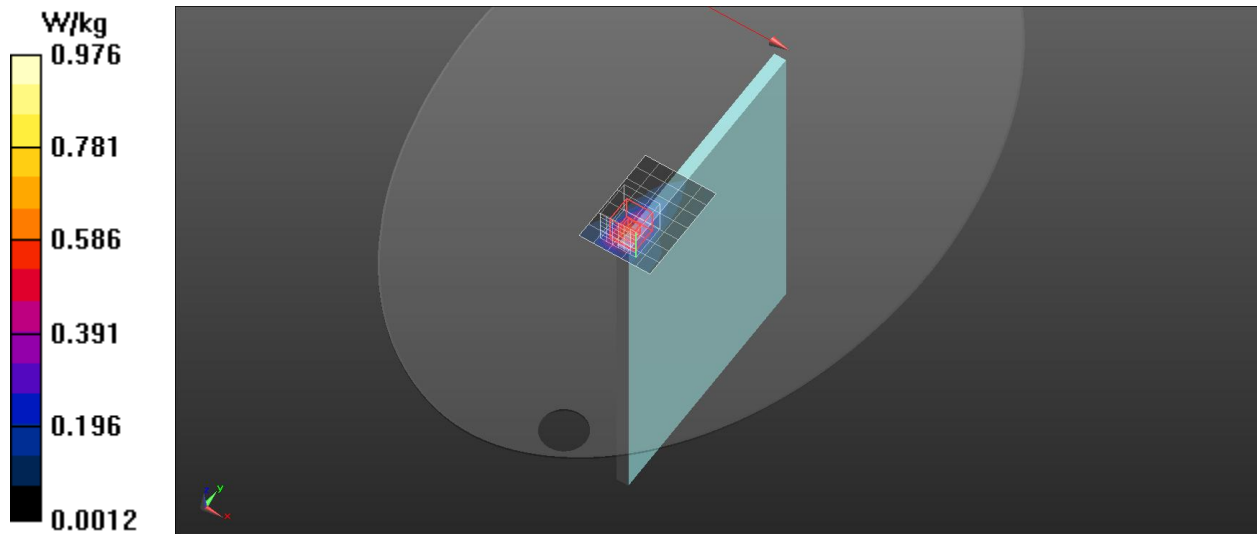

LTE

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 42.986$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(10.24, 10.24, 10.24) @ 707.5 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor off/Notebook Computer/Tablet PC/Edge1/LTE Band 12/Main

Ant/ch23095_17mm 1RB/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.164 W/kg

P-Sensor off/Notebook Computer/Tablet PC/Edge1/LTE Band 12/Main

Ant/ch23095_17mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.578 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 0.194 W/kg

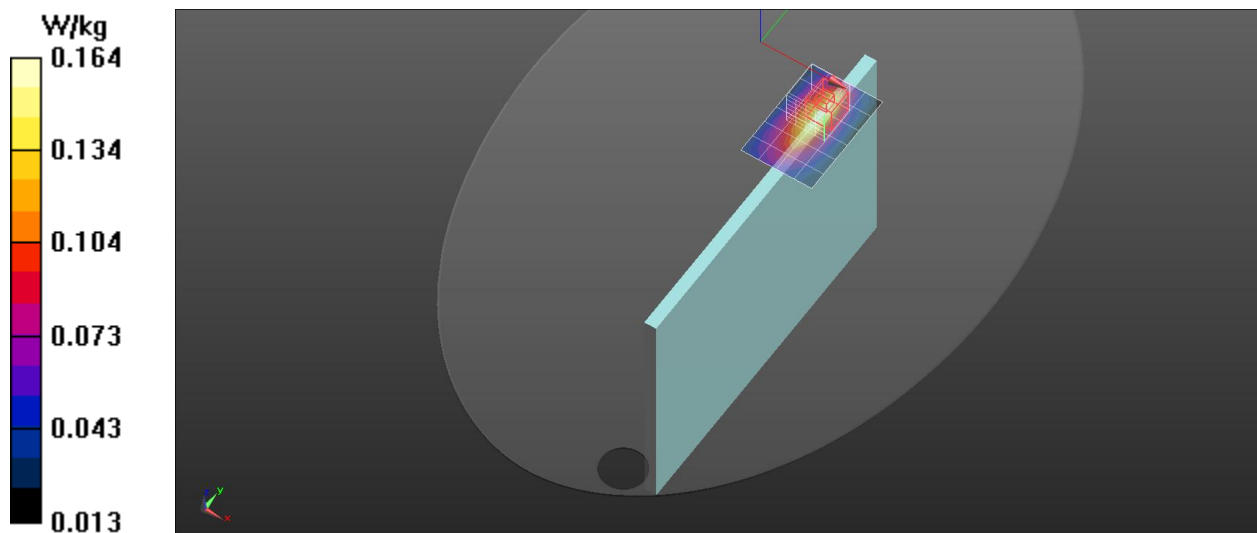

LTE

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 41.983$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(10.24, 10.24, 10.24) @ 782 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor off/Notebook Computer/Tablet PC/Edge2/LTE Band 13/Main

Ant/ch23230_0mm 1RB/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.373 W/kg

P-Sensor off/Notebook Computer/Tablet PC/Edge2/LTE Band 13/Main

Ant/ch23230_0mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.83 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.4%

Maximum value of SAR (measured) = 0.370 W/kg

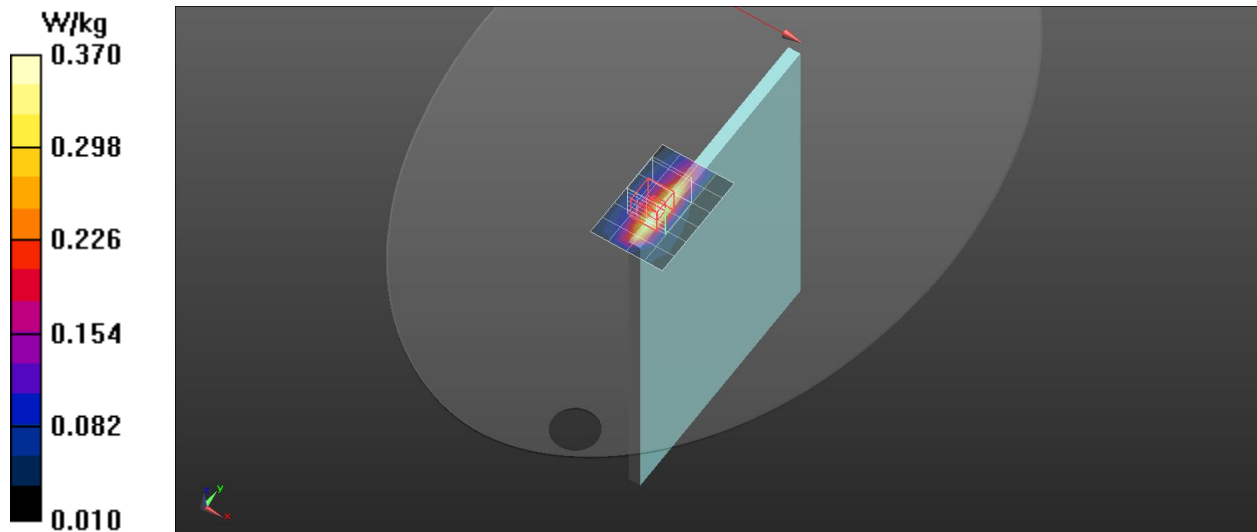

LTE

Frequency: 709 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C


Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.854 \text{ S/m}$; $\epsilon_r = 42.955$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(10.24, 10.24, 10.24) @ 709 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor off/Notebook Computer/Tablet PC/Edge1/LTE Band 17/Main Ant/ch23780_17mm 1RB/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.197 W/kg

P-Sensor off/Notebook Computer/Tablet PC/Edge1/LTE Band 17/Main Ant/ch23780_17mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.887 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.225 W/kg
SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.101 W/kg
 Smallest distance from peaks to all points 3 dB below = 14.4 mm
 Ratio of SAR at M2 to SAR at M1 = 68.3%
 Maximum value of SAR (measured) = 0.200 W/kg

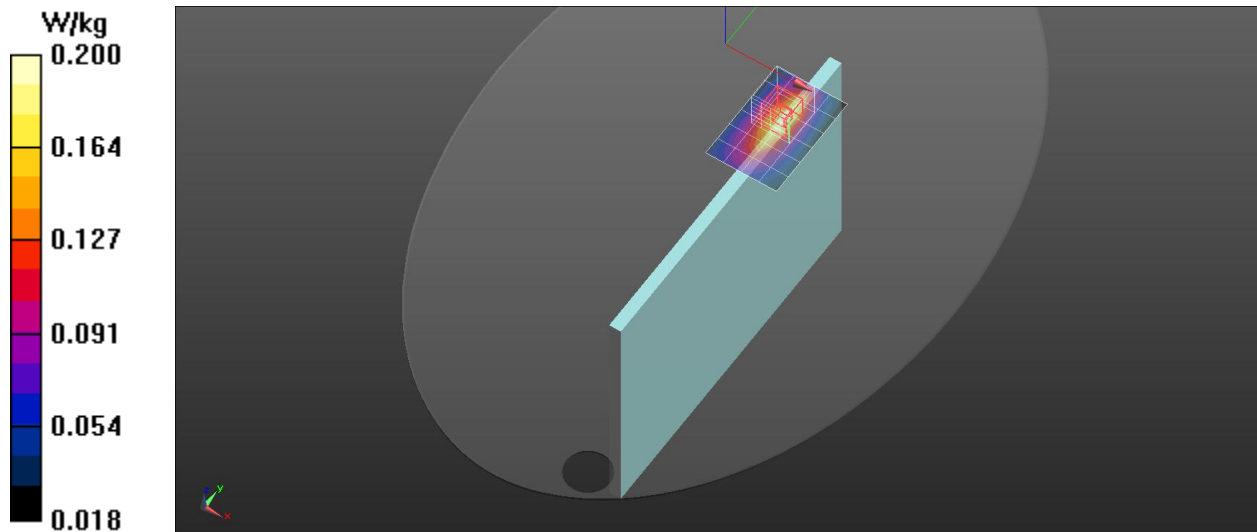

LTE

Frequency: 831 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (extrapolated): $f = 831 \text{ MHz}$; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 41.218$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(9.96, 9.96, 9.96) @ 831 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 26/Main

Ant/ch26865_0mm 1RB/Area Scan (5x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.259 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 26/Main

Ant/ch26865_0mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 34%

Maximum value of SAR (measured) = 0.406 W/kg

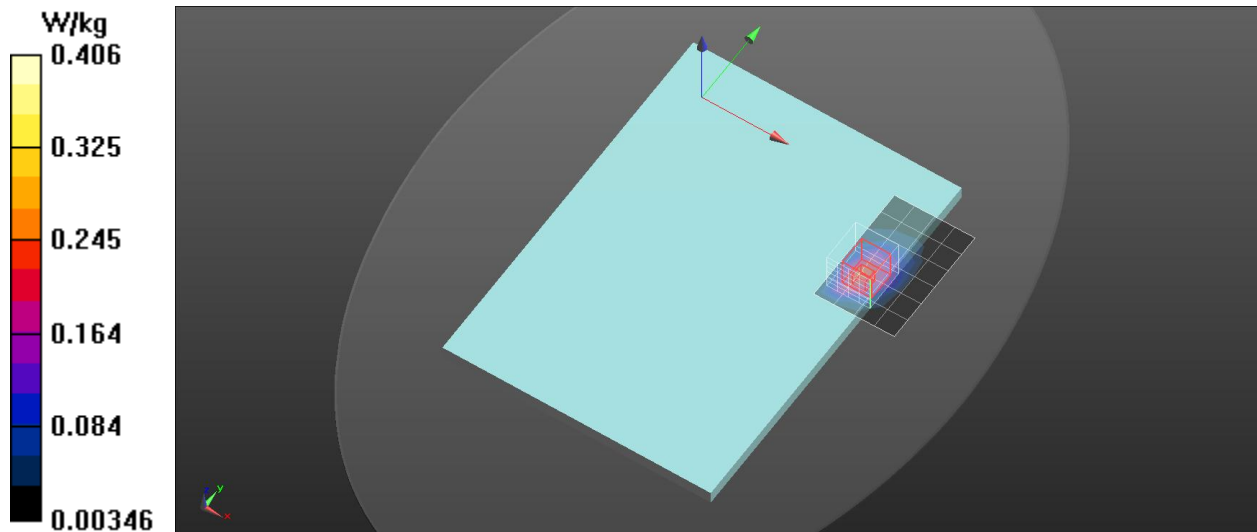

LTE

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.691$ S/m; $\epsilon_r = 40.74$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(7.92, 7.92, 7.92) @ 2310 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Edge2/LTE Band 30/Main

Ant/ch27710_0mm 1RB correct/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.98 W/kg

P-Sensor on/Notebook Computer/Tablet PC/LTE Band 30/Main

Ant/ch27710_0mm 1RB correct/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.228 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 34.6%

Maximum value of SAR (measured) = 2.19 W/kg

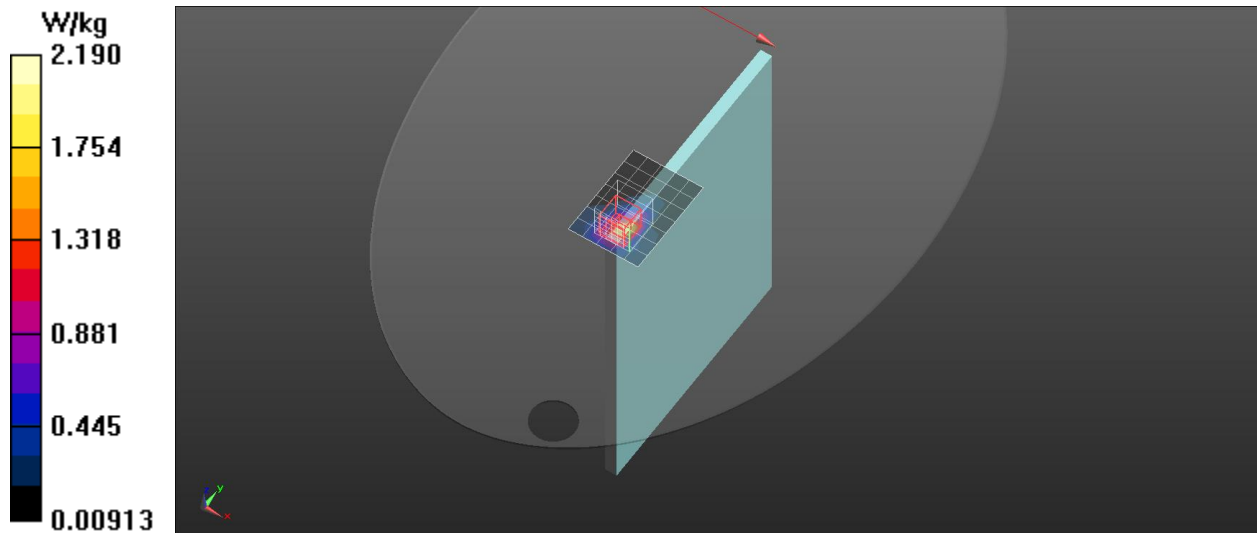

LTE

Frequency: 2593 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C


Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 37.427$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(7.44, 7.44, 7.44) @ 2593 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor off/Notebook Computer/Tablet PC/Edge2/LTE Band 41/Main Ant/ch40620_17mm 1RB/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.186 W/kg

P-Sensor off/Notebook Computer/Tablet PC/Edge2/LTE Band 41/Main Ant/ch40620_17mm 1RB/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.883 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.438 W/kg
SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.058 W/kg
Smallest distance from peaks to all points 3 dB below = 7 mm
Ratio of SAR at M2 to SAR at M1 = 36.1%
Maximum value of SAR (measured) = 0.308 W/kg

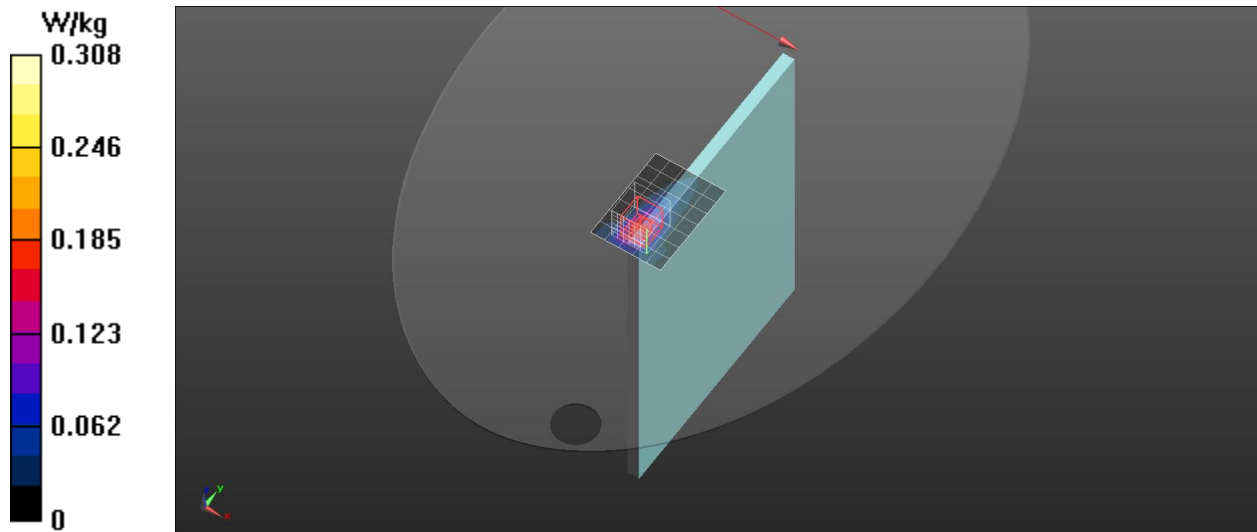

LTE

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 41.66$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2020/6/4
- Probe: EX3DV4 - SN7369; ConvF(8.63, 8.63, 8.63) @ 1745 MHz; Calibrated: 2020/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 66/Main

Ant/ch132322_0mm 1RB/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.797 W/kg

P-Sensor on/Notebook Computer/Tablet PC/Rear/LTE Band 66/Main

Ant/ch132322_0mm 1RB/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 0.841 W/kg

