



# FCC RADIO TEST REPORT

**FCC ID** : PU5-TP00132C  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : TP00132C  
**Applicant** : Wistron Corporation  
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist,  
New Taipei City 221, Taiwan  
**Manufacturer** : Lenovo PC HK Limited.  
23/F, Lincoln House, Taikoo Place, 979 King's  
Road, Quarry Bay, Hong Kong, China  
**Standard** : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Fibocom L860-GL-16 tested inside of Lenovo Notebook Computer.

The product was received on Dec. 09, 2022 and testing was performed from Jan. 20, 2023 to Jan. 31, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	7
1.5 Applicable Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	8
2.3 Support Unit used in test configuration .....	9
2.4 Frequency List of Low/Middle/High Channels.....	9
<b>3 Conducted Test Result .....</b>	<b>10</b>
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP .....	11
<b>4 Radiated Test Items .....</b>	<b>12</b>
4.1 Measuring Instruments.....	12
4.2 Test Setup .....	12
4.3 Test Result of Radiated Test.....	13
4.4 Field Strength of Spurious Radiation Measurement .....	14
<b>5 List of Measuring Equipment.....</b>	<b>15</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>16</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FG2D0922A	01	Initial issue of report	Apr. 07, 2023



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	-	See Note
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	-	See Note
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	23.83 dB under limit at 1693.000 MHz

**Note:**

- For host device, Radiated Spurious Emission, Effective Radiated Power and Effective Isotropic Radiated Power are verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: L860-GL-16)

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- Please refer to the section " Uncertainty of Evaluation " for measurement uncertainty.

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Cindy Liu

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00132C
FCC ID	PU5-TP00132C
Sample 1	EUT with AVX/ Ethertronics Antenna
Sample 2	EUT with LUXSHARE-ICT Antenna
Integrated WLAN Module	Brand Name: Intel Model Name: AX211D2W FCC ID: PD9AX211D2
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom L860-GL-16 tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
Main Antenna	Brand Name	AVX/ Ethertronics	Peak gain (dBi)	WCDMA Band II: 1.92 WCDMA Band IV: 1.56 WCDMA Band V: 0.33
	Part number	SA31F29287AA	Type	PIFA
	Brand Name	LUXSHARE-ICT	Peak gain (dBi)	WCDMA Band II: 0.20 WCDMA Band IV: 1.10 WCDMA Band V: -3.00
	Part number	SA31F29290AA	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx Frequency</b>	<b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
<b>Rx Frequency</b>	<b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>WCDMA:</b> Band V: 23.80 dBm Band II: 23.75 dBm Band IV: 23.67 dBm
<b>Type of Modulation</b>	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY (TAF Code: 1190)
Test Engineer	Tommy Lee and Hank Chen
Temperature (°C)	21~25
Relative Humidity (%)	51~56
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	<b>Sporton Site No.</b>
	03CH16-HY
Test Engineer	Andy Yang, Karl Hou and Steven Wu
Temperature (°C)	20~25
Relative Humidity (%)	50~65

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Adapter 1 and Sample 1.

### 2.2 Connection Diagram of Test System

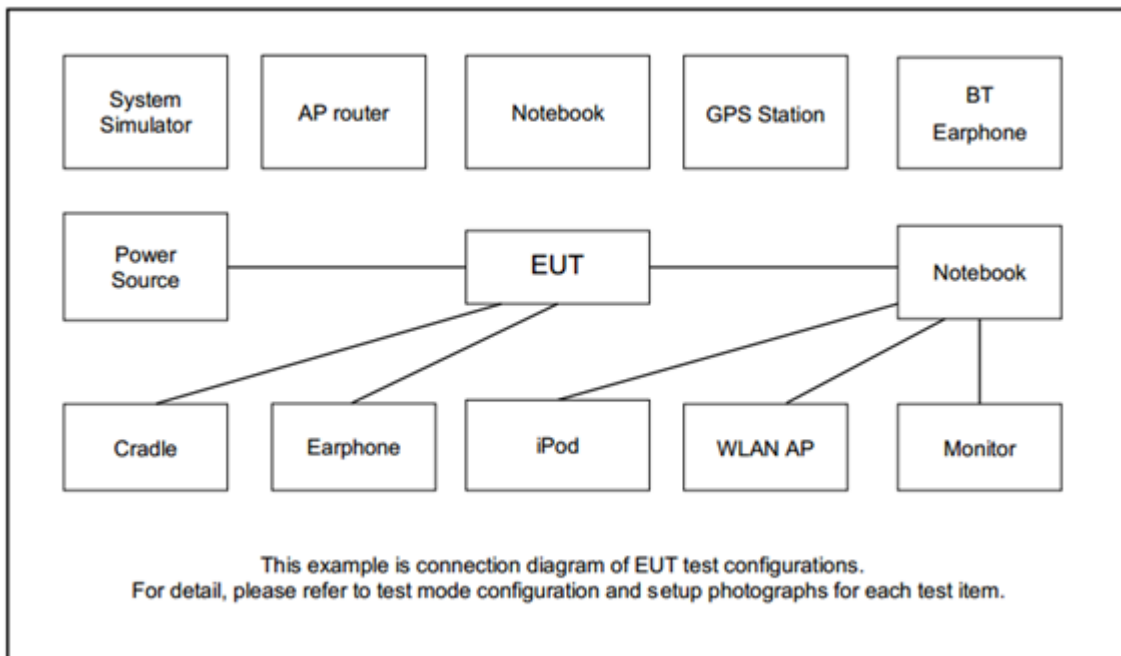





## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Lenovo	TS300-01MS21-8S	N/A	Shielded, 1.2 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

### 3 Conducted Test Result

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power



##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


For radiated test below 30MHz

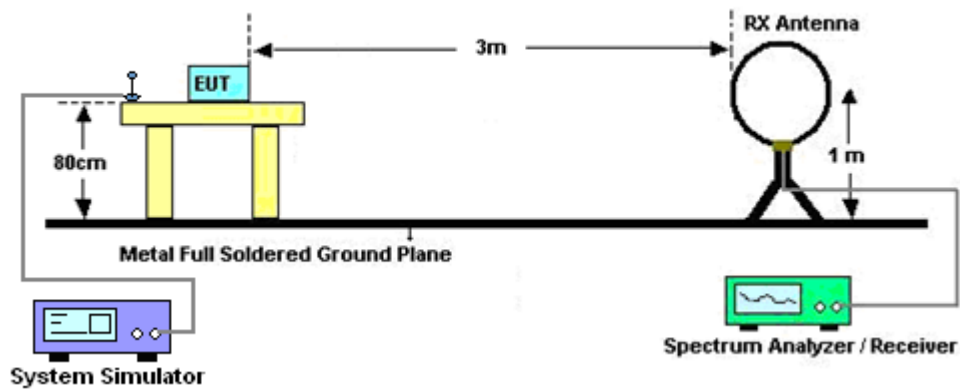


For radiated test from 30MHz to 1GHz

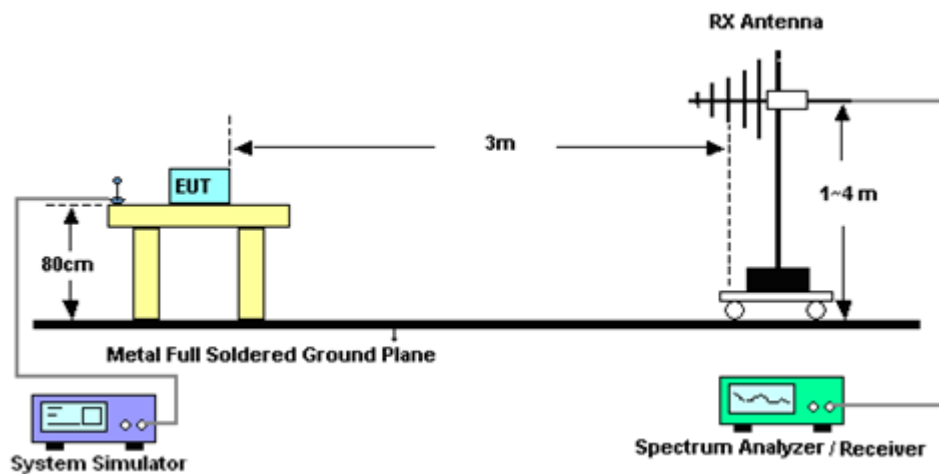

For radiated test from 1GHz to 18GHz

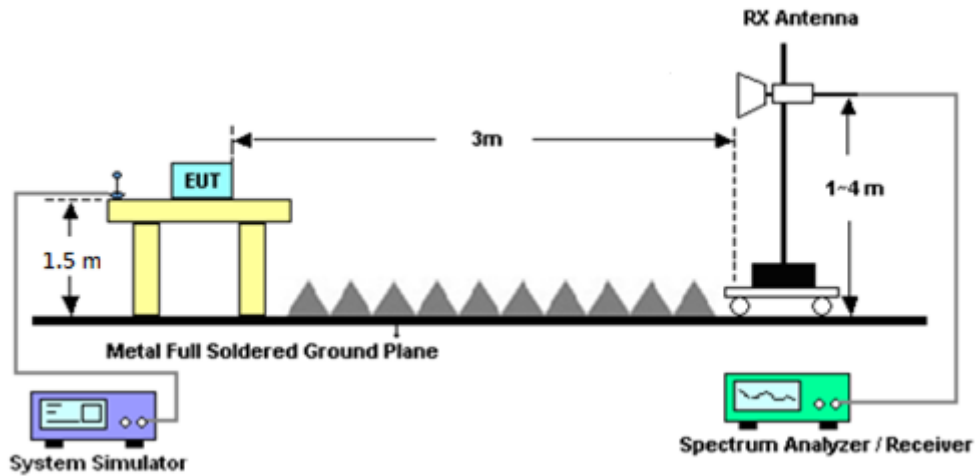

For radiated test above 18GHz

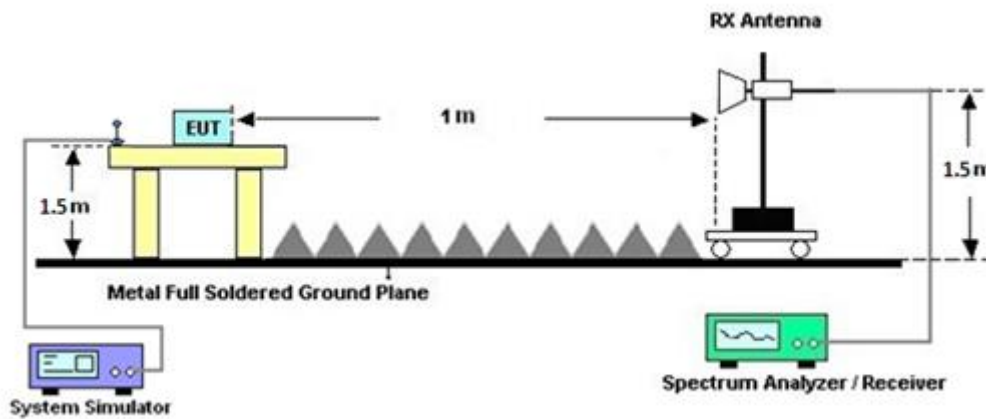

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 18, 2022	Jan. 26, 2023	Mar. 17, 2023	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 27, 2022	Jan. 26, 2023	Sep. 26, 2023	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 02, 2022	Jan. 26, 2023	Aug. 01, 2023	Conducted (TH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Jan. 20, 2023~Jan. 31, 2023	Sep. 19, 2023	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz-40GHz	Nov. 24, 2022	Jan. 20, 2023~Jan. 31, 2023	Nov. 23, 2023	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 07, 2022	Jan. 20, 2023~Jan. 31, 2023	Oct. 06, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 28, 2022	Jan. 20, 2023~Jan. 31, 2023	Jun. 27, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18-40G	Jan. 03, 2023	Jan. 20, 2023~Jan. 31, 2023	Jan. 02, 2024	Radiation (03CH16-HY)
Signal Generator	Agilent	MG3694C	163401	0.1Hz~40GHz	Feb. 13, 2022	Jan. 20, 2023~Jan. 31, 2023	Feb. 12, 2023	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz to 1GHz	Feb. 06, 2022	Jan. 20, 2023~Jan. 31, 2023	Feb. 05, 2023	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 08, 2022	Jan. 20, 2023~Jan. 31, 2023	Oct. 07, 2023	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1G~18GHz	Aug. 09, 2022	Jan. 20, 2023~Jan. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 10, 2022	Jan. 20, 2023~Jan. 31, 2023	Mar. 09, 2023	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Jul. 04, 2022	Jan. 20, 2023~Jan. 31, 2023	Jul. 03, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1-18GHz	Dec. 26, 2022	Jan. 20, 2023~Jan. 31, 2023	Dec. 25, 2023	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 09, 2022	Jan. 20, 2023~Jan. 31, 2023	Dec. 08, 2023	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A	MY57290111	3Hz~26.5GHz	Dec. 15, 2022	Jan. 20, 2023~Jan. 31, 2023	Dec. 14, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	805935/4	N/A	Aug. 09, 2022	Jan. 20, 2023~Jan. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	802434/4	N/A	Aug. 09, 2022	Jan. 20, 2023~Jan. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5757	N/A	Aug. 09, 2022	Jan. 20, 2023~Jan. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jan. 20, 2023~Jan. 31, 2023	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 20, 2023~Jan. 31, 2023	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 20, 2023~Jan. 31, 2023	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 20, 2023~Jan. 31, 2023	N/A	Radiation (03CH16-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.98 dB
-------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.54 dB
-------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.79 dB
-------------------------------------------------------------------------	---------





### Appendix A. Test Results of Conducted Test

#### Conducted Output Power(Average power & ERP/EIRP)

WCDMA Band V Maximum Average Power [dBm] (GT - LC = 0.33 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.80	23.73	23.69	21.98	0.1578
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 1.92 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.65	23.63	23.75	25.67	0.3690
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 1.56 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.58	23.60	23.67	25.23	0.3334
Limit	EIRP < 1W			Result	Pass



## Appendix B. Test Results of Radiated Test

### WCDMA 850

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-36.92	-13	-23.92	-51.12	-40.4	3.89	9.51	H
	2479	-54.90	-13	-41.90	-72.79	-58.5	4.81	10.56	H
	3305	-54.82	-13	-41.82	-75.71	-59.33	5.56	12.22	H
									H
									H
									H
									H
	1652	-38.22	-13	-25.22	-52.32	-41.7	3.89	9.51	V
	2479	-53.40	-13	-40.40	-71.28	-57	4.81	10.56	V
	3305	-55.04	-13	-42.04	-75.84	-59.55	5.56	12.22	V
									V
	Middle	1672	-37.11	-13	-24.11	-51.39	-40.68	3.91	9.63
2509		-49.46	-13	-36.46	-67.34	-53.13	4.84	10.65	H
3345		-54.89	-13	-41.89	-75.7	-59.52	5.60	12.38	H
									H
									H
									H
									H
1672		-37.32	-13	-24.32	-51.53	-40.89	3.91	9.63	V
2509		-51.64	-13	-38.64	-69.5	-55.31	4.84	10.65	V
3345		-55.43	-13	-42.43	-76.17	-60.06	5.60	12.38	V
									V
									V
								V	



Highest	1693	-36.83	-13	-23.83	-51.19	-40.5	3.93	9.76	H
	2539	-51.34	-13	-38.34	-69.49	-55.16	4.87	10.83	H
	3386	-55.51	-13	-42.51	-76.24	-60.2	5.64	12.47	H
									H
									H
									H
									H
	1693	-36.89	-13	-23.89	-51.21	-40.56	3.93	9.76	V
	2539	-54.27	-13	-41.27	-72.2	-58.09	4.87	10.83	V
	3386	-55.27	-13	-42.27	-75.94	-59.96	5.64	12.47	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1900**

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-53.82	-13	-40.82	-76.37	-60.19	5.93	12.30	H
	5557	-49.16	-13	-36.16	-77.18	-54.73	7.75	13.31	H
	7409	-42.22	-13	-29.22	-76.13	-44.7	8.72	11.20	H
									H
									H
									H
									H
	3704	-53.54	-13	-40.54	-76	-59.91	5.93	12.30	V
	5557	-49.48	-13	-36.48	-77.53	-55.05	7.75	13.31	V
	7409	-42.04	-13	-29.04	-76.21	-44.52	8.72	11.20	V
									V
									V
									V
									V
Middle	3760	-53.62	-13	-40.62	-76.47	-59.94	5.98	12.30	H
	5640	-49.21	-13	-36.21	-77.31	-54.88	7.81	13.48	H
	7520	-41.59	-13	-28.59	-76	-44.1	8.77	11.28	H
									H
									H
									H
									H
	3760	-53.73	-13	-40.73	-76.54	-60.05	5.98	12.30	V
	5640	-49.46	-13	-36.46	-77.55	-55.13	7.81	13.48	V
	7520	-41.02	-13	-28.02	-75.77	-43.53	8.77	11.28	V
									V
									V
									V
									V



Highest	3815	-53.28	-13	-40.28	-76.36	-59.52	6.03	12.27	H
	5722	-48.83	-13	-35.83	-77.21	-54.36	7.88	13.41	H
	7630	-41.49	-13	-28.49	-76.46	-44.33	8.82	11.66	H
									H
									H
									H
									H
	3815	-52.18	-13	-39.18	-75.25	-58.42	6.03	12.27	V
	5722	-49.12	-13	-36.12	-77.47	-54.65	7.88	13.41	V
	7630	-41.15	-13	-28.15	-76.35	-43.99	8.82	11.66	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1700**

WCDMA 1700									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-54.24	-13	-41.24	-75.79	-61.07	5.67	12.50	H
	5137	-49.61	-13	-36.61	-77.28	-54.54	7.55	12.47	H
	6849	-43.86	-13	-30.86	-75.83	-47.62	8.44	12.20	H
									H
									H
									H
									H
	3424	-54.22	-13	-41.22	-75.71	-61.05	5.67	12.50	V
	5137	-48.93	-13	-35.93	-76.42	-53.86	7.55	12.47	V
	6849	-43.97	-13	-30.97	-75.8	-47.73	8.44	12.20	V
									V
									V
									V
									V
Middle	3465	-53.80	-13	-40.80	-75.95	-60.56	5.71	12.47	H
	5197	-49.65	-13	-36.65	-77.22	-54.95	7.57	12.88	H
	6930	-43.45	-13	-30.45	-75.92	-46.89	8.50	11.94	H
									H
									H
									H
									H
	3465	-53.95	-13	-40.95	-76.04	-60.71	5.71	12.47	V
	5197	-49.18	-13	-36.18	-76.62	-54.48	7.57	12.88	V
	6930	-43.19	-13	-30.19	-75.71	-46.63	8.50	11.94	V
									V
									V
									V
									V



Highest	3505	-53.76	-13	-40.76	-76.01	-60.39	5.74	12.37	H
	5257	-49.01	-13	-36.01	-76.56	-54.64	7.60	13.23	H
	7010	-42.65	-13	-29.65	-75.61	-45.94	8.55	11.84	H
									H
									H
									H
									H
	3505	-54.02	-13	-41.02	-76.15	-60.65	5.74	12.37	V
	5257	-49.19	-13	-36.19	-76.65	-54.82	7.60	13.23	V
	7010	-42.87	-13	-29.87	-76.07	-46.16	8.55	11.84	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.