



Channel Bandwidth: 5MHz

Channel 40620 (2593.0MHz)


Frequency Range : 9kHz~1GHz

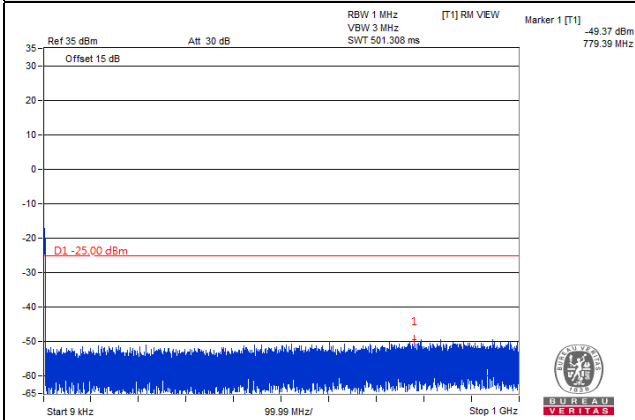

Frequency Range : 1GHz~3GHz

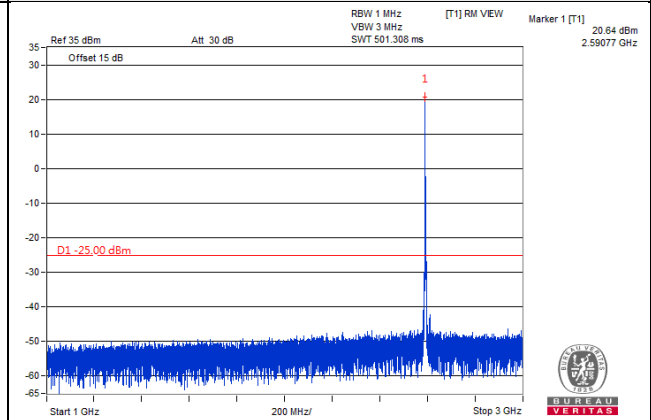

Frequency Range : 3GHz~27GHz

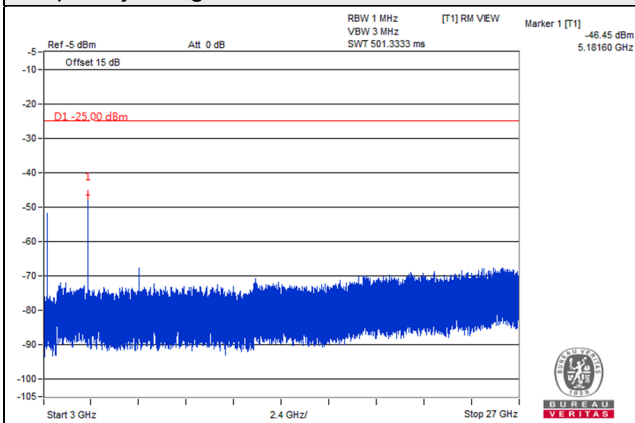


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 5MHz

Channel 41565 (2687.5MHz)


Frequency Range : 9kHz~1GHz

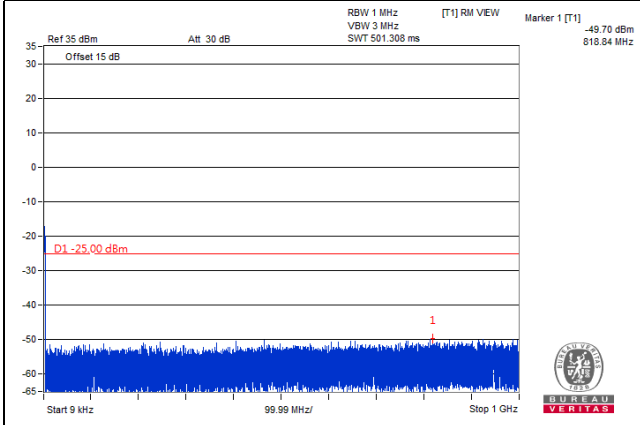

Frequency Range : 1GHz~3GHz

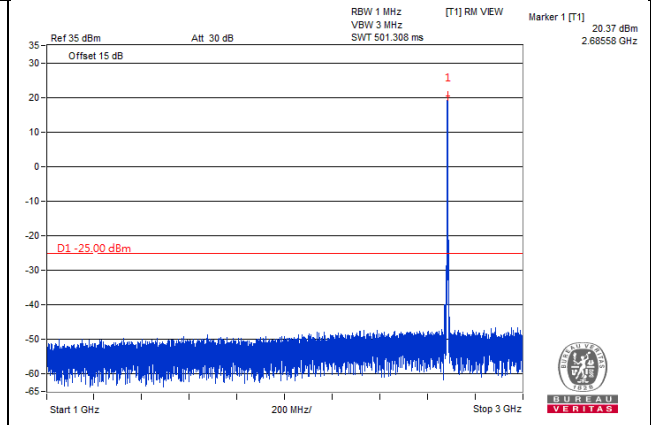

Frequency Range : 3GHz~27GHz

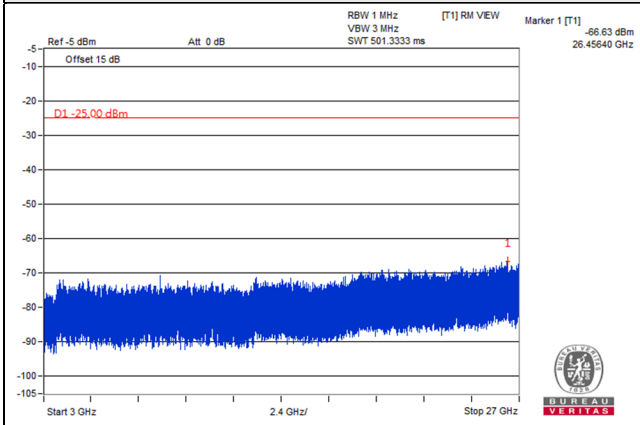


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 10MHz

Channel 39700 (2501.0MHz)


Frequency Range : 9kHz~1GHz

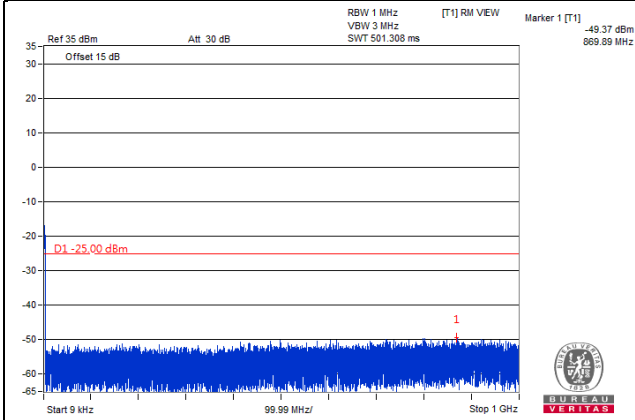

Frequency Range : 1GHz~3GHz

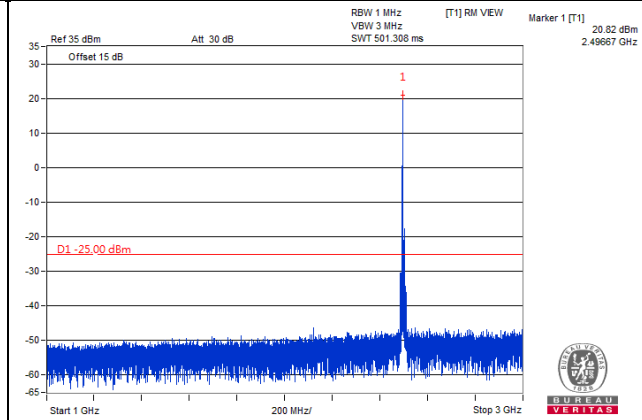

Frequency Range : 3GHz~27GHz

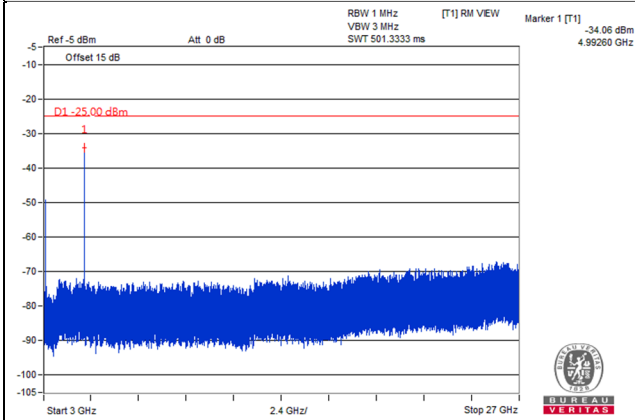


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 10MHz

Channel 40620 (2593.0MHz)


Frequency Range : 9kHz~1GHz

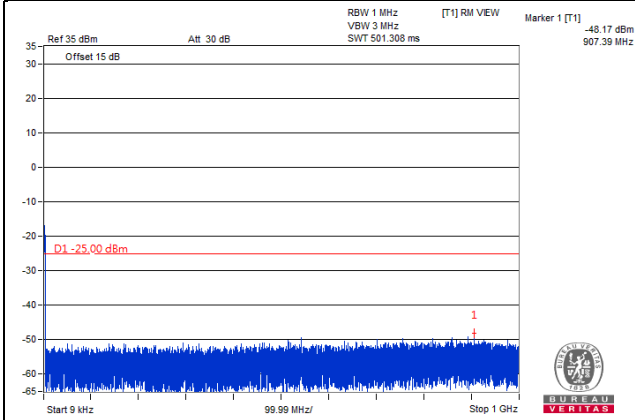

Frequency Range : 1GHz~3GHz

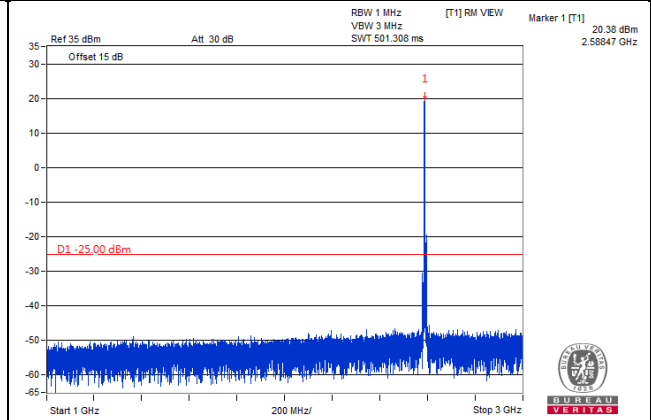

Frequency Range : 3GHz~27GHz

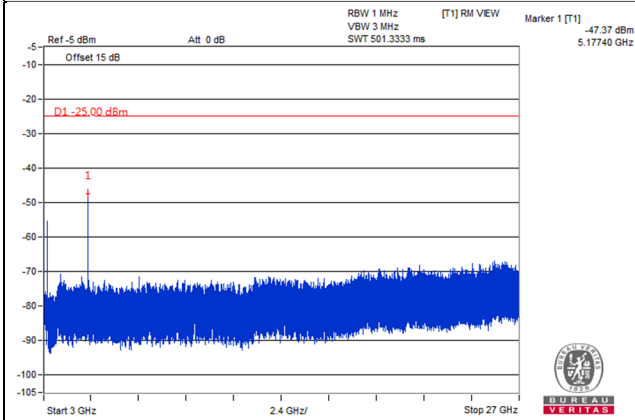


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 10MHz

Channel 41540 (2685.0MHz)


Frequency Range : 9kHz~1GHz

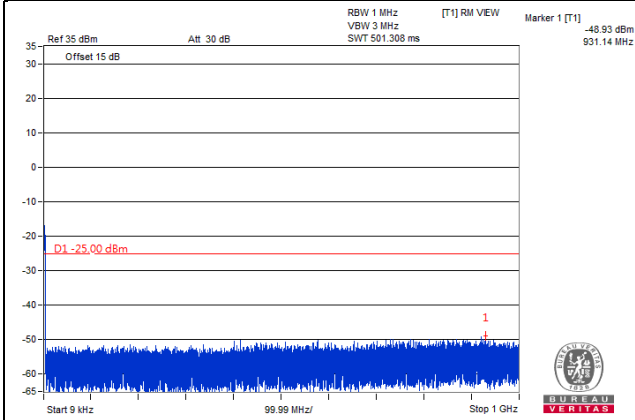

Frequency Range : 1GHz~3GHz

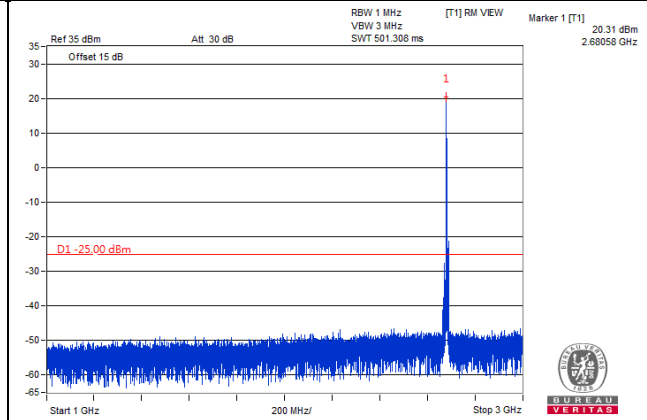

Frequency Range : 3GHz~27GHz

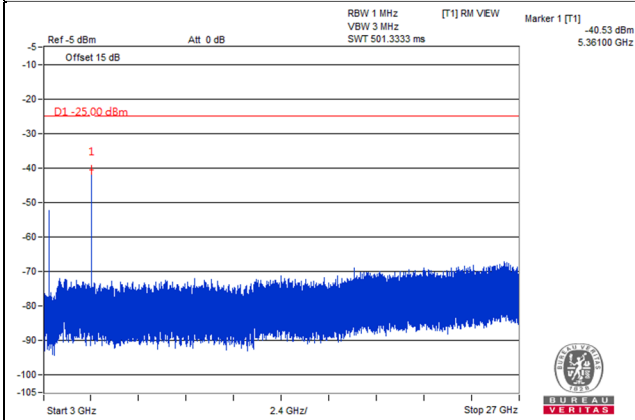


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 15MHz

Channel 39725 (2503.5MHz)


Frequency Range : 9kHz~1GHz

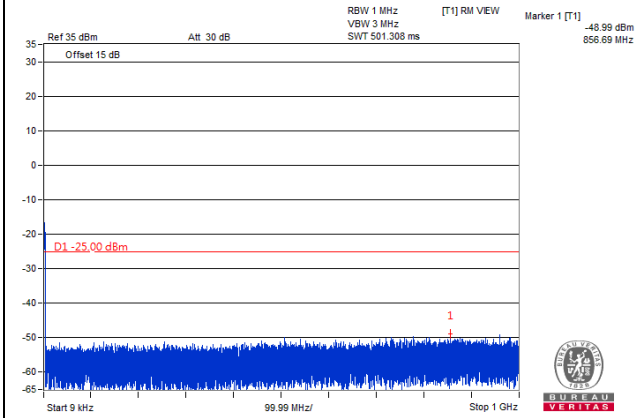

Frequency Range : 1GHz~3GHz

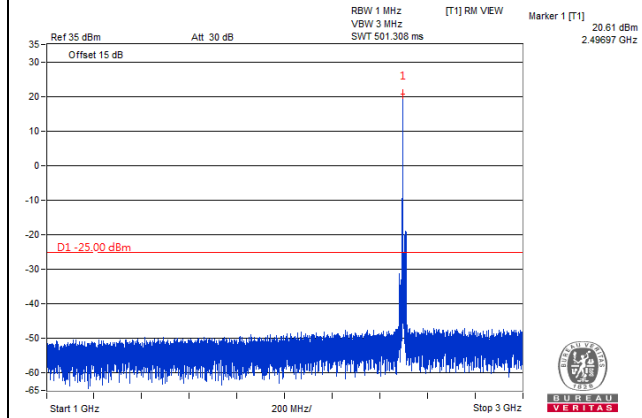

Frequency Range : 3GHz~27GHz

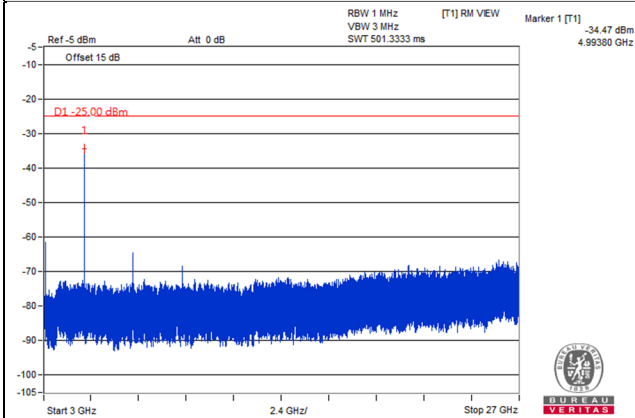


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 15MHz

Channel 40620 (2593.0MHz)


Frequency Range : 9kHz~1GHz

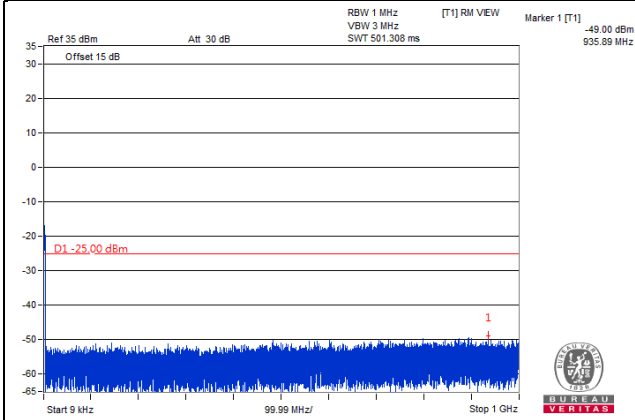

Frequency Range : 1GHz~3GHz

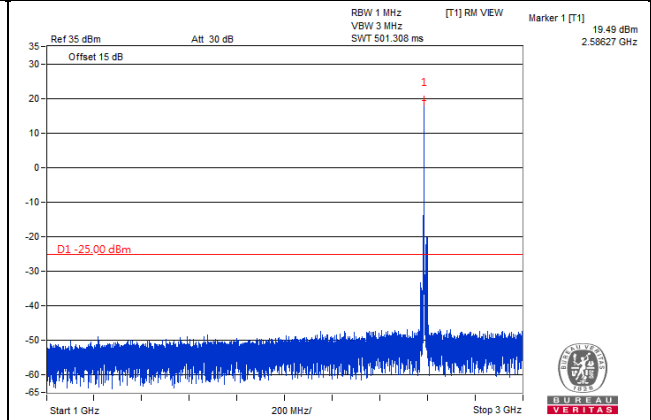

Frequency Range : 3GHz~27GHz

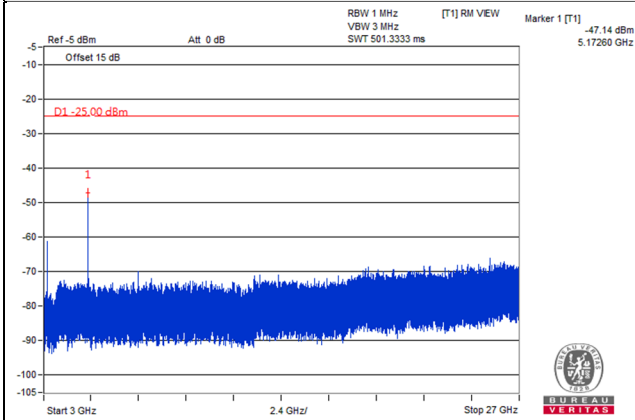


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 15MHz

Channel 41515 (2682.5MHz)


Frequency Range : 9kHz~1GHz

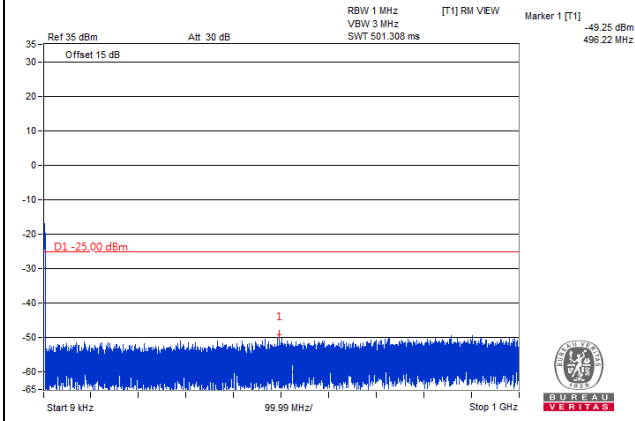

Frequency Range : 1GHz~3GHz

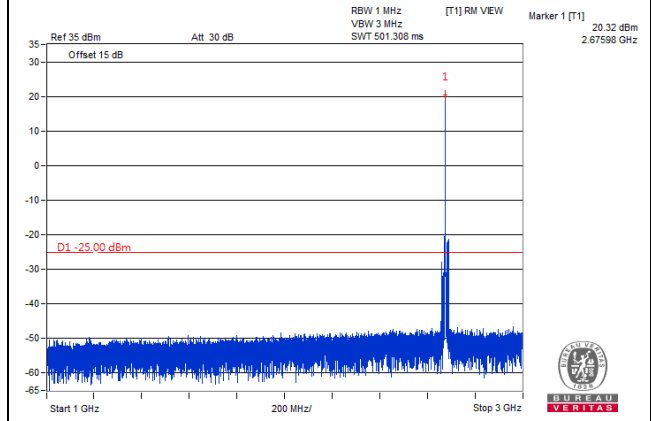

Frequency Range : 3GHz~27GHz

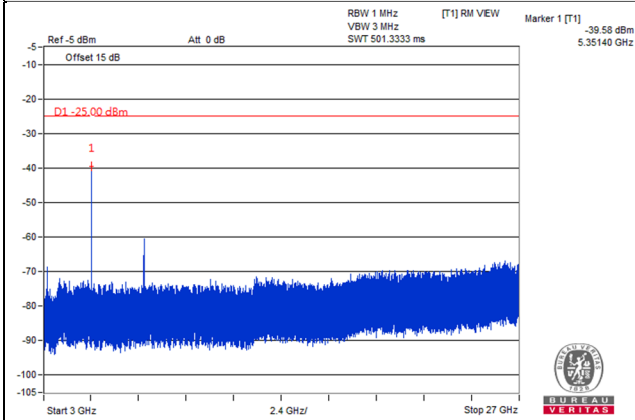


\*The 9kHz signal over the limit is from Spectrum.




Channel Bandwidth: 20MHz

Channel 39750 (2506.0MHz)


Frequency Range : 9kHz~1GHz

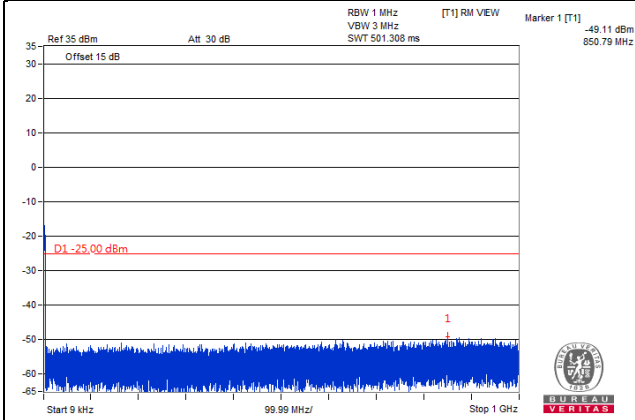

Frequency Range : 1GHz~3GHz

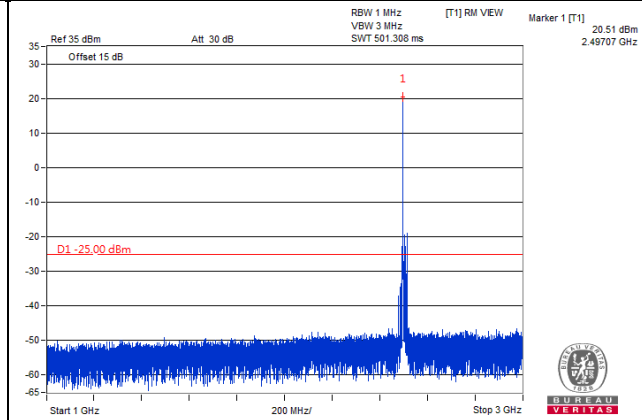

Frequency Range : 3GHz~27GHz

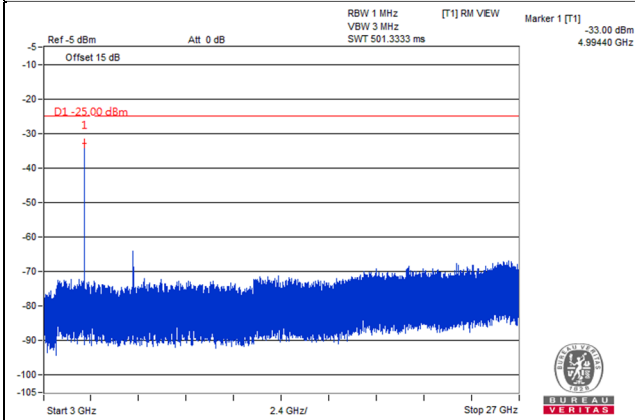


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 20MHz

Channel 40620 (2593.0MHz)


Frequency Range : 9kHz~1GHz

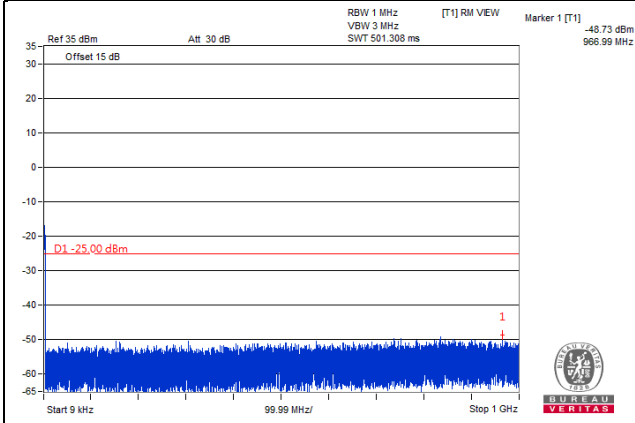

Frequency Range : 1GHz~3GHz

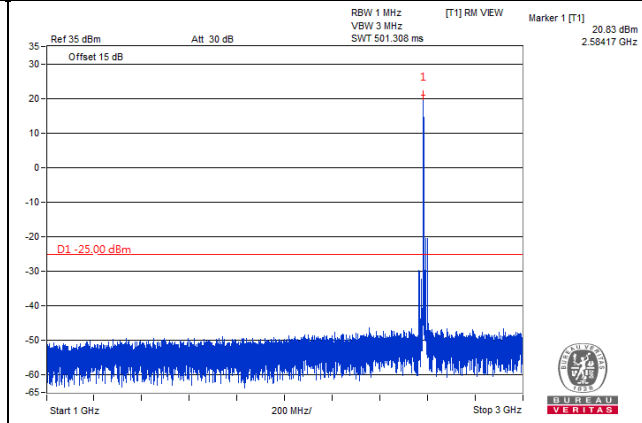

Frequency Range : 3GHz~27GHz

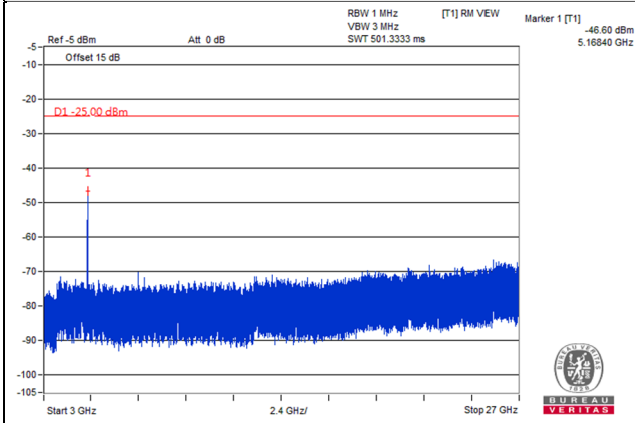


\*The 9kHz signal over the limit is from Spectrum.


Channel Bandwidth: 20MHz

Channel 41490 (2680.0MHz)


Frequency Range : 9kHz~1GHz

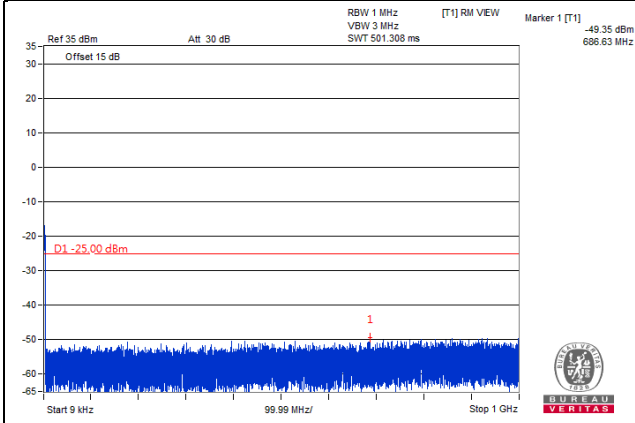

Frequency Range : 1GHz~3GHz

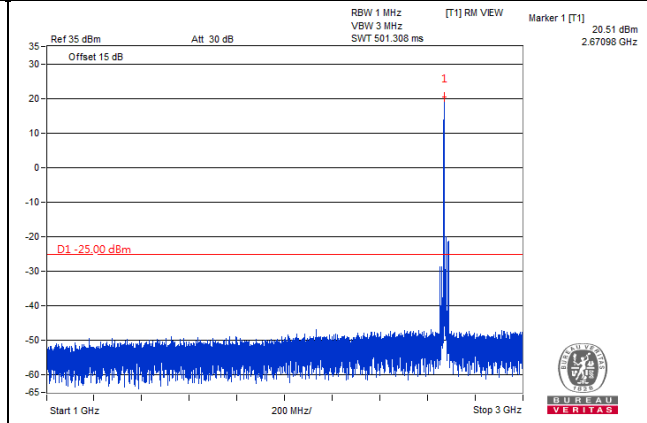

Frequency Range : 3GHz~27GHz

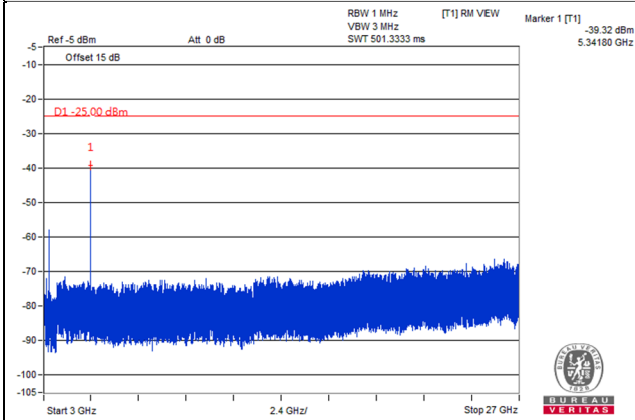


\*The 9kHz signal over the limit is from Spectrum.

LTE Band 66


Channel Bandwidth: 1.4MHz

Channel 131979 (1710.7MHz)

Frequency Range : 9kHz~1GHz

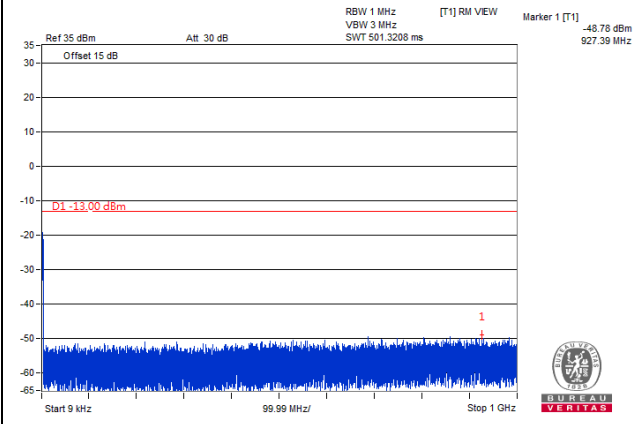


Frequency Range : 1GHz~18GHz

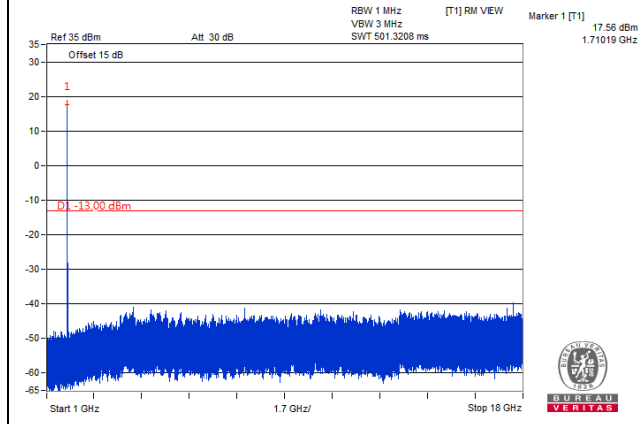


Channel 132322 (1745.0MHz)

Frequency Range : 9kHz~1GHz

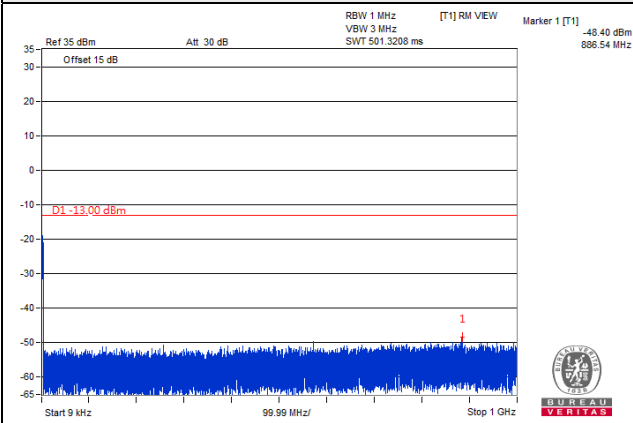


Frequency Range : 1GHz~18GHz

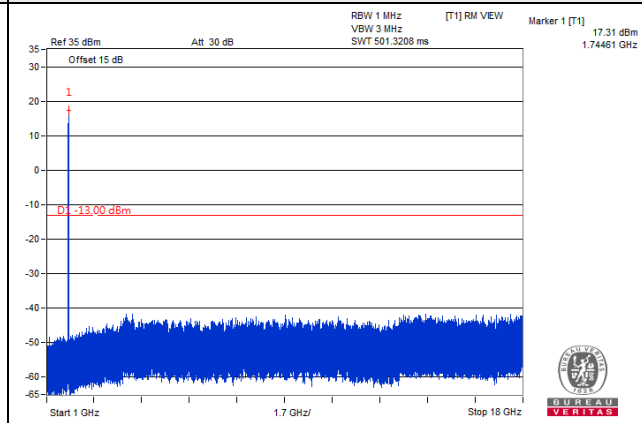


Channel 132665 (1779.3MHz)

Frequency Range : 9kHz~1GHz

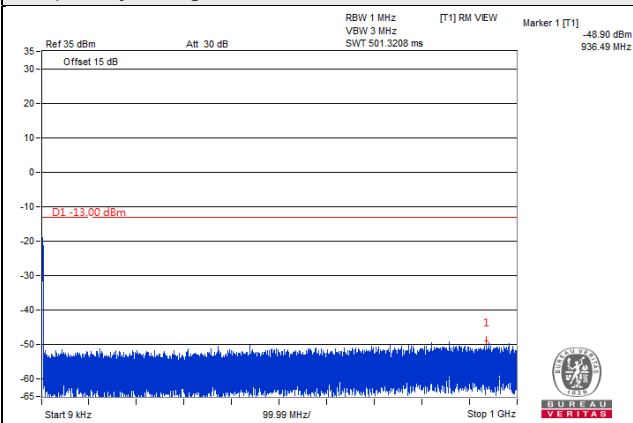


Frequency Range : 1GHz~18GHz

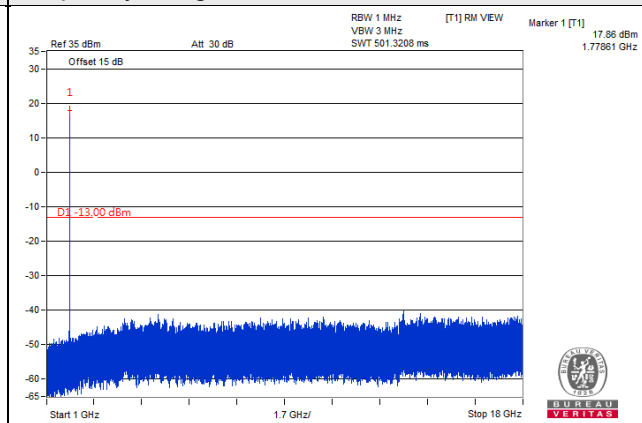


Channel Bandwidth: 3MHz

Channel 131987 (1711.5MHz)

Frequency Range : 9kHz~1GHz

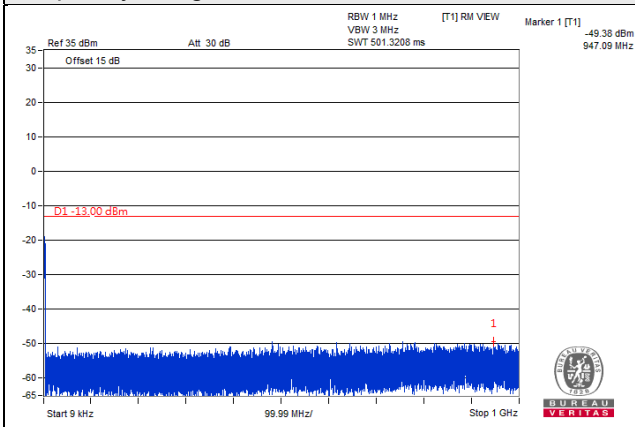


Frequency Range : 1GHz~18GHz

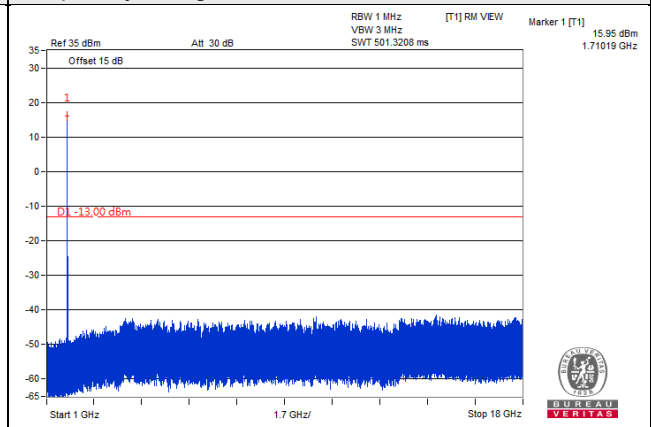


Channel 132322 (1745.0MHz)

Frequency Range : 9kHz~1GHz

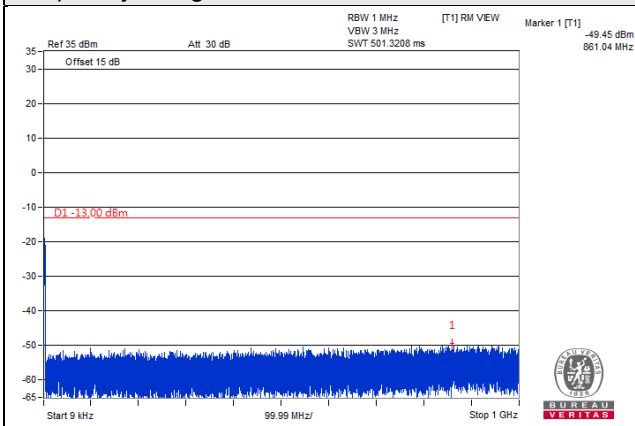


Frequency Range : 1GHz~18GHz

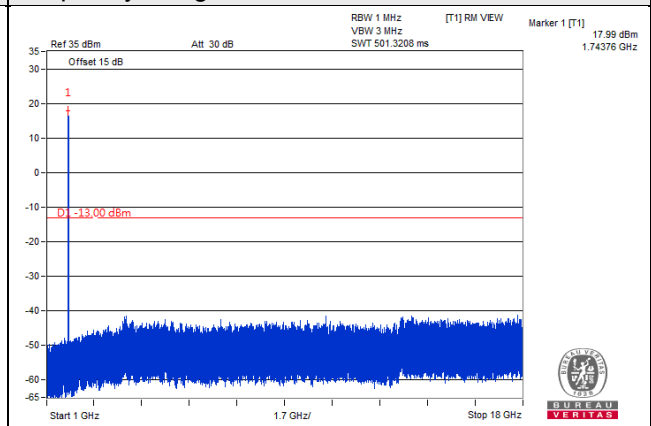


Channel 132657 (1778.5MHz)

Frequency Range : 9kHz~1GHz

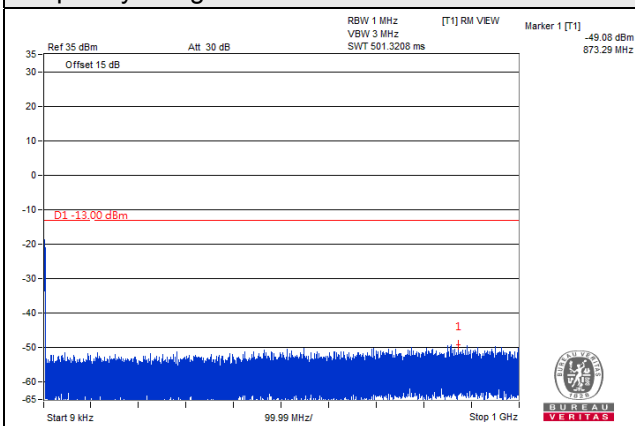


Frequency Range : 1GHz~18GHz

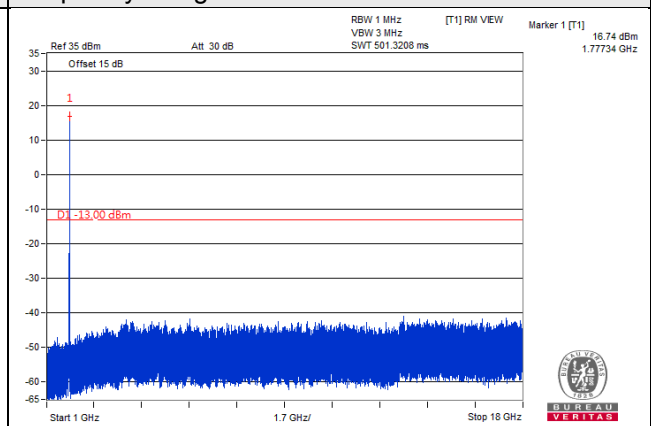


Channel Bandwidth: 5MHz

Channel 131997 (1712.5MHz)

Frequency Range : 9kHz~1GHz

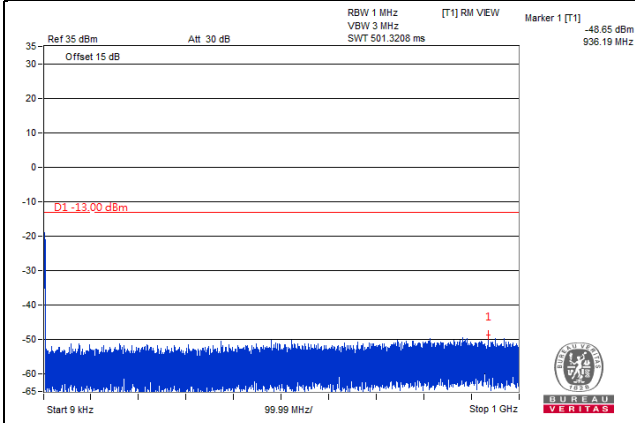


Frequency Range : 1GHz~18GHz

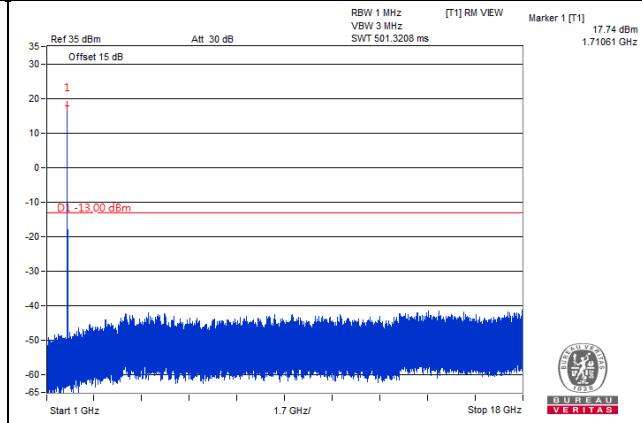


Channel 132322 (1745.0MHz)

Frequency Range : 9kHz~1GHz

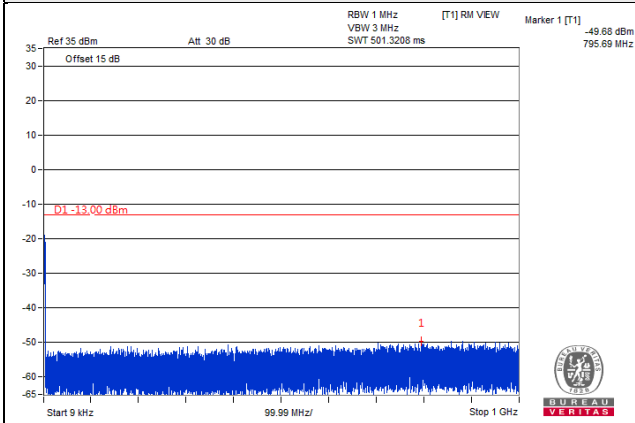


Frequency Range : 1GHz~18GHz

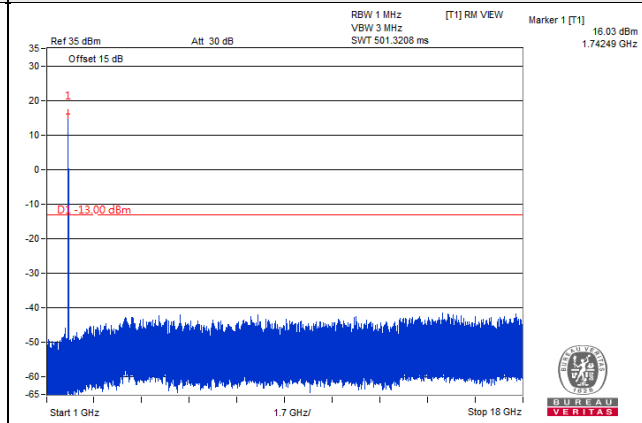


Channel 132647 (1777.5MHz)

Frequency Range : 9kHz~1GHz

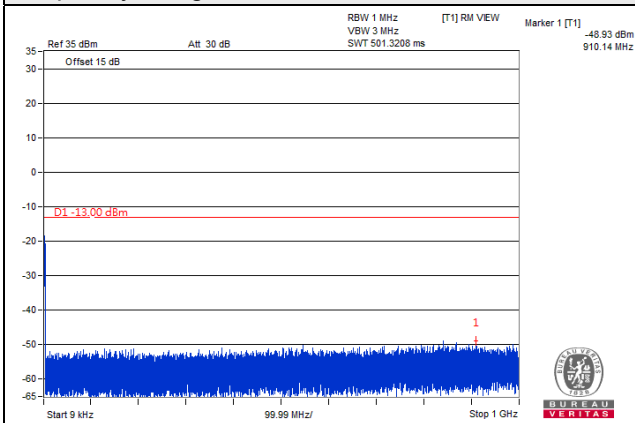


Frequency Range : 1GHz~18GHz

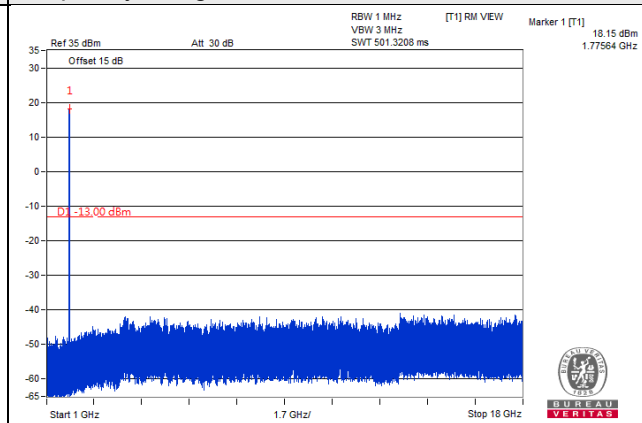


Channel Bandwidth: 10MHz

Channel 132022 (1715.0MHz)

Frequency Range : 9kHz~1GHz

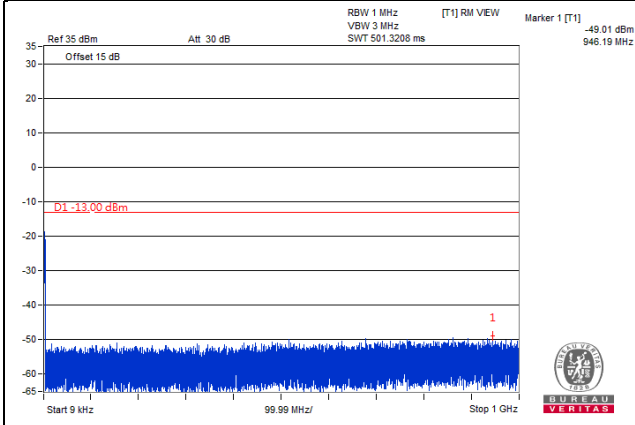


Frequency Range : 1GHz~18GHz

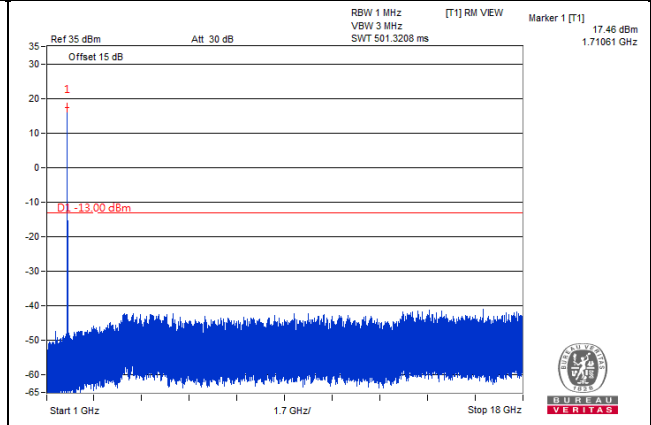


Channel 132322 (1745.0MHz)

Frequency Range : 9kHz~1GHz

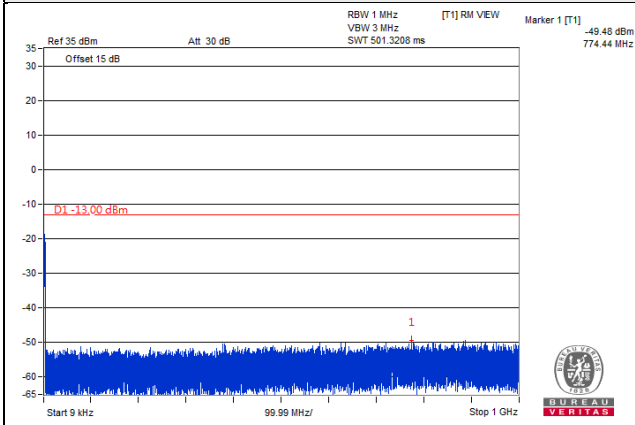


Frequency Range : 1GHz~18GHz

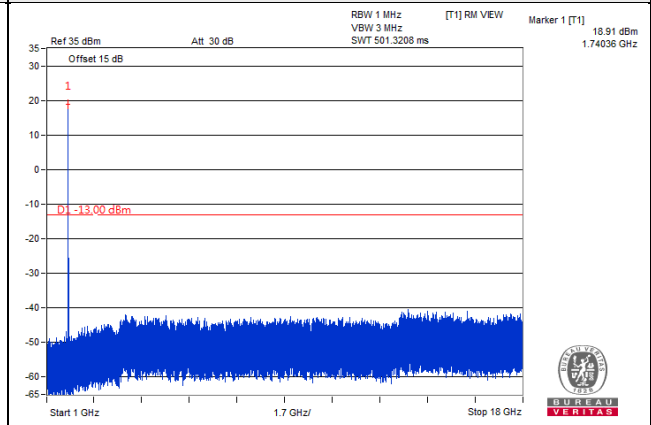


Channel 132622 (1775.0MHz)

Frequency Range : 9kHz~1GHz

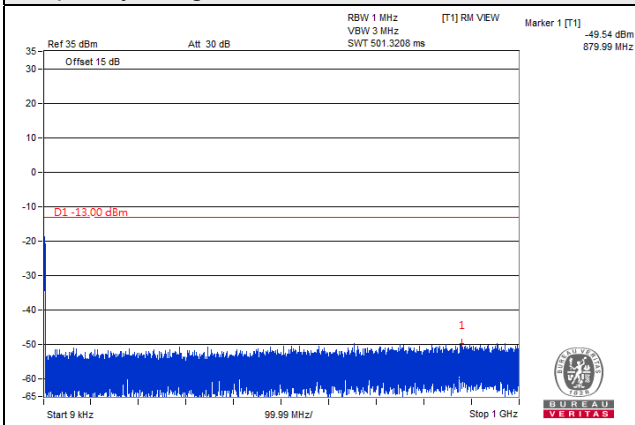


Frequency Range : 1GHz~18GHz

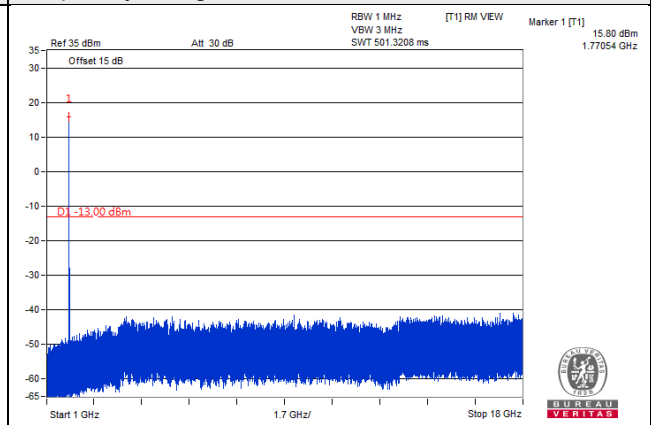


Channel Bandwidth: 15MHz

Channel 132047 (1717.5MHz)

Frequency Range : 9kHz~1GHz

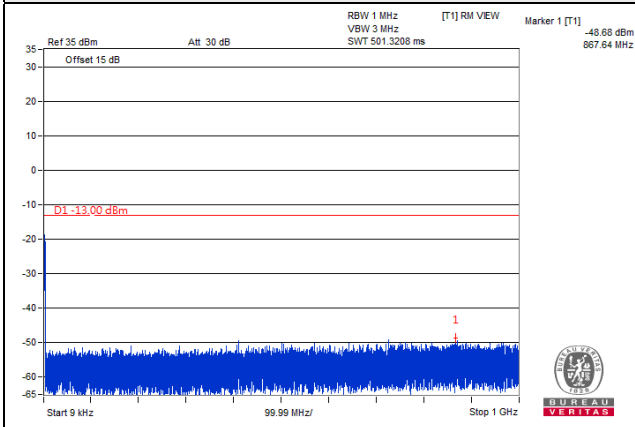


Frequency Range : 1GHz~18GHz

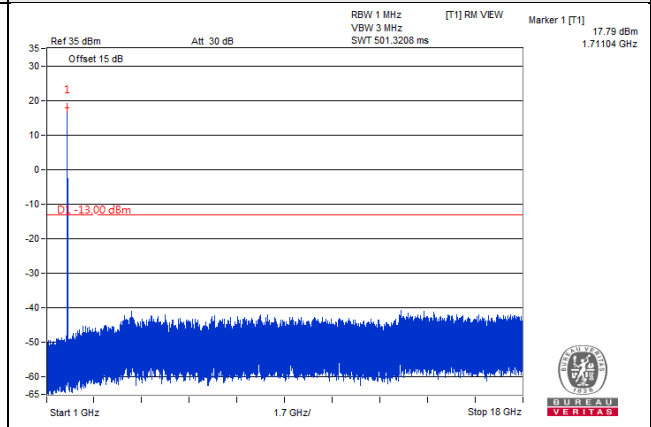


Channel 132322 (1745.0MHz)

Frequency Range : 9kHz~1GHz

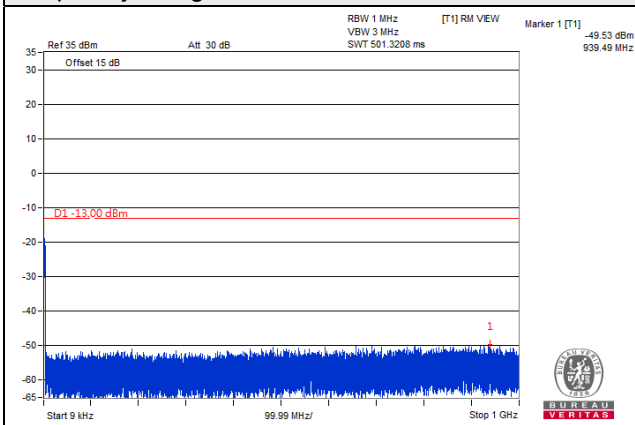


Frequency Range : 1GHz~18GHz

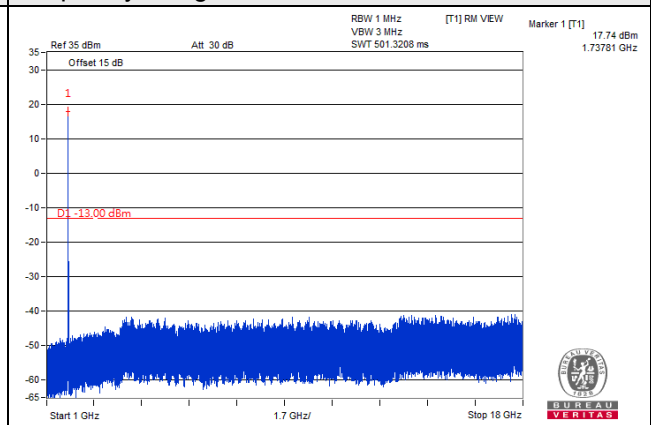


Channel 132597 (1772.5MHz)

Frequency Range : 9kHz~1GHz

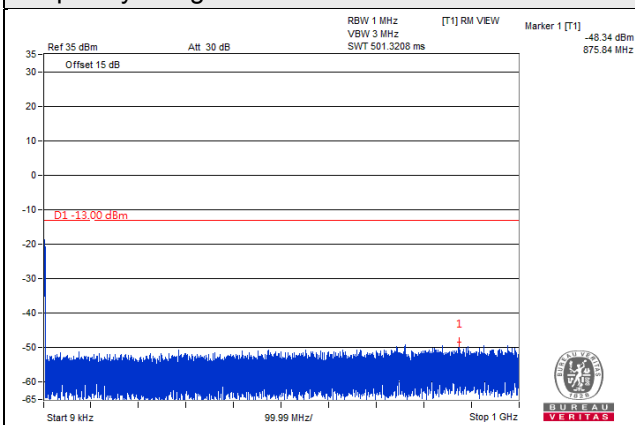

Frequency Range : 1GHz~18GHz

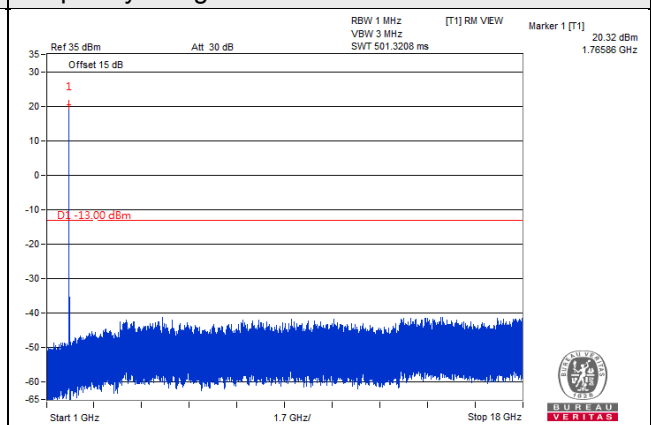





Channel Bandwidth: 20MHz

Channel 132072 (1720.0MHz)

Frequency Range : 9kHz~1GHz

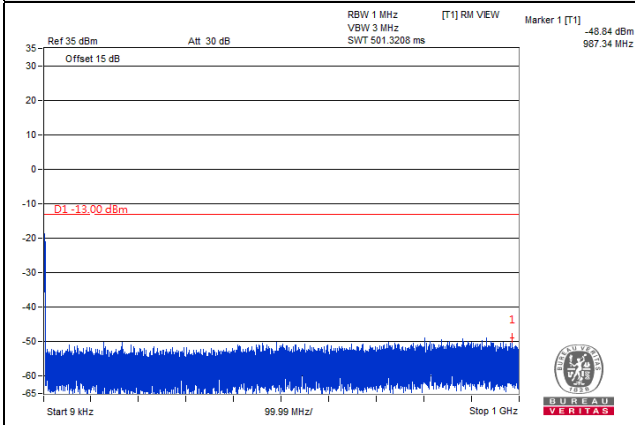


Frequency Range : 1GHz~18GHz

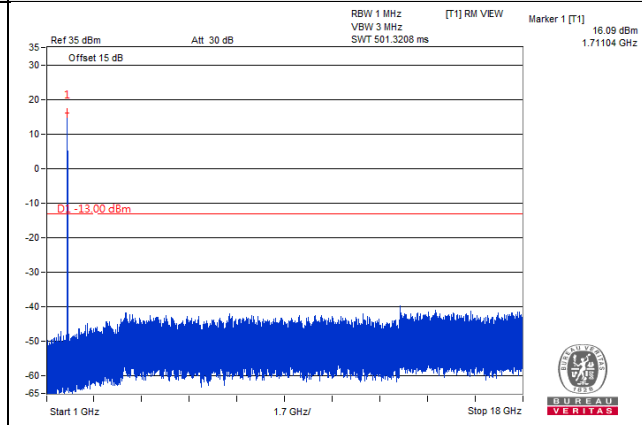


Channel 132322 (1745.0MHz)

Frequency Range : 9kHz~1GHz

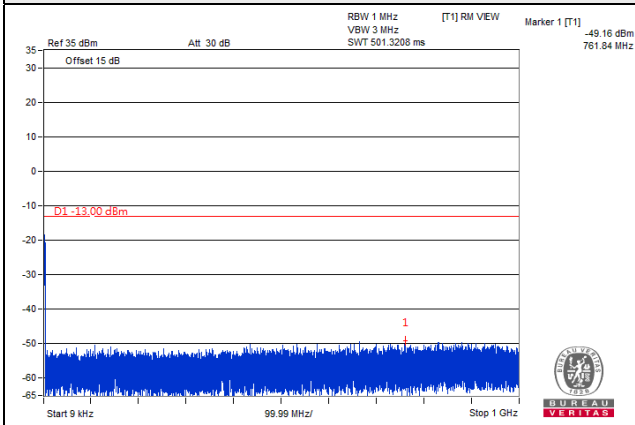


Frequency Range : 1GHz~18GHz

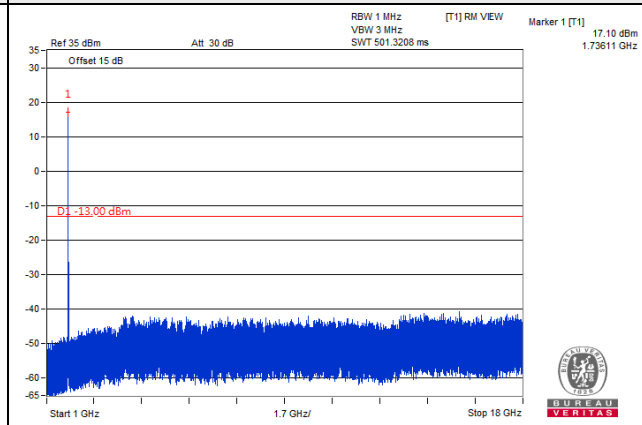


Channel 132572 (1770.0MHz)

Frequency Range : 9kHz~1GHz

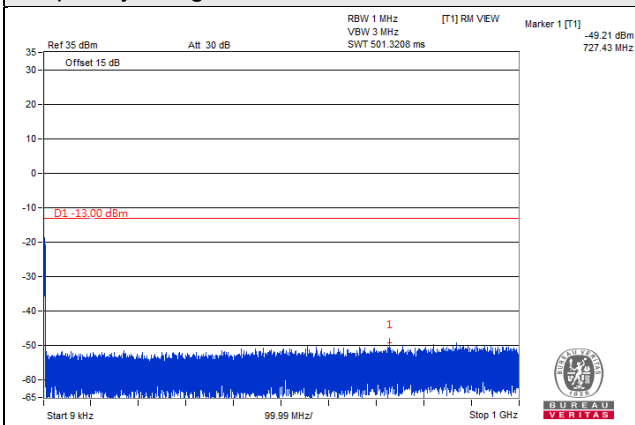

Frequency Range : 1GHz~18GHz

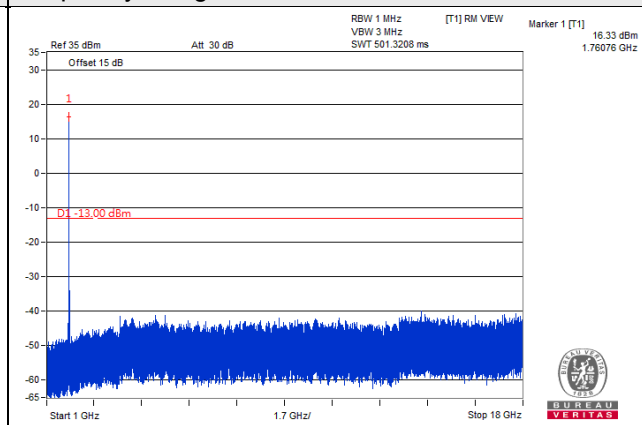


**LTE Band 71**


**Channel Bandwidth: 5MHz**

**Channel 133147 (665.5MHz)**

**Frequency Range : 9kHz~1GHz**

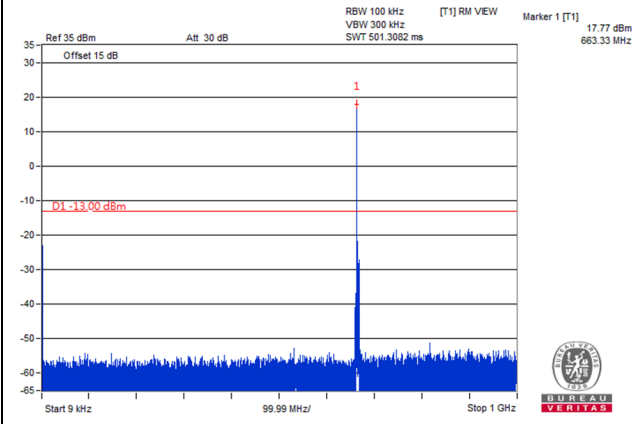


**Frequency Range : 1GHz~7GHz**

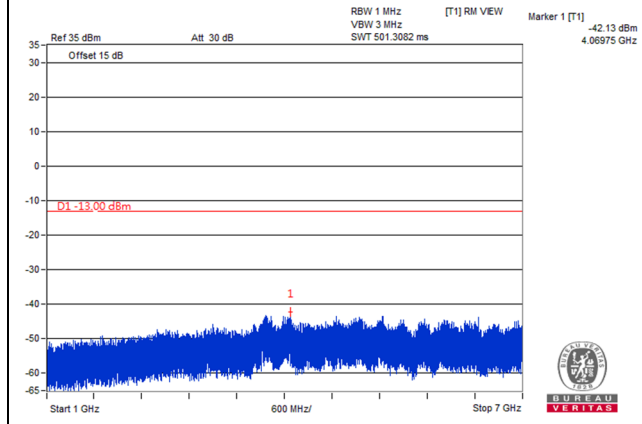


**Channel 133297 (680.5MHz)**

**Frequency Range : 9kHz~1GHz**

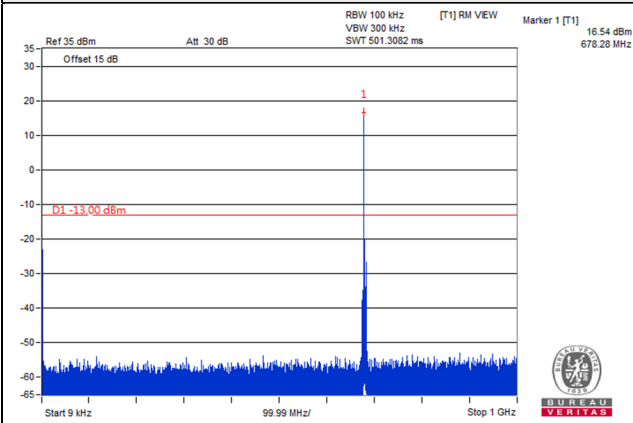


**Frequency Range : 1GHz~7GHz**

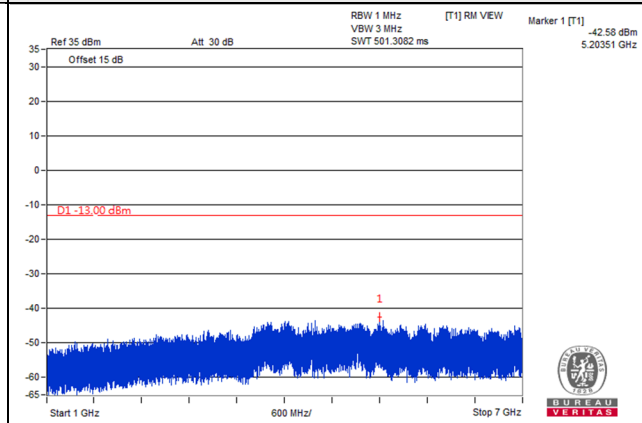


**Channel 133447 (695.5MHz)**

**Frequency Range : 9kHz~1GHz**

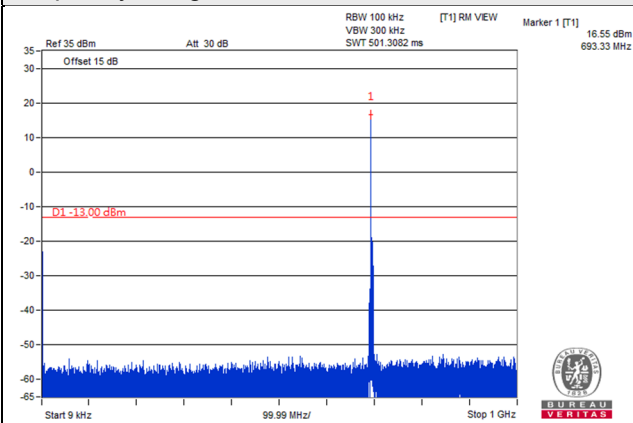


**Frequency Range : 1GHz~7GHz**

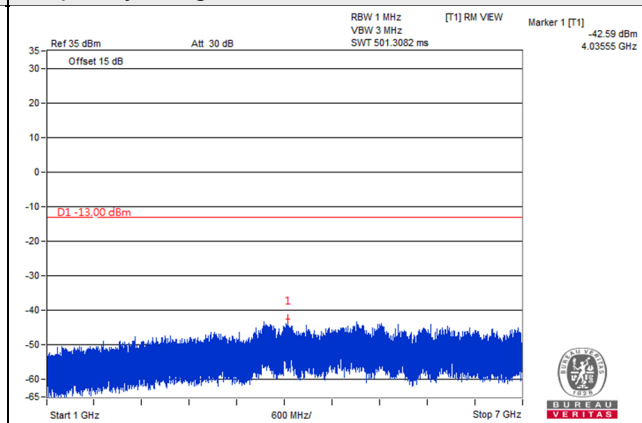


Channel Bandwidth: 10MHz

Channel 133172 (668.0MHz)

Frequency Range : 9kHz~1GHz

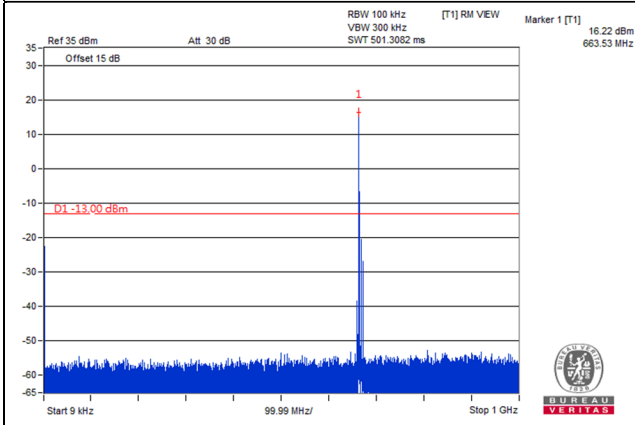


Frequency Range : 1GHz~7GHz

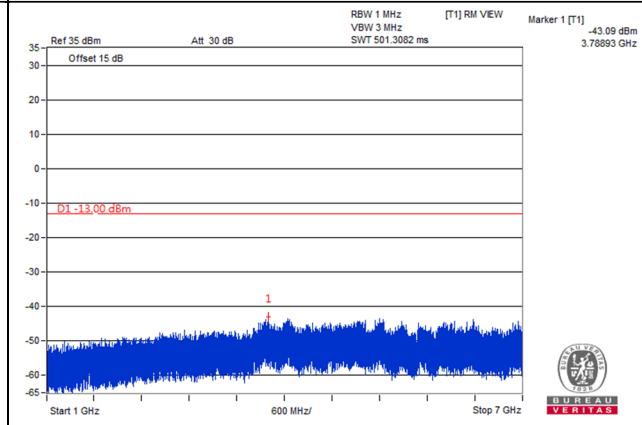


Channel 133297 (680.5MHz)

Frequency Range : 9kHz~1GHz

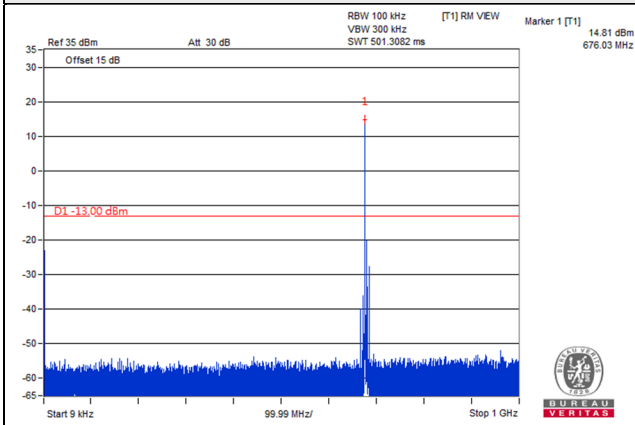


Frequency Range : 1GHz~7GHz

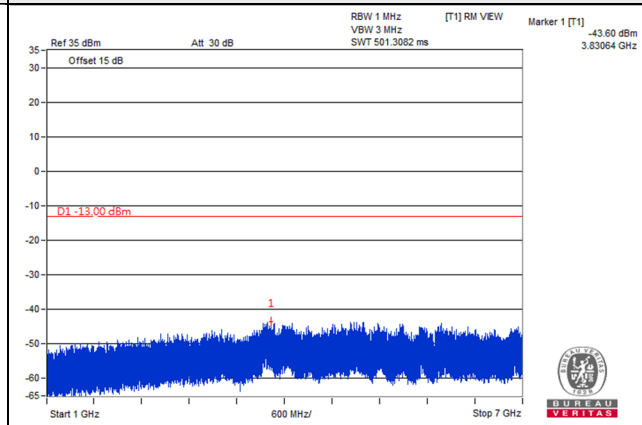


Channel 133422 (693.0MHz)

Frequency Range : 9kHz~1GHz

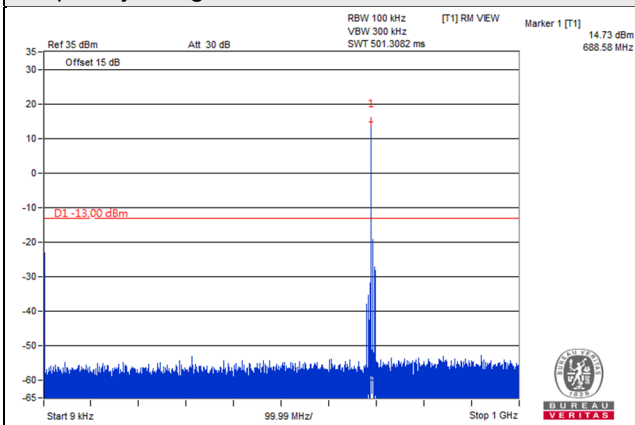


Frequency Range : 1GHz~7GHz

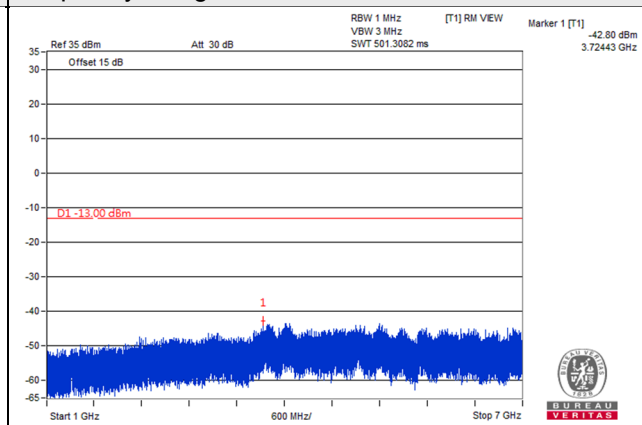


Channel Bandwidth: 15MHz

Channel 133197 (670.5MHz)

Frequency Range : 9kHz~1GHz

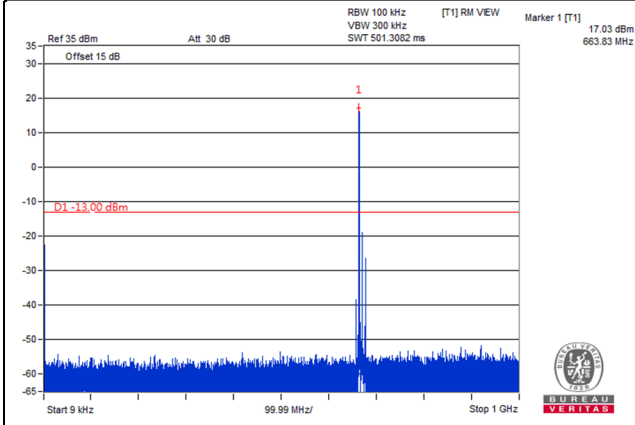


Frequency Range : 1GHz~7GHz

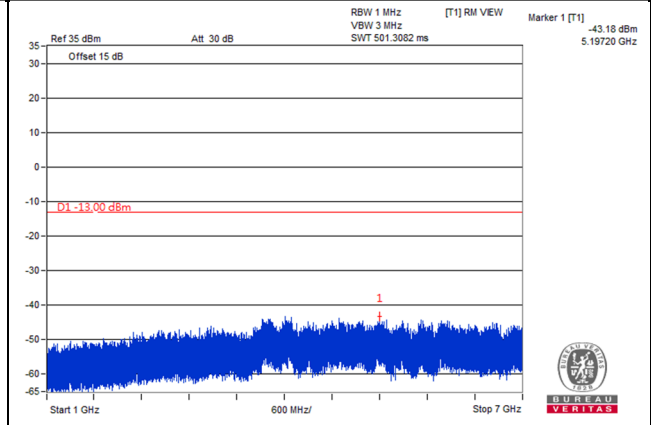


Channel 133297 (680.5MHz)

Frequency Range : 9kHz~1GHz

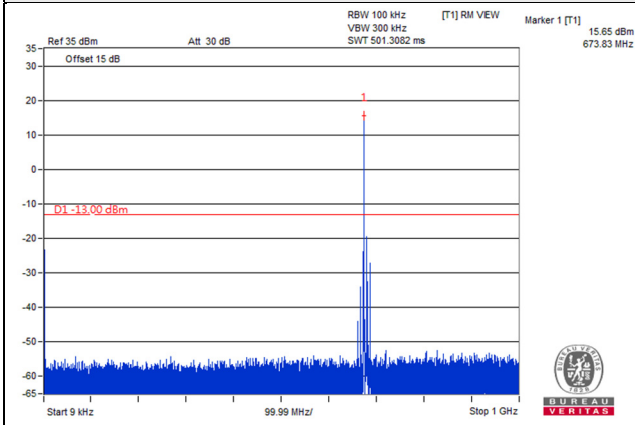


Frequency Range : 1GHz~7GHz

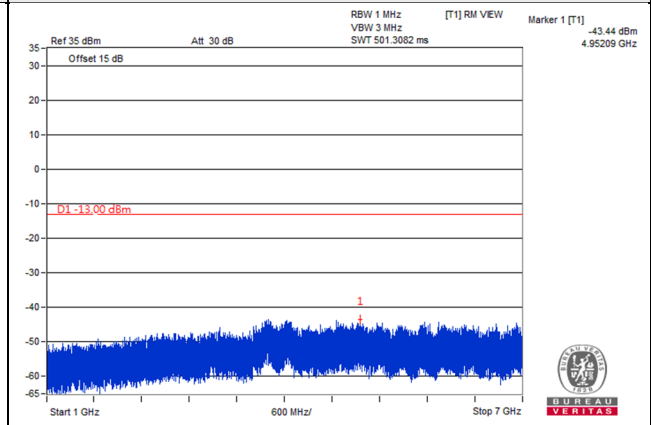


Channel 133397 (690.5MHz)

Frequency Range : 9kHz~1GHz

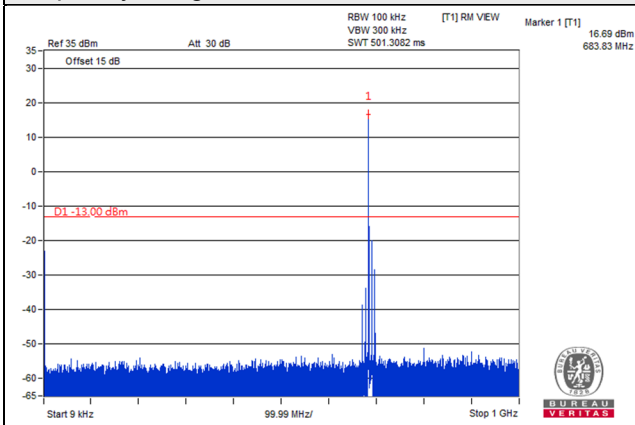


Frequency Range : 1GHz~7GHz

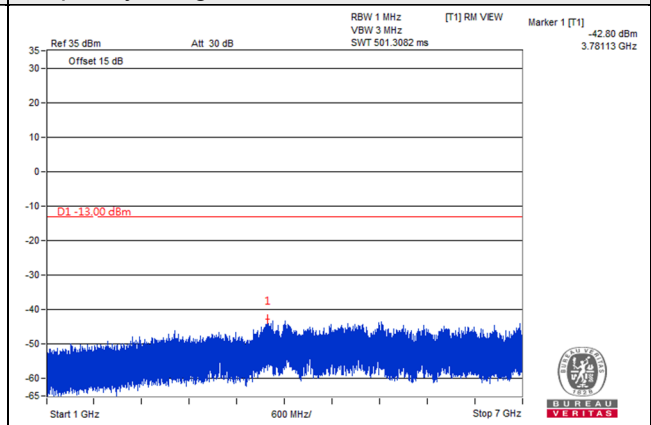


Channel Bandwidth: 20MHz

Channel 133222 (673.0MHz)

Frequency Range : 9kHz~1GHz

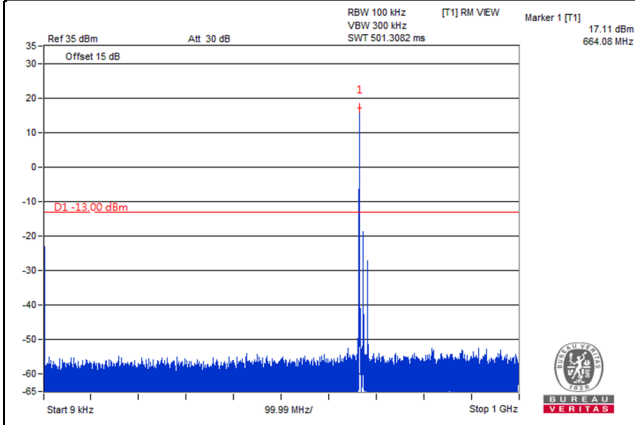


Frequency Range : 1GHz~7GHz

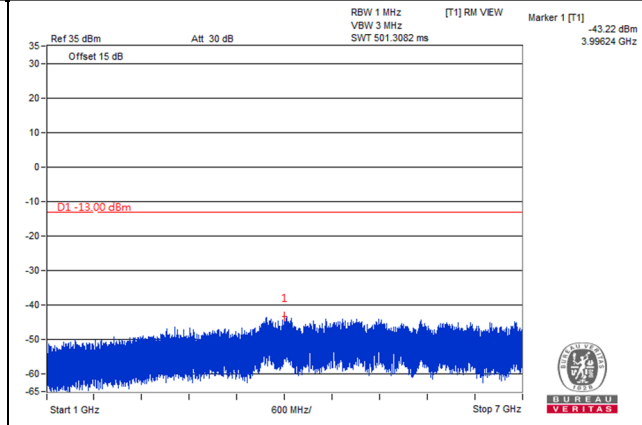


Channel 133297 (680.5MHz)

Frequency Range : 9kHz~1GHz

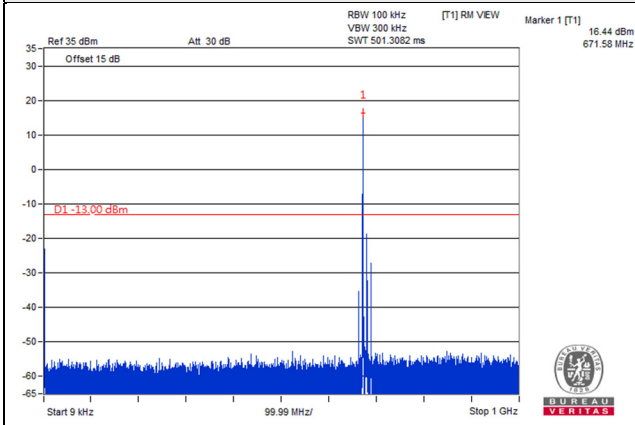


Frequency Range : 1GHz~7GHz

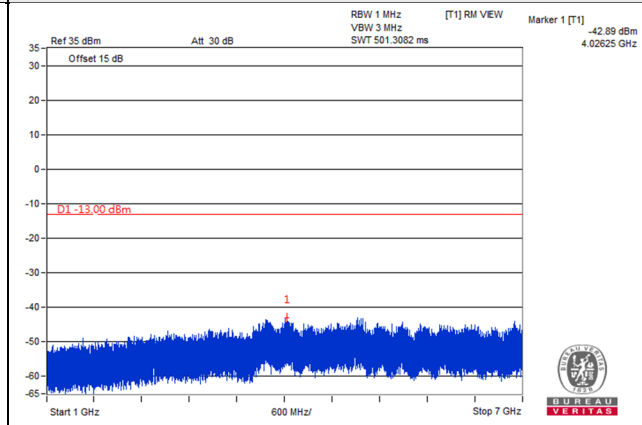


Channel 133372 (688.0MHz)

Frequency Range : 9kHz~1GHz

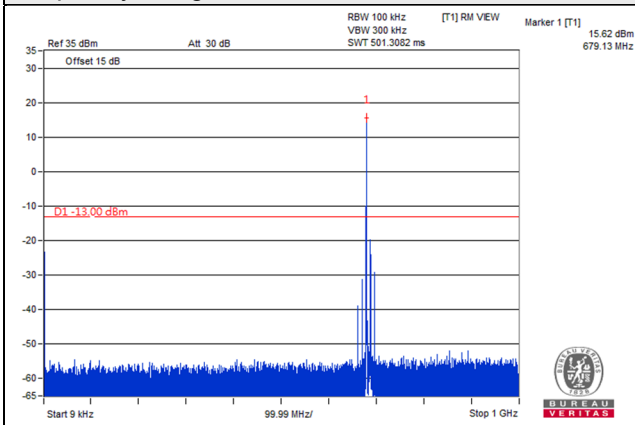

Frequency Range : 1GHz~7GHz

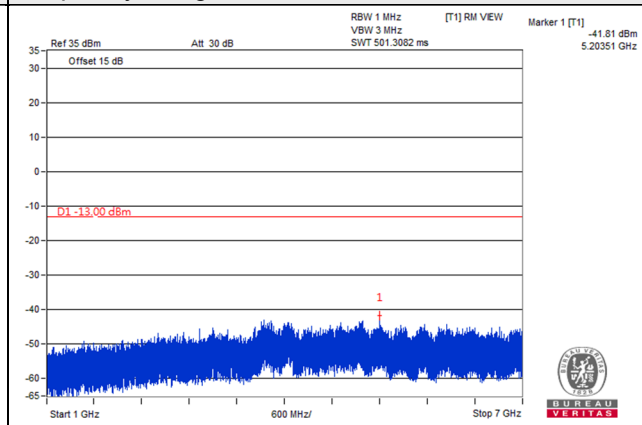

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

For LTE Band 4, 66

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log (P)$  dB.

For LTE Band 7, 38, 41

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log (P)$  dB. The emission limit equal to  $-25\text{dBm}$ .

For LTE Band 12, 17, 71

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

For LTE Band 13

According to FCC 27.53(c)(2) for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB.

According to FCC 27.53(f) for operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to  $-70 \text{ dBW/MHz}$ . The limit of emissions is equal to  $-40 \text{ dBm}$

For LTE Band 30

In the FCC 27.53(a)(4)(iii), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $70 + 10 \log (P)$  dB. The limit of emission is equal to  $-40 \text{ dBm}$ .

#### 4.8.2 Test Procedure

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}.$


**Note:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 4.8.3 Deviation from Test Standard


No deviation.

#### 4.8.4 Test Setup

For radiated emission 30MHz to 1GHz

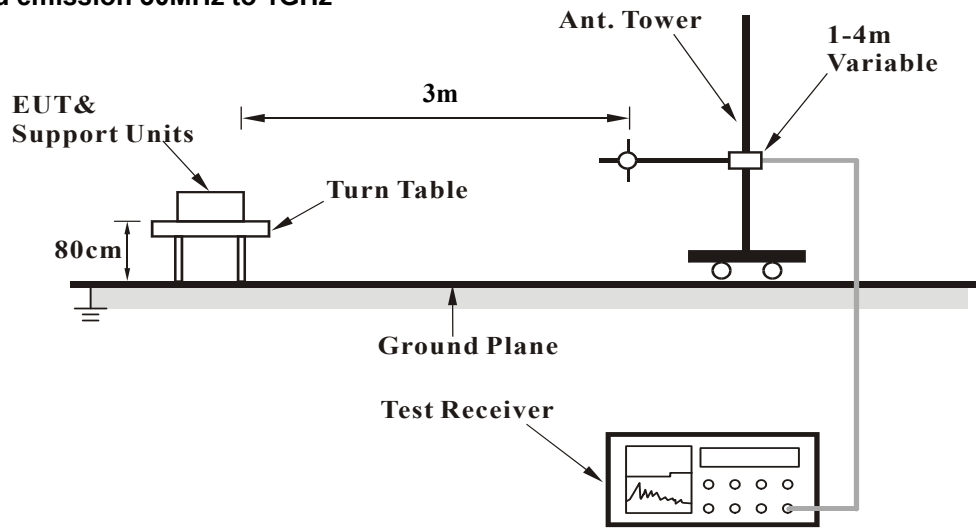

For radiated emission above 1GHz

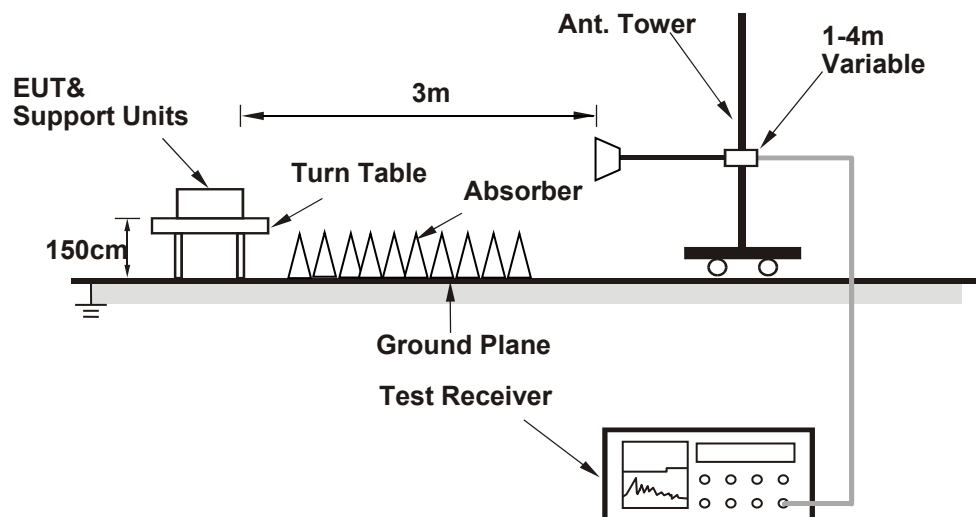

For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.8.5 Test Results


Below 1GHz

LTE Band 4, Channel Bandwidth: 1.4MHz

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 20175<br>(1732.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |


Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 33.91       | -51.3         | -31.3                 | -17.1                  | -48.4      | -13.0       | -35.4       |
| 2   | 153.19      | -58.0         | -59.3                 | -2.9                   | -62.2      | -13.0       | -49.2       |
| 3   | 316.15      | -56.9         | -64.9                 | 4.0                    | -60.9      | -13.0       | -47.9       |
| 4   | 640.10      | -63.3         | -64.7                 | 3.6                    | -61.1      | -13.0       | -48.1       |
| 5   | 832.19      | -64.8         | -61.8                 | 3.8                    | -58.0      | -13.0       | -45.0       |
| 6   | 999.03      | -71.3         | -65.7                 | 3.3                    | -62.4      | -13.0       | -49.4       |

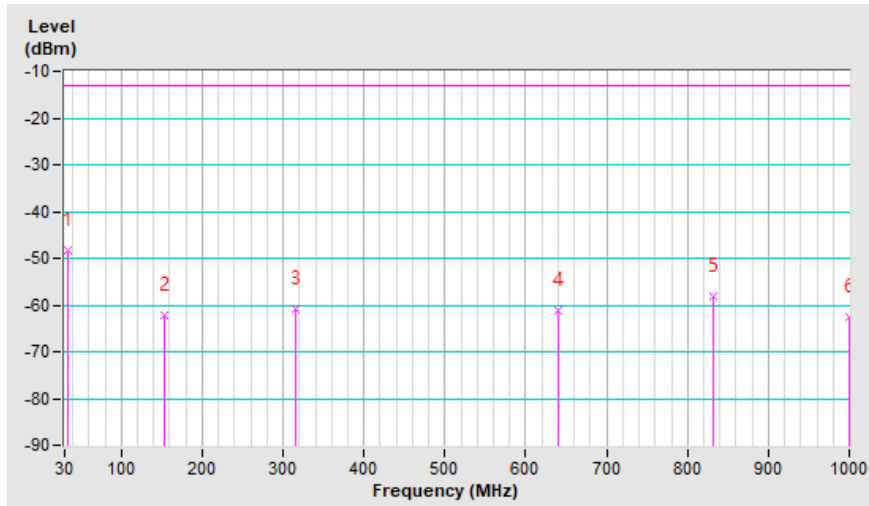

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 20175<br>(1732.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

| Antenna Polarity & Test Distance: Vertical at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 31.94       | -50.5         | -42.7                 | -18.3                  | -61.0      | -13.0       | -48.0       |
| 2   | 104.69      | -54.8         | -61.3                 | -2.1                   | -63.4      | -13.0       | -50.4       |
| 3   | 284.14      | -65.7         | -61.6                 | -1.6                   | -63.2      | -13.0       | -50.2       |
| 4   | 586.78      | -63.5         | -64.8                 | 3.8                    | -61.0      | -13.0       | -48.0       |
| 5   | 838.98      | -63.8         | -60.2                 | 3.7                    | -56.5      | -13.0       | -43.5       |
| 6   | 1000.00     | -71.7         | -64.8                 | 3.2                    | -61.6      | -13.0       | -48.6       |

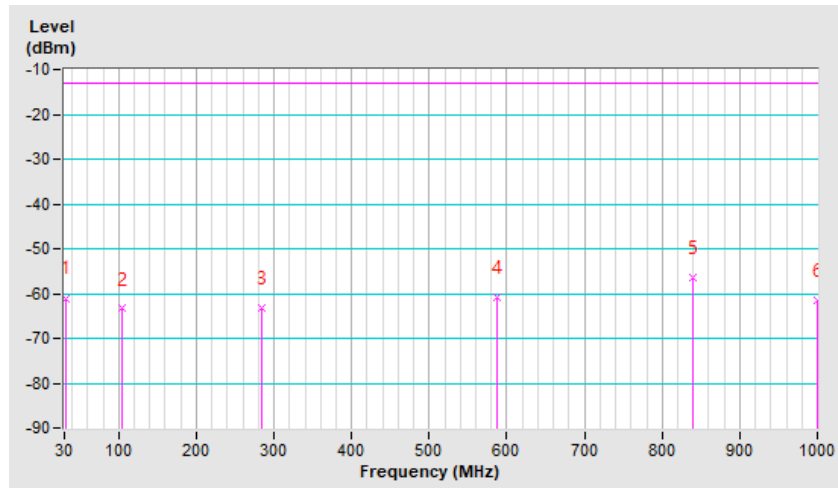


LTE Band 7, Channel Bandwidth: 20MHz

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 21350<br>(2560.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Horizontal at 3 M


| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 42.61       | -51.1         | -37.4                 | -11.8                  | -49.2      | -25.0       | -24.2       |
| 2   | 100.81      | -47.9         | -54.7                 | -1.6                   | -56.3      | -25.0       | -31.3       |
| 3   | 290.93      | -54.2         | -55.9                 | -1.9                   | -57.8      | -25.0       | -32.8       |
| 4   | 575.14      | -64.9         | -67.6                 | 3.7                    | -63.9      | -25.0       | -38.9       |
| 5   | 695.42      | -60.3         | -61.0                 | 3.4                    | -57.6      | -25.0       | -32.6       |
| 6   | 836.07      | -63.9         | -60.8                 | 3.8                    | -57.0      | -25.0       | -32.0       |

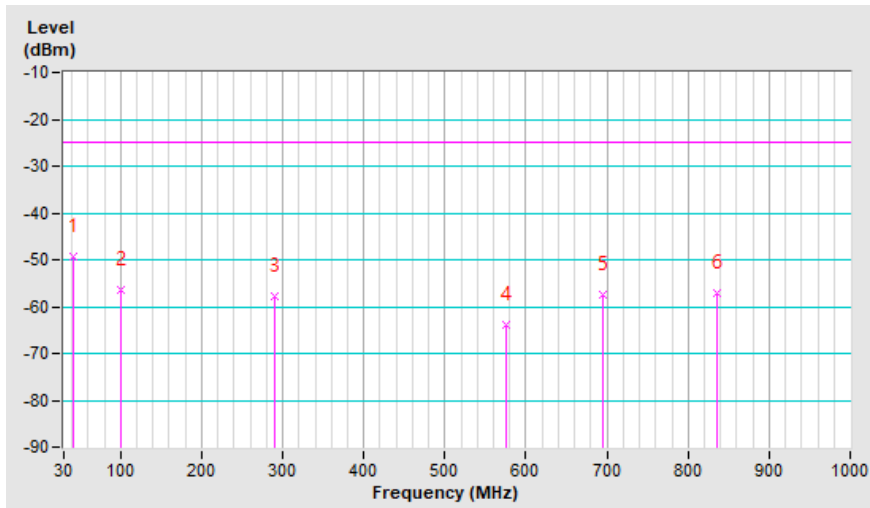

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 21350<br>(2560.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 44.55       | -46.8         | -44.3                 | -10.9                  | -55.2      | -25.0       | -30.2       |
| 2   | 103.72      | -54.4         | -61.1                 | -2.0                   | -63.1      | -25.0       | -38.1       |
| 3   | 353.98      | -61.9         | -66.2                 | 3.9                    | -62.3      | -25.0       | -37.3       |
| 4   | 698.33      | -63.3         | -60.9                 | 3.4                    | -57.5      | -25.0       | -32.5       |
| 5   | 801.15      | -61.6         | -58.9                 | 4.0                    | -54.9      | -25.0       | -29.9       |
| 6   | 930.16      | -69.4         | -64.3                 | 3.7                    | -60.6      | -25.0       | -35.6       |

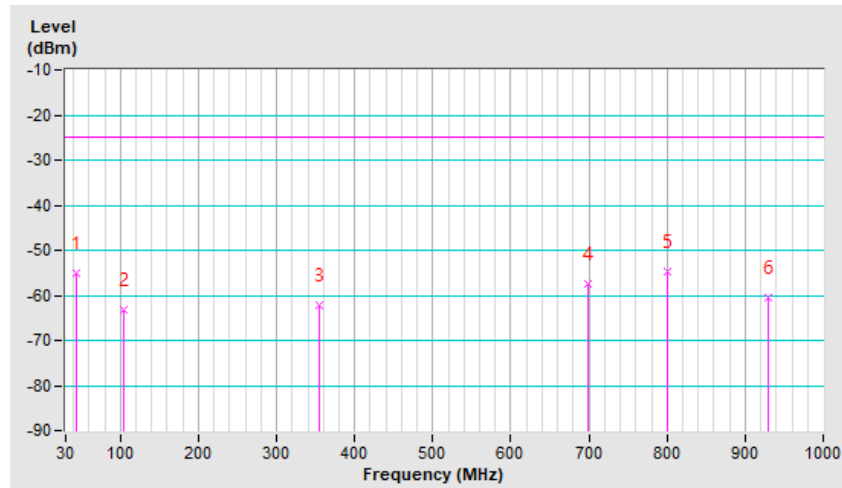

LTE Band 12, Channel Bandwidth: 1.4MHz


|                          |                                |                 |                |
|--------------------------|--------------------------------|-----------------|----------------|
| Mode                     | TX channel 23095<br>(707.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                       |                 |                |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 30.97       | -47.1         | -26.8                 | -18.8                  | -45.6     | -13.0       | -32.6       |
| 2   | 98.87       | -54.0         | -63.3                 | -1.4                   | -64.7     | -13.0       | -51.7       |
| 3   | 306.45      | -54.5         | -64.9                 | 3.9                    | -61.0     | -13.0       | -48.0       |
| 4   | 576.11      | -64.8         | -69.7                 | 3.7                    | -66.0     | -13.0       | -53.0       |
| 5   | 709.97      | -58.6         | -61.3                 | 3.5                    | -57.8     | -13.0       | -44.8       |
| 6   | 811.82      | -61.2         | -61.4                 | 3.9                    | -57.5     | -13.0       | -44.5       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

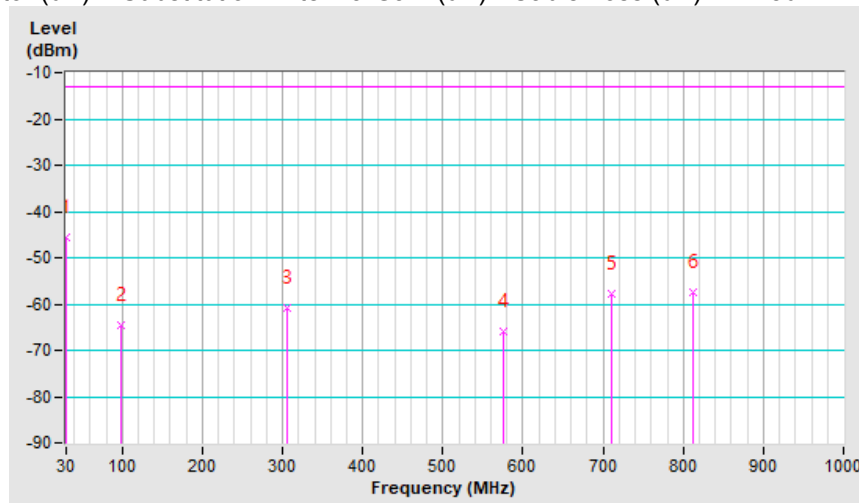


|                          |                                |                 |                |
|--------------------------|--------------------------------|-----------------|----------------|
| Mode                     | TX channel 23095<br>(707.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                       |                 |                |

| Antenna Polarity & Test Distance: Vertical at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 30.97       | -49.2         | -42.8                 | -18.8                  | -61.6     | -13.0       | -48.6       |
| 2   | 89.08       | -48.2         | -56.6                 | -0.1                   | -56.7     | -13.0       | -43.7       |
| 3   | 250.19      | -57.6         | -58.4                 | -1.3                   | -59.7     | -13.0       | -46.7       |
| 4   | 598.42      | -63.9         | -66.3                 | 3.9                    | -62.4     | -13.0       | -49.4       |
| 5   | 714.82      | -61.0         | -60.6                 | 3.5                    | -57.1     | -13.0       | -44.1       |
| 6   | 838.01      | -65.2         | -63.8                 | 3.8                    | -60.0     | -13.0       | -47.0       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

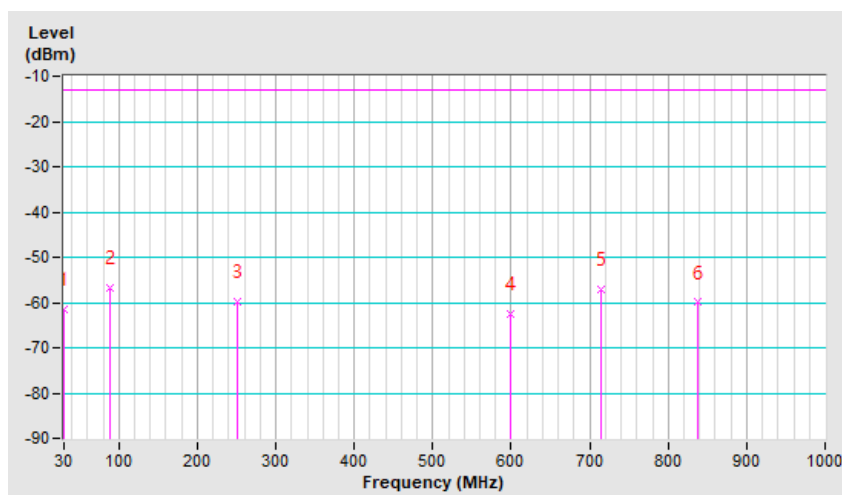


LTE Band 13, Channel Bandwidth: 5MHz

|                          |                                |                 |                |
|--------------------------|--------------------------------|-----------------|----------------|
| Mode                     | TX channel 23255<br>(784.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                       |                 |                |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 30.00       | -50.1         | -28.8                 | -19.4                  | -48.2     | -13.0       | -35.2       |
| 2   | 74.62       | -48.2         | -56.2                 | 0.1                    | -56.1     | -13.0       | -43.1       |
| 3   | 258.92      | -58.9         | -64.5                 | -1.5                   | -66.0     | -13.0       | -53.0       |
| 4   | 588.72      | -69.3         | -74.1                 | 3.8                    | -70.3     | -13.0       | -57.3       |
| 5   | 776.90      | -69.2         | -70.4                 | 4.0                    | -66.4     | -13.0       | -53.4       |
| 6   | 995.15      | -71.8         | -68.4                 | 3.4                    | -65.0     | -13.0       | -52.0       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

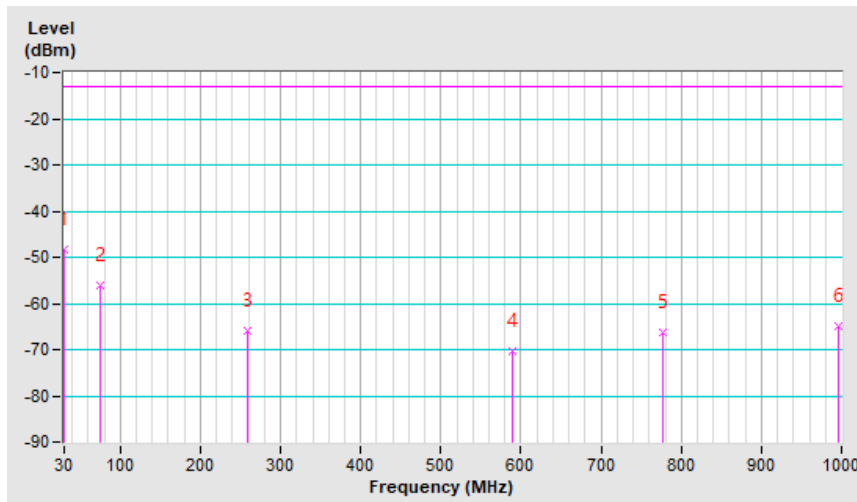


|                          |                                |                 |                |
|--------------------------|--------------------------------|-----------------|----------------|
| Mode                     | TX channel 23255<br>(784.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                       |                 |                |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 31.94       | -48.2         | -42.6                 | -18.3                  | -60.9     | -13.0       | -47.9       |
| 2   | 66.86       | -52.9         | -60.7                 | -1.5                   | -62.2     | -13.0       | -49.2       |
| 3   | 309.36      | -68.3         | -74.4                 | 3.9                    | -70.5     | -13.0       | -57.5       |
| 4   | 603.27      | -71.0         | -72.9                 | 3.7                    | -69.2     | -13.0       | -56.2       |
| 5   | 773.99      | -69.9         | -69.1                 | 4.0                    | -65.1     | -13.0       | -52.1       |
| 6   | 957.32      | -72.2         | -68.9                 | 3.8                    | -65.1     | -13.0       | -52.1       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

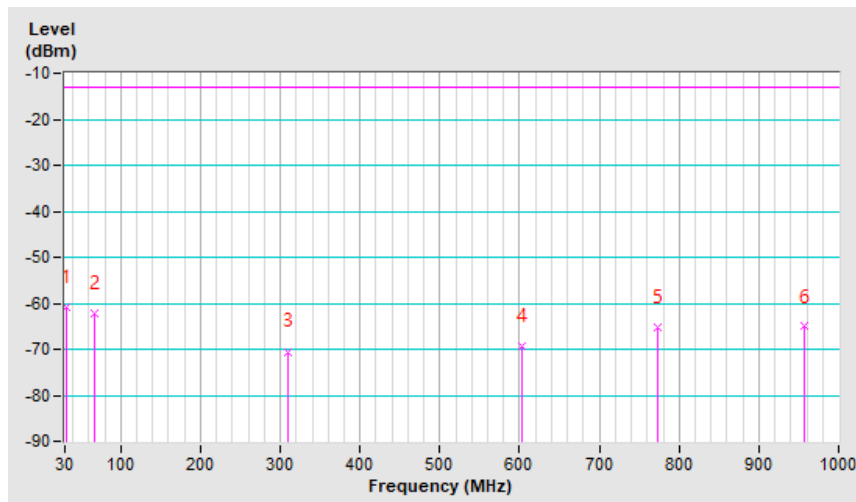




LTE Band 17, Channel Bandwidth: 10MHz

|                          |                                |                 |                |
|--------------------------|--------------------------------|-----------------|----------------|
| Mode                     | TX channel 23790<br>(710.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                       |                 |                |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 30.00       | -49.4         | -28.1                 | -19.4                  | -47.5     | -13.0       | -34.5       |
| 2   | 82.38       | -43.8         | -51.8                 | 0.4                    | -51.4     | -13.0       | -38.4       |
| 3   | 127.97      | -58.8         | -63.9                 | -3.2                   | -67.1     | -13.0       | -54.1       |
| 4   | 295.78      | -64.0         | -67.2                 | -1.8                   | -69.0     | -13.0       | -56.0       |
| 5   | 794.36      | -69.2         | -69.9                 | 4.0                    | -65.9     | -13.0       | -52.9       |
| 6   | 992.24      | -71.3         | -68.0                 | 3.4                    | -64.6     | -13.0       | -51.6       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

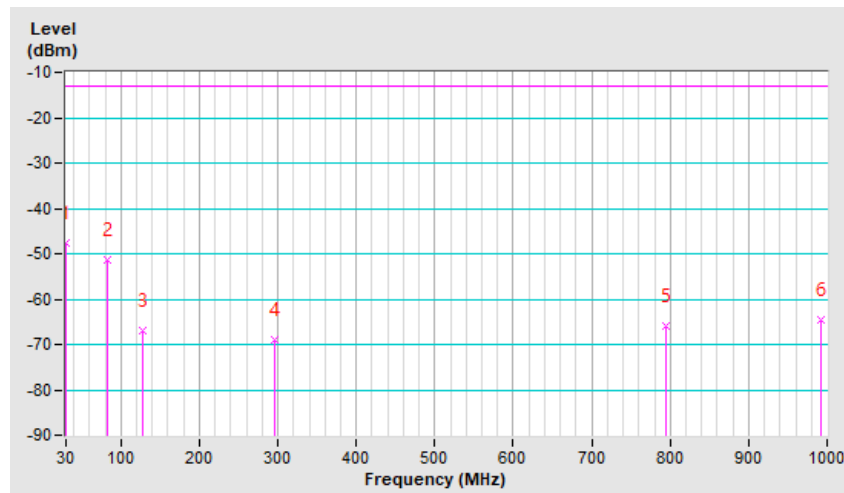


|                          |                                |                 |                |
|--------------------------|--------------------------------|-----------------|----------------|
| Mode                     | TX channel 23790<br>(710.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                       |                 |                |

| Antenna Polarity & Test Distance: Vertical at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 32.91       | -49.5         | -44.5                 | -17.7                  | -62.2     | -13.0       | -49.2       |
| 2   | 93.05       | -58.2         | -66.7                 | -0.7                   | -67.4     | -13.0       | -54.4       |
| 3   | 245.34      | -67.0         | -68.7                 | -1.6                   | -70.3     | -13.0       | -57.3       |
| 4   | 604.24      | -69.8         | -71.6                 | 3.6                    | -68.0     | -13.0       | -55.0       |
| 5   | 771.08      | -70.2         | -69.4                 | 3.9                    | -65.5     | -13.0       | -52.5       |
| 6   | 940.83      | -71.2         | -68.0                 | 3.8                    | -64.2     | -13.0       | -51.2       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

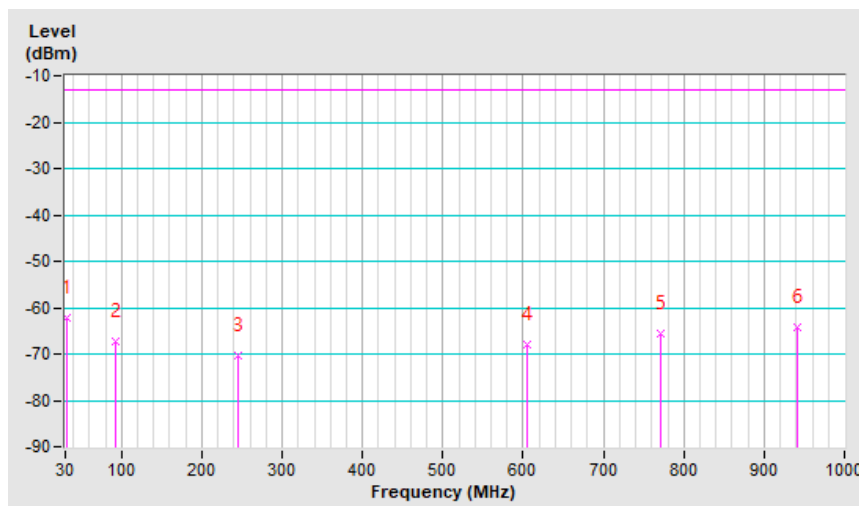


LTE Band 30, Channel Bandwidth: 5MHz

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 27710<br>(2310.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |


Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 31.94       | -51.9         | -30.2                 | -18.3                  | -48.5      | -40.0       | -8.5        |
| 2   | 61.04       | -51.1         | -53.2                 | -3.2                   | -56.4      | -40.0       | -16.4       |
| 3   | 135.73      | -61.2         | -64.0                 | -3.2                   | -67.2      | -40.0       | -27.2       |
| 4   | 318.09      | -61.1         | -69.1                 | 4.0                    | -65.1      | -40.0       | -25.1       |
| 5   | 762.35      | -66.7         | -66.4                 | 3.8                    | -62.6      | -40.0       | -22.6       |
| 6   | 934.04      | -70.3         | -65.9                 | 3.7                    | -62.2      | -40.0       | -22.2       |

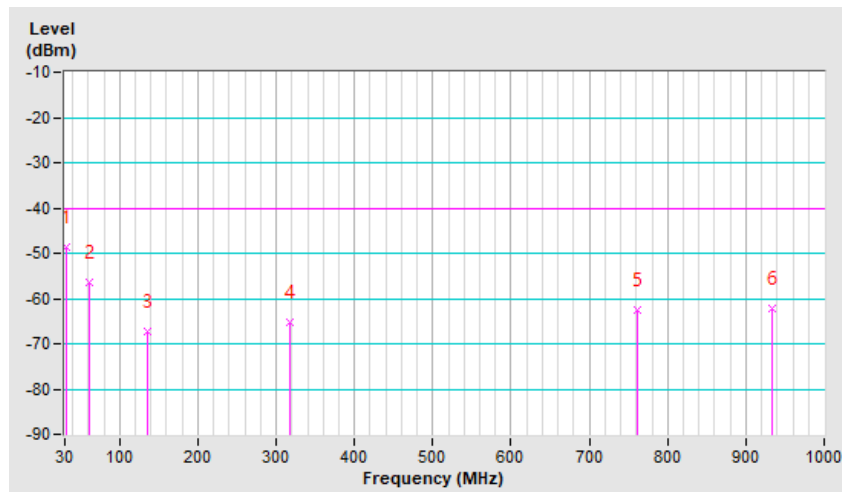

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 27710<br>(2310.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

| Antenna Polarity & Test Distance: Vertical at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 49.37       | -37.3         | -36.6                 | -8.3                   | -44.9      | -40.0       | -4.9        |
| 2   | 82.38       | -49.6         | -54.5                 | 0.4                    | -54.1      | -40.0       | -14.1       |
| 3   | 248.25      | -62.2         | -61.2                 | -1.5                   | -62.7      | -40.0       | -22.7       |
| 4   | 350.10      | -64.2         | -68.6                 | 3.9                    | -64.7      | -40.0       | -24.7       |
| 5   | 754.59      | -66.6         | -63.4                 | 3.9                    | -59.5      | -40.0       | -19.5       |
| 6   | 995.15      | -71.1         | -64.4                 | 3.4                    | -61.0      | -40.0       | -21.0       |

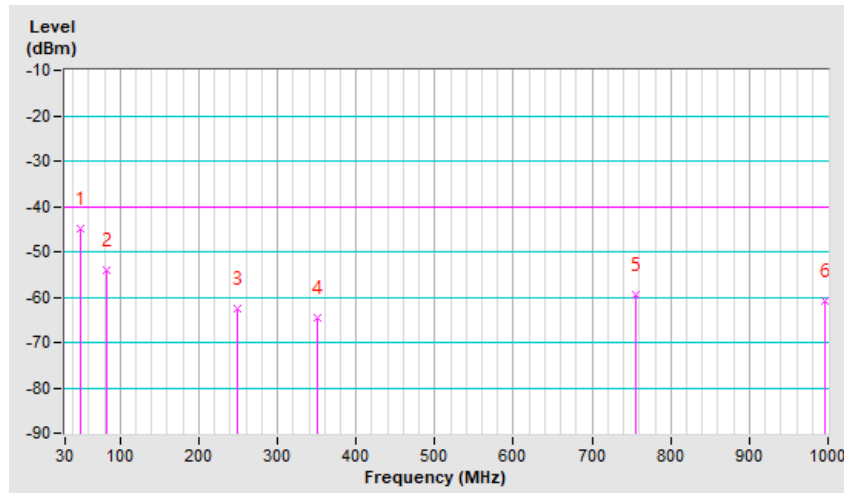


LTE Band 38, Channel Bandwidth: 20MHz

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 38000<br>(2595.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Horizontal at 3 M


| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 32.91       | -41.3         | -20.5                 | -17.7                  | -38.2      | -25.0       | -13.2       |
| 2   | 95.96       | -41.1         | -49.0                 | -1.2                   | -50.2      | -25.0       | -25.2       |
| 3   | 163.86      | -51.0         | -54.2                 | -2.9                   | -57.1      | -25.0       | -32.1       |
| 4   | 294.81      | -51.5         | -52.8                 | -1.8                   | -54.6      | -25.0       | -29.6       |
| 5   | 693.48      | -58.4         | -59.1                 | 3.5                    | -55.6      | -25.0       | -30.6       |
| 6   | 771.08      | -58.0         | -57.2                 | 3.9                    | -53.3      | -25.0       | -28.3       |

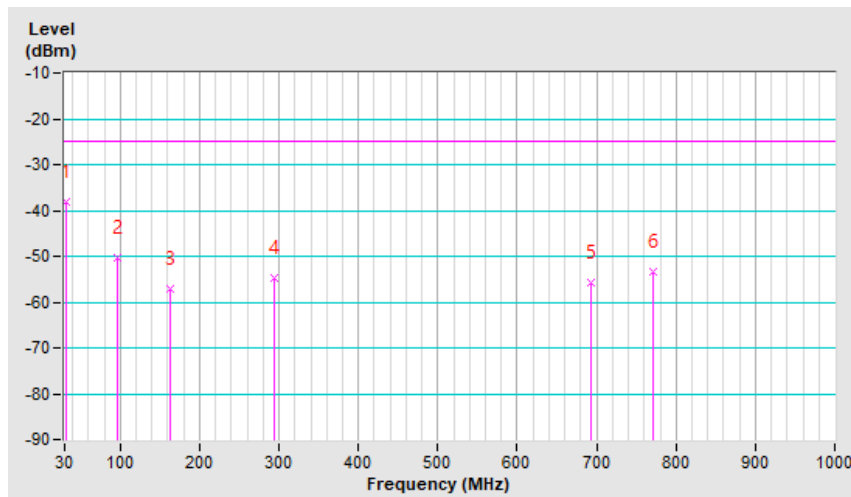

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 38000<br>(2595.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 106.63      | -55.4         | -61.6                 | -2.2                   | -63.8      | -25.0       | -38.8       |
| 2   | 199.75      | -58.2         | -56.9                 | -2.4                   | -59.3      | -25.0       | -34.3       |
| 3   | 326.82      | -62.3         | -66.6                 | 4.1                    | -62.5      | -25.0       | -37.5       |
| 4   | 596.48      | -64.6         | -64.9                 | 3.8                    | -61.1      | -25.0       | -36.1       |
| 5   | 694.45      | -64.5         | -62.2                 | 3.4                    | -58.8      | -25.0       | -33.8       |
| 6   | 798.24      | -62.1         | -59.3                 | 3.9                    | -55.4      | -25.0       | -30.4       |

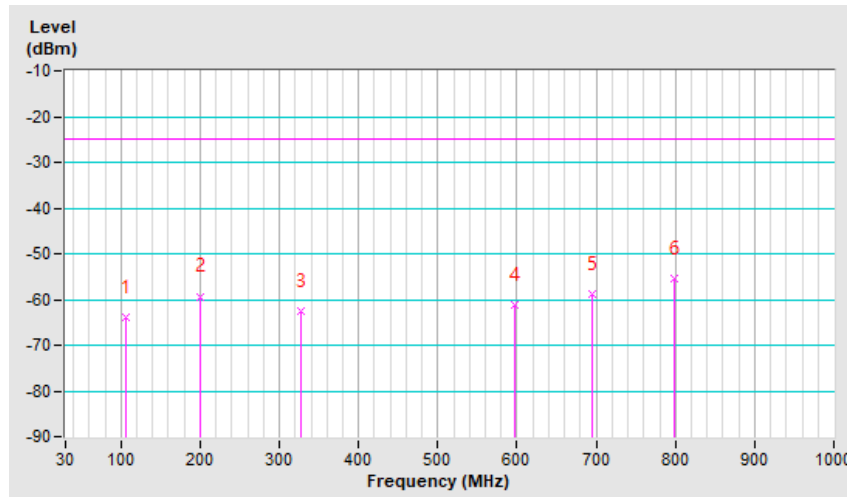


LTE Band 41, Channel Bandwidth: 5MHz

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 40620<br>(2593.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Horizontal at 3 M


| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 74.62       | -44.4         | -50.3                 | 0.1                    | -50.2      | -25.0       | -25.2       |
| 2   | 248.25      | -53.1         | -58.3                 | -1.5                   | -59.8      | -25.0       | -34.8       |
| 3   | 308.39      | -54.7         | -62.8                 | 3.9                    | -58.9      | -25.0       | -33.9       |
| 4   | 580.96      | -63.0         | -65.7                 | 3.8                    | -61.9      | -25.0       | -36.9       |
| 5   | 705.12      | -60.6         | -61.1                 | 3.5                    | -57.6      | -25.0       | -32.6       |
| 6   | 818.61      | -61.1         | -58.7                 | 3.9                    | -54.8      | -25.0       | -29.8       |

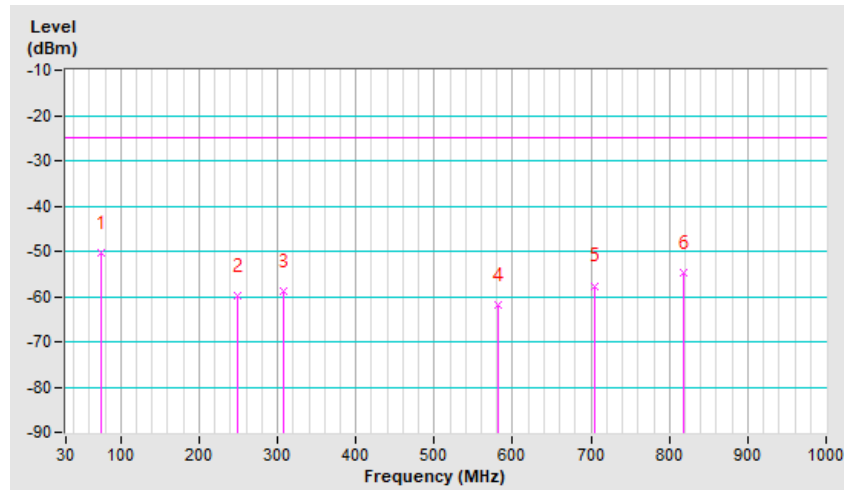

|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 40620<br>(2593.0MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 30.97       | -49.7         | -41.1                 | -18.8                  | -59.9      | -25.0       | -34.9       |
| 2   | 93.05       | -51.5         | -57.9                 | -0.7                   | -58.6      | -25.0       | -33.6       |
| 3   | 256.98      | -57.7         | -55.7                 | -1.5                   | -57.2      | -25.0       | -32.2       |
| 4   | 608.12      | -64.1         | -63.4                 | 3.6                    | -59.8      | -25.0       | -34.8       |
| 5   | 717.73      | -59.7         | -57.2                 | 3.5                    | -53.7      | -25.0       | -28.7       |
| 6   | 820.55      | -61.9         | -58.5                 | 3.9                    | -54.6      | -25.0       | -29.6       |

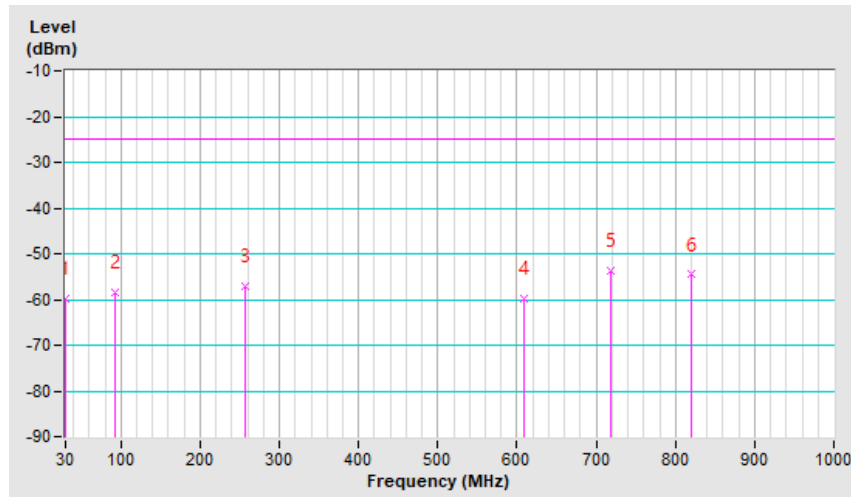




LTE Band 66, Channel Bandwidth: 1.4MHz

|                          |                                  |                 |                |
|--------------------------|----------------------------------|-----------------|----------------|
| Mode                     | TX channel 131979<br>(1710.7MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                         |                 |                |

Antenna Polarity & Test Distance: Horizontal at 3 M


| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 30.00       | -45.8         | -22.4                 | -19.4                  | -41.8      | -13.0       | -28.8       |
| 2   | 70.74       | -45.1         | -50.9                 | -0.4                   | -51.3      | -13.0       | -38.3       |
| 3   | 301.60      | -53.7         | -61.9                 | 3.7                    | -58.2      | -13.0       | -45.2       |
| 4   | 629.46      | -63.2         | -64.8                 | 3.6                    | -61.2      | -13.0       | -48.2       |
| 5   | 712.88      | -61.3         | -61.6                 | 3.5                    | -58.1      | -13.0       | -45.1       |
| 6   | 813.76      | -62.9         | -60.9                 | 4.0                    | -56.9      | -13.0       | -43.9       |

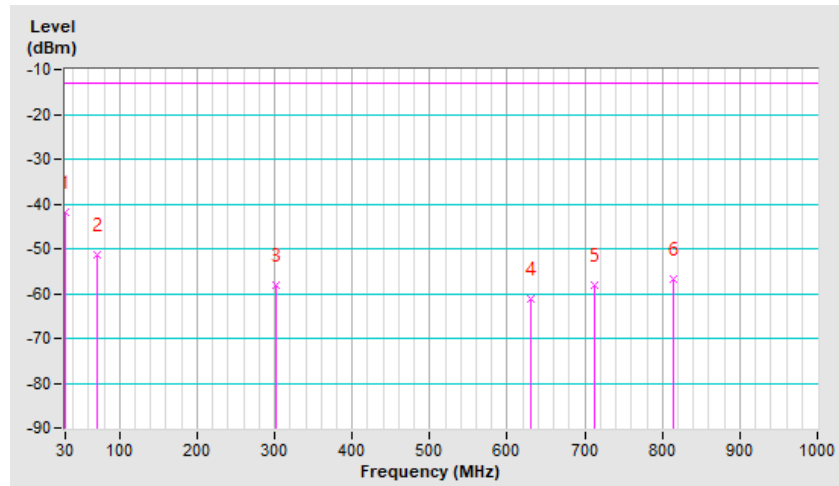

|                          |                                  |                 |                |
|--------------------------|----------------------------------|-----------------|----------------|
| Mode                     | TX channel 131979<br>(1710.7MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                         |                 |                |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 47.46       | -52.8         | -51.5                 | -9.2                   | -60.7      | -13.0       | -47.7       |
| 2   | 103.72      | -55.3         | -62.0                 | -2.0                   | -64.0      | -13.0       | -51.0       |
| 3   | 200.72      | -57.3         | -56.2                 | -2.3                   | -58.5      | -13.0       | -45.5       |
| 4   | 510.15      | -63.4         | -67.1                 | 3.8                    | -63.3      | -13.0       | -50.3       |
| 5   | 688.63      | -65.3         | -63.2                 | 3.5                    | -59.7      | -13.0       | -46.7       |
| 6   | 907.85      | -68.2         | -63.3                 | 3.6                    | -59.7      | -13.0       | -46.7       |

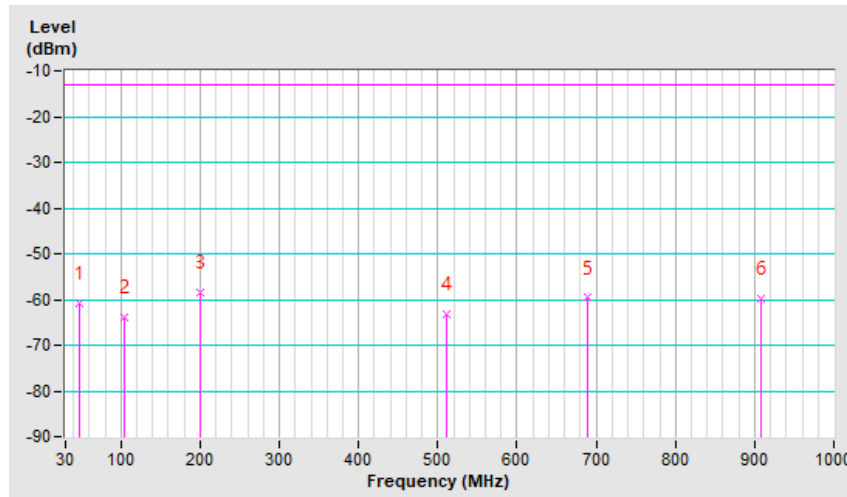

LTE Band 71, Channel Bandwidth: 5MHz


|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 133447<br>(695.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 30.00       | -52.9         | -31.6                 | -19.4                  | -51.0     | -13.0       | -38.0       |
| 2   | 70.74       | -42.0         | -50.0                 | -0.4                   | -50.4     | -13.0       | -37.4       |
| 3   | 205.57      | -55.8         | -64.0                 | -2.0                   | -66.0     | -13.0       | -53.0       |
| 4   | 587.75      | -68.3         | -73.1                 | 3.8                    | -69.3     | -13.0       | -56.3       |
| 5   | 788.54      | -68.8         | -69.6                 | 4.0                    | -65.6     | -13.0       | -52.6       |
| 6   | 997.09      | -72.2         | -68.8                 | 3.3                    | -65.5     | -13.0       | -52.5       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

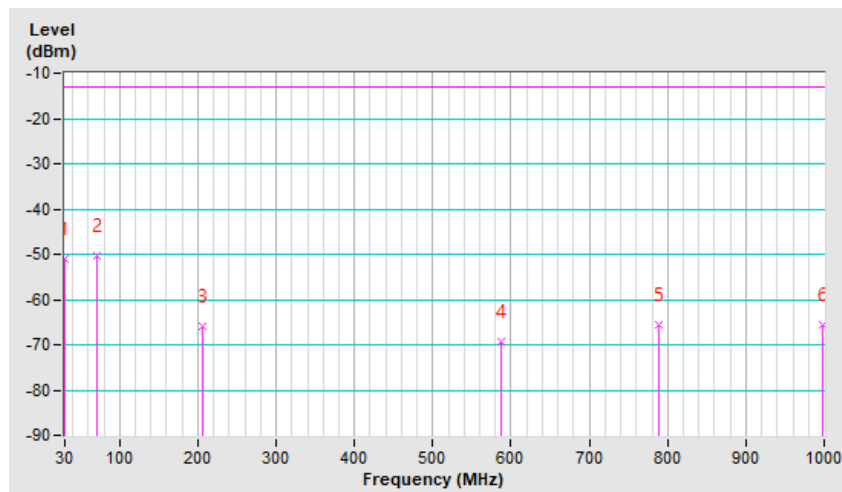


|                          |                                 |                 |                |
|--------------------------|---------------------------------|-----------------|----------------|
| Mode                     | TX channel 133447<br>(695.5MHz) | Frequency Range | Below 1000 MHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz   |
| Tested By                | Greg Lin                        |                 |                |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 40.70       | -45.0         | -43.4                 | -13.1                  | -56.5     | -13.0       | -43.5       |
| 2   | 78.50       | -52.2         | -60.2                 | 0.6                    | -59.6     | -13.0       | -46.6       |
| 3   | 201.69      | -61.8         | -63.1                 | -2.2                   | -65.3     | -13.0       | -52.3       |
| 4   | 300.60      | -67.8         | -73.2                 | 3.4                    | -69.8     | -13.0       | -56.8       |
| 5   | 770.05      | -68.2         | -67.4                 | 3.9                    | -63.5     | -13.0       | -50.5       |
| 6   | 990.27      | -70.0         | -65.8                 | 3.4                    | -62.4     | -13.0       | -49.4       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

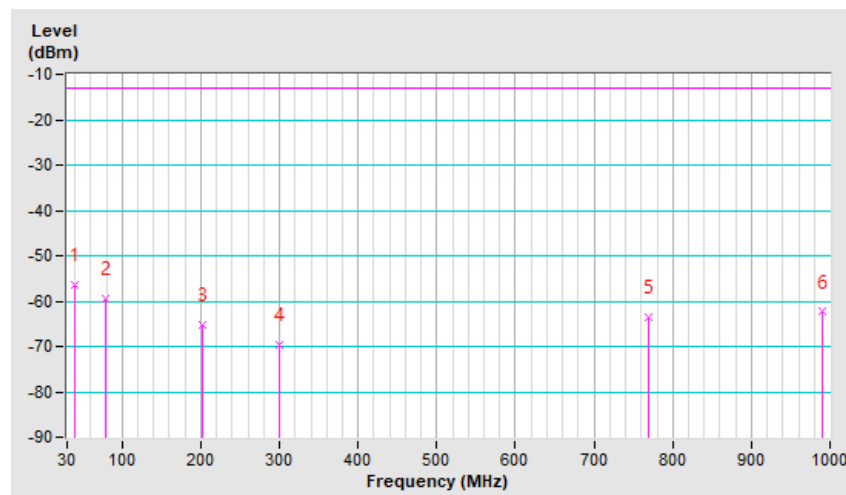

Above 1GHz

LTE Band 4, Channel Bandwidth: 1.4MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 19957<br>(1710.7MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3421.40     | -65.5         | -56.9                 | 1.3                    | -55.6      | -13.0       | -42.6       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3421.40     | -64.1         | -56.0                 | 1.3                    | -54.7      | -13.0       | -41.7       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20175<br>(1732.5MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3465.00     | -65.3         | -56.9                 | 1.4                    | -55.5      | -13.0       | -42.5       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3465.00     | -63.5         | -55.7                 | 1.4                    | -54.3      | -13.0       | -41.3       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20393<br>(1754.3MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3508.60     | -65.5         | -57.2                 | 1.4                    | -55.8      | -13.0       | -42.8       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3508.60     | -63.6         | -55.9                 | 1.4                    | -54.5      | -13.0       | -41.5       |

LTE Band 4, Channel Bandwidth: 5MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 19975<br>(1712.5MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3425.00     | -66.2         | -57.6                 | 1.3                    | -56.3      | -13.0       | -43.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3425.00     | -64.4         | -56.3                 | 1.3                    | -55.0      | -13.0       | -42.0       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20175<br>(1732.5MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3465.00     | -65.3         | -56.9                 | 1.4                    | -55.5      | -13.0       | -42.5       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3465.00     | -63.8         | -56.0                 | 1.4                    | -54.6      | -13.0       | -41.6       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20375<br>(1752.5MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3505.00     | -66.0         | -57.8                 | 1.5                    | -56.3      | -13.0       | -43.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3505.00     | -64.4         | -56.8                 | 1.5                    | -55.3      | -13.0       | -42.3       |

LTE Band 4, Channel Bandwidth: 20MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20050<br>(1720.0MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3440.00     | -65.9         | -57.4                 | 1.3                    | -56.1      | -13.0       | -43.1       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3440.00     | -64.3         | -56.3                 | 1.3                    | -55.0      | -13.0       | -42.0       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20175<br>(1732.5MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3465.00     | -65.8         | -57.4                 | 1.4                    | -56.0      | -13.0       | -43.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3465.00     | -63.8         | -56.0                 | 1.4                    | -54.6      | -13.0       | -41.6       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20300<br>(1745.0MHz) | Frequency Range | 1GHz ~ 20GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3490.00     | -66.4         | -58.2                 | 1.5                    | -56.7      | -13.0       | -43.7       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3490.00     | -64.0         | -56.4                 | 1.5                    | -54.9      | -13.0       | -41.9       |

LTE Band 7, Channel Bandwidth: 5MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 20775<br>(2502.5MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5005.00     | -65.7         | -53.4                 | 1.4                    | -52.0      | -25.0       | -27.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5005.00     | -61.0         | -50.0                 | 1.4                    | -48.6      | -25.0       | -23.6       |

|                          |                               |                 |              |
|--------------------------|-------------------------------|-----------------|--------------|
| Mode                     | TX channel 21100<br>(2535MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH               | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                      |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5070.00     | -65.9         | -53.4                 | 1.4                    | -52.0      | -25.0       | -27.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5070.00     | -60.8         | -49.4                 | 1.4                    | -48.0      | -25.0       | -23.0       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 21425<br>(2567.5MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5135.00     | -65.7         | -53.5                 | 1.4                    | -52.1      | -25.0       | -27.1       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5135.00     | -60.8         | -49.0                 | 1.4                    | -47.6      | -25.0       | -22.6       |



LTE Band 7, Channel Bandwidth: 20MHz

|                          |                               |                 |              |
|--------------------------|-------------------------------|-----------------|--------------|
| Mode                     | TX channel 20850<br>(2510MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH               | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                      |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5020.00     | -64.9         | -52.5                 | 1.4                    | -51.1      | -25.0       | -26.1       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5020.00     | -60.4         | -49.3                 | 1.4                    | -47.9      | -25.0       | -22.9       |

|                          |                               |                 |              |
|--------------------------|-------------------------------|-----------------|--------------|
| Mode                     | TX channel 21100<br>(2535MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH               | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                      |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5070.00     | -65.4         | -52.9                 | 1.4                    | -51.5      | -25.0       | -26.5       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5070.00     | -61.0         | -49.6                 | 1.4                    | -48.2      | -25.0       | -23.2       |

|                          |                               |                 |              |
|--------------------------|-------------------------------|-----------------|--------------|
| Mode                     | TX channel 21350<br>(2560MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH               | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                      |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5120.00     | -65.1         | -52.8                 | 1.4                    | -51.4      | -25.0       | -26.4       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5120.00     | -60.7         | -48.9                 | 1.4                    | -47.5      | -25.0       | -22.5       |

LTE Band 12, Channel Bandwidth: 1.4MHz

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23017<br>(699.7MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1399.40     | -64.9         | -58.6                 | 0.9                    | -57.7     | -13.0       | -44.7       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1399.40     | -62.4         | -57.3                 | 0.9                    | -56.4     | -13.0       | -43.4       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23095<br>(707.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1415.00     | -65.5         | -58.9                 | 0.9                    | -58.0     | -13.0       | -45.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1415.00     | -62.4         | -57.0                 | 0.9                    | -56.1     | -13.0       | -43.1       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23173<br>(715.3MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1430.60     | -65.0         | -58.3                 | 1.0                    | -57.3     | -13.0       | -44.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1430.60     | -62.8         | -57.3                 | 1.0                    | -56.3     | -13.0       | -43.3       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 12, Channel Bandwidth: 5MHz

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23035<br>(701.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1403.00     | -64.8         | -58.5                 | 0.9                    | -57.6     | -13.0       | -44.6       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1403.00     | -63.0         | -57.9                 | 0.9                    | -57.0     | -13.0       | -44.0       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23095<br>(707.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1415.00     | -65.3         | -58.8                 | 0.9                    | -57.9     | -13.0       | -44.9       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1415.00     | -63.2         | -57.9                 | 0.9                    | -57.0     | -13.0       | -44.0       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23155<br>(713.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1427.00     | -65.0         | -58.4                 | 1.0                    | -57.4     | -13.0       | -44.4       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1427.00     | -62.8         | -57.2                 | 1.0                    | -56.2     | -13.0       | -43.2       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 12, Channel Bandwidth: 10MHz

|                          |                              |                 |              |
|--------------------------|------------------------------|-----------------|--------------|
| Mode                     | TX channel 23060<br>(704MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH              | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                     |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1408.00     | -65.6         | -59.2                 | 0.9                    | -58.3     | -13.0       | -45.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1408.00     | -62.9         | -57.6                 | 0.9                    | -56.7     | -13.0       | -43.7       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23095<br>(707.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1415.00     | -65.2         | -58.6                 | 0.9                    | -57.7     | -13.0       | -44.7       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1415.00     | -62.6         | -57.3                 | 0.9                    | -56.4     | -13.0       | -43.4       |

|                          |                              |                 |              |
|--------------------------|------------------------------|-----------------|--------------|
| Mode                     | TX channel 23130<br>(711MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH              | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                     |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1422.00     | -65.5         | -59.0                 | 1.0                    | -58.0     | -13.0       | -45.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1422.00     | -62.8         | -57.4                 | 1.0                    | -56.4     | -13.0       | -43.4       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 13, Channel Bandwidth: 5MHz

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23205<br>(779.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1559.00     | -65.0         | -57.2                 | 1.3                    | -55.9     | -40.0       | -15.9       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1559.00     | -62.2         | -55.4                 | 1.3                    | -54.1     | -40.0       | -14.1       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23230<br>(782.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1564.00     | -65.0         | -57.1                 | 1.2                    | -55.9     | -40.0       | -15.9       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1564.00     | -62.1         | -55.2                 | 1.2                    | -54.0     | -40.0       | -14.0       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23255<br>(784.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1569.00     | -64.5         | -56.7                 | 1.2                    | -55.5     | -40.0       | -15.5       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1569.00     | -61.6         | -54.7                 | 1.2                    | -53.5     | -40.0       | -13.5       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 13, Channel Bandwidth: 10MHz

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23230<br>(782.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1564.00     | -65.0         | -57.1                 | 1.2                    | -55.9     | -40.0       | -15.9       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1564.00     | -61.8         | -54.8                 | 1.2                    | -53.6     | -40.0       | -13.6       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 17, Channel Bandwidth: 5MHz

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23755<br>(706.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1413.00     | -64.5         | -58.0                 | 0.9                    | -57.1     | -13.0       | -44.1       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1413.00     | -61.8         | -56.4                 | 0.9                    | -55.5     | -13.0       | -42.5       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23790<br>(710.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1420.00     | -64.8         | -58.2                 | 0.9                    | -57.3     | -13.0       | -44.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1420.00     | -62.4         | -56.9                 | 0.9                    | -56.0     | -13.0       | -43.0       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23825<br>(713.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1427.00     | -64.8         | -58.1                 | 1.0                    | -57.1     | -13.0       | -44.1       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1427.00     | -62.3         | -56.8                 | 1.0                    | -55.8     | -13.0       | -42.8       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 17, Channel Bandwidth: 10MHz

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23780<br>(709.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1418.00     | -64.7         | -58.1                 | 0.9                    | -57.2     | -13.0       | -44.2       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1418.00     | -61.8         | -56.3                 | 0.9                    | -55.4     | -13.0       | -42.4       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23790<br>(710.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1420.00     | -64.3         | -57.7                 | 0.9                    | -56.8     | -13.0       | -43.8       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1420.00     | -61.6         | -56.1                 | 0.9                    | -55.2     | -13.0       | -42.2       |

|                          |                                |                 |              |
|--------------------------|--------------------------------|-----------------|--------------|
| Mode                     | TX channel 23800<br>(711.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                       |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1422.00     | -64.8         | -58.3                 | 1.0                    | -57.3     | -13.0       | -44.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| 1   | 1422.00     | -62.2         | -56.7                 | 1.0                    | -55.7     | -13.0       | -42.7       |

Remarks:

1. ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.



LTE Band 30, Channel Bandwidth: 5MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 27685<br>(2307.5MHz) | Frequency Range | 1GHz ~ 25GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4615.00     | -61.8         | -51.4                 | 1.0                    | -50.4      | -40.0       | -10.4       |

Antenna Polarity & Test Distance: Vertical at 3 m

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4615.00     | -58.6         | -48.4                 | 1.0                    | -47.4      | -40.0       | -7.4        |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 27710<br>(2310.0MHz) | Frequency Range | 1GHz ~ 25GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4620.00     | -61.7         | -51.3                 | 1.0                    | -50.3      | -40.0       | -10.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4620.00     | -58.3         | -48.0                 | 1.0                    | -47.0      | -40.0       | -7.0        |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 27735<br>(2312.5MHz) | Frequency Range | 1GHz ~ 25GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4625.00     | -62.0         | -51.6                 | 1.1                    | -50.5      | -40.0       | -10.5       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4625.00     | -58.6         | -48.4                 | 1.1                    | -47.3      | -40.0       | -7.3        |

LTE Band 30, Channel Bandwidth: 10MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 27710<br>(2310.0MHz) | Frequency Range | 1GHz ~ 25GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4620.00     | -62.0         | -51.6                 | 1.0                    | -50.6      | -40.0       | -10.6       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 4620.00     | -58.8         | -48.5                 | 1.0                    | -47.5      | -40.0       | -7.5        |

LTE Band 38, Channel Bandwidth: 5MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 37775<br>(2572.5MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5145.00     | -62.5         | -50.4                 | 1.4                    | -49.0      | -25.0       | -24.0       |

| Antenna Polarity & Test Distance: Vertical at 3 m |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5145.00     | -60.6         | -48.7                 | 1.4                    | -47.3      | -25.0       | -22.3       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 38000<br>(2595.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5190.00     | -62.8         | -51.1                 | 1.4                    | -49.7      | -25.0       | -24.7       |

| Antenna Polarity & Test Distance: Vertical at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5190.00     | -60.8         | -48.6                 | 1.4                    | -47.2      | -25.0       | -22.2       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 38225<br>(2617.5MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5235.00     | -62.6         | -50.8                 | 1.4                    | -49.4      | -25.0       | -24.4       |

| Antenna Polarity & Test Distance: Vertical at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5235.00     | -60.3         | -48.4                 | 1.4                    | -47.0      | -25.0       | -22.0       |

LTE Band 38, Channel Bandwidth: 20MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 37850<br>(2580.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5160.00     | -62.6         | -50.6                 | 1.4                    | -49.2      | -25.0       | -24.2       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5160.00     | -60.6         | -48.6                 | 1.4                    | -47.2      | -25.0       | -22.2       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 38000<br>(2595.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5190.00     | -62.6         | -50.9                 | 1.4                    | -49.5      | -25.0       | -24.5       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5190.00     | -60.1         | -47.9                 | 1.4                    | -46.5      | -25.0       | -21.5       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 38150<br>(2610.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5220.00     | -63.1         | -51.4                 | 1.4                    | -50.0      | -25.0       | -25.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 5220.00     | -60.4         | -48.3                 | 1.4                    | -46.9      | -25.0       | -21.9       |

LTE Band 41, Channel Bandwidth: 5MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 39675<br>(2498.5MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 4997.00     | -65.2         | -52.9                 | 1.4                    | -51.5      | -25.0       | -26.5       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 4997.00     | -59.9         | -48.9                 | 1.4                    | -47.5      | -25.0       | -22.5       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 40620<br>(2593.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5186.00     | -64.8         | -53.1                 | 1.4                    | -51.7      | -25.0       | -26.7       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5186.00     | -59.2         | -47.0                 | 1.4                    | -45.6      | -25.0       | -20.6       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 41565<br>(2687.5MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5375.00     | -64.5         | -52.5                 | 1.5                    | -51.0      | -25.0       | -26.0       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5375.00     | -60.3         | -48.9                 | 1.5                    | -47.4      | -25.0       | -22.4       |

LTE Band 41, Channel Bandwidth: 20MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 39750<br>(2506.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5012.00     | -65.0         | -52.7                 | 1.4                    | -51.3      | -25.0       | -26.3       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5012.00     | -59.7         | -48.6                 | 1.4                    | -47.2      | -25.0       | -22.2       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 40620<br>(2593.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5186.00     | -64.6         | -52.9                 | 1.4                    | -51.5      | -25.0       | -26.5       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5186.00     | -59.6         | -47.4                 | 1.4                    | -46.0      | -25.0       | -21.0       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 41490<br>(2680.0MHz) | Frequency Range | 1GHz ~ 27GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5360.00     | -64.6         | -52.6                 | 1.5                    | -51.1      | -25.0       | -26.1       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 5360.00     | -59.8         | -48.5                 | 1.5                    | -47.0      | -25.0       | -22.0       |

LTE Band 66, Channel Bandwidth: 1.4MHz

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 131979<br>(1710.7MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3421.40     | -65.2         | -56.6                 | 1.3                    | -55.3      | -13.0       | -42.3       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3421.40     | -63.8         | -55.7                 | 1.3                    | -54.4      | -13.0       | -41.4       |

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132322<br>(1745.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3490.00     | -65.3         | -57.1                 | 1.5                    | -55.6      | -13.0       | -42.6       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3490.00     | -63.9         | -56.3                 | 1.5                    | -54.8      | -13.0       | -41.8       |

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132665<br>(1779.3MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3558.60     | -66.0         | -57.5                 | 1.4                    | -56.1      | -13.0       | -43.1       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3558.60     | -64.7         | -56.9                 | 1.4                    | -55.5      | -13.0       | -42.5       |

LTE Band 66, Channel Bandwidth: 5MHz

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 131997<br>(1712.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3425.00     | -65.9         | -57.3                 | 1.3                    | -56.0      | -13.0       | -43.0       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3425.00     | -64.0         | -55.9                 | 1.3                    | -54.6      | -13.0       | -41.6       |

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132322<br>(1745.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3490.00     | -66.1         | -57.9                 | 1.5                    | -56.4      | -13.0       | -43.4       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3490.00     | -63.9         | -56.3                 | 1.5                    | -54.8      | -13.0       | -41.8       |

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132647<br>(1777.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

Antenna Polarity & Test Distance: Horizontal at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3555.00     | -66.1         | -57.7                 | 1.4                    | -56.3      | -13.0       | -43.3       |

Antenna Polarity & Test Distance: Vertical at 3 M

| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|-----|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| 1   | 3555.00     | -64.7         | -56.9                 | 1.4                    | -55.5      | -13.0       | -42.5       |



LTE Band 66, Channel Bandwidth: 20MHz

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132072<br>(1720.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3440.00     | -65.1         | -56.6                 | 1.3                    | -55.3      | -13.0       | -42.3       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3440.00     | -63.9         | -55.9                 | 1.3                    | -54.6      | -13.0       | -41.6       |

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132322<br>(1745.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3490.00     | -66.0         | -57.8                 | 1.5                    | -56.3      | -13.0       | -43.3       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3490.00     | -64.1         | -56.5                 | 1.5                    | -55.0      | -13.0       | -42.0       |

|                          |                                  |                 |              |
|--------------------------|----------------------------------|-----------------|--------------|
| Mode                     | TX channel 132572<br>(1770.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                  | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                         |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |            |             |             |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3540.00     | -65.1         | -56.7                 | 1.4                    | -55.3      | -13.0       | -42.3       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |            |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 3540.00     | -63.8         | -56.0                 | 1.4                    | -54.6      | -13.0       | -41.6       |

LTE Band 71, Channel Bandwidth: 5MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 133147<br>(665.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1331.00     | -63.9         | -58.4                 | 0.4                    | -58.0     | -13.0       | -45.0       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |           |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1331.00     | -60.4         | -55.9                 | 0.4                    | -55.5     | -13.0       | -42.5       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 133297<br>(680.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1361.00     | -63.4         | -57.6                 | 0.6                    | -57.0     | -13.0       | -44.0       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |           |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1361.00     | -60.6         | -55.8                 | 0.6                    | -55.2     | -13.0       | -42.2       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 133447<br>(695.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1391.00     | -63.8         | -57.6                 | 0.8                    | -56.8     | -13.0       | -43.8       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |           |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1391.00     | -60.4         | -55.3                 | 0.8                    | -54.5     | -13.0       | -41.5       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

LTE Band 71, Channel Bandwidth: 20MHz

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 133222<br>(673.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1346.00     | -63.5         | -57.9                 | 0.5                    | -57.4     | -13.0       | -44.4       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |           |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1346.00     | -60.6         | -56.0                 | 0.5                    | -55.5     | -13.0       | -42.5       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 133297<br>(680.5MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1361.00     | -63.2         | -57.5                 | 0.6                    | -56.9     | -13.0       | -43.9       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |           |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1361.00     | -60.1         | -55.3                 | 0.6                    | -54.7     | -13.0       | -41.7       |

|                          |                                 |                 |              |
|--------------------------|---------------------------------|-----------------|--------------|
| Mode                     | TX channel 133372<br>(688.0MHz) | Frequency Range | 1GHz ~ 18GHz |
| Environmental Conditions | 22deg. C, 68%RH                 | Input Power     | 120Vac, 60Hz |
| Tested By                | Greg Lin                        |                 |              |

| Antenna Polarity & Test Distance: Horizontal at 3 M |             |               |                       |                        |           |             |             |
|---|-------------|---------------|-----------------------|------------------------|-----------|-------------|-------------|
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1376.00     | -63.1         | -57.2                 | 0.7                    | -56.5     | -13.0       | -43.5       |
| Antenna Polarity & Test Distance: Vertical at 3 M   |             |               |                       |                        |           |             |             |
| No.   | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) |
| 1   | 1376.00     | -60.9         | -55.9                 | 0.7                    | -55.2     | -13.0       | -42.2       |

Remarks:

- ERP (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB) + 2.15dB.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---