

## FCC Test Report (Spot Check: Part 27: 5GNR n41)

**Report No.:** RF200109E02E-16

**FCC ID:** 2AQ68T99W175M

**Original FCC ID:** 2AQ68T99W175

**Test Model:** T99W175M

**Received Date:** May 29, 2020

**Test Date:** Jul. 21 ~ Aug. 11, 2020

**Issued Date:** Aug. 11, 2020

**Applicant:** Hon Lin Technology Co., Ltd.

**Address:** 11F, No. 32, Jihu Rd., Neihu Dist., Taipei City 114, Taiwan R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /** 788550 / TW0003

**Designation Number:**



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Configuration of System under Test.....	11
3.2.1 Description of Support Units.....	11
3.3 Test Mode Applicability and Tested Channel Detail.....	12
3.4 EUT Operating Conditions.....	13
3.5 General Description of Applied Standards and References.....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Output Power Measurement.....	14
4.1.1 Limits of Output Power Measurement.....	14
4.1.2 Test Procedures.....	14
4.1.3 Test Setup.....	14
4.1.4 Test Results.....	15
4.2 Radiated Emission Measurement.....	29
4.2.1 Limits of Radiated Emission Measurement.....	29
4.2.2 Test Procedure.....	29
4.2.3 Deviation from Test Standard.....	29
4.2.4 Test Setup.....	30
4.2.5 Test Results.....	31
<b>5 Pictures of Test Arrangements</b> .....	<b>34</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>35</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200109E02E-16	Original release	Aug. 11, 2020

## 1 Certificate of Conformity

**Product:** 5G WWAN Module

**Brand:** Foxconn

**Test Model:** T99W175M

**Sample Status:** Engineering Sample

**Applicant:** Hon Lin Technology Co., Ltd.

**Test Date:** Jul. 21 ~ Aug. 11, 2020

**Standards:** FCC Part 27, Subpart M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Pettie Chen , **Date:** Aug. 11, 2020  
Pettie Chen / Senior Specialist

**Approved by :** Bruce Chen , **Date:** Aug. 11, 2020  
Bruce Chen / Senior Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
n41			
2.1046 27.50 (h)(2)	Equivalent Isotropically Radiated Power / Equivalent Radiated Power	Pass	Meet the requirement of limit.
2.1053 27.53 (m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -18.2dB at 90.45MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 18, 2020	Feb. 17, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM- SM8000	CABLE-CH9-02 (248780+171006)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 01, 2020	May 31, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 06, 2020	Jun. 05, 2021
DC power supply	U8002A	MY56330015	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 9.

### 3 General Information

#### 3.1 General Description of EUT

Product	5G WWAN Module						
Brand	Foxconn						
Test Model	T99W175M						
Status of EUT	Engineering Sample						
Power Supply Rating	5 Vdc (Host equipment) 3.135Vdc~3.63Vdc (Module)						
Modulation Type	$\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM						
Waveform Type	CP-OFDM, DFT-s-OFDM						
Operating Frequency	n41	Channel Bandwidth 20MHz	2506.02MHz ~ 2679.99MHz				
		Channel Bandwidth 40MHz	2516.01MHz ~ 2670.00MHz				
		Channel Bandwidth 50MHz	2521.02MHz ~ 2664.99MHz				
		Channel Bandwidth 60MHz	2526.00MHz ~ 2659.98MHz				
		Channel Bandwidth 80MHz	2536.02MHz ~ 2649.99MHz				
		Channel Bandwidth 90MHz	2541.00MHz ~ 2644.98MHz				
		Channel Bandwidth 100MHz	2546.01MHz ~ 2640.00MHz				
Max. EIRP Power	n41		$\pi/2$ BPSK	QPSK	16QAM	64QAM	256QAM
		Channel Bandwidth 20MHz	1129.796mW (30.53dBm)	1127.197mW (30.52dBm)	1047.129mW (30.20dBm)	931.108mW (29.69dBm)	576.766mW (27.61dBm)
		Channel Bandwidth 40MHz	1137.627mW (30.56dBm)	1124.605mW (30.51dBm)	1073.989mW (30.31dBm)	912.011mW (29.60dBm)	578.096mW (27.62dBm)
		Channel Bandwidth 50MHz	1145.513mW (30.59dBm)	1142.878mW (30.58dBm)	1042.317mW (30.18dBm)	924.698mW (29.66dBm)	582.103mW (27.65dBm)
		Channel Bandwidth 60MHz	1150.800mW (30.61dBm)	1145.513mW (30.59dBm)	1025.652mW (30.11dBm)	909.913mW (29.59dBm)	584.790mW (27.67dBm)
		Channel Bandwidth 80MHz	1145.513mW (30.59dBm)	1081.434mW (30.34dBm)	1006.932mW (30.03dBm)	887.156mW (29.48dBm)	568.853mW (27.55dBm)
		Channel Bandwidth 90MHz	1140.250mW (30.57dBm)	1127.197mW (30.52dBm)	1088.930mW (30.37dBm)	933.254mW (29.70dBm)	597.035mW (27.76dBm)
Channel Bandwidth 100MHz	1156.112mW (30.63dBm)	1127.197mW (30.52dBm)	1083.927mW (30.35dBm)	926.830mW (29.67dBm)	594.292mW (27.74dBm)		
Emission Designator	n41		$\pi/2$ BPSK	QPSK	16QAM	64QAM	256QAM
		Channel Bandwidth 20MHz	18M2G7D	18M2G7D	18M2D7W	18M2D7W	18M2D7W
		Channel Bandwidth 40MHz	37M8G7D	37M9G7D	37M8D7W	37M8D7W	37M9D7W
		Channel Bandwidth 50MHz	47M5G7D	47M4G7D	47M4D7W	47M5D7W	47M4D7W
		Channel Bandwidth 60MHz	58M0G7D	57M8G7D	57M7D7W	57M7D7W	57M7D7W
		Channel Bandwidth 80MHz	77M5G7D	77M3G7D	77M6D7W	77M3D7W	77M3D7W
		Channel Bandwidth 90MHz	87M3G7D	87M4G7D	87M3D7W	87M3D7W	87M2D7W
Channel Bandwidth 100MHz	97M4G7D	97M2G7D	97M3D7W	97M4D7W	97M2D7W		
Antenna Type	Refer to Note as below						
Antenna Connector	Refer to Note as below						
Accessory Device	NA						
Cable Supplied	NA						

Note:

1. This report is a supplementary report to the original BV CPS report no.: RF200109E02B-15. The difference compared with original report is only adding mmWave hardware, mmWave function is disabled by software. Exhibit prepared for FCC Spot Check Verification report, the format, test items and amount of spot-check test data are decided by applicant's engineering judgment, for more details please refer to declaration letter exhibit. Radiated emission and output power verification worst test refer to original report.
2. There are four Difference HW of T99W175M.

Brand	Model	HW
Foxconn	T99W175M	1. 3G+LTE+Sub6+mmWave+eSIM
		2. 3G+LTE+Sub6+mmWave+w/o eSIM
		3. 3G+LTE+Sub6+mmWave+eSIM+GNSS connector
		4. 3G+LTE+Sub6+mmWave+w/o eSIM+GNSS connector

\*After pre-testing, "HW: 1. 3G+LTE+Sub6+mmWave+eSIM" is the worst for the final tests.

3. After pre-testing, "DFT-s-OFDM" is the worst for the final tests.



4. The following antennas were provided to the EUT.

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range (MHz)	Antenna Type	Connector Type
1		WHA YU	C107-511720-A	4.41	660~803	PCB	I-PEX
2		WHA YU	C107-511721-A	3.81 4.03	791~960 1447.9~1606	PCB	I-PEX
3		WHA YU	C107-511722-A	4.27 5.31	1710~2170 2500~2690	PCB	I-PEX
4		WHA YU	C107-511723-A	2.99 0.92	2300~2400 3500~3700	PCB	I-PEX
5		WHA YU	C107-511724-A	6.45	5150~5925	PCB	I-PEX
6		WHA YU	C107-511725-A	4.89	3400~3700	PCB	I-PEX
7		AVX	5000106-R1-X01	2.91	699~803	Monopole	I-PEX
8		AVX	5000107-R1-X01	2.59	791~960	Monopole	I-PEX
9		AVX	5000108-R1-X01	2.85	1427~1610	Monopole	I-PEX
10		AVX	5000109-R1-X01	2.23 2.94	1710~2200 5150~5925	Monopole	I-PEX
11		AVX	5000110-R1-X01	0.9	2300~2690	Monopole	I-PEX
12		AVX	5000111-R1-X01	0.87	3300~5000	Monopole	I-PEX
13	Tx1/ Rx1	Ethertronics	5003806	0.4 -1.61 0.39 2.95 1.98 0.38 0.83 2.31	698-821 824-960 1425-1515 1710-2200 2300-2690 3300-4200 4400-5000 5150-5925	PIFA	I-PEX
	Rx2	Ethertronics	5003807	-2.24 -4.52 2.87 2.99 2.93 2.91 2.23 -0.85 -3.04	716-821 824-960 1425-1515 1557-1610 1805-2200 2300-2690 3300-4200 4400-5000 5150-5925	PIFA	I-PEX
	Tx2/ Rx3	Ethertronics	5003806	2.21 2.25 -0.45 2.6	1710-2200 2300-2690 3300-4200 4400-5000	PIFA	I-PEX
	Rx4	Ethertronics	5003700	1.38 2.87 0.6 -2.09	1805-2200 2300-2690 3300-4200 4400-5000	PIFA	I-PEX


Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range (MHz)	Antenna Type	Connector Type
14	Ant. 0 (TX/RX)	Master Wave	NA	2.4 2.2 2.9 2.9 2.9 NA	880~960 1020~2170 2545~2595 3565~3600 3900~4000 GPS	PCB	I-PEX
	Ant. 2 (TX/RX)	Master Wave	NA	NA 2.2 2.8 2.9 2.8 NA	880~960 1020~2170 2545~2595 3565~3600 3900~4000 GPS	PCB	I-PEX
	Ant. 1 (RX)	Master Wave	NA	NA 5.3 5.1 4.3 4.5 NA	880~960 1020~2170 2545~2595 3565~3600 3900~4000 GPS	PCB	I-PEX
	Ant. 3 (RX)	Master Wave	NA	1.3 6.8 3.7 6.4 6.2 3.7	880~960 1020~2170 2545~2595 3565~3600 3900~4000 GPS	PCB	I-PEX

\*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

\*The antenna for the final tests as following table.

	Band	Antenna
5GNR	41 (30kHz) /20/40/50/60/80/90/100	Antenna 3

### 3.2 Configuration of System under Test

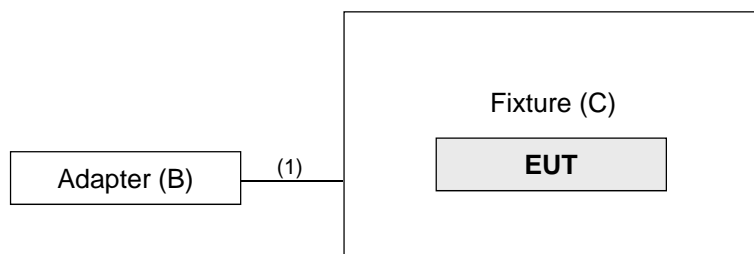

Remote site



#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	NA	-
B.	Adapter	LITEON	PA-1050-39	NA	NA	-
C.	Fixture	NA	NA	NA	NA	Provided by client.

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.5	Y	0	-

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below.

n41

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	EIRP	501204 to 535998	501204 (2506.02MHz), 518598 (2592.99MHz), 535998 (2679.99MHz)	20MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 50 RB Offset 1 RB / 99 RB Offset 50 RB / 0 RB Offset 50 RB / 25 RB Offset 50 RB / 50 RB Offset 100 RB / 0 RB Offset
-		503202 to 534000	503202 (2516.01MHz), 518598 (2592.99MHz), 534000 (2670.00MHz)	40MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 53 RB Offset 1 RB / 105 RB Offset 53 RB / 0 RB Offset 53 RB / 26 RB Offset 53 RB / 53 RB Offset 106 RB / 0 RB Offset
-		504204 to 532998	504204 (2521.02MHz), 518598 (2592.99MHz), 532998 (2664.99MHz)	50MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 66 RB Offset 1 RB / 132 RB Offset 66 RB / 0 RB Offset 66 RB / 33 RB Offset 66 RB / 66 RB Offset 133 RB / 0 RB Offset
-		505200 to 531996	505200 (2526.00MHz), 518598 (2592.99MHz), 531996 (2659.98MHz)	60MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 81 RB Offset 1 RB / 161 RB Offset 81 RB / 0 RB Offset 81 RB / 40 RB Offset 81 RB / 81 RB Offset 162 RB / 0 RB Offset
-		507204 to 529998	507204 (2536.02MHz), 518598 (2592.99MHz), 529998 (2649.99MHz)	80MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 108 RB Offset 1 RB / 216 RB Offset 108 RB / 0 RB Offset 108 RB / 54 RB Offset 108 RB / 108 RB Offset 217 RB / 0 RB Offset
-		508200 to 528996	508200 (2541.00MHz), 518598 (2592.99MHz), 528996 (2644.98MHz)	90MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 122 RB Offset 1 RB / 244 RB Offset 122 RB / 0 RB Offset 122 RB / 61 RB Offset 122 RB / 122 RB Offset 245 RB / 0 RB Offset
-		509202 to 528000	509202 (2546.01MHz), 518598 (2592.99MHz), 528000 (2640.00MHz)	100MHz	$\pi/2$ BPSK / QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset 1 RB / 136 RB Offset 1 RB / 272 RB Offset 136 RB / 0 RB Offset 136 RB / 68 RB Offset 136 RB / 136 RB Offset 273 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	501204 to 535998	518598 (2592.99MHz)	20MHz	$\pi/2$ BPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	501204 to 535998	518598 (2592.99MHz)	20MHz	$\pi/2$ BPSK	1 RB / 0 RB Offset

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25deg. C, 70%RH	5Vdc	James Yang
Radiated Emission	22deg. C, 66%RH 22deg. C, 65%RH	120Vac, 60Hz	Greg Lin

**3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**3.5 General Description of Applied Standards and References**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and References:

**Test Standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

#### 4.1.2 Test Procedures

##### Conducted Power Measurement:

The EUT was set up for the maximum power with 5GNR link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

##### Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is

given in Equation as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

#### 4.1.3 Test Setup

Conducted Power Measurement:

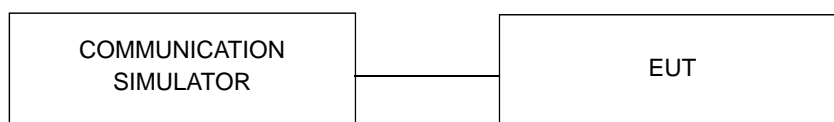

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

##### Conducted Output Power (dBm)

n41						
BW	MCS Index	Channel		501204	518598	535998
		Frequency (MHz)		2506.02	2592.99	2679.99
20M	$\pi/2$ BPSK	1	0	25.14	<b>25.22</b>	25.12
		1	25	25.17	25.09	25.05
		1	50	25.18	25.08	25.18
		25	0	24.57	24.48	24.61
		25	12	24.83	24.75	24.73
		25	25	24.86	24.64	24.69
		51	0	24.61	24.45	24.62
	QPSK	1	0	25.15	<b>25.21</b>	24.97
		1	25	25.20	25.04	25.08
		1	50	25.00	24.87	25.17
		25	0	24.68	24.70	24.79
		25	12	24.35	24.41	24.48
		25	25	24.66	24.70	24.38
		51	0	24.80	24.57	24.43
	16QAM	1	0	24.66	24.74	<b>24.89</b>
		1	25	24.88	24.58	24.83
		1	50	24.85	24.78	24.68
		25	0	24.32	24.33	24.50
		25	12	24.44	24.42	24.33
		25	25	24.38	24.14	24.45
		51	0	24.23	24.50	24.25
	64QAM	1	0	24.25	24.26	24.05
		1	25	24.18	24.09	24.00
		1	50	24.21	<b>24.38</b>	24.26
		25	0	23.67	23.54	23.83
		25	12	23.86	23.61	23.59
		25	25	23.52	23.45	23.69
		51	0	23.74	23.59	23.63
	256QAM	1	0	22.06	<b>22.30</b>	22.27
		1	25	22.20	22.10	22.12
1		50	22.22	22.15	22.22	
25		0	21.51	21.63	21.79	
25		12	21.87	21.59	21.87	
25		25	21.63	21.75	21.70	
51		0	21.50	21.75	21.44	

n41						
BW	MCS Index	Channel		503202	518598	534000
		Frequency (MHz)		2516.01	2592.99	2670
40M	$\pi/2$ BPSK	1	0	25.23	<b>25.25</b>	25.23
		1	53	25.23	25.11	25.14
		1	105	25.15	25.24	25.08
		53	0	24.76	24.73	24.75
		53	26	24.57	24.65	24.79
		53	53	24.76	24.64	24.45
		106	0	24.81	24.72	24.71
	QPSK	1	0	25.15	24.87	24.93
		1	53	25.16	25.02	<b>25.20</b>
		1	105	25.13	24.97	24.93
		53	0	24.43	24.71	24.56
		53	26	24.65	24.76	24.44
		53	53	24.62	24.77	24.58
		106	0	24.60	24.57	24.66
	16QAM	1	0	24.74	24.83	<b>25.00</b>
		1	53	24.72	24.73	24.82
		1	105	24.79	24.88	24.82
		53	0	24.34	24.41	24.54
		53	26	24.40	24.35	24.38
		53	53	24.54	24.28	24.49
		106	0	24.24	24.47	24.41
	64QAM	1	0	24.28	24.27	24.13
		1	53	24.26	24.24	<b>24.29</b>
		1	105	24.14	24.24	24.14
		53	0	23.86	23.60	23.61
		53	26	23.59	23.65	23.61
		53	53	23.79	23.65	23.70
		106	0	23.54	23.89	23.85
	256QAM	1	0	<b>22.31</b>	22.30	22.02
		1	53	22.30	22.08	22.24
1		105	22.21	22.23	22.23	
53		0	21.74	21.77	21.56	
53		26	21.77	21.52	21.50	
53		53	21.88	21.49	21.63	
106		0	21.59	21.86	21.84	



n41						
BW	MCS Index	Channel		504204	518598	532998
		Frequency (MHz)		2521.02	2592.99	2664.99
50M	$\pi/2$ BPSK	1	0	25.08	<b>25.28</b>	25.20
		1	66	25.26	25.10	25.19
		1	132	25.13	25.25	25.12
		66	0	24.60	24.66	24.62
		66	33	24.70	24.71	24.56
		66	66	24.76	24.61	24.65
		133	0	24.80	24.59	24.72
	QPSK	1	0	25.02	<b>25.27</b>	25.22
		1	66	25.18	25.22	24.83
		1	132	24.88	24.93	25.16
		66	0	24.68	24.47	24.51
		66	33	24.68	24.57	24.64
		66	66	24.43	24.50	24.59
		133	0	24.68	24.41	24.52
	16QAM	1	0	24.71	24.84	24.87
		1	66	24.57	24.72	24.83
		1	132	24.80	<b>24.87</b>	24.76
		66	0	24.24	24.10	24.43
		66	33	24.55	24.46	24.40
		66	66	24.33	24.35	24.44
		133	0	24.51	24.32	24.33
	64QAM	1	0	<b>24.35</b>	24.19	24.25
		1	66	24.07	24.26	24.23
		1	132	24.19	24.22	24.22
		66	0	23.64	23.72	23.46
		66	33	23.73	23.87	23.82
		66	66	23.46	23.73	23.68
		133	0	23.74	23.55	23.70
	256QAM	1	0	22.23	<b>22.34</b>	22.22
		1	66	22.32	22.16	22.14
1		132	22.11	22.12	22.16	
66		0	21.70	21.45	21.82	
66		33	21.56	21.63	21.40	
66		66	21.69	21.88	21.87	
133		0	21.66	21.61	21.51	

n41						
BW	MCS Index	Channel		505200	518598	531996
		Frequency (MHz)		2526	2592.99	2659.98
60M	$\pi/2$ BPSK	1	0	25.20	25.23	<b>25.30</b>
		1	81	25.29	25.26	25.16
		1	161	25.15	25.29	25.27
		81	0	24.54	24.70	24.64
		81	40	24.80	24.66	24.63
		81	81	24.60	24.74	24.60
		162	0	24.71	24.70	24.72
	QPSK	1	0	25.02	25.06	24.99
		1	81	25.14	25.23	25.18
		1	161	25.24	25.27	<b>25.28</b>
		81	0	24.75	24.68	24.70
		81	40	24.65	24.82	24.64
		81	81	24.49	24.56	24.44
		162	0	24.55	24.53	24.46
	16QAM	1	0	24.78	24.72	24.60
		1	81	24.76	24.64	24.64
		1	161	24.69	24.74	<b>24.80</b>
		81	0	24.28	24.33	24.30
		81	40	24.44	24.43	24.45
		81	81	24.44	24.47	24.50
		162	0	24.30	24.30	24.19
	64QAM	1	0	24.28	<b>24.28</b>	24.05
		1	81	24.01	24.23	24.05
		1	161	24.12	24.10	24.11
		81	0	23.54	23.84	23.82
		81	40	23.86	23.74	23.84
		81	81	23.49	23.78	23.87
		162	0	23.87	23.70	23.74
	256QAM	1	0	<b>22.36</b>	22.33	22.19
		1	81	22.21	22.31	22.18
1		161	22.27	22.34	22.02	
81		0	21.78	21.64	21.71	
81		40	21.90	21.68	21.49	
81		81	21.85	21.60	21.74	
162		0	21.65	21.56	21.75	

n41						
BW	MCS Index	Channel		507204	518598	529998
		Frequency (MHz)		2536.02	2592.99	2649.99
80M	$\pi/2$ BPSK	1	0	25.23	<b>25.28</b>	25.18
		1	108	25.27	24.99	25.26
		1	216	25.25	25.09	25.27
		108	0	24.56	24.75	24.78
		108	54	24.63	24.73	24.46
		108	108	24.95	24.73	24.70
		217	0	24.82	24.56	24.84
	QPSK	1	0	24.68	24.80	24.66
		1	108	24.93	24.80	24.70
		1	216	24.96	<b>25.03</b>	24.96
		108	0	24.35	24.44	24.40
		108	54	24.38	24.24	24.53
		108	108	24.68	24.58	24.68
		217	0	24.83	24.43	24.56
	16QAM	1	0	24.66	24.69	24.61
		1	108	24.27	<b>24.72</b>	24.45
		1	216	24.44	24.31	24.48
		108	0	24.17	24.12	24.42
		108	54	24.06	24.06	23.98
		108	108	24.25	24.29	24.23
		217	0	24.02	24.45	24.02
	64QAM	1	0	23.74	<b>24.17</b>	23.91
		1	108	24.14	23.94	24.04
		1	216	23.99	23.78	23.85
		108	0	23.35	23.52	23.20
		108	54	23.54	23.54	23.59
		108	108	23.53	23.58	23.44
		217	0	23.62	23.55	23.57
	256QAM	1	0	22.03	<b>22.24</b>	22.03
		1	108	22.12	21.89	22.00
1		216	22.17	21.96	22.08	
108		0	21.69	21.32	21.18	
108		54	21.53	21.66	21.32	
108		108	21.51	21.26	21.12	
217		0	21.46	21.64	21.40	

n41						
BW	MCS Index	Channel		508200	518598	528996
		Frequency (MHz)		2541	2592.99	2644.98
90M	$\pi/2$ BPSK	1	0	25.26	25.17	25.15
		1	122	25.14	25.26	25.12
		1	244	25.18	25.11	24.96
		122	0	24.79	24.60	24.81
		122	61	24.75	24.83	24.81
		122	122	24.81	24.63	24.53
		245	0	24.71	24.65	24.71
	QPSK	1	0	25.13	25.16	25.00
		1	122	25.21	25.00	25.09
		1	244	25.15	25.13	25.05
		122	0	24.55	24.74	24.43
		122	61	24.74	24.51	24.63
		122	122	24.51	24.40	24.62
		245	0	24.52	24.48	24.74
	16QAM	1	0	24.66	24.94	24.84
		1	122	25.06	24.62	24.60
		1	244	24.82	24.76	24.73
		122	0	24.44	24.39	24.19
		122	61	24.33	24.58	24.52
		122	122	24.43	24.44	24.40
		245	0	24.37	24.56	24.32
	64QAM	1	0	24.02	24.29	24.29
		1	122	24.17	24.25	24.30
		1	244	24.06	24.39	24.13
		122	0	23.53	23.75	23.57
		122	61	23.54	23.75	23.79
		122	122	23.90	23.60	23.68
		245	0	23.69	23.61	23.60
	256QAM	1	0	22.21	22.03	22.12
		1	122	22.21	22.18	22.07
1		244	22.45	21.91	22.19	
122		0	21.63	21.40	21.64	
122		61	21.81	21.63	21.66	
122		122	21.66	21.78	21.84	
245		0	21.55	21.82	21.73	

n41						
BW	MCS Index	Channel		509202	518598	528000
		Frequency (MHz)		2546.01	2592.99	2640
100M	$\pi/2$ BPSK	1	0	25.31	<b>25.32</b>	25.14
		1	136	25.24	25.16	25.12
		1	272	25.17	24.98	25.05
		136	0	24.82	24.67	24.75
		136	68	24.63	24.76	24.66
		136	136	24.68	24.83	24.76
		273	0	24.63	24.68	24.84
	QPSK	1	0	<b>25.21</b>	25.11	25.06
		1	136	25.04	25.09	25.10
		1	272	25.20	24.87	25.19
		136	0	24.64	24.56	24.75
		136	68	24.53	24.56	24.48
		136	136	24.85	24.51	24.34
		273	0	24.44	24.49	24.60
	16QAM	1	0	24.94	24.80	24.96
		1	136	24.62	24.75	24.71
		1	272	<b>25.04</b>	24.55	24.60
		136	0	24.41	24.35	24.16
		136	68	24.10	24.28	24.45
		136	136	24.21	24.50	24.25
		273	0	24.34	24.29	24.54
	64QAM	1	0	24.17	24.27	24.32
		1	136	23.97	24.16	23.94
		1	272	24.06	24.03	<b>24.36</b>
		136	0	23.67	23.71	23.66
		136	68	23.46	23.59	23.88
		136	136	23.55	23.73	23.56
		273	0	23.48	23.66	23.55
	256QAM	1	0	22.21	22.26	22.41
		1	136	21.98	22.24	22.35
1		272	<b>22.43</b>	22.18	22.13	
136		0	21.50	21.56	21.58	
136		68	21.53	21.64	21.63	
136		136	21.75	21.70	21.43	
273		0	21.66	21.72	21.62	

**EIRP Power(dBm)**

		n41				
BW	MCS Index	Channel		501204	518598	535998
		Frequency (MHz)		2506.02	2592.99	2679.99
20M	$\pi/2$ BPSK	1	0	30.45	<b>30.53</b>	30.43
		1	25	30.48	30.40	30.36
		1	50	30.49	30.39	30.49
		25	0	29.88	29.79	29.92
		25	12	30.14	30.06	30.04
		25	25	30.17	29.95	30.00
		51	0	29.92	29.76	29.93
	QPSK	1	0	30.46	<b>30.52</b>	30.28
		1	25	30.51	30.35	30.39
		1	50	30.31	30.18	30.48
		25	0	29.99	30.01	30.10
		25	12	29.66	29.72	29.79
		25	25	29.97	30.01	29.69
		51	0	30.11	29.88	29.74
	16QAM	1	0	29.97	30.05	<b>30.20</b>
		1	25	30.19	29.89	30.14
		1	50	30.16	30.09	29.99
		25	0	29.63	29.64	29.81
		25	12	29.75	29.73	29.64
		25	25	29.69	29.45	29.76
		51	0	29.54	29.81	29.56
	64QAM	1	0	29.56	29.57	29.36
		1	25	29.49	29.40	29.31
		1	50	29.52	<b>29.69</b>	29.57
		25	0	28.98	28.85	29.14
		25	12	29.17	28.92	28.90
		25	25	28.83	28.76	29.00
		51	0	29.05	28.90	28.94
	256QAM	1	0	27.37	<b>27.61</b>	27.58
		1	25	27.51	27.41	27.43
1		50	27.53	27.46	27.53	
25		0	26.82	26.94	27.10	
25		12	27.18	26.90	27.18	
25		25	26.94	27.06	27.01	
51		0	26.81	27.06	26.75	

\*EIRP = Conducted + antenna gain (5.31dBi)

n41						
BW	MCS Index	Channel		503202	518598	534000
		Frequency (MHz)		2516.01	2592.99	2670
40M	$\pi/2$ BPSK	1	0	30.54	<b>30.56</b>	30.54
		1	53	30.54	30.42	30.45
		1	105	30.46	30.55	30.39
		53	0	30.07	30.04	30.06
		53	26	29.88	29.96	30.10
		53	53	30.07	29.95	29.76
		106	0	30.12	30.03	30.02
	QPSK	1	0	30.46	30.18	30.24
		1	53	30.47	30.33	<b>30.51</b>
		1	105	30.44	30.28	30.24
		53	0	29.74	30.02	29.87
		53	26	29.96	30.07	29.75
		53	53	29.93	30.08	29.89
		106	0	29.91	29.88	29.97
	16QAM	1	0	30.05	30.14	<b>30.31</b>
		1	53	30.03	30.04	30.13
		1	105	30.10	30.19	30.13
		53	0	29.65	29.72	29.85
		53	26	29.71	29.66	29.69
		53	53	29.85	29.59	29.80
		106	0	29.55	29.78	29.72
	64QAM	1	0	29.59	29.58	29.44
		1	53	29.57	29.55	<b>29.60</b>
		1	105	29.45	29.55	29.45
		53	0	29.17	28.91	28.92
		53	26	28.90	28.96	28.92
		53	53	29.10	28.96	29.01
		106	0	28.85	29.20	29.16
	256QAM	1	0	<b>27.62</b>	27.61	27.33
		1	53	27.61	27.39	27.55
1		105	27.52	27.54	27.54	
53		0	27.05	27.08	26.87	
53		26	27.08	26.83	26.81	
53		53	27.19	26.80	26.94	
106		0	26.90	27.17	27.15	

\*EIRP = Conducted + antenna gain (5.31dBi)

n41						
BW	MCS Index	Channel		504204	518598	532998
		Frequency (MHz)		2521.02	2592.99	2664.99
50M	$\pi/2$ BPSK	1	0	30.39	<b>30.59</b>	30.51
		1	66	30.57	30.41	30.50
		1	132	30.44	30.56	30.43
		66	0	29.91	29.97	29.93
		66	33	30.01	30.02	29.87
		66	66	30.07	29.92	29.96
		133	0	30.11	29.90	30.03
	QPSK	1	0	30.33	<b>30.58</b>	30.53
		1	66	30.49	30.53	30.14
		1	132	30.19	30.24	30.47
		66	0	29.99	29.78	29.82
		66	33	29.99	29.88	29.95
		66	66	29.74	29.81	29.90
		133	0	29.99	29.72	29.83
	16QAM	1	0	30.02	30.15	30.18
		1	66	29.88	30.03	30.14
		1	132	30.11	<b>30.18</b>	30.07
		66	0	29.55	29.41	29.74
		66	33	29.86	29.77	29.71
		66	66	29.64	29.66	29.75
		133	0	29.82	29.63	29.64
	64QAM	1	0	<b>29.66</b>	29.50	29.56
		1	66	29.38	29.57	29.54
		1	132	29.50	29.53	29.53
		66	0	28.95	29.03	28.77
		66	33	29.04	29.18	29.13
		66	66	28.77	29.04	28.99
		133	0	29.05	28.86	29.01
	256QAM	1	0	27.54	<b>27.65</b>	27.53
		1	66	27.63	27.47	27.45
1		132	27.42	27.43	27.47	
66		0	27.01	26.76	27.13	
66		33	26.87	26.94	26.71	
66		66	27.00	27.19	27.18	
133		0	26.97	26.92	26.82	

\*EIRP = Conducted + antenna gain (5.31dBi)



n41						
BW	MCS Index	Channel		505200	518598	531996
		Frequency (MHz)		2526	2592.99	2659.98
60M	$\pi/2$ BPSK	1	0	30.51	30.54	<b>30.61</b>
		1	81	30.60	30.57	30.47
		1	161	30.46	30.60	30.58
		81	0	29.85	30.01	29.95
		81	40	30.11	29.97	29.94
		81	81	29.91	30.05	29.91
		162	0	30.02	30.01	30.03
	QPSK	1	0	30.33	30.37	30.30
		1	81	30.45	30.54	30.49
		1	161	30.55	30.58	<b>30.59</b>
		81	0	30.06	29.99	30.01
		81	40	29.96	30.13	29.95
		81	81	29.80	29.87	29.75
		162	0	29.86	29.84	29.77
	16QAM	1	0	30.09	30.03	29.91
		1	81	30.07	29.95	29.95
		1	161	30.00	30.05	<b>30.11</b>
		81	0	29.59	29.64	29.61
		81	40	29.75	29.74	29.76
		81	81	29.75	29.78	29.81
		162	0	29.61	29.61	29.50
	64QAM	1	0	29.59	<b>29.59</b>	29.36
		1	81	29.32	29.54	29.36
		1	161	29.43	29.41	29.42
		81	0	28.85	29.15	29.13
		81	40	29.17	29.05	29.15
		81	81	28.80	29.09	29.18
		162	0	29.18	29.01	29.05
	256QAM	1	0	<b>27.67</b>	27.64	27.50
		1	81	27.52	27.62	27.49
1		161	27.58	27.65	27.33	
81		0	27.09	26.95	27.02	
81		40	27.21	26.99	26.80	
81		81	27.16	26.91	27.05	
162		0	26.96	26.87	27.06	

\*EIRP = Conducted + antenna gain (5.31dBi)

n41						
BW	MCS Index	Channel		507204	518598	529998
		Frequency (MHz)		2536.02	2592.99	2649.99
80M	$\pi/2$ BPSK	1	0	30.54	<b>30.59</b>	30.49
		1	108	30.58	30.30	30.57
		1	216	30.56	30.40	30.58
		108	0	29.87	30.06	30.09
		108	54	29.94	30.04	29.77
		108	108	30.26	30.04	30.01
		217	0	30.13	29.87	30.15
	QPSK	1	0	29.99	30.11	29.97
		1	108	30.24	30.11	30.01
		1	216	30.27	<b>30.34</b>	30.27
		108	0	29.66	29.75	29.71
		108	54	29.69	29.55	29.84
		108	108	29.99	29.89	29.99
		217	0	30.14	29.74	29.87
	16QAM	1	0	29.97	30.00	29.92
		1	108	29.58	<b>30.03</b>	29.76
		1	216	29.75	29.62	29.79
		108	0	29.48	29.43	29.73
		108	54	29.37	29.37	29.29
		108	108	29.56	29.60	29.54
		217	0	29.33	29.76	29.33
	64QAM	1	0	29.05	<b>29.48</b>	29.22
		1	108	29.45	29.25	29.35
		1	216	29.30	29.09	29.16
		108	0	28.66	28.83	28.51
		108	54	28.85	28.85	28.90
		108	108	28.84	28.89	28.75
		217	0	28.93	28.86	28.88
	256QAM	1	0	27.34	<b>27.55</b>	27.34
		1	108	27.43	27.20	27.31
1		216	27.48	27.27	27.39	
108		0	27.00	26.63	26.49	
108		54	26.84	26.97	26.63	
108		108	26.82	26.57	26.43	
217		0	26.77	26.95	26.71	

\*EIRP = Conducted + antenna gain (5.31dBi)

n41						
BW	MCS Index	Channel		508200	518598	528996
		Frequency (MHz)		2541	2592.99	2644.98
90M	$\pi/2$ BPSK	1	0	30.57	30.48	30.46
		1	122	30.45	30.57	30.43
		1	244	30.49	30.42	30.27
		122	0	30.10	29.91	30.12
		122	61	30.06	30.14	30.12
		122	122	30.12	29.94	29.84
		245	0	30.02	29.96	30.02
	QPSK	1	0	30.44	30.47	30.31
		1	122	30.52	30.31	30.40
		1	244	30.46	30.44	30.36
		122	0	29.86	30.05	29.74
		122	61	30.05	29.82	29.94
		122	122	29.82	29.71	29.93
		245	0	29.83	29.79	30.05
	16QAM	1	0	29.97	30.25	30.15
		1	122	30.37	29.93	29.91
		1	244	30.13	30.07	30.04
		122	0	29.75	29.70	29.50
		122	61	29.64	29.89	29.83
		122	122	29.74	29.75	29.71
		245	0	29.68	29.87	29.63
	64QAM	1	0	29.33	29.60	29.60
		1	122	29.48	29.56	29.61
		1	244	29.37	29.70	29.44
		122	0	28.84	29.06	28.88
		122	61	28.85	29.06	29.10
		122	122	29.21	28.91	28.99
		245	0	29.00	28.92	28.91
	256QAM	1	0	27.52	27.34	27.43
		1	122	27.52	27.49	27.38
1		244	27.76	27.22	27.50	
122		0	26.94	26.71	26.95	
122		61	27.12	26.94	26.97	
122		122	26.97	27.09	27.15	
245		0	26.86	27.13	27.04	

\*EIRP = Conducted + antenna gain (5.31dBi)

n41						
BW	MCS Index	Channel		509202	518598	528000
		Frequency (MHz)		2546.01	2592.99	2640
100M	$\pi/2$ BPSK	1	0	30.62	<b>30.63</b>	30.45
		1	136	30.55	30.47	30.43
		1	272	30.48	30.29	30.36
		136	0	30.13	29.98	30.06
		136	68	29.94	30.07	29.97
		136	136	29.99	30.14	30.07
		273	0	29.94	29.99	30.15
	QPSK	1	0	<b>30.52</b>	30.42	30.37
		1	136	30.35	30.40	30.41
		1	272	30.51	30.18	30.50
		136	0	29.95	29.87	30.06
		136	68	29.84	29.87	29.79
		136	136	30.16	29.82	29.65
		273	0	29.75	29.80	29.91
	16QAM	1	0	30.25	30.11	30.27
		1	136	29.93	30.06	30.02
		1	272	<b>30.35</b>	29.86	29.91
		136	0	29.72	29.66	29.47
		136	68	29.41	29.59	29.76
		136	136	29.52	29.81	29.56
		273	0	29.65	29.60	29.85
	64QAM	1	0	29.48	29.58	29.63
		1	136	29.28	29.47	29.25
		1	272	29.37	29.34	<b>29.67</b>
		136	0	28.98	29.02	28.97
		136	68	28.77	28.90	29.19
		136	136	28.86	29.04	28.87
		273	0	28.79	28.97	28.86
	256QAM	1	0	27.52	27.57	27.72
		1	136	27.29	27.55	27.66
1		272	<b>27.74</b>	27.49	27.44	
136		0	26.81	26.87	26.89	
136		68	26.84	26.95	26.94	
136		136	27.06	27.01	26.74	
273		0	26.97	27.03	26.93	

\*EIRP = Conducted + antenna gain (5.31dBi)

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

In the FCC 27.53(m)(4), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log (P)$  dB. The emission limit equal to  $-25\text{dBm}$ .

### 4.2.2 Test Procedure

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}$ .


**Note:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.2.3 Deviation from Test Standard


No deviation.

#### 4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

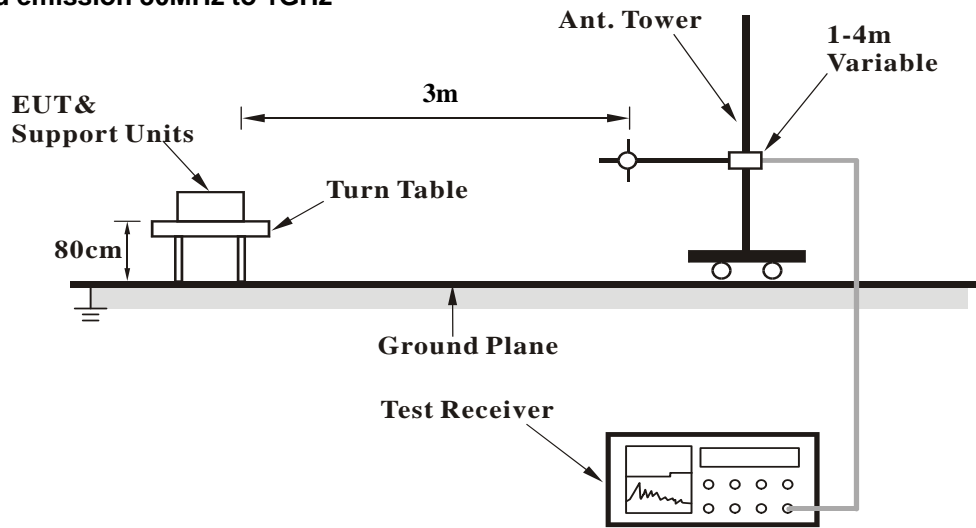

For radiated emission above 1GHz

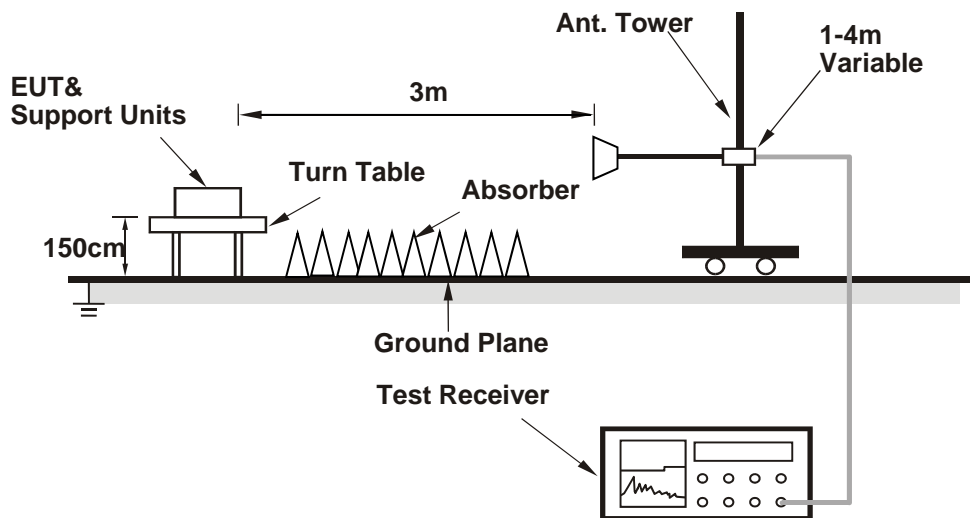

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.5 Test Results

Below 1GHz


n41, Channel Bandwidth: 20MHz

Mode	TX channel 518598 (2592.99MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-46.5	-31.3	-12.2	-43.5	-25.0	-18.5
<b>2</b>	<b>90.45</b>	<b>-34.7</b>	<b>-44.3</b>	<b>1.1</b>	<b>-43.2</b>	<b>-25.0</b>	<b>-18.2</b>
3	139.65	-48.3	-53.8	-0.3	-54.1	-25.0	-29.1
4	316.78	-48.5	-57.5	5.2	-52.3	-25.0	-27.3
5	405.35	-63.2	-68.8	5.2	-63.6	-25.0	-38.6
6	895.97	-57.3	-53.1	3.9	-49.2	-25.0	-24.2

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

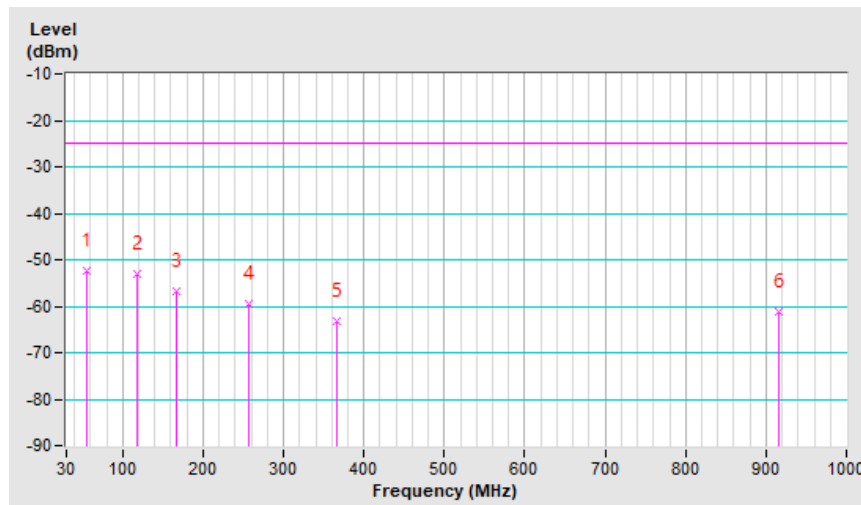


Mode	TX channel 518598 (2592.99MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	91.86	-36.9	-44.5	1.1	-43.4	-25.0	-18.4
2	143.87	-44.5	-46.9	-0.3	-47.2	-25.0	-22.2
3	187.45	-43.0	-49.9	3.9	-46.0	-25.0	-21.0
4	323.81	-52.2	-57.3	5.2	-52.1	-25.0	-27.1
5	385.67	-57.7	-62.9	5.2	-57.7	-25.0	-32.7
6	665.42	-67.7	-66.6	5.0	-61.6	-25.0	-36.6

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

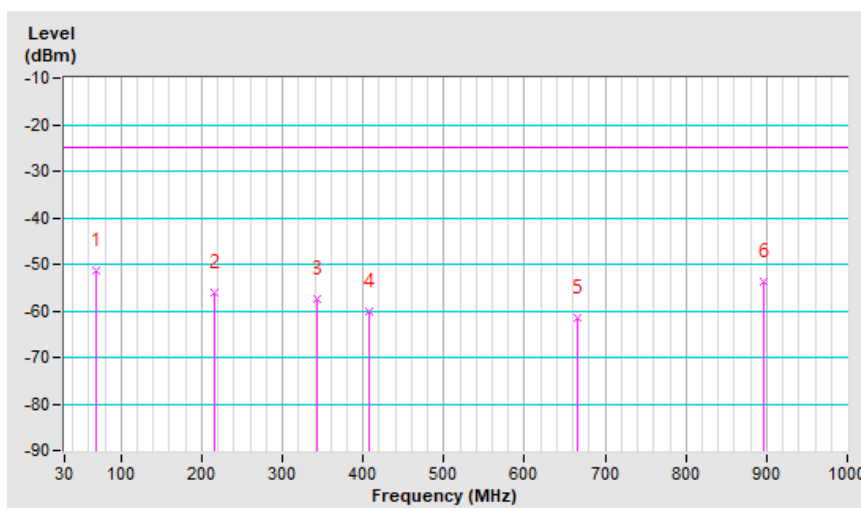



Above 1GHz  
n41, Channel Bandwidth: 20MHz

Mode	TX channel 518598 (2592.99MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 65%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-59.3	-50.8	1.3	-49.5	-13.0	-36.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3765.00	-57.1	-48.8	1.3	-47.5	-13.0	-34.5

Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---