


LTE Band 66 (CA 66B)


Channel Band width: 10MHz+10MHz

Channel 132022(1715.0MHz)+132121(1724.9MHz)

Frequency Range : 9kHz~1GHz

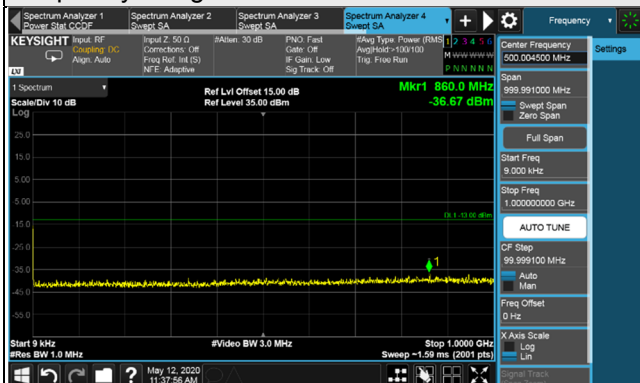


Frequency Range : 1GHz~20GHz

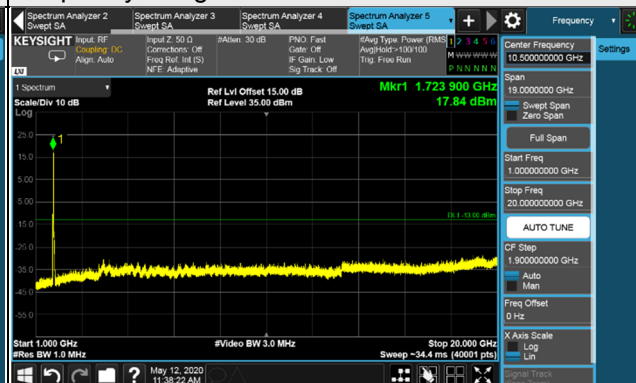


Channel 132373(1750.1MHz)+132472(1760.0MHz)

Frequency Range : 9kHz~1GHz

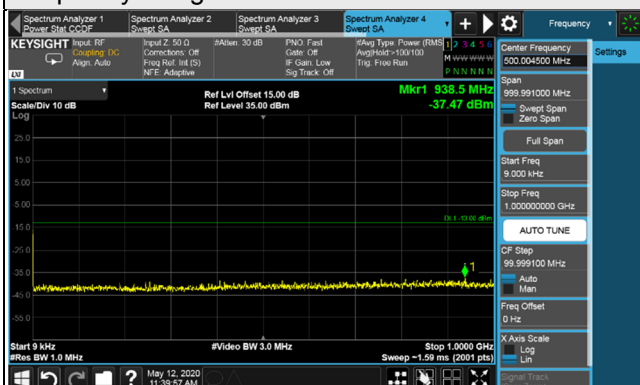


Frequency Range : 1GHz~20GHz

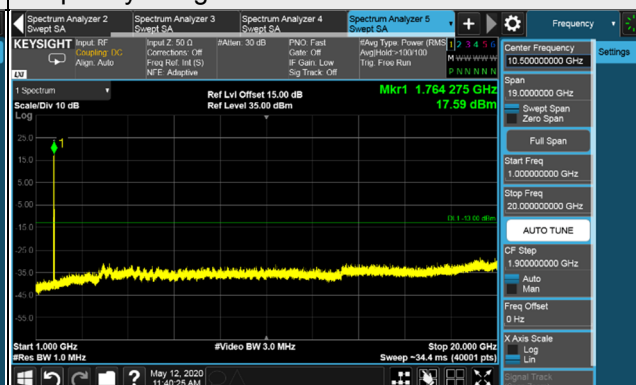


Channel 132523(1765.1MHz)+132622(1775.0MHz)

Frequency Range : 9kHz~1GHz

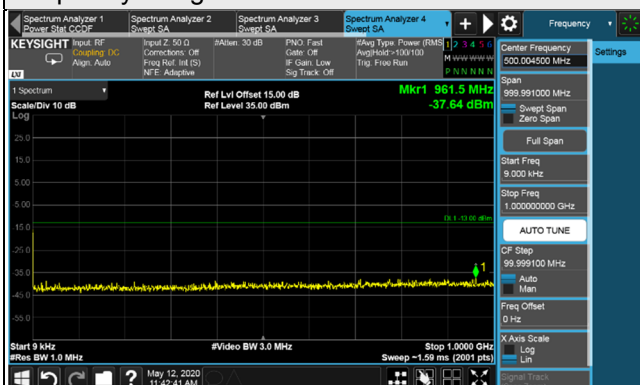

Frequency Range : 1GHz~20GHz

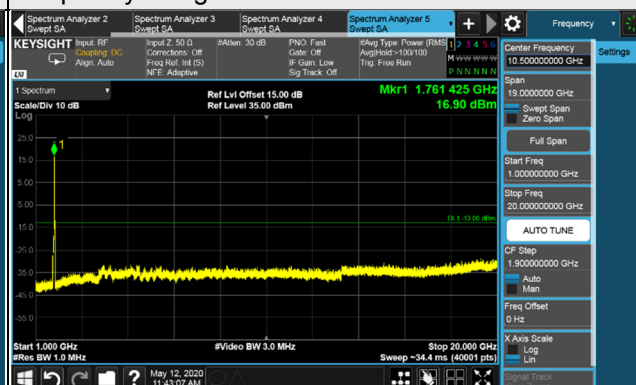

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

For LTE Band 66

According to FCC 27.53(h) for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

For LTE Band 7, 38, 41

In the FCC 27.53(m) (4)(6), On any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25dBm .

4.7.2 Test Procedure

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}$.


Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard


No deviation.

4.7.4 Test Setup

For radiated emission 30MHz to 1GHz

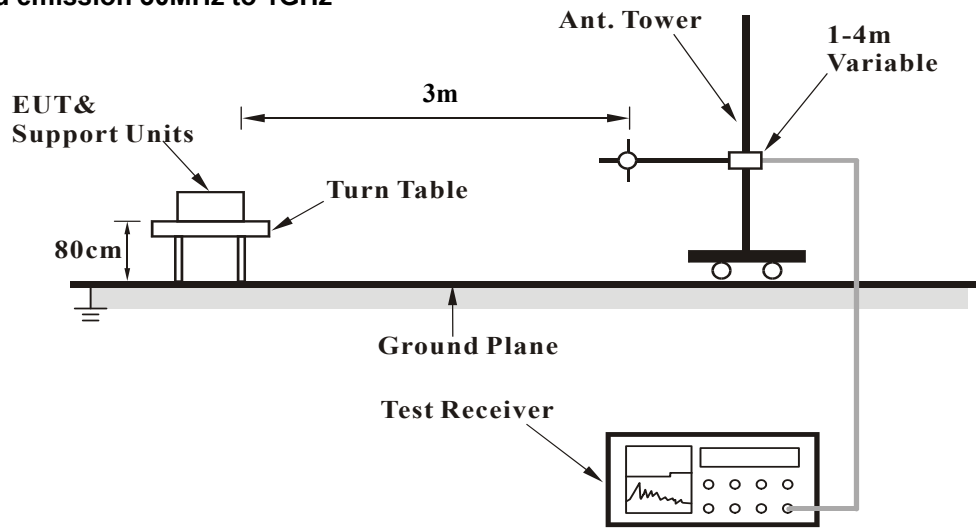

For radiated emission above 1GHz

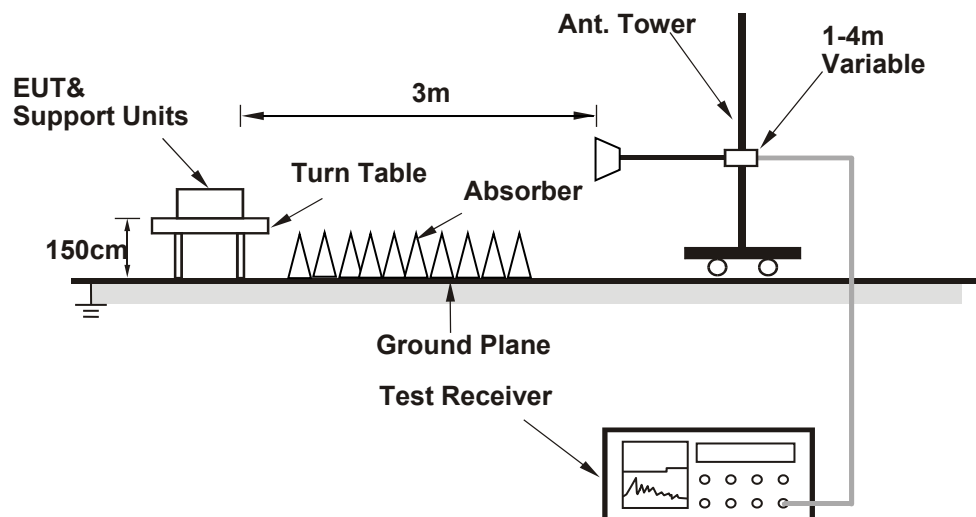


For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

Below 1GHz
LTE Band 7 (CA 7C)

Mode	TX channel 21003 (2525.3MHz)+ TX channel 21174 (2542.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		


Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	50.37	-54.1	-47.0	-7.9	-54.9	-13.0	-41.9
2	101.78	-47.7	-54.4	-1.6	-56.0	-13.0	-43.0
3	235.64	-63.4	-69.1	-1.5	-70.6	-13.0	-57.6
4	520.82	-69.9	-73.4	3.8	-69.6	-13.0	-56.6
5	730.34	-70.5	-70.3	3.6	-66.7	-13.0	-53.7
6	996.12	-71.1	-65.5	3.3	-62.2	-13.0	-49.2

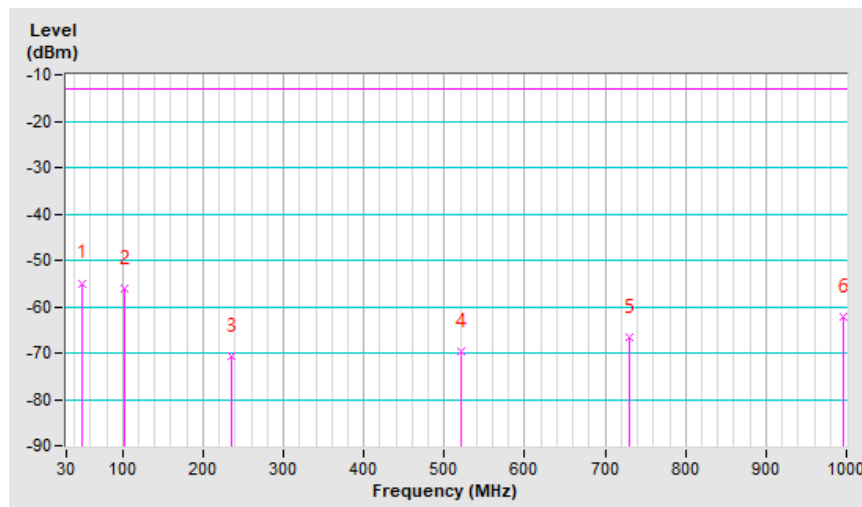

Mode	TX channel 21003 (2525.3MHz)+ TX channel 21174 (2542.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	31.00	-45.8	-37.2	-18.8	-56.0	-25.0	-31.0
2	87.23	-57.7	-63.8	-0.1	-63.9	-25.0	-38.9
3	316.15	-64.1	-68.1	4.0	-64.1	-25.0	-39.1
4	607.15	-69.6	-68.9	3.6	-65.3	-25.0	-40.3
5	774.96	-68.9	-65.8	4.0	-61.8	-25.0	-36.8
6	994.18	-70.9	-64.2	3.4	-60.8	-25.0	-35.8

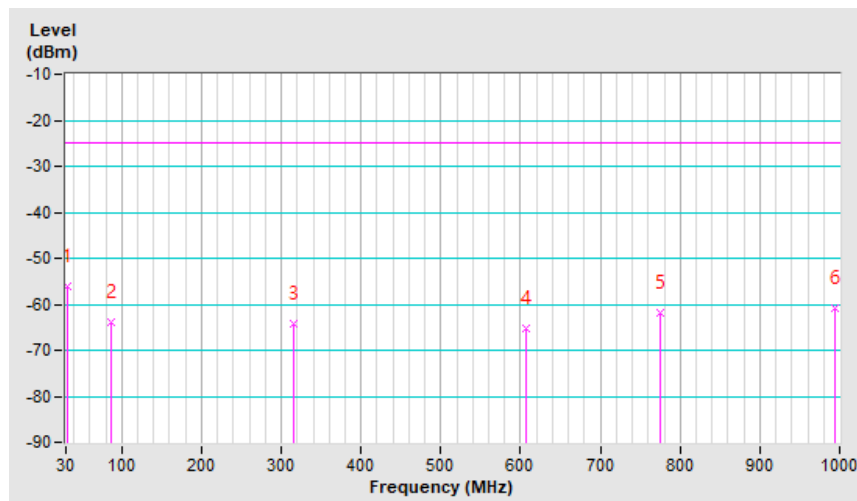


LTE Band 38 (CA 38C)

Mode	TX channel 37901 (2585.1MHz)+ TX channel 38099 (2604.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M


No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	34.85	-58.0	-38.4	-16.5	-54.9	-25.0	-29.9
2	94.99	-42.0	-50.0	-0.9	-50.9	-25.0	-25.9
3	275.41	-61.4	-64.2	-1.6	-65.8	-25.0	-40.8
4	613.94	-69.7	-71.4	3.7	-67.7	-25.0	-42.7
5	751.68	-68.0	-67.7	3.7	-64.0	-25.0	-39.0
6	830.25	-70.4	-67.3	3.9	-63.4	-25.0	-38.4

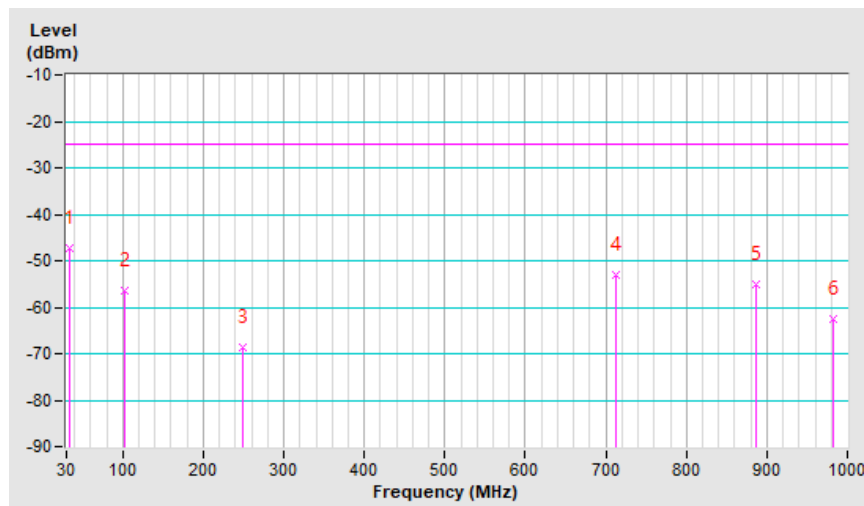

Mode	TX channel 37901 (2585.1MHz)+ TX channel 38099 (2604.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M


No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	36.82	-51.4	-45.7	-15.2	-60.9	-25.0	-35.9
2	87.23	-57.7	-63.8	-0.1	-63.9	-25.0	-38.9
3	277.35	-64.9	-60.0	-1.6	-61.6	-25.0	-36.6
4	612.00	-70.6	-69.6	3.7	-65.9	-25.0	-40.9
5	806.00	-70.1	-67.1	3.9	-63.2	-25.0	-38.2
6	943.74	-70.5	-65.1	3.7	-61.4	-25.0	-36.4

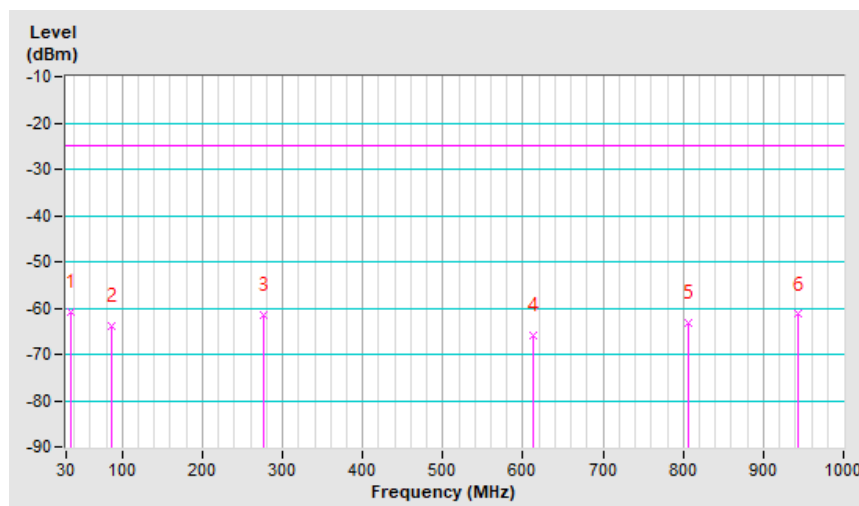

LTE Band 41 (CA 41C)

Mode	TX channel 40521 (2583.1MHz)+ TX channel 40719 (2602.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		


Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.00	-50.4	-29.6	-17.7	-47.3	-25.0	-22.3
2	102.75	-48.0	-54.5	-1.8	-56.3	-25.0	-31.3
3	249.22	-62.2	-67.3	-1.4	-68.7	-25.0	-43.7
4	712.88	-56.1	-56.4	3.5	-52.9	-25.0	-27.9
5	886.51	-62.2	-58.4	3.4	-55.0	-25.0	-30.0
6	982.54	-71.5	-66.2	3.5	-62.7	-25.0	-37.7

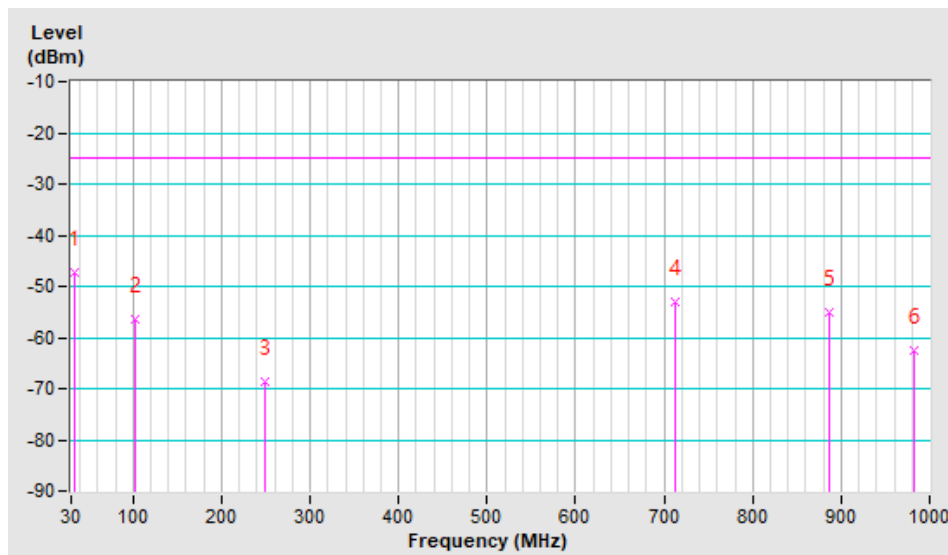

Mode	TX channel 40521 (2583.1MHz)+ TX channel 40719 (2602.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	33.76	-37.0	-30.4	-17.2	-47.6	-25.0	-22.6
2	88.20	-52.1	-58.3	-0.2	-58.5	-25.0	-33.5
3	272.50	-66.2	-62.3	-1.5	-63.8	-25.0	-38.8
4	341.37	-67.4	-71.9	3.9	-68.0	-25.0	-43.0
5	776.90	-69.8	-66.7	4.0	-62.7	-25.0	-37.7
6	893.30	-71.8	-67.0	3.5	-63.5	-25.0	-38.5

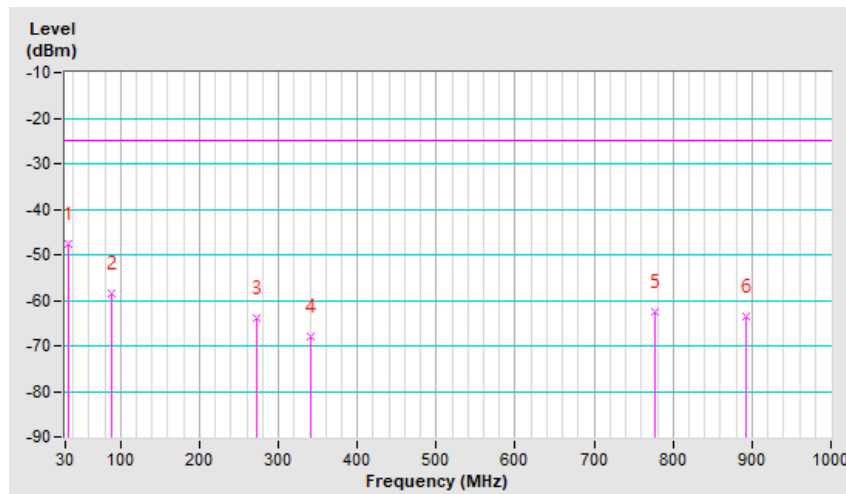


LTE Band 66 (CA 66C)

Mode	TX channel 132323 (1745.1MHz)+ TX channel 132521 (1764.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M


No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	50.37	-48.6	-41.5	-7.9	-49.4	-13.0	-36.4
2	89.14	-39.0	-46.7	-0.1	-46.8	-13.0	-33.8
3	256.01	-57.0	-60.7	-1.5	-62.2	-13.0	-49.2
4	328.76	-63.5	-71.4	4.1	-67.3	-13.0	-54.3
5	789.51	-68.5	-67.1	4.0	-63.1	-13.0	-50.1
6	971.87	-71.7	-66.7	3.7	-63.0	-13.0	-50.0

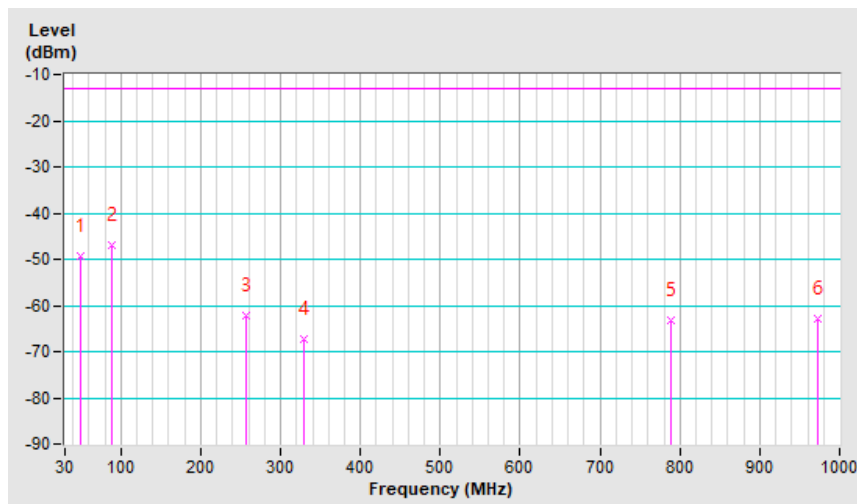

Mode	TX channel 132323 (1745.1MHz)+ TX channel 132521 (1764.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	35.82	-48.0	-41.8	-15.9	-57.7	-13.0	-44.7
2	90.14	-55.0	-61.1	-0.2	-61.3	-13.0	-48.3
3	193.93	-65.7	-64.4	-2.6	-67.0	-13.0	-54.0
4	335.55	-67.8	-72.4	4.0	-68.4	-13.0	-55.4
5	791.45	-69.4	-66.5	4.0	-62.5	-13.0	-49.5
6	903.00	-69.5	-64.7	3.6	-61.1	-13.0	-48.1

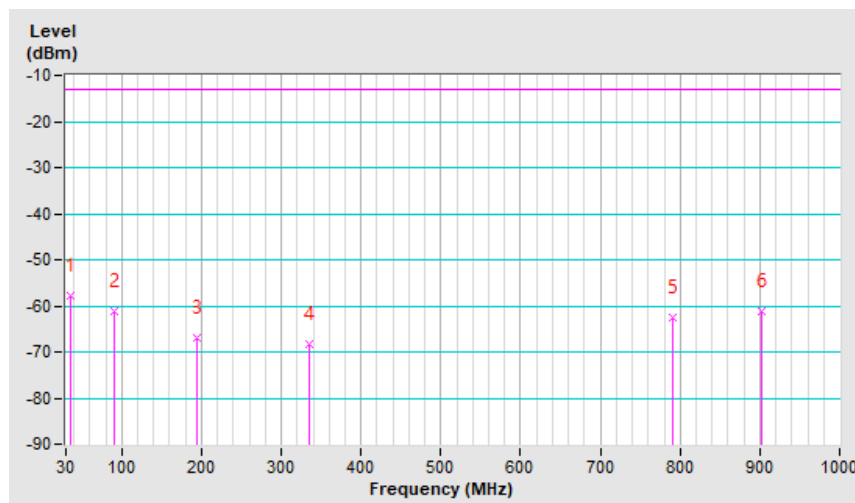


LTE Band 66 (CA 66B)

Mode	TX channel 132022 (1715.0MHz)+ TX channel 132121 (1724.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-50.2	-26.8	-19.4	-46.2	-13.0	-33.2
2	71.74	-42.3	-48.1	-0.3	-48.4	-13.0	-35.4
3	204.54	-58.3	-64.3	-2.0	-66.3	-13.0	-53.3
4	316.09	-63.5	-71.5	4.0	-67.5	-13.0	-54.5
5	590.66	-70.1	-72.7	3.8	-68.9	-13.0	-55.9
6	928.22	-71.8	-67.2	3.6	-63.6	-13.0	-50.6


Remarks:

1. EIRP (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) - Cable Loss (dB).

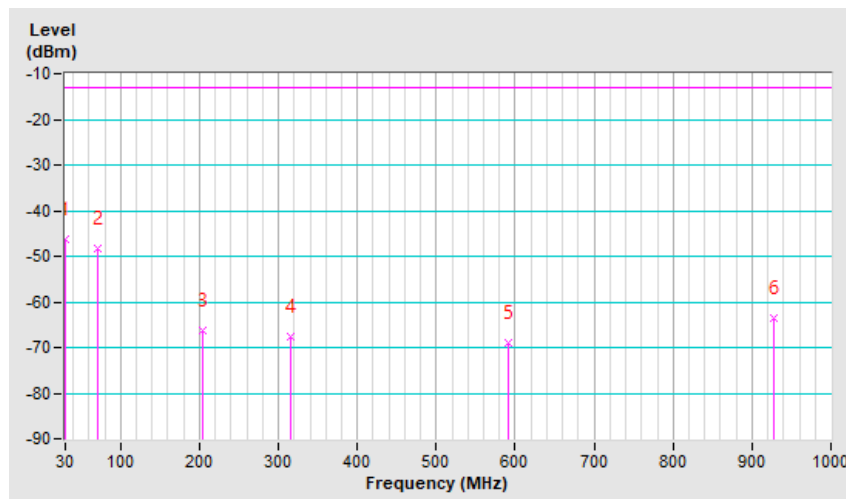

Mode	TX channel 132022 (1715.0MHz)+ TX channel 132121 (1724.9MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	54.28	-48.4	-49.5	-5.7	-55.2	-13.0	-42.2
2	85.32	-50.2	-56.0	0.3	-55.7	-13.0	-42.7
3	270.59	-66.7	-63.3	-1.4	-64.7	-13.0	-51.7
4	649.80	-69.6	-67.7	3.6	-64.1	-13.0	-51.1
5	779.81	-72.5	-69.3	4.0	-65.3	-13.0	-52.3
6	993.24	-70.1	-63.5	3.4	-60.1	-13.0	-47.1

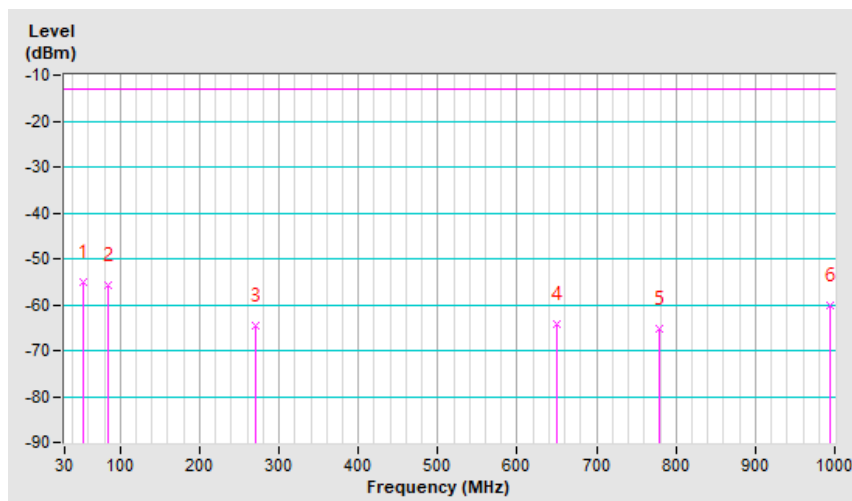

Above 1GHz
LTE Band 7 (CA 7C)

Mode	TX channel 20828 (2507.8MHz)+ TX channel 20999 (2524.9MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5035.00	-65.3	-52.9	1.4	-51.5	-25.0	-26.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5035.00	-60.9	-49.7	1.4	-48.3	-25.0	-23.3

Mode	TX channel 21003 (2525.3MHz)+ TX channel 21174 (2542.4MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-65.7	-53.2	1.4	-51.8	-25.0	-26.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5070.00	-60.8	-49.4	1.4	-48.0	-25.0	-23.0

Mode	TX channel 21179 (2542.9MHz)+ TX channel 21350 (2560.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5105.00	-65.3	-52.8	1.4	-51.4	-25.0	-26.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5105.00	-61.2	-49.5	1.4	-48.1	-25.0	-23.1

LTE Band 38 (CA 38C)

Mode	TX channel 37850 (2580.0MHz)+ TX channel 38048 (2599.8MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5180.00	-62.9	-51.1	1.4	-49.7	-25.0	-24.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5180.00	-61.1	-49.0	1.4	-47.6	-25.0	-22.6

Mode	TX channel 37901 (2585.1MHz)+ TX channel 38099 (2604.9MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-62.1	-50.4	1.4	-49.0	-25.0	-24.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5190.00	-59.6	-47.4	1.4	-46.0	-25.0	-21.0

Mode	TX channel 37952 (2590.2MHz)+ TX channel 38150 (2610.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5200.00	-62.5	-50.9	1.4	-49.5	-25.0	-24.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5200.00	-60.0	-47.7	1.4	-46.3	-25.0	-21.3

LTE Band 41 (CA 41C)

Mode	TX channel 39750 (2506.0MHz)+ TX channel 39948 (2525.8MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5032.00	-65.3	-52.9	1.4	-51.5	-25.0	-26.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5032.00	-59.6	-48.4	1.4	-47.0	-25.0	-22.0

Mode	TX channel 40521 (2583.1MHz)+ TX channel 40719 (2602.9MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-64.7	-53.0	1.4	-51.6	-25.0	-26.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5186.00	-59.6	-47.4	1.4	-46.0	-25.0	-21.0

Mode	TX channel 41292 (2660.2MHz)+ TX channel 41490 (2680.0MHz)	Frequency Range	1GHz ~ 27GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5340.00	-64.0	-51.9	1.4	-50.5	-25.0	-25.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	5340.00	-59.3	-47.9	1.4	-46.5	-25.0	-21.5

LTE Band 66 (CA 66C)

Mode	TX channel 132072 (1720.0MHz)+ TX channel 132270 (1739.8MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3460.00	-65.8	-57.4	1.4	-56.0	-13.0	-43.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3460.00	-64.1	-56.3	1.4	-54.9	-13.0	-41.9

Mode	TX channel 132323 (1745.1MHz)+ TX channel 132521 (1764.9MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-66.4	-58.1	1.4	-56.7	-13.0	-43.7

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-64.3	-56.6	1.4	-55.2	-13.0	-42.2

Mode	TX channel 132374 (1750.2MHz)+ TX channel 132572 (1770.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3520.00	-65.8	-57.5	1.4	-56.1	-13.0	-43.1

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3520.00	-63.8	-56.1	1.4	-54.7	-13.0	-41.7

LTE Band 66 (CA 66B)

Mode	TX channel 132022 (1715.0MHz)+ TX channel 132121 (1724.9MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3440.00	-66.0	-57.5	1.3	-56.2	-13.0	-43.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3440.00	-64.6	-56.6	1.3	-55.3	-13.0	-42.3

Mode	TX channel 132373 (1750.1MHz)+ TX channel 132472 (1760.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-66.3	-58.0	1.4	-56.6	-13.0	-43.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3510.00	-64.1	-56.4	1.4	-55.0	-13.0	-42.0

Mode	TX channel 132523 (1765.1MHz)+ TX channel 132622 (1775.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3540.00	-66.6	-58.2	1.4	-56.8	-13.0	-43.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3540.00	-64.7	-56.9	1.4	-55.5	-13.0	-42.5

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---