



FCC RADIO TEST REPORT

FCC ID : PU5-TP00161A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00161A
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei City 221, Taiwan
Manufacturer : Lenovo PC HK Limited.
23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong, P.R. China
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Quectel RM520N-GL tested inside of Lenovo Notebook Computer.

The product was received on Apr. 12, 2024 and testing was performed from May 05, 2024 to Jun. 05, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory



Table of Contents

| | |
|--|-----------|
| History of this test report..... | 3 |
| Summary of Test Result..... | 4 |
| 1 General Description | 6 |
| 1.1 Product Feature of Equipment Under Test | 6 |
| 1.2 Product Specification of Equipment Under Test | 7 |
| 1.3 Modification of EUT | 7 |
| 1.4 Testing Location | 8 |
| 1.5 Applicable Standards | 8 |
| 2 Test Configuration of Equipment Under Test | 9 |
| 2.1 Test Mode..... | 9 |
| 2.2 Connection Diagram of Test System | 10 |
| 2.3 Support Unit used in test configuration | 10 |
| 2.4 Frequency List of Low/Middle/High Channels..... | 10 |
| 3 Conducted Test Result | 11 |
| 3.1 Measuring Instruments..... | 11 |
| 3.2 Conducted Output Power and ERP/EIRP | 12 |
| 4 Radiated Test Items | 13 |
| 4.1 Measuring Instruments..... | 13 |
| 4.2 Test Setup | 13 |
| 4.3 Test Result of Radiated Test..... | 14 |
| 4.4 Field Strength of Spurious Radiation Measurement | 15 |
| 5 List of Measuring Equipment..... | 16 |
| 6 Measurement Uncertainty | 17 |
| Appendix A. Test Results of Conducted Test | |
| Appendix B. Test Results of Radiated Test | |
| Appendix C. Test Setup Photographs | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|---|---|--------------------|---|
| 3.2 | §2.1046 | Conducted Output Power | Pass | - |
| | §22.913 (a)(5) | Effective Radiated Power (WCDMA Band V) | | |
| | §24.232 (c) | Equivalent Isotropic Radiated Power (WCDMA Band II) | | |
| | §27.50 (d)(4) | Equivalent Isotropic Radiated Power (WCDMA Band IV) | | |
| - | §24.232 (d) | Peak-to-Average Ratio | - | See Note |
| - | §2.1049 §22.917 (b) §24.238 (b) §27.53 (g) | Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | - | See Note |
| - | §2.1051 §22.917 (a) §24.238 (a) §27.53 (g) | Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | - | See Note |
| - | §2.1051 §22.917 (a) §24.238 (a) §27.53 (g) | Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | - | See Note |
| - | §2.1055 §22.355 §24.235 §27.54 | Frequency Stability Temperature & Voltage | - | See Note |
| 4.4 | §2.1053 §22.917 (a) §24.238 (a) §27.53 (h) | Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV) | Pass | 31.50 dB under the limit at 7409.00 MHz |

Remark:

- For host device, Radiated Spurious Emission, Effective Radiated Power and Equivalent Isotropic Radiated Power are verified and comply with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: RM520N-GL)



| |
|--|
| Conformity Assessment Condition: |
| 1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty". |
| Disclaimer: |
| The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity. |

Reviewed by: Sheng Kuo
Report Producer: Ming Chen



1 General Description

1.1 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|---|
| Equipment | Notebook Computer |
| Brand Name | Lenovo |
| Model Name | TP00161A |
| FCC ID | PU5-TP00161A |
| Sample 1 | EUT with AWAN Antenna |
| Sample 2 | EUT with Luxshare-ICT Antenna |
| Integrated WLAN Module | Brand Name: Qualcomm Model Name: QCNCM825 FCC ID: J9C-QCNCM825 |
| EUT supports Radios application | WCDMA/HSPA/LTE/5G NR/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/ EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE |
| EUT Stage | Production Unit |

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel RM520N-GL tested inside of Lenovo Notebook Computer.

| WWAN Antenna Information for Host | | | | |
|-----------------------------------|--------------|--------------|-----------------|--|
| Main Antenna | Manufacturer | AWAN | Peak gain (dBi) | WCDMA Band II: 1.98 WCDMA Band IV: 1.99 WCDMA Band V: -1.76 |
| | Part number | SA31H59590 | Type | PIFA Antenna |
| | Manufacturer | Luxshare-ICT | Peak gain (dBi) | WCDMA Band II: 0.40 WCDMA Band IV: -1.70 WCDMA Band V: -2.00 |
| | Part number | SA31H59591 | Type | PIFA Antenna |

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Product Specification of Equipment Under Test

| Product Specification is subject to this standard | |
|---|--|
| Tx Frequency | WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz |
| Rx Frequency | WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz |
| Maximum Output Power to Antenna | WCDMA: Band V: 24.08 dBm Band II: 23.85 dBm Band IV: 23.93 dBm |
| Type of Modulation | WCDMA: BPSK (Uplink) HSDPA: 16QAM (Downlink) HSUPA: 16QAM (Uplink) |

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

| | |
|-----------------------|---|
| Test Site | Sporton International Inc. EMC & Wireless Communications Laboratory |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333 |
| Test Site No. | Sporton Site No. |
| | TH03-HY |
| Test Engineer | Ekko You |
| Temperature (°C) | 21.9~22.7 |
| Relative Humidity (%) | 52.9~57.6 |

| | |
|-----------------------|---|
| Test Site | Sporton International Inc. Wensan Laboratory |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010 |
| Test Site No. | Sporton Site No. |
| | 03CH10-HY (TAF Code: 3786) |
| Test Engineer | Bill Chang, Gary Guo, and Steven Wu |
| Temperature (°C) | 19.1~22.3 |
| Relative Humidity (%) | 62.5~68.3 |
| Remark | The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory. |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes | | |
|---------------|---------------------|---------------------|
| Band | Radiated TCs | Conducted TCs |
| WCDMA Band V | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band II | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |
| WCDMA Band IV | ■ RMC 12.2Kbps Link | ■ RMC 12.2Kbps Link |

2.2 Connection Diagram of Test System

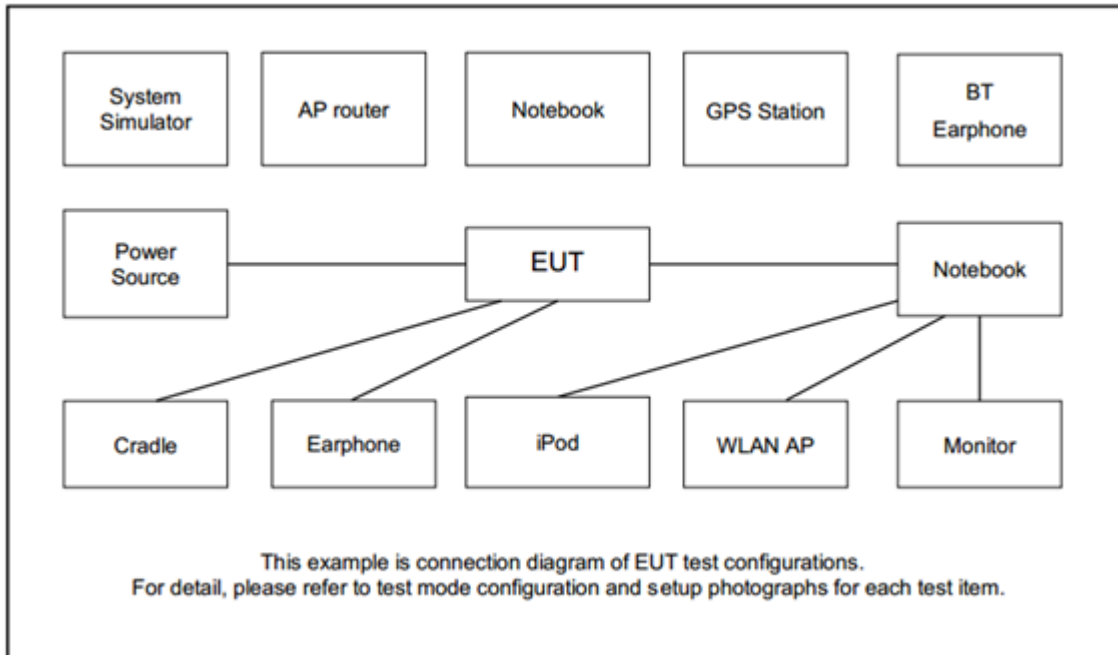

2.3 Support Unit used in test configuration

| Item | Equipment | Brand Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|---------------------------|------------|-----------|--------|-------------------|-------------------|
| 1. | 5G Wireless Test Platform | Anritsu | MT8000A | N/A | N/A | Unshielded, 1.8 m |
| 2. | System Simulator | Anritsu | MT8821C | N/A | N/A | Unshielded, 1.8 m |
| 3. | Earphone | Lenovo | N/A | N/A | Unshielded, 1.5 m | N/A |

2.4 Frequency List of Low/Middle/High Channels

| Frequency List | | | | |
|----------------|------------------------|--------|--------|---------|
| Band | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| WCDMA Band V | Channel | 4132 | 4182 | 4233 |
| | Frequency | 826.4 | 836.4 | 846.6 |
| WCDMA Band II | Channel | 9262 | 9400 | 9538 |
| | Frequency | 1852.4 | 1880.0 | 1907.6 |
| WCDMA Band IV | Channel | 1312 | 1413 | 1513 |
| | Frequency | 1712.4 | 1732.6 | 1752.6 |


3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

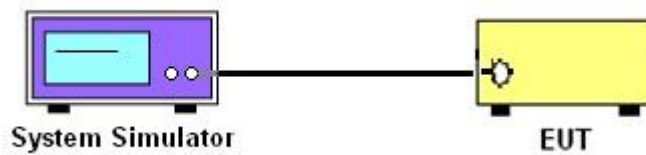

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz




For radiated test from 30MHz to 1GHz

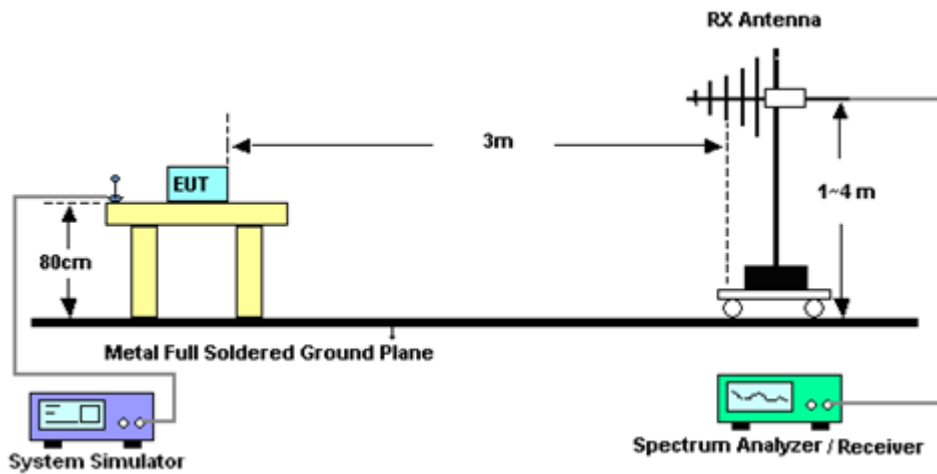

For radiated test from 1GHz to 18GHz

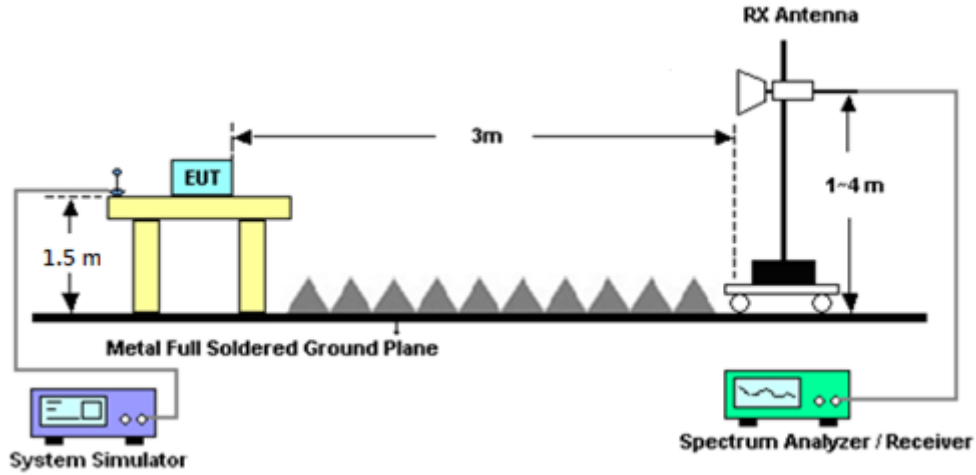

For radiated test above 18GHz

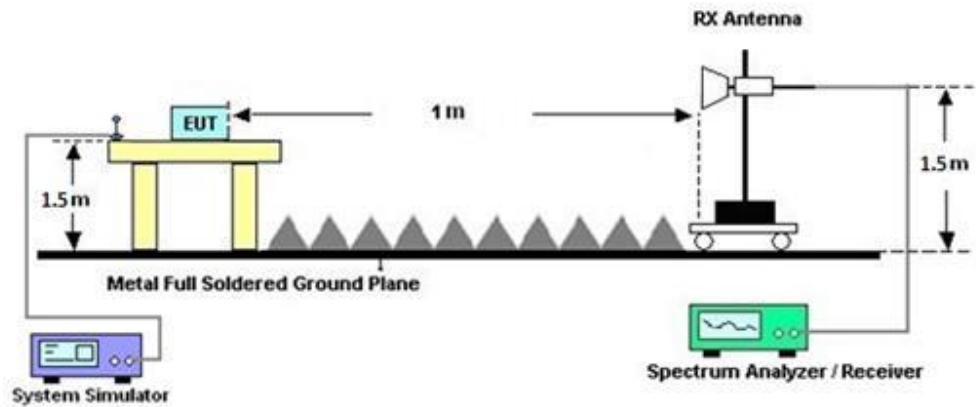

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|------------------------------|-----------------------------|---|--|-------------------------------------|------------------|--------------------------------|---------------|--------------------------|
| Radio Communication Analyzer | Anritsu | MT8821C | 6262025353 | LTE FDD/TDD LTE-2CC DLCA/ULCA | Oct. 03, 2023 | May 25, 2024~ Jun. 05, 2024 | Oct. 02, 2024 | Conducted (TH03-HY) |
| Coupler+10dB+ RFcable | Warison+Wok en+ echannel | 20dB 25W SMA Directional Coupler+ 10dB 18GHz_5W+S FL405_1.5M | #A+#1+#1+#7 | 1-18GHz | Jan. 02, 2024 | May 25, 2024~ Jun. 05, 2024 | Jan. 01, 2025 | Conducted (TH03-HY) |
| Software | Sporton | LTE Conducted Test Tools | N/A | Conducted Test Item | N/A | May 25, 2024~ Jun. 05, 2024 | N/A | Conducted (TH03-HY) |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100488 | 9 kHz~30 MHz | Sep. 12, 2023 | May 05, 2024~ May 28, 2024 | Sep. 11, 2024 | Radiation (03CH16-HY) |
| SHF-EHF Horn Antenna | SCHWARZBE CK | BBHA9170 | 00993 | 18GHz-40GHz | Nov. 24, 2023 | May 05, 2024~ May 28, 2024 | Nov. 23, 2024 | Radiation (03CH16-HY) |
| Bilog Antenna | TESEQ | CBL 6111D & 00802N1D01N -06 | 47020 & 06 | 30MHz to 1GHz | Oct. 07, 2023 | May 05, 2024~ May 28, 2024 | Oct. 06, 2024 | Radiation (03CH16-HY) |
| Horn Antenna | SCHWARZBE CK | BBHA 9120 D | 9120D-1522 | 1G~18GHz | Mar. 28, 2024 | May 05, 2024~ May 28, 2024 | Mar. 27, 2025 | Radiation (03CH16-HY) |
| Amplifier | SONOMA | 310N | 371607 | 9kHz~1GHz | Jul. 03, 2023 | May 05, 2024~ May 28, 2024 | Jul. 02, 2024 | Radiation (03CH16-HY) |
| Preamplifier | Keysight | 83017A | MY53270264 | 1GHz~26.5GHz | Dec. 07, 2023 | May 05, 2024~ May 28, 2024 | Dec. 06, 2024 | Radiation (03CH16-HY) |
| Preamplifier | EMEC | EM1G18G | 060812 | 1GHz~18GHz | Dec. 25, 2023 | May 05, 2024~ May 28, 2024 | Dec. 24, 2024 | Radiation (03CH16-HY) |
| Preamplifier | EMEC | EM18G40G | 060872 | 18GHz~40GHz | Sep. 06, 2023 | May 05, 2024~ May 28, 2024 | Sep. 05, 2024 | Radiation (03CH16-HY) |
| Filter | Wainwright | WLK4-1000-15 30-8000-40SS | SN17 | 1.53GHz Low Pass Filter | Jan. 15, 2024 | May 05, 2024~ May 28, 2024 | Jan. 14, 2025 | Radiation (03CH16-HY) |
| Filter | Wainwright | WHKX12-900- 1000-15000-6 0SS | SN11 | 1GHz High Pass Filter | Mar. 13, 2024 | May 05, 2024~ May 28, 2024 | Mar.12, 2025 | Radiation (03CH16-HY) |
| Filter | Wainwright | WHKX12-2700 -3000-18000-6 0ST | SN3 | 3GHz High Pass Filter | Jun. 29, 2023 | May 05, 2024~ May 28, 2024 | Jun. 28, 2024 | Radiation (03CH16-HY) |
| Filter | Wainwright | WHKX8-5872. 5-6750-18000- 40ST | SN27 | 6.75GHz High Pass Filter | Nov. 13, 2023 | May 05, 2024~ May 28, 2024 | Nov. 12, 2024 | Radiation (03CH16-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 803951/2 | 9K~30M | Mar. 06, 2024 | May 05, 2024~ May 28, 2024 | Mar. 05, 2025 | Radiation (03CH16-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102/SUCOFLE X 104 | EC-A5-300-57 57,805935/4,8 02434/4 | 30MHz~18GHz | Aug. 08, 2023 | May 05, 2024~ May 28, 2024 | Aug. 07, 2024 | Radiation (03CH16-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 804011/2,804 012/2 | 18-40GHz | Jan. 02, 2024 | May 05, 2024~ May 28, 2024 | Jan. 01, 2025 | Radiation (03CH16-HY) |
| Software | Audix | E3 230621 V9 | RK-002393 | N/A | N/A | May 05, 2024~ May 28, 2024 | N/A | Radiation (03CH16-HY) |
| Controller | ChainTek | 3000-1 | N/A | Control Turn table & Ant Mast | N/A | May 05, 2024~ May 28, 2024 | N/A | Radiation (03CH16-HY) |
| Antenna Mast | ChainTek | MBS-520-1 | N/A | 1m~4m | N/A | May 05, 2024~ May 28, 2024 | N/A | Radiation (03CH16-HY) |
| Turn Table | ChainTek | T-200-S-1 | N/A | 0~360 Degree | N/A | May 05, 2024~ May 28, 2024 | N/A | Radiation (03CH16-HY) |



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.09 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.55 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.02 dB |
|---|---------|



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

| WCDMA Band V Maximum Average Power [dBm] (GT - LC = -1.76 dB) | | | | | |
|---|----------|-------|-------|-----------|---------|
| Channel | 4132 | 4182 | 4233 | ERP (dBm) | ERP (W) |
| Frequency | 826.4 | 836.4 | 846.6 | | |
| RMC 12.2K | 24.04 | 24.08 | 23.97 | 20.17 | 0.1040 |
| HSDPA Subtest-1 | 23.14 | 23.16 | 23.11 | | |
| HSDPA Subtest-2 | 23.14 | 23.13 | 23.09 | | |
| HSDPA Subtest-3 | 22.58 | 22.65 | 22.59 | | |
| HSDPA Subtest-4 | 22.60 | 22.66 | 22.55 | | |
| HSUPA Subtest-1 | 23.12 | 23.11 | 23.01 | | |
| HSUPA Subtest-2 | 21.07 | 21.17 | 21.03 | | |
| HSUPA Subtest-3 | 22.13 | 22.14 | 22.00 | | |
| HSUPA Subtest-4 | 21.09 | 21.13 | 20.96 | | |
| HSUPA Subtest-5 | 23.10 | 23.10 | 23.00 | | |
| Limit | ERP < 7W | | | | |

| WCDMA Band II Maximum Average Power [dBm] (GT - LC = 1.98 dB) | | | | | |
|---|-----------|-------|--------|------------|----------|
| Channel | 9262 | 9400 | 9538 | EIRP (dBm) | EIRP (W) |
| Frequency | 1852.4 | 1880 | 1907.6 | | |
| RMC 12.2K | 23.67 | 23.85 | 23.79 | 25.83 | 0.3828 |
| HSDPA Subtest-1 | 22.76 | 22.94 | 22.91 | | |
| HSDPA Subtest-2 | 22.74 | 22.94 | 22.88 | | |
| HSDPA Subtest-3 | 22.23 | 22.47 | 22.40 | | |
| HSDPA Subtest-4 | 22.23 | 22.44 | 22.35 | | |
| HSUPA Subtest-1 | 22.81 | 23.01 | 22.95 | | |
| HSUPA Subtest-2 | 20.80 | 21.00 | 20.95 | | |
| HSUPA Subtest-3 | 21.82 | 22.01 | 21.94 | | |
| HSUPA Subtest-4 | 20.84 | 20.97 | 20.90 | | |
| HSUPA Subtest-5 | 22.80 | 23.00 | 22.90 | | |
| Limit | EIRP < 2W | | | | |

| WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 1.99 dB) | | | | | |
|---|-----------|--------|--------|------------|----------|
| Channel | 1312 | 1413 | 1513 | EIRP (dBm) | EIRP (W) |
| Frequency | 1712.4 | 1732.6 | 1752.6 | | |
| RMC 12.2K | 23.83 | 23.93 | 23.88 | 25.92 | 0.3908 |
| HSDPA Subtest-1 | 22.90 | 23.07 | 23.02 | | |
| HSDPA Subtest-2 | 22.90 | 23.02 | 22.98 | | |
| HSDPA Subtest-3 | 22.39 | 22.52 | 22.54 | | |
| HSDPA Subtest-4 | 22.43 | 22.51 | 22.54 | | |
| HSUPA Subtest-1 | 22.97 | 23.06 | 23.01 | | |
| HSUPA Subtest-2 | 20.96 | 21.10 | 21.05 | | |
| HSUPA Subtest-3 | 21.96 | 22.08 | 22.04 | | |
| HSUPA Subtest-4 | 20.98 | 21.11 | 21.08 | | |
| HSUPA Subtest-5 | 23.00 | 23.10 | 23.10 | | |
| Limit | EIRP < 1W | | | | |



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode


| Mode | Part | Band | Ch | Freq (MHz) | Level (dBm) | Det | Ant Factor (dB) | Amp\Cbl (dB) | Filter (dB) | EIRPCF (dB) | Reading (dBuV) | Limit (dBm) | Margin (dB) | Pol | Ant |
|------|----------|----------|----|------------|-------------|-----|-----------------|--------------|-------------|-------------|----------------|-------------|-------------|-----|------|
| 1 | Part 22H | WCDMA B5 | H | 1693 | -47.82 | RMS | 24.97 | -23.84 | 0.83 | -95.23 | 45.45 | -13.00 | -34.82 | V | Main |
| 1 | Part 24E | WCDMA B2 | L | 7409 | -44.50 | RMS | 36.38 | -16.79 | 0.38 | -95.23 | 30.76 | -13.00 | -31.50 | V | Main |
| 1 | Part 27L | WCDMA B4 | H | 7010 | -45.25 | RMS | 35.84 | -17.14 | 0.38 | -95.23 | 30.90 | -13.00 | -32.25 | V | Main |



Main


Part 22H Mode 1
WCDMA B5 Ch4132

L

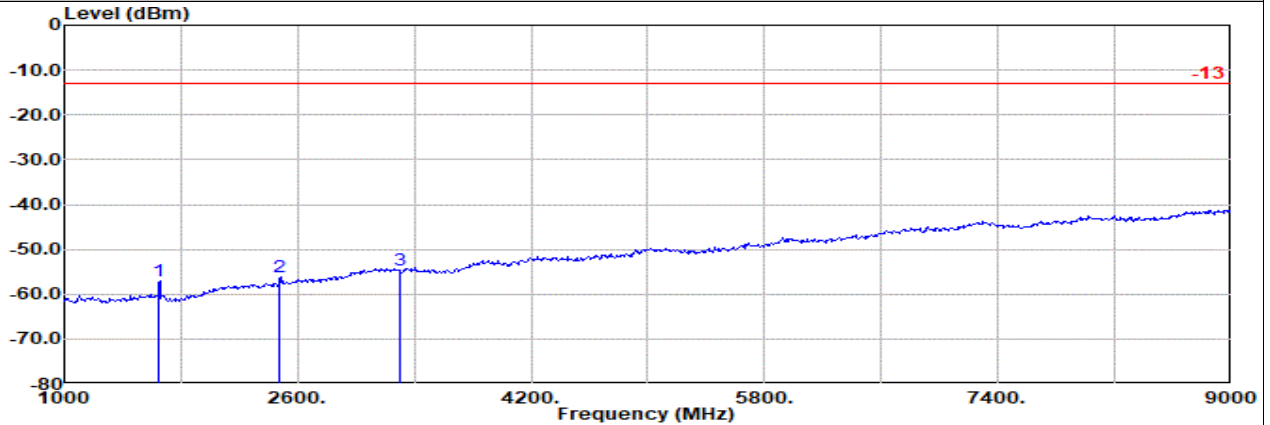

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Horizontal
: WCDMA B5 Ch4132

| Freq | Level | Detector | Ant Amp\Cb | | Filter | EIRPCF | Reading | Limit | Margin | | Pol |
|------|---------|----------|------------|-------|--------|--------|---------|-------|--------|--------|------------|
| | | | Factor | 1 | | | | | dB | dB | |
| 1 | 1652.00 | -57.17 | RMS | 25.00 | -23.94 | 0.88 | -95.23 | 36.12 | -13.00 | -44.17 | Horizontal |
| 2 | 2479.00 | -56.22 | RMS | 27.69 | -22.24 | 0.70 | -95.23 | 32.86 | -13.00 | -43.22 | Horizontal |
| 3 | 3305.00 | -54.61 | RMS | 29.60 | -20.77 | 0.56 | -95.23 | 31.23 | -13.00 | -41.61 | Horizontal |

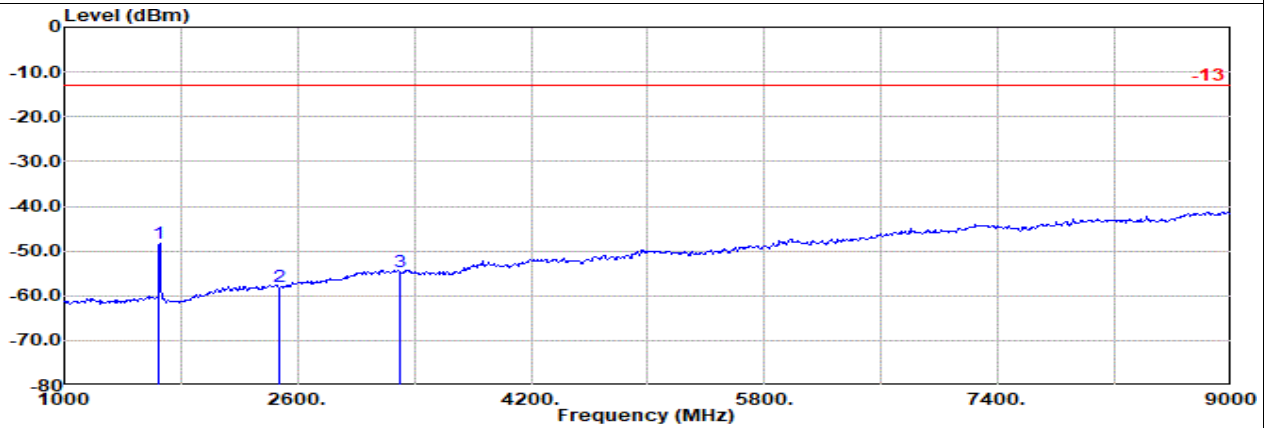

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Vertical
: WCDMA B5 Ch4132


| Freq | Level | Detector | Ant Amp\Cb | | Filter | EIRPCF | Reading | Limit | Margin | | Pol |
|------|---------|----------|------------|-------|--------|--------|---------|-------|--------|--------|----------|
| | | | Factor | 1 | | | | | dB | dB | |
| 1 | 1652.00 | -48.26 | RMS | 25.00 | -23.94 | 0.88 | -95.23 | 45.03 | -13.00 | -35.26 | Vertical |
| 2 | 2479.00 | -57.86 | RMS | 27.69 | -22.24 | 0.70 | -95.23 | 31.22 | -13.00 | -44.86 | Vertical |
| 3 | 3305.00 | -54.50 | RMS | 29.60 | -20.77 | 0.56 | -95.23 | 31.34 | -13.00 | -41.50 | Vertical |



Main


Part 22H Mode 1
WCDMA B5 Ch4182

M

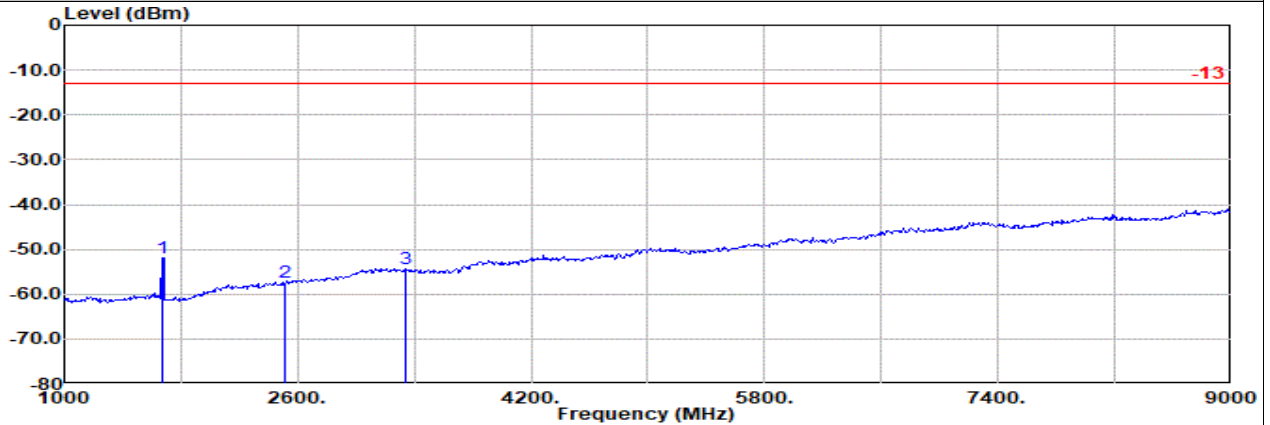

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Horizontal
: WCDMA B5 Ch4182

| Freq | Level | Detector | Ant Amp\Cb | | Filter | EIRPCF | Reading | Limit | Margin | | Pol |
|------|---------|----------|------------|-------|--------|--------|---------|-------|--------|--------|------------|
| | | | Factor | 1 | | | | | dB | dB | |
| 1 | 1672.00 | -51.78 | RMS | 25.10 | -23.89 | 0.86 | -95.23 | 41.38 | -13.00 | -38.78 | Horizontal |
| 2 | 2509.00 | -57.35 | RMS | 27.70 | -22.23 | 0.69 | -95.23 | 31.72 | -13.00 | -44.35 | Horizontal |
| 3 | 3345.00 | -54.47 | RMS | 29.60 | -20.70 | 0.56 | -95.23 | 31.30 | -13.00 | -41.47 | Horizontal |

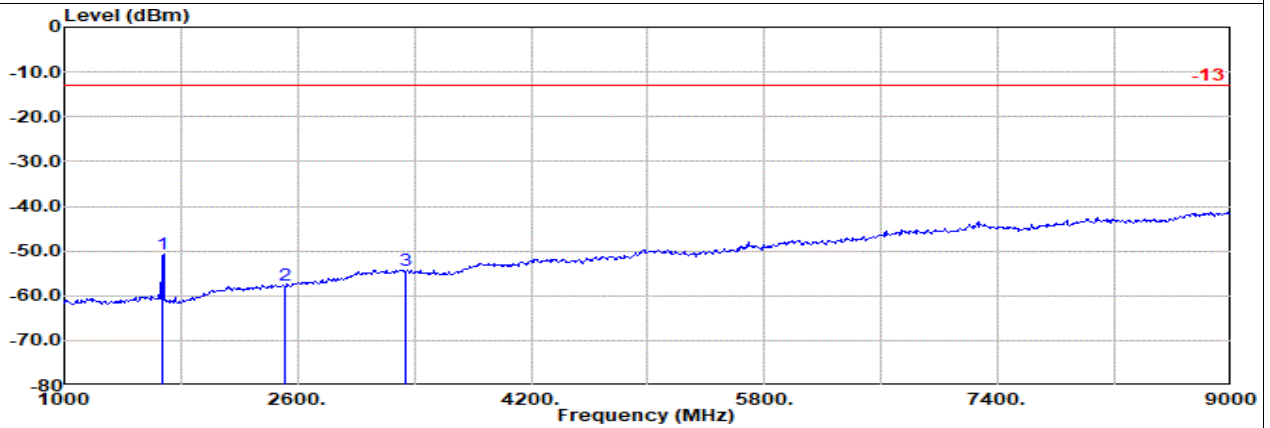


Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Vertical
: WCDMA B5 Ch4182

| Freq | Level | Detector | Ant Amp\Cb | | Filter | EIRPCF | Reading | Limit | Margin | | Pol |
|------|---------|----------|------------|-------|--------|--------|---------|-------|--------|--------|----------|
| | | | Factor | 1 | | | | | dB | dB | |
| 1 | 1672.00 | -50.57 | RMS | 25.10 | -23.89 | 0.86 | -95.23 | 42.59 | -13.00 | -37.57 | Vertical |
| 2 | 2509.00 | -57.68 | RMS | 27.70 | -22.23 | 0.69 | -95.23 | 31.39 | -13.00 | -44.68 | Vertical |
| 3 | 3345.00 | -54.33 | RMS | 29.60 | -20.70 | 0.56 | -95.23 | 31.44 | -13.00 | -41.33 | Vertical |




Main

Part 22H Mode 1
WCDMA B5 Ch4233
H

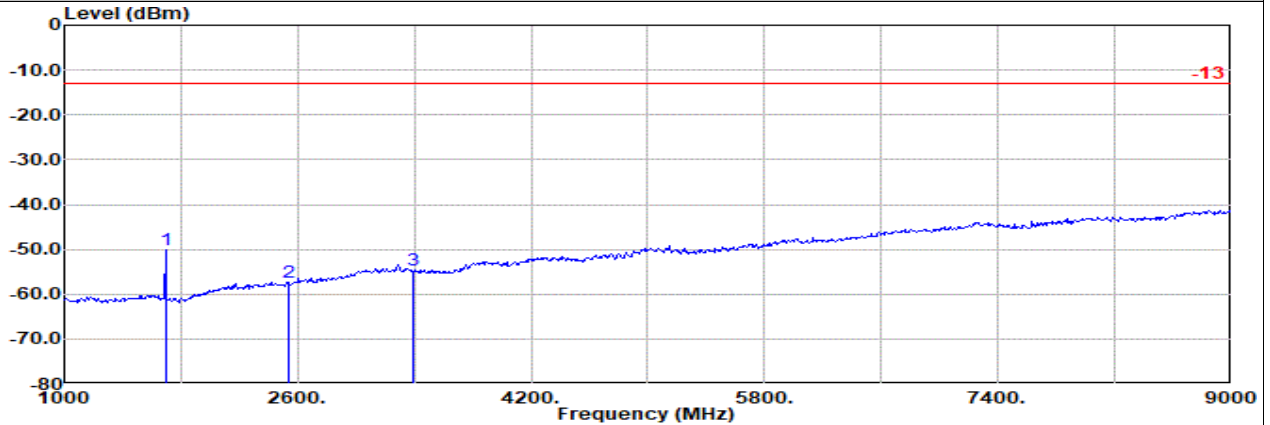

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Horizontal
: WCDMA B5 Ch4233

| Freq | Level | Detector | Ant Amp\Cb | | Filter | EIRPCF | Reading | Limit | Margin | Pol | |
|------|---------|----------|------------|-------|--------|--------|---------|-------|--------|--------|------------|
| | | | Factor | 1 | | | | | | | dB |
| 1 | 1693.00 | -50.05 | RMS | 24.97 | -23.84 | 0.83 | -95.23 | 43.22 | -13.00 | -37.05 | Horizontal |
| 2 | 2539.00 | -57.24 | RMS | 27.99 | -22.17 | 0.67 | -95.23 | 31.50 | -13.00 | -44.24 | Horizontal |
| 3 | 3386.00 | -54.58 | RMS | 29.53 | -20.64 | 0.56 | -95.23 | 31.20 | -13.00 | -41.58 | Horizontal |

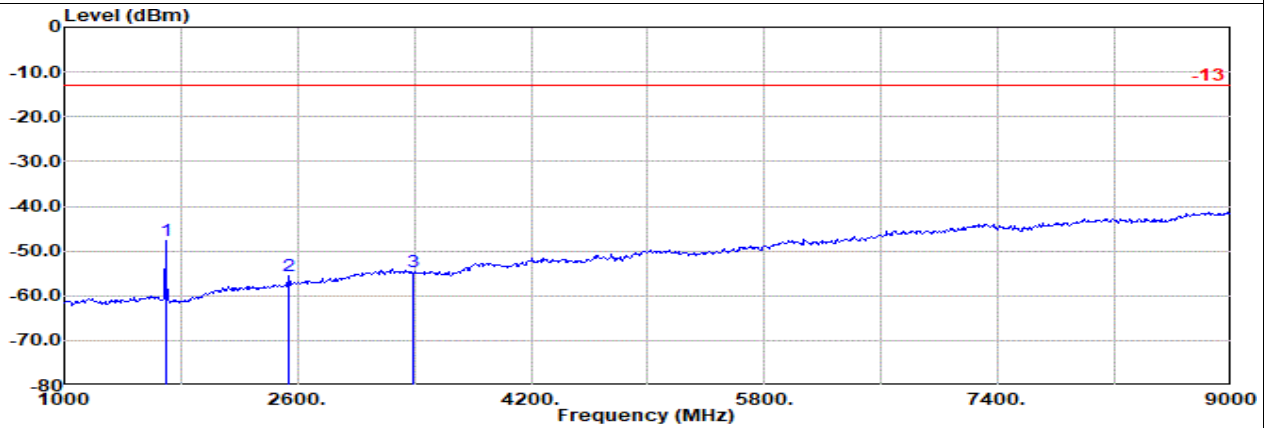

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Vertical
: WCDMA B5 Ch4233

| Freq | Level | Detector | Ant Amp\Cb | | Filter | EIRPCF | Reading | Limit | Margin | Pol | |
|------|---------|----------|------------|-------|--------|--------|---------|-------|--------|--------|----------|
| | | | Factor | 1 | | | | | | | dB |
| 1 | 1693.00 | -47.82 | RMS | 24.97 | -23.84 | 0.83 | -95.23 | 45.45 | -13.00 | -34.82 | Vertical |
| 2 | 2539.00 | -55.63 | RMS | 27.99 | -22.17 | 0.67 | -95.23 | 33.11 | -13.00 | -42.63 | Vertical |
| 3 | 3386.00 | -54.63 | RMS | 29.53 | -20.64 | 0.56 | -95.23 | 31.15 | -13.00 | -41.63 | Vertical |




Main

Part 24E Mode 1


WCDMA B2 Ch9262

L

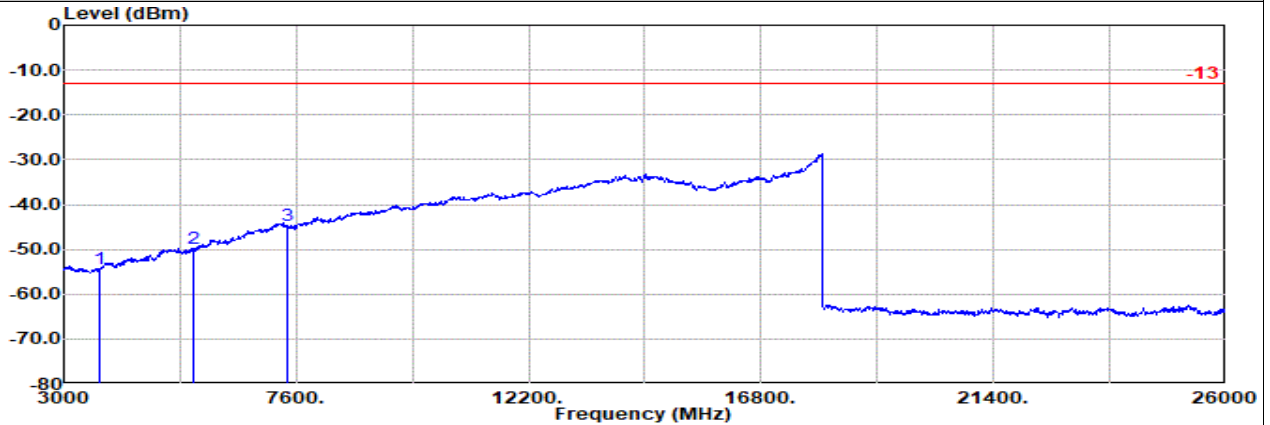

Site : 03CH16-HY
 Condition: -13 1m SHF_00993_231124 Horizontal
 : WCDMA 1900 Ch9262

| 1 | 2 | 3 | Freq Level | | Detector | Ant Amp\Cb Filter | | Factor | Filter | | EIRPCF | Readin g | Limit | Margin Pol | |
|---|---------|--------|------------|-------|----------|-------------------|--------|--------|--------|--------|------------|----------|-------|------------|-----|
| | | | MHz | dBm | | dB/m | dB | | dB | dB | | | | dBuV | dBm |
| 1 | 3704.00 | -54.25 | RMS | 29.62 | -20.12 | 0.81 | -95.23 | 0.00 | -13.00 | -41.25 | Horizontal | | | | |
| 2 | 5557.00 | -49.73 | RMS | 32.80 | -17.56 | 0.39 | -95.23 | 29.87 | -13.00 | -36.73 | Horizontal | | | | |
| 3 | 7409.00 | -44.69 | RMS | 36.38 | -16.79 | 0.38 | -95.23 | 30.57 | -13.00 | -31.69 | Horizontal | | | | |

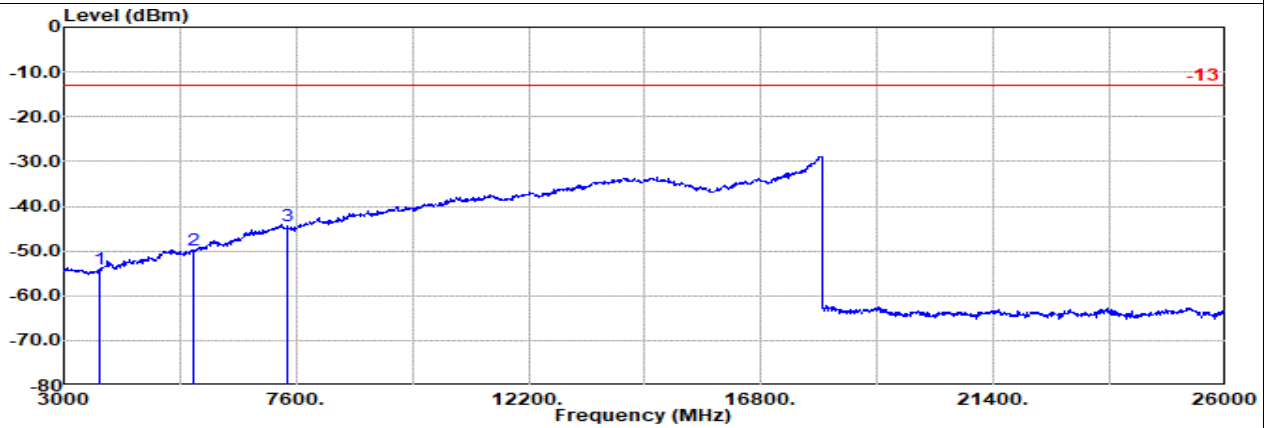

Site : 03CH16-HY
 Condition: -13 1m SHF_00993_231124 Vertical
 : WCDMA 1900 Ch9262


| 1 | 2 | 3 | Freq Level | | Detector | Ant Amp\Cb Filter | | Factor | Filter | | EIRPCF | Readin g | Limit | Margin Pol | |
|---|---------|--------|------------|-------|----------|-------------------|--------|--------|--------|--------|----------|----------|-------|------------|-----|
| | | | MHz | dBm | | dB/m | dB | | dB | dB | | | | dBuV | dBm |
| 1 | 3704.00 | -54.13 | RMS | 29.62 | -20.12 | 0.81 | -95.23 | 30.79 | -13.00 | -41.13 | Vertical | | | | |
| 2 | 5557.00 | -49.79 | RMS | 32.80 | -17.56 | 0.39 | -95.23 | 29.81 | -13.00 | -36.79 | Vertical | | | | |
| 3 | 7409.00 | -44.50 | RMS | 36.38 | -16.79 | 0.38 | -95.23 | 30.76 | -13.00 | -31.50 | Vertical | | | | |



Main


Part 24E Mode 1
WCDMA B2 Ch9400

M

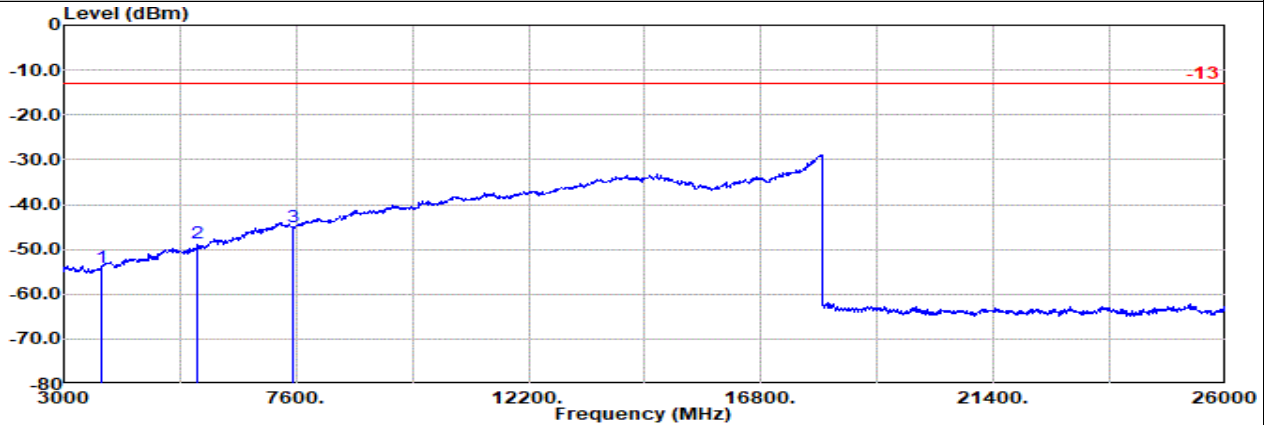

Site : 03CH16-HY
Condition: -13 1m SHF_00993_231124 Horizontal
: WCDMA 1900 Ch9400

| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Reading | Limit | Margin Pol | | | |
|------|---------|----------|-------------------|-------|--------|---------|--------|------------|--------|--------|------------|
| | | | Factor | 1 | | | | dB | dB | dB | dB |
| 1 | 3760.00 | -53.98 | RMS | 29.98 | -19.94 | 0.76 | -95.23 | 30.45 | -13.00 | -40.98 | Horizontal |
| 2 | 5640.00 | -48.59 | RMS | 32.96 | -17.50 | 0.39 | -95.23 | 30.79 | -13.00 | -35.59 | Horizontal |
| 3 | 7520.00 | -44.96 | RMS | 36.12 | -16.74 | 0.47 | -95.23 | 30.42 | -13.00 | -31.96 | Horizontal |

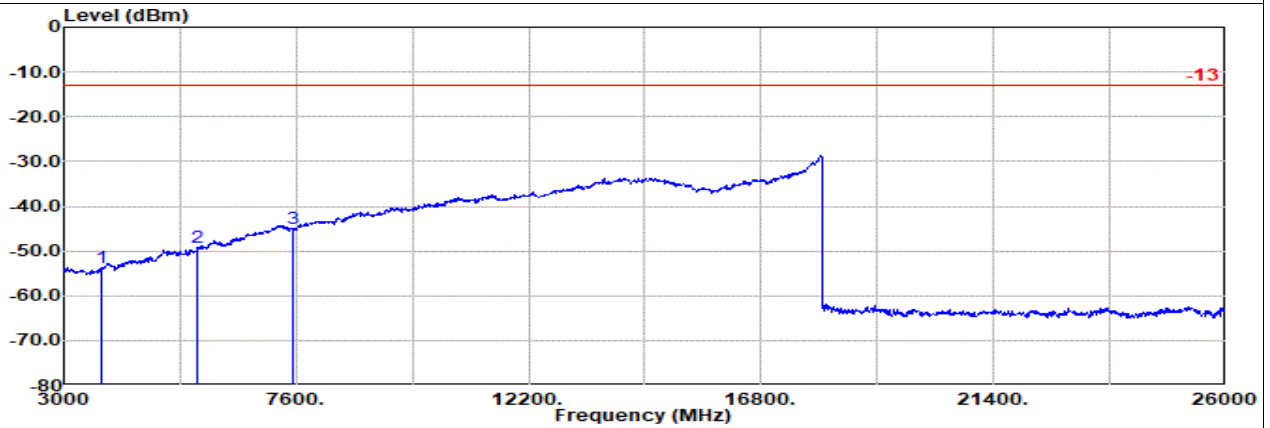

Site : 03CH16-HY
Condition: -13 1m SHF_00993_231124 Vertical
: WCDMA 1900 Ch9400

| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Reading | Limit | Margin Pol | | | |
|------|---------|----------|-------------------|-------|--------|---------|--------|------------|--------|--------|----------|
| | | | Factor | 1 | | | | dB | dB | dB | dB |
| 1 | 3760.00 | -53.87 | RMS | 29.98 | -19.94 | 0.76 | -95.23 | 30.56 | -13.00 | -40.87 | Vertical |
| 2 | 5640.00 | -49.33 | RMS | 32.96 | -17.50 | 0.39 | -95.23 | 30.05 | -13.00 | -36.33 | Vertical |
| 3 | 7520.00 | -44.84 | RMS | 36.12 | -16.74 | 0.47 | -95.23 | 30.54 | -13.00 | -31.84 | Vertical |




Main

Part 24E Mode 1


WCDMA B2 Ch9538

H

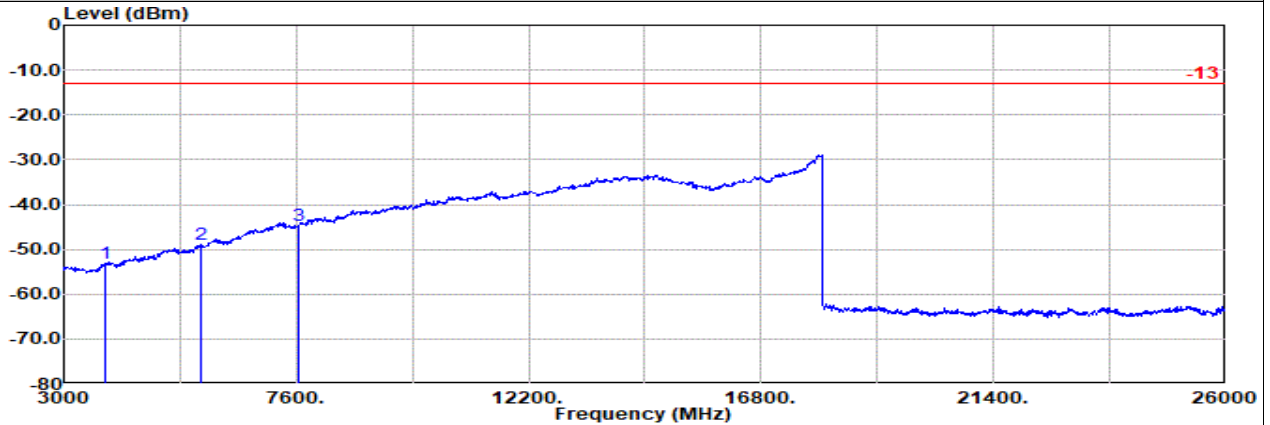

Site : 03CH16-HY
 Condition: -13 1m SHF_00993_231124 Horizontal
 : WCDMA 1900 Ch9538

| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Reading | Limit | Margin Pol | | | |
|------|---------|----------|-------------------|-------|--------|---------|--------|------------|--------|--------|------------|
| | | | Factor | 1 | | | | dB | dB | dB | dB |
| 1 | 3815.00 | -53.21 | RMS | 30.42 | -19.81 | 0.71 | -95.23 | 30.70 | -13.00 | -40.21 | Horizontal |
| 2 | 5722.00 | -49.04 | RMS | 33.44 | -17.45 | 0.40 | -95.23 | 29.80 | -13.00 | -36.04 | Horizontal |
| 3 | 7630.00 | -44.63 | RMS | 36.16 | -16.57 | 0.52 | -95.23 | 30.49 | -13.00 | -31.63 | Horizontal |

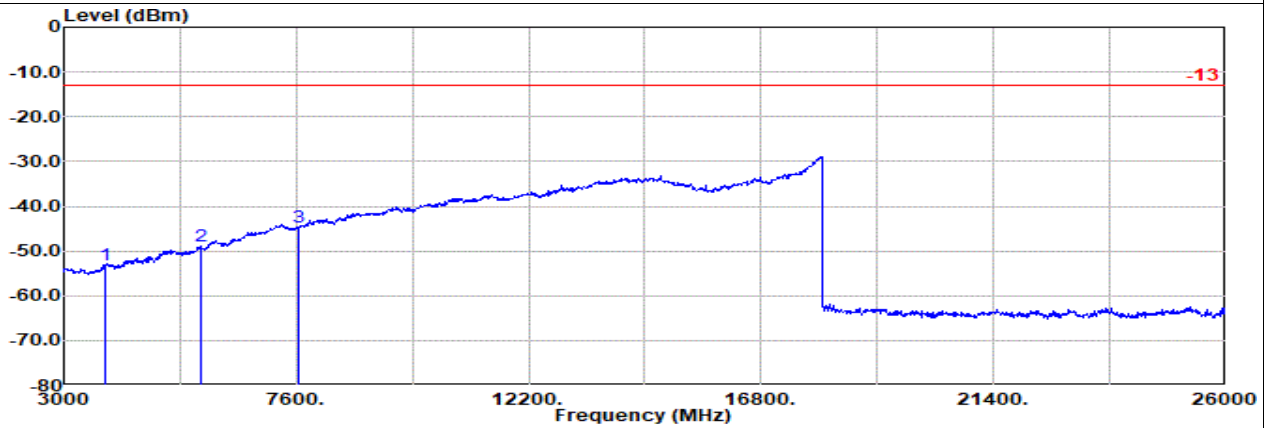

Site : 03CH16-HY
 Condition: -13 1m SHF_00993_231124 Vertical
 : WCDMA 1900 Ch9538


| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Reading | Limit | Margin Pol | | | |
|------|---------|----------|-------------------|-------|--------|---------|--------|------------|--------|--------|----------|
| | | | Factor | 1 | | | | dB | dB | dB | dB |
| 1 | 3815.00 | -53.14 | RMS | 30.42 | -19.81 | 0.71 | -95.23 | 30.77 | -13.00 | -40.14 | Vertical |
| 2 | 5722.00 | -48.92 | RMS | 33.44 | -17.45 | 0.40 | -95.23 | 29.92 | -13.00 | -35.92 | Vertical |
| 3 | 7630.00 | -44.79 | RMS | 36.16 | -16.57 | 0.52 | -95.23 | 30.33 | -13.00 | -31.79 | Vertical |



Main


Part 27L Mode 1
WCDMA B4 Ch1312

L

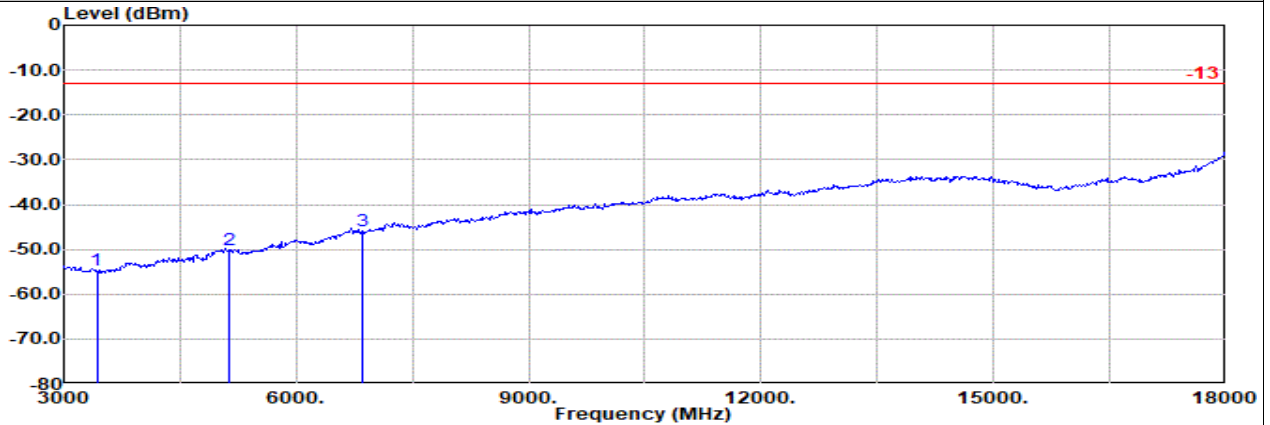

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Horizontal
: WCDMA 1700 Ch1312

| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Readin | Limit | Margin Pol | |
|------|---------|------------|-------------------|--------|--------|--------|-------|------------|-------------------|
| | | | Factor | 1 | | | | g | |
| MHz | dBm | | dB/m | dB | dB | dBuV | dBm | dB | |
| 1 | 3425.00 | -54.68 RMS | 29.45 | -20.57 | 0.91 | -95.23 | 30.76 | -13.00 | -41.68 Horizontal |
| 2 | 5137.00 | -50.02 RMS | 32.97 | -18.06 | 0.46 | -95.23 | 29.84 | -13.00 | -37.02 Horizontal |
| 3 | 6850.00 | -45.96 RMS | 35.70 | -17.02 | 0.40 | -95.23 | 30.19 | -13.00 | -32.96 Horizontal |

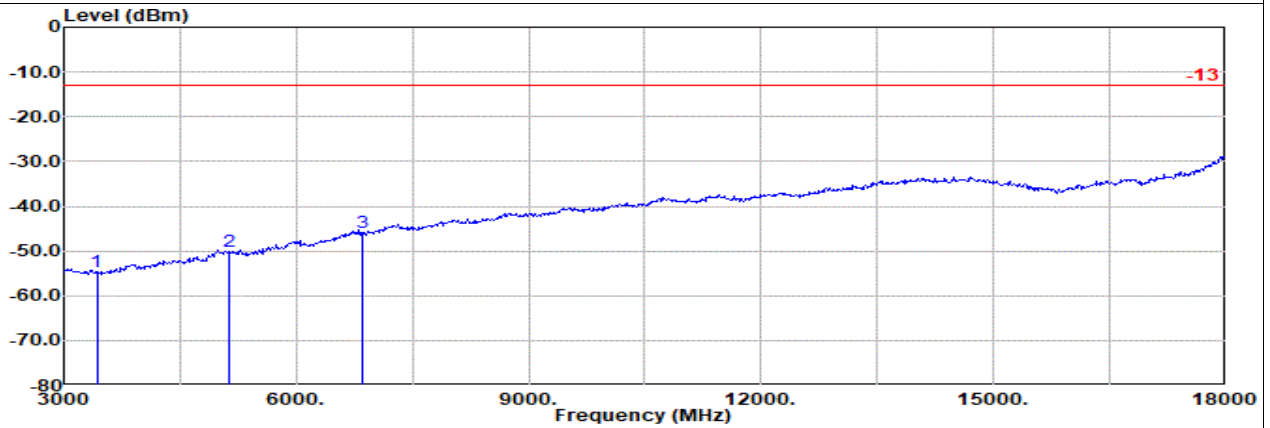

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Vertical
: WCDMA 1700 Ch1312


| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Readin | Limit | Margin Pol | |
|------|---------|------------|-------------------|--------|--------|--------|-------|------------|-----------------|
| | | | Factor | 1 | | | | g | |
| MHz | dBm | | dB/m | dB | dB | dBuV | dBm | dB | |
| 1 | 3425.00 | -54.64 RMS | 29.45 | -20.57 | 0.91 | -95.23 | 30.80 | -13.00 | -41.64 Vertical |
| 2 | 5137.00 | -50.17 RMS | 32.97 | -18.06 | 0.46 | -95.23 | 29.69 | -13.00 | -37.17 Vertical |
| 3 | 6850.00 | -45.77 RMS | 35.70 | -17.02 | 0.40 | -95.23 | 30.38 | -13.00 | -32.77 Vertical |



Main


Part 27L Mode 1
WCDMA B4 Ch1413

M

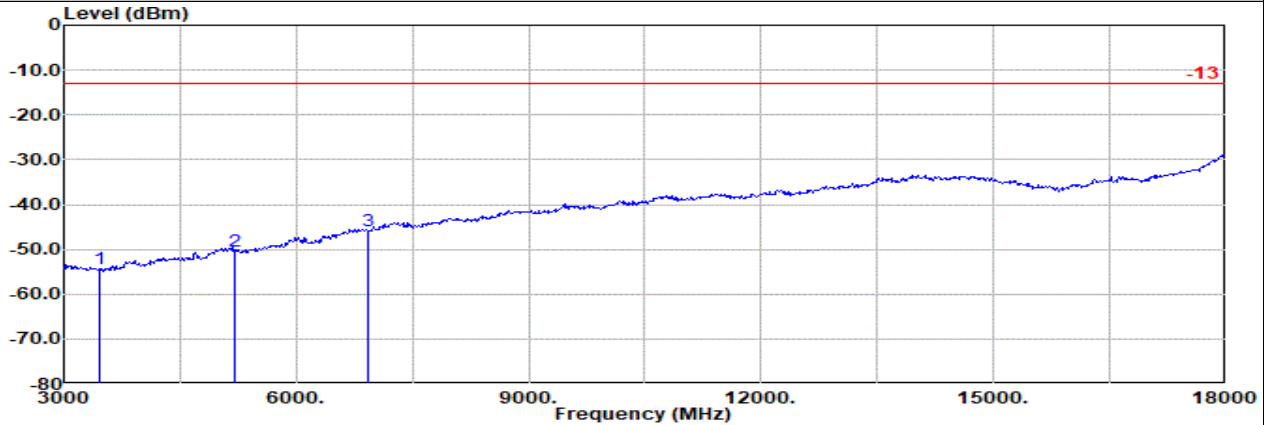

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Horizontal
: WCDMA 1700 Ch1413

| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Readin | Limit | Margin Pol | |
|-----------|--------|----------|-------------------|--------|-------------|--------|--------|------------|------------|
| | | | Factor | 1 | | | | g | |
| MHz | dBm | | dB/m | dB | dB | dBuV | dBm | dB | |
| 1 3465.00 | -54.42 | RMS | 29.40 | -20.50 | 0.91 -95.23 | 31.00 | -13.00 | -41.42 | Horizontal |
| 2 5198.00 | -50.31 | RMS | 33.00 | -17.99 | 0.46 -95.23 | 29.45 | -13.00 | -37.31 | Horizontal |
| 3 6930.00 | -45.86 | RMS | 35.80 | -17.09 | 0.38 -95.23 | 30.28 | -13.00 | -32.86 | Horizontal |

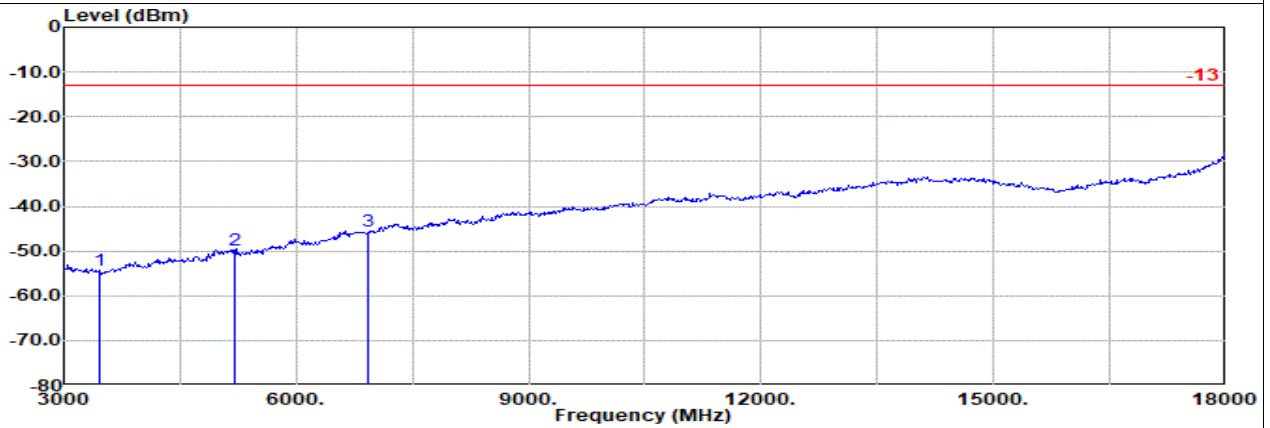

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Vertical
: WCDMA 1700 Ch1413


| Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Readin | Limit | Margin Pol | |
|-----------|--------|----------|-------------------|--------|-------------|--------|--------|------------|----------|
| | | | Factor | 1 | | | | g | |
| MHz | dBm | | dB/m | dB | dB | dBuV | dBm | dB | |
| 1 3465.00 | -54.26 | RMS | 29.40 | -20.50 | 0.91 -95.23 | 31.16 | -13.00 | -41.26 | Vertical |
| 2 5198.00 | -49.95 | RMS | 33.00 | -17.99 | 0.46 -95.23 | 29.81 | -13.00 | -36.95 | Vertical |
| 3 6930.00 | -45.60 | RMS | 35.80 | -17.09 | 0.38 -95.23 | 30.54 | -13.00 | -32.60 | Vertical |



Main


Part 27L Mode 1
WCDMA B4 Ch1513

H

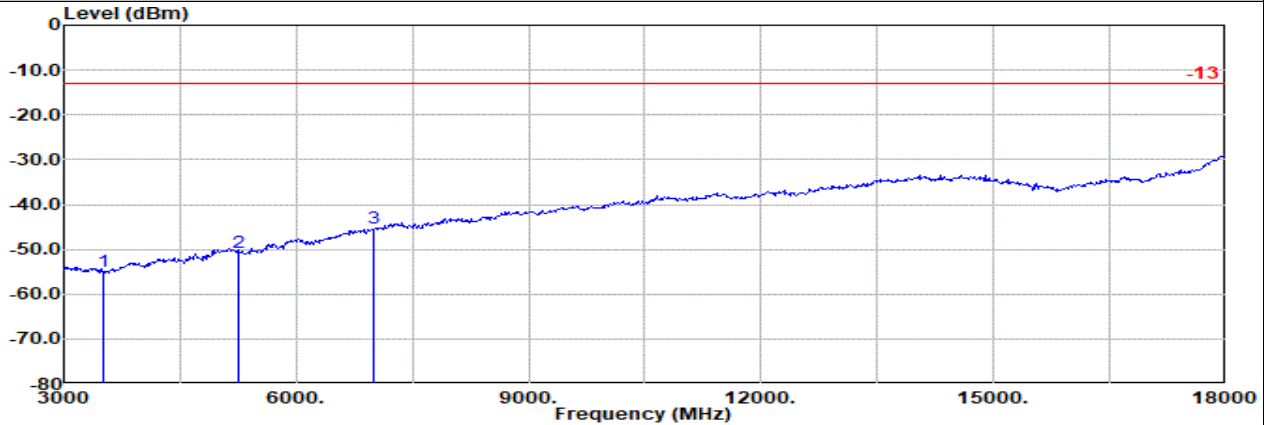

Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Horizontal
: WCDMA 1700 Ch1513

| | Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Readin | Limit | Margin Pol | | |
|---|---------|--------|----------|-------------------|--------|--------|--------|-------|------------|--------|------------|
| | | | | Factor | 1 | | | | g | | |
| | MHz | dBm | | dB/m | dB | dB | dBuV | dBm | dB | | |
| 1 | 3505.00 | -54.87 | RMS | 29.41 | -20.44 | 0.90 | -95.23 | 30.49 | -13.00 | -41.87 | Horizontal |
| 2 | 5258.00 | -50.58 | RMS | 32.88 | -17.94 | 0.44 | -95.23 | 29.27 | -13.00 | -37.58 | Horizontal |
| 3 | 7010.00 | -45.34 | RMS | 35.84 | -17.14 | 0.38 | -95.23 | 30.81 | -13.00 | -32.34 | Horizontal |

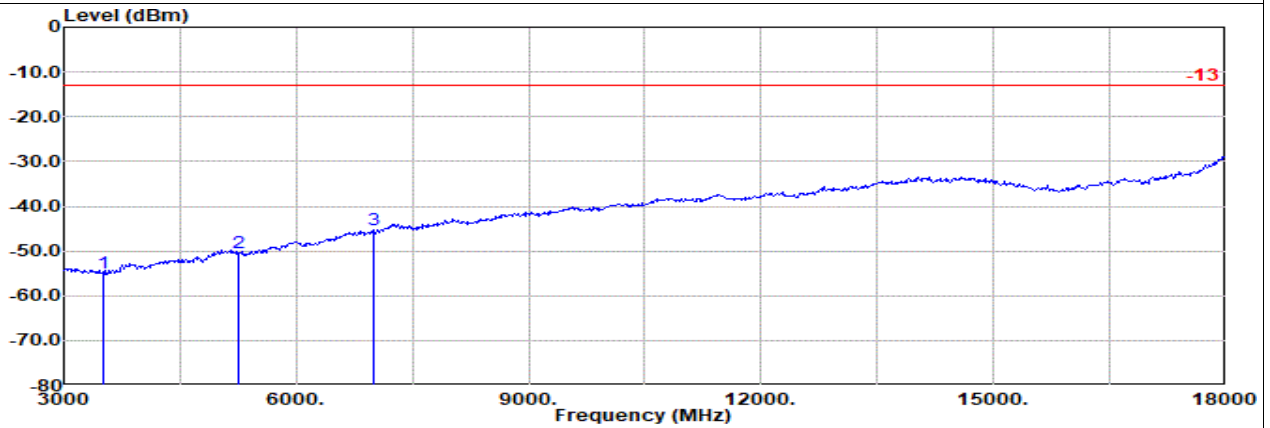


Site : 03CH16-HY
Condition: -13 3m 9120D-1522_240328 Vertical
: WCDMA 1700 Ch1513

| | Freq | Level | Detector | Ant Amp\Cb Filter | | EIRPCF | Readin | Limit | Margin Pol | | |
|---|---------|--------|----------|-------------------|--------|--------|--------|-------|------------|--------|----------|
| | | | | Factor | 1 | | | | g | | |
| | MHz | dBm | | dB/m | dB | dB | dBuV | dBm | dB | | |
| 1 | 3505.00 | -54.97 | RMS | 29.41 | -20.44 | 0.90 | -95.23 | 30.39 | -13.00 | -41.97 | Vertical |
| 2 | 5258.00 | -50.56 | RMS | 32.88 | -17.94 | 0.44 | -95.23 | 29.29 | -13.00 | -37.56 | Vertical |
| 3 | 7010.00 | -45.25 | RMS | 35.84 | -17.14 | 0.38 | -95.23 | 30.90 | -13.00 | -32.25 | Vertical |



Main

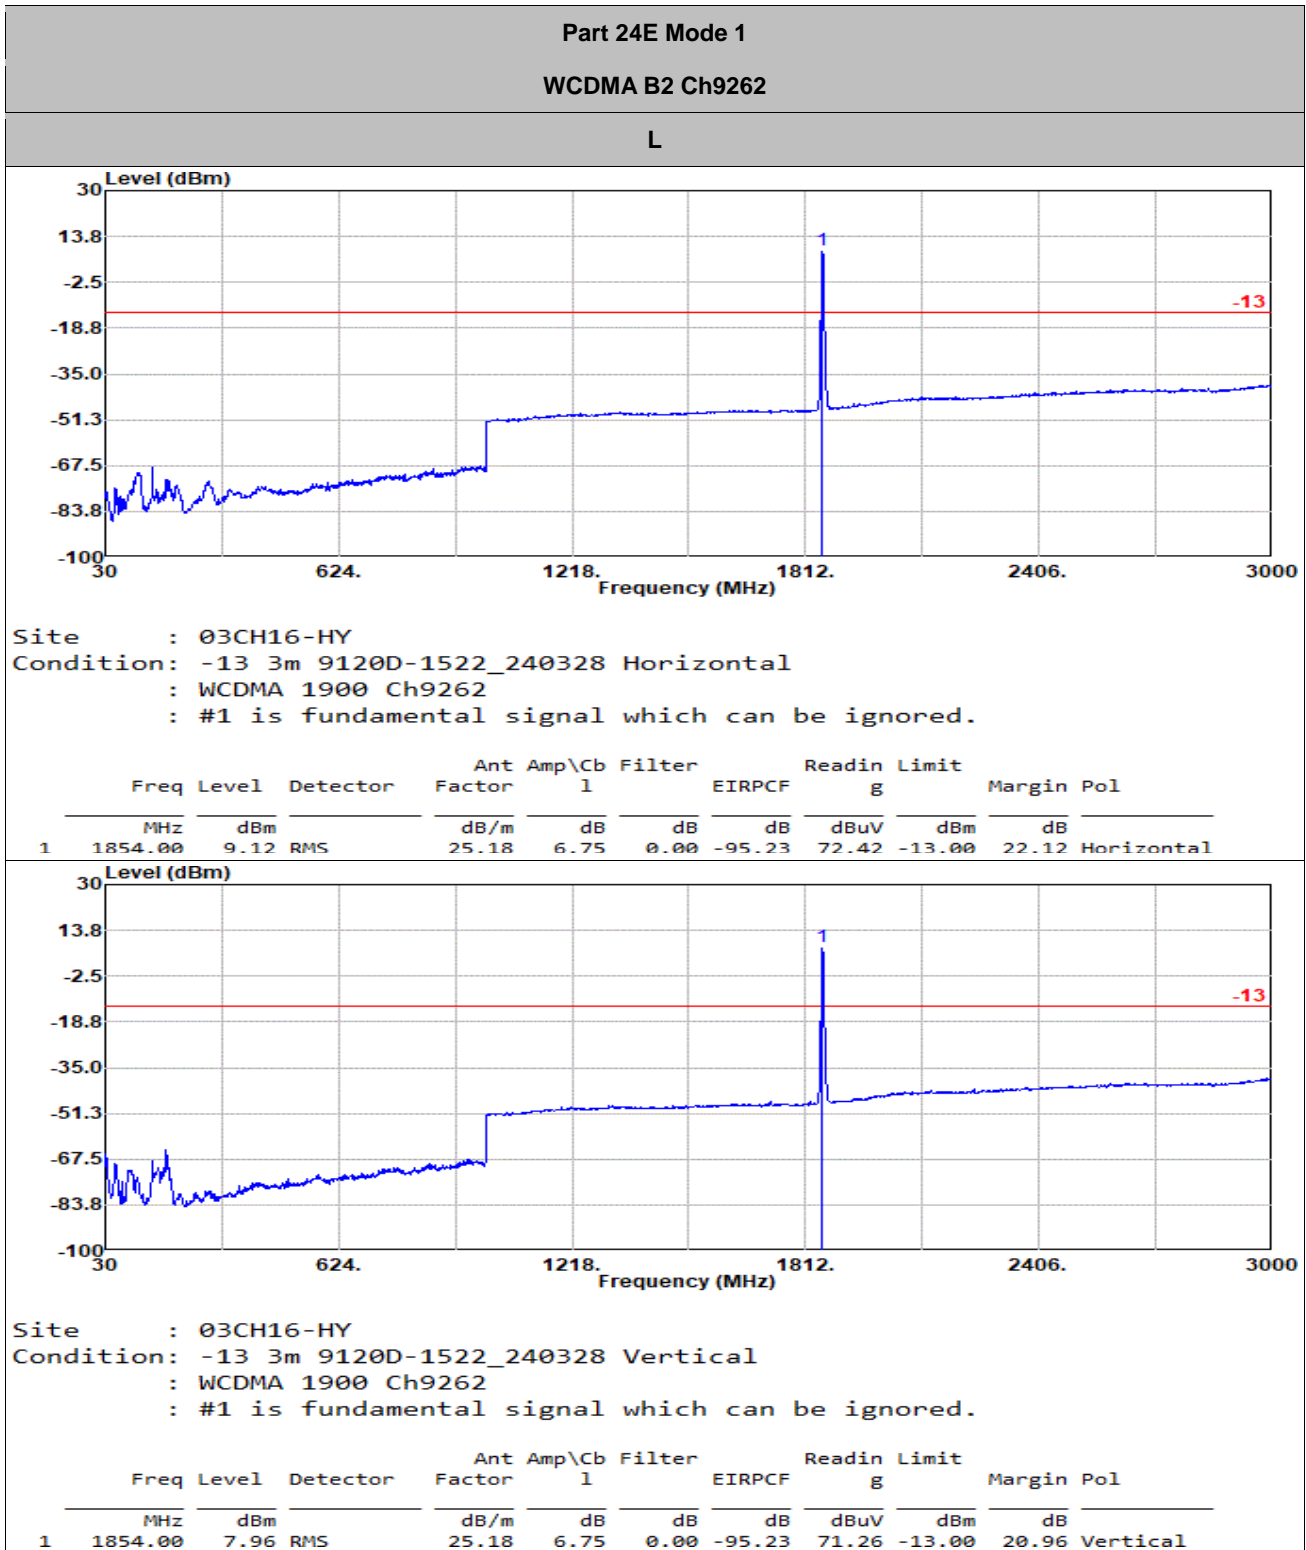

Remark : #1 is fundamental signal which can be ignored.