

**Test Report**  
**for**  
**FCC Part 15 Subpart B & C**

*of*

*Product Name*

**Bluetooth VoIP Phone**

*Model*

**VT25010**

**(Brand:acer)**

*Applied by:*

Wistron Corporation  
21th Fl., 88, Sec.1, Hsin Tai Wu Rd.,  
Hsichih, Taipei Hsien 221,  
Taiwan, R.O.C.

*Test Performed by:*

**International Standards Laboratory**

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.  
Lung-Tan Hsiang, Tao Yuan County 325  
Taiwan, R.O.C.  
Tel:(03)407-1718 Fax:(03)407-1738

**Report Number: ISL-05LR024FC**

**Issue Date: 2005/08/31**

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

- 1. General ..... 1
  - 1.1 Certification of Accuracy of Test Data ..... 1
- 2. Test Results Summary ..... 2
- 3. Description of Equipment Under Test (EUT) ..... 3
- 4. TEST RESULTS ..... 4
  - 4.1 Powerline Conducted Emissions ..... 4
    - 4.1.1 EUT Configuration ..... 4
    - 4.1.2 Test Procedure ..... 4
    - 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... 4
    - 4.1.4 Test Data(Charging Mode): ..... 5
  - 4.2 FHSS Maximum Peak Output Power ..... 7
    - 4.2.1 Test Procedure ..... 7
    - 4.2.2 Test Setup ..... 7
    - 4.2.3 Test Data ..... 7
  - 4.3 Radiated Emission Measurement ..... 9
    - 4.3.1 EUT Configuration ..... 9
    - 4.3.2 Test Procedure ..... 9
    - 4.3.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... 9
    - 4.3.4 Test Data (30MHz – 1GHz): ..... 10
    - 4.3.5 Test Data ( 1GHz – 25 GHz) ..... 12
  - 4.4 Band Edge Measurement..... 18
    - 4.4.1 Test Procedure (Conducted) ..... 18
    - 4.4.2 Test Setup (Conducted) ..... 18
    - 4.4.3 Test Data: ..... 18
    - 4.4.4 Test Procedure (Radiated) ..... 20
    - 4.4.5 Test Setup (Radiated) ..... 20
    - 4.4.6 Test Data ..... 21
  - 4.5 Bandwidth & Hopping Channel Separation ..... 24
    - 4.5.1 Standard Applicable..... 24
    - 4.5.2 Test Procedure ..... 24
    - 4.5.3 Test Setup ..... 24
    - 4.5.4 Test Data ..... 25
  - 4.6 Number of Hopping Frequency Used..... 29
    - 4.6.1 Test Setup ..... 29
    - 4.6.2 Test Data ..... 29
  - 4.7 Dwell Time ..... 31
    - 4.7.1 Test Procedure ..... 31
    - 4.7.2 Test Setup ..... 31
    - 4.7.3 Test Data ..... 32
- 5. Appendix ..... 38
  - 5.1 Appendix A: Measurement Procedure for Power line Conducted Emissions..... 38
  - 5.2 Appendix B: Test Procedure for Radiated Emissions ..... 39
  - 5.3 Appendix C: Test Equipment ..... 40
    - 5.3.1 Test Equipment List..... 40
    - 5.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data ..... 40

5.4 Appendix D: Layout of EUT and Support Equipment..... 41  
5.4.1 General Conducted Test Configuration..... 41  
5.4.2 General Radiation Test Configuration..... 42  
5.5 Appendix E: Description of Support Equipment..... 43  
5.5.1 Description of Support Equipment ..... 43  
5.5.2 Software for Controlling Support Unit..... 44  
5.5.3 I/O Cable Condition of EUT and Support Units..... 44  
5.6 Appendix F: Accuracy of Measurement..... 45  
5.7 Appendix G: Photographs of EUT Configuration Test Set Up..... 47  
5.8 Appendix H: Antenna Spec. .... 50

# 1. General

## 1.1 Certification of Accuracy of Test Data

**Standards:** CFR 47 Part 15 Subpart B Class B  
CFR 47 Part 15 Subpart C (Section 15.247)

**Test Procedure:** ANSI C63.4:2003

**Equipment Tested:** Bluetooth VoIP Phone

**Model:** VT25010

**Applied by:** Wistron Corporation

**Sample received Date:** 2005/08/10

**Final test Date :** 2005/08/15-2005/08/26

**Test Result** PASS

**Test Site:** Chamber 02, Conduction 02

**Temperature** Refer to each site test data

**Humidity:** Refer to each site test data

**Test Engineer:** Jerry Chiou

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

  
-----  
Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 53 pages, including 1 cover page , 2 contents page, and 50 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

## 2. Test Results Summary

The Bluetooth functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207(a)	AC Power Line Emissions	Pass	
15.247(b) (1)	Max. Peak Output Power	Pass	
15.209( a )	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 ( c )	Band Edge Measurement	Pass	
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	
15.247(a) (1)(ii)	Spectrum Bandwidth Of FHSS device	Pass	
15.247(a)(1)	Hopping Channel Separation	Pass	
15.247(a)(1)(iii)	Dwell Time	Pass	

### 3. Description of Equipment Under Test (EUT)

Description: Bluetooth VoIP Phone  
 Model No.: VT25010  
 FCC ID: PU54P1091  
 Brand: acer  
 Bluetooth Module: Cambridge Silicon Radio (Model: BC4-EXT)  
 Frequency Range: 2402 ~ 2480 MHz  
 Support channel: 79 Channels  
 Modulation Skill: GFSK (1Mbps)  
 Antennas Type: printed Antenna  
 Antenna Connected: The Antenna is layout in the PCB, the user is not possible to change the antenna.

Antenna peak Gain: 2.86 dBi

Power Type of Bluetooth module: 3.7 V DC from Rechargeable Battery  
 Battery Charging: Charge via PCMCIA Directly (5V) from PC

The channels and the operation frequency have listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	01	2403
02	2404	03	2405
04	2406	05	2407
.....			
75	2477	76	2478
77	2479	78	2480

PCMCIA Connector: one 68 pins  
 Front: Speak  
 Power Button  
 Pair/Link Button  
 Speakerphone Button  
 Flank: Volume up/down button

EMI Noise Source:  
 Crystal: 13MHz(X1), 16MHz(on Bluetooth Module)

EMI Solution: None

## 4. TEST RESULTS

### 4.1 Powerline Conducted Emissions

#### 4.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit used.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

#### 4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

#### 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)


Frequency Range	150 KHz--30MHz
Detector Function	Quasi-Peak/Average
Bandwidth (RBW)	9KHz

4.1.4 Test Data(Charging Mode):

Power Line Conducted Emissions (Hot) Charging Mode

Operator: Jerry Chiou  
Temperature(C):28  
Humidity(%):58

Frequency MHz	LISNLoss (dB)	CableLoss (dB)	QPCorrt. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorrt. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.15979	0.10	0.03	62.68	65.72	-3.05	50.43	55.72	-5.29
0.3311	0.10	0.10	46.39	60.83	-14.44	32.39	50.83	-18.44
0.46683	0.11	0.07	40.27	56.95	-16.68	31.37	46.95	-15.58
0.66743	0.14	0.07	36.05	56.00	-19.95	30.79	46.00	-15.21
0.8013	0.17	0.07	33.55	56.00	-22.45	31.61	46.00	-14.39
15.6206	0.45	0.30	40.62	60.00	-19.38	34.67	50.00	-15.33
15.7468	0.46	0.31	41.69	60.00	-18.31	35.01	50.00	-14.99
15.9504	0.48	0.31	42.04	60.00	-17.96	37.07	50.00	-12.93
16.2827	0.50	0.31	42.59	60.00	-17.41	37.46	50.00	-12.54
16.8828	0.55	0.32	41.24	60.00	-18.76	36.43	50.00	-13.57

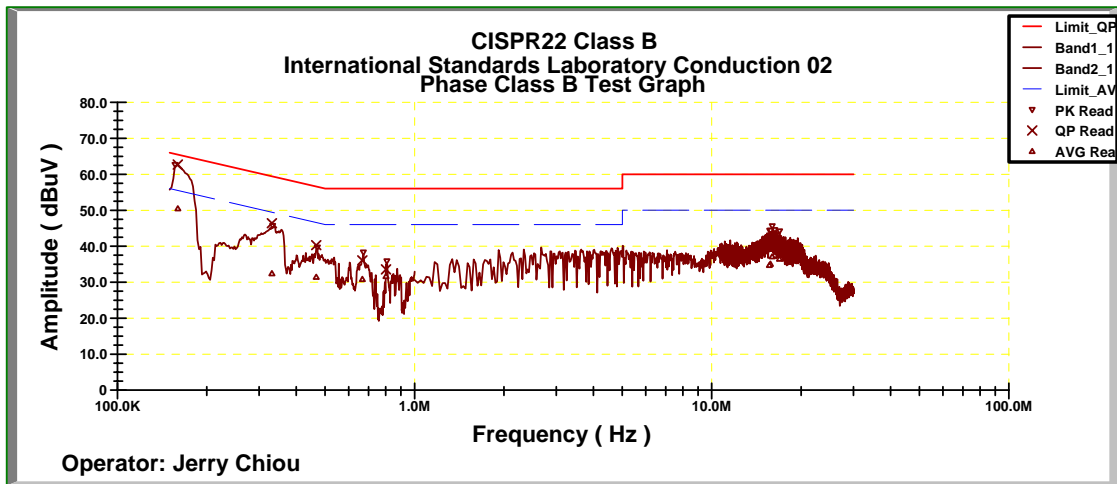




Power Line Conducted Emissions (Neutral) Charging Mode

Operator: Jerry Chiou

Temperature(C):28

Humidity(%):58

Frequency MHz	LISN Loss (dB)	Cable Loss (dB)	QPCorct. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorct. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.46826	0.11	0.07	37.46	56.91	-19.45	33.97	46.91	-12.94
0.53678	0.12	0.07	37.25	56.00	-18.75	31.52	46.00	-14.48
0.66948	0.14	0.07	35.02	56.00	-20.98	33.75	46.00	-12.25
0.80338	0.17	0.07	32.45	56.00	-23.55	28.45	46.00	-17.55
0.87098	0.18	0.07	35.47	56.00	-20.53	33.51	46.00	-12.49
9.36535	0.15	0.20	43.33	60.00	-16.67	40.39	50.00	-9.61
13.8493	0.11	0.28	42.25	60.00	-17.75	37.22	50.00	-12.78
14.0499	0.11	0.28	41.46	60.00	-18.54	35.80	50.00	-14.20
14.3239	0.11	0.29	37.19	60.00	-22.81	30.87	50.00	-19.13
14.9155	0.10	0.30	41.78	60.00	-18.22	37.09	50.00	-12.91

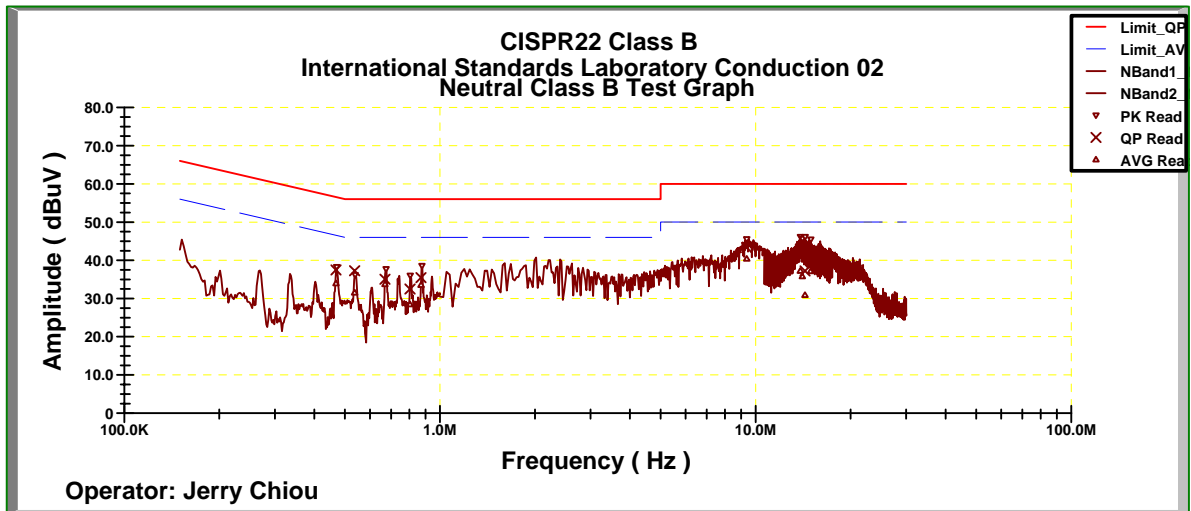


\* NOTE: Margin = Amplitude + Insertion Loss- Limit  
 A margin of -8dB means that the emission is 8dB below the limit

### 4.2 FHSS Maximum Peak Output Power

#### 4.2.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

#### 4.2.2 Test Setup

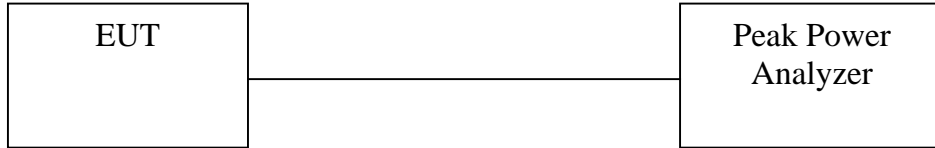

#### 4.2.3 Test Data


### Maximum Peak Output Power



Temperature ( ):25

Test Engineer:Jerry Chiou

Humidity (%):55

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
00	2402	2.45	0.50	1.97	2.95	30	Pass
39	2441	3.32	0.50	2.41	3.82	30	Pass
78	2480	3.92	0.50	2.77	4.42	30	Pass

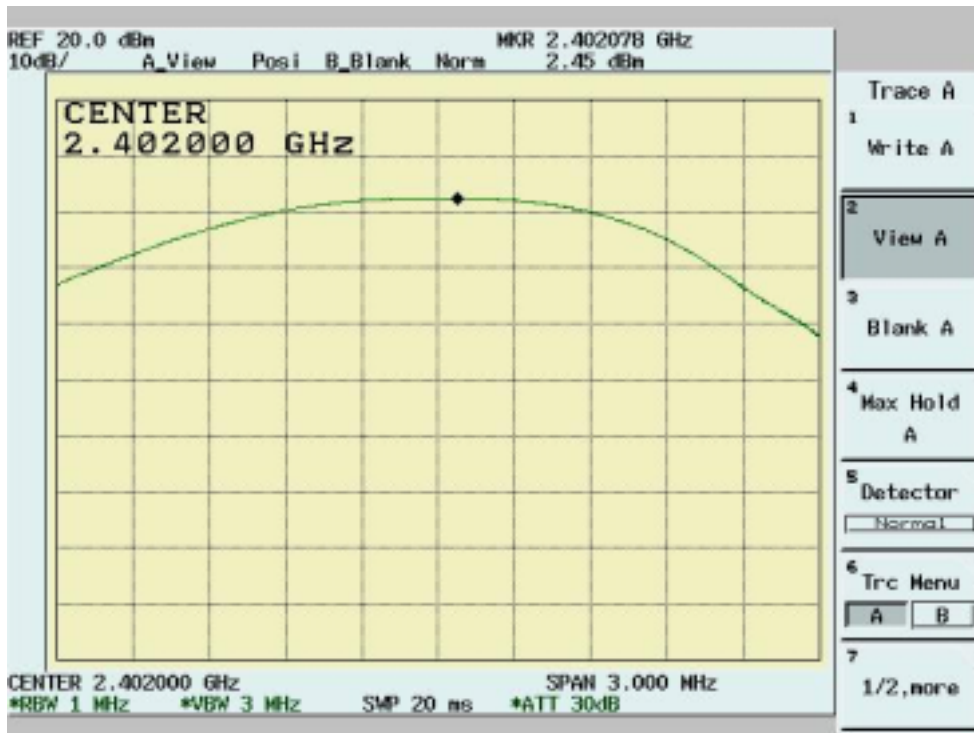

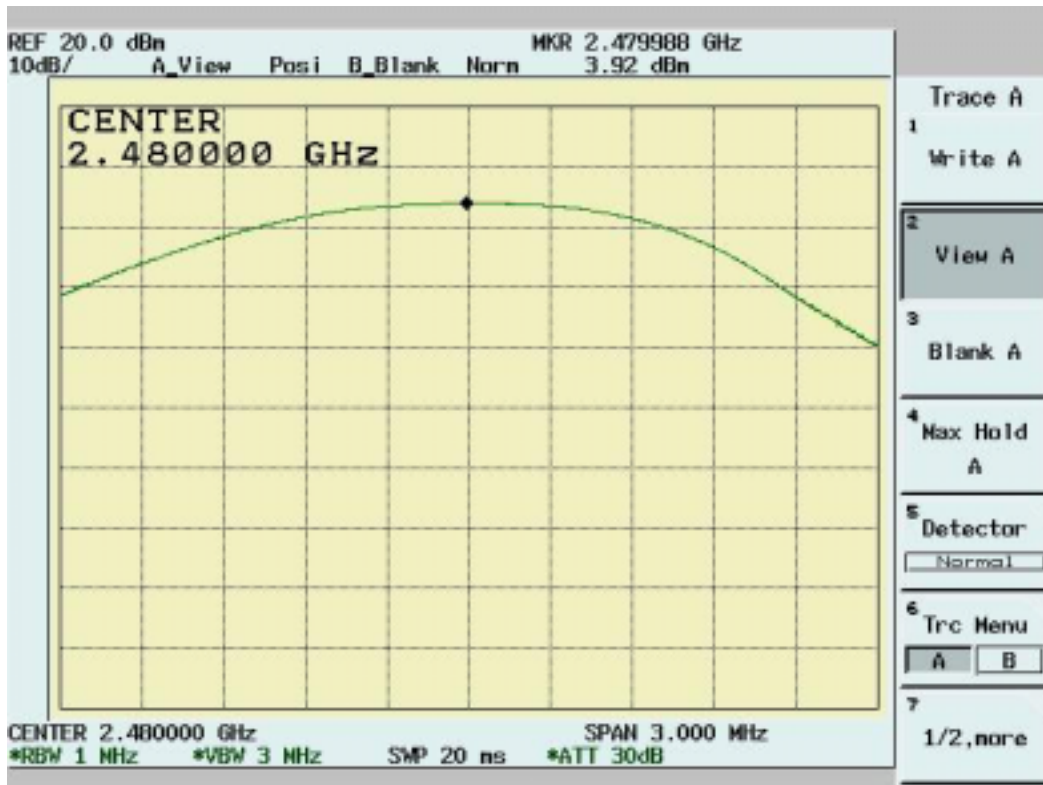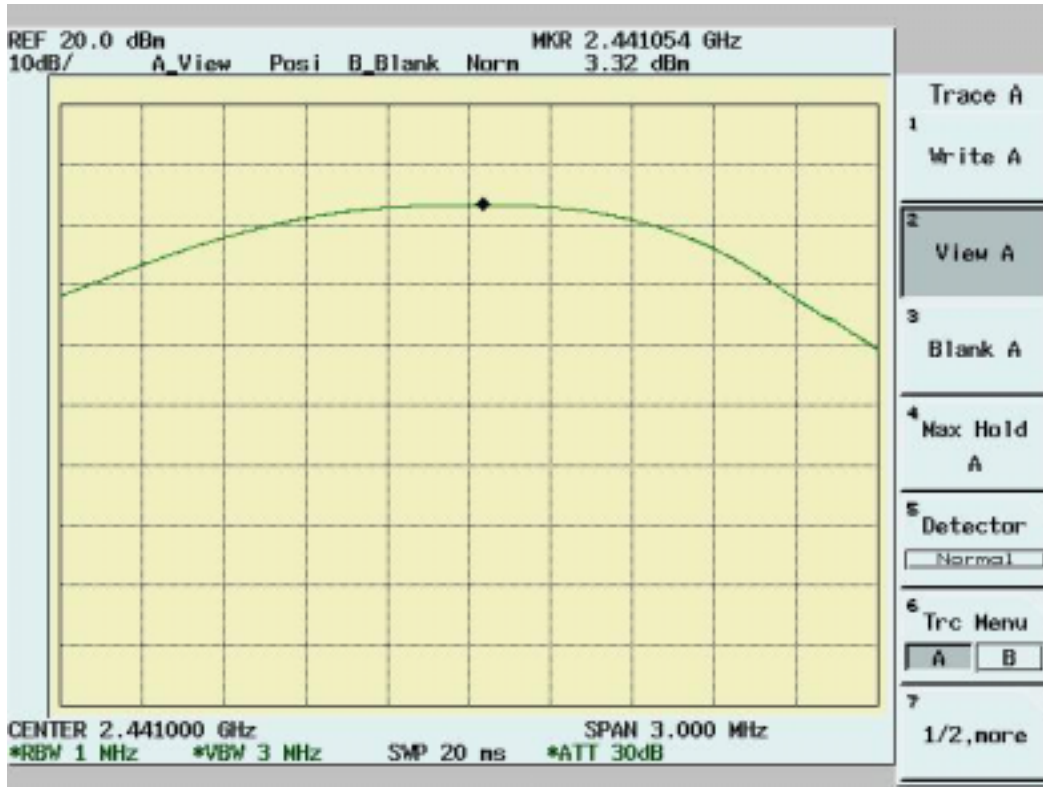

### 4.3 Radiated Emission Measurement

#### 4.3.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

#### 4.3.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2<sup>nd</sup> to 10<sup>th</sup> harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

#### 4.3.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz
Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz
Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.3.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 00, 39, 78

Operator:JerryChiou  
Temperature(C):24  
Humidity(%):50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
175.5	15.35	8.55	2.50	0.00	26.40	43.50	-17.10	103.00	334.00
179.38	14.25	8.51	2.58	0.00	25.33	43.50	-18.17	103.00	317.00
207.51	19.55	8.52	2.76	0.00	30.83	43.50	-12.67	103.00	154.00
215.27	14.00	8.40	2.82	0.00	25.22	43.50	-18.28	103.00	22.00
224	16.20	8.64	2.88	0.00	27.73	46.00	-18.27	196.00	353.00
288.02	16.33	14.24	3.43	0.00	34.00	46.00	-12.00	196.00	353.00
299.66	9.92	15.85	3.60	0.00	29.38	46.00	-16.62	103.00	22.00
312.27	10.49	15.97	3.74	0.00	30.21	46.00	-15.79	196.00	353.00
320.03	7.70	16.02	3.83	0.00	27.55	46.00	-18.45	196.00	353.00
323.91	9.77	16.04	3.87	0.00	29.68	46.00	-16.32	103.00	6.00
463.59	6.84	16.53	4.95	0.00	28.32	46.00	-17.68	103.00	88.00
495.6	5.45	17.29	5.24	0.00	27.98	46.00	-18.02	196.00	353.00

**30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 00, 39, 78**

Operator: Jerry Chiou  
Temperature(C): 24  
Humidity(%): 50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
47.46	26.37	8.62	1.16	0.00	36.15	40.00	-3.85	103.00	154.00
95.96	25.43	9.49	1.91	0.00	36.83	43.50	-6.67	103.00	22.00
139.61	20.80	10.34	2.20	0.00	33.34	43.50	-10.16	103.00	334.00
215.27	24.77	8.40	2.82	0.00	35.98	43.50	-7.52	103.00	22.00
239.52	24.32	10.14	3.03	0.00	37.50	46.00	-8.50	196.00	353.00
257.95	22.06	12.73	3.17	0.00	37.97	46.00	-8.03	103.00	39.00
288.02	20.19	14.24	3.43	0.00	37.86	46.00	-8.14	196.00	353.00
299.66	15.15	15.85	3.60	0.00	34.60	46.00	-11.40	103.00	22.00
322.94	15.59	16.04	3.86	0.00	35.48	46.00	-10.52	103.00	39.00
388.9	19.30	15.97	4.36	0.00	39.64	46.00	-6.36	103.00	39.00
451.95	13.56	16.25	4.88	0.00	34.69	46.00	-11.31	103.00	55.00
543.13	11.66	18.44	5.48	0.00	35.58	46.00	-10.42	103.00	236.00

NOTE:

- During the Pre-test, the EUT has been tested for Channel 00, 39, 78 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.
- Margin = Corrected Amplitude – Limit  
Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain  
A margin of -8dB means that the emission is 8dB below the limit

**All frequencies from 30MHz to 1GHz have been tested**

4.3.5 Test Data ( 1GHz – 25 GHz ) .

1GHz~ 25 GHz (Horizontal), Channel 00: 2402 MHz

Operator:JerryChiou  
Temperature(C):24  
Humidity(%):50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
1601.9	58.70pk	27.66	2.31	34.40	54.26pk	74.00pk	-19.74	101	70
1601.9	53.73av	27.66	2.31	34.40	49.30av	54.00av	-4.70	101	70
2336.16	56.59pk	30.93	1.57	35.19	53.91pk	54.00av	-0.09	101	149
2351.15	58.01pk	30.93	1.53	35.19	55.27pk	74.00pk	-18.73	101	153
2351.15	38.58av	30.93	1.53	35.19	35.85av	54.00av	-18.15	101	153
2368.63	53.07pk	30.93	1.48	35.19	50.28pk	54.00av	-3.72	101	159
2383.62	59.03pk	30.92	1.43	35.20	56.19pk	74.00pk	-17.81	101	163
2383.62	39.09av	30.92	1.43	35.20	36.24av	54.00av	-17.76	101	163
4804.18	57.57pk	34.86	2.12	37.69	56.85pk	74.00pk	-17.15	100.00	198.00
4803.8	40.47av	34.85	2.12	37.69	39.75av	54.00av	-14.25	100.00	198.00
9607.71	44.16pk	40.66	3.23	34.32	53.73pk	54.00av	-0.27	100.00	185.00

1GHz~ 25 GHz (Vertical), Channel 00: 2402 MHz

Operator:JerryChiou  
Temperature(C):24  
Humidity(%):50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
1601.9	58.26pk	27.66	2.31	34.40	53.82pk	74.00pk	-20.18	101	70
1601.9	50.80av	27.66	2.31	34.40	46.37av	54.00av	-7.63	101	70
2336.16	55.02pk	30.93	1.57	35.19	52.33pk	54.00av	-1.67	101	149
2351.15	56.52pk	30.93	1.53	35.19	53.78pk	54.00av	-0.22	101	153
2383.62	57.24pk	30.92	1.43	35.20	54.40pk	74.00pk	-19.60	101	163
2383.62	38.59av	30.92	1.43	35.20	35.74av	54.00av	-18.26	101	163
2496	53.34pk	30.90	1.38	35.20	50.42pk	54.00av	-3.58	101	199
4804.01	58.48pk	34.86	2.12	37.69	57.76pk	74.00pk	-16.24	100.00	69.00
4804.04	40.71av	34.86	2.12	37.69	40.00av	54.00av	-14.00	100.00	69.00
9607.95	44.51pk	40.66	3.23	34.32	54.08pk	74.00pk	-19.92	100.00	307.00
9607.95	24.18av	40.66	3.23	34.32	33.75av	54.00av	-20.25	100.00	307.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- “ \* ”: Fundamental Frequency
- “\*\*\*”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk” : peak mode
- “ av” : average mode
- “ --- “: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

**All frequencies from 1GHz to 25 GHz have been tested.**



1GHz~ 25 GHz (Horizontal) , Channel 39 : 2441 MHz

Operator:JerryChiou  
Temperature(C):24  
Humidity(%):50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
1626.87	56.97pk	27.87	2.32	34.45	52.71pk	54.00av	-1.29	101	69
2358.64	52.91pk	30.93	1.51	35.19	50.15pk	54.00av	-3.85	101	156
2376.12	56.86pk	30.92	1.45	35.20	54.04pk	74.00pk	-19.96	101	161
2376.12	38.00av	30.92	1.45	35.20	35.17av	54.00av	-18.83	101	161
2391.11	58.51pk	30.92	1.42	35.20	55.65pk	74.00pk	-18.35	101	166
2391.11	38.74av	30.92	1.42	35.20	35.88av	54.00av	-18.12	101	166
2486.01	57.05pk	30.90	1.44	35.20	54.19pk	74.00pk	-19.81	101	196
2486.01	38.23av	30.90	1.44	35.20	35.37av	54.00av	-18.63	101	196
2503.5	54.09pk	30.90	1.36	35.20	51.16pk	54.00av	-2.84	102	201
4882.05	72.13pk	35.15	2.14	37.78	71.64pk	74.00pk	-2.36	100.00	54.00
4882.05	40.71av	35.15	2.14	37.78	40.22av	54.00av	-13.78	100.00	54.00
7322.23	44.65pk	39.62	2.53	36.68	50.12pk	54.00av	-3.88	100.00	161.00
9763.02	44.74pk	40.32	3.31	34.37	53.99pk	54.00av	-0.01	100.00	144.00

**1GHz~ 25 GHz (Vertical), Channel 39 : 2441 MHz**

Operator: Jerry Chiou  
 Temperature(C): 24  
 Humidity(%): 50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
1626.87	61.26pk	27.87	2.32	34.45	57.00pk	74.00pk	-17.00	101	69
1626.87	56.25av	27.87	2.32	34.45	51.99av	54.00av	-2.01	101	69
2376.12	57.49pk	30.92	1.45	35.20	54.67pk	74.00pk	-19.33	101	161
2376.12	38.88av	30.92	1.45	35.20	36.05av	54.00av	-17.95	101	161
2391.11	59.69pk	30.92	1.42	35.20	56.83pk	74.00pk	-17.17	101	166
2391.11	39.47av	30.92	1.42	35.20	36.61av	54.00av	-17.39	101	166
2486.01	62.01pk	30.90	1.44	35.20	59.15pk	74.00pk	-14.85	101	196
2486.01	40.27av	30.90	1.44	35.20	37.41av	54.00av	-16.59	101	196
2503.5	58.52pk	30.90	1.36	35.20	55.58pk	74.00pk	-18.42	102	201
2503.5	38.97av	30.90	1.36	35.20	36.03av	54.00av	-17.97	102	201
2518.48	54.95pk	30.91	1.36	35.18	52.04pk	54.00av	-1.96	102	206
4882.12	60.77pk	35.15	2.14	37.78	60.28pk	74.00pk	-13.72	100.00	115.00
4881.93	41.86av	35.15	2.14	37.78	41.37av	54.00av	-12.63	100.00	115.00
9763.43	44.90pk	40.32	3.31	34.37	54.15pk	74.00pk	-19.85	100.00	307.00
9763.43	25.11av	40.32	3.31	34.37	34.37av	54.00av	-19.63	100.00	307.00

Note:

- According to the standards used: Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- “ \* ”: Fundamental Frequency
- “\*\*\*”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “pk”: peak mode
- “av”: average mode
- “---”: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.

**All frequencies from 1GHz to 25 GHz have been tested.**

1GHz~ 25 GHz (Horizontal), Channel 78: 2480 MHz

Operator:JerryChiou  
Temperature(C):24  
Humidity(%):50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
1651.85	57.03pk	28.08	2.34	34.50	52.95pk	54.00av	-1.05	101	67
2381.12	53.81pk	30.92	1.44	35.20	50.98pk	54.00av	-3.02	101	163
2398.6	54.50pk	30.92	1.46	35.20	51.69pk	54.00av	-2.31	101	168
2525.97	57.20pk	30.91	1.36	35.18	54.29pk	74.00pk	-19.71	102	208
2525.97	38.24av	30.91	1.36	35.18	35.33av	54.00av	-18.67	102	208
2540.96	53.37pk	30.92	1.37	35.16	50.49pk	54.00av	-3.51	102	213
4959.88	70.04pk	35.45	2.16	37.87	69.78pk	74.00pk	-4.22	100.00	54.00
4959.88	39.73av	35.45	2.16	37.87	39.47av	54.00av	-14.53	100.00	54.00
7437.75	44.30pk	39.80	2.33	36.47	49.96pk	54.00av	-4.04	100.00	32.00
9920.41	44.33pk	39.98	3.39	34.43	53.26pk	74.00pk	-20.74	100.00	291.00
9920.41	24.14av	39.98	3.39	34.43	33.08av	54.00av	-20.92	100.00	291.00

**1GHz~ 25 GHz (Vertical), Channel 78 : 2480 MHz**

Operator: Jerry Chiou  
 Temperature(C): 24  
 Humidity(%): 50

Frequency MHz	RxAmp. (dBuV)	AntFact (dB/m)	CableLoss (dB)	PreAmpGain (dB)	Corrct.Emi. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos. (cm)	TablePos (deg)
1651.85	61.02pk	28.08	2.34	34.50	56.94pk	74.00pk	-17.06	101	67
1651.85	52.10av	28.08	2.34	34.50	48.02av	54.00av	-5.98	101	67
2398.6	54.13pk	30.92	1.46	35.20	51.31pk	54.00av	-2.69	101	168
2493.51	59.13pk	30.90	1.40	35.20	56.22pk	74.00pk	-17.78	101	198
2493.51	39.20av	30.90	1.40	35.20	36.30av	54.00av	-17.70	101	198
2525.97	60.17pk	30.91	1.36	35.18	57.27pk	74.00pk	-16.73	102	208
2525.97	39.53av	30.91	1.36	35.18	36.62av	54.00av	-17.38	102	208
2540.96	57.10pk	30.92	1.37	35.16	54.22pk	74.00pk	-19.78	102	213
2540.96	38.39av	30.92	1.37	35.16	35.52av	54.00av	-18.48	102	213
4960.1	61.89pk	35.45	2.16	37.87	61.63pk	74.00pk	-12.37	100.00	187.00
4959.9	42.59av	35.45	2.16	37.87	42.33av	54.00av	-11.67	100.00	187.00
7441.45	44.81pk	39.81	2.32	36.46	50.48pk	54.00av	-3.52	100.00	69.00
9919.61	45.93pk	39.98	3.39	34.43	54.86pk	74.00pk	-19.14	100.00	319.00
9919.61	25.47av	39.98	3.39	34.43	34.41av	54.00av	-19.59	100.00	319.00

Note:

- According to the standards used, Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- “ \* ”: Fundamental Frequency
- “\*\*\*”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- “ pk ”: peak mode
- “ av ”: average mode
- “ --- ”: No meter reading data due to the emission level is smaller than spectrum noise level.
- The Spectrum noise level+Correction Factor < Limit - 6 dB
- Margin=Corrected Amplitude – Limit
- Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- A margin of -8dB means that the emission is 8dB below the limit.


**All frequencies from 1GHz to 25 GHz have been tested.**

### 4.4 Band Edge Measurement

#### 4.4.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.  
 Equipment mode: Spectrum analyzer  
 Detector function: Peak mode  
 SPAN: 100MHz  
 RBW: 100KHz  
 VBW: 100KHz  
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

#### 4.4.2 Test Setup (Conducted)

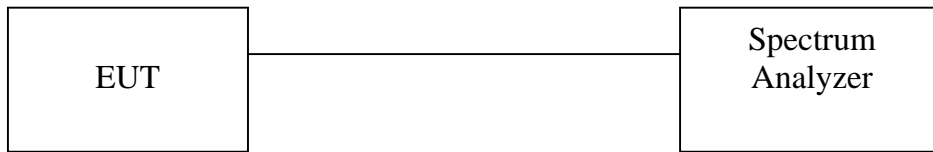

#### 4.4.3 Test Data:

**Table: Band Edge measurement (Conducted)**


Temperature ( ):25

Humidity (%):55


Test Engineer:Jerry Chiou

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
00	2401.8	109.14	---	---
Outside band	2400.0	68.20	40.94	Pass
78	2480.0	110.59	---	---
Outside band	2482.0	70.34	40.25	Pass

### Band Edge Conducted measurement

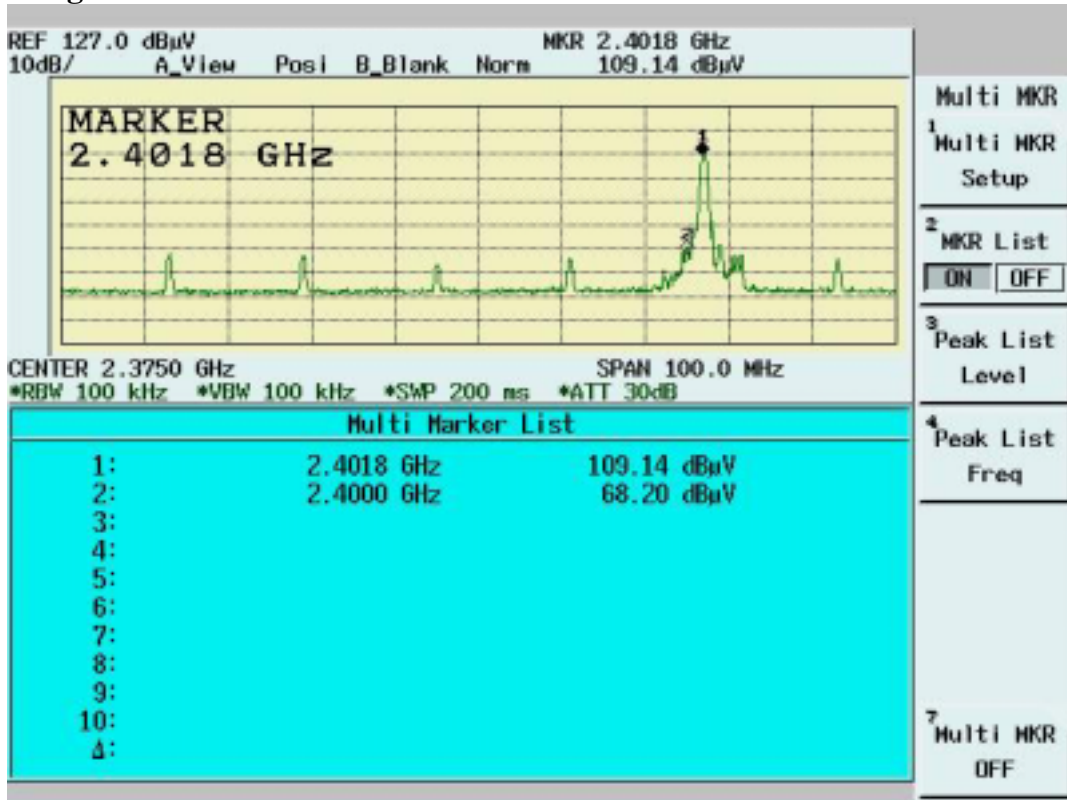

### Band Edge Conducted Measurement

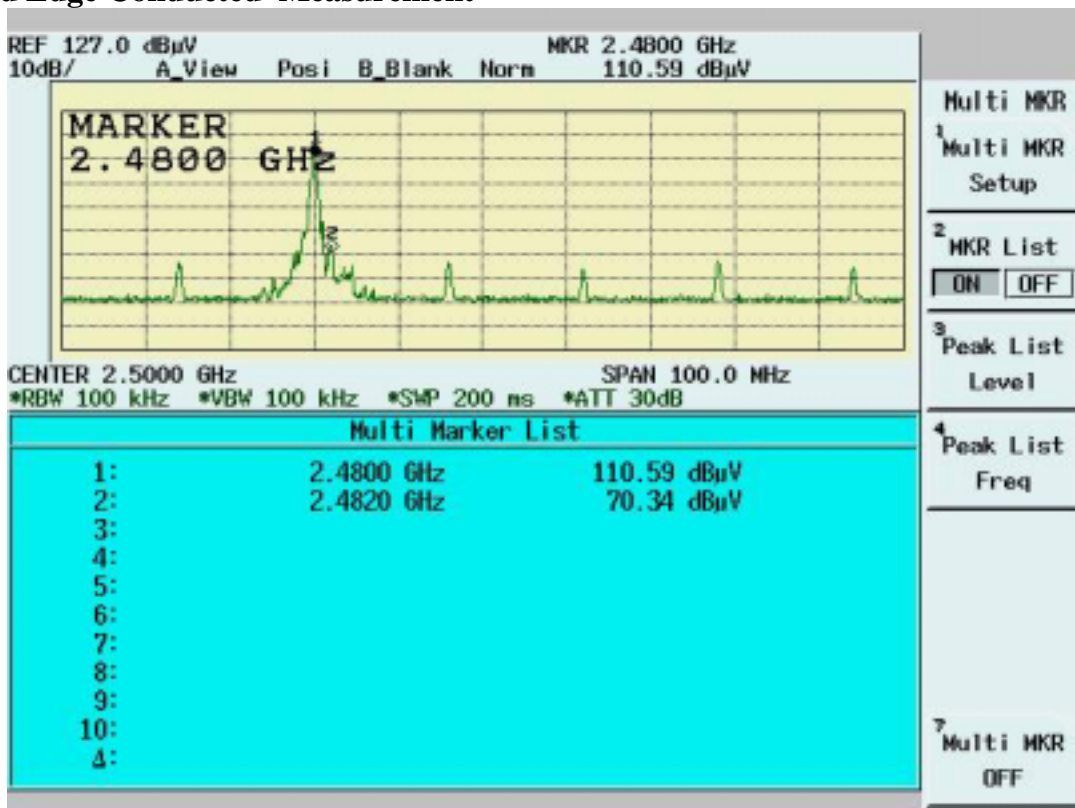

#### 4.4.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.  
Equipment mode: Spectrum analyzer  
Detector function: Peak mode  
SPAN: 100MHz  
RBW: 1MHz  
VBW: 3MHz  
Center frequency: 2.375GHz, 2.500GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,  
Change RBW: 1MHz  
VBW: 10Hz  
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

#### 4.4.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.4.6 Test Data

Table Band Edge measurement (Radiated)

Test Engineer: Jerry Chiou

Temperature ( ): 27

Data Rate

Humidity (%): 40


Description	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc ( Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
Channel_00 (average mode)	2402.40	27.02	35.48	62.50	---	---	10Hz	---
Channel_00 (peak mode)	2402.00	63.90	35.48	99.38	---	---	3MHz	---
Outside band (peak mode)	2400.00	39.83	35.48	75.31	24.07	---	3MHz	Pass
Channel_78 (average mode)	2480.30	28.41	35.51	63.92	---	---	10Hz	---
Channel_78 (peak mode)	2480.10	66.01	35.51	101.52	---	---	3MHz	---
Outside band (peak mode)	2482.00	34.14	35.51	69.65	31.87	---	3MHz	Pass
Channel_00 Restricted band (peak mode)	2338.30	20.95	35.47	56.42	---	74	3MHz	Pass
Restricted band (average mode)	2386.10	8.46	35.47	43.93	---	54	10Hz	Pass
Channel_78 Restricted band (peak mode)	2483.50	23.40	35.51	58.91	---	74	3MHz	Pass
Restricted band (average mode)	2528.10	9.43	35.51	44.94	---	54	10Hz	Pass

Note:


- The Spectrum plot of emission level measurement in Restricted band is attached.
- Emission Level=Spectrum Reading+Correction Factor
- Correction Factor=Antenna Factor+cable loss–amplifier gain
- Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.




**Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 00)**

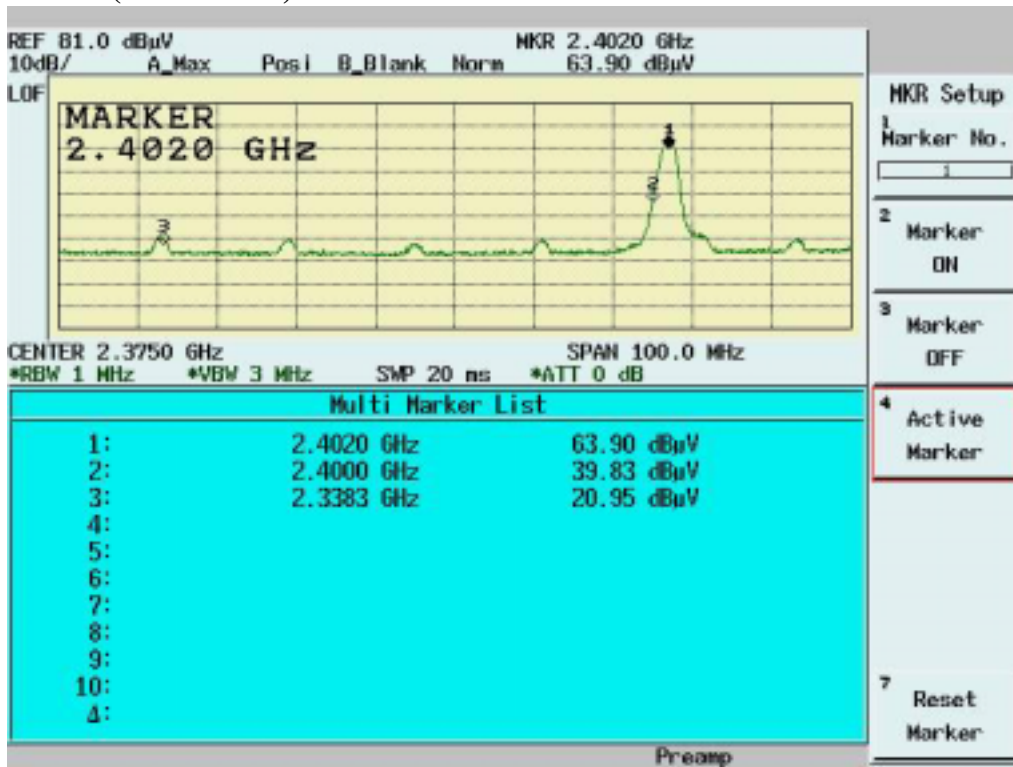


**Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 00)**

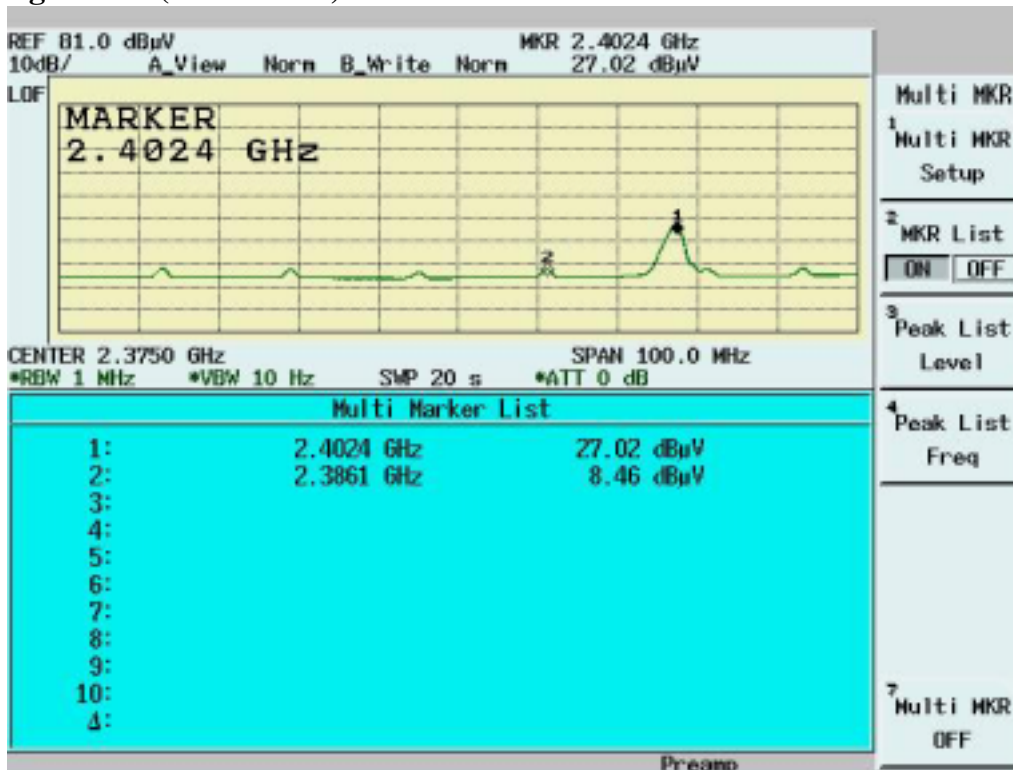

**Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 78)**

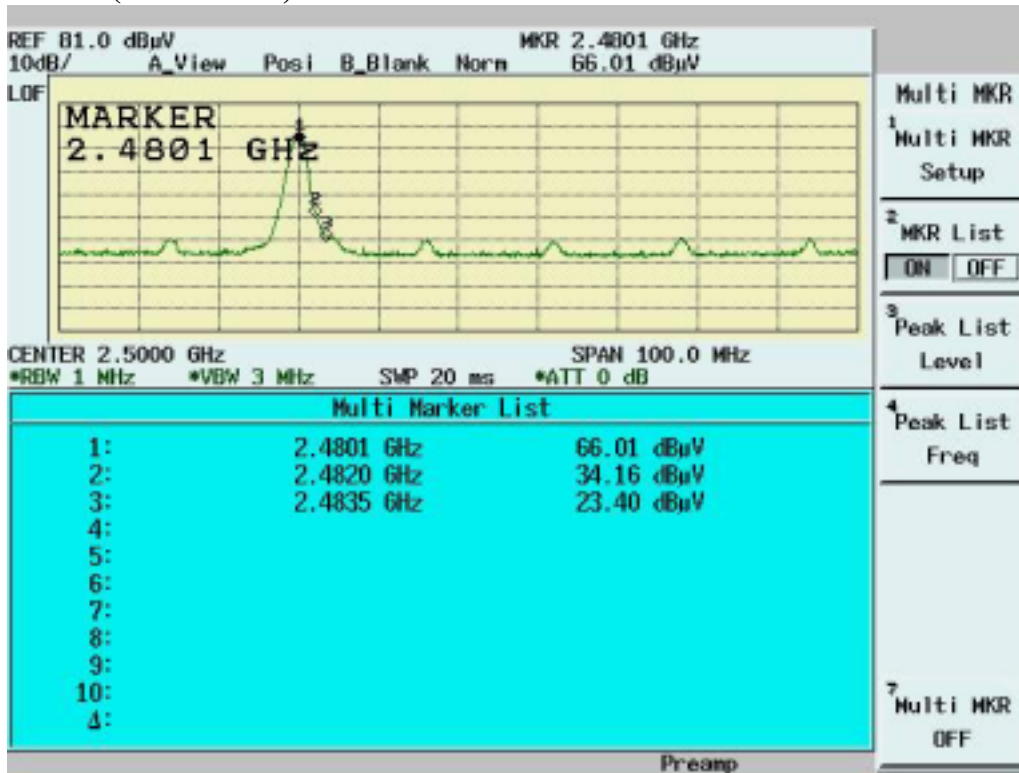

**Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 78)**

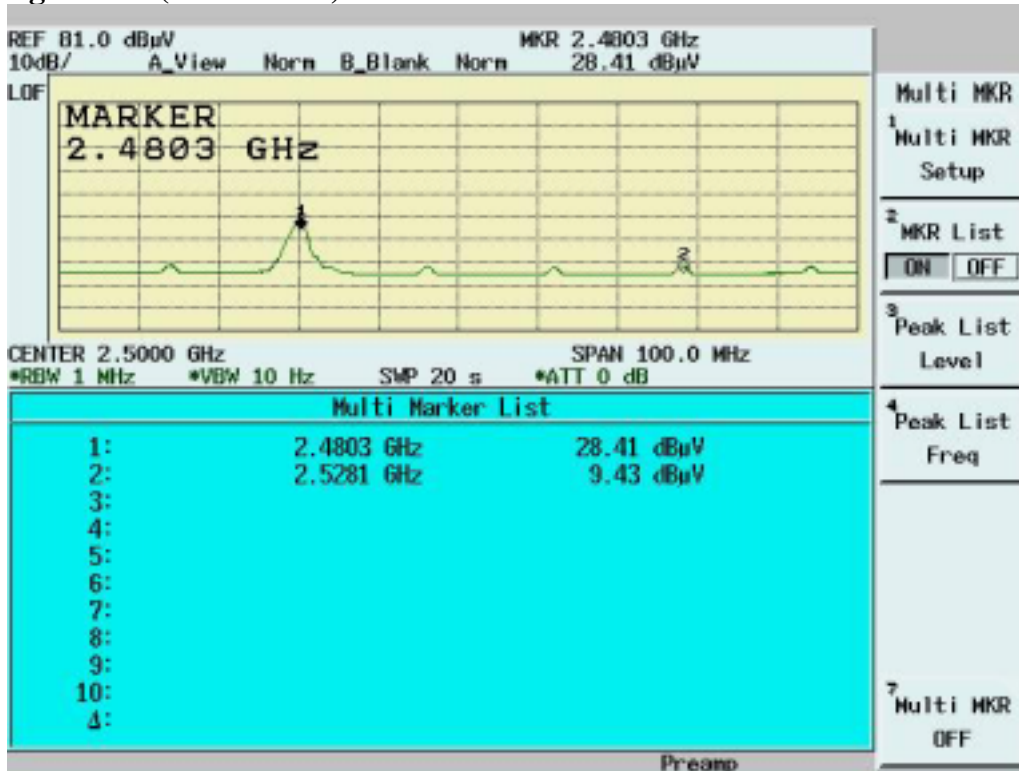

### 4.5 Bandwidth & Hopping Channel Separation

#### 4.5.1 Standard Applicable

According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

#### 4.5.2 Test Procedure

■ Bandwidth Test Procedure


The Transmitter output of EUT was connected to the spectrum analyzer. The 20 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	30KHz
VBW	100KHz

■ Hopping Channel Separation Test Procedure

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.  
Equipment mode: Spectrum analyzer  
RBW: 100KHz  
VBW: 300KHz  
SPAN:3MHz
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer Marker function.
4. Repeat above procedures until all frequencies measured were complete.

#### 4.5.3 Test Setup

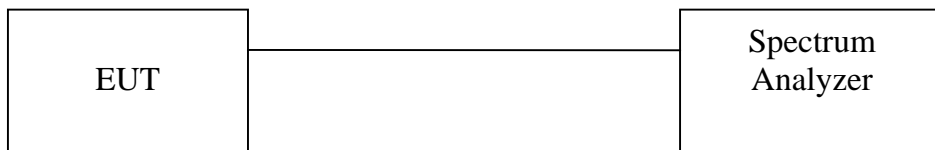

4.5.4 Test Data

20dB Bandwidth

Temperature ( ):25

Humidity (%):55

Test Engineer:Jerry Chiou

Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Pass/Fail
00	2402	840	1000	Pass
39	2441	840	1000	Pass
78	2480	840	1000	Pass

Hopping Channel Separation

Temperature ( ):22

Humidity (%):25

Test Engineer:Mailes Hsieh

Channel	Frequency (MHz)	Separation (KHz)	Limit (KHz)	Pass/Fail
00	2402	996	840	Pass
39	2441	996	840	Pass
78	2480	999	840	Pass

20dB Bandwidth Channel 00:



20dB Bandwidth Channel 39:



20dB Bandwidth Channel 78:



Hopping Channel Separation Channel 00



Hopping Channel Separation Channel 39



Hopping Channel Separation Channel 78



### 4.6 Number of Hopping Frequency Used

#### 1.1.1 Test Procedure

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.  
Equipment mode: Spectrum analyzer  
RBW: 300KHz  
VBW: 1MHz
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
3. Repeat above procedures until all frequencies measured were complete.

#### 4.6.1 Test Setup




#### 4.6.2 Test Data

Number of Hopping Frequency Used


Test result	Limit (KHz)	Pass/Fail
79	>75	Pass



2400~2405MHz

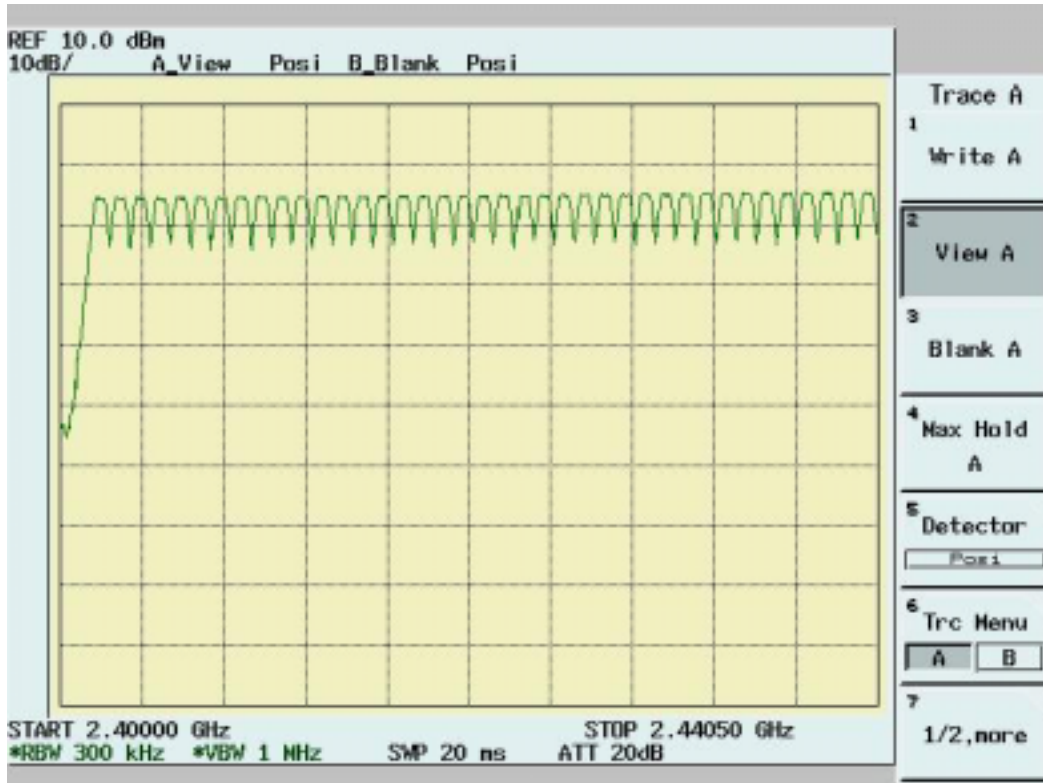

2405~2482MHz

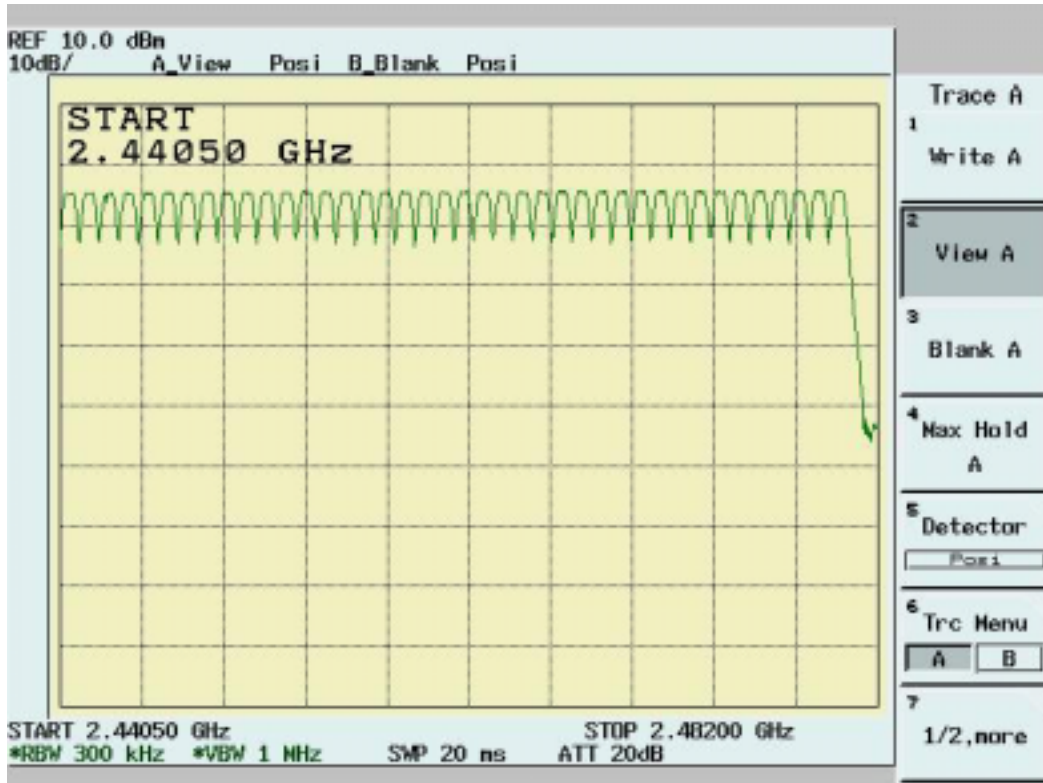

## 4.7 Dwell Time

### 4.7.1 Test Procedure

- 1 Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.  
Equipment mode: Spectrum analyzer  
RBW: 1MHz  
VBW: 1MHz  
SPAN: Zero Span
- 2 Adjust the center frequency of spectrum analyzer on any frequency be measured.
- 3 Measure the Dwell Time by spectrum analyzer Marker function.
- 4 Repeat above procedures until all frequencies measured were complete.

### 4.7.2 Test Setup



4.7.3 Test Data

Dwell Time

Temperature ( ):25

Test Engineer:Jerry Chiou

Humidity (%):55

Mode	Frequency (MHz)	Spectrum Reading (µs)	Test Result (ms)	Limit (ms)	Pass/Fail
DH1	2402	414	264.96	< 400	Pass
DH3	2402	1672	356.69	< 400	Pass
DH5	2402	2912	372.74	< 400	Pass

Mode	Frequency (MHz)	Spectrum Reading (µs)	Test Result (ms)	Limit (ms)	Pass/Fail
DH1	2441	414	264.96	< 400	Pass
DH3	2441	1668	355.84	< 400	Pass
DH5	2441	2912	372.74	< 400	Pass

Mode	Frequency (MHz)	Spectrum Reading (µs)	Test Result (ms)	Limit (ms)	Pass/Fail
DH1	2480	414	264.96	< 400	Pass
DH3	2480	1672	356.69	< 400	Pass
DH5	2480	2920	373.76	< 400	Pass

Note:

A period time=79x0.4(s)=31.6(s)

CH00 DH1 time slot= 0.414(ms)\*(1600/(1\*79))\*31.6=264.96(ms)

DH3 time slot= 1.672(ms)\*(1600/(3\*79))\*31.6=356.69(ms)

DH5 time slot= 2.912(ms)\*(1600/(5\*79))\*31.6=372.74(ms)

CH39 DH1 time slot= 0.414(ms)\*(1600/(1\*79))\*31.6=264.96 (ms)

DH3 time slot= 1.668(ms)\*(1600/(3\*79))\*31.6=355.84(ms)


DH5 time slot= 2.912(ms)\*(1600/(5\*79))\*31.6=372.74(ms)

CH78 DH1 time slot= 0.414(ms)\*(1600/(1\*79))\*31.6=264.96 (ms)


DH3 time slot= 1.672(ms)\*(1600/(3\*79))\*31.6=356.69(ms)

DH5 time slot= 2.920(ms)\*(1600/(5\*79))\*31.6=373.76(ms)


CH00 DH1 DWELL Time

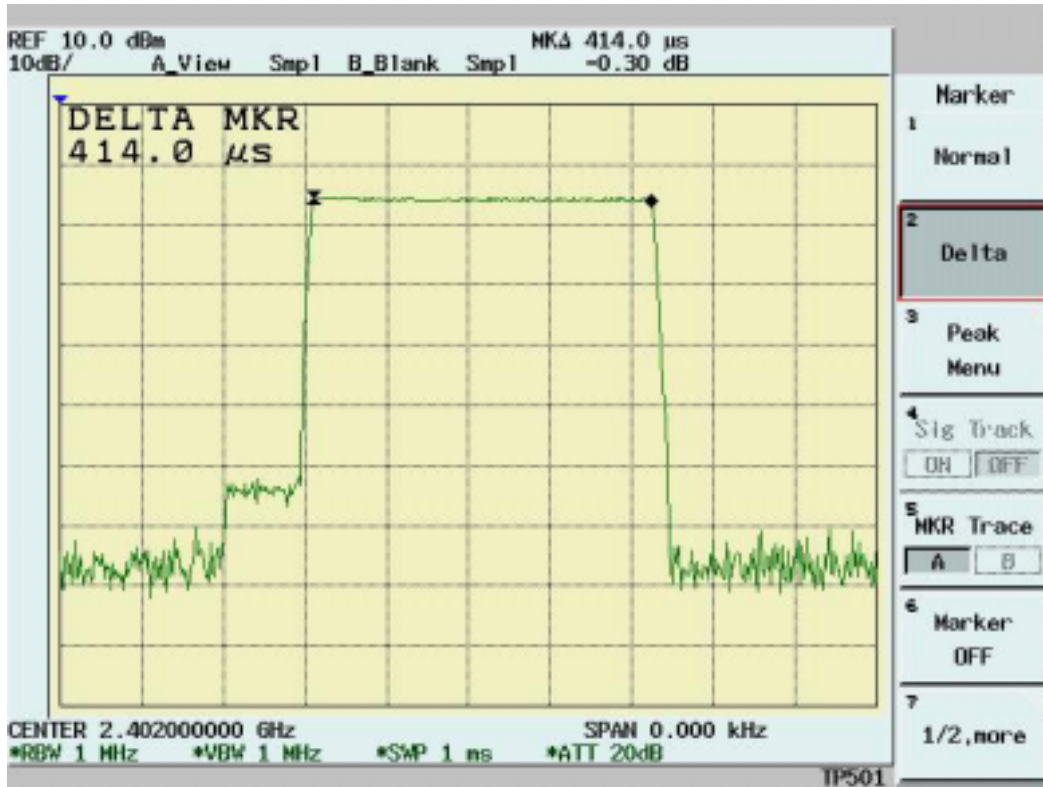


CH00 DH3 DWELL Time

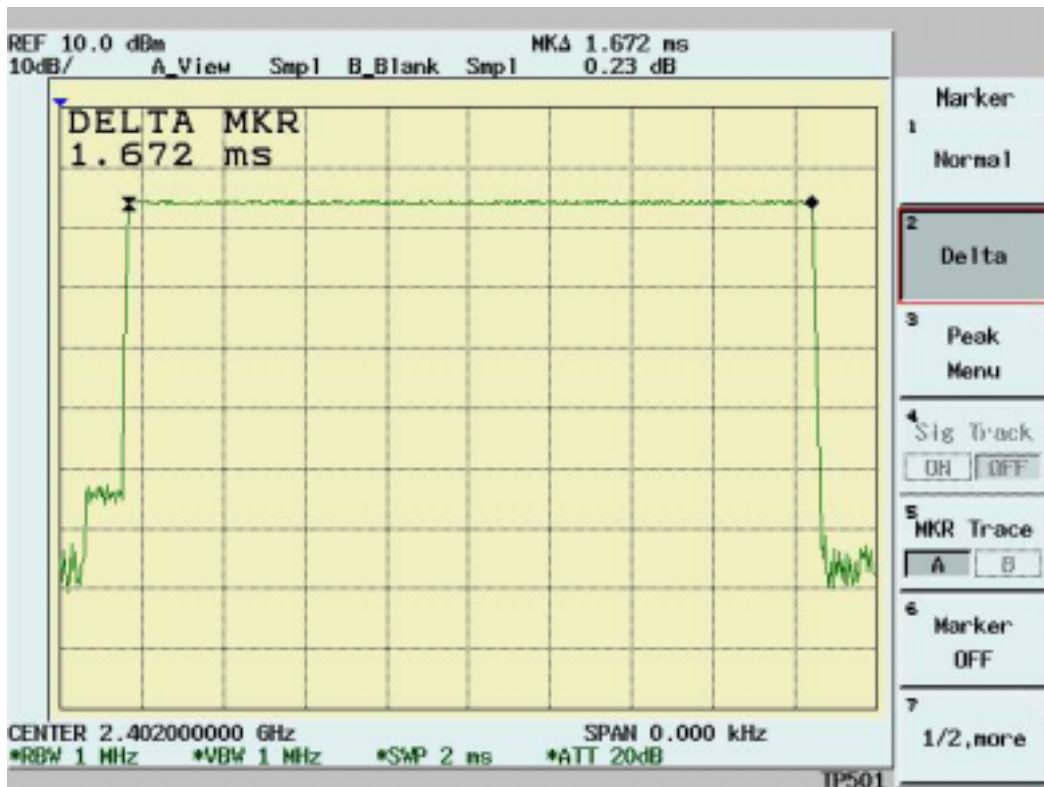


CH00 DH5 DWELL Time

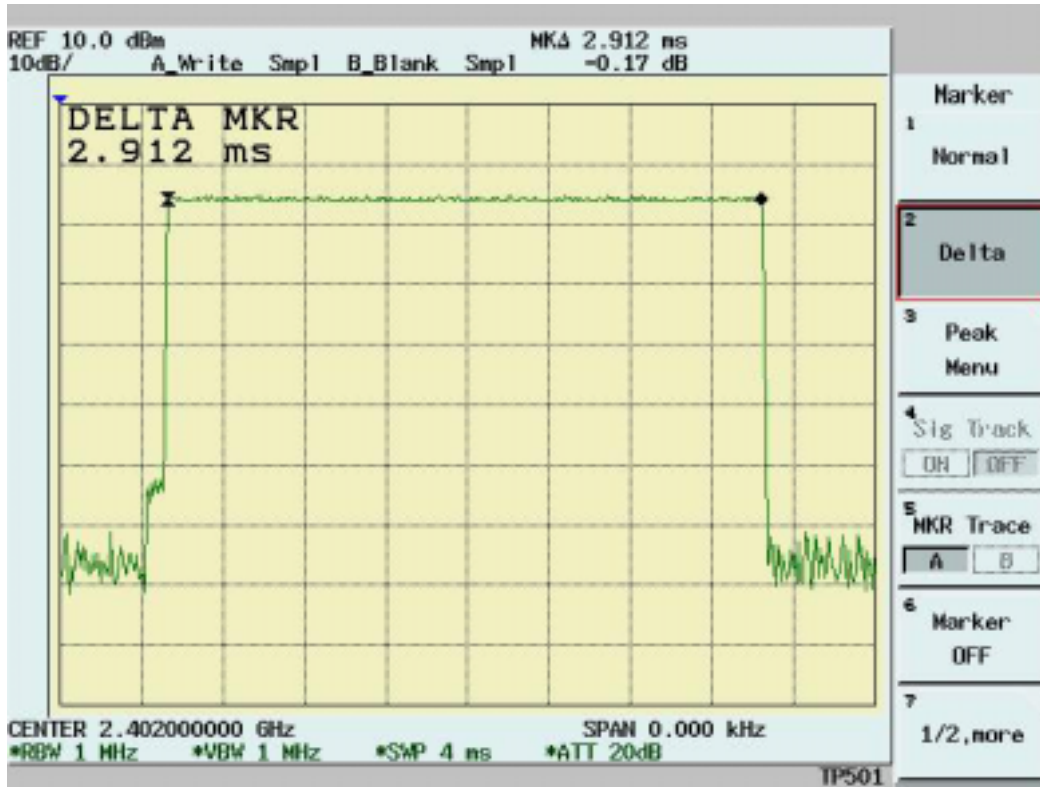

CH39 DH1 DWELL Time

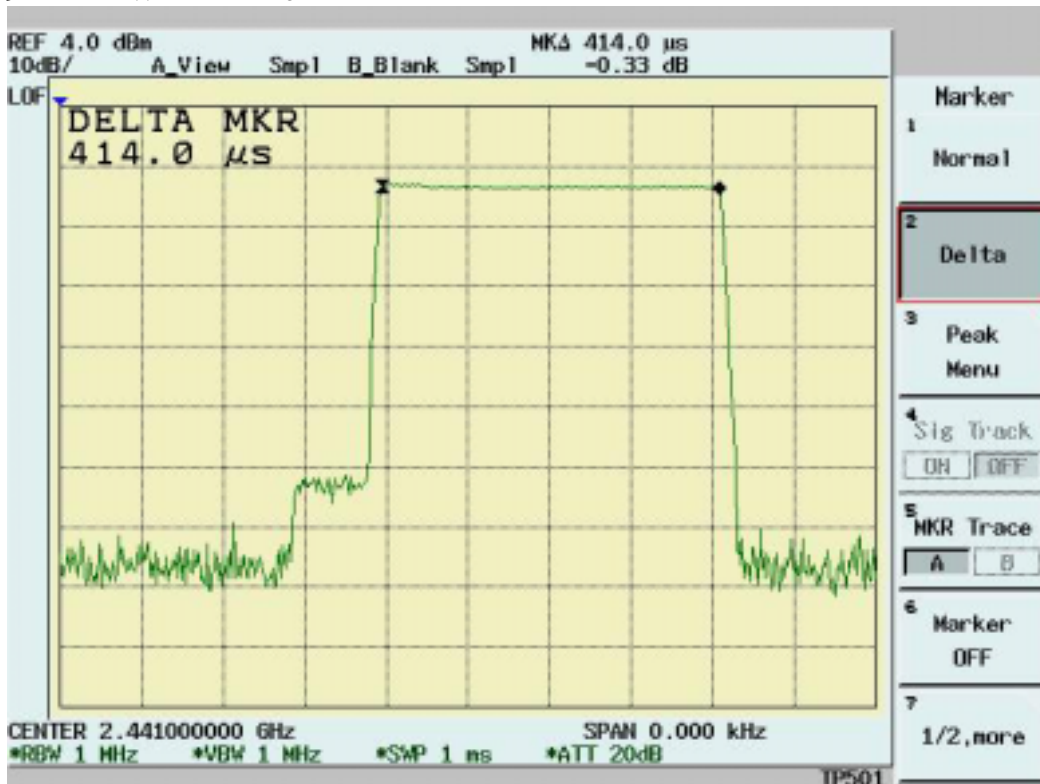


CH39 DH3 DWELL Time

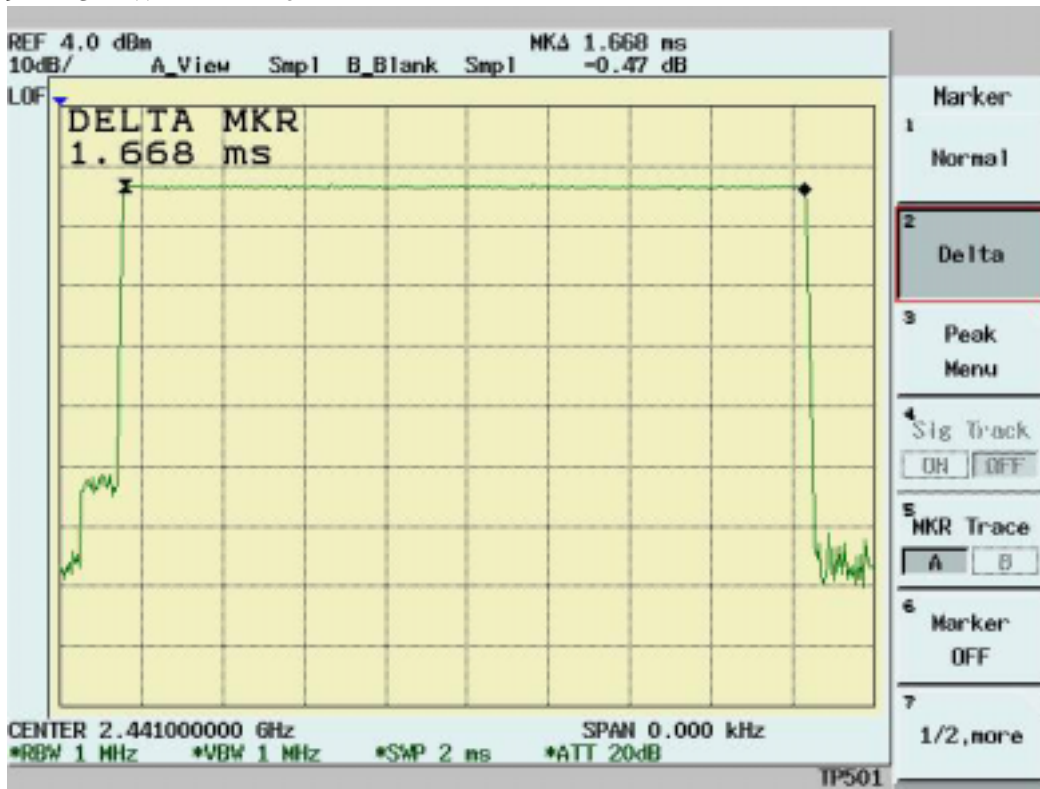

CH39 DH5 DWELL Time




CH78 DH1 DWELL Time

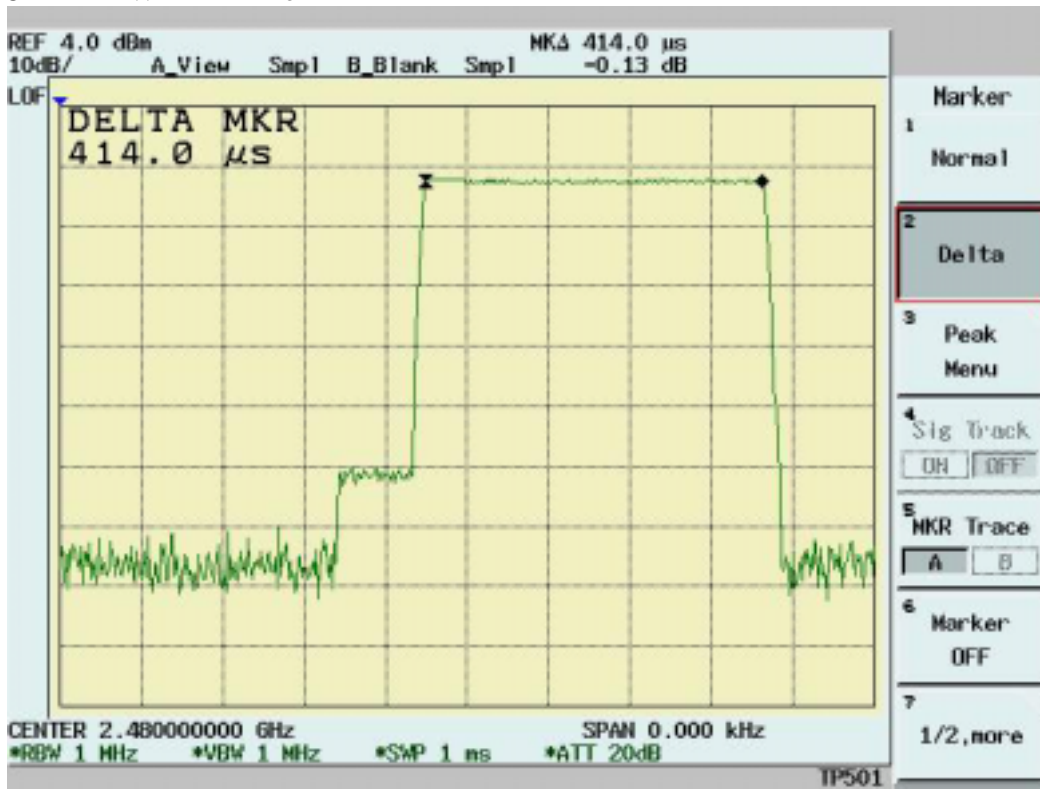

CH78 DH3 DWELL Time



CH78 DH5 DWELL Time

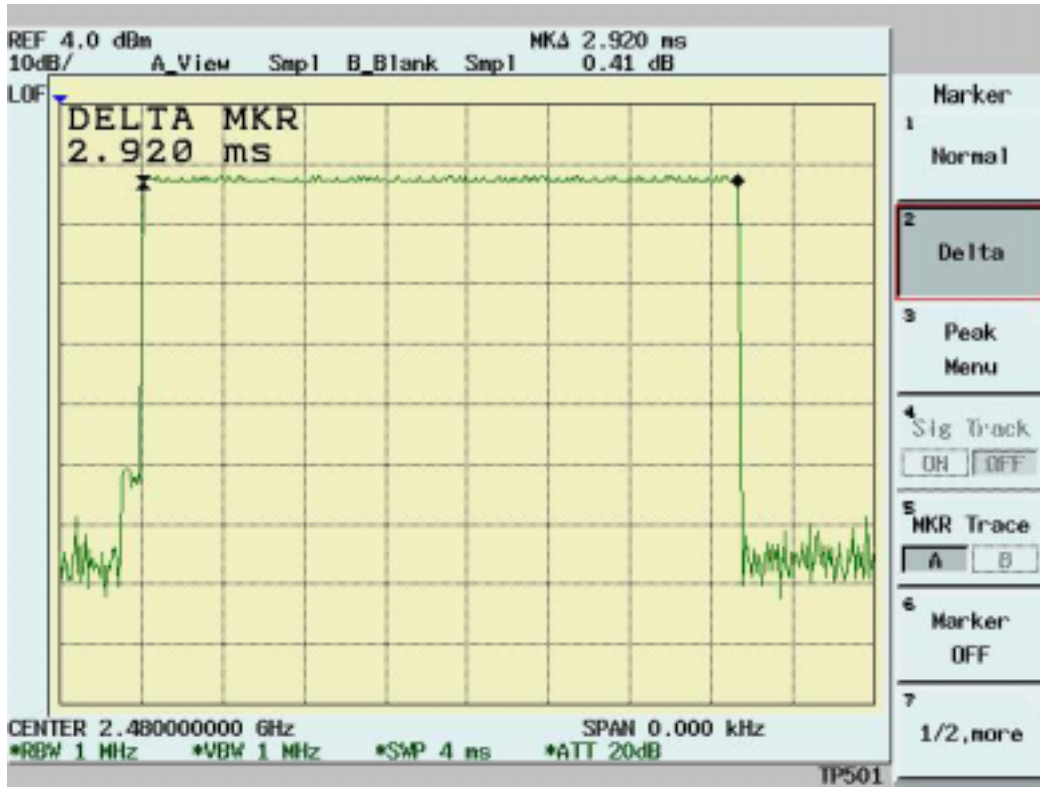



## 5. Appendix

### 5.1 Appendix A: Measurement Procedure for Power line Conducted Emissions

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the required standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum emission. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

## 5.2 Appendix B: Test Procedure for Radiated Emissions

### Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

### Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both readings are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum emission. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

### 5.3 Appendix C: Test Equipment

#### 5.3.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C2	Harbourindustries	RG400	1F-C2	05/20/2005	05/20/2006
Conduction	Digital Hygro-Thermometer Conduct	MicroLife	HT-2126G	ISL-Conduction02	11/30/2004	11/30/2005
Conduction	EMI Receiver 02	HP	85460A	3448A00183	10/01/2004	10/01/2005
Conduction	LISN 01	R&S	ESH2-Z5	890485/013	05/05/2005	05/05/2006
Conduction	LISN 06	R&S	ESH3-Z5	828874/009	12/18/2004	12/18/2005
Radiation	BILOG Antenna 08	Schaffner	CBL6112B	2756	06/07/2005	06/07/2006
Radiation	Coaxial Cable Chmb 02-10M	Belden	RG-8/U	Chmb 02-10M	11/16/2004	11/16/005
Radiation	Digital Hygro-Thermometer Chmb 02	MicroLife	HT-2126G	Chmb 02	11/30/2004	12/30/2005
Radiation	EMI Receiver 03	HP	85460A	3448A00209	03/24/2005	03/24/2006
Radiation	Spectrum Analyzer 13	Advantest	R3132	121200411	02/16/2005	02/16/2006
Radiation	Horn Antenna 02	Com-Power	AH-118	10088	07/22/2005	07/22/2006
Radiation	Horn Antenna 04	Com-Power	AH-826	081-001	01/13/2005	01/13/2006
Radiation	Horn Antenna 05	Com-Power	AH-640	100A	09/22/2004	09/22/2005
Radiation	Microwave Cable RF SK-01	HUBER+SUHNERAG.	Sucoflex 102	22139 /2	07/07/2005	07/07/2006
Chamber 05	Peak Power Analyzer	HP	8990A	3621A01269	02/15/2005	02/15/2006
Chamber 05	Power Sensor Radar	HP	84815A	3318A01828	02/15/2005	02/15/2006
Radiation	Preamplifier 02	MITEQ	AFS44-00102 650-40-10P-44	728229	01/28/2005	01/28/2006
Radiation	Preamplifier 10	MITEQ	JS-26004000-2 7-5A	818471	02/28/2005	02/28/2006
Radiation	High Pass Filter 01	HEWLETT-PACKARD	84300-80038	001	N/A	N/A
Radiation	High Pass Filter 02	HEWLETT-PACKARD	84300-80039	005	N/A	N/A
Radiation	Spectrum Analyzer 14	Advantest	R3182	140600028	09/09/2004	09/09/2006


Note: Calibration is traceable to NIST or national or international standards.

#### 5.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data



Radiation/Conduction	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

### 5.4 Appendix D: Layout of EUT and Support Equipment

#### 5.4.1 General Conducted Test Configuration

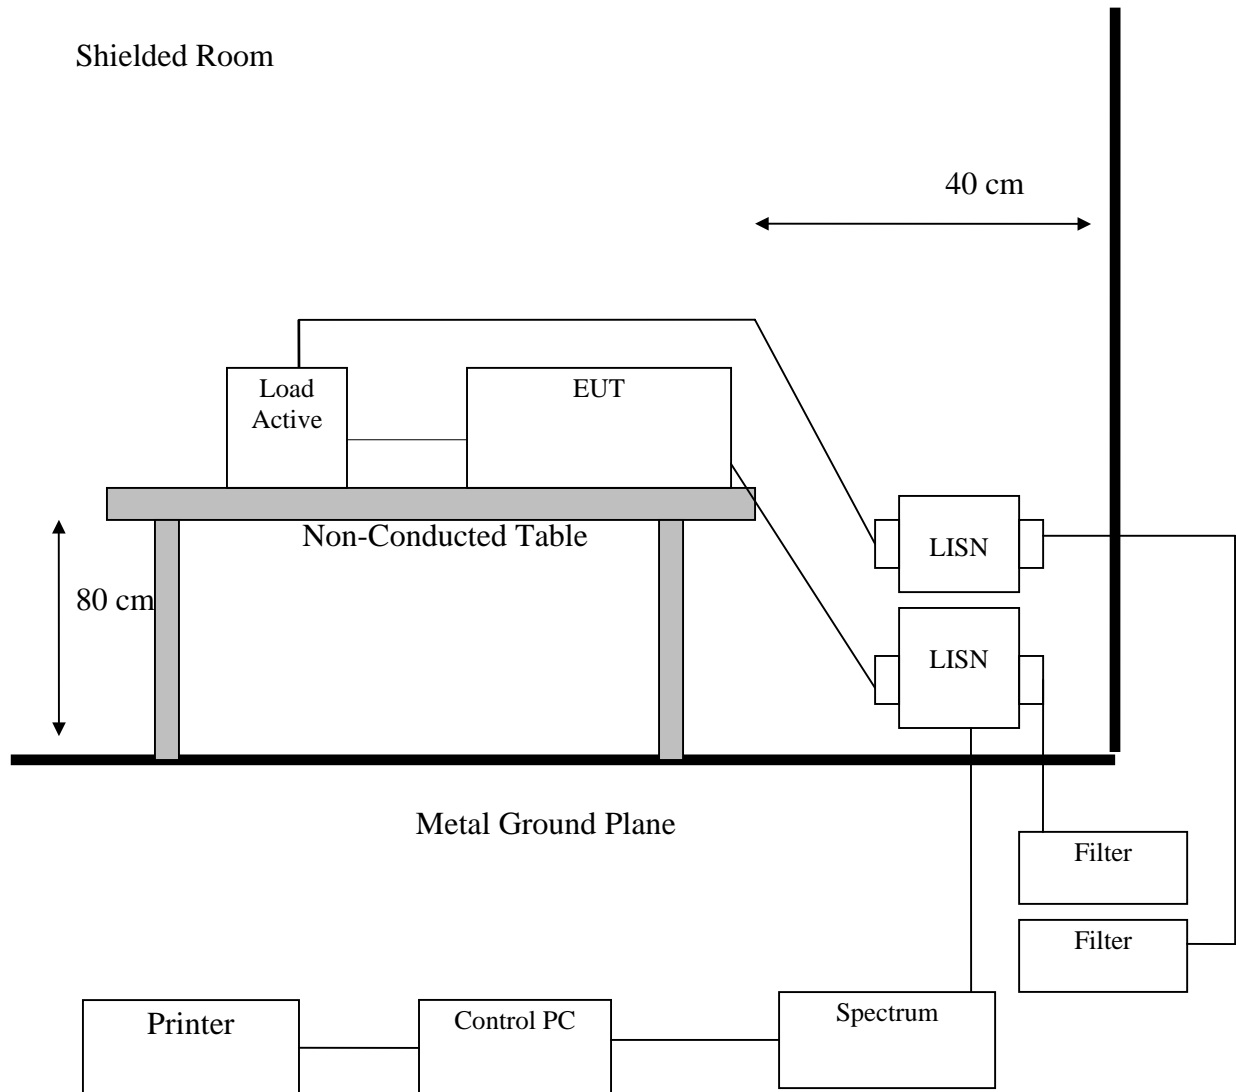

### 5.4.2 General Radiation Test Configuration

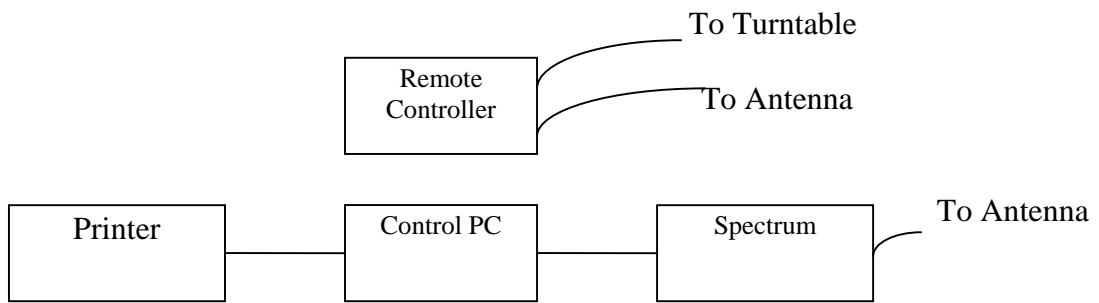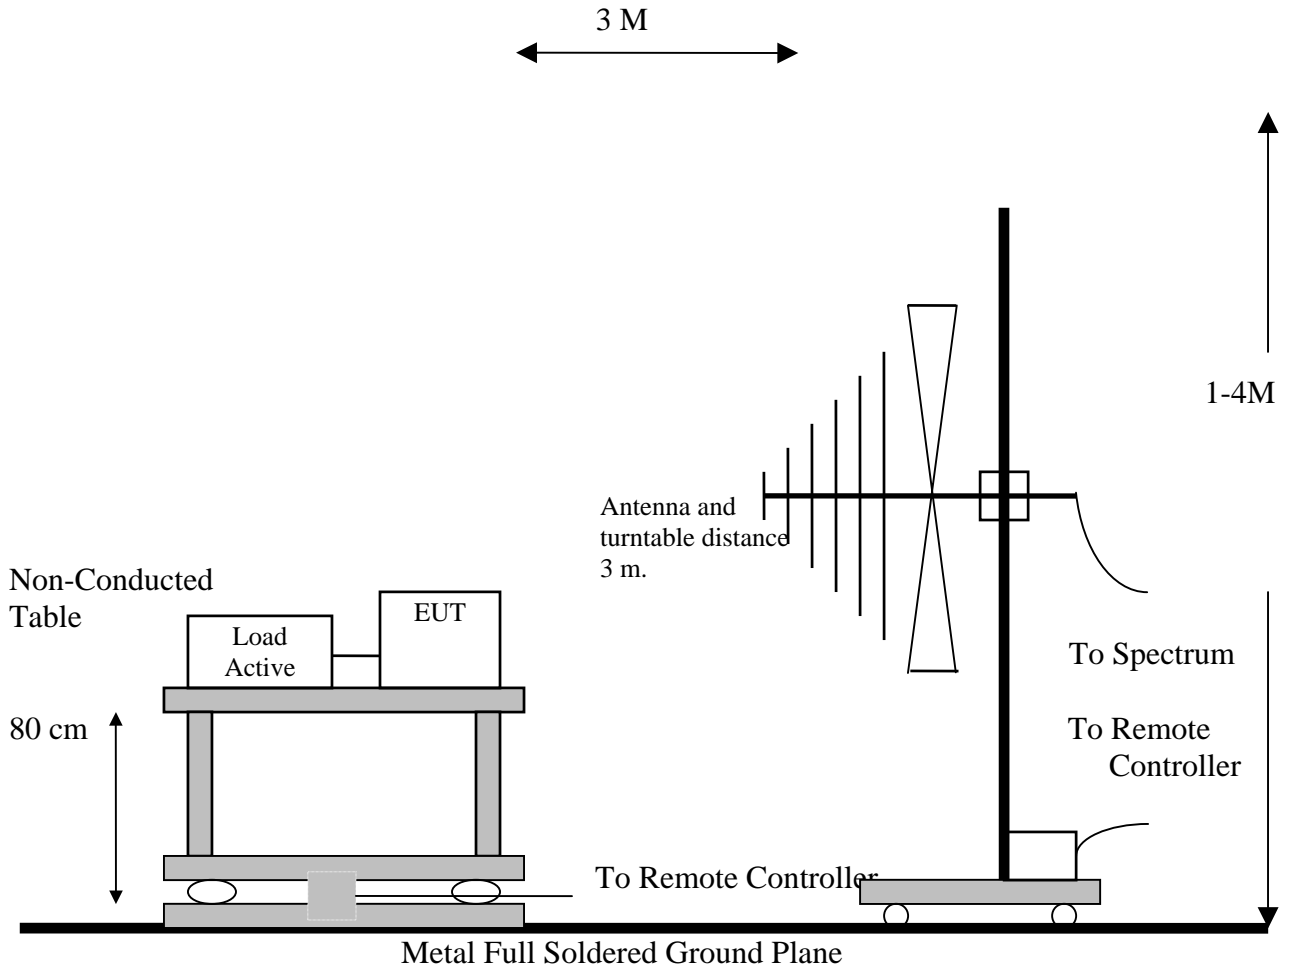

### 5.5 Appendix E: Description of Support Equipment

#### 5.5.1 Description of Support Equipment

#### Support Unit 1.

Description:	DELL USB Mouse
Model Number:	M-UR69
Serial Number:	LNA24412741
Power Supply Type:	N/A
Power Cord:	N/A
FCC ID:	N/A (Comply with FCC DOC)

#### Support Unit 2.

Description:	Philips Monitor
Model:	109P40
Serial Number:	BZ000421172019
Power Cord:	Non-shielded, Detachable
FCC ID:	A3KM092

#### Support Unit 3.

Description:	Notebook Personal Computer
Model No.:	Aspire1510,ZP2,ZP2A
Brand:	acer
AC Power Adapter Manufacturer:	LSE(Model:ADP-90FB REV:F) LSE(Model:0202C1990) LSE(Model:0317A19135) Delta(Model:ADP-90FB REV:F) LiteOn(Model:ADP-135DBB)
HDD:	HGST (Model: IC25N030ATMR04-0)
Modem Card:	Ambit (Model: T60M283.10)
FDD:	Panasonic (Model:UJ-266A343FC)
SDRAM:	Infineon (Model:HYS64D32020GDL-6-B)
1394 C0nnecto	one 4 Pins
USB Connector:	four 4 Pins
RJ11 Connector:	one 2 Pins
RJ45 Connector:	one 8 Pins
VGA Connector:	one 15 Pins
PCMCIA Slot	one
Line out Port:	one
Line-in Port:	one
Parallel Port	one 25pins
DC IN Port:	one
Battery:	Li-ION DC14.8V 4400mAh
LCD:	QSI (Model:QD150XL06-01)
CPU:	AMD Athlon 64 2800+, 3000+, 4000+

**5.5.2 Software for Controlling Support Unit**

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Read and write to the disk drives.
- B. Send H pattern to the video port device (Monitor).
- C. The RF software makes the transmitter continuously sending RF signals
- D. Repeat the above steps.

	Filename	Issued Date
CSR BlueSuite	Bluetest.exe	2004/04/08
Monitor	HH.bat	8/20/1991

**5.5.3 I/O Cable Condition of EUT and Support Units**

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head
Monitor Data Cable	Monitor to PC VGA Port	1.6M	Shielded, Detachable	Metal Head
Mouse Data Cable	Mouse to PC Mouse port	1.8M	Shielded, Un-detachable	Metal Head

**5.6 Appendix F: Accuracy of Measurement**

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
			k	Value	k	Value
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	0.850
<b>7</b>	<b>Total Uncertainty @95% mim. Confidence Level</b>	<b>Normal</b>	<b>k=2</b>	<b>1.701</b>		

Measurement Uncertainty Calculations:

$$Uc(y) = \text{square root} ( u_1 (y)^2 + u_2 (y)^2 + \dots + u_n (y)^2 )$$

$$U = 2 * Uc (y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :  
The treatment of Uncertainty in EMC Measurement.



Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	<b>Total Uncertainty @95% mim. Confidence Level</b>	<b>Normal</b>	<b>k=2</b>	<b>2.059</b>		

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} ( u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2 )$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :  
The treatment of Uncertainty in EMC Measurement.

## 5.7 Appendix G: Photographs of EUT Configuration Test Set Up


The Front View of Highest Conducted Set-up For EUT (Charging Mode)




The Back View of Highest Conducted Set-up For EUT (Charging Mode)



The Front View of Highest Radiated Set-up For EUT

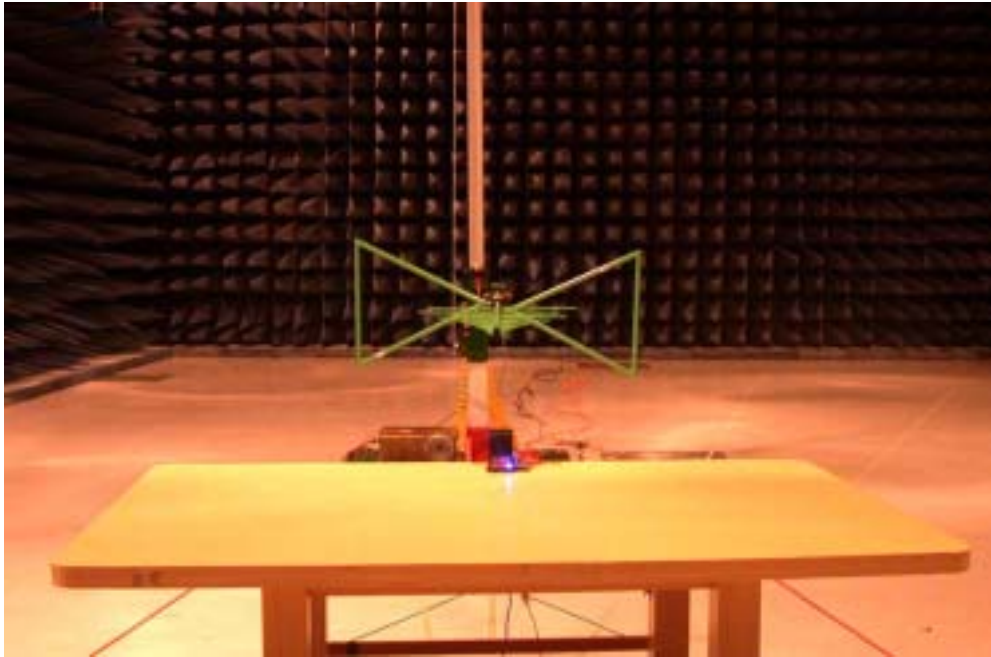

The Back View of Highest Radiated Set-up For EUT

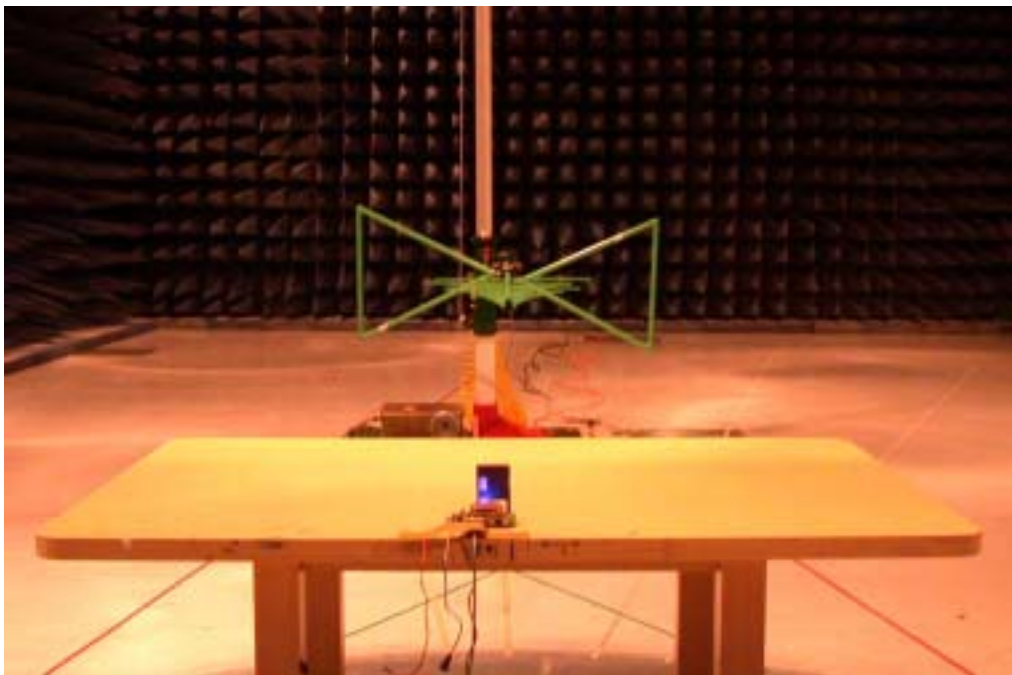

## 5.8 Appendix H: Antenna Spec.

Please refer to the attached file.