

Test Report
FOR
FCC Part 15 Subpart C

of

Notebook Personal Computer
(with PRO/Wireless 2100 LAN 3B Mini PCI Adapter inside,
Model: WM3B2100)

Model:

TravelMate C300 ; MS2140

(Brand:acer)

Applied by:

Wistron Corporation

21F, 88, Sec.1, Hsin Tai Wu Rd.,
Hsichih, Taipei Hsien 221,
Taiwan, R.O.C.



Test Performed by:

(NVLAP Lab. Code: 200234-0)



International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: 03LR014FC

Test Date: 2003/09/06

NVLAP Lab. Code: 200234-0; VCCI: R-1435, C-1440; NEMKO Aut. No: ELA 113; BSMI Lab. Code: SL2-IN-E-0013

Contents of Report

- 1. General 1
 - 1.1 Certification of Accuracy of Test Data..... 1
 - 1.2 Test Results Summary..... 2
 - 1.3 Description of Equipment Under Test (EUT) 3
 - 1.4 Test Standards and Procedure 5
 - 1.5 General Test Conditions 5
- 2. Powerline Conducted Emissions [Section 15.207]6
 - 2.1 EUT Configuration..... 6
 - 2.2 Test Procedure 6
 - 2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... 6
 - 2.4 Test Data:..... 7
- 3. Bandwidth for DSSS [Section 15.247 (a)(2)].....9
 - 3.1 Test Procedure 9
 - 3.2 Test Setup 9
 - 3.3 Test Data..... 9
- 4. DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 13
 - 4.1 Test Procedure 13
 - 4.2 Test Setup 13
 - 4.3 Test Data:..... 13
- 5. Radiated Emission Measurement [Section [15.247(c)(4)] 14
 - 5.1 EUT Configuration..... 14
 - 5.2 Test Procedure 14
 - 5.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... 14
 - 5.4 Test Data (30MHz – 1GHz) :..... 15
 - 5.5 Test Data (1GHz – 25 GHz, Transmitting from Main antenna) 16
- 6. Band Edge Measurement 19
 - 6.1 Test Procedure (Conducted)..... 19
 - 6.2 Test Setup (Conducted)..... 19
 - 6.3 Test Data:..... 19
 - 6.4 Band Edge measurement Test Procedure (Radiated)..... 22
 - 6.5 Test Setup (Radiated) 22
 - 6.6 Test Data:..... 23
- 7. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 28
- 8. DSSS Peak Power Spectral Density [Section 15.247(d)]..... 29
 - 8.1 Test Procedure 29
 - 8.2 Test Setup 29
 - 8.3 Test Data:..... 29

9. Appendix 33

9.1 Appendix A: Measurement Procedure for Power-line Conducted Emissions..... 33

9.2 Appendix B: Test Procedure for Radiated Emissions..... 34

9.3 Appendix C: Test Equipment..... 35

9.3.1 Test Equipment List..... 35

9.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data..... 36

9.4 Appendix D: Layout of EUT and Support Equipment..... 37

9.4.1 General Conducted Test Configuration 37

9.4.2 General Radiation Test Configuration..... 38

9.5 Appendix E: Description of Support Equipment 39

9.5.1 Description of Support Equipment 39

9.5.2 Software for Controlling Support Unit 39

9.5.3 I/O Cable Condition of EUT and Support Units 40

9.6 Appendix F: Accuracy of Measurement..... 41

9.7 Appendix G: Photographs of EUT Configuration Test Set Up 43

9.8 Appendix H: Antenna Spec..... 45

1. . General

1.1 Certification of Accuracy of Test Data

The electromagnetic interference tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the test procedure specified in CFR 47 Part 15 Subpart C (Section 15.247) , and ANSI C63.4 Rules.

The test results contained in this report accurately represent the measurements of the EMC characteristics and the energy generated by sample equipment under test at the time of the test.

Equipment Tested: Notebook Personal Computer, *Model:* Travelmate C300 ; MS2140
(With PRO/Wireless 2100 LAN 3B Mini PCI Adapter inside,
Model: WM3B2100)
Applied by: Wistron Corporation

Sample received Date: 2003/08/20

Final test Date : 2003/09/05

Test Site: Chamber 02, Conduction 02

Temperature 25°C(Conduction Test); 35°C (Radiation Test)
Humidity: 53% (Conduction Test); 68% (Radiation Test)

Test Engineer: Jerry Chiou

The results show that the sample equipment tested as described in this report is in compliance with the Class B conducted and radiated emission limits of FCC Rules Part 15 Subpart B, and the limit of Part Subpart C Sec. 15.247.

Approve & Signature



Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 48 pages, including 1 cover page , 2 contents page, and 45 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

1.2 Test Results Summary

The 802.11b functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	See SAR report
15.247 (d)	Power Spectral Density	Pass	

1.3 Description of Equipment Under Test (EUT)

Description:	Notebook Personal Computer
Brand:	Acer
Condition:	Pre-Production
Model:	Travelmate C300 ; MS2140
FCC ID	PU5MS2140B
Serial Number:	N/A
Adapter Type:	Liteon 70W(Model:PA-1700-02) 3pins
SDRAM:	Nanya 128MB (Model: NT128D64SH4BBGM-6K)
Hard Disk Driver:	HGST 20G (Model: IC25N020ATMR04-0)
DVD-ROM:	MKE (Model: SR-8177-BAA3) or Liteon (Model: XJ-SD081D)
CD-ROM:	Mitsumi (Model: SR244W1 A6) or
Combo:	Sony (Model: CRX-830) or QSI (Model: SBW-242U) or Pioneer (Model: DVR-K12D)
FDD Driver:	Y-E Data(Model:YD-8U10) (Optional module)
Wireless LAN Card:	Intel 802.11b (Model: WM3B2100)
Modem Module:	Ambit (Model: T60M283.10)
Battery:	Sanyo 8 cell Li+ (Model:BTP-63D1)
Power In Port:	one
USB Port:	two 4-pin (USB 2.0)
VGA Port:	one
TV-Out Port	one
1394 Connector:	one 4-pin
Line Out Port:	one
Line In Port:	one
LAN Connector:	one 8-pin (10Mbps/100Mbps)
Modem Connector:	one
PCMCIA:	one
Mini-PCI:	one
Port Replicator:	one 100-pin
Power Cord:	Shielded
LCD:	CMO 14.1" XGA (Model: CHIME/N141X9-L01) or AU 14.1" XGA (Model: B141XG08)

Frequency Range: 2412 - 2462 MHz
Support channel: 11 Channels
Modulation Skill: DBPSK(1Mbps), DQPSK(2Mbps),
CCK(5.5/11Mbps)
Antennas Type: PIFA Type in Metal
made by Wistron NeWeb Corp.
Antenna Connected: Connected to RF connector on the PCB of the
802.11b WLAN Adapter. The user is not possible
to change the antenna without disassembling the
notebook computer.

Antenna peak Gain: 2.89 dBi
Power Type of LAN module: 3.3V DC from Notebook Computer

The EUT is a notebook computer with a 802.11b WLAN inside, and it has two model names for marketing . These two model names are Travelmate C300 and MS2140.

The 802.11b WLAN has 11 channels for communication.
The channel and the operation frequency of 802.11b is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

1.4 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart B and/or CISPR 22/EN55022, RSS210

Test Procedure: ANSI C63.4, CFR 47 Sec. 15.247 as detailed in Appendices

1.5 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99% (maximum allowed).
2. The channel 1, 6, 11 of of 802.11b of EUT were all tested.

2. Powerline Conducted Emissions [Section 15.207]

2.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

2.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.


2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

2.4 Test Data:


Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.2085	0.10	0.02	49.88	64.33	-14.45	39.51	54.33	-14.82
0.27938	0.10	0.02	47.65	62.30	-14.65	43.58	52.30	-8.72
0.34856	0.10	0.02	44.79	60.33	-15.53	37.91	50.33	-12.41
0.41718	0.10	0.03	44.39	58.37	-13.98	41.24	48.37	-7.13
0.55526	0.13	0.03	40.72	56.00	-15.28	36.21	46.00	-9.79
1.87766	0.24	0.10	37.09	56.00	-18.91	33.08	46.00	-12.92
2.08653	0.20	0.10	37.29	56.00	-18.71	33.12	46.00	-12.88
2.22304	0.21	0.10	36.61	56.00	-19.39	32.54	46.00	-13.46
2.92072	0.25	0.11	35.97	56.00	-20.03	31.66	46.00	-14.34
4.49831	0.32	0.12	35.34	56.00	-20.66	33.50	46.00	-12.50

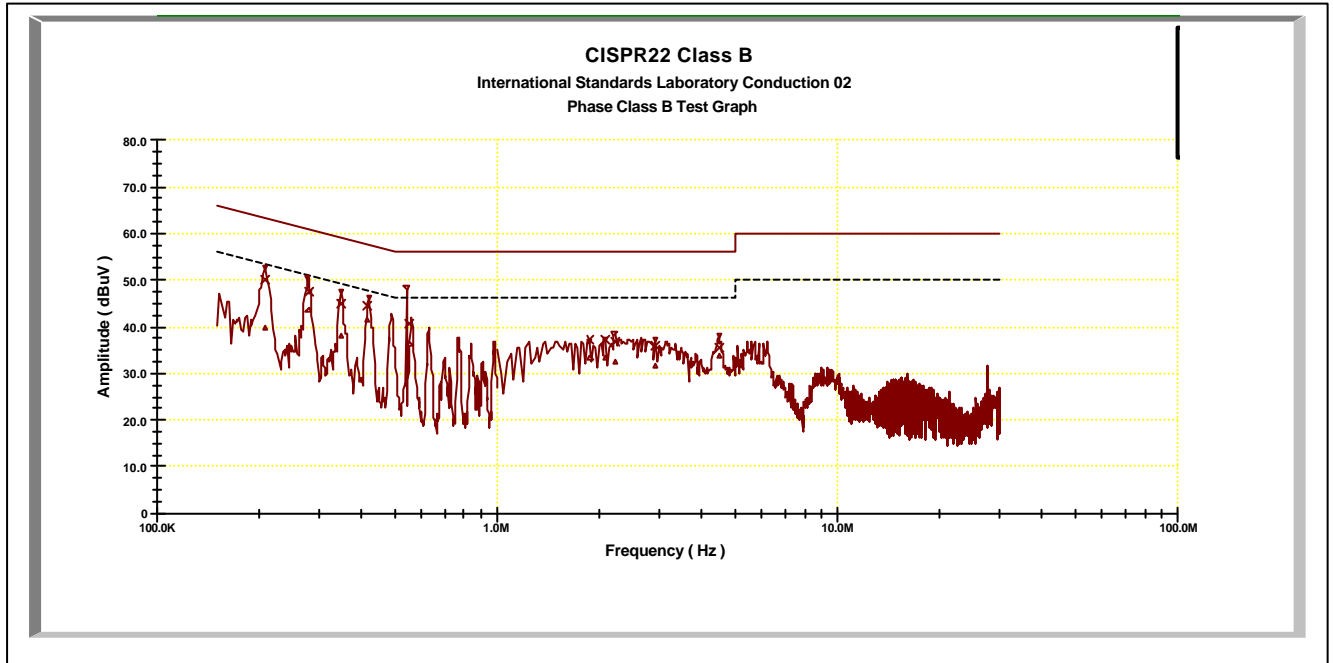

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.20921	0.10	0.02	51.66	64.31	-12.65	42.07	54.31	-12.24
0.27896	0.10	0.02	47.07	62.32	-15.25	41.51	52.32	-10.81
0.3455	0.10	0.02	42.94	60.41	-17.47	37.72	50.41	-12.69
0.41976	0.10	0.03	41.93	58.29	-16.36	35.86	48.29	-12.43
0.48885	0.11	0.03	41.29	56.32	-15.02	36.54	46.32	-9.77
1.67504	0.23	0.09	30.05	56.00	-25.95	24.37	46.00	-21.63
1.87576	0.21	0.10	35.28	56.00	-20.72	32.94	46.00	-13.06
2.01708	0.20	0.10	37.44	56.00	-18.56	33.83	46.00	-12.17
2.43506	0.20	0.10	37.11	56.00	-18.89	34.08	46.00	-11.92
2.71244	0.20	0.11	37.37	56.00	-18.63	33.74	46.00	-12.26

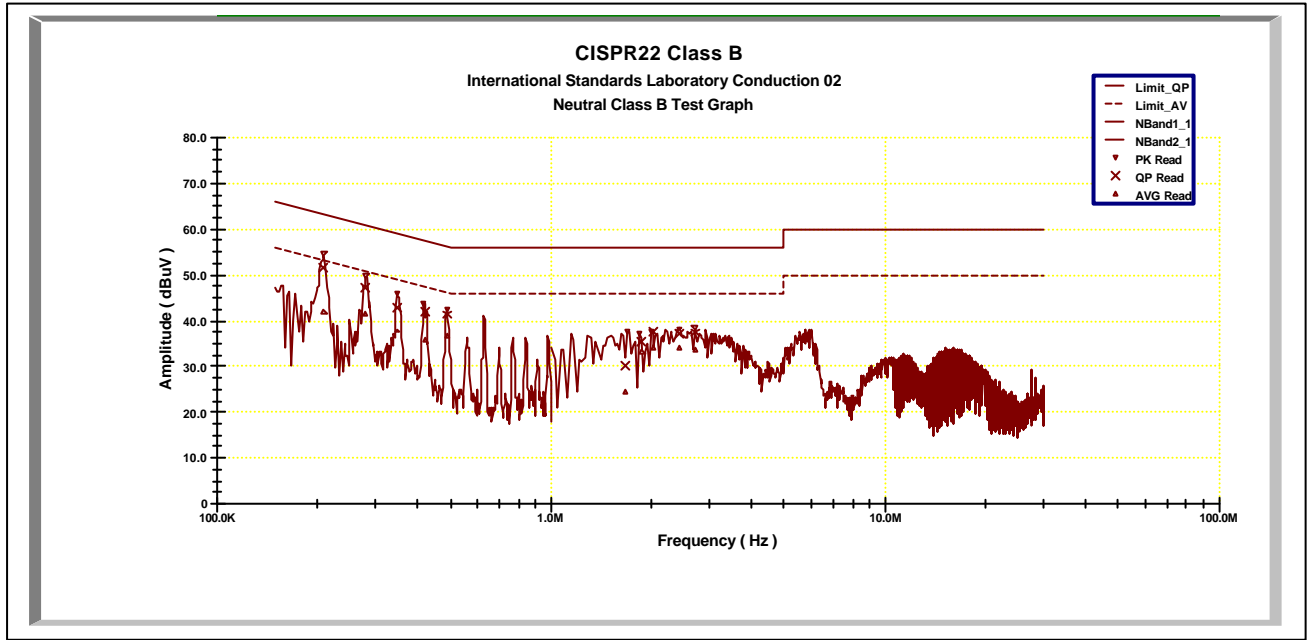

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


3. Bandwidth for DSSS [Section 15.247 (a)(2)]

3.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer through an attenuator. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz


3.2 Test Setup

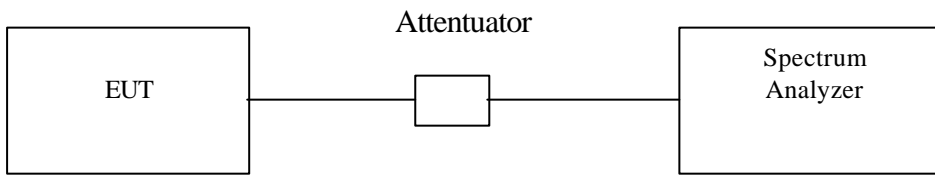



3.3 Test Data

Table 6dB Bandwidth

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	11.92	0.5	Pass
6	2437	12.32	0.5	Pass
11	2462	11.88	0.5	Pass

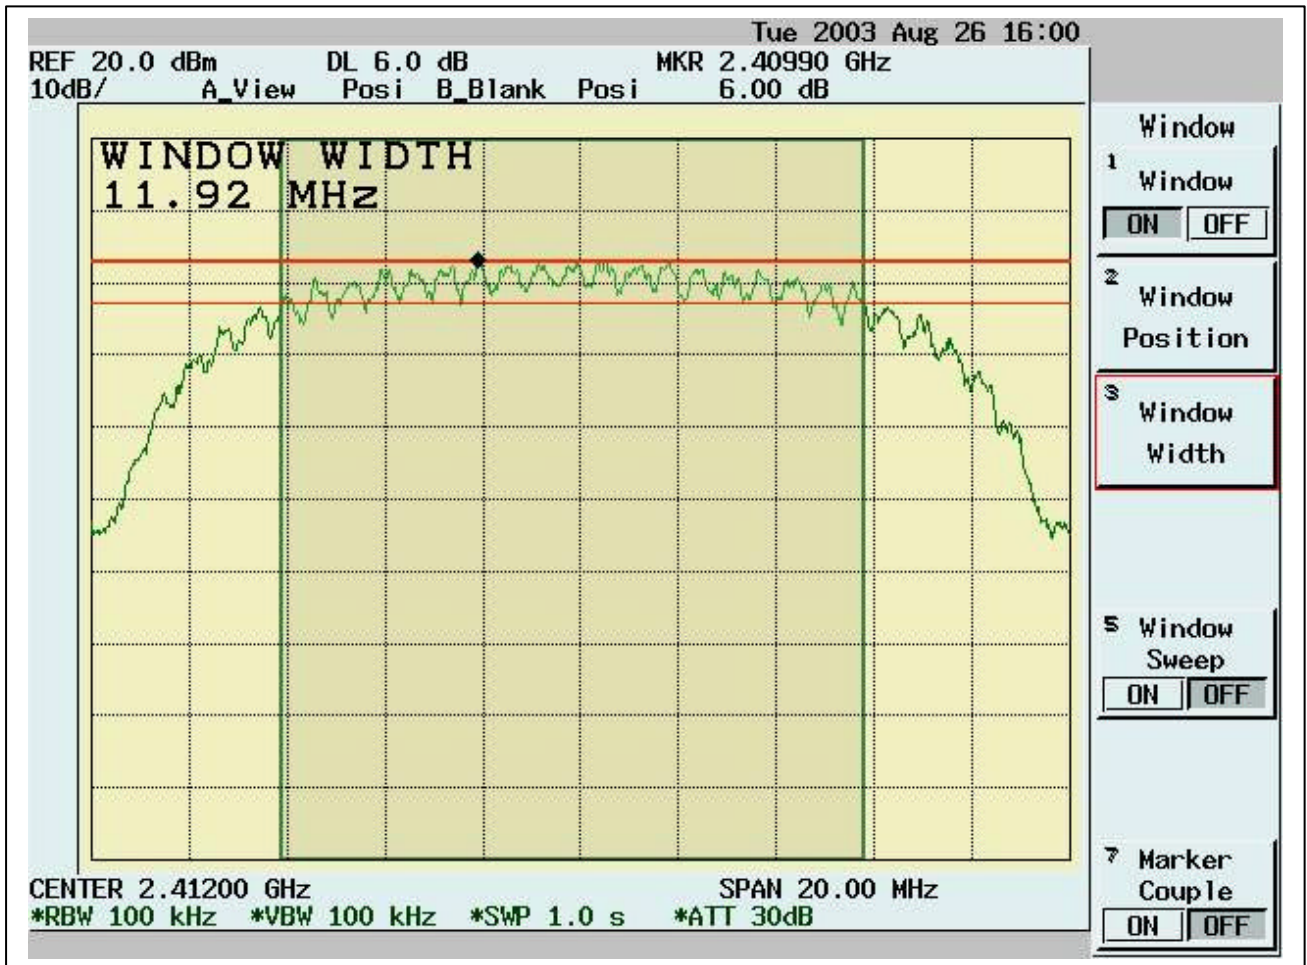

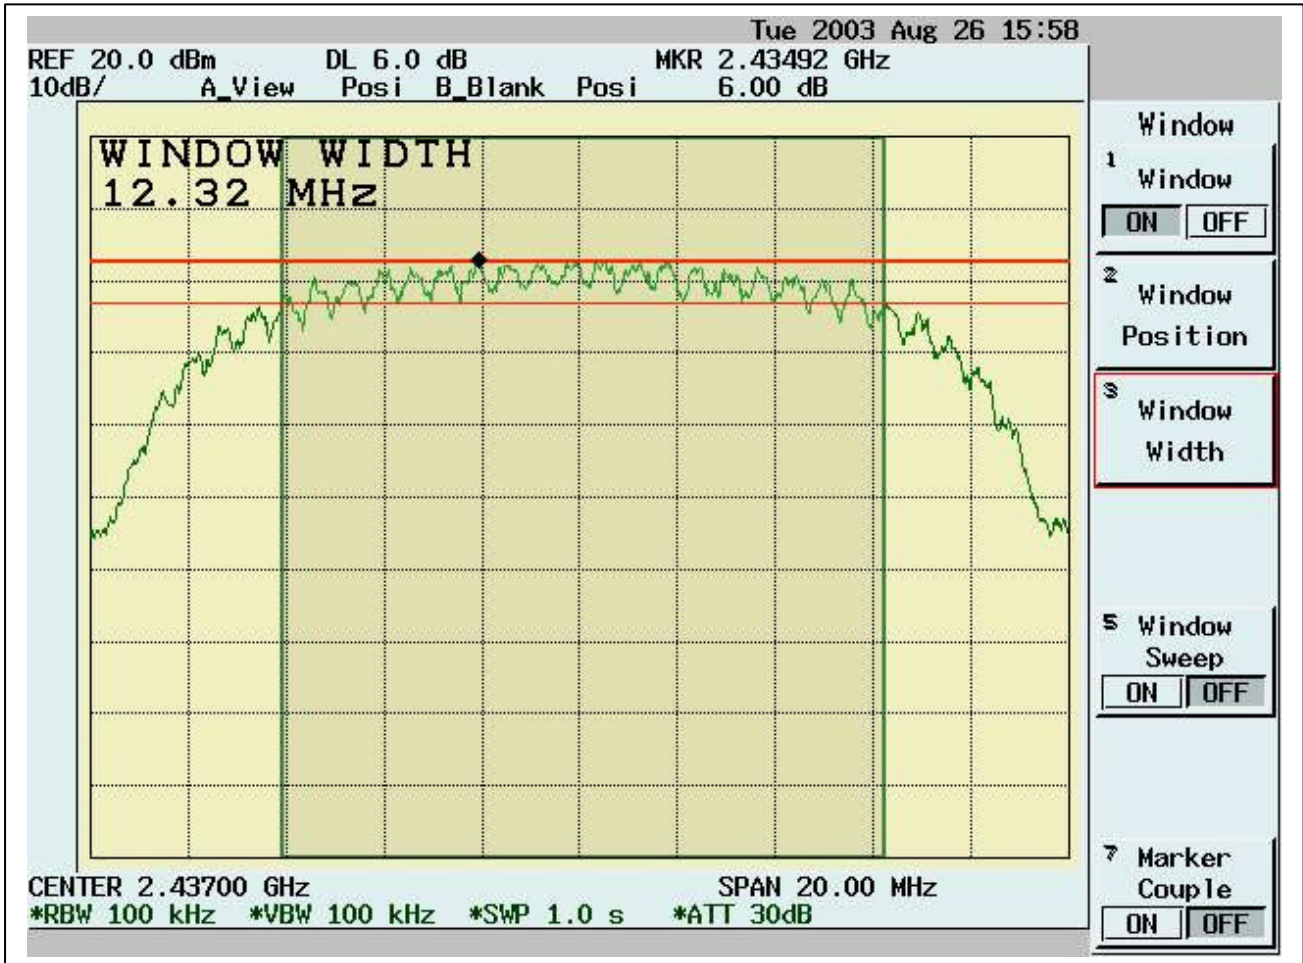

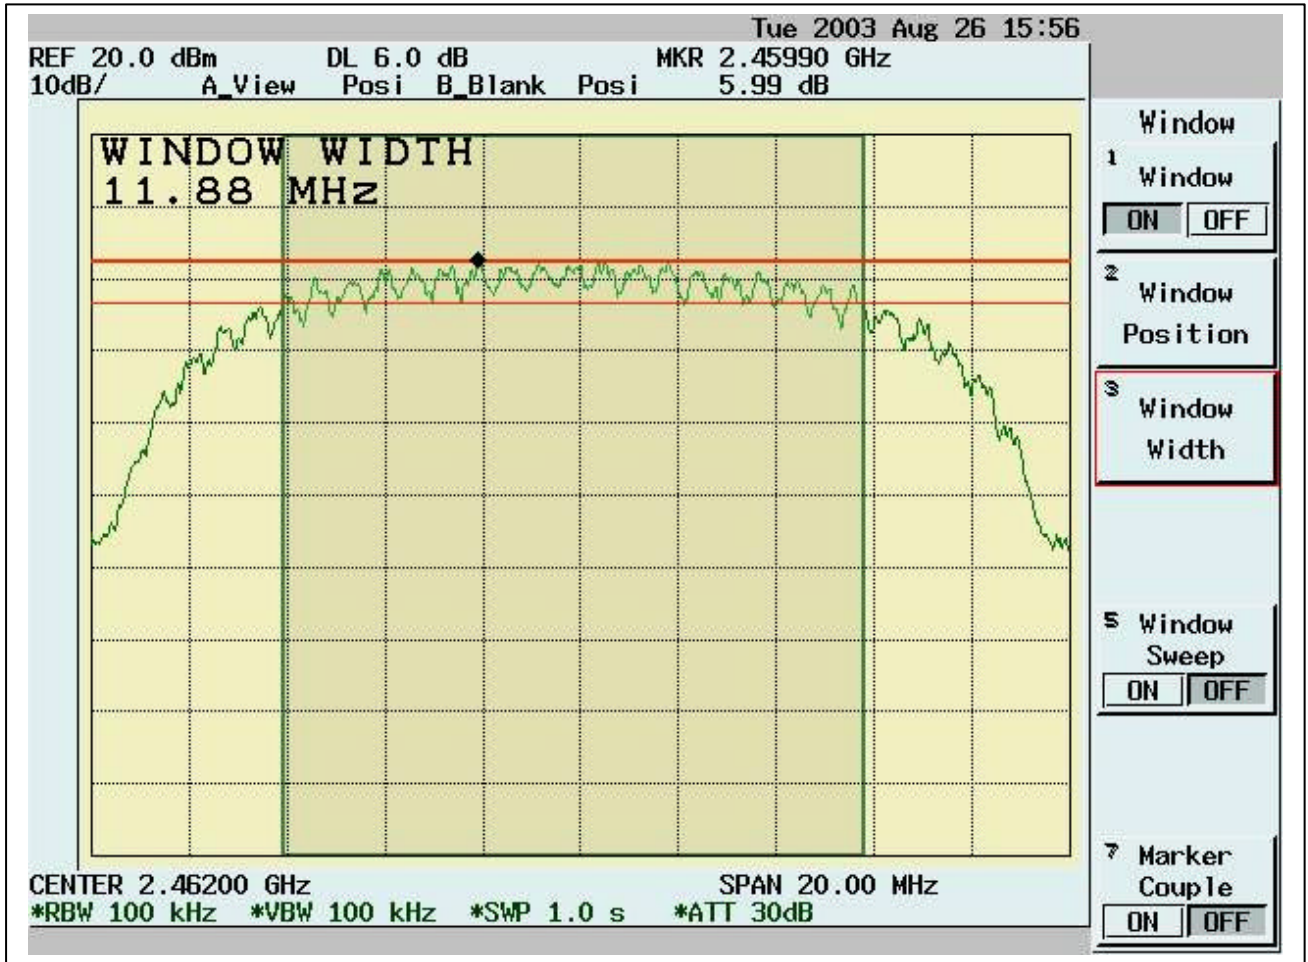


4. DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.1 Test Procedure

1. The Transmitter output of EUT was connected to the peak power analyzer through an attenuator.

4.2 Test Setup

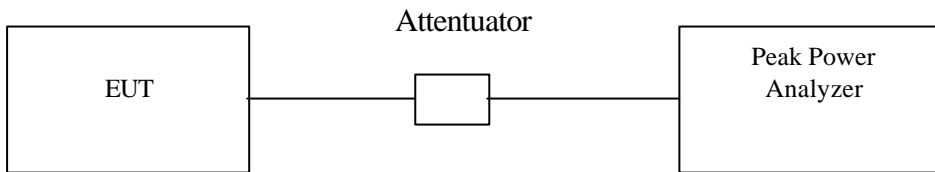

4.3 Test Data:

Maximum Peak Output Power

Channel	Frequency (MHz)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	28.38	14.53	30	Pass
6	2437	25.29	14.03	30	Pass
11	2462	20.09	13.03	30	Pass

5. Radiated Emission Measurement [Section [15.247(c)(4)]

5.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
79.47	24.99	6.69	2.52	0	34.2	40	-5.8	249	9
233.7	25.84	10.27	3.35	0	39.46	46	-6.54	249	25
352.04	23.25	14.34	3.73	0	41.32	46	-4.68	200	201
455.83	18.9	16.43	4.16	0	39.49	46	-6.51	149	285
623.64	16.29	19	4.52	0	39.81	46	-6.19	149	268
735.19	14.78	19.73	5.08	0	39.59	46	-6.41	100	267
768.17	17.28	19.9	5.07	0	42.25	46	-3.75	100	202
944.71	17.16	20.85	5.65	0	43.66	46	-2.34	200	346

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
77.53	25.26	6.31	2.46	0	34.03	40	-5.97	150	88
129.91	24.53	11.1	2.81	0	38.44	43.5	-5.06	150	40
233.7	28.8	10.27	3.35	0	42.42	46	-3.58	100	187
352.04	23.83	14.34	3.73	0	41.9	46	-4.1	399	276
698.33	17.26	18.97	4.8	0	41.03	46	-4.97	250	185
719.67	15.5	19.39	4.87	0	39.76	46	-6.24	399	243
764.29	17.01	19.9	5.18	0	42.09	46	-3.91	300	123
944.71	14.58	20.85	5.65	0	41.08	46	-4.92	100	9

* NOTE:

During the test, the EUT was set to Channel 1, 6, 11 respectively to get the maximum reading of all the critical emission frequencies.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.5 Test Data (1GHz – 25 GHz, Transmitting from Main antenna) .

1GHz~ 25 GHz (Horizontal), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
2392.61	55.52 (pk)	30.54	1.14	46.21	41.00	54(av)	-13.00	102	189
3275.72	45.59 (pk)	31.13	1.44	46.62	31.54	54(av)	-22.46	101	190
3445.55	45.52 (pk)	31.33	1.50	46.64	31.71	54(av)	-22.29	100	190
7623.38	37.36 (pk)	39.84	2.43	45.51	34.12	54(av)	-19.88	100	11
7963.04	32.38 (pk)	41.07	2.49	43.92	32.01	54(av)	-21.99	100	265

'pk' ---- peak, 'av' ----average

1GHz~ 25 GHz (Vertical), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
2290.71	44.96 (pk)	30.58	1.11	46.21	30.45	54(av)	-23.55	101	142
2409.59	56.52 (pk)	30.54	1.15	46.21	42.00	54(av)	-12.00	100	76
3275.72	45.66 (pk)	31.13	1.44	46.62	31.62	54(av)	-22.38	103	187
7572.43	38.58 (pk)	39.66	2.42	45.75	34.91	54(av)	-19.09	100	280
8863.14	28.88 (pk)	40.56	2.65	42.75	29.35	54(av)	-24.65	100	65

'pk' ---- peak, 'av' ----average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -
Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3275.72	45.62 (pk)	31.13	1.44	46.62	31.57	54(av)	-22.43	100	220
7827.17	33.28 (pk)	40.58	2.47	44.56	31.77	54(av)	-22.23	100	250
7878.12	34.32 (pk)	40.76	2.48	44.32	33.24	54(av)	-20.76	100	290
8251.75	29.99 (pk)	41.10	2.54	43.11	30.53	54(av)	-23.47	101	306
11478.5	26.45 (pk)	42.32	3.02	41.54	30.24	54(av)	-23.76	100	23

'pk' ---- peak, 'av' ----average

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin*	Height (cm)	Position (°)
3241.76	45.40 (pk)	31.09	1.43	46.61	31.30	54(av)	-22.70	101	56
7895.1	33.45 (pk)	40.82	2.48	44.24	32.51	54(av)	-21.49	100	143
8047.95	31.46 (pk)	41.18	2.51	43.63	31.52	54(av)	-22.48	100	12
11342.7	26.63 (pk)	41.80	3.00	41.25	30.19	54(av)	-23.81	103	280
13686.3	26.53 (pk)	42.27	3.32	42.17	29.96	54(av)	-24.04	100	37

'pk' ---- peak, 'av' ----average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -

Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3071.93	45.70 (pk)	30.89	1.37	46.59	31.37	54(av)	-22.63	100	26
3326.67	45.31 (pk)	31.19	1.46	46.63	31.34	54(av)	-22.66	100	31
6995	32.36 (pk)	39.97	2.32	46.31	28.34	54(av)	-25.66	100	14
7861.14	33.41 (pk)	40.70	2.47	44.40	32.19	54(av)	-21.81	100	276
11461.5	26.80 (pk)	42.25	3.02	41.51	30.57	54(av)	-23.43	100	32

'pk' ---- peak, 'av' ----average

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
3275.72	47.29 (pk)	31.13	1.44	46.62	33.24	54(av)	-20.76	100	94
3377.62	44.03 (pk)	31.25	1.47	46.63	30.12	54(av)	-23.88	100	220
7045.95	31.98 (pk)	39.94	2.33	46.29	27.97	54(av)	-26.03	100	28
7912.09	29.81 (pk)	40.88	2.48	44.16	29.02	54(av)	-24.98	103	298
8234.76	27.88 (pk)	41.11	2.54	43.15	28.37	54(av)	-25.63	100	29

'pk' ---- peak, 'av' ----averag

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


All frequencies from 1GHz to 25 GHz have been tested.

6. Band Edge Measurement

6.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
 Sweep time= 200ms sec.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

6.2 Test Setup (Conducted)

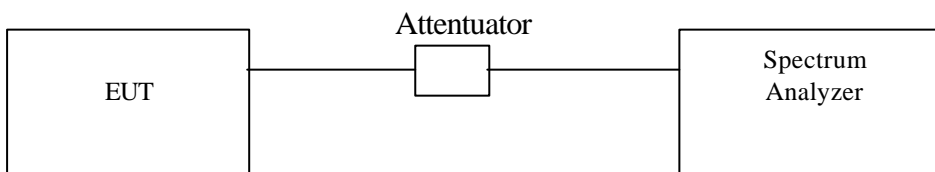

6.3 Test Data:


Table Band Edge measurement (Conducted)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: > 20dB (dB)	Pass/Fail
1	2409.9	109.43	---	---
Outside band	2396.9	76.21	33.22	Pass
11	2459.9	108.94	---	---
Outside band	2473.0	79.87	29.07	Pass

Band Edge Conducted measurement



Band Edge Conducted Measurement

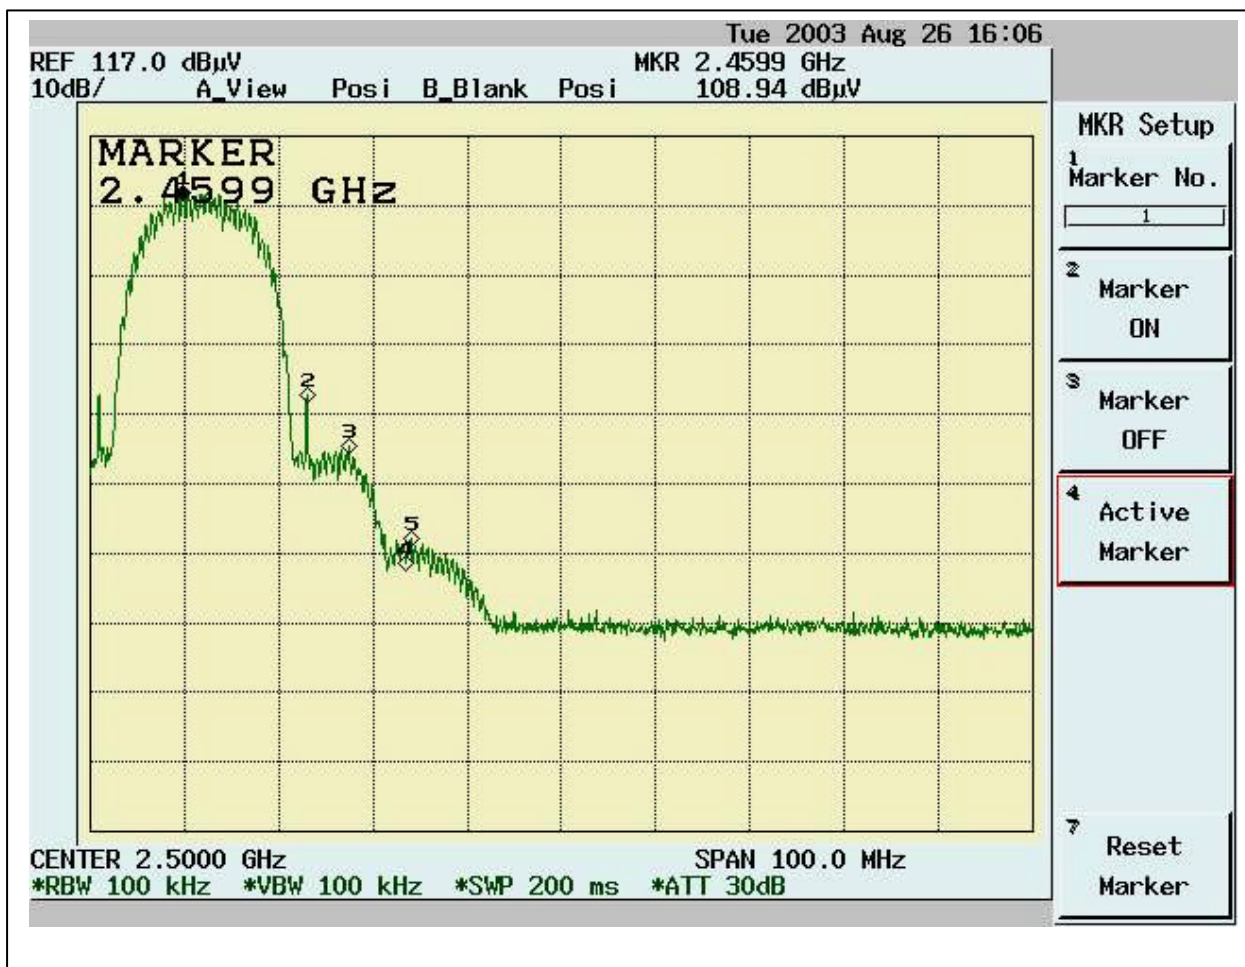

6.4 Band Edge measurement Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as *Radiated Emission Measurement*
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

6.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

6.6 Test Data:

Table Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit: > 20dB (dBC)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2413.2	70.20	31.67	101.87	---	---	1MHz	---
Outside band	2397.2	34.84	31.67	66.51	35.36	---	1MHz	Pass
1(average mode)	2412.5	61.38	31.67	93.05	---	---	10Hz	---
Restricted band	2390.0	12.57	31.67	44.24	-----	54	10Hz	Pass
11(peak mode)	2463.7	66.59	31.64	98.23	----	---	1MHz	---
Outside band	2473.1	34.10	31.64	65.74	32.49	---	1MHz	Pass
11(average mode)	2462.5	58.66	31.64	90.30	----	---	10Hz	---
Restricted band	2483.5	9.19	31.64	40.83	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 11)



7. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]


Please see the SAR report

8. DSSS Peak Power Spectral Density [Section 15.247(d)]

8.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
 Cable loss=1.13dB
2. Using Peak Search to read the peak power after Maximum Hold function is completed.


8.2 Test Setup

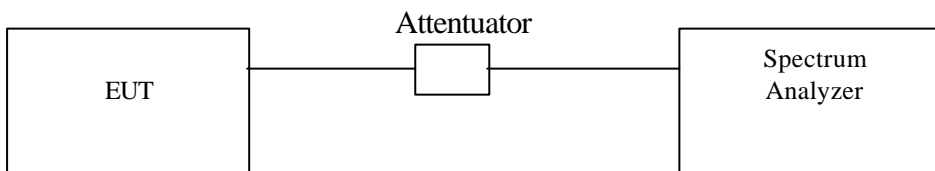



8.3 Test Data:

Table Maximum Peak Output Power Density

Chennel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412.5	-5.01	1.13	-3.88	8	Pass
6	2437.5	-5.09	1.13	-3.96	8	Pass
11	2462.5	-5.53	1.13	-4.40	8	Pass

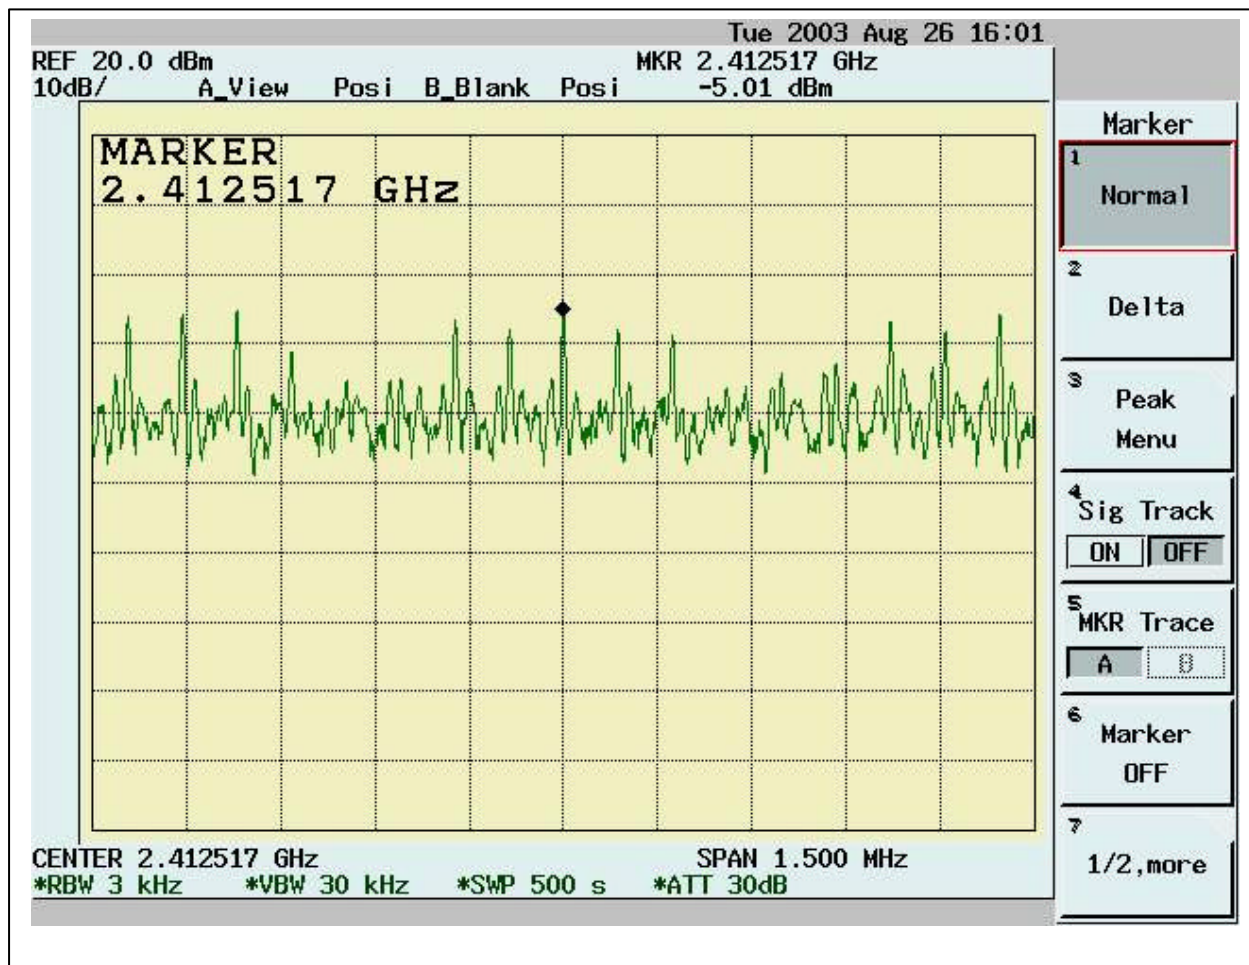

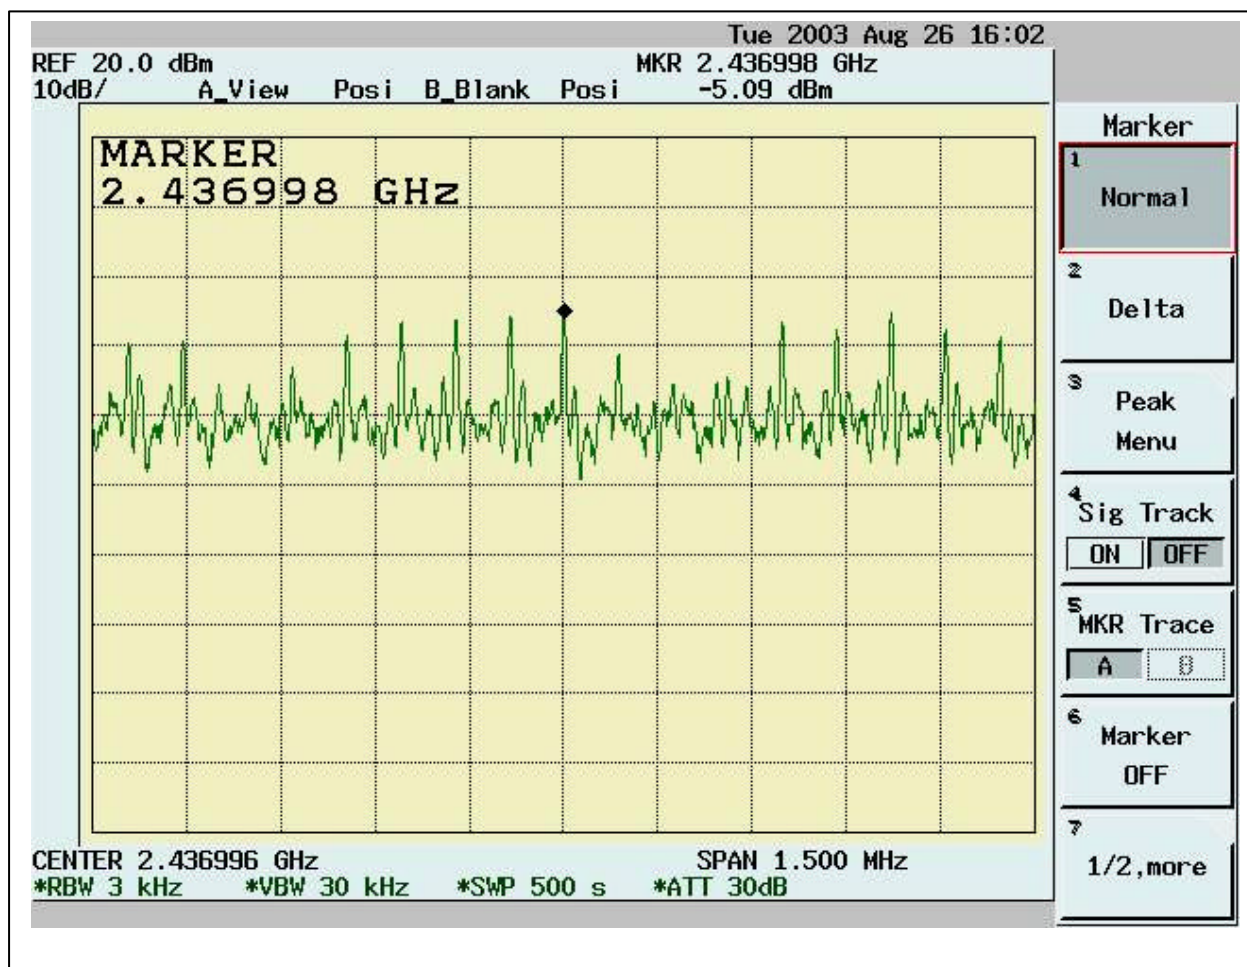

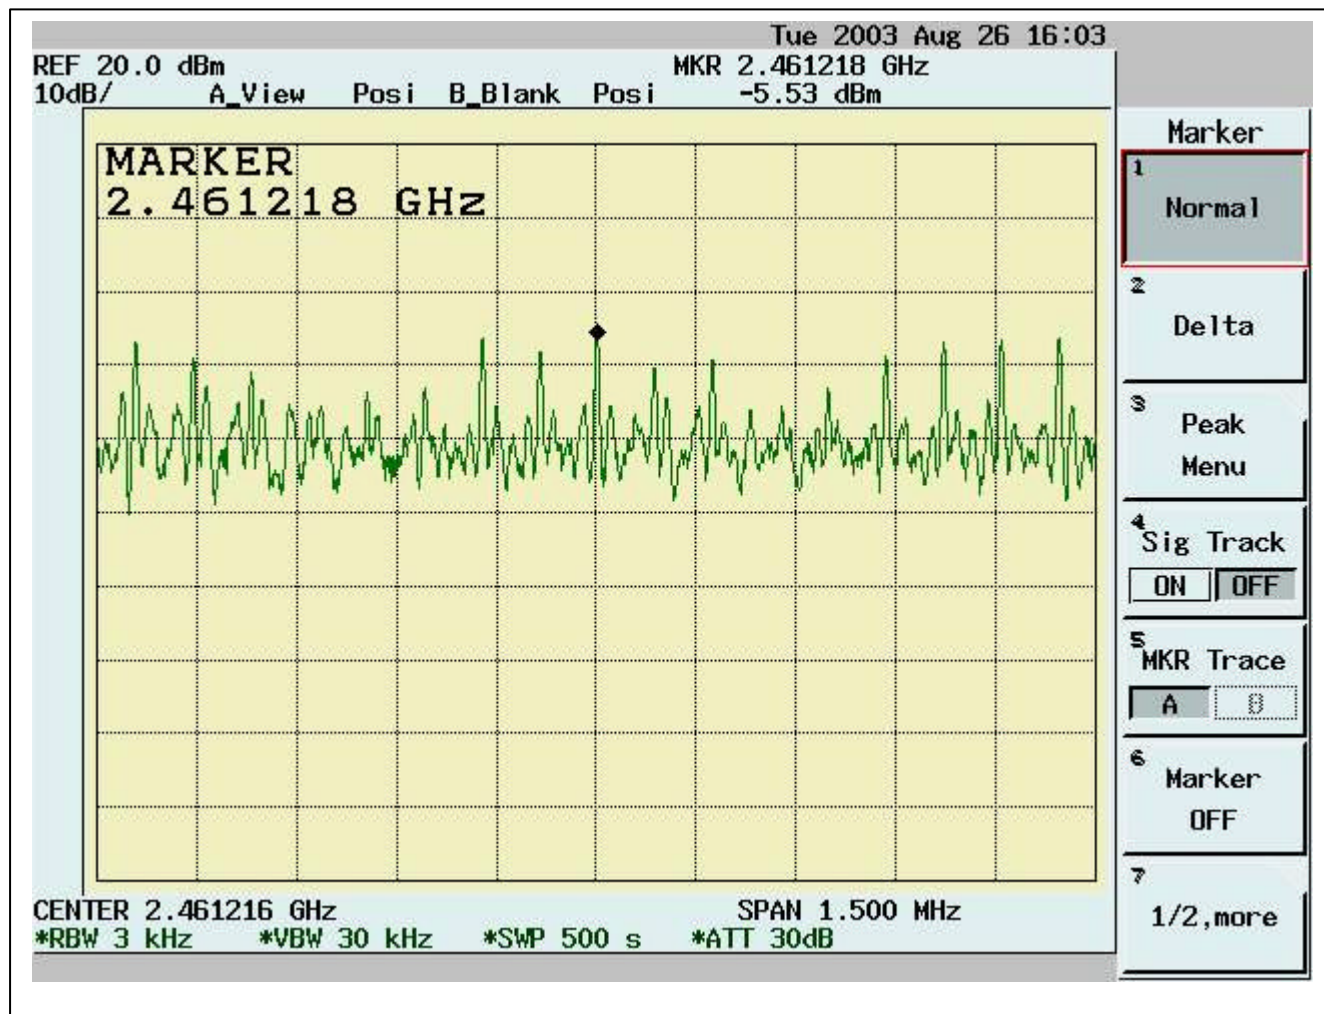

9. Appendix

9.1 Appendix A: Measurement Procedure for Power-line Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the Figure 1 of the ANSI C63.4-2001 or CISPR16. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

9.2 Appendix B: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

9.3 Appendix C: Test Equipment

9.3.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	50 Ohms Load Conduction 02	EMCO	N/A	ISL-50ohms conduction 02	11/21/2002	11/21/2003
Conduction	Coaxial Cable 1F-C2	Harbourindustries	RG400	1F-C2	06/03/2003	06/03/2004
Conduction	Digital Hygro-Thermometer Conduct	MicroLife	HT-2126G	ISL-Conduction02	12/16/2001	12/16/2003
Conduction	EMI Receiver 02	HP	85460A	3448A00183	08/21/2003	08/21/2004
Conduction	ISN T4	Schaffner	ISN T400	16593	08/20/2002	08/20/2004
Conduction	LISN 01	R&S	ESH2-Z5	890485/013	05/07/2003	05/07/2004
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874/D10	10/31/2002	10/31/2003
Radiation	Spectrum Analyzer 06	Advantest	R3162	91700295	09/25/2002	09/24/2003
Radiation	EMI Receiver 05	AFJ	ER 55CR	55390143234	11/07/2002	11/07/2003
Radiation	BILOG Antenna 08	Schaffner	CBL6112B	2756	06/04/2003	06/04/2004
Radiation	Microwave Cable Chmb 02 3M	HUBER+SUHNER AG.	Sucoflex 103	42731/3 & 42729/3	03/21/2003	03/21/2004
Radiation	Coaxial Cable Chmb 02-10M	Belden	RG-8/U	Chmb 02-10M	01/14/2003	01/14/2004
Radiation	Digital Hygro-Thermometer Chmb 02	MicroLife	HT-2126G	Chmb 02	02/07/2003	02/07/2004
Rad. Above 1Ghz	Horn Antenna 02	Com-Power	AH-118	10088	02/25/2003	02/25/2004
Rad. Above 1Ghz	Horn Antenna 04	Com-Power	AH-826	081-001	10/17/2002	10/17/2003
Rad. above 1Ghz	Horn Antenna 05	Com-Power	AH-640	100A	09/13/2001	09/13/2003
Rad. above 1Ghz	Microwave Cable Chmb 05	HUBER+SUHNER AG.	Sucoflex 103	42726/3 & 42727/3	09/11/2002	09/11/2003
Rad. Above 1Ghz	Preamplifier 02	MITEQ	AFS44-00102 650-40-10P-44	728229	05/07/2003	05/07/2004
Rad. Above 1Ghz	Preamplifier 09	MITEQ	AFS44-00102 650-40-10P-44	858687	02/28/2003	02/28/2004

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
RF	Peak Power Analyzer	HP	8990A	3621A01269	09/12/2002	09/12/2003
Rad. Above 1Ghz	Preamplifier 10	MITEQ	JS-26004000-27-5A	818471	02/28/2002	02/28/2004
Rad. Above 1Ghz	Signal Generator 03	Anritsu	MG3642A	6200162550	02/05/2003	02/05/2004
Rad. Above 1Ghz	Signal Generator 04	Anritsu	MG3692A	020311	02/06/2002	02/06/2004
Rad. Above 1Ghz	Spectrum Analyzer 07	Advantest	R3182	110600649	10/17/2002	10/17/2003


Note: Calibration traceable to NIST or national or international standards.

9.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data



Radiation/Conduction	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

9.4 Appendix D: Layout of EUT and Support Equipment

9.4.1 General Conducted Test Configuration

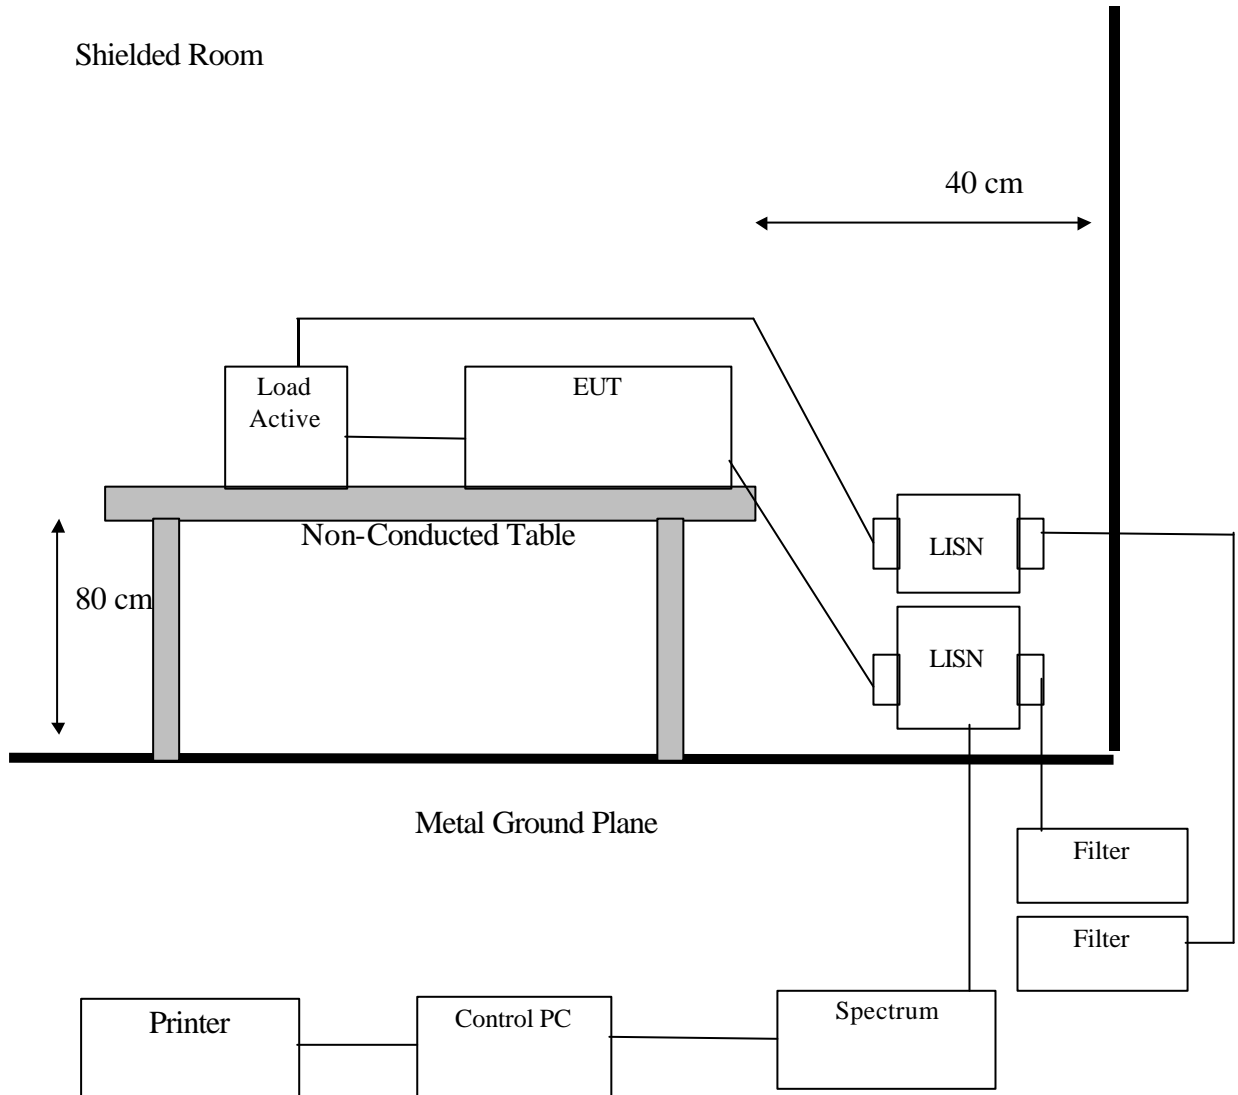

9.4.2 General Radiation Test Configuration

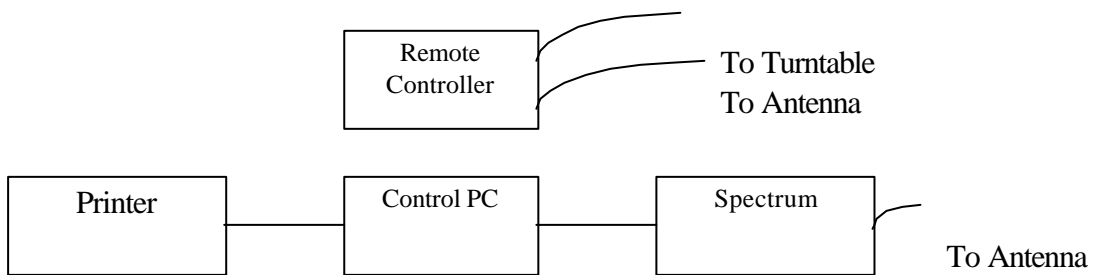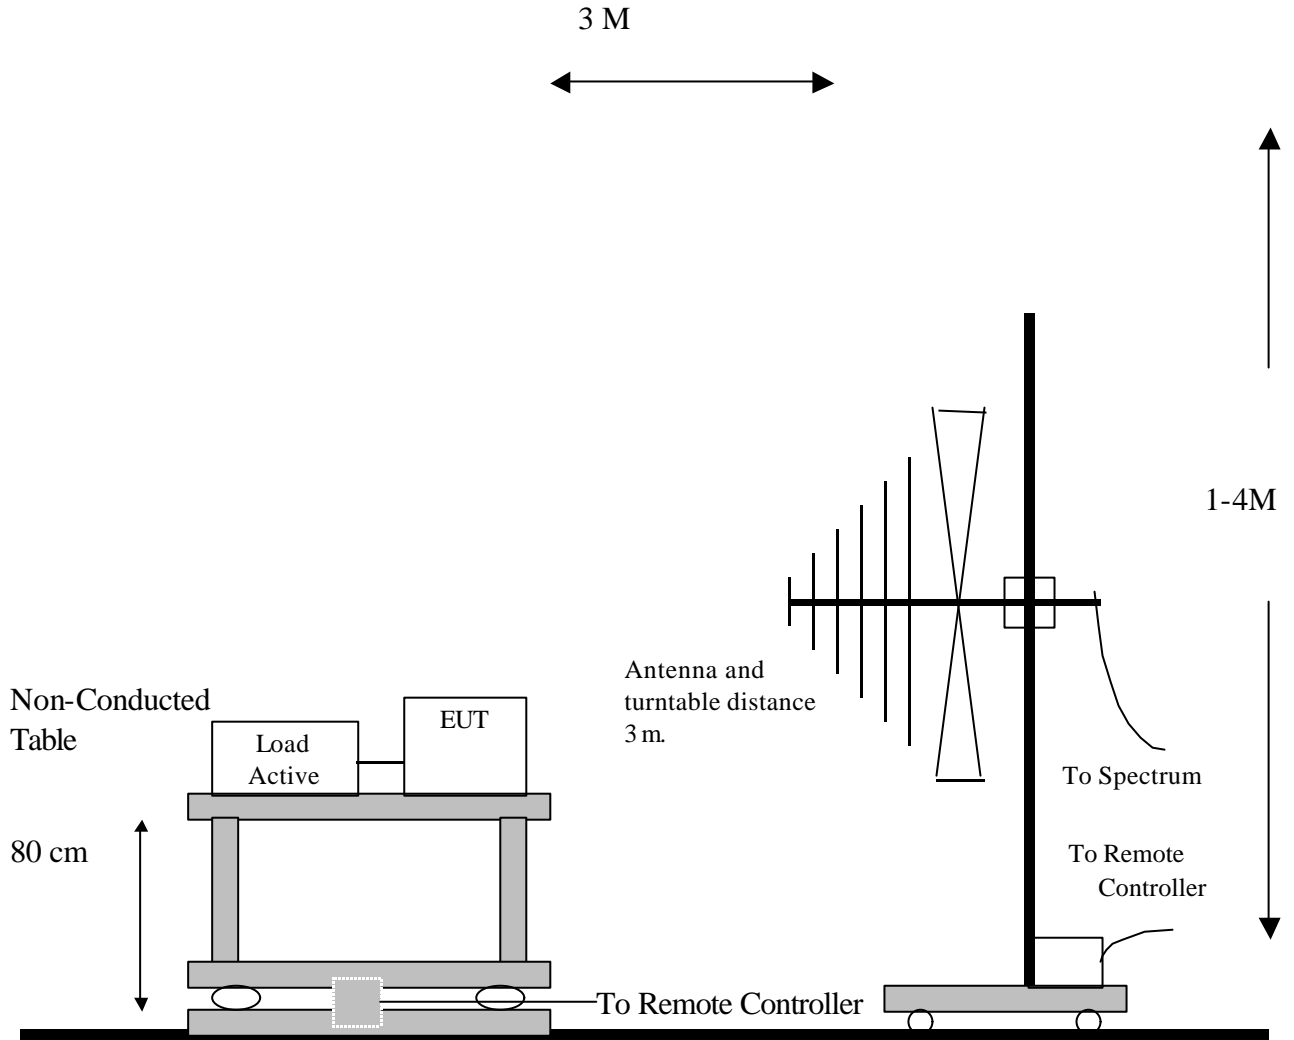

9.5 Appendix E: Description of Support Equipment

9.5.1 Description of Support Equipment

Support Unit 1.

Description: Logitech USB Mouse
 Model Number: M-u48a
 Serial Number: LZE02050204
 Power Supply Type: N/A
 Power Cord: N/A
 FCC ID: JNZ211360

Support Unit 2.

Description: Acer USB Keyboard
 Model Number: 6511-UV
 Serial Number: N/A
 Power Supply Type: N/A
 Power Cord: N/A
 FCC ID: N/A (comply with FCC DOC)

Support Unit 3.

Description: Acer Monitor
 Model: G781
 Serial Number: 999007101214400445T7AA31T
 Power Cord: Non-shielded, Detachable
 FCC ID: (Comply with FCC Standards)

9.5.2 Software for Controlling Support Unit

A test program which generates a complete line of continuously repeating "H" pattern is used as the software test program. The program was executed as follows:

- A. Read and write to the disk drives.
- B. Send H pattern to the video port device (Monitor).
- C. Repeat the above steps.

	Filename	Issued Date
Monitor	HH.bat	8/20/1991

9.5.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head
Monitor Data Cable	Monitor to PC VGA port	1.6M	Shielded, Un-detachable	Metal Head
USB Mouse Data Cable	USB Mouse to PC USB port	1.8M	Shielded, Un-detachable	Metal Head
USB Keyboard Data Cable	USB Keyboard to PC USB port	1.8M	Shielded, Undetachable	Metal Head

9.6 Appendix F: Accuracy of Measurement

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
			k	Value	k	Value
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	0.850
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	1.701		

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	2.059		

Measurement Uncertainty Calculations:


$$Uc(y) = \text{square root} (u_1 (y)^2 + u_2 (y)^2 + \dots + u_n (y)^2)$$

$$U = 2 * Uc (y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

9.7 Appendix G: Photographs of EUT Configuration Test Set Up


The Front View of Highest Conducted Set-up For EUT

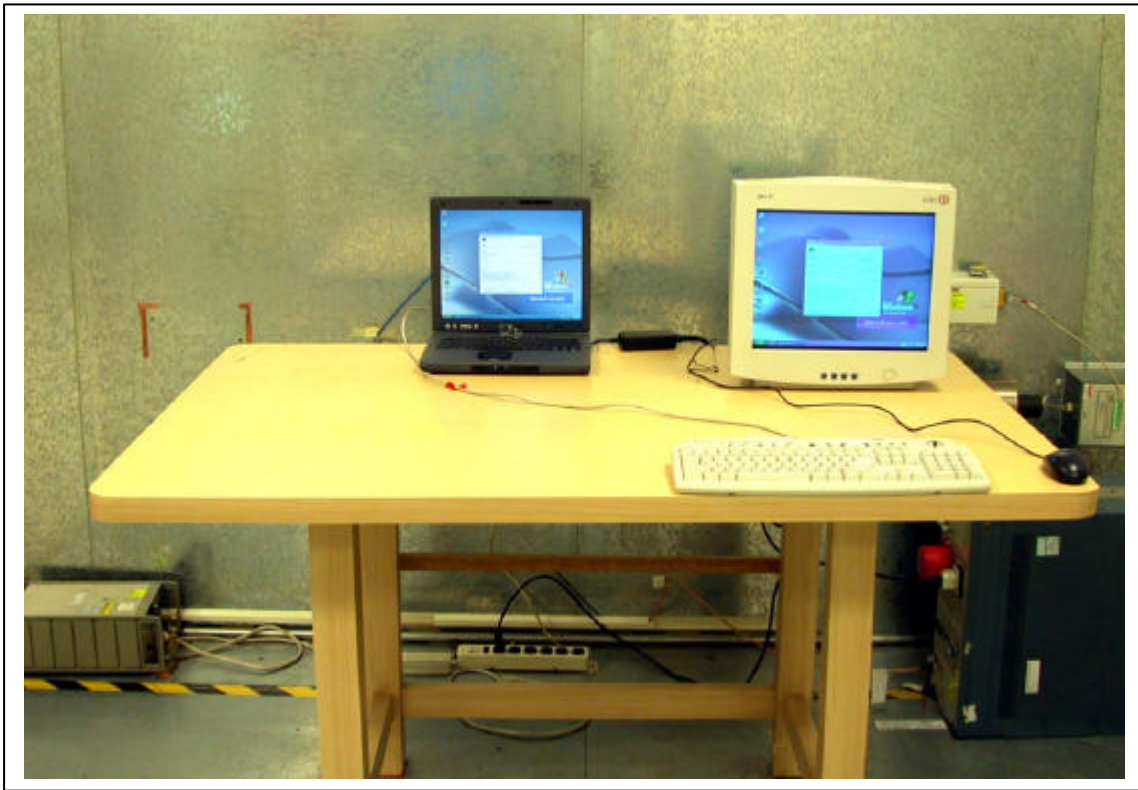

The Front View of Highest Radiated Set-up For EUT



The Back View of Highest Radiated Set-up For EUT

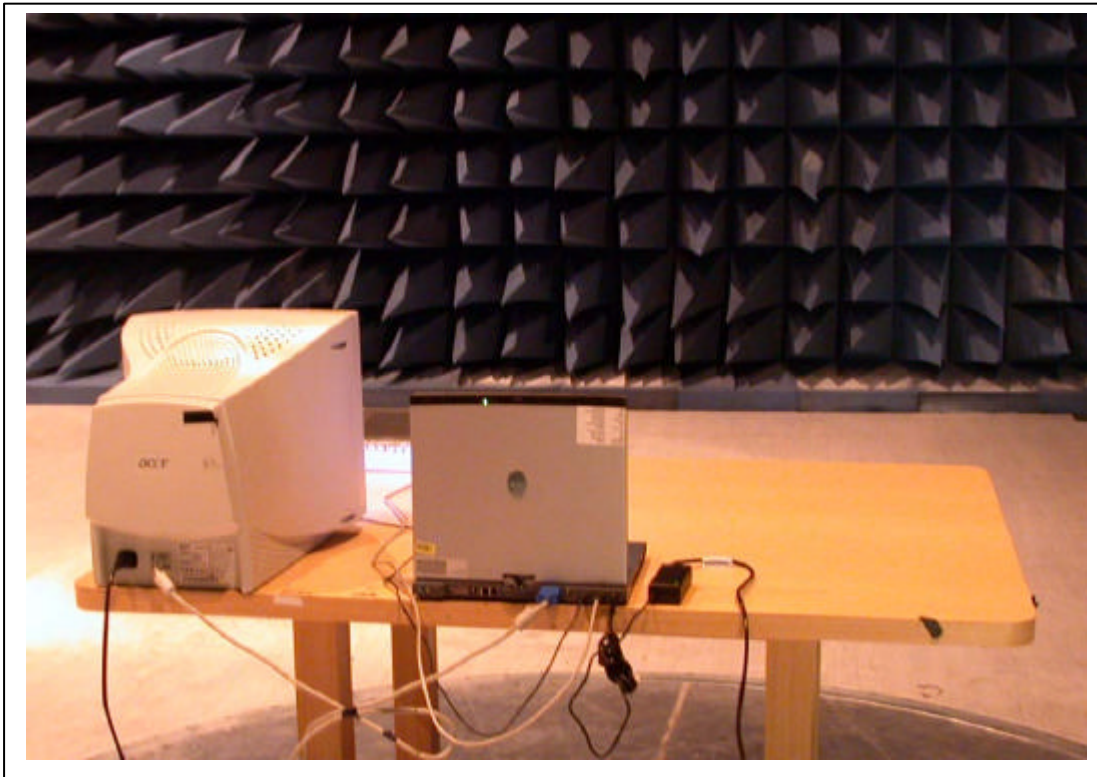

9.8 Appendix H: Antenna Spec.

Please refer to the attached file.