

## ANTENNA SPECIFICATIONS

Item	Specifications	
Antenna	Frequency Range	2400~2483.5MHz
	Polarization	Linear
	Peak Gain	-0.98dBi
	V.S.W.R	<2
	Impedance	50Ω
	Return Loss	<-10dBm
	Connector	External antenna
	Efficiency	28.83%
	Type	External antenna
	Size	33.5x0.3mm


**AS321703823510**

Antenna type:




Produ: **DONGGUAN SUNTECH PRECISION ELECTRONICS CO. LTD**

Address : Shun Tai Industrial Park, Ferry Road, Chai Sha Tsuen, Sha Tin Town, New Dongguan

## ANTENNA PATTERN

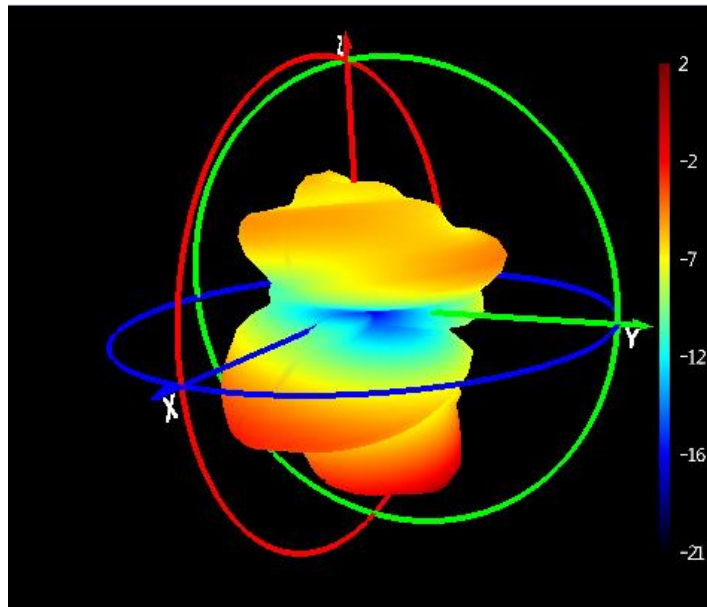

频率(MHZ)	增益(dBi)	效率(dBi)	效率(%)
2400	-2.21	-6.01	25.08
2410	-2.2	-5.82	26.17
2420	-2.04	-5.64	27.29
2430	-2.02	-5.59	27.6
2440	-1.87	-5.46	28.42
2450	-1.65	-5.3	29.49
2460	-1.42	-5.16	30.46
2470	-1.17	-4.97	31.88
2480	-0.98	-4.8	33.09
MAX	-0.98	-4.8	33.09
Min	-2.21	-6.01	25.08
AVG	-1.73	-5.42	28.83

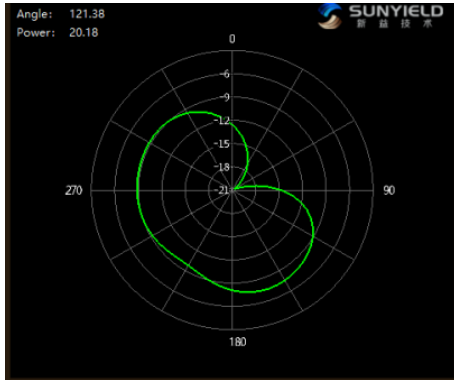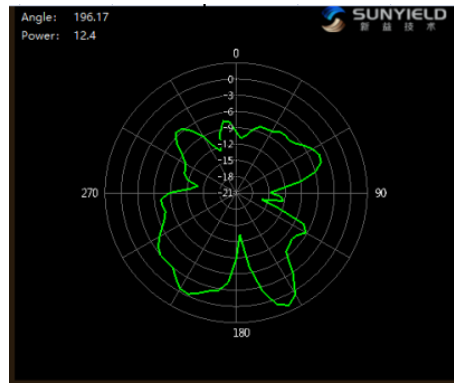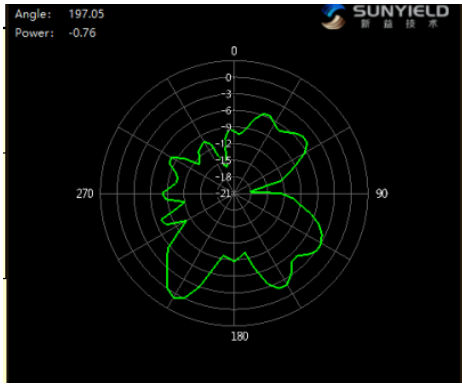

Antenna Picture:

