



NO	ECN No.	DESCRIPTION	ISSUER	DATE
1.	ECR2021148	增加PCC等认证号, 增加电流0.12A	邹福英	20210927
2.				

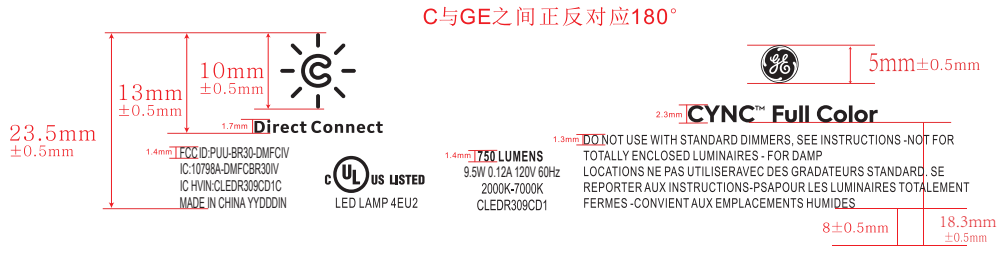

使用镭射工艺

- 1.花纹底部距离到灯帽边缘位置17.4+/-0.5mm
- 2.参数信息版面距离到灯头铆接处位置8+/-0.5mm
- 3.大字字高>1.3mm, 字体: Arial narrow, 字号5PT
- 4.YYDDDD为批次信息, 需逐单替换

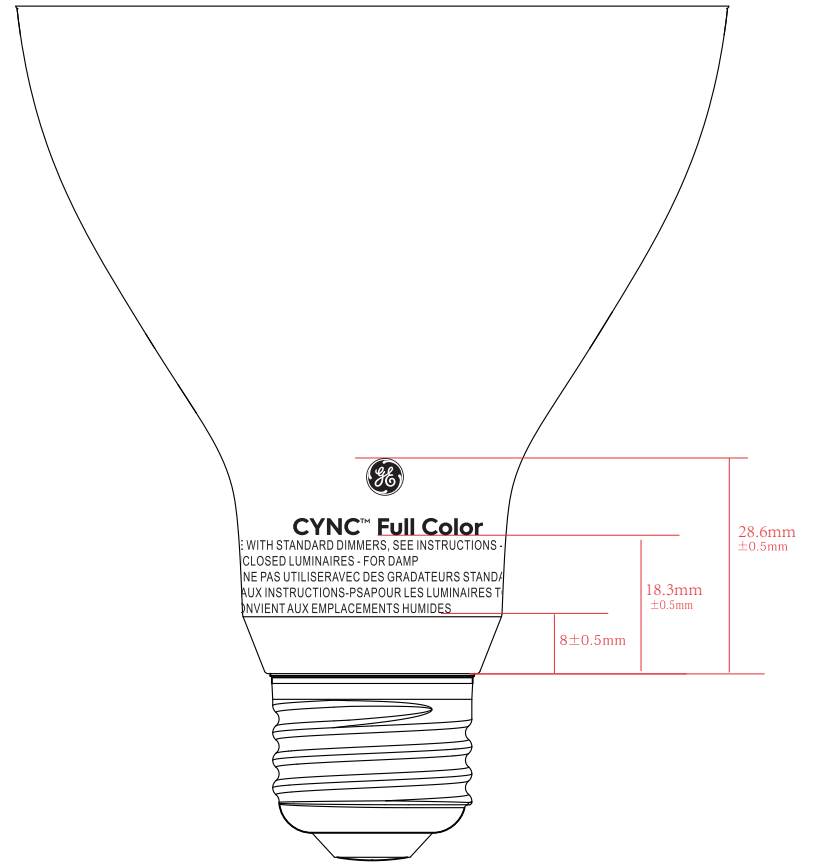

- 技术要求:
- 1.镭射位置准确, 文字整齐平滑
 - 2.内容正确, 不允许出现漏印、烧焦、白点、边缘模糊等不良现象。
 - 3.YYDDDD,YY为年份, DDD为生产日期为当年的天数
 - 4.字体: Arail Narrow.

ANGLE	RANGE		>0°5'	>5°20'	>20°50'	>50°100'	>100°200'	>200°500'	>500'
	GRADE								
±0.1°	A		±0.05	±0.10	±0.15	±0.20	±0.30	±0.40	±0.60
	B		±0.10	±0.20	±0.30	±0.50	±0.80	±1.30	±2.00
SIZE			SCALE		1:1		View angle		
WEIGHT	N/A		Material Color&Finish		镭雕		Unit		m m
DESIGNED	张文霞	2021-09-27	Part Name		镭雕		Page		1/1
CHECKED	邹福英	2021-09-27	Part Name		镭雕		Drawn No.		JXY7.074.090Y06
APPROVED	王华锋	2021-09-27	Project Name		BRC0605WK		VERSION		XBO