

TEST REPORT
On behalf of

Savant Technologies LLC, dba GE Lighting, a Savant company

Product Name: RTL8721DM Module

Model No.: JXC8721-65

FCC ID: PUU-KEYPADSG2A

Prepared For: Savant Technologies LLC, dba GE Lighting, a Savant company
1975 Noble Road, Cleveland, OH 44112

Prepared By: Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg, 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500



File No. : C1D2206038
Report No. : ACI-F22104
Date of Test : 2022.06.13-20
Date of Report : 2022.07.11

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS	5
1.1 Description of Standards and Results.....	5
2 GENERAL INFORMATION	6
2.1 Description of Equipment Under Test.....	6
2.2 EUT Specifications Assessed in Current Report.....	8
2.3 Test Information.....	8
2.4 Sample Description.....	8
2.5 Supported equipment.....	9
2.6 Description of Test Facility.....	9
3 CONDUCTED EMISSION TEST	10
3.1 Test Equipment.....	10
3.2 Block Diagram of Test Setup.....	10
3.3 Conducted Emission Limits (§15.207).....	11
3.4 Test Configuration.....	11
3.5 Operating Condition of EUT.....	11
3.6 Test Procedures.....	11
3.7 Test Results.....	12
4 RADIATED EMISSION TEST	14
4.1 Test Equipment.....	14
4.2 Block Diagram of Test Setup.....	14
4.3 Radiated Emission Limit (§15.209).....	15
4.4 Test Configuration.....	15
4.5 Operating Condition of EUT.....	16
4.6 Test Procedures.....	16
4.7 Test Results.....	17
5 6 DB BANDWIDTH MEASUREMENT	24
5.1 Test Equipment.....	24
5.2 Block Diagram of Test Setup.....	24
5.3 Specification Limits (§15.247(a)(2)).....	24
5.4 Operating Condition of EUT.....	24
5.5 Test Procedure.....	24
5.6 Test Results.....	25
6 MAXIMUM PEAK OUTPUT POWER MEASUREMENT	28
6.1 Test Equipment.....	28
6.2 Block Diagram of Test Setup.....	28
6.3 Specification Limits ((§15.247(b)(3)).....	28
6.4 Operating Condition of EUT.....	28
6.5 Test Procedure.....	28
6.6 Test Results.....	29
7 EMISSION LIMITATIONS MEASUREMENT	32
7.1 Test Equipment.....	32
7.2 Block Diagram of Test Setup.....	32
7.3 Specification Limits (§15.247(d)).....	32

7.4	Operating Condition of EUT	32
7.5	Test Procedure	32
7.6	Test Results	34
8	POWER SPECTRAL DENSITY MEASUREMENT	43
8.1	Test Equipment.....	43
8.2	Block Diagram of Test Setup	43
8.3	Specification Limits (§15.247(e))	43
8.4	Operating Condition of EUT	43
8.5	Test Procedure.....	43
8.6	Test Results	44
9	DEVIATION TO TEST SPECIFICATIONS.....	47
10	MEASUREMENT UNCERTAINTY LIST	48

TEST REPORT

Applicant : Savant Technologies LLC, dba GE Lighting, a Savant company
 EUT Description : RTL8721DM Module
 (A) Model No. : JXC8721-65
 (B) Power Supply : DC 3.3V
 (C) Test Voltage : DC 3.3V from test fixture via PC

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART C
 AND ANSI C63.10-2020*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: Refer to Sec2.1), which was tested is technically compliance with the FCC limits.


This report applies to above tested Sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

The test results for EUT's WIFI function are contained in No.ACI-F22105 report.

Date of Test : 2022.06.13-20 Date of Report : 2022.07.11

Producer : Huimin Yan
 HUIMIN YAN / Assistant

Reviewer : Byron Wu
 BYRON WU/ Deputy Assistant Manager

 For and on behalf of
 Audix Technology (Shanghai) Co., Ltd.
Kamp Chen

Signatory :
 Authorized Signature(s) KAMP CHEN/ Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.207
Radiated Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.209(a) 15.205(a)(c)
6 dB Bandwidth Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(a)(2)
Maximum Peak Output Power Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(b)(3)
Emission Limitations Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(d)
Band Edge Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(d)
Power Spectral Density Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2020	Pass	15.247(e)
N/A is an abbreviation for Not Applicable.			

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description	:	RTL8721DM Module
Type of EUT	:	<input checked="" type="checkbox"/> Production <input type="checkbox"/> Pre-product <input type="checkbox"/> Pro-type
Model Number	:	JXC8721-65
Radio Tech	:	BLE 5.0; IEEE 802.11 a/b/g/n.
Note	:	Bluetooth LE1M only.
Channel Freq.	:	BLE: 2402MHz-2480MHz; IEEE 802.11a: 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5700MHz; 5745MHz—5825MHz IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11nHT20: 2412MHz—2462MHz; 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5700MHz; 5745MHz—5825MHz IEEE802.11nHT40: 2422MHz—2452MHz; 5190MHz—5230MHz; 5270MHz—5310MHz 5510MHz—5670MHz; 5755MHz—5795MHz
Modulation	:	BLE: GFSK; 802.11b: DSSS (CCK, DQPSK, DBPSK); 802.11a/g/n: OFDM (64QAM, 16QAM, QPSK, BPSK).
Antenna Info.	:	Antenna Type: IPEX Antenna Antenna Gain: 2400MHz~2483.5MHz: -2.72 dBi; 5GHz bands: Band1: 2.15 dBi; Band2: 2.43 dBi; Band3: 4.1 dBi; Band4: 2.41 dBi. The Antenna uses an antenna that use a unique coupling to the intentional radiator that is comply with 15.203 requirement.
Test Mode	:	The EUT was set at continuous TX during all the test in the report.
Applicant	:	Savant Technologies LLC, dba GE Lighting, a Savant company 1975 Noble Road, Cleveland, OH 44112

Manufacturer : same as Applicant

Factory : Shenzhen Jingxun Technology Co., Ltd.
3/F,A5 building Zhiyuan Community No.1001,
Xueyuan Road Nanshan District, Shenzhen City, China

2.2 EUT Specifications Assessed in Current Report

Mode	Modulation	Data Rate(Mbps)
BLE	GFSK	1

Channel List			
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
...
...
...
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.3 Test Information

The test software “RTLBTAPP.exe” was used to control EUT work in TX mode, Power Setting and select test channel.

Modulation	data rate (Mbps)	Power Setting	Test Channel		Frequency (MHz)
BLE	1	Default	Low:	00	2402
		Default	Middle:	20	2442
		Default	High:	39	2480

2.4 Sample Description

Test Item	Model Number	Sample Number	Date of receipted
Conducted Emission	JXC8721-65	E2206269a-01/05	2022.06.09
Radiated Emission	JXC8721-65	E2206269a-01/05	2022.06.09
Conducted RF Test	JXC8721-65	E2206269a-01/05	2022.06.09

2.5 Supported equipment

Brand : Acer
Product Name: : Notebook PC
Model Name : TravelMate P238 series
Model Number : N15W8

Brand : Chicony
Product Name: : AC ADAPTER
Model Name : A18-045N2A
Model Number : A045R072P

2.6 Description of Test Facility

Name of Firm : Audix Technology (Shanghai) Co., Ltd.
Site Location : 3F and 4F, 34Bldg, 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China.
Accredited by NVLAP, Lab Code : 200371-0
FCC Designation Number : CN5027
Test Firm Registration Number : 954668

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	100841	2022.01.25	1 Year
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	2022.01.06	1 Year
3.	CE Cable	HANWEI	RG233/U	KJ09052	2022.03.07	1 Year
4.	Software	Audix	e3	6.2009-1-15	--	--

3.2 Block Diagram of Test Setup

3.2.1 Conducted Disturbance Test Setup

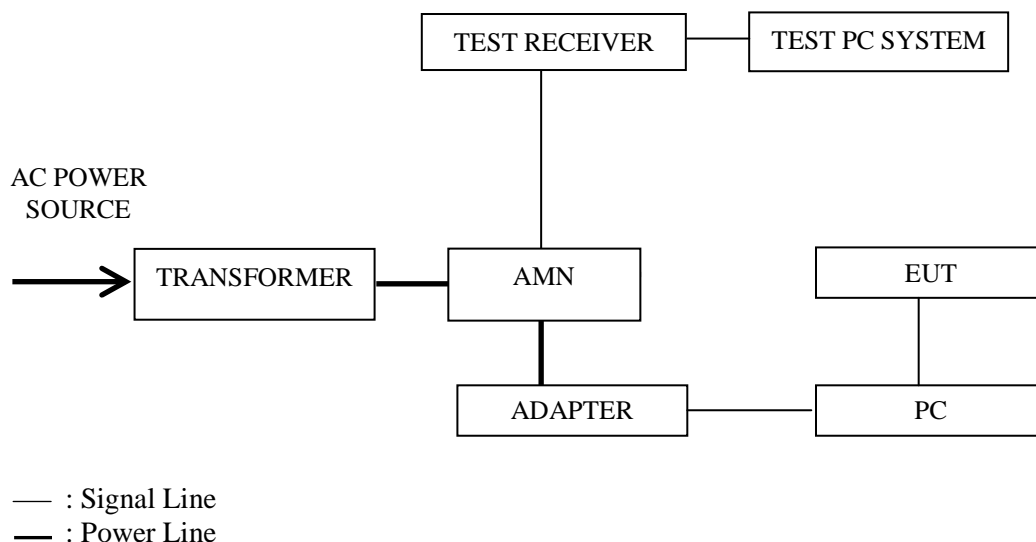

3.3 Conducted Emission Limits (§15.207)

Frequency Range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

- 3.5.1 Setup the EUT as shown in Sec. 3.2.
- 3.5.2 Turn on the power of all equipment.
- 3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

The EUT was placed upon a non-metallic table, which is 0.8 m above the horizontal conducting ground plane and 0.4 m from a vertical reference plane. The EUT was connected to the power mains through an Artificial Mains Network (AMN) to provide a 50 Ω coupling impedance for the measuring equipment. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission according to FCC Part 15 Subpart C and ANSI C63.10: 2020 requirements during conducted disturbance test.

The I.F. bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

Test with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. (According to KDB 174176 D01 Line Conducted FAQ)

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Worst case emission:

No.	Operation	Modulation	Channel	Frequency (MHz)	Data Page
1.	Transmitting	--	--	--	P13

NOTE 1 – Level = Read Level + AMN Factor + Cable Loss

NOTE 2 – “QP” means “Quasi-Peak” values

NOTE 3 – The emission levels which not reported are too low against the official limit.

Worst case emission

EUT : RTL8721DM Module Temperature : 22°C
 Model No. : JXC8721-65 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2022.06.20

Polarization	Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB)	Cable Loss (dB)	Emission Level dB (μV)	Limits dB (μV)	Margin (dB)	Remark
Line	0.15321	43.24	0.16	0.03	43.43	65.82	22.39	QP
	0.15321	25.06	0.16	0.03	25.25	55.82	30.57	Average
	0.50469	26.94	0.2	0.04	27.18	56	28.82	QP
	0.50469	19.5	0.2	0.04	19.74	46	26.26	Average
	0.66127	24.6	0.21	0.05	24.86	56	31.14	QP
	0.66127	16.7	0.21	0.05	16.96	46	29.04	Average
	1.249	10.77	0.23	0.07	11.07	56	44.93	QP
	1.249	3.48	0.23	0.07	3.78	46	42.22	Average
	4.224	13.28	0.27	0.13	13.68	56	42.32	QP
	4.224	7.64	0.27	0.13	8.04	46	37.96	Average
	15.552	25.73	0.42	0.24	26.39	60	33.61	QP
	15.552	20.8	0.42	0.24	21.46	50	28.54	Average
Neutral	0.15321	43.22	0.12	0.03	43.37	65.82	22.45	QP
	0.15321	25.03	0.12	0.03	25.18	55.82	30.64	Average
	0.50469	25.85	0.2	0.04	26.09	56	29.91	QP
	0.50469	18.44	0.2	0.04	18.68	46	27.32	Average
	0.66127	25.46	0.22	0.05	25.73	56	30.27	QP
	0.66127	17.2	0.22	0.05	17.47	46	28.53	Average
	1.352	13.28	0.35	0.07	13.7	56	42.3	QP
	1.352	6.38	0.35	0.07	6.8	46	39.2	Average
	4.269	15.42	0.43	0.13	15.98	56	40.02	QP
	4.269	7.36	0.43	0.13	7.92	46	38.08	Average
	15.885	25.67	0.75	0.25	26.67	60	33.33	QP
	15.885	19.64	0.75	0.25	20.64	50	29.36	Average

TEST ENGINEER: Jarey

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Preamplifier	Agilent	8447D	2944A10548	2022.06.06	1 Year
2.	Preamplifier	HP	8449B	3008A00864	2022.06.06	1 Year
3.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2021.09.16	1 Year
4.	Test Receiver	R&S	ESCI	101303	2022.06.06	1 Year
5.	Bilog Antenna+6dB Attenuator	Schwarz beck	VULB 9168+EMCI-N-6-06	708+AT-N0638	2021.12.13	1 Year
6.	Horn Antenna	EMCO	3115	9607-4878	2021.07.27	1 Year
7.	Horn Antenna	EMCO	3116	00062643	2021.10.10	1 Year
8.	Coaxial Cable	SCHAFFNER	RG 212U-MIL C 17+N1K50-E W0630-N1K50-15m-1	RE-10m-001/R E-15m-002	2022.03.07	1 Year
9.	Cavity Band Rejection Filter	Microwave	WT-A3882-R 10	WT200312-1-1	2022.04.14	1 Year
10.	Software	Audix	e3	6.111206	--	--

4.2 Block Diagram of Test Setup


4.2.1 EUT & Peripherals



4.2.2 Below 1GHz

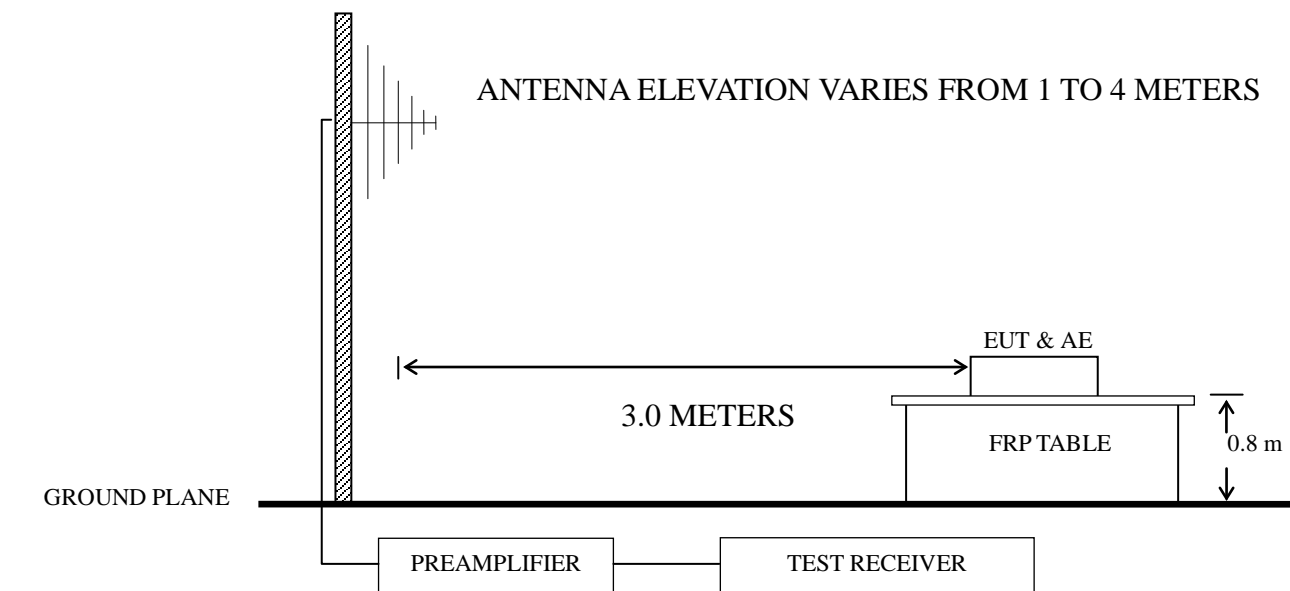

4.2.3 Above 1GHz

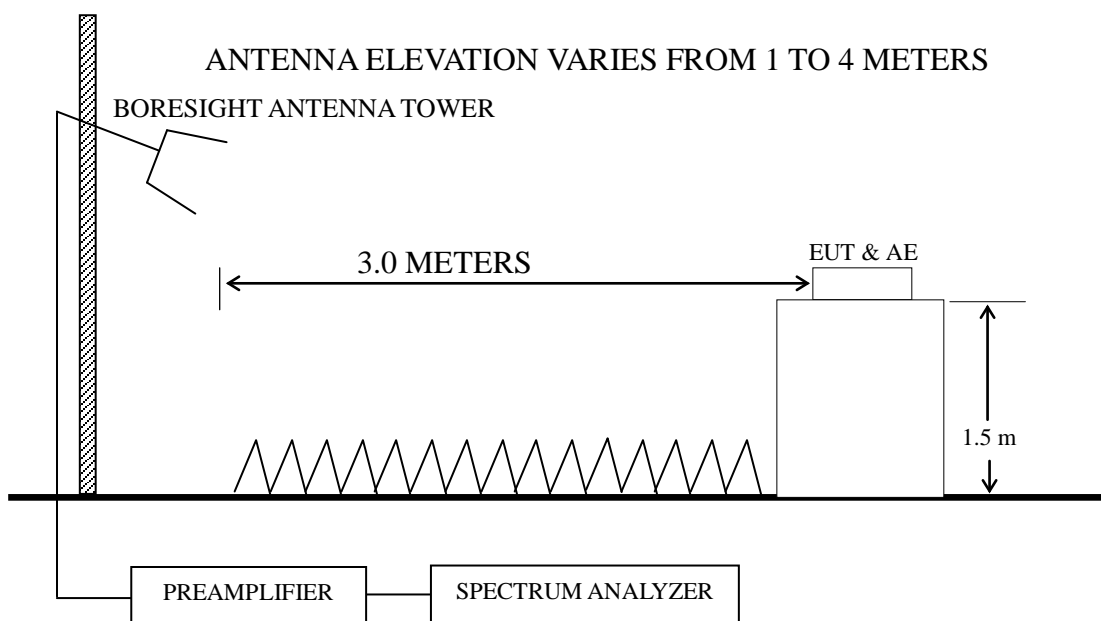

4.3 Radiated Emission Limit (§15.209)

Frequency (MHz)	Distance (m)	Field strength limits (μV/m)	
		(μV/m)	dB(μV/m)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB (μV/m) = 20 log Emission Level (μV/m)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.

NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

4.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.4.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

4.5 Operating Condition of EUT

4.5.1 Setup the EUT as shown in Sec. 4.2.

4.5.2 Turn on the power of all equipment.

4.5.3 Turn the EUT on the test mode, and then test.

4.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10: 2020 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESCI was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of Agilent N9010A was set at 1MHz for above 1GHz.

The frequency range from 30 MHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

All the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Frequency range: below 1GHz (Worst case emission)

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P18
2.			20	2442 MHz	P18
3.			39	2480 MHz	P19

Frequency range: above 1GHz

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P20
2.			20	2442 MHz	P20
3.			39	2480 MHz	P21

Band-Edge:

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P22
2.			39	2480 MHz	P22

Restricted bands:

No.	Operation	Modulation	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P23
2.			39	2480 MHz	P23

NOTE 1 – Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

NOTE 2 – “QP” means “Quasi-Peak” values

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The emission levels which not reported are too low against the official limit.

NOTE 5 – The emission levels recorded below is data of EUT configured in Standing direction, for Standing direction was the maximum emission direction during the test. The data of Side & Lying direction are too low against the official limit to be reported.

NOTE 6 – All reading are Quasi-Peak values below or equal to 1GHz, Peak and Average values above 1GHz.

For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

NOTE 7 – The frequency range 2310-2390MHz & 2483.5-2500MHz were tested for Restricted bands.

Worst case emission < 1GHz

EUT : RTL8721DM Module Temperature : 22°C
 Model No. : JXC8721-65 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2022.06.19

BLE CH2402MHz

Polarization	Frequency (MHz)	Meter Reading dB (µV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)	Remark
Horizontal	61.132	23.9	18.74	0.84	28.16	15.32	40	24.68	QP
	96.099	35.4	14.67	1.07	28.02	23.12	43.5	20.38	QP
	144.335	33.37	18.97	1.29	27.82	25.81	43.5	17.69	QP
	192.419	38.26	16.43	1.51	27.47	28.73	43.5	14.77	QP
	480.528	29.49	23.38	2.4	27.86	27.41	46	18.59	QP
	747.483	25.97	27.56	2.9	27.2	29.23	46	16.77	QP
Vertical	47.994	23.64	19.68	0.73	28.21	15.84	40	24.16	QP
	96.099	29.03	14.67	1.07	28.02	16.75	43.5	26.75	QP
	143.83	25.83	18.94	1.29	27.82	18.24	43.5	25.26	QP
	192.419	30.62	16.43	1.51	27.47	21.09	43.5	22.41	QP
	499.425	30.68	23.6	2.48	27.9	28.86	46	17.14	QP
	798.98	23.93	28.3	3.06	26.9	28.39	46	17.61	QP

BLE CH2442MHz

Polarization	Frequency (MHz)	Meter Reading dB (µV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)	Remark
Horizontal	53.318	22.96	19.42	0.78	28.19	14.97	40	25.03	QP
	96.099	36.9	14.67	1.07	28.02	24.62	43.5	18.88	QP
	143.83	33.53	18.94	1.29	27.82	25.94	43.5	17.56	QP
	192.419	38.74	16.43	1.51	27.47	29.21	43.5	14.29	QP
	289.002	31.76	18.93	1.86	27.06	25.49	46	20.51	QP
	560.693	28.5	24.61	2.57	27.88	27.8	46	18.2	QP
Vertical	53.318	23.82	19.42	0.78	28.19	15.83	40	24.17	QP
	96.099	30.01	14.67	1.07	28.02	17.73	43.5	25.77	QP
	168.414	29.12	18.8	1.39	27.67	21.64	43.5	21.86	QP
	192.419	31.76	16.43	1.51	27.47	22.23	43.5	21.27	QP
	499.425	29.97	23.6	2.48	27.9	28.15	46	17.85	QP
	793.396	22.48	28.22	3.06	26.94	26.82	46	19.18	QP

BLE CH2480MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	59.649	23.75	18.93	0.83	28.16	15.35	40	24.65	QP
	96.099	36.94	14.67	1.07	28.02	24.66	43.5	18.84	QP
	143.83	33.88	18.94	1.29	27.82	26.29	43.5	17.21	QP
	192.419	37.62	16.43	1.51	27.47	28.09	43.5	15.41	QP
	289.002	31.78	18.93	1.86	27.06	25.51	46	20.49	QP
	480.528	29.4	23.38	2.4	27.86	27.32	46	18.68	QP
Vertical	59.025	23.44	18.98	0.83	28.16	15.09	40	24.91	QP
	96.099	29.39	14.67	1.07	28.02	17.11	43.5	26.39	QP
	168.414	28.26	18.8	1.39	27.67	20.78	43.5	22.72	QP
	191.745	30.32	16.5	1.51	27.47	20.86	43.5	22.64	QP
	499.425	28.65	23.6	2.48	27.9	26.83	46	19.17	QP
	796.183	23.37	28.26	3.06	26.94	27.75	46	18.25	QP

TEST ENGINEER: Jarey

Radiated Emission > 1GHz

EUT : RTL8721DM Module Temperature : 22°C

Model No. : JXC8721-65 Humidity : 51%RH

Test Mode : Transmitting Date of Test : 2022.06.19

BLE CH2402MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3482	40.82	31.28	6.36	35.14	43.32	74	30.68	Peak
	4808	42.79	33.21	7.55	34.75	48.8	74	25.2	Peak
	6253	37.92	34.35	8.6	34.73	46.14	74	27.86	Peak
	8123	35.69	37.96	10.28	34.79	49.14	74	24.86	Peak
	9364	36.09	38.27	10.97	34.66	50.67	74	23.33	Peak
	11285	35.02	38.8	11.87	34.34	51.35	74	22.65	Peak
Vertical	3414	41.84	31.12	6.27	35.16	44.07	74	29.93	Peak
	4978	38.49	33.89	7.67	34.7	45.35	74	28.65	Peak
	6950	37.09	35.5	9.18	34.8	46.97	74	27.03	Peak
	8395	36.1	38.43	10.4	34.76	50.17	74	23.83	Peak
	9755	34.13	38.35	11.24	34.62	49.1	74	24.9	Peak
	11319	35.03	38.8	11.87	34.34	51.36	74	22.64	Peak

BLE CH2442MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3363	41.07	31.01	6.23	35.18	43.13	74	30.87	Peak
	4876	40.28	33.49	7.61	34.74	46.64	74	27.36	Peak
	6508	37.35	34.4	8.85	34.75	45.85	74	28.15	Peak
	8242	36	38.17	10.34	34.77	49.74	74	24.26	Peak
	9840	36.37	38.37	11.24	34.62	51.36	74	22.64	Peak
	11285	35.3	38.8	11.87	34.34	51.63	74	22.37	Peak
Vertical	3550	40.87	31.43	6.4	35.12	43.58	74	30.42	Peak
	5063	38.96	34.01	7.78	34.7	46.05	74	27.95	Peak
	6780	37.26	35.07	9.09	34.78	46.64	74	27.36	Peak
	8225	36.3	38.13	10.34	34.78	49.99	74	24.01	Peak
	9874	35.72	38.37	11.33	34.61	50.81	74	23.19	Peak
	11625	34.95	38.85	12.1	34.27	51.63	74	22.37	Peak

BLE CH2480MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3737	40.46	31.89	6.58	35.07	43.86	74	30.14	Peak
	4961	39.44	33.83	7.67	34.71	46.23	74	27.77	Peak
	7001	36.77	35.6	9.26	34.8	46.83	74	27.17	Peak
	8208	36.18	38.09	10.34	34.78	49.83	74	24.17	Peak
	9874	35.72	38.37	11.33	34.61	50.81	74	23.19	Peak
	11455	34.72	38.8	11.99	34.31	51.2	74	22.8	Peak
Vertical	3652	40.66	31.68	6.49	35.1	43.73	74	30.27	Peak
	4978	41.03	33.89	7.67	34.7	47.89	74	26.11	Peak
	6151	37.38	34.33	8.52	34.71	45.52	74	28.48	Peak
	7732	37.29	37.25	10.01	34.8	49.75	74	24.25	Peak
	9381	36.61	38.28	10.97	34.66	51.2	74	22.8	Peak
	11081	35.4	38.8	11.76	34.38	51.58	74	22.42	Peak

TEST ENGINEER: Jarey

Band-Edge:

EUT : RTL8721DM Module Temperature : 22°C
 Model No. : JXC8721-65 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2022.06.13

BLE CH2402MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2390	50.96	28.21	5.36	35.86	48.67	74	25.33	Peak
	2390	38.59	28.21	5.36	35.86	36.3	54	17.7	Average
Vertical	2390	44.09	28.21	5.36	35.86	41.8	74	32.2	Peak
	2390	32.61	28.21	5.36	35.86	30.32	54	23.68	Average

BLE CH2480MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2483.5	44.79	28.46	5.43	35.76	42.92	74	31.08	Peak
	2483.5	32.58	28.46	5.43	35.76	30.71	54	23.29	Average
Vertical	2483.5	42.88	28.46	5.43	35.76	41.01	74	32.99	Peak
	2483.5	30.49	28.46	5.43	35.76	28.62	54	25.38	Average

TEST ENGINEER: Jarey

Emissions in restricted frequency bands:

EUT : RTL8721DM Module Temperature : 22°C

Model No. : JXC8721-65 Humidity : 51%RH

Test Mode : Transmitting Date of Test : 2022.06.13

BLE CH2402MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2321.44	45.18	28.03	5.29	35.93	42.57	74	31.43	Peak
	2321.44	33.21	28.03	5.29	35.93	30.6	54	23.4	Average
	2346.85	45.72	28.1	5.32	35.91	43.23	74	30.77	Peak
	2346.85	33.38	28.1	5.32	35.91	30.89	54	23.11	Average
	2389.53	50.81	28.21	5.36	35.86	48.52	74	25.48	Peak
	2389.53	38.58	28.21	5.36	35.86	36.29	54	17.71	Average
Vertical	2326.06	43.87	28.05	5.29	35.93	41.28	74	32.72	Peak
	2326.06	31.59	28.05	5.29	35.93	29	54	25	Average
	2352.57	43.84	28.12	5.32	35.9	41.38	74	32.62	Peak
	2352.57	31.29	28.12	5.32	35.9	28.83	54	25.17	Average
	2389.42	45.37	28.21	5.36	35.86	43.08	74	30.92	Peak
	2389.42	33.23	28.21	5.36	35.86	30.94	54	23.06	Average

BLE CH2480MHz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2484.13	45.32	28.46	5.43	35.76	43.45	74	30.55	Peak
	2484.13	33.53	28.46	5.43	35.76	31.66	54	22.34	Average
	2490.28	45.5	28.48	5.47	35.76	43.69	74	30.31	Peak
	2490.28	33.44	28.48	5.47	35.76	31.63	54	22.37	Average
	2495.95	45.99	28.48	5.47	35.76	44.18	74	29.82	Peak
	2495.95	33.3	28.48	5.47	35.76	31.49	54	22.51	Average
Vertical	2484.7	43.03	28.46	5.47	35.76	41.2	74	32.8	Peak
	2484.7	31.4	28.46	5.47	35.76	29.57	54	24.43	Average
	2490.16	43.88	28.48	5.47	35.76	42.07	74	31.93	Peak
	2490.16	31.68	28.48	5.47	35.76	29.87	54	24.13	Average
	2496.13	43.21	28.48	5.47	35.76	41.4	74	32.6	Peak
	2496.13	31.62	28.48	5.47	35.76	29.81	54	24.19	Average

TEST ENGINEER: Jarey

5 6 dB BANDWIDTH MEASUREMENT

5.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2021.09.16	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819-045	2022.03.08	1 Year
3.	10 dB Attenuator	Mini-Circuits	VAT-10W2+	001	2021.08.06	1 Year

5.2 Block Diagram of Test Setup



5.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

5.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

5.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with settings: RBW = 100kHz, VBW ≥ 3 × RBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is lower than peak power minus 6 dB .

The test procedure is defined in ANSI C63.10-2020 (the 11.8.2 Measurement Procedure “Option 2” was used).

5.6 Test Results


PASSED.

All the test results are attached in next pages.

(Test Date: 2022.06.13 Temperature: 23°C Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit
BLE	00	2402	665.6	500 kHz
	20	2442	663.9	500 kHz
	39	2480	664.2	500 kHz


BLE CH2402MHz

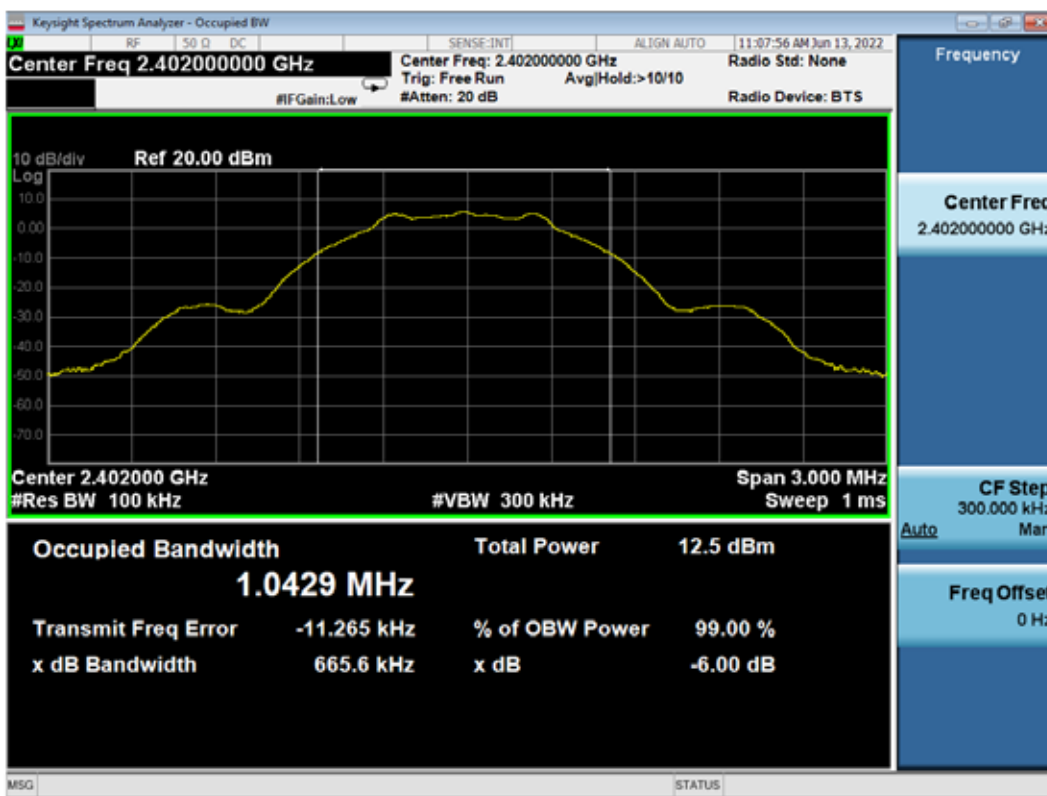

BLE CH2442MHz



BLE CH2480MHz

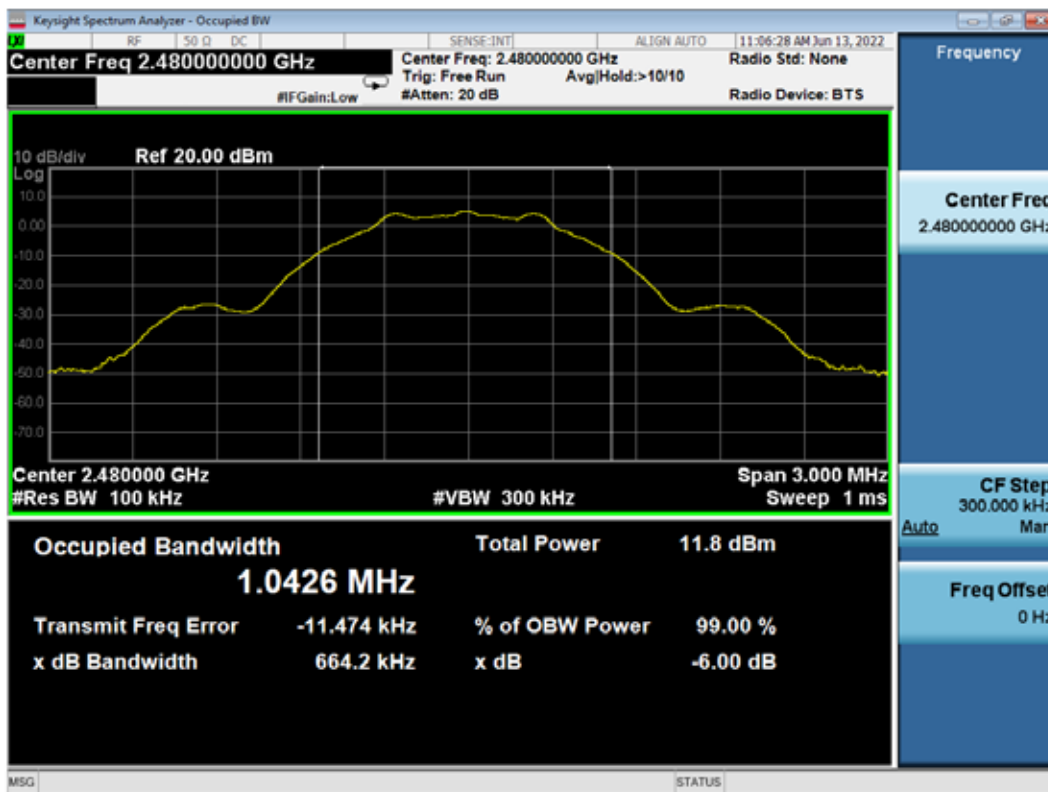

6 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

6.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2021.09.16	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819-045	2022.03.08	1 Year
3.	10 dB Attenuator	Mini-Circuits	VAT-10W2+	001	2021.08.06	1 Year

6.2 Block Diagram of Test Setup

The Same as Section. 5.2.

6.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

6.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

6.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) $RBW \geq DTS$ Bandwidth.
- b) $VBW \geq [3 \times RBW]$.
- c) $Span \geq [3 \times RBW]$.
- d) Sweep time = auto.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

The test procedure is defined in ANSI C63.10-2020 (11.9.1.1 Measurement Procedure “ $RBW \geq DTS$ bandwidth” was used).

6.6 Test Results


PASSED.

All the test results are listed below.


(Test Date: 2022.06.13 Temperature: 23°C Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit
BLE	00	2402	5.586	30 dBm
	20	2442	5.234	30 dBm
	39	2480	5.216	30 dBm


BLE CH2402MHz

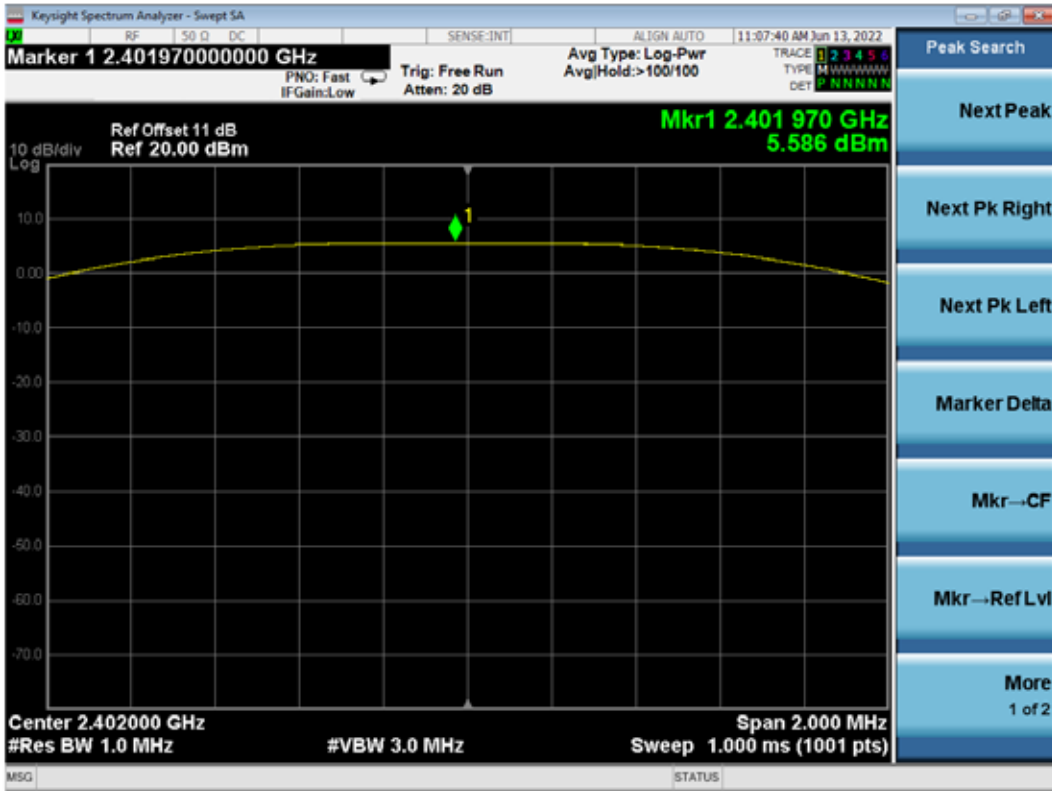

BLE CH2442MHz

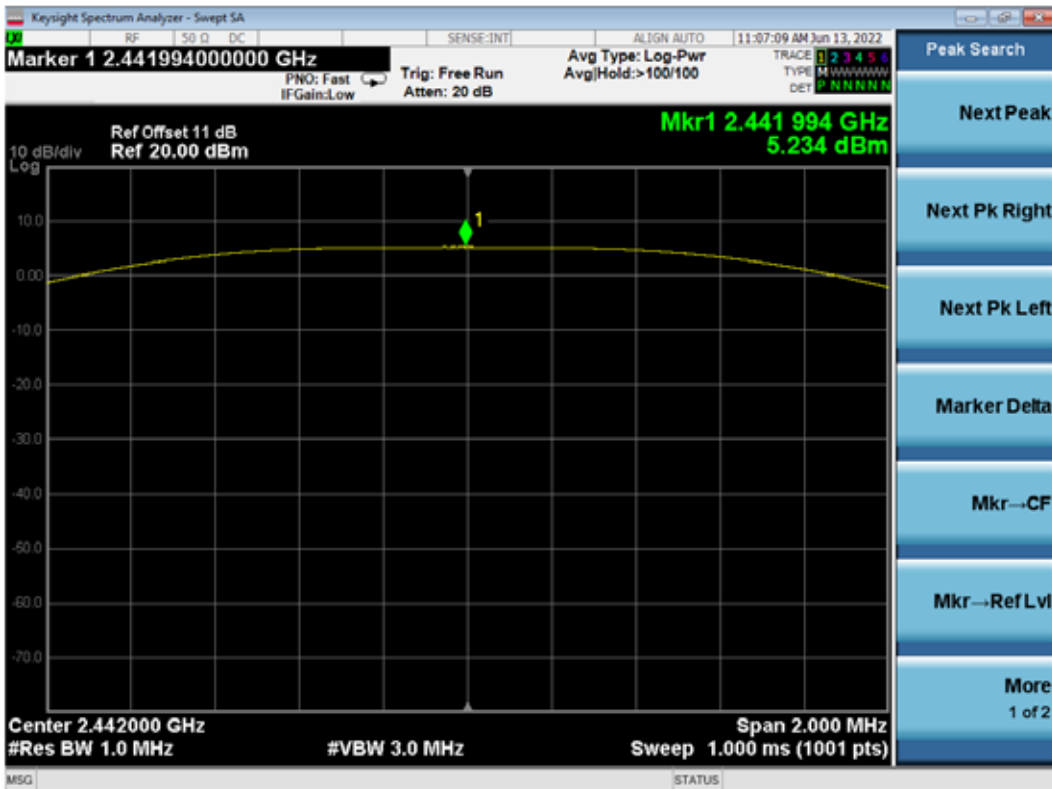

BLE CH2480MHz

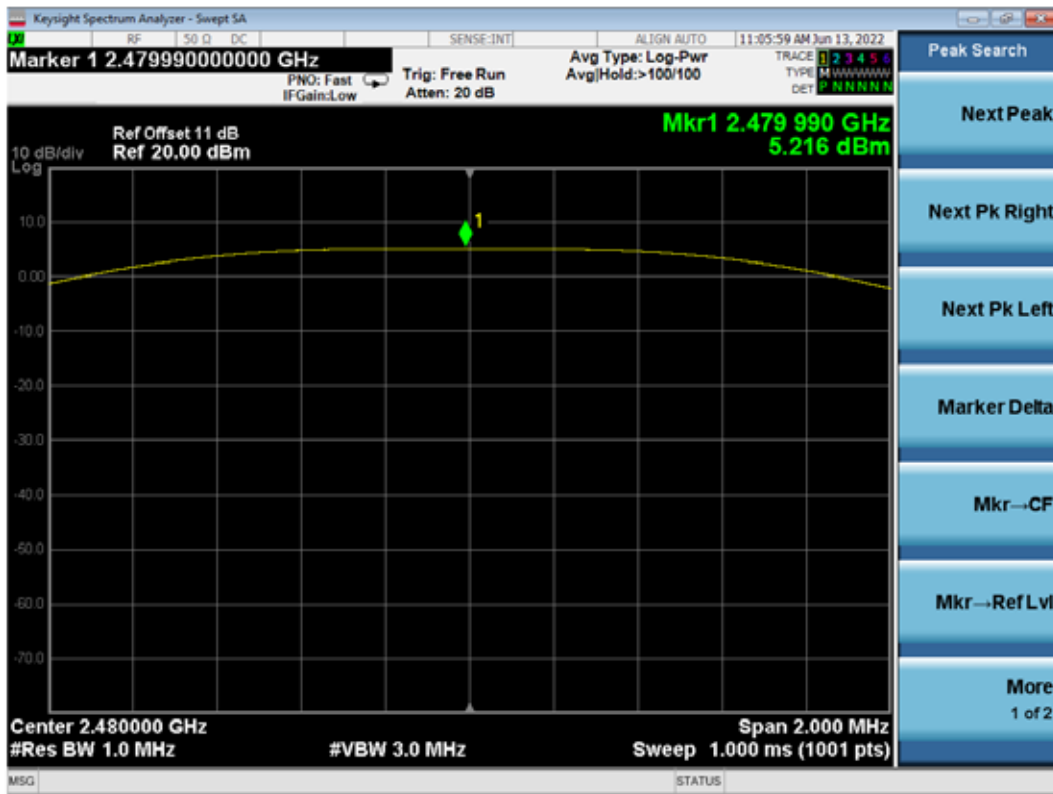

7 EMISSION LIMITATIONS MEASUREMENT

7.1 Test Equipment

The following test equipment was used during the emission limitations test:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2021.09.16	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819-045	2022.03.08	1 Year
3.	10 dB Attenuator	Mini-Circuits	VAT-10W2+	001	2021.08.06	1 Year

7.2 Block Diagram of Test Setup

The Same as Section. 5.2.

7.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). (※This test result attaching to Section. 3.7)

7.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

7.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to

establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Scan up through 10th harmonic.

The test procedure is defined in ANSI C63.10-2020 (11.11.2 Reference level measurement and 11.11.3 Emission level measurement was used).

7.6 Test Results

PASSED.


The test data was attached in the next pages.

(Test Date: 2022.02.16 Temperature: 23°C Humidity: 51 %)


Modulation	Channel	Frequency (MHz)	Data Page
BLE	00	2402	P35-37
	20	2442	P38-39
	39	2480	P40-42


BLE CH2402MHz

Reference level

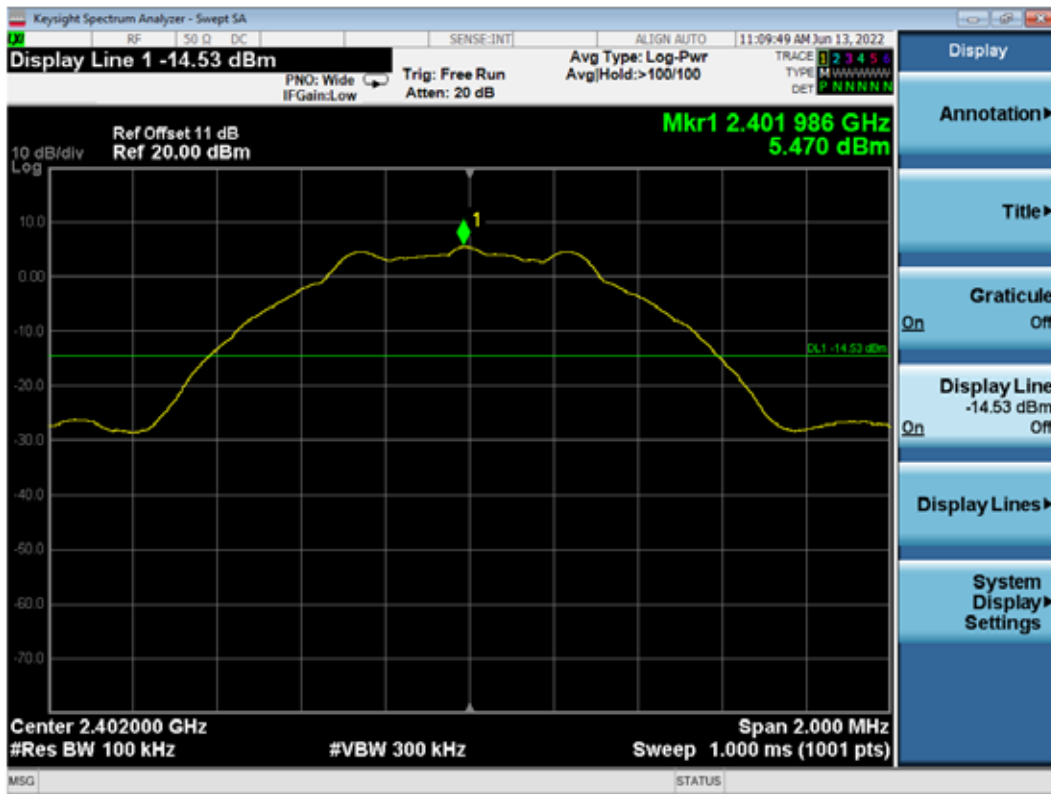

Emission level

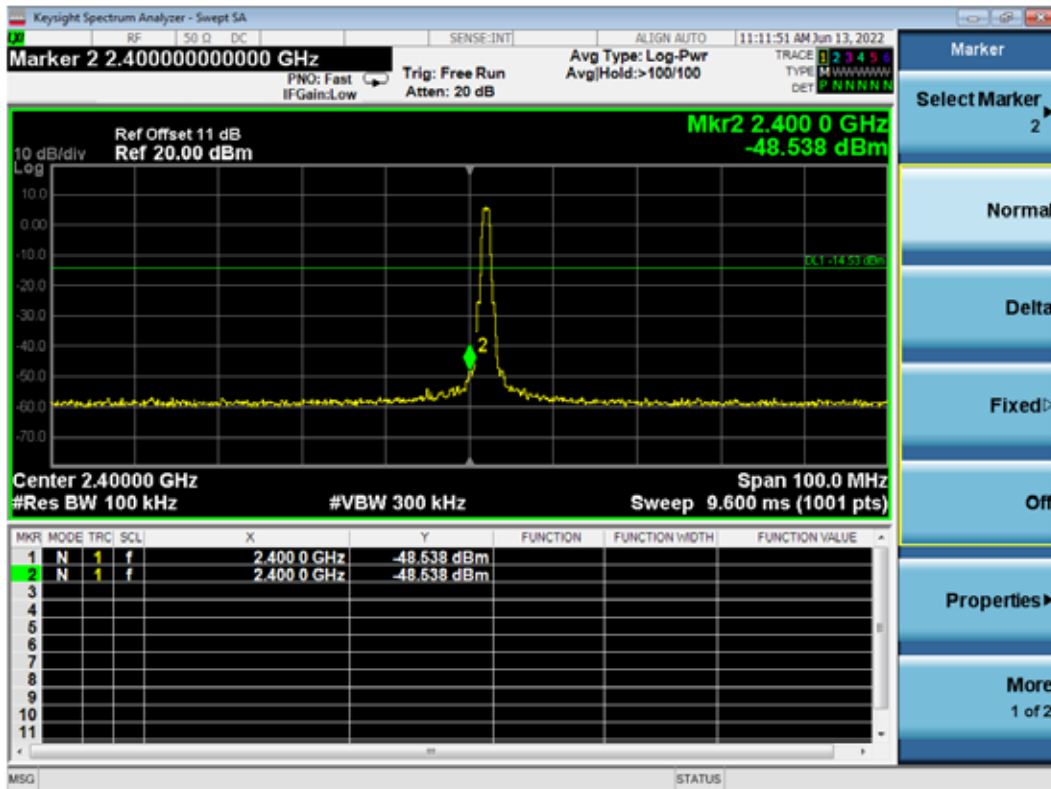

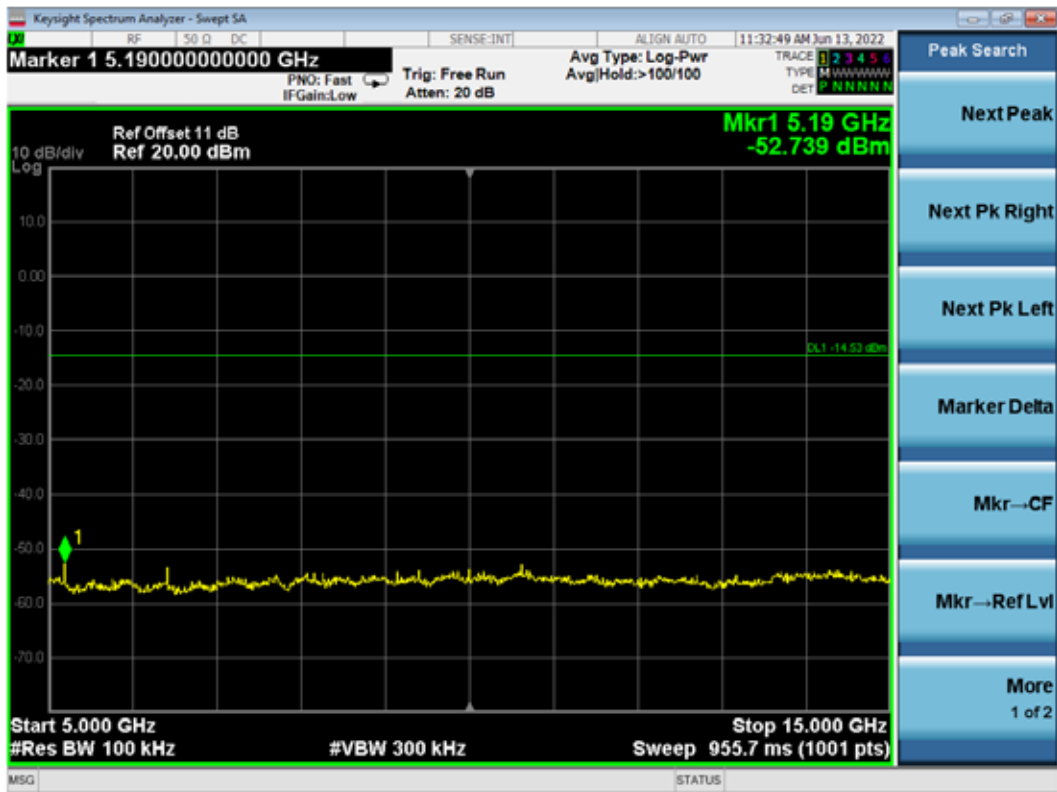





BLE CH2442MHz

Reference level



Emission level



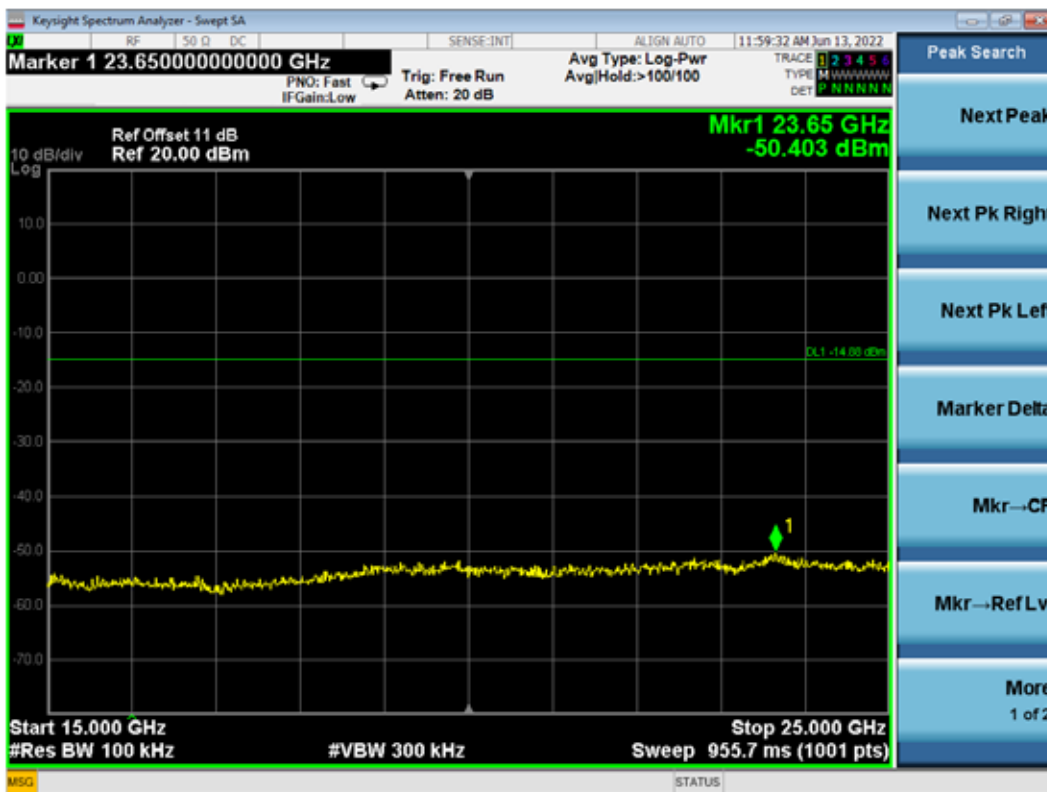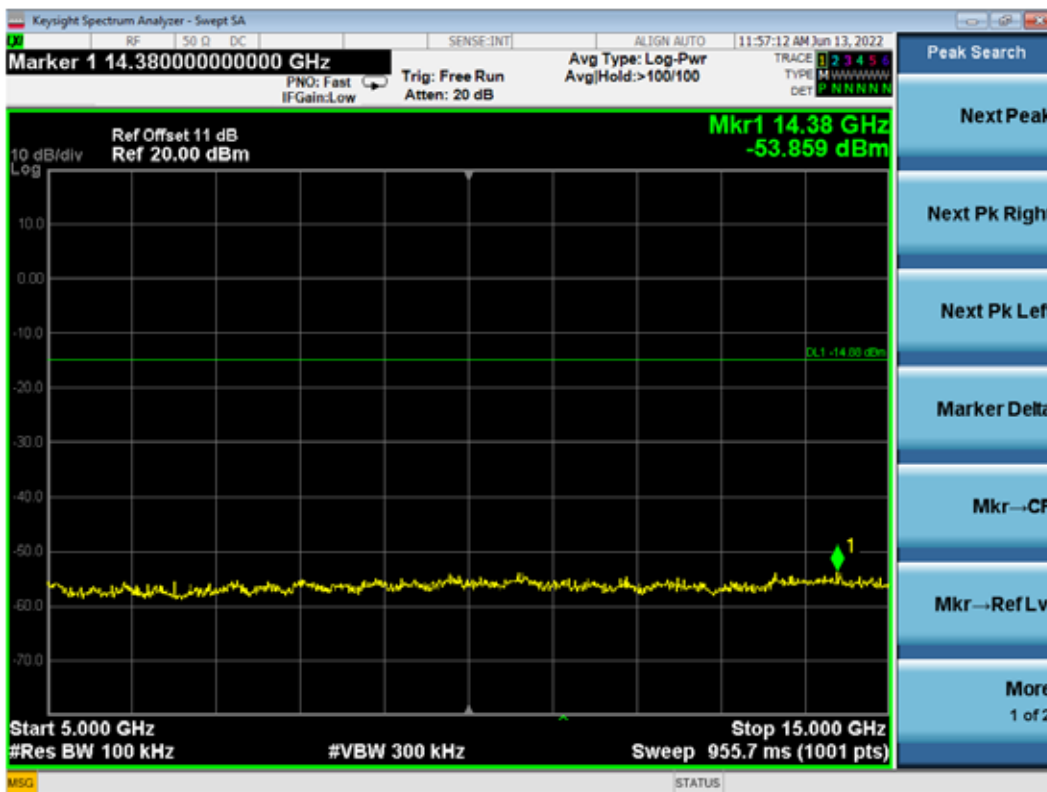


BLE CH2480MHz

Reference level



Emission level

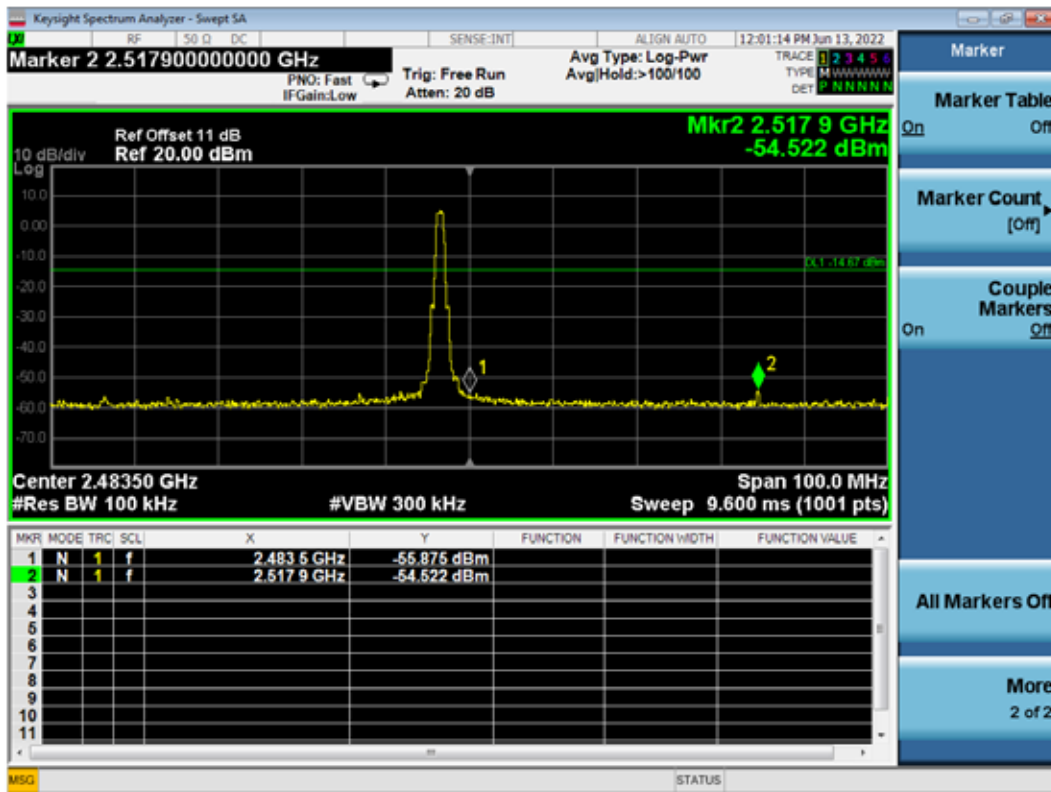





8 POWER SPECTRAL DENSITY MEASUREMENT

8.1 Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2021.09.16	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819-045	2022.03.08	1 Year
3.	10 dB Attenuator	Mini-Circuits	VAT-10W2+	001	2021.08.06	1 Year

8.2 Block Diagram of Test Setup

The Same as section 5.2.

8.3 Specification Limits (§15.247(e))

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

8.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

8.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

The test procedure is defined in ANSI C63.10-2020 (11.10.2 Measurement Procedure “Method PKPSD (peak PSD)” was used).

8.6 Test Results


PASSED.

All the test results are attached in next pages.


(Test Date: 2022.06.13 Temperature: 23°C Humidity: 51 %)

Modulation	Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit
BLE	00	2402	-10.021	8 dBm
	20	2442	-10.669	8 dBm
	39	2480	-10.823	8 dBm


BLE CH2402 MHz

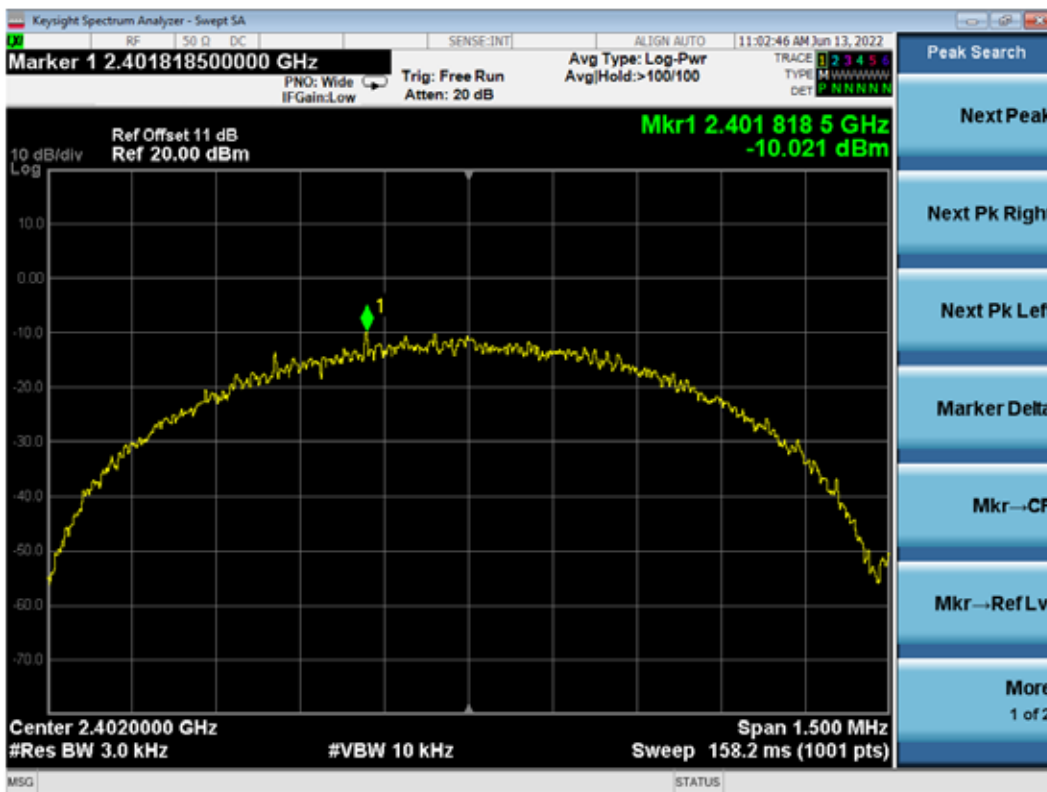

BLE CH2442 MHz

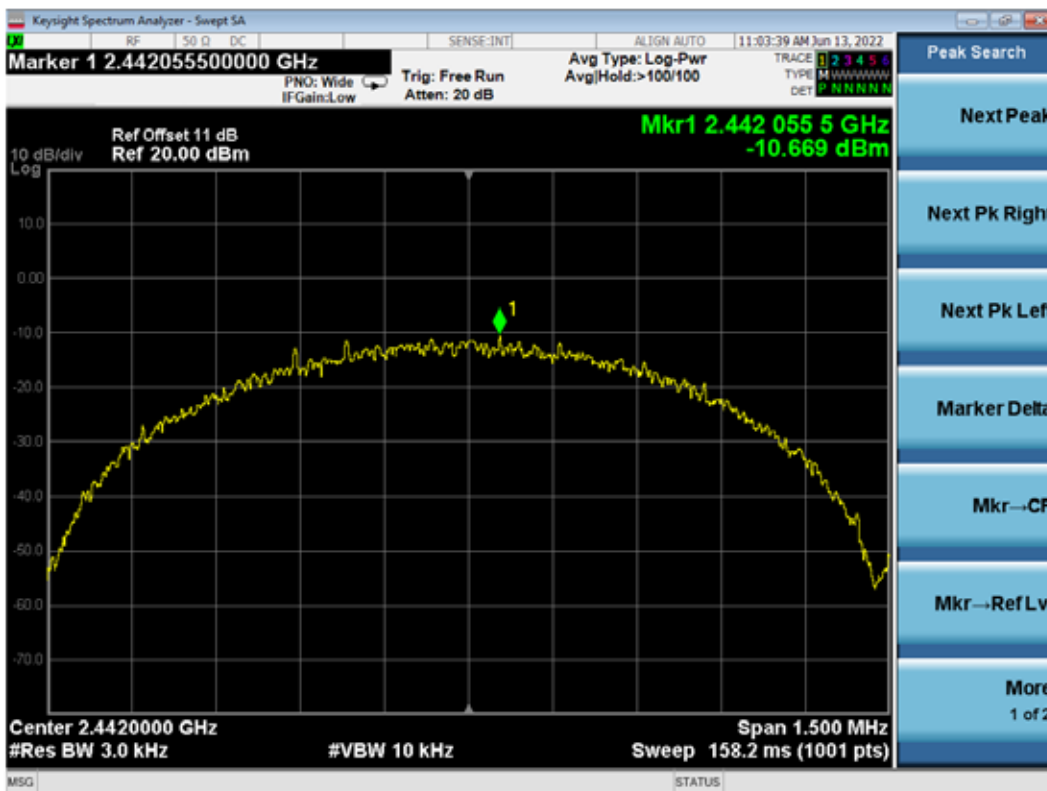

BLE CH2480 MHz

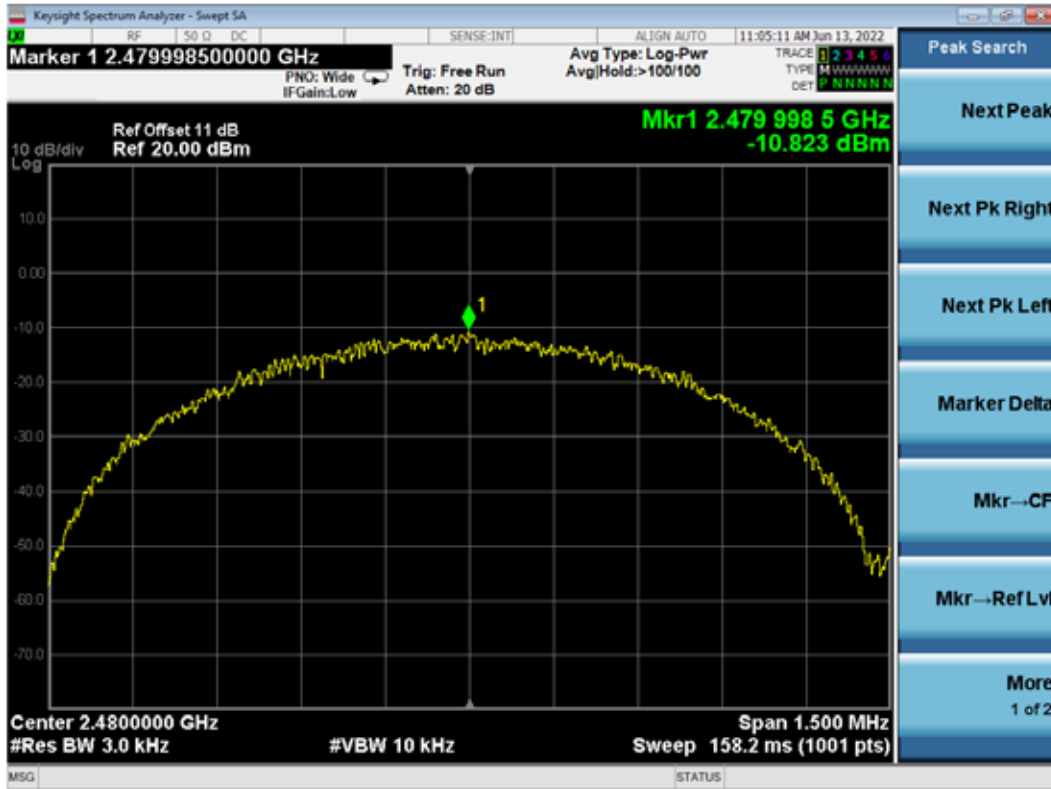

9 DEVIATION TO TEST SPECIFICATIONS

None.

10 MEASUREMENT UNCERTAINTY LIST

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.

The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Conducted Emission No.1 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Conducted Emission No.3 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Radiated Emission	30MHz~200MHz, Horizontal	±3.8 dB
	30MHz~200MHz, Vertical	±4.1 dB
	200MHz~1000MHz, Horizontal	±3.6 dB
	200MHz~1000MHz, Vertical	±5.1 dB
	1GHz~6GHz	±5.3 dB
	6GHz~18GHz	±5.3 dB
	18GHz~40GHz	±3.5 dB
Output Power Test	50MHz~18GHz	0.77 dB
Power Density Test	9kHz~6GHz	1.08 dB
RF Frequency Test	9kHz~40GHz	6×10^{-4}
Bandwidth Test	9kHz~6GHz	1.5×10^{-3}
RF Radiated Power Test	30MHz~1000MHz	3.06 dB
Conducted Output Power Test	50MHz~18GHz	0.83 dB
AC Voltage(<10kHz) Test	120V~230V	0.04 %
DC Power Test	0V~30V	0.4 %
Temperature	-40°C~+100°C	0.52 °C
Humidity	30%~95%	2.6 %