

TEST REPORT

On behalf of

GE Lighting

Product Name: Remote Control

Model No.: PUU-RGBREMOTE

FCC ID: PUU-RGBREMOTE

Prepared For: GE Lighting
1975 Noble Road, Cleveland, OH 44077, USA

Prepared By: Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg, 680 Guiping Rd., Caohejing Hi-Tech
Park, Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491



File No. : C1D1901006
Report No. : ACI-F19011
Date of Test : 2018.12.12-25
Date of Report : 2019.01.08

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS.....	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Equipment Under Test.....	5
2.2 Description of Test Facility	5
2.3 Measurement Uncertainty	6
3 RADIATED EMISSION AND FUNDAMENTAL FREQUENCY	7
3.1 Test Equipment.....	7
3.2 Block Diagram of Test Setup	7
3.3 Radiated Emission Limit (§15.209)	8
3.4 Test Configuration.....	9
3.5 Operating Condition of EUT	9
3.6 Test Procedures	9
3.7 Test Results	10
4 EMISSION BANDWIDTH.....	16
4.1 Test Equipment.....	16
4.2 Block Diagram of Test Setup	16
4.3 Specification Limits (§15.247(a)(2)).....	16
4.4 Operating Condition of EUT	16
4.5 Test Procedure	16
4.6 Test Results	17
5 PERIODIC OPERATED	18
5.1 Test Equipment.....	18
5.2 Block Diagram of Test Setup	18
5.3 Specification Limits ((§15.247(b)(3))	18
5.4 Operating Condition of EUT	18
5.5 Test Procedure.....	18
5.6 Test Results	19
6 DEVIATION TO TEST SPECIFICATIONS	20

TEST REPORT

Applicant : GE Lighting
 EUT Description : Remote Control
 (A) Model No. : Refer to Sec.2.1
 (B) Power Supply : DC 5V
 (C) Test Voltage : DC 5V

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART C
 AND ANSI C63.10-2013*


The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.


The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT to be technically compliance with the FCC limits.

This report applies to above tested Sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

Date of Test : 2018.12.12-25 Date of Report : 2019.01.08

Producer : 
 JAREY LU / Supervisor

Reviewer : 
 BYRON WU / Deputy Assistant Manager

 For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory : 
Authorized Signature(s) BYRON KWO/Assistant General Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Emission	FCC Rules And Regulations Part 15 Subpart C And ANSI C63.10:2013	N/A	15.207
Radiated Emission and Fundamental Frequency	FCC Rules And Regulations Part 15 Subpart C And ANSI C63.10:2013	Pass	15.209(a) 15.231(b)
Emission Bandwidth	FCC Rules And Regulations Part 15 Subpart C And ANSI C63.10:2013	Pass	15.231(c)
Periodic Operated	FCC Rules And Regulations Part 15 Subpart C And ANSI C63.10:2013	Pass	15.231(a)(1)
Antenna Requirement	FCC Rules And Regulations Part 15 Subpart C And ANSI C63.10:2013	Pass	15.203
N/A is an abbreviation for Not Applicable.			

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : Remote Control

Type of EUT : Production Pre-product Pro-type

Model Number : PUU-RGBREMOTE

Test Model : PUU-RGBREMOTE

Operating Freq. : 433.92MHz

Tested Freq. : 433.92MHz

Modulation : OOK

Antenna : Antenna Type: Antenna on-board
Antenna Gain: -20 dBi
The Antenna is permanently attached that is comply with 15.203.

Test Mode : The EUT was a transmitter.

Applicant : GE Lighting
1975 Noble Road, Cleveland, OH 44077, USA

Manufacturer : same as Applicant

Factory : Shenzhen H&T Intelligent Control Co., Ltd.
H&T Industrial Park, NO.18 Bao Shan Road,
Tian Liao Comuunity, Guangming New District,
Shenzhen, Guangdong, China, 518106

2.2 Description of Test Facility

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F and 4F, 34Bldg, 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China.

Accredited by NVLAP, Lab Code : 200371-0

FCC Designation Number : CN5027

Test Firm Registration Number : 954668

2.3 Measurement Uncertainty

Conducted Disturbance Expanded Uncertainty (0.15-30MHz):

$$U = 3.4\text{dB}$$

Radiated Emission Expanded Uncertainty (30-1000MHz):

$$U = 3.99\text{dB}$$

Radiated Emission Expanded Uncertainty (1000M-26.5GHz):

$$U = 4.98\text{dB}$$

6 dB Bandwidth Expanded Uncertainty

$$: U = 6 \times 10^{-8} \text{MHz}$$

Maximum Peak Output Power Expanded Uncertainty

$$: U = 0.84 \text{dB}$$

Power Spectral Density Expanded Uncertainty

$$: U = 0.38 \text{dB}$$

3 RADIATED EMISSION AND FUNDAMENTAL FREQUENCY


3.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Preamplifier	Agilent	8447D	2944A06664	Apr 27, 2018	Apr 26, 2019
2.	Preamplifier	HP	8449B	3008A00864	Mar 8, 2018	Mar 7, 2019
3.	Spectrum Analyzer	Agilent	N9030A	MY53120367	Aug 23, 2018	Aug 22, 2019
4.	Test Receiver	R&S	ESCI	101303	Apr 26, 2018	Apr 25, 2019
5.	Bi-log Antenna	Schwarz beck	VULB 9168	708	Jul 20, 2018	Jul 19, 2019
6.	Horn Antenna	EMCO	3115	9607-4878	Jun 02, 2018	Jun 01, 2019
7.	Horn Antenna	EMCO	3116	00062643	Sep 08, 2017	Sep 08, 2019
8.	Software	Audix	E3	SET00200 9912M295-2	--	--

3.2 Block Diagram of Test Setup

3.2.1 Below 1GHz

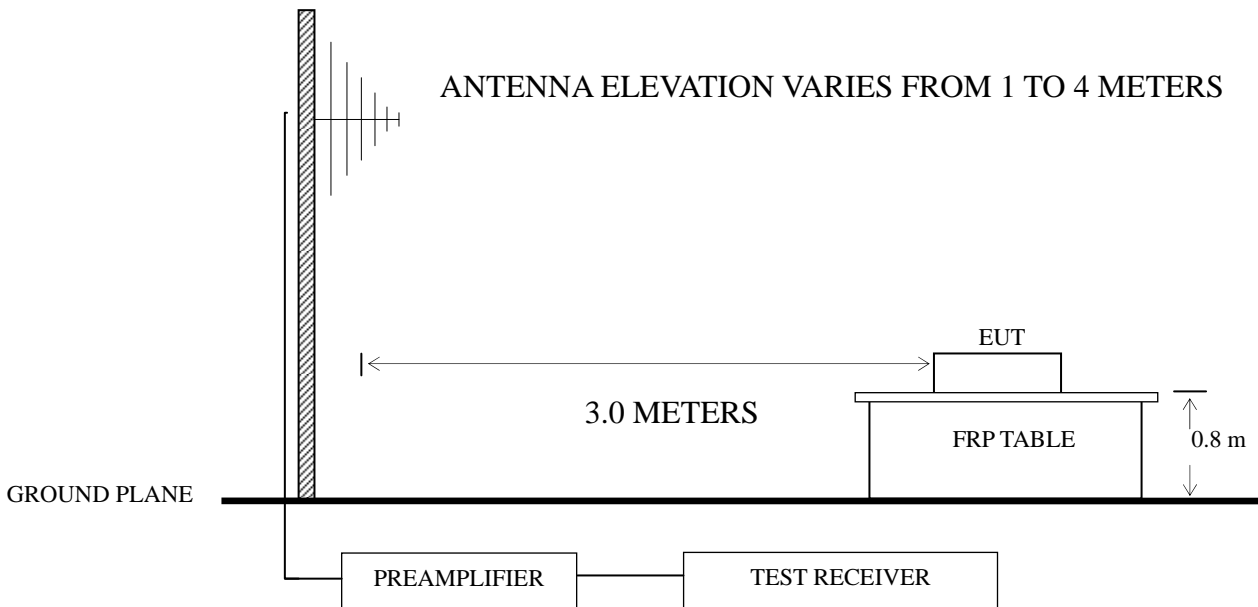

3.2.2 Above 1GHz

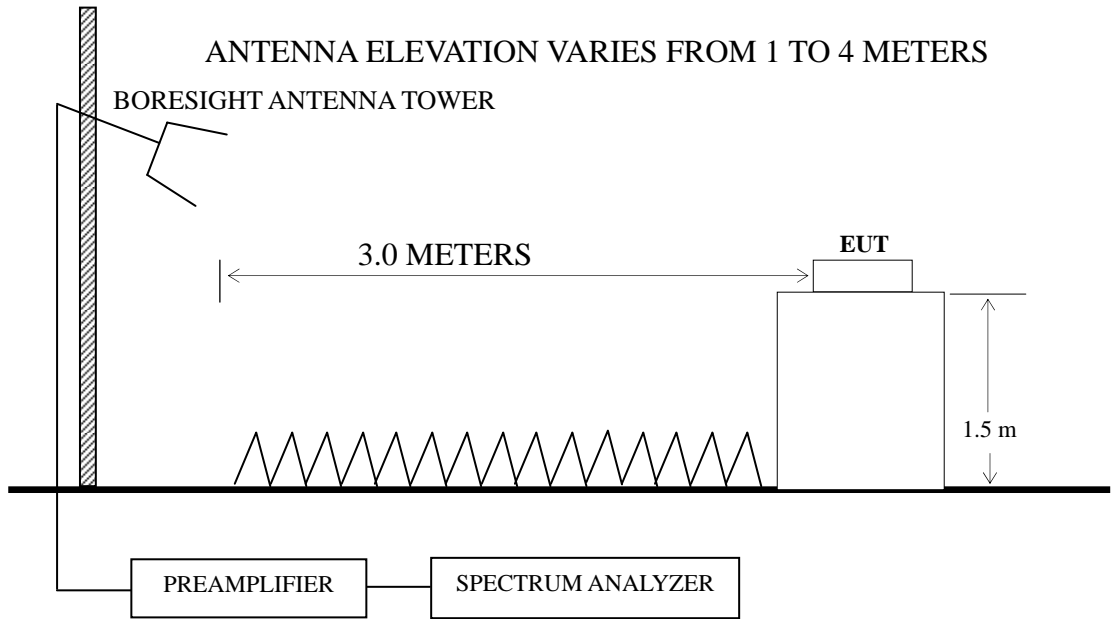

3.3 Radiated Emission Limit (§15.209)

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205 must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field strength limits ($\mu\text{V/m}$)	
		($\mu\text{V/m}$)	dB($\mu\text{V/m}$)
0.009 ~ 0.490	300	$67.6 - 20 \log f(\text{kHz})$	$2400/f \text{ kHz}$
0.490 ~ 1.705	30	$87.6 - 20 \log f(\text{kHz})$	$24000/f \text{ kHz}$
1.705 ~ 30	30	29.5	30
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ($\mu\text{V}/\text{m}$) = 20 log Emission Level ($\mu\text{V}/\text{m}$)
NOTE 2 - The tighter limit applies at the band edges.
NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.
NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹:Linear Interpolations

NOTE 1 - Emission Level dB ($\mu\text{V}/\text{m}$) = 20 log Emission Level ($\mu\text{V}/\text{m}$)
NOTE 2 - The tighter limit applies at the band edges.
NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
NOTE 4 - Where limit of Fundamental Freq. is calculated by: $41.6667 \times 433.92 - 7083.3333 = 10996.681164 \mu\text{V}/\text{m} = 80.83 \text{dB} \mu\text{V}/\text{m}$
NOTE 5 - The limits in this table are based on CFR 47 Part 15.231(b).

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.4.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 4.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average

correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10: 2013 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESCI was set at 9 kHz from 9kHz to 30MHz.

The bandwidth of Test Receiver R&S ESCI was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of the VBW was set at 1MHz and RBW was set at 1MHz for peak emission measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emission above 1GHz for Spectrum Agilent N9010A.

The frequency range from 30 MHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

For Emission above 1GHz, Average Emission Level = Peak Emission Level + DCCF, as DCCF(Duty Cycle Correction Factor) = $20\log(TX_{on} / TX_{on+off})$.



3.7 Test Results



<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

DCCF:

TX _{on} (ms)	TX _{on+off} (ms)	DCCF
19.4*1+0.748*16+2.1*17 =67.068	113.2	-4.55
DCCF(Duty Cycle Correction Factor) = 20log(TX _{on} / TX _{on+off})		

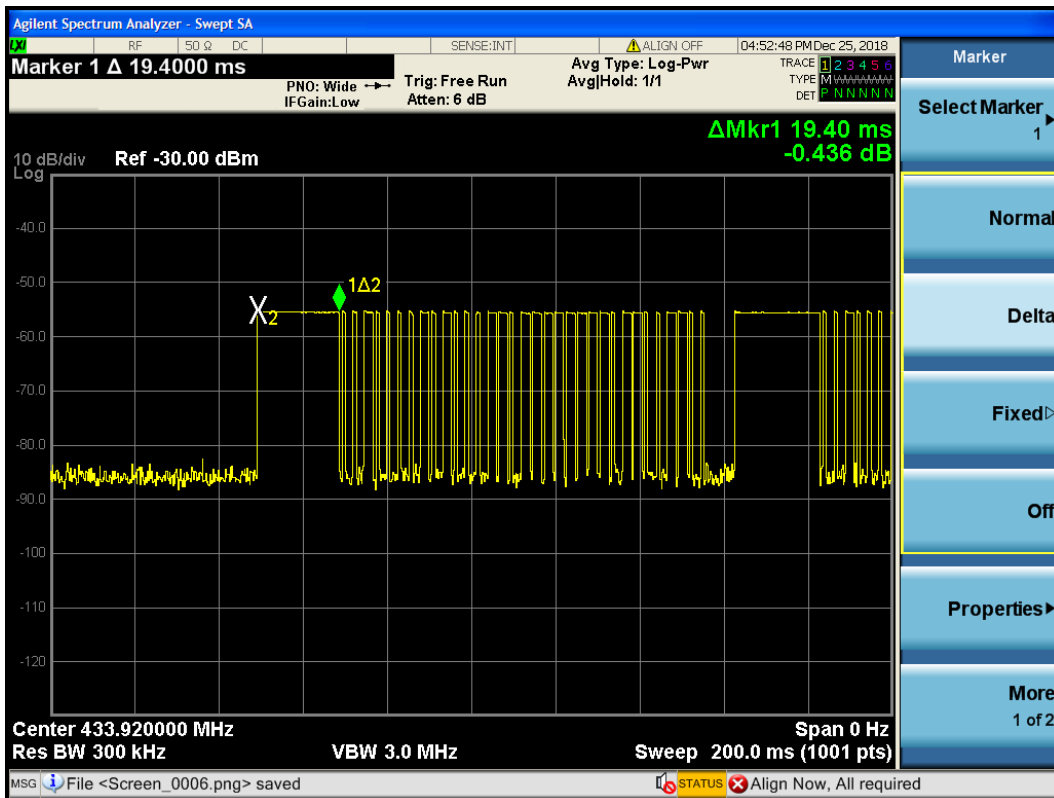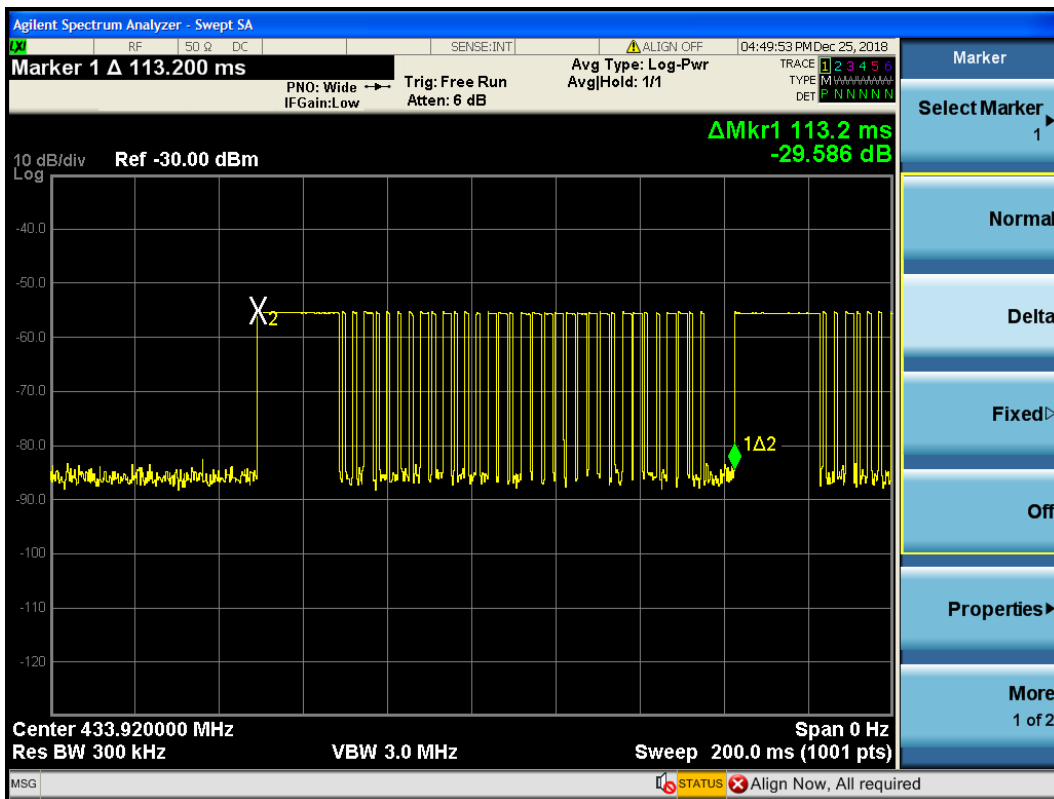

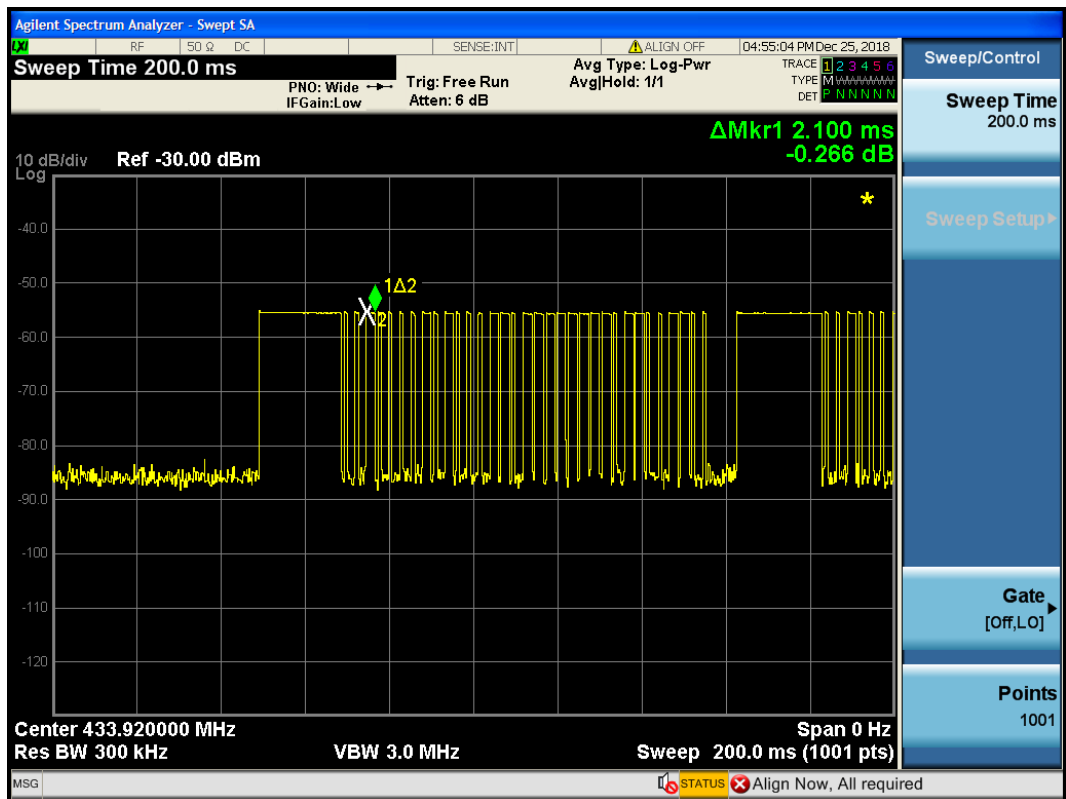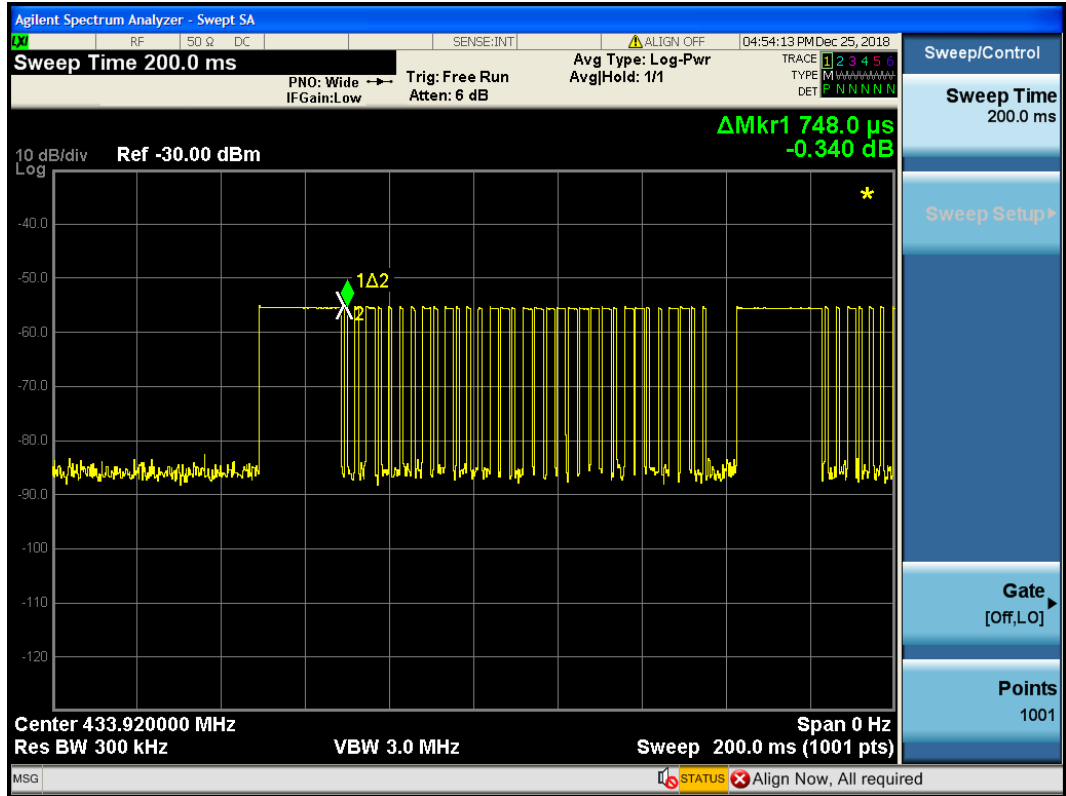

Worst case emission < 1GHz

EUT : Remote Control Temperature : 22°C
 Model No. : PUU-RGBREMOTE Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2018.12.21

Polarization	Frequency (MHz)	Meter Reading dB (µV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)	Remark
Horizontal	34.396	23.34	17.97	0.64	28.17	13.78	40	-26.22	QP
	50.942	23.08	19.25	0.77	28.14	14.96	40	-25.04	QP
	63.983	23.01	18.8	0.86	28.1	14.57	40	-25.43	QP
	145.351	22.99	20.02	1.34	27.63	16.72	43.5	-26.78	QP
	245.09	25.02	19.02	1.72	27.19	18.57	46	-27.43	QP
	411.824	23.99	21.86	2.22	27.65	20.42	46	-25.58	QP
Vertical	34.037	29.74	18.1	0.63	28.17	20.3	40	-19.7	QP
	54.071	29.48	19.7	0.79	28.13	21.84	40	-18.16	QP
	63.092	24.25	18.7	0.85	28.1	15.7	40	-24.3	QP
	132.685	30.69	18.51	1.27	27.7	22.77	43.5	-20.73	QP
	244.232	23.29	19	1.72	27.2	16.81	46	-29.19	QP
	502.94	22.76	23.74	2.42	28	20.92	46	-25.08	QP

Radiated Emission > 1GHz

EUT : Remote Control Temperature : 22°C
 Model No. : PUU-RGBREMOTE Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2018.12.21

Polarization	Frequency (MHz)	Meter Reading dB (µV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)	Remark
Horizontal	1501.898	46.97	26.37	4.19	37.68	39.85	74	-34.15	Peak
	1848.868	47.03	27.77	4.55	37.15	42.2	74	-31.8	Peak
	2199.817	46.08	28.69	4.95	36.87	42.85	74	-31.15	Peak
	3262.72	45.63	31.12	6.11	36.48	46.38	74	-27.62	Peak
	4369.367	44.03	32.91	7.16	36	48.1	74	-25.9	Peak
	5655.516	43.4	34.86	8.41	36.84	49.83	74	-24.17	Peak
Vertical	1430.969	47.71	25.93	4.08	37.8	39.92	74	-34.08	Peak
	1633.855	47.71	26.86	4.34	37.47	41.44	74	-32.56	Peak
	2203.762	47.33	28.69	4.95	36.87	44.1	74	-29.9	Peak
	2909.23	46.09	30.3	5.73	36.77	45.35	74	-28.65	Peak
	4009.288	43.85	32.42	6.84	35.76	47.35	74	-26.65	Peak
	5535.214	43.24	34.73	8.32	36.76	49.53	74	-24.47	Peak

Polarization	Frequency (MHz)	Peak Emission Level dB (µV/m)	Duty Cycle Correction Factor (dB)	Average Emission Level dB (µV/m)	Limits dB (µV/m)	Margin (dB)	Remark
Horizontal	1501.898	39.85	-4.55	35.3	54	18.7	Average
	1848.868	42.2	-4.55	37.65	54	16.35	Average
	2199.817	42.85	-4.55	38.3	54	15.7	Average
	3262.72	46.38	-4.55	41.83	54	12.17	Average
	4369.367	48.1	-4.55	43.55	54	10.45	Average
	5655.516	49.83	-4.55	45.28	54	8.72	Average
Vertical	1430.969	39.92	-4.55	35.37	54	18.63	Average
	1633.855	41.44	-4.55	36.89	54	17.11	Average
	2203.762	44.1	-4.55	39.55	54	14.45	Average
	2909.23	45.35	-4.55	40.8	54	13.2	Average
	4009.288	47.35	-4.55	42.8	54	11.2	Average
	5535.214	49.53	-4.55	44.98	54	9.02	Average

Fundamental frequency:

EUT : Remote Control Temperature : 22°C
 Model No. : PUU-RGBREMOTE Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2018.12.21

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	433.915	87.51	22.4	2.26	27.74	84.43	100.83	16.4	Peak
Vertical	433.921	84.06	22.4	2.26	27.74	80.98	100.83	19.85	Peak

Polarization	Frequency (MHz)	Peak Emission Level dB (μV/m)	Duty Cycle Correction Factor (dB)	Average Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	433.915	84.43	-4.55	79.88	80.83	0.95	Average
Vertical	433.921	80.98	-4.55	76.43	80.83	4.4	Average

TEST ENGINEER: Jarey


4 EMISSION BANDWIDTH

4.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A	MY53120367	Aug 23, 2018	Aug 22, 2019

4.2 Block Diagram of Test Setup



4.3 Specification Limits (§15.247(a)(2))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

4.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

4.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of 99% power bandwidth was measure by spectrum analyzer with settings: Span = between 1.5 times and 5.0 times of the OBW, RBW = 1% to 5% of the OBW, VBW $\geq 3 \times$ RBW, Detector = Peak, Trace = Max Hold.

Use the -20dB power bandwidth function of the instrument and report the measured bandwidth.


4.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2018.12.25 Temperature: 23°C Humidity: 51 %)

Modulation	Frequency (MHz)	20dB Bandwidth (kHz)	Tolerance (%)	Limit (%)
OOK	433.92	48.45	0.011	0.25

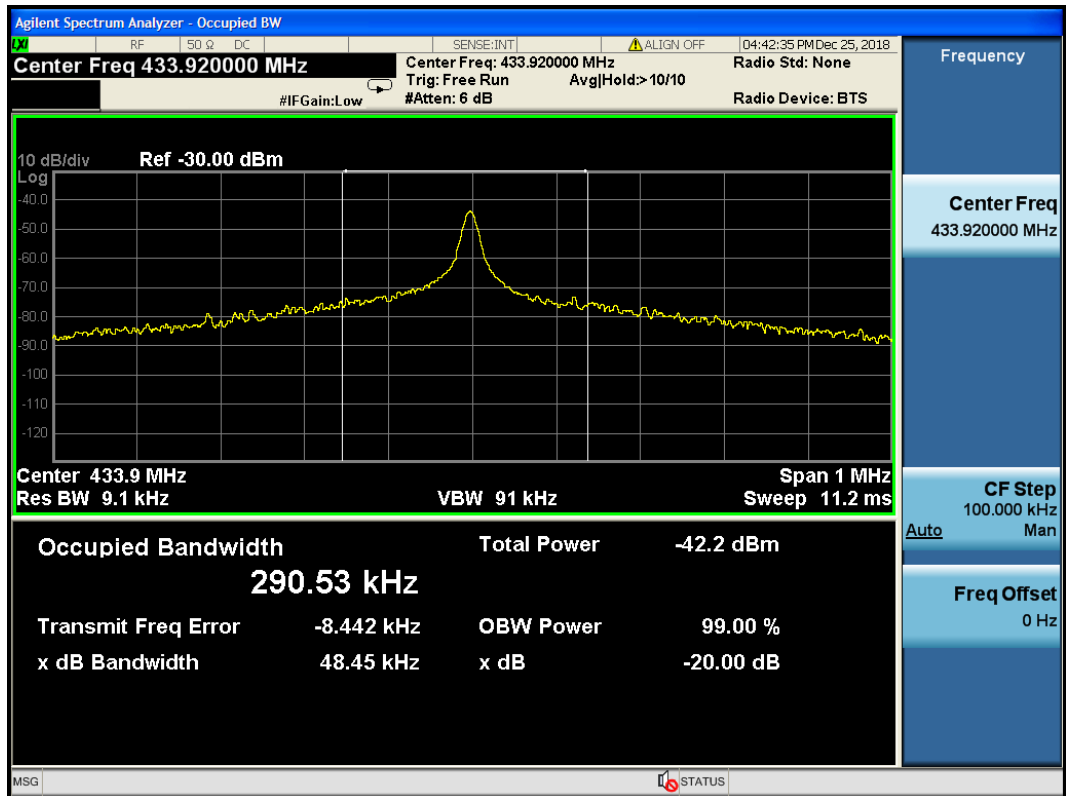

5 PERIODIC OPERATED

5.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A	MY53120367	Aug 23, 2018	Aug 22, 2019

5.2 Block Diagram of Test Setup

The Same as Section. 4.2.

5.3 Specification Limits ((§15.247(b)(3))

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released.

5.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

5.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:


- a) Set the RBW \geq 100kHz.
- b) Set VBW \geq [3 × RBW].
- c) Set span = 0.
- d) Sweep time \geq 5s.
- e) Detector = peak.
- f) Trace mode = clear/write.
- g) Sweep = Single sweep.
- h) Use delta marker function to determine the peak amplitude level.

5.6 Test Results

PASSED. All the test results are listed below.

(Test Date: 2018.12.25 Temperature: 23°C Humidity: 51 %)

Modulation	Frequency (MHz)	Periodic Operated (ms)	Limit (s)
OOK	433.92	590	5

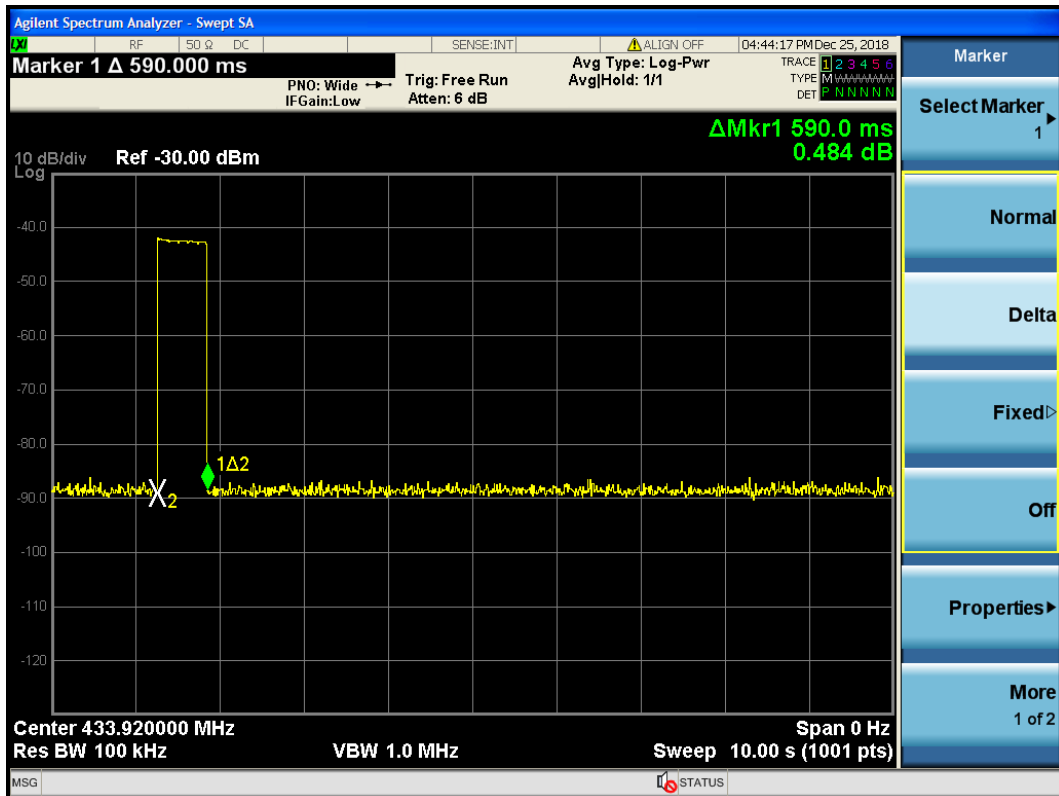

6 DEVIATION TO TEST SPECIFICATIONS

None.