



TESTING LABORATORY  
CERTIFICATE#4323.01



FCC PART 15.247

## TEST REPORT

For

**JiangSu HuiTong Group Co.,Ltd**

24#,2 block TaoHuawu new district,ZhenJiang City, JiangSu,P.R.C,ZhenJiang,  
China

**FCC ID: PUW-HTMD005A**

<b>Report Type:</b> Original Report	<b>Product Type:</b> NXP5169 Module
<b>Test Engineer:</b> Max Min	<i>Max Min</i>
<b>Report Number:</b> RSHA180830005-00A	
<b>Report Date:</b> 2018-09-18	
<b>Reviewed By:</b> Oscar Ye RF Leader	<i>Oscar Ye</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    RELATED SUBMITTAL(S)/GRANT(S).....4

    TEST METHODOLOGY .....4

    MEASUREMENT UNCERTAINTY .....5

    TEST FACILITY .....5

**SYSTEM TEST CONFIGURATION.....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EQUIPMENT MODIFICATIONS .....6

    EUT EXERCISE SOFTWARE .....6

    SUPPORT EQUIPMENT LIST AND DETAILS .....9

    EXTERNAL I/O CABLE.....9

    BLOCK DIAGRAM OF TEST SETUP .....9

    BLOCK DIAGRAM OF TEST SETUP .....10

**SUMMARY OF TEST RESULTS .....11**

**TEST EQUIPMENT LIST .....12**

**FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....13**

**FCC §15.203 - ANTENNA REQUIREMENT.....14**

    APPLICABLE STANDARD .....14

    ANTENNA CONNECTOR CONSTRUCTION .....14

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....15**

    APPLICABLE STANDARD .....15

    EUT SETUP.....15

    EMI TEST RECEIVER SETUP.....15

    TEST PROCEDURE .....15

    CORRECTED FACTOR & MARGIN CALCULATION .....16

    TEST RESULTS SUMMARY .....16

    TEST DATA .....16

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....19**

    APPLICABLE STANDARD .....19

    EUT SETUP .....19

    EMI TEST RECEIVER SETUP.....20

    TEST PROCEDURE .....20

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....20

    TEST RESULTS SUMMARY .....20

    TEST DATA .....21

**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....29**

    APPLICABLE STANDARD .....29

    TEST PROCEDURE .....29

    TEST DATA .....29

**FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....32**

    APPLICABLE STANDARD .....32

    TEST PROCEDURE .....32

    TEST DATA .....32

**FCC §15.247(d) – BAND EDGE.....35**

---

APPLICABLE STANDARD .....	35
TEST PROCEDURE .....	35
TEST DATA .....	35
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>38</b>
APPLICABLE STANDARD .....	38
TEST PROCEDURE .....	38
TEST DATA .....	38

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	JiangSu HuiTong Group Co.,Ltd
Tested Model	HTMD-005A
Product Type	NXP5169 Module
Dimension	25 mm(L) × 16 mm(W) × 3 mm(H)
Power Supply	DC 3.3V

*\*All measurement and test data in this report was gathered from production sample serial number: 20180830005. (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-08-30)*

### Objective

This report is prepared on behalf of JiangSu HuiTong Group Co.,Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submittal/grant.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB558074 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

**SYSTEM TEST CONFIGURATION**

**Description of Test Configuration**

Channel list for Zigbee mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	...	...
...	...	...	...
...	...	...	...
...	...	25	2475
18	2440	26	2480

EUT was tested with Channel 11, 18, 25 and 26.

Note: Channel 25 is only tested “Maximum Conducted Output Power” and “Band Edge”.

**Equipment Modifications**

No modification was made to the EUT tested.

**EUT Exercise Software**


RF test tool: SecureCRT

The worst case was performed as below:

Channel	Power Level
Channel 11	-10
Channel 18	-10
Channel 25	-10
Channel 26	-28


Duty Cycle:

Low Channel: 2405MHz

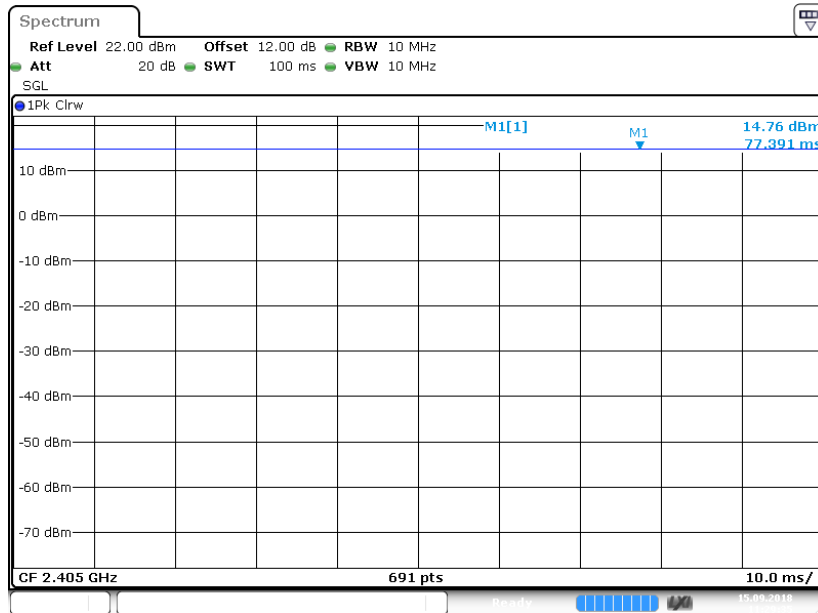


Date: 15.SEP.2018 11:29:35

Middle Channel: 2440MHz

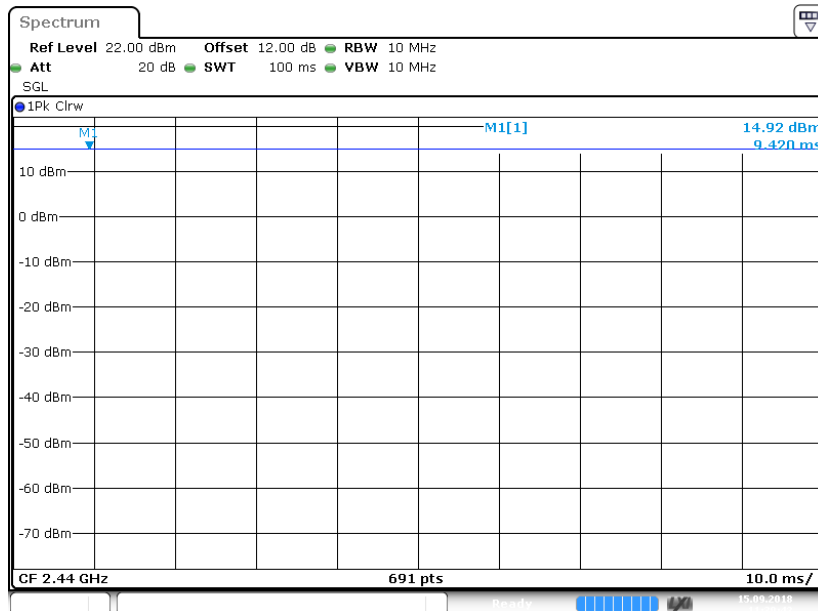

Date: 15.SEP.2018 11:39:43

High Channel: 2480MHz

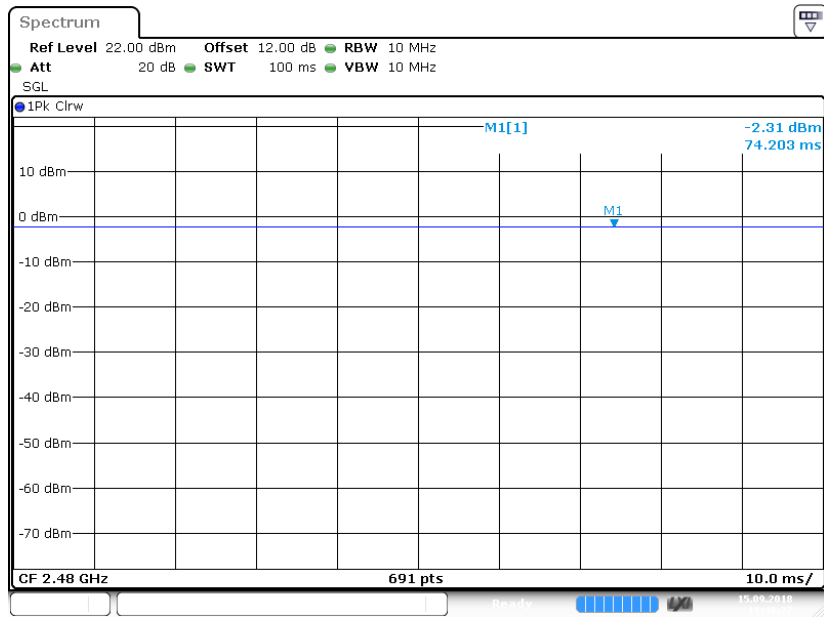

Date: 15 SEP 2018 11:48:27



Channel	Duty Cycle	T(us)	1/T(kHz)	10log(1/x)
Channel 11	100%	/	/	0
Channel 18	100%	/	/	0
Channel 26	100%	/	/	0

Note: “x” means the Duty Cycle.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
JiangSu HuiTong Group Co.,Ltd	Debug Board	/	/

**External I/O Cable**

Cable Description	Length (m)	From Port	To
Data Cable	0.3	EUT	Debug Board


**Block Diagram of Test Setup**

For Conducted Emissions:

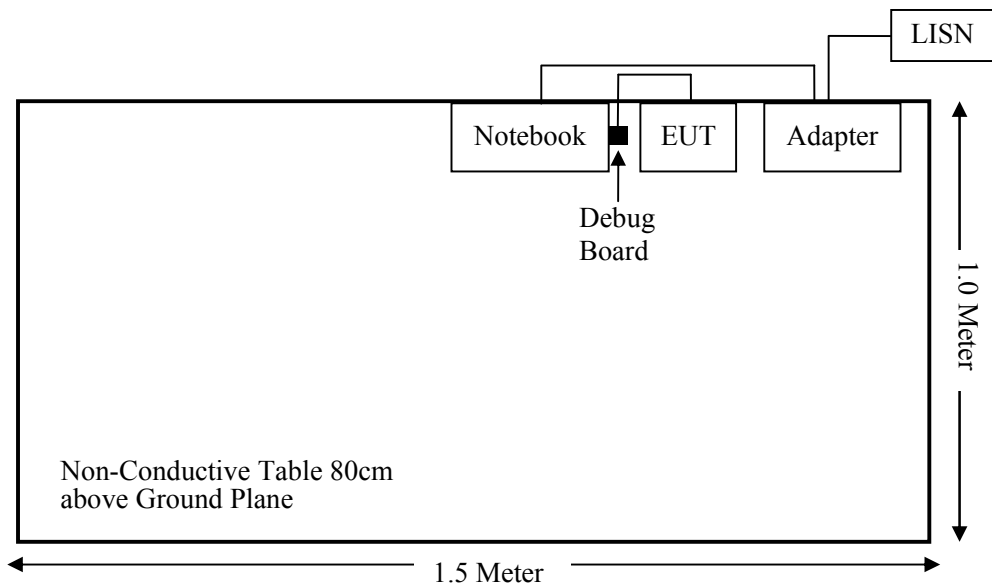


### Block Diagram of Test Setup

For Radiated Emissions (Below 1GHz):

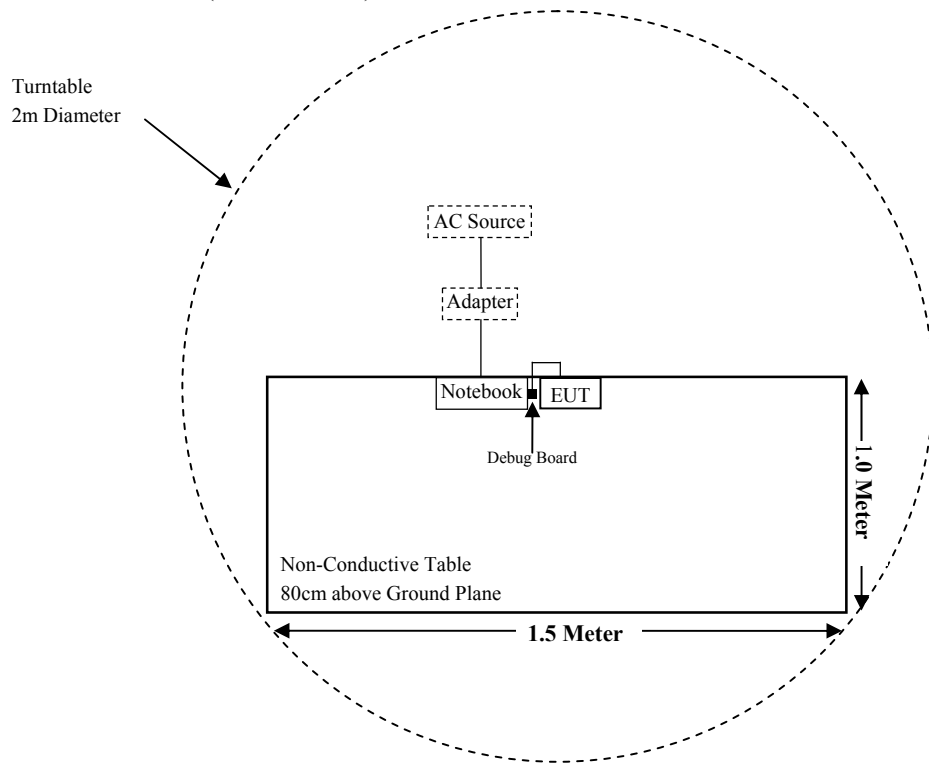

For Radiated Emissions(Above 1GHz):

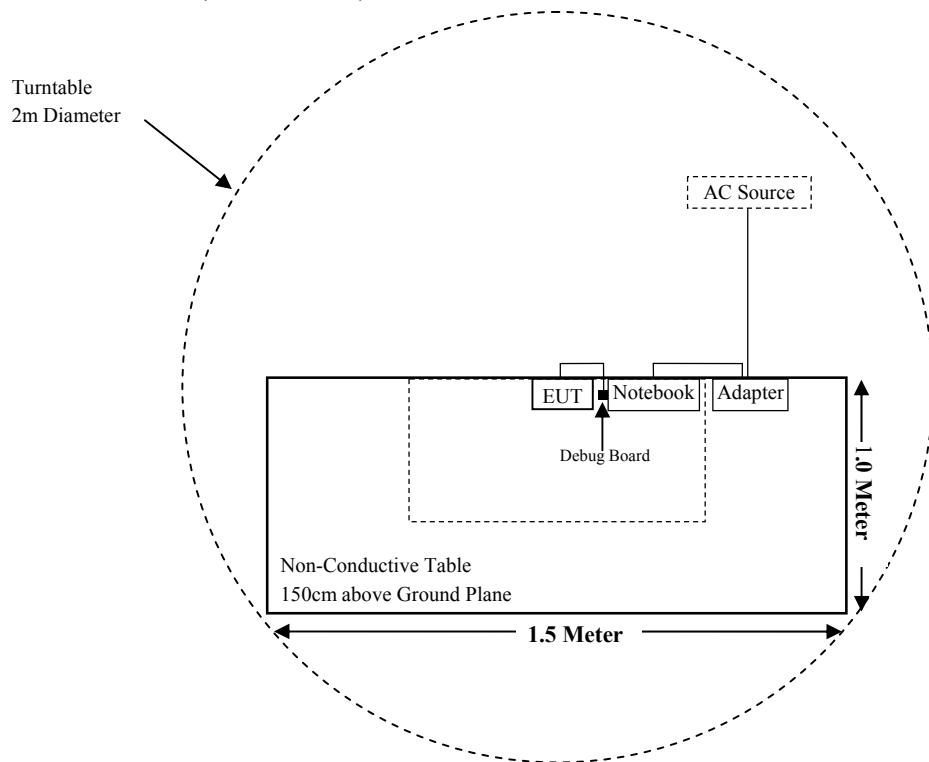

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band notch Filter	BRM50702	/	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	FSV40 Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
JiangSu HuiTong Group Co.,Ltd	RF Cable	HuiTongC01	C01	Each Time	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Antenna Gain</b>		<b>Target Output Power</b>		<b>Evaluation Distance (cm)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>MPE Limit (mW/cm<sup>2</sup>)</b>
		<b>(dBi)</b>	<b>(numeric)</b>	<b>(dBm)</b>	<b>(mW)</b>			
Zigbee	2405~2480	0	1.00	15.00	31.62	20	0.0251	1.0

**Note:** The target output power was declared by the manufacturer.

**Conclusion:** The EUT meets exemption requirement - RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by§ 2.1093.

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has a PCB antenna and the antenna gain is 0 dBi, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC §15.207(a)

**EUT Setup**

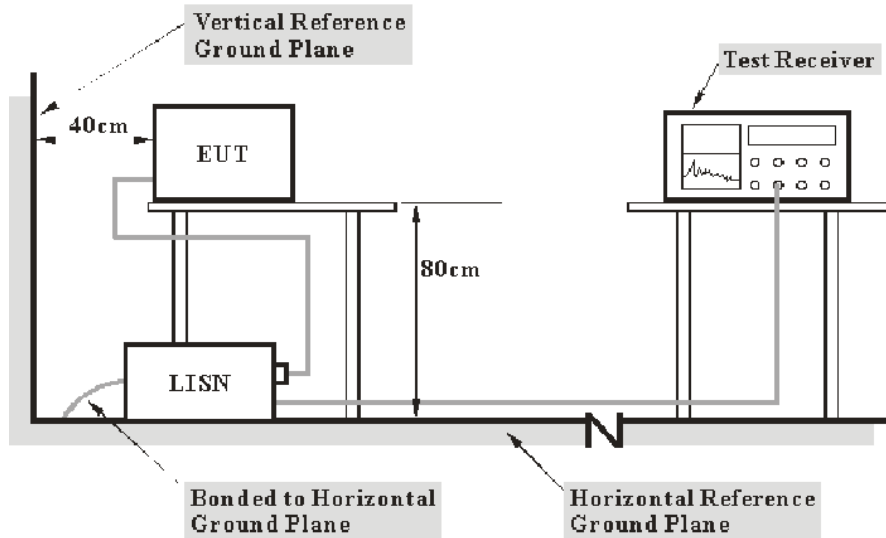

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

**Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	24.1 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.2kPa

*The testing was performed by Max Min on 2018-09-12.*

*EUT operation mode: Transmitting in channel 18. (Worst case)*




AC 120V/60 Hz, Line

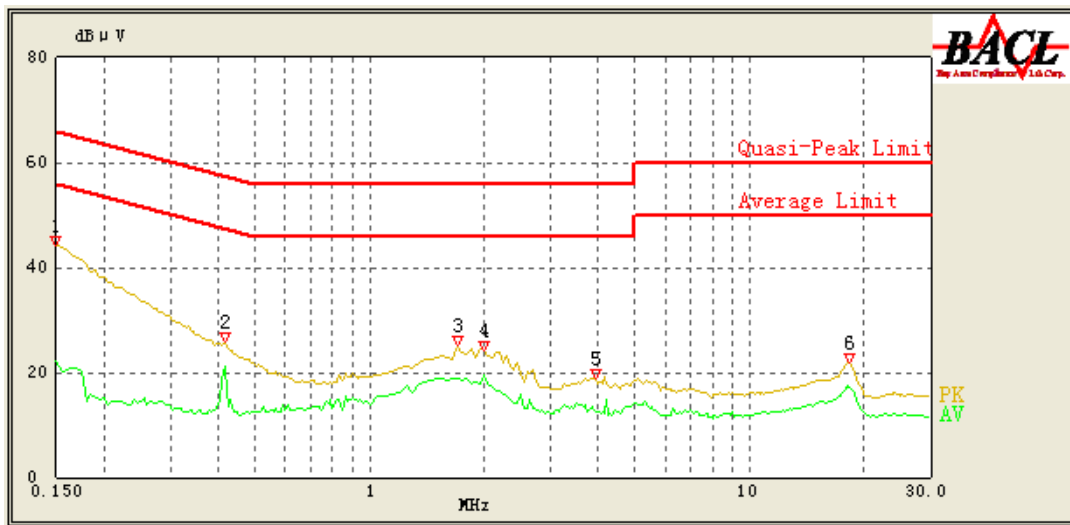

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	44.30	QP	9.000	L1	16.06	66.00	21.70	Compliance
0.150	22.02	AV	9.000	L1	16.06	56.00	33.98	Compliance
0.415	25.80	QP	9.000	L1	16.06	58.43	32.63	Compliance
0.415	21.22	AV	9.000	L1	16.06	48.43	27.21	Compliance
1.700	25.05	QP	9.000	L1	15.86	56.00	30.95	Compliance
1.700	18.97	AV	9.000	L1	15.86	46.00	27.03	Compliance
2.000	24.23	QP	9.000	L1	15.85	56.00	31.77	Compliance
2.000	19.46	AV	9.000	L1	15.85	46.00	26.54	Compliance
3.950	18.98	QP	9.000	L1	15.85	56.00	37.02	Compliance
3.950	12.48	AV	9.000	L1	15.85	46.00	33.52	Compliance
18.250	21.88	QP	9.000	L1	16.36	60.00	38.12	Compliance
18.150	17.31	AV	9.000	L1	16.35	50.00	32.69	Compliance

AC 120V/60 Hz, Neutral

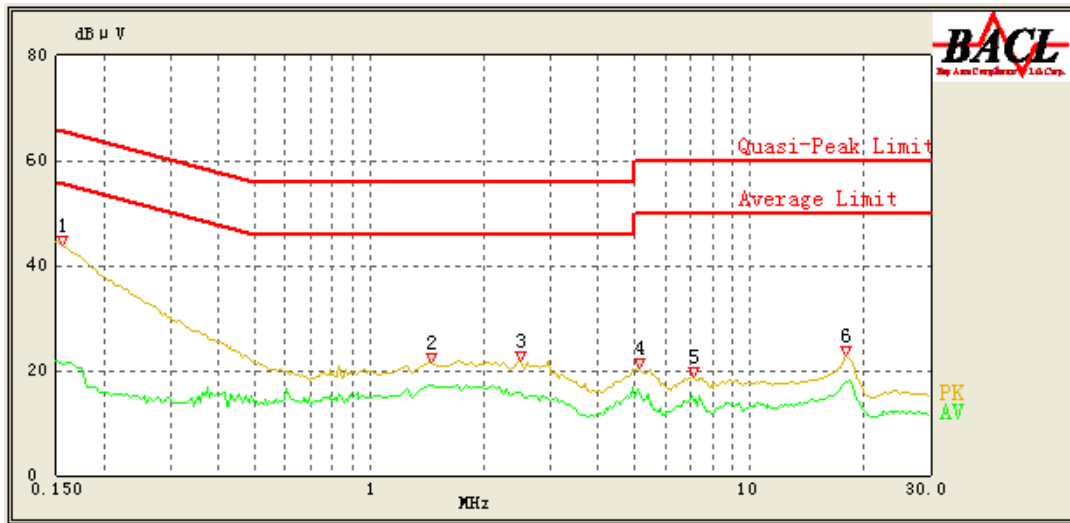

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.155	43.75	QP	9.000	N	16.06	65.86	22.11	Compliance
0.155	21.14	AV	9.000	N	16.06	55.86	34.72	Compliance
1.450	21.38	QP	9.000	N	15.93	56.00	34.62	Compliance
1.450	17.03	AV	9.000	N	15.93	46.00	28.97	Compliance
2.500	21.87	QP	9.000	N	15.90	56.00	34.13	Compliance
2.500	15.74	AV	9.000	N	15.90	46.00	30.26	Compliance
5.150	20.53	QP	9.000	N	15.87	60.00	39.47	Compliance
5.100	16.41	AV	9.000	N	15.87	50.00	33.59	Compliance
7.100	18.70	QP	9.000	N	15.92	60.00	41.30	Compliance
7.100	14.13	AV	9.000	N	15.92	50.00	35.87	Compliance
18.000	22.78	QP	9.000	N	16.10	60.00	37.22	Compliance
18.000	17.96	AV	9.000	N	16.10	50.00	32.04	Compliance

**Note:**

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1 GHz:

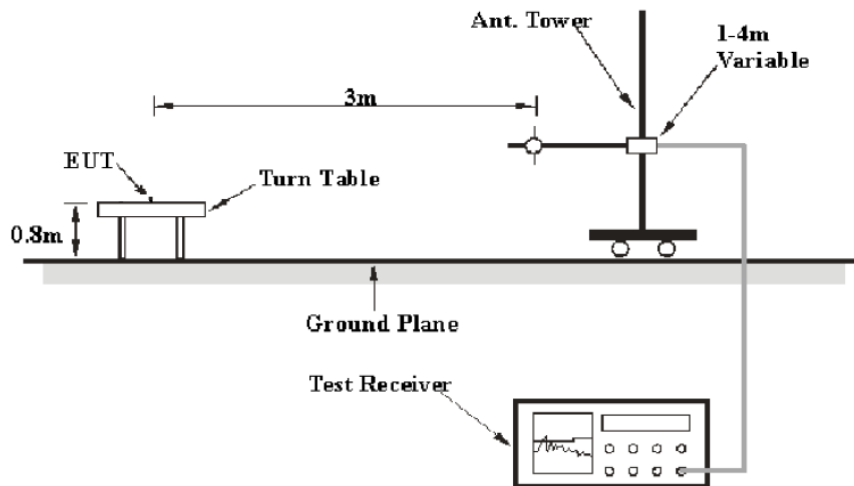

#### Above 1GHz:

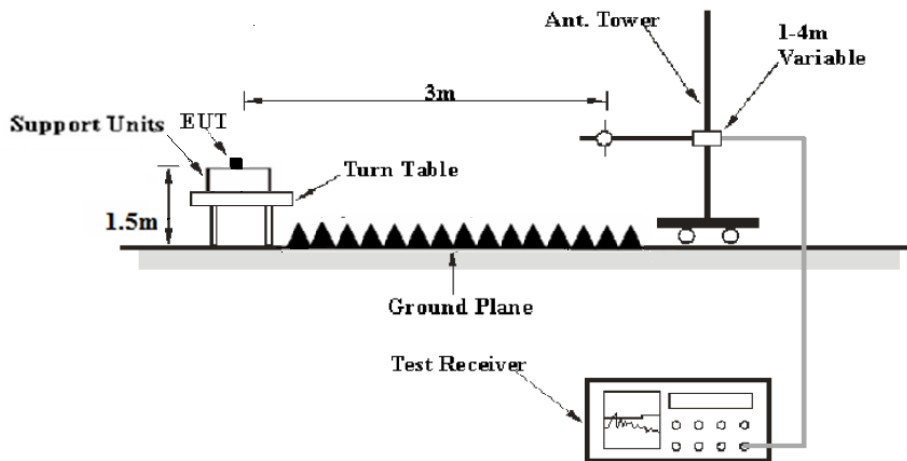

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	/	QP	/	QP
Above 1GHz	1MHz	3 MHz	PK	/	PK
	1MHz	3 MHz	RMS	> 98%	Ave.
	1MHz	/	PK	< 98%	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

## Test Results Summary

According to the recorded data in following table, the EUT is compliant with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	24.1~28 °C
<b>Relative Humidity:</b>	42~50 %
<b>ATM Pressure:</b>	101.2kPa


The testing was performed by Max Min from 2018-09-13 to 2018-09-16.

EUT operation mode: Transmitting

**Spurious Emission Test:**

**30MHz-1GHz**

(Pre-scan with channel 11, channel 18 and channel 26 of operation in the X,Y and Z axes of orientation, the worst case channel 11 of operation in X-axis of orientation was recorded)

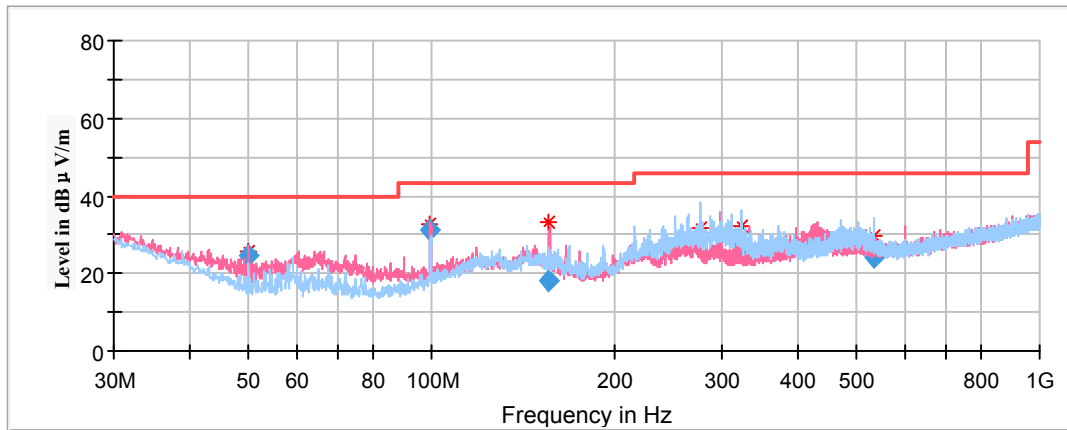

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
50.015250	24.64	101.0	V	69.0	-17.5	40.00	15.36
99.551250	31.13	101.0	V	49.0	-15.0	43.50	12.37
155.975850	18.27	199.0	V	87.0	-12.6	43.50	25.23
275.922900	29.75	101.0	H	358.0	-11.2	46.00	16.25
323.600700	27.08	101.0	H	307.0	-10.0	46.00	18.92
532.078550	24.10	199.0	H	203.0	-5.8	46.00	21.90

**1GHz-18GHz**


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)  
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)  
 Margin (dB) = Limit (dBµV/m) - Corrected Amplitude (dBµV /m)

**Low Channel : 2405MHz**


Full Spectrum

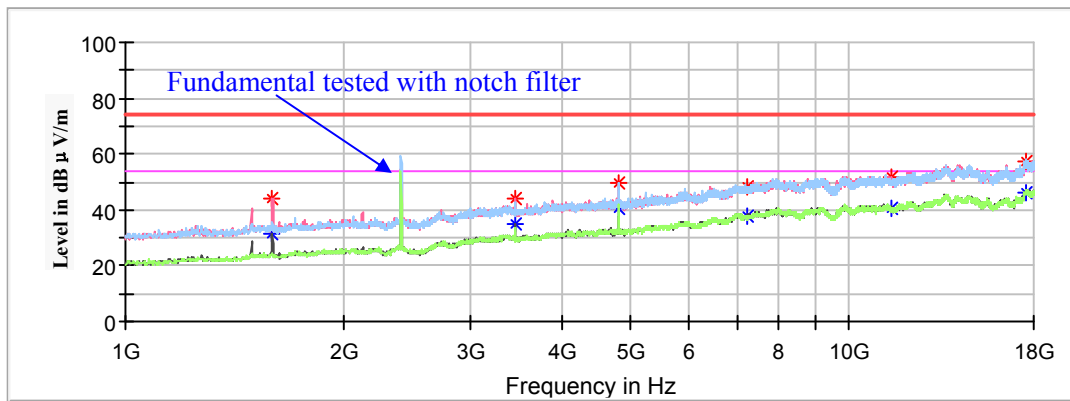

Frequency (MHz)	MaxPeak (dBµV /m)	Average (dBµV /m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
1593.300000	---	31.65	200.0	V	173.0	-7.2	54.00	22.35
1593.300000	44.35	---	200.0	V	173.0	-7.2	74.00	29.65
3454.800000	---	35.30	150.0	V	151.0	-0.9	54.00	18.70
3454.800000	44.26	---	150.0	V	151.0	-0.9	74.00	29.74
4810.000000	---	40.32	100.0	H	110.0	1.8	54.00	13.68
4810.000000	49.47	---	100.0	H	110.0	1.8	74.00	24.53
7215.000000	---	37.48	150.0	H	212.0	8.9	54.00	16.52
7215.000000	48.60	---	150.0	H	212.0	8.9	74.00	25.40
11455.000000	---	40.60	200.0	V	136.0	12.9	54.00	13.40
11455.000000	51.86	---	200.0	V	136.0	12.9	74.00	22.14
17610.700000	---	46.34	100.0	V	328.0	17.3	54.00	7.66
17610.700000	57.53	---	100.0	V	328.0	17.3	74.00	16.47

**Middle Channel: 2440MHz**


Full Spectrum

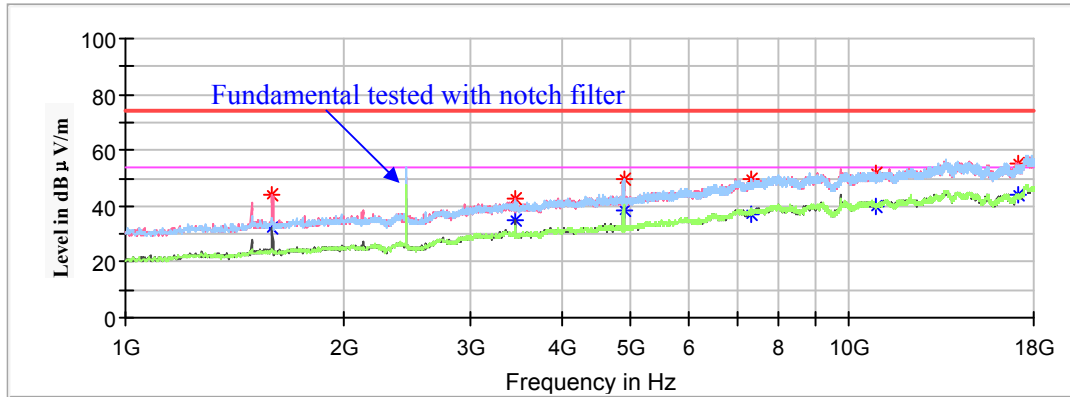

Frequency (MHz)	MaxPeak (dBμV /m)	Average (dBμV /m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
1593.300000	---	31.82	150.0	V	174.0	-7.2	54.00	22.18
1593.300000	43.82	---	150.0	V	174.0	-7.2	74.00	30.18
3454.800000	---	35.14	200.0	V	161.0	-0.9	54.00	18.86
3454.800000	42.98	---	200.0	V	161.0	-0.9	74.00	31.02
4880.000000	---	38.37	100.0	H	9.0	1.9	54.00	15.63
4880.000000	49.56	---	100.0	H	9.0	1.9	74.00	24.44
7320.000000	---	37.41	200.0	V	171.0	9.2	54.00	16.59
7320.000000	49.45	---	200.0	V	171.0	9.2	74.00	24.55
10917.800000	---	39.74	150.0	V	359.0	13.4	54.00	14.26
10917.800000	51.87	---	150.0	V	359.0	13.4	74.00	22.13
17080.000000	---	44.11	150.0	V	352.0	15.0	54.00	9.89
17080.000000	55.16	---	150.0	V	352.0	15.0	74.00	18.84

**High Channel: 2480MHz**

Full Spectrum

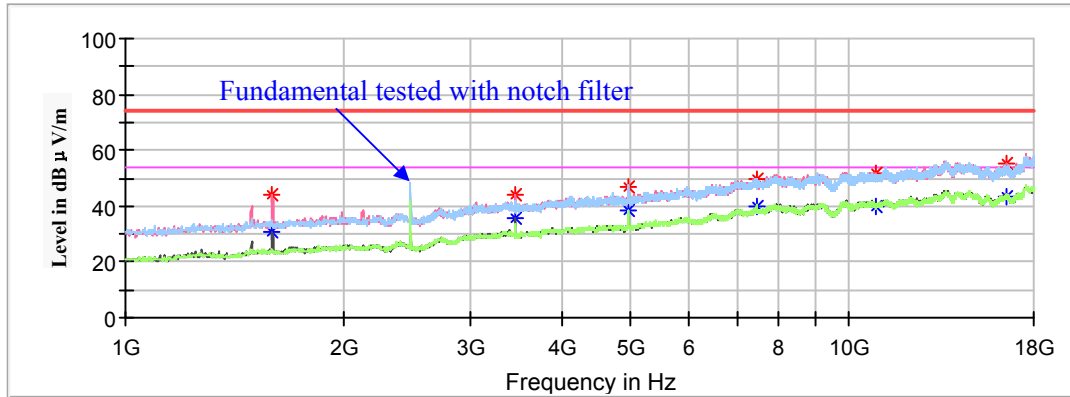


Frequency (MHz)	MaxPeak (dBμV /m)	Average (dBμV /m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
1593.300000	---	31.07	200.0	V	185.0	-7.2	54.00	22.93
1593.300000	44.20	---	200.0	V	185.0	-7.2	74.00	29.80
3454.800000	---	35.81	150.0	V	153.0	-0.9	54.00	18.19
3454.800000	44.04	---	150.0	V	153.0	-0.9	74.00	29.96
4960.000000	---	38.34	100.0	H	70.0	2.0	54.00	15.66
4960.000000	47.18	---	100.0	H	70.0	2.0	74.00	26.82
7440.000000	---	40.19	100.0	H	109.0	9.6	54.00	13.81
7440.000000	49.53	---	100.0	H	109.0	9.6	74.00	24.47
10911.000000	---	40.10	200.0	V	81.0	13.4	54.00	13.90
10911.000000	51.77	---	200.0	V	81.0	13.4	74.00	22.23
16500.600000	---	43.54	100.0	V	87.0	13.7	54.00	10.46
16500.600000	55.22	---	100.0	V	87.0	13.7	74.00	18.78



**18GHz-25GHz**


(Pre-scan with channel 11, channel 18 and channel 26 of operation in the X,Y and Z axes of orientation, the worst case channel 11 of operation in X-axis of orientation was recorded)

**Horizontal**

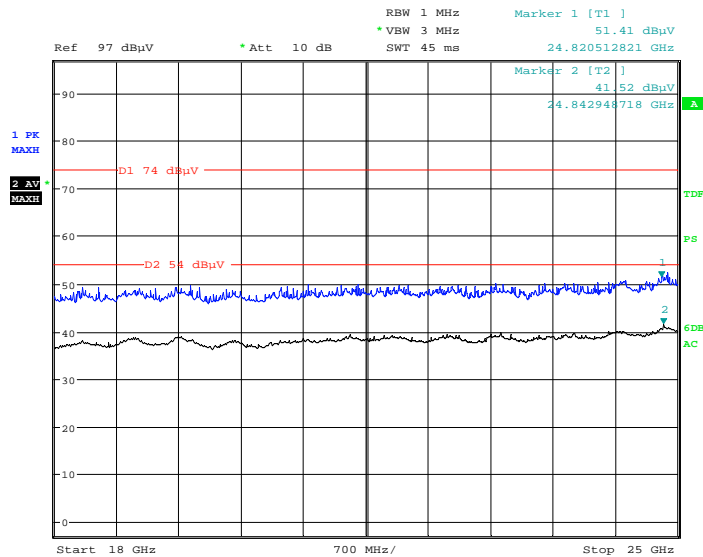

Date: 16.SEP.2018 19:59:17

**Vertical**

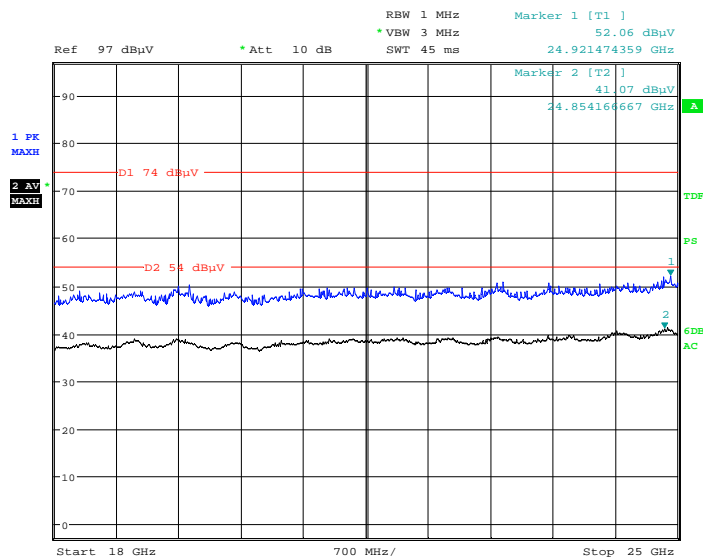

Date: 16.SEP.2018 20:19:29

**Fundamental Test & Restricted Bands Emissions Test:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) - Corrected Amplitude (dBµV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
<b>Channel 11: 2405MHz</b>								
2405	109.31	---	250	V	272	6.1	/	/
2405	---	106.63	250	V	272	6.1	/	/
2405	110.33	---	100	H	121	6.1	/	/
2405	---	107.72	100	H	121	6.1	/	/
2390	55.09	---	150	H	205	5.9	74	18.91
2390	---	50.71	150	H	205	5.9	54	3.29
<b>Channel 18: 2440MHz</b>								
2440	110.23	---	250	V	167	6.2	/	/
2440	---	107.59	250	V	167	6.2	/	/
2440	111.13	---	100	H	131	6.2	/	/
2440	---	108.56	100	H	131	6.2	/	/
<b>Channel 25: 2475MHz</b>								
2475	106.36	---	150	V	264	6.3	/	/
2475	---	103.33	150	V	264	6.3	/	/
2475	107.85	---	100	H	211	6.3	/	/
2475	---	104.88	100	H	211	6.3	/	/
2483.5	53.1	---	150	H	251	6.3	74	20.9
2483.5	---	47.16	150	H	521	6.3	54	6.84
<b>Channel 26: 2480MHz</b>								
2480	90.99	---	250	V	225	6.3	/	/
2480	---	88.56	250	V	225	6.3	/	/
2480	91.88	---	150	H	177	6.3	/	/
2480	---	89.35	150	H	177	6.3	/	/
2483.5	57.84	---	100	H	141	6.3	74	16.16
2483.5	---	50.11	100	H	141	6.3	54	3.89


### Conducted Spurious Emissions at Antenna Port

#### Low Channel: 2405MHz

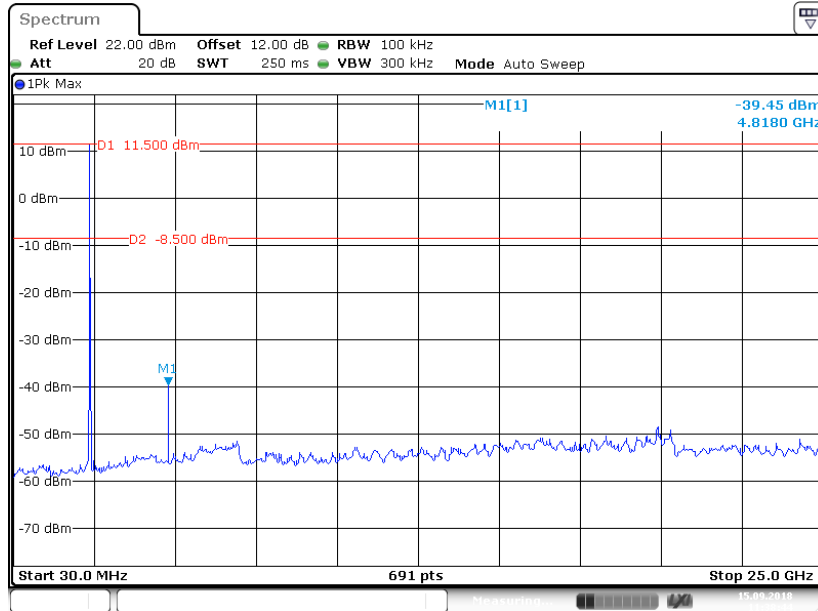


Date: 15 SEP 2018 11:38:44

#### Middle Channel: 2440MHz

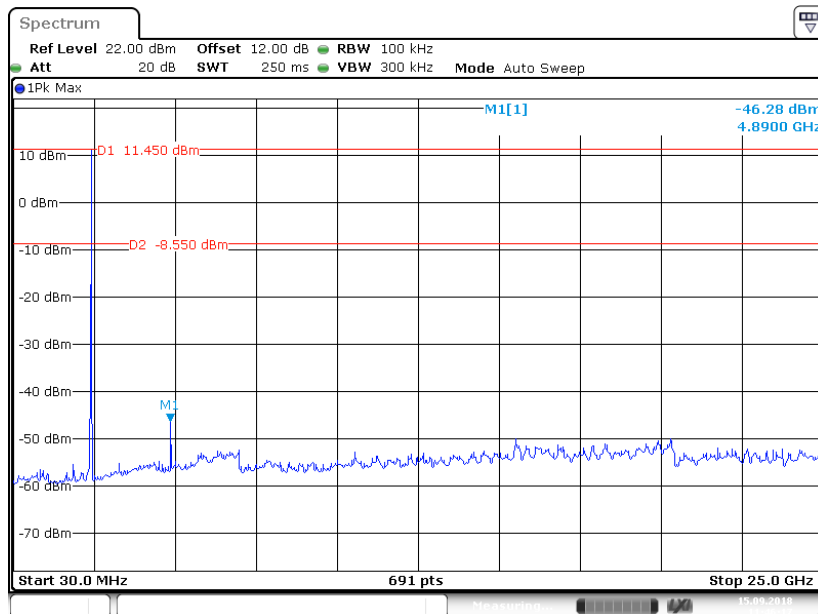

Date: 15 SEP 2018 11:46:17

### High Channel: 2480MHz

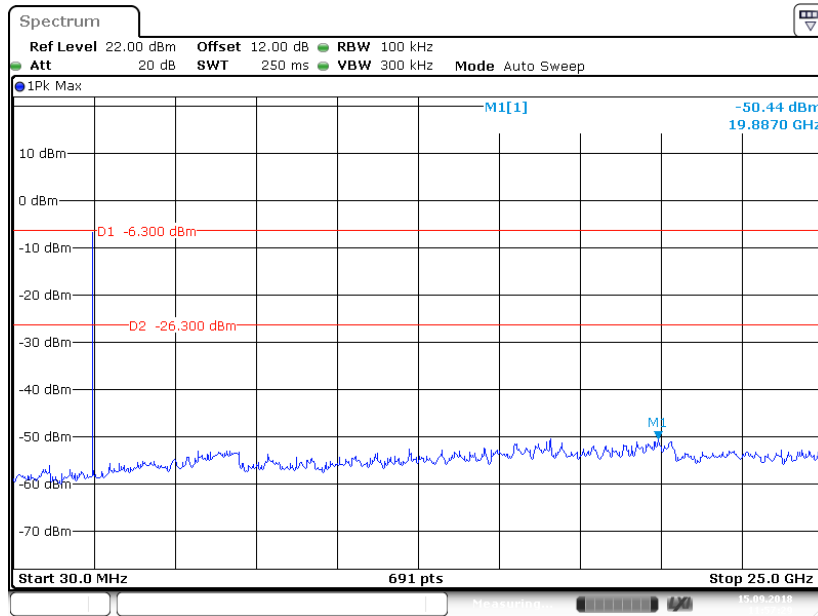

**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**


**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa


The testing was performed by Max Min on 2018-09-15.

**Test Result:** Pass.


*EUT operation mode: Transmitting*

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Channel 11	2405	1.563	≥0.5
Channel 18	2440	1.585	≥0.5
Channel 26	2480	1.577	≥0.5


**Low Channel: 2405MHz**

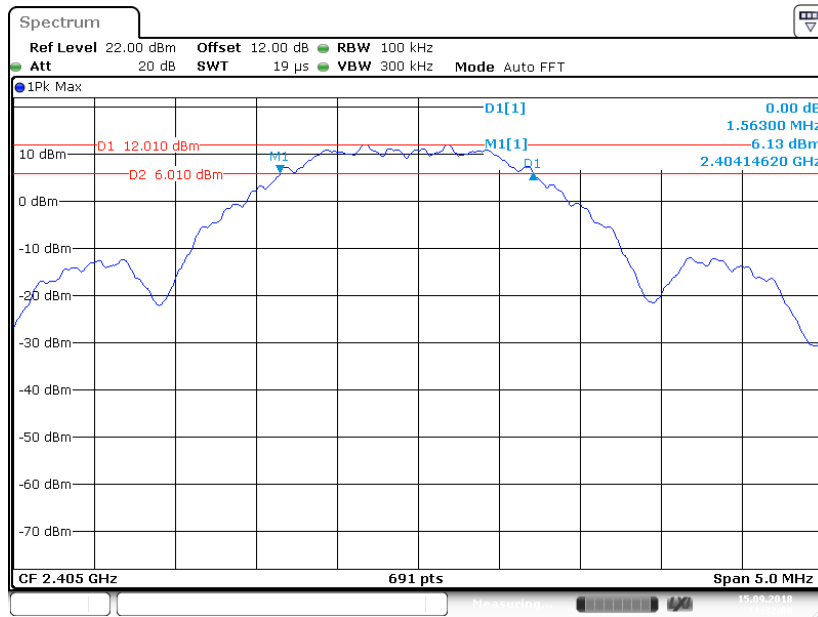

**Middle Channel: 2440MHz**

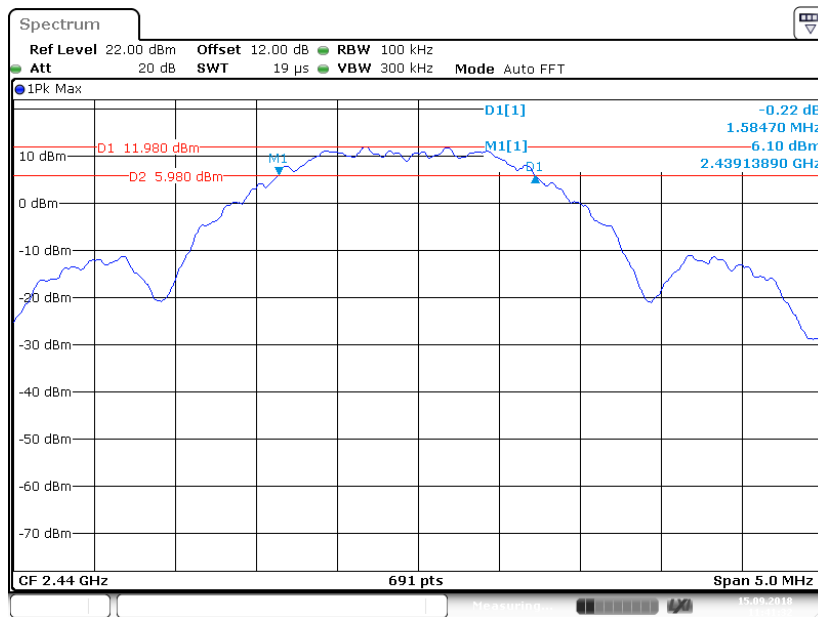

### High Channel: 2480MHz

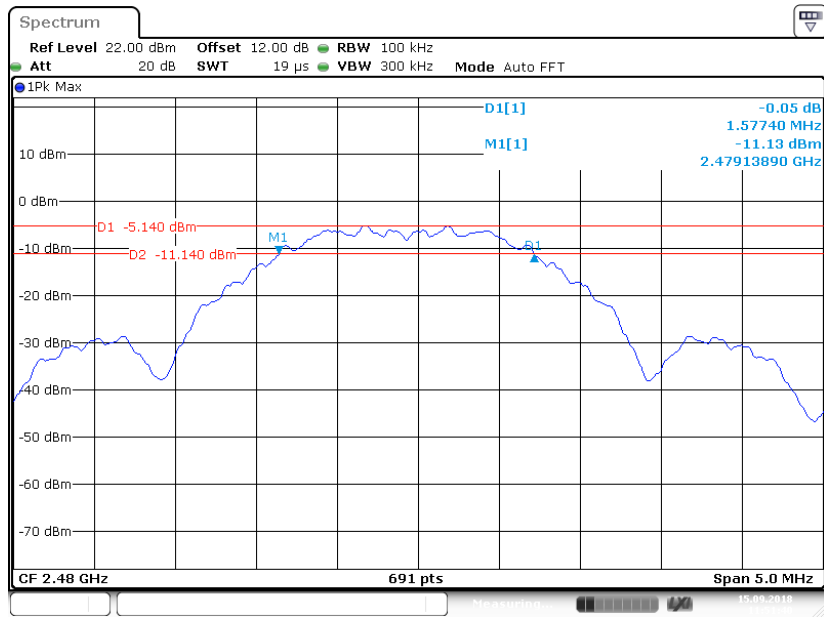

Date: 15 SEP 2018 11:51:40

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 3 \times$  RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



### Test Data

#### Environmental Conditions


<b>Temperature:</b>	23.8°C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.2 kPa

The testing was performed by Max Min on 2018-09-15.  
 EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Channel 11	2405	14.76	30	Pass
Channel 18	2440	14.92	30	Pass
Channel 25	2475	14.10	30	Pass
Channel 26	2480	-2.31	30	Pass




### Channel 11: 2405MHz

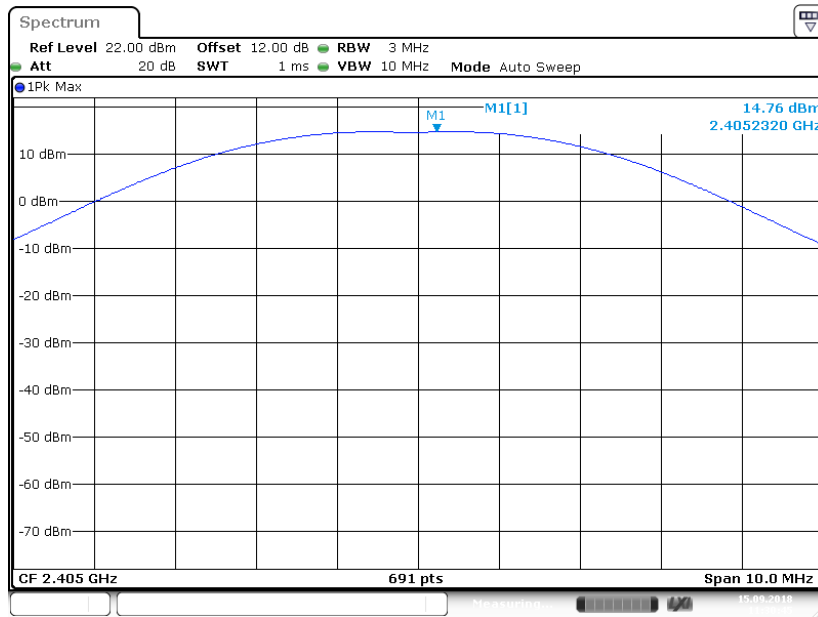


Date: 15 SEP 2018 11:30:45

### Channel 18: 2440MHz

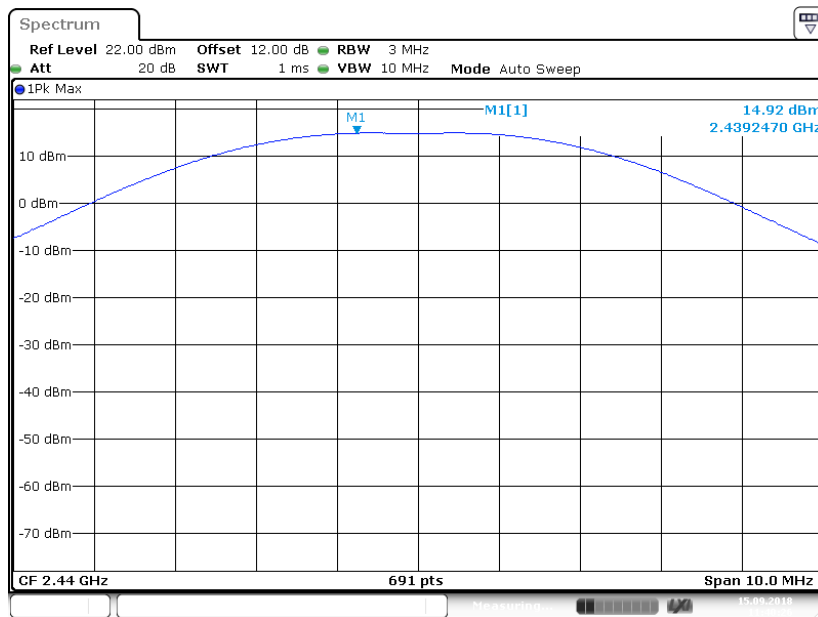


Date: 15 SEP 2018 11:40:26

### Channel 25: 2475MHz

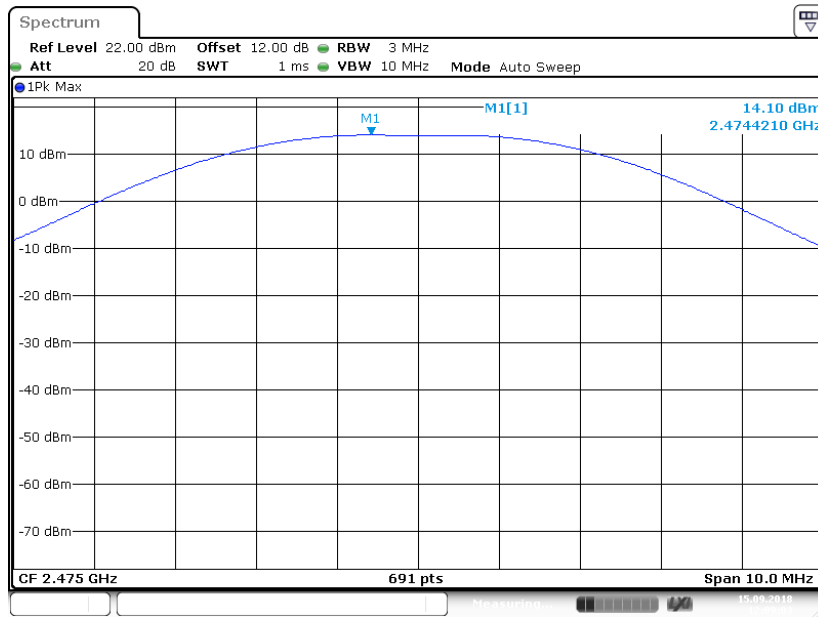

Date: 15 SEP 2018 12:09:02

### Channel 26: 2480MHz

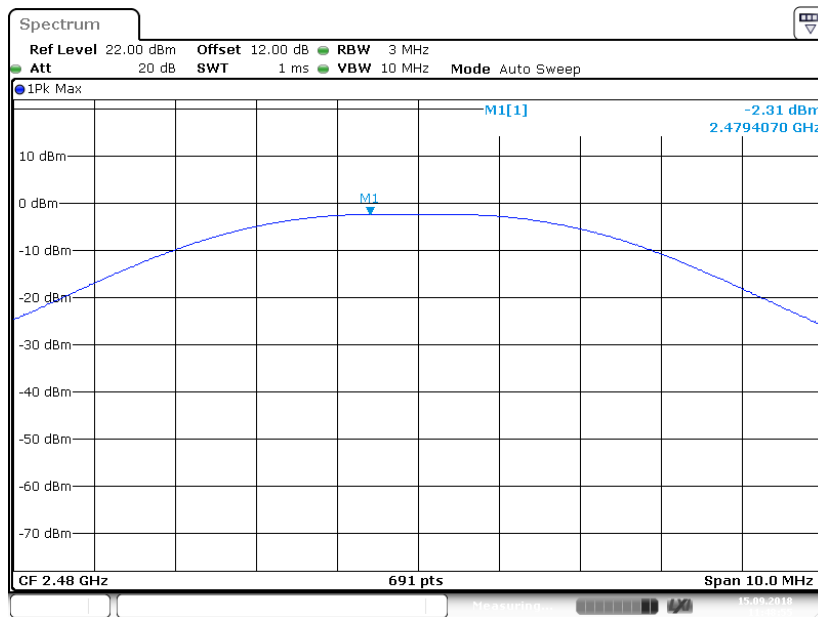

Date: 15 SEP 2018 11:48:55

## **FCC §15.247(d) – BAND EDGE**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	24.3 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Max Min on 2018-09-15.*


*EUT operation mode: Transmitting*

**Test Result:** *Compliance*


### Left Side

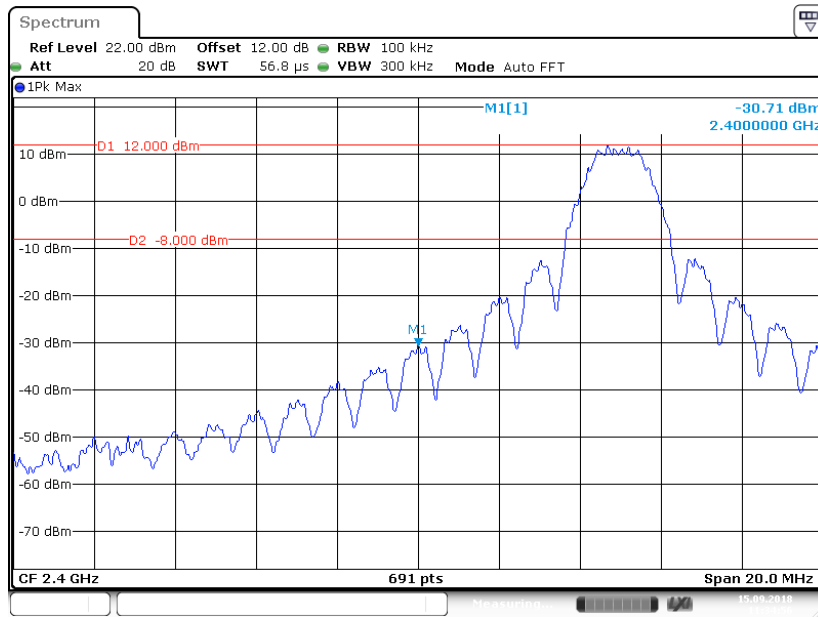

### Right Side for 2475MHz

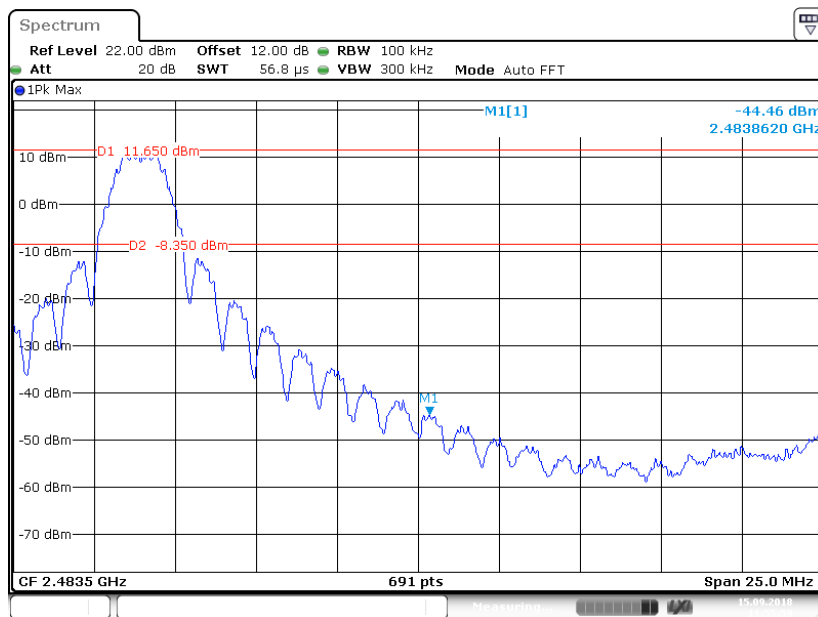

### Right Side for 2480MHz

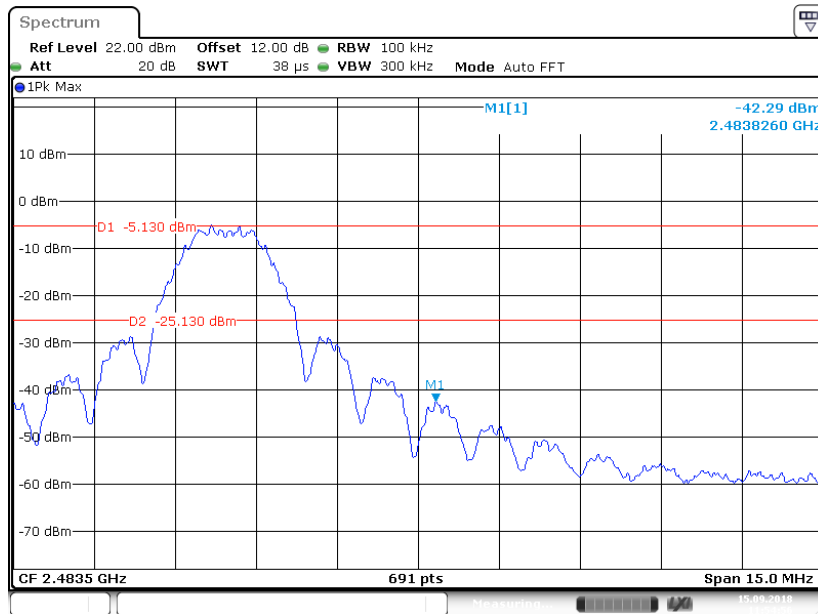

Date: 15 SEP 2018 11:54:56

## **FCC §15.247(e) - POWER SPECTRAL DENSITY**

### **Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.1 °C
<b>Relative Humidity:</b>	50%
<b>ATM Pressure:</b>	101.3 kPa


*The testing was performed by Max Min on 2018-09-15.*

*EUT operation mode: Transmitting*

**Test Result:** Pass


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PSD (dBm/3kHz)</b>	<b>Limit (dBm/3kHz)</b>
Low Channel	2405	3.01	$\leq 8$
Middle Channel	2440	2.83	$\leq 8$
High Channel	2480	-14.25	$\leq 8$

### Low Channel: 2405MHz

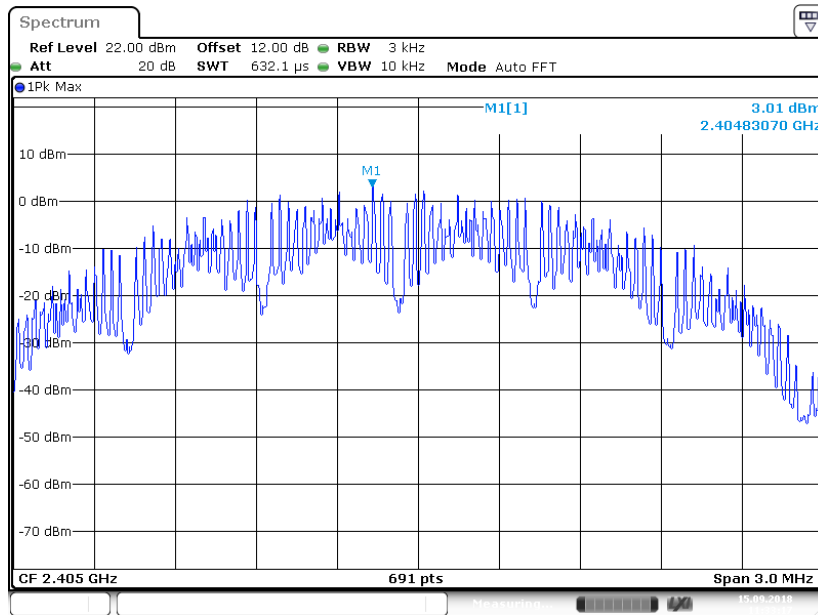


Date: 15 SEP 2018 11:33:18

### Middle Channel: 2440MHz

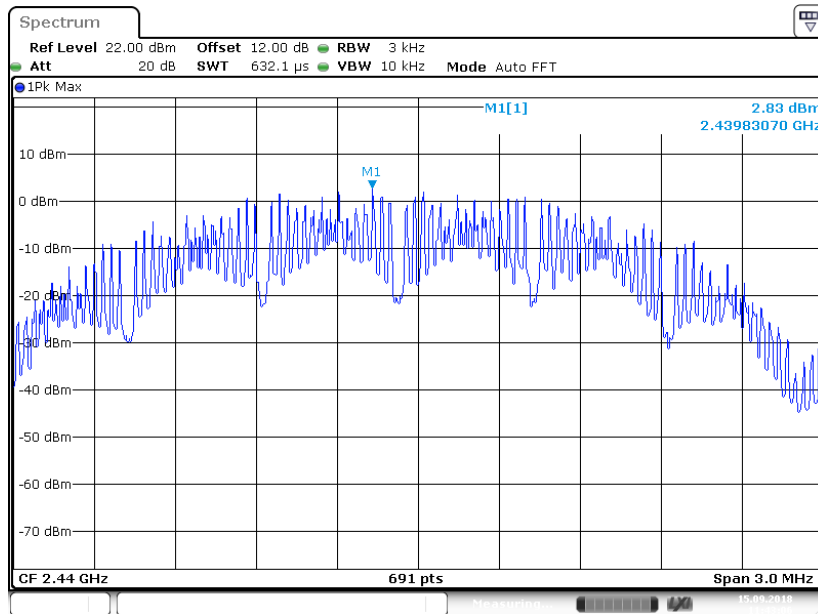

Date: 15 SEP 2018 11:43:07

**High Channel: 2480MHz**

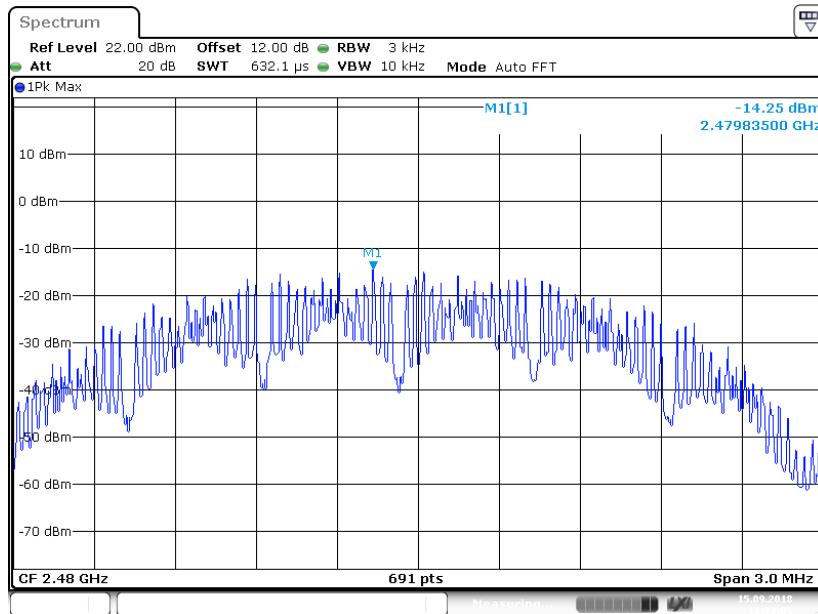

Date: 15 SEP 2018 11:53:05

**\*\*\*\*\* END OF REPORT \*\*\*\*\***