

# TEST REPORT

**Product Name** : Wireless Accessory Charger Module

**Model Number** : W1BFTV4

**FCC ID** : PUZ-W1BFTV4

Prepared for : Foryou Multimedia Electronics Co., Ltd.

Address : No.1, North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou, Guangdong, P.R. China

Prepared by : EMTEK (SHENZHEN) CO., LTD.

Address : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280

Fax: (0755) 26954282

Report Number : ENS2410080164W00502R

Date(s) of Tests : October 12, 2024 to October 24, 2024

Date of issue : October 24, 2024

## TABLE OF CONTENT

Test Report Description	Page
<b>1. SUMMARY OF TEST RESULT .....</b>	<b>3</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. DESCRIPTION OF DEVICE (EUT) .....	5
2.2. DESCRIPTION OF TEST FACILITY .....	6
<b>3. MEASUREMENT EQUIPMENT USED .....</b>	<b>7</b>
<b>4. RF EXPOSURE .....</b>	<b>7</b>
4.1. MEASURING STANDARD .....	8
4.2. STANDARD REQUIREMENTS .....	8
4.3. TEST CONFIGURATION .....	8
4.4. BLOCK DIAGRAM CONFIGURATION TEST SYSTEM .....	9
4.5. SUPPORT EQUIPMENT .....	9
4.6. LIMITS .....	10
4.7. TEST MODE .....	11
4.8. EQUIPMENT APPROVAL CONSIDERATIONS .....	11
4.9. MEASURING RESULTS .....	12
<b>5. PHOTOGRAPHS OF TEST SETUP .....</b>	<b>14</b>

## TEST REPORT DESCRIPTION

Applicant : Foryou Multimedia Electronics Co., Ltd..  
 Address : No.1, North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou, Guangdong, P.R. China  
 Manufacturer : Foryou Multimedia Electronics Co., Ltd..  
 Address : No.1, North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou, Guangdong, P.R. China  
 EUT : Wireless Accessory Charger Module  
 Model Name : W1BFTV4  
 Trademark : ADAYO


### Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 1(1.1310) and Part 2(2.1091) KDB 680106 D01 RF Exposure Wireless Charging App v04V	PASS

The device described above is tested by EMTEK(SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK(SHENZHEN) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK(SHENZHEN) CO., LTD.

Date of Test : October 12, 2024 to October 24, 2024

Prepared by :   
Luo pei ye /Editor

Reviewer :   
Joe Xia/Supervisor

Approved & Authorized Signer :   
Lisa Wang/Manager



## 1. SUMMARY OF TEST RESULT

Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) KDB 680106 D01 RF Exposure Wireless Charging App v04V	Pass

Note: N/A is an abbreviation for Not Applicable.



## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product:	Wireless Accessory Charger Module
Model Number:	W1BFTV4
Power Supply	Input: DC 9-16V (Effective voltage:12-16Vdc), Output: 15W Max
Operating Frequency	110-205KHz
Modulation	ASK/FSK
Antenna Type	Induction coil antenna

**Note:** for more details, please refer to the User's manual of the EUT.



## 2.2. Description of Test Facility

### Site Description

EMC Lab.

#### : Accredited by CNAS

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

#### **Accredited by FCC**

Designation Number: CN1204

Test Firm Registration Number: 882943

#### **Accredited by A2LA**

The Certificate Number is 4321.01.

#### **Accredited by Industry Canada**

The Conformity Assessment Body Identifier is CN0008

### Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

### Site Location

: Building 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

### 3. MEASUREMENT EQUIPMENT USED

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	DUE CAL.
Broadband Field Meter	Narda	NBM-550	H-1333	2023/5/6	2Year
Probe	Narda	EF-0691	H-1089	2023/5/6	2Year
Electric and magneticField Probe-Analyzer(1HZ-400KHz)	Narda	EHP50F	510ZY00118	2023/9/21	2Year
Probe	Narda	EF-0691	H-1089	2023/5/6	2Year



## 4. RF EXPOSURE

### 4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

### 4.2. Standard Requirements

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.

Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.

Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093).

The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows: Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.

General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.


### 4.3. Test configuration

1, The field strength of both E-field and H-field was measured at 15cm(the 15 cm measured from the center of the probe(s) to the edge of the device) using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.

2, Maximum E-field and H-field measurements were made 15cm from each side of the EUT. Along the side of the EUT and still 15cm away from the edge of the EUT, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.

3, This device uses a wireless charging circuit for power transfer operating at the frequency of 110 – 205kHz. Thus, the 300kHz limits were used: E-field Limit = 614 (V/m); H-field limit = 1.63 (A/m).

#### 4.4. Block Diagram Configuration Test System

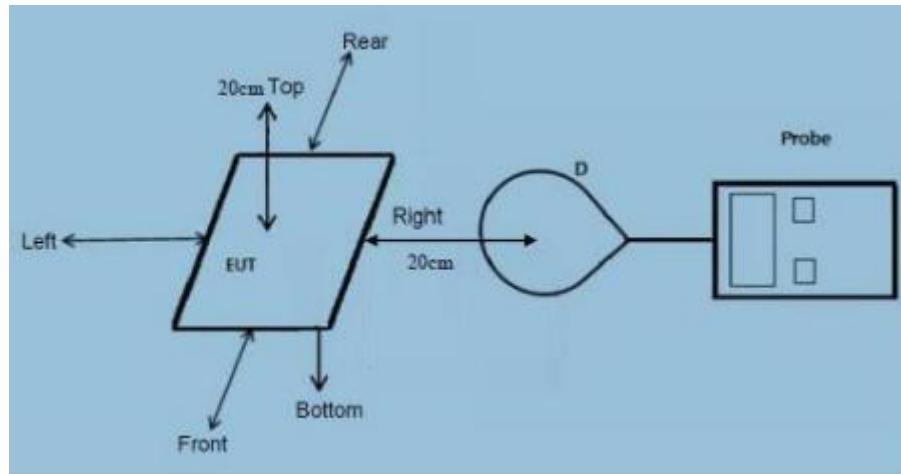

- a. For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm (Top) and 20cm (Edge). E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 20cm (Top) and 20cm (Edge) measured from the center of the probe(s) to the edge of the device.
- b. The highest emission level was recorded at the measurement points(Right, Bottom, Front, Rear, Left, Top).
- c. The EUT was measured according to the distance of KDB 680106 D01 V04.

#### 4.5. Support Equipment

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/
Auxiliary Cable List and Details			
Auxiliary Equipment List and Details	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/
Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Dummy Load	HFJ-AR	ME47562021	/

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment

#### 4.6. Limits

##### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

##### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note 1: f = frequency in MHz ; \*Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 Wireless Power Transfer v04

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz. Note 4: The aggregate H-field strengths at 20 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

#### 4.7. Test Mode

Test Mode	Description	Remark
Mode A Charging(15W)	100% Load	With dummy load
	50% Load	With dummy load
	10% Load	With dummy load
Mode B Charging(10W)	100% Load	With dummy load
	50% Load	With dummy load
	10% Load	With dummy load
Mode B Charging(5W)	100% Load	With dummy load
	50% Load	With dummy load
	10% Load	With dummy load

Notes: The EUT supports charging the load while charging itself

#### 4.8. Equipment Approval Considerations

Q1:	The power transfer frequency is below 1 MHz.
<b>A1:</b>	<b>Yes; the device operate in the frequency range from 110kHz to 205kHz.</b>
Q2:	The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
<b>A2:</b>	<b>Yes; the maximum output power of the primary coil is less than 15W.</b>
Q3:	A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
<b>A3:</b>	<b>Yes; The eut is conform.</b>
Q4:	Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).
<b>A4:</b>	<b>Yes; The eut is conform.</b>
Q5:	The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
<b>A5:</b>	<b>Yes; three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Worst mode data has been recorded.</b>
Q6:	For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.
<b>A6:</b>	<b>Yes; The eut is conform.</b>

#### 4.9. Measuring Results



All wireless charging modes(Test mode A, B, C) have been tested and three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed, the worst mode is shown below:

Test Mode:		Mode A(100% Load)		
Electric Field Emissions				Reference Period:
Test Position	Separation	Measure Value (V/m)	Limit (V/m)	50% Limit (V/m)
Set Front	20cm	1.20	614	307
Set Rear	20cm	1.11	614	307
Set Left	20cm	1.32	614	307
Set Right	20cm	1.43	614	307
Set Top	20cm	1.45	614	307
Set Bottom	15 cm	3.76	614	307
Magnetic Field Emissions				Reference Period:
Test Position	Separation	Measure Value (A/m)	Limit (A/m)	50% Limit (A/m)
Set Front	20cm	0.64	1.63	0.815
Set Rear	20cm	0.62	1.63	0.815
Set Left	20cm	0.73	1.63	0.815
Set Right	20cm	0.74	1.63	0.815
Set Top	20cm	0.90	1.63	0.815
Set Bottom	15 cm	1.44	1.63	0.815

Test Mode:		Mode A(50% Load)		
		Electric Field Emissions		Reference Period:
Test Position	Separation	Measure Value (V/m)	Limit (V/m)	50% Limit (A/m)
Set Front	20cm	1.42	614	307
Set Rear	20cm	1.52	614	307
Set Left	20cm	1.44	614	307
Set Right	20cm	1.13	614	307
Set Top	20cm	1.43	614	307
Set Bottom	15 cm	3.54	614	307
		Magnetic Field Emissions		Reference Period:
Test Position	Separation	Measure Value (A/m)	Limit (A/m)	50% Limit (A/m)
Set Front	20cm	0.65	1.63	0.815
Set Rear	20cm	0.54	1.63	0.815
Set Left	20cm	0.64	1.63	0.815
Set Right	20cm	0.43	1.63	0.815
Set Top	20cm	0.54	1.63	0.815
Set Bottom	15 cm	1.11	1.63	0.815

Test Mode:		Mode A(10% Load)			
		Electric Field Emissions		Reference Period:	6 minutes
Test Position		Separation	Measure Value (V/m)	Limit (V/m)	50% Limit (A/m)
Set Front		20cm	1.34	614	307
Set Rear		20cm	1.11	614	307
Set Left		20cm	1.21	614	307
Set Right		20cm	1.26	614	307
Set Top		20cm	1.45	614	307
Set Bottom		15 cm	4.32	614	307
		Magnetic Field Emissions		Reference Period:	6 minutes
Test Position		Separation	Measure Value (A/m)	Limit (A/m)	50% Limit (A/m)
Set Front		20cm	0.22	1.63	0.815
Set Rear		20cm	0.14	1.63	0.815
Set Left		20cm	0.33	1.63	0.815
Set Right		20cm	0.21	1.63	0.815
Set Top		20cm	0.22	1.63	0.815
Set Bottom		15 cm	0.98	1.63	0.815

## 5. PHOTOGRAPHS OF TEST SETUP

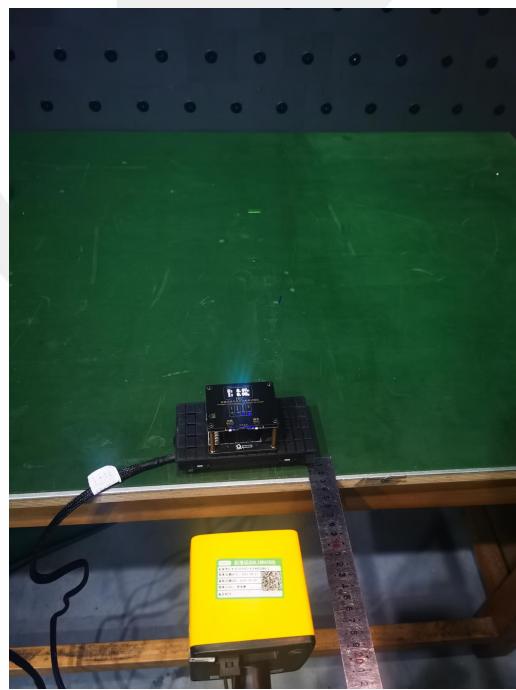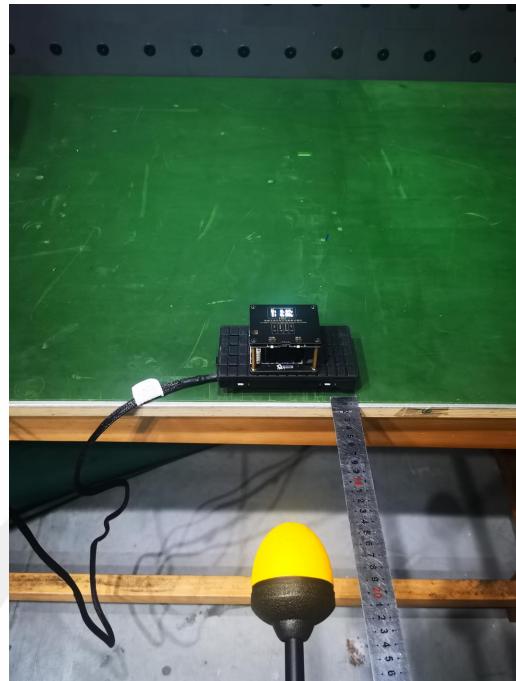

----- END OF REPORT -----