

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	ULR-TC568820300000024F	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	166451508 0030	Seite 1 von 46 Page 1 of 46	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	NA	<b>Auftragsdatum:</b> <i>Order date:</i>	2019-05-14		
<b>Auftraggeber:</b> <i>Client:</i>	Honeywell International Inc 12, Clintonville Rd, Northford, CT, USA 06472; +1 203 4847161				
<b>Prüfgegenstand:</b> <i>Test item:</i>	CLSS Gateway				
<b>Bezeichnung / Serien-Nr.:</b> <i>Identification / Serial no.:</i>	HON-CGW-MBB				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Testing and Issue of FCC and IC certification				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC Part 15 Subpart C 15.247, 15.207 RSS 247 Issue 2 and RSS Gen Issue 5				
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2020-05-15				
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A002843762-001 A002843762-009				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2020-05-15 - 2020-06-19				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Wireless laboratory, Bangalore				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (India) Pvt. Ltd. 27/B, 2 <sup>nd</sup> Cross, Electronic City Phase I, Bangalore – 560100, India				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von:</b> <i>tested by:</i>	<b>genehmigt von:</b> <i>authorized by:</i>				
<b>Datum:</b> <i>Date:</i> 2020-05-21		<b>Ausstattatum:</b> <i>Issue date:</i> 2020-08-28			
<b>Stellung / Position:</b>	Raviraj Kamati Engineer	<b>Stellung / Position:</b>	Mahammadgouse Kaladagi Assistant Manager		
<b>Sonstiges / Other:</b>	FCC ID: PV3CGWMB IC:1609A-CGWMB Contains FCC IDs: R17LE910NAV2, R17LE910SVV2 Contains IC:5131A-LE910NAV2; 5131A-LE910SVV2				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

v05

**Prüfbericht - Nr.:**  
Test Report No.:

**ULR-TC568820300000024F**

**Seite 2 von 46**  
Page 2 of 46

## TEST SUMMARY

Test Item	Applicable Standard		Result
	FCC	ISED	
Maximum conducted (average) output power	FCC 15.247(b)(3)	RSS 247 Issue 2, Section 5.4 (d)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 2, Section 5.2 (b)	NT
DTS Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 2, Section 5.2 (a)	NT
Emissions in non-restricted frequency bands	FCC 15.247(d)	RSS 247 Issue 2, Section 5.5	NT
Spurious Radiated Emissions and Restricted Bands of Operation	FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 / 8.10	Pass
Conducted Emissions on a.c Power Lines	FCC 15.207	RSS-Gen Issue 5, Section 8.8	Pass

**Note:** N/T: Not Tested

**CLSS Gateway** product was certified with FCC ID: PV3CGWMB , IC:1609A-CGWMB, hence other test cases are excluded which can be found in the test report ULR-TC56881930000099F and ULR-TC568819300000086F issued to Honeywell by TUV Rheinland India.

Product Category: Electronics Testing  
Test Discipline: EMC Test Facility

**Prüfbericht - Nr.:**  
*Test Report No.:*

**ULR-TC568820300000024F**

**Seite 3 von 46**  
*Page 3 of 46*

## REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
ULR-TC568820300000024F	01	Initial issue of report	01.07.2020
ULR-TC568820300000024F	02	Correction in the module identification from CGW-MB to HON-CGW-MBB Note: the Model HON-CGW-MBB covers the addition of Cellular module, hence the changes done to CLSS gateway under C2PC approach shall be only applicable to this model	10.08.2020
ULR-TC568820300000024F	03	Change in HVIN from CCM-BM28 RevA to HON-CGW-MBB	28.08.2020

## Table of Contents

1	GENERAL REMARKS .....	5
1.1	Attachments .....	5
2	TEST SITES .....	6
2.1	Testing Facilities.....	6
2.2	List of Test and Measurement Instruments.....	6
3	GENERAL PRODUCT INFORMATION.....	8
3.1	Product Function and Intended Use.....	8
3.2	Ratings and System Details of Equipment under Test .....	8
3.3	Simultaneous operation .....	9
3.4	Measurement Uncertainty: .....	9
4	TEST SET-UP AND OPERATION MODE .....	10
4.1	Principle of Configuration Selection .....	10
4.2	Operation and Software of the EUT .....	10
4.3	Test modes – data rates and modulations.....	10
4.4	Special Accessories and Auxiliary Equipment .....	10
4.5	Countermeasures to achieve EMC Compliance .....	10
4.6	Report references.....	10
4.7	List of frequencies .....	11
5	Operational Description of the product .....	12
6	Block Diagram of the product .....	12
7	TEST METHODOLOGY .....	13
7.1	Conducted Spurious Emission Test on AC Power Line.....	13
7.1.1	Test Setup Configuration .....	13
7.2	Radiated Emission Test .....	14
7.2.1	Test Setup Configuration .....	14
8	TEST RESULTS FOR Wi-Fi.....	16
8.1	Maximum Average Conducted Output Power.....	16
8.2	Spurious Radiated Emissions & Restricted Bands of Operation .....	18
9	TEST RESULTS FOR BLUETOOTH LOW ENERGY .....	26
9.1	Maximum Peak Conducted Output Power.....	26
9.2	Spurious Radiated Emissions & Restricted Bands of Operation .....	29
10	Conducted Spurious Emission Test on AC Power Line.....	41
11	LIST OF TABLES.....	46

# 1 GENERAL REMARKS

## 1.1 Attachments

All attachments are part of this test report and are issued in separate document

- 1: TEST SETUP PHOTOS
- 2: EUT EXTERNAL PHOTOS
- 3: EUT INTERNAL PHOTOS
- 4: FCC LABEL AND LABEL LOCATION
- 5: BLOCK DIAGRAM
- 6: SPECIFICATION OF EUT
- 7: SCHEMATIC DIAGRAM
- 8: BILL OF MATERIAL
- 9: USER MANUAL
- 10: MAXIMUM PERMISSIBLE EXPOSURE INFORMATION

## 2 TEST SITES

### 2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,  
27/B, 2nd Cross,  
ElectronicCityPhase1  
Bangalore – 560 100,  
India
2. TUV Rheinland (India) Private Limited  
108 , Beside ISBR Business School,  
Electronic city Phase I  
Bangalore - 560 100.  
India

### 2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESU 40	100288	4.43 SP3	11.10.2020	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	LAX-10	LAX-10-800	-	15.07.2020	Yearly	
Biconical Antenna	Schwarzbeck	VHBB91 24+BBA 9106	9124-1208+9106-0525	-	16.01.2021	Yearly	
Log - Periodical Antenna	Schwarzbeck	VUSLP 9118 A	VULP9118A-0733	-	17.01.2021	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1944	-	17.07.2020	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-0904	-	29.01.2021	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
USB Wideband Power Sensor	Boonton	55006	10231	-	07.09.2020	Yearly	Antenna - Port Measurements
Spectrum Analyser	Agilent Technologies	E4407B	US41192772	A.14.06	28.09.2020	Yearly	
EMI Receiver	Rohde & Schwarz	ESW 44	101732	-	10.12.2020	Yearly	AC Power line conducted emission
LISN	Rohde & Schwarz	ENV 216	100022	-	05.09.2020	Yearly	
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100811	-	01.08.2020	Yearly	

**Prüfbericht - Nr.:**  
*Test Report No.:*

**ULR-TC568820300000024F**

**Seite 7 von 46**  
*Page 7 of 46*

**Table 2: Instrument application Software versions**

<b>SL. No.</b>	<b>Test Type</b>	<b>Application software</b>	<b>Version</b>
1	Radiated spurious emission measurement in SAC	EMC 32	10.60.00
2	Radiated spurious emission measurement in FAC	EMC 32	10.60.00

### 3 GENERAL PRODUCT INFORMATION

#### 3.1 Product Function and Intended Use

The gateway acts as a portal among fire alarm panels, and peripheral devices. The gateway connection with the fire alarm panel enables reading the inventory and transmitting the data. The connection with Cloud facilities remotely monitoring and managing the fire detection systems.

#### 3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client\*

<b>Radio Protocol</b>	Wi-Fi	BLE
<b>Operating Frequency Range</b>	2412MHz to 2462MHz	2402MHz to 2480MHz
<b>No. of Channels</b>	11 (Refer Table 6)	40 (Refer Table 7)
<b>Channel Spacing</b>	5MHz	2MHz
<b>Modulation</b>	802.11b: CCK and DSSS 802.11g: OFDM 802.11n: OFDM	GFSK
<b>Number of antennas</b>	2	1
<b>Antenna Gain</b>	3 dBi	
<b>Antenna Type</b>	Printed F Antenna	
<b>Supply Voltage to Product</b>	24V DC (powered through USB Port / NUP(RS232) Port)	
<b>Environmental conditions</b>	Storage	-10°C to +60° C
	Operating	
<b>EUT Dimension (L x W x T)</b>	200mm x 70mm x 255mm	

<b>Cellular Module</b>	<b>AT &amp; T</b>	<b>Verizon</b>
<b>FCC ID</b>	RI7LE910NAV2	RI7LE910SVV2
<b>IC ID</b>	5131A-LE910NAV2	5131A-LE910SVV2
<b>HVIN</b>	LE910-NA V2	LE910-SV1
<b>PMN</b>	LE910-NA V2	LE910-SV1

<b>Supply Voltage to Product : CLSS gateway can be powered with the following ports</b>	
<b>Port</b>	<b>Powered through</b>
<b>USB Port</b>	<b>Fire alarm control panel</b>
<b>NUP (RS232) Port</b>	<b>Fire alarm control panel</b>



**\*Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

**Note:** Product CLSS Gateway has multiple protocols. All the supported wireless protocols and their respective test results are issued in separate test reports, refer clause 4.6 for report reference.

### 3.3 Simultaneous operation

<b>Mode 1 Combinations of Simultaneous Operations</b>	<b>WiFi - LTE (AT&amp;T) WiFi - WCDMA (AT&amp;T) BLE - LTE (AT&amp;T) BLE - WCDMA (AT&amp;T)</b>
<b>Mode 2 Combinations of Simultaneous Operations</b>	<b>WiFi - LTE (Verizon) BLE - LTE (Verizon)</b>

<b>Cellular Module</b>	<b>AT &amp; T</b>	<b>Verizon</b>
<b>FCC ID</b>	RI7LE910NAV2	RI7LE910SVV2
<b>IC ID</b>	5131A-LE910NAV2	5131A-LE910SVV2
<b>HVIN</b>	LE910-NA V2	LE910-SV1
<b>PMN</b>	LE910-NA V2	LE910-SV1

**Note:** Simultaneous Operation was performed with the above mentioned combination and worst case test results are mentioned in this report.

### 3.4 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$

**Table 4: Measurement Uncertainty**

<b>Parameter</b>	<b>Uncertainty</b>
RF output power, conducted	±0.51 dB
Power Spectral Density, conducted	±0.85 dB
Unwanted Emissions, conducted	±2.58 dB
SAC, radiated measurement	±3.67 dB
FAC, radiated measurement	±4.95 dB
Temperature	±3 °C
Supply Voltages	±3 %
Time	±5 %

Note: The listed uncertainties are the worst case uncertainty for the entire range of measurements and are for the reporting purpose only and are not used in determining the PASS/FAIL of the results.

## 4 TEST SET-UP AND OPERATION MODE

### 4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle on Low, Mid and High channels.

### 4.2 Operation and Software of the EUT

Software Name: FW 2.5  
Software Version: 3.0.1.16  
Hardware Name: CLSS Gateway  
Hardware version: HON-CGW-MBB  
Hardware Reference: CCM-BM28 RevA

### 4.3 Test modes – data rates and modulations

Conducted and Radiated spurious emissions tests were performed and reported only for EUT worst case operating modes

### 4.4 Special Accessories and Auxiliary Equipment

- Test laptop and USB cable
- Fire Alarm control panel (to power up CLSS gateway through USB or NUP(RS232) Port )

### 4.5 Countermeasures to achieve EMC Compliance

- None

### 4.6 Report references

**Note:** Product CLSS Gateway has multiple protocols. All the supported wireless protocols and their respective test results are issued in separate test reports.

SL. No.	RF Protocol / Frequency Bands	Report No.
1	LTE, WCDMA	ULR-TC568820300000023F
2	<b>WLAN 2.4GHz &amp; BLE</b>	<b>ULR-TC568820300000024F</b>
3	BT	ULR-TC568820300000025F
4	WLAN 5GHz	ULR-TC568820300000026F

**Table 5: TUV Sample identification details**

Samples used for Testing	S/N Number
Antenna port measurement	A002842870-001
Radiated mode test	A002842870-009

## 4.7 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2412 – 2462	1	<b>2412</b>
	2	2417
	3	2422
	4	2427
	5	2432
	6	2437
	7	<b>2442</b>
	8	2447
	9	2452
	10	2457
	11	<b>2462</b>

Table 6: List of Wi-Fi center Frequencies

### Channel used for Wi-Fi testing

Channel Bandwidth 20MHz

Channel low : 2412MHz

Channel mid : 2442MHz

Channel high : 2462MHz

Frequency Band (GHz)	Channel No.	Frequency (MHz)
BLE (2.4-2.4835)	0	<b>2402</b>
	1	2404
	2	2406
	3	2408
	:	:
	:	:
	18	2438
	<b>19</b>	<b>2440</b>
	20	2437
	:	:
	:	:
	36	2474
	37	2476
	38	2478
	<b>39</b>	<b>2480</b>

Table 7: List of BLE Center frequencies

### Channel used for BLE testing

Channel low : 2402MHz

Channel mid : 2440MHz


Channel High : 2480MHz

## 5 Operational Description of the product

The gateway acts as a portal among fire alarm panels, and peripheral devices. The gateway connection with the fire alarm panel enables reading the inventory and transmitting the data. The connection with Cloud facilities remotely monitoring and managing the fire detection systems.

## 6 Block Diagram of the product

### The Gateway Board's Layout

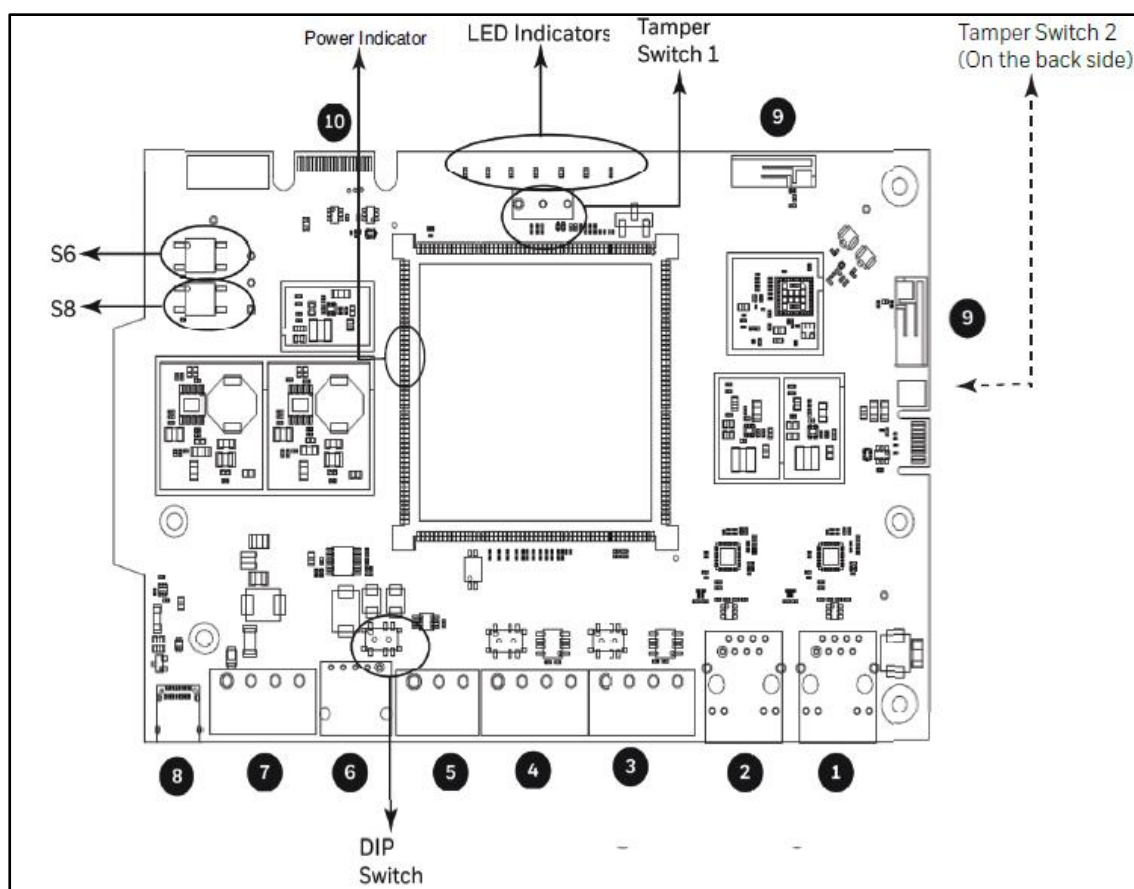

PCB Layout




## 7.2 Radiated Emission Test


The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, The measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Baloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded.  
Field Strength (dB $\mu$ V/m) = Measured Value(dB $\mu$ V) + Antenna Factor(dB) + Cable Loss(dB) – Pre Amplifier Gain (dBi)


### 7.2.1 Test Setup Configuration

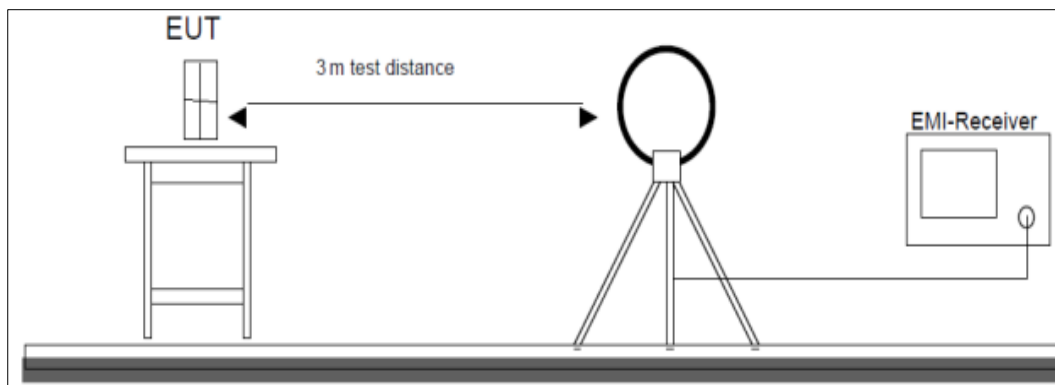


**Figure 1: Frequency Range 9 kHz- 30 MHz**

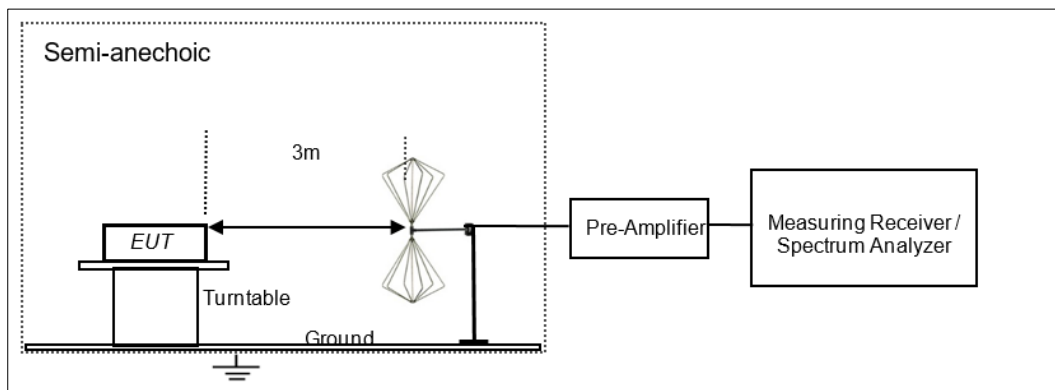

**Figure 2: Frequency Range 30 MHz – 200 MHz**

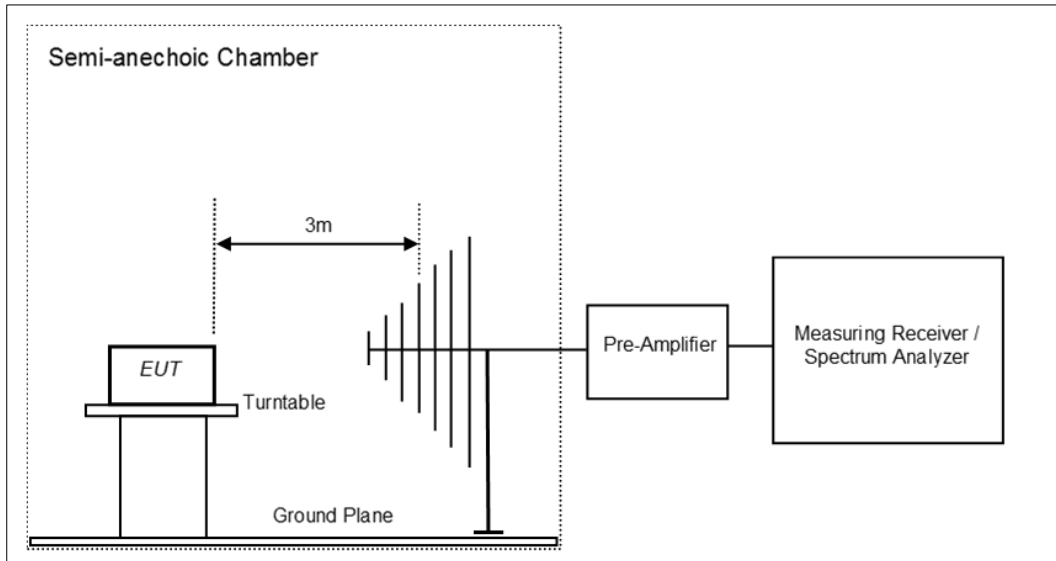

**Figure 3: Frequency Range 200 MHz - 1GHz**

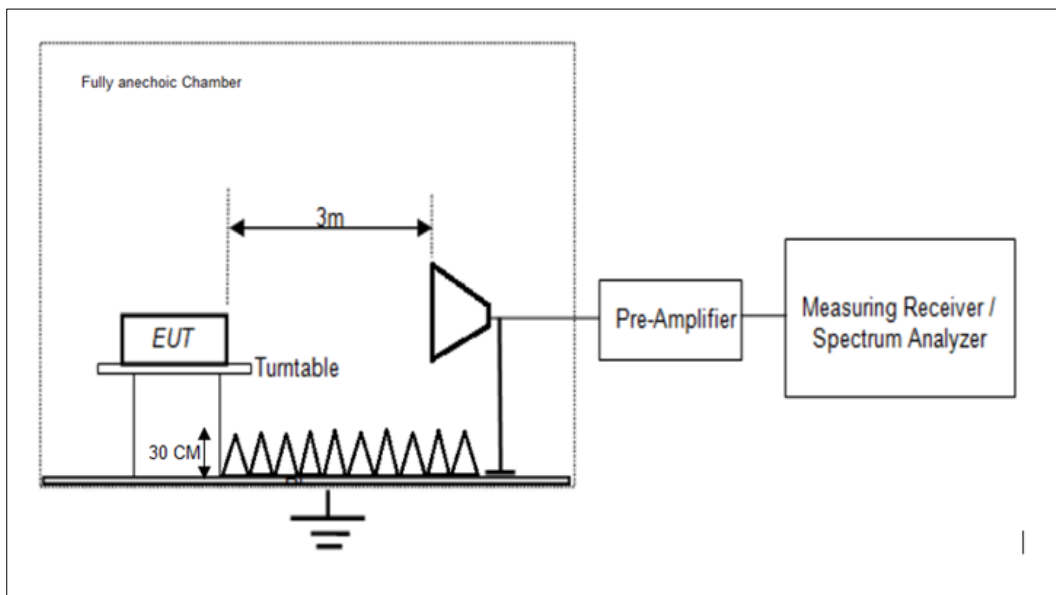

**Figure 4: Frequency Range above 1 GHz**

## 8 TEST RESULTS FOR Wi-Fi


### 8.1 Maximum Average Conducted Output Power

**Result**

**Pass**

Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.2.2.4 of ANSI C63.10
Detector	Average sample detector
Port of testing	Antenna port
Requirement	Power $\leq 1$ W (30 dBm) & e.i.r.p $\leq 4$ W (36 dBm)

#### Test Method

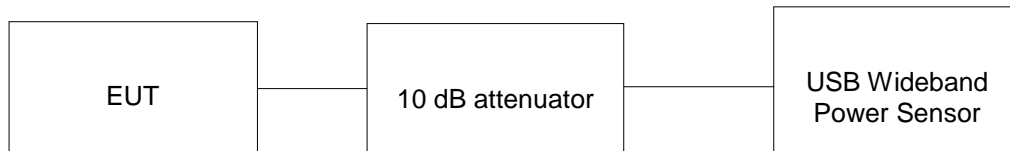

#### Test Condition

##### Normal Test Condition:

Temperature (Norm) = + 22.3 °C      Voltage = 24V DC (through UAB Port)      Relative humidity = 62 %

##### KDB Guidelines applied:

Measurements were made as per section 8.3.1.3 in KDB 558074 D01 15.247 Measurement Guidance v05r02.



**Test results:**

**Note:**

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average Output power (dBm) = Measured Average power (dBm) + Attenuator factor (10dB) + Cable loss (2dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 3 dBi
4. Maximum (e.i.r.p) = Maximum Average output power (dBm) + antenna gain (3 dBi)

Mode	Data rate (Mbps)	Channel Frequency (MHz)	Duty cycle %	Duty cycle correction factor (dB)	Maximum Conducted Output Power (dBm)	Maximum Average Output Power (dBm)	Maximum (e.i.r.p) (dBm)	Limit (dBm)	e.i.r.p Limit (dBm)	
802.11b	1	2412	100.00	0.00	17.78	14.63	17.63	30	36	
		2442	100.00	0.00	17.60	14.49	17.49	30	36	
		2462	100.00	0.00	17.38	14.29	17.29	30	36	
	11	2412	89.13	0.50	17.11	14.20	17.20	30	36	
		2442	89.13	0.50	16.92	13.98	16.98	30	36	
		2462	89.13	0.50	16.87	13.90	16.90	30	36	
802.11g	6	2412	94.02	0.27	23.87	13.87	16.87	30	36	
		2442	94.02	0.27	23.67	13.81	16.81	30	36	
		2462	94.02	0.27	23.49	13.60	16.60	30	36	
	24	2412	78.80	1.04	23.15	14.08	17.08	30	36	
		2442	78.80	1.04	22.93	13.91	16.91	30	36	
		2462	78.80	1.04	22.79	13.63	16.63	30	36	
	54	2412	57.68	2.39	23.35	14.66	17.66	30	36	
		2442	57.68	2.39	23.00	14.50	17.50	30	36	
		2462	57.68	2.39	22.54	14.20	17.20	30	36	
	802.11n (20MHz)	MCS0	2412	94.62	0.24	24.13	13.48	16.48	30	36
			2442	94.62	0.24	23.99	13.28	16.28	30	36
			2462	94.62	0.24	23.58	13.04	16.04	30	36
MCS4		2412	69.66	1.57	23.65	13.98	16.98	30	36	
		2442	69.66	1.57	23.38	13.66	16.66	30	36	
		2462	69.66	1.57	23.18	13.56	16.56	30	36	
MCS7		2412	87.70	0.57	23.75	12.47	15.47	30	36	
		2442	87.70	0.57	23.61	12.23	15.23	30	36	
		2462	87.70	0.57	23.38	12.11	15.11	30	36	

\*Note: Duty Cycle Correction Factor Calculation

10\*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average Power

## 8.2 Spurious Radiated Emissions & Restricted Bands of Operation

<i>Result</i>	<i>Pass</i>
Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205) / IC RSS-GEN, Section 8.9 and 8.10
Test Method	ANSI C63.10
Measurement Location	Semi anechoic chamber < 1GHz Fully anechoic chamber > 1GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Reffer TEST METHODOLOGY

**Table 8: Transmitter limits for Radiated emission**

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: \* The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

### Environmental conditions:

Temperature (Norm) = + 24 °C    Voltage = 24 V DC (through USB Port and NUP(RS232) Port)  
Relative humidity = 62 %

Note: For the above 1 GHz worst case test results observed in power mode 24 V DC (through USB Port)

**Test results:**

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

**Test Results:**


**Test results for frequency range 9kHz – 30MHz**

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, have not reported


**Test results for frequency range 30MHz – 200MHz**

**Power Mode: 24V DC Through NUP(RS232) Port**

Antenna Polarization	Frequency (MHz)	Peak Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	30.758	25.16	40.00	-14.84
	97.569	25.02	43.50	-18.48
	113.785	28.78	43.50	-14.72
	120.038	24.97	43.50	-18.53
Horizontal	95.913	17.54	43.50	-25.96
	125.008	34.21	43.50	-9.29
	150.002	36.60	43.50	-6.90

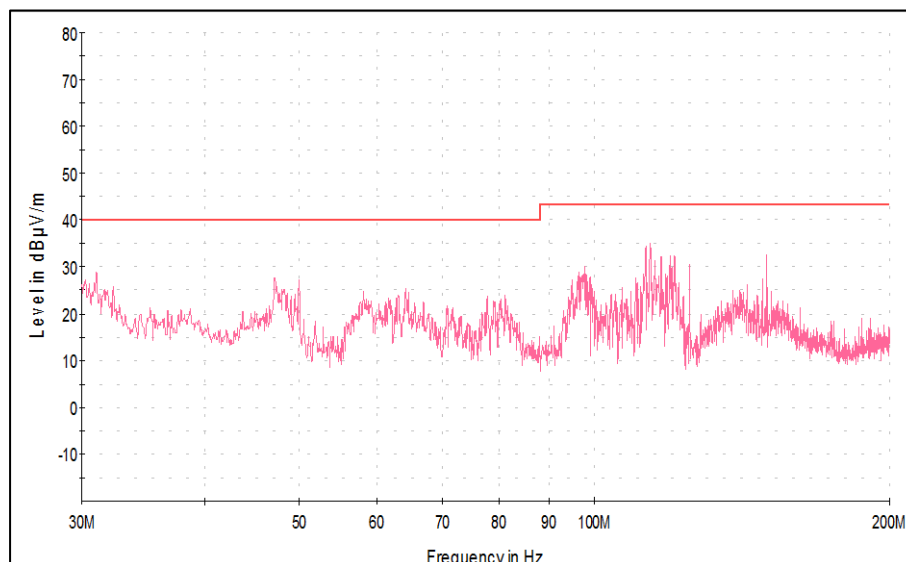


Polarization: Vertical

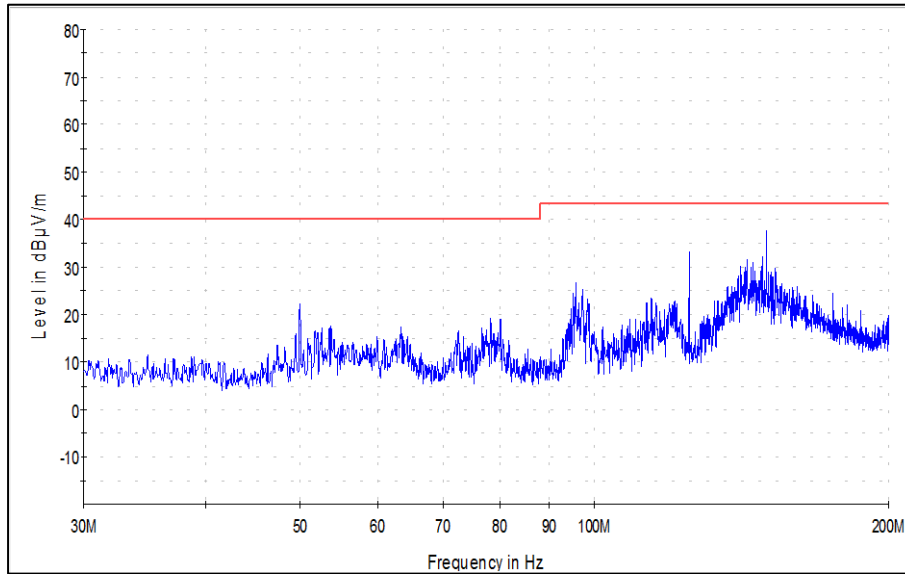

Polarization: Horizontal

**Power Mode: 24V DC Through (USB Port)**

Antenna Polarization	Frequency (MHz)	Peak Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	38.69	22.30	40.00	-17.70
	49.99	28.12	40.00	-11.88
	124.98	32.09	43.50	-11.41
	149.98	35.02	43.50	-8.48
Horizontal	50.00	21.85	40.00	-18.15
	125.00	30.86	43.50	-12.64
	149.99	34.41	43.50	-9.09
	155.61	32.12	43.50	-11.38

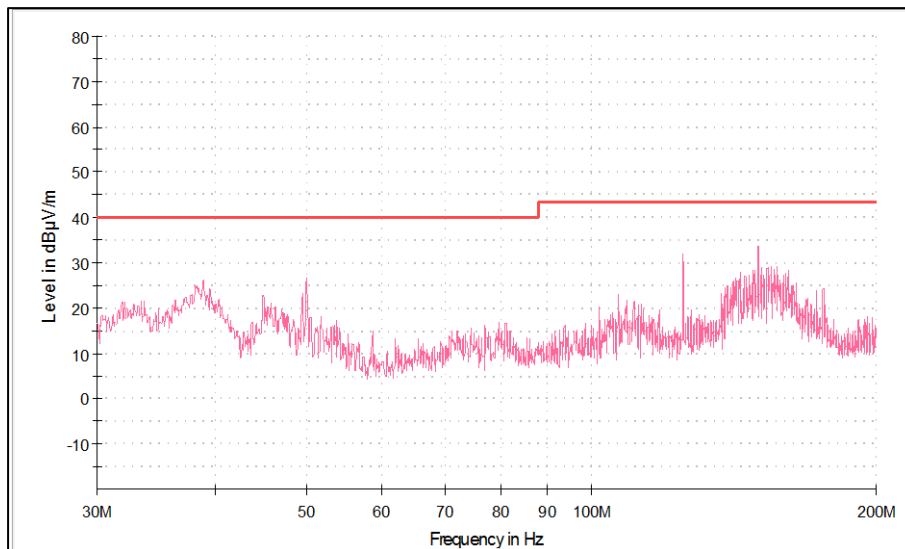


Polarization: Vertical

**Prüfbericht - Nr.:**  
Test Report No.:

**ULR-TC568820300000024F**

**Seite 21 von 46**  
Page 21 of 46

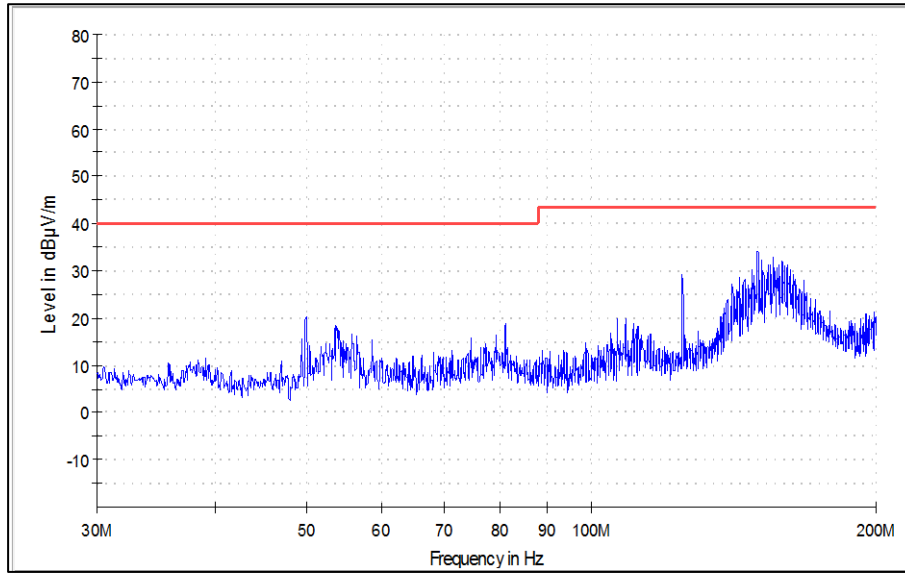


Polarization: Horizontal


**Test results for frequency range 200MHz – 1GHz**

**Power Mode: 24V DC Through NUP(RS232) Port**

Antenna Polarization	Frequency (MHz)	Peak Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Vertical	346.48	28.11	46.00	-17.89
	544.48	32.95	46.00	-13.05
	841.49	32.57	46.00	-13.43
	940.49	37.21	46.00	-8.79
Horizontal	249.97	34.80	46.00	-11.20
	346.49	28.97	46.00	-17.03
	742.48	30.84	46.00	-15.16
	841.50	32.19	46.00	-13.81

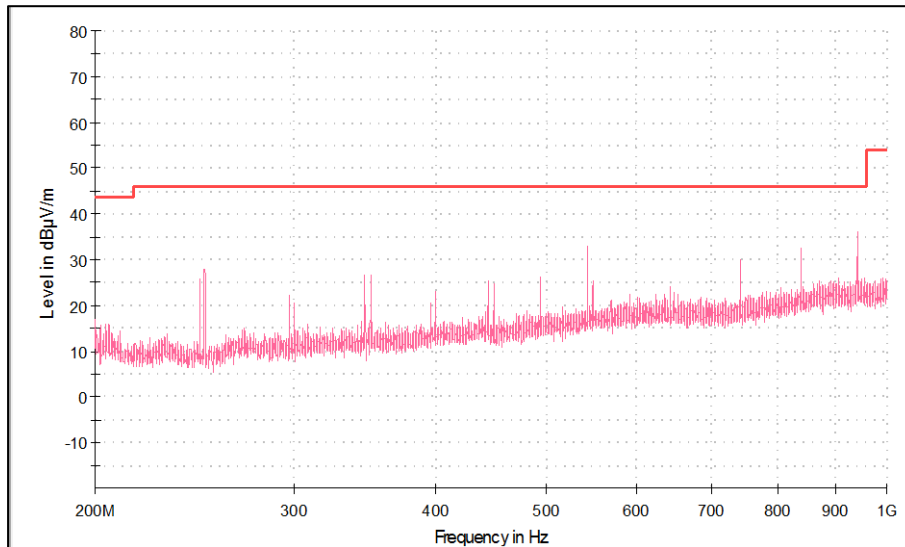


**Polarization: Vertical**

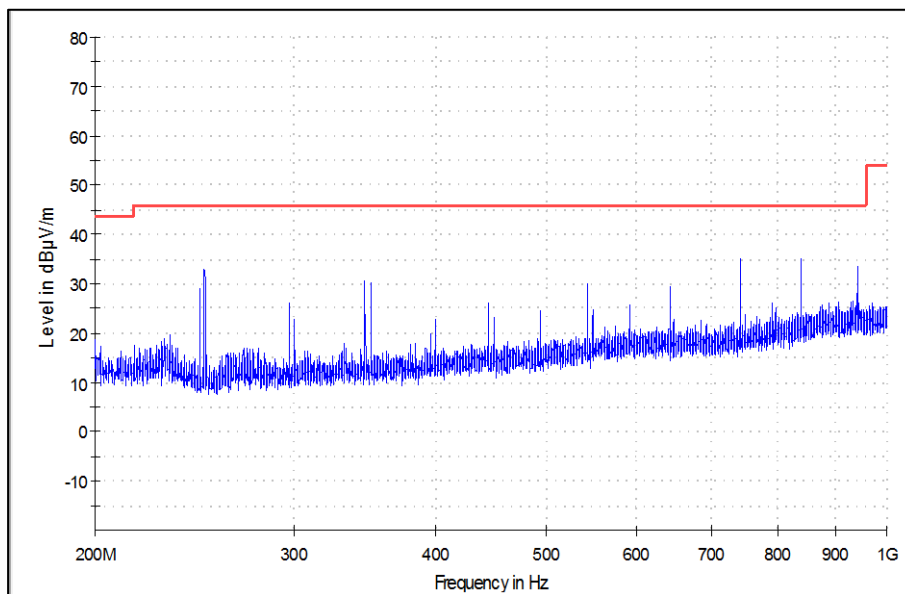


**Polarization: Horizontal**

**Power Mode: 24V DC Through (USB Port)**

Antenna Polarization	Frequency (MHz)	Peak Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Vertical	346.49	25.12	46.00	-20.88
Vertical	445.50	30.54	46.00	-15.46
Vertical	940.50	32.85	46.00	-13.15
Horizontal	249.96	32.76	46.00	-13.24
Horizontal	544.49	34.07	46.00	-11.93
Horizontal	841.49	31.88	46.00	-14.12

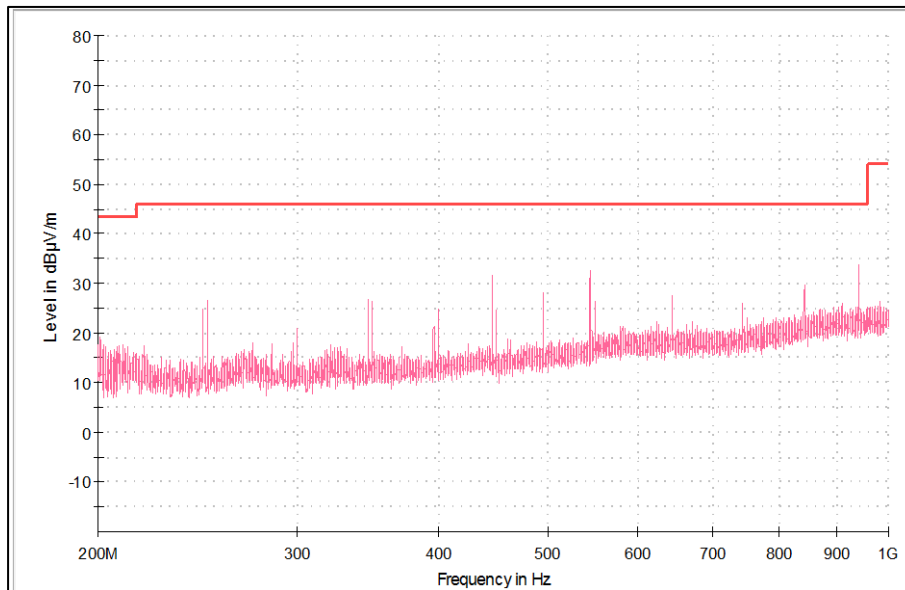

**Polarization: Vertical**

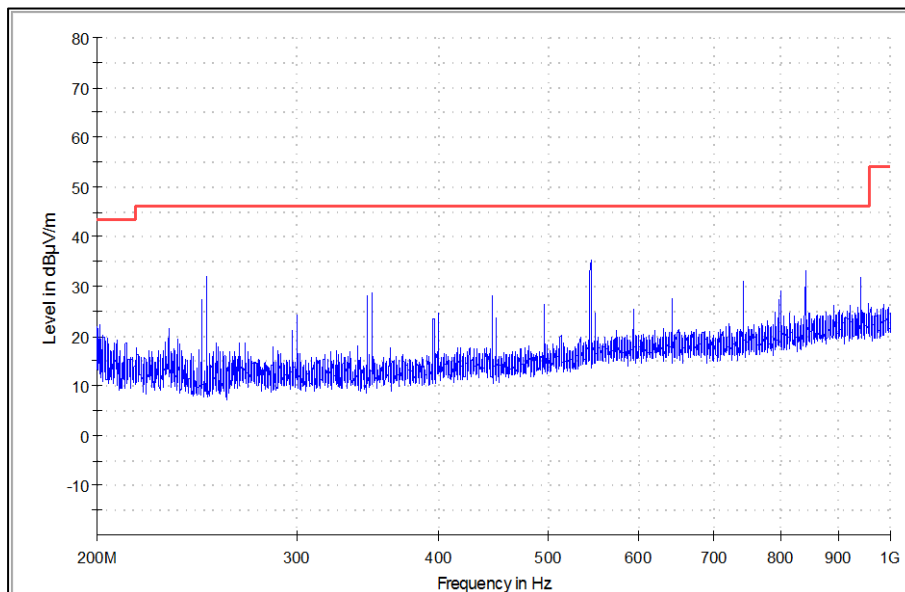

**Polarization: Horizontal**

**Prüfbericht - Nr.:**  
Test Report No.:

**ULR-TC568820300000024F**

Seite 24 von 46  
Page 24 of 46

Test results for the frequencies in the range 1 GHz to 26.5 GHz

Modulation: 802.11b

Data Rate: 11Mbps

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	2390(Pk)	51.62	74*	-22.38
		2390(Av)	35.16	54*	-18.84
		2402(Pk)	108.56	-	-
		2402(Av)	99.55	-	-
		4824(Pk)	42.47	74	-31.53
		4824(Av)	29.28	54	-24.72
		7236(Pk)	47.94	74	-26.06
		7236(Av)	34.61	54	-19.39
	Horizontal	2390(Pk)	49.12	74*	-24.88
		2390(Av)	33.71	54*	-20.29
		2402(Pk)	105.72	-	-
		2402(Av)	96,98	-	-
		4824(Pk)	42.14	74	-31.86
		4824(Av)	29.11	54	-24.89
		7236(Pk)	46.81	74	-27.19
		7236(Av)	34.53	54	-19.47
2442	Vertical	2442(Pk)	107.72	-	-
		2442(Av)	98.92	-	-
		4884(Pk)	42.10	74*	-31.90
		4884(Av)	30.01	54*	-23.99
		7326(Pk)	46.59	74	-27.41
		7326(Av)	34.57	54	-19.43
	Horizontal	2442(Pk)	105.28	-	-
		2442(Av)	96.59	-	-
		4884(Pk)	44.07	74	-29.93
		4884(Av)	31.46	54	-22.54
		7326(Pk)	46.79	74	-27.21
		7326(Av)	34.39	54	-19.61



Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2462	Vertical	2462(Pk)	106.48	-	-
		2462(Av)	97.81	-	-
		2483.5(Pk)	49.21	74*	-24.79
		2483.5(Av)	34.67	54*	-19.33
		4924(Pk)	42.96	74	-31.04
		4924(Av)	30.76	54	-23.24
		7386(Pk)	48.49	74	-25.51
		7386(Av)	34.74	54	-19.26
	Horizontal	2462(Pk)	104.52	-	-
		2462(Av)	95.97	-	-
		2483.5(Pk)	48.11	74*	-25.89
		2483.5(Av)	33.41	54*	-20.59
		4924(Pk)	43.12	74	-30.88
		4924(Av)	30.68	54	-23.32
		7386(Pk)	46.75	74	-27.25
		7386(Av)	34.63	54	-19.37

\* - : Indicate restricted band of operation §15.205  
Pk: Peak Detector; Av: Average Detector

**Table 9: RSE Test Results of Simultaneous Operation with Cellular and Non-Cellular:**

**Note:** As specified under the section 3.3 simultaneous combinations mode 1 and mode 2 are performed for AT&T and Verizon Cellular modules, respectively. Only worst-case reported.

Worst case result for WiFi and LTE Combination: LTE Band 2 and Wi-Fi 2.4GHz  
Worst case mode : - Mode 1 with AT&T cellular module


Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2412	Vertical	4824(Pk)	41.28	74	-32.72
		4824(Av)	29.07	54	-24.93
		7236(Pk)	No Harmonics Found		
		7236(Av)			
	Horizontal	4824(Pk)	43.13	74	-30.87
		4824(Av)	29.93	54	-24.07
		7236(Pk)	46.77	74	-27.23
		7236(Av)	34.12	54	-19.88

## 9 TEST RESULTS FOR BLUETOOTH LOW ENERGY

### 9.1 Maximum Peak Conducted Output Power

<i>Result</i>	<i>Pass</i>
Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.1.1 of ANSI C63.10
Measurement Bandwidth	300 kHz
Detector	Peak
Port of testing	Antenna port
Requirement	Power $\leq 1$ W (30 dBm) & e.i.r.p $\leq 4$ W (36 dBm)

#### Test Method

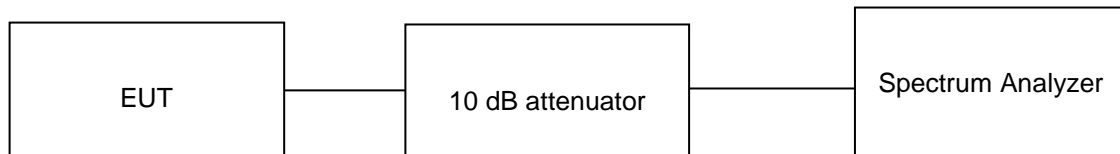

#### Test Condition

##### Normal Test Condition:

Temperature (Norm) = + 22.3 °C      Voltage = 24V DC (through UAB Port)      Relative humidity = 62 %

##### KDB Guidelines applied:


Measurements were made as per section 8.3.1 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

**Test results:**


**Note:**

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (2dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 3 dBi
4. Maximum (e.i.r.p) = Maximum Peak output power (dBm) + antenna gain (3 dBi)


Data Rate (Mbps)	Channel Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Maximum (e.i.r.p) (dBm)	Limit (dBm)	e.i.r.p Limit (dBm)
1	2402	5.50	8.50	30	36
	2440	4.29	7.29	30	36
	2480	2.78	5.78	30	36

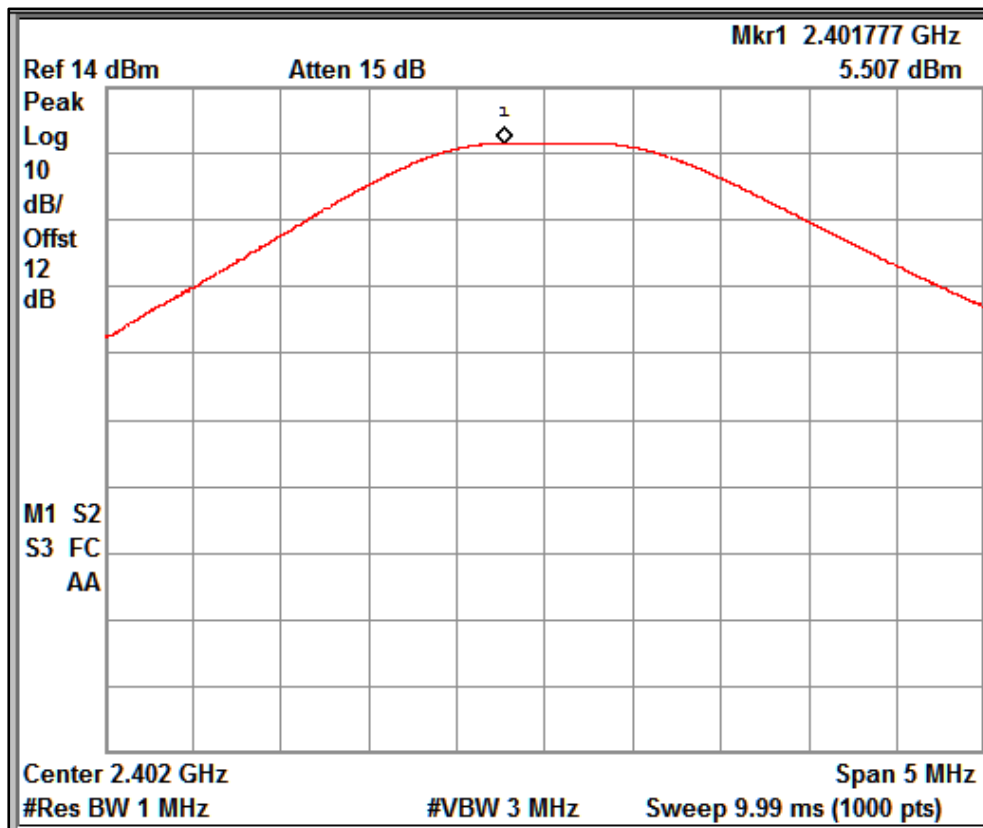

Channel Frequency: 2402MHz

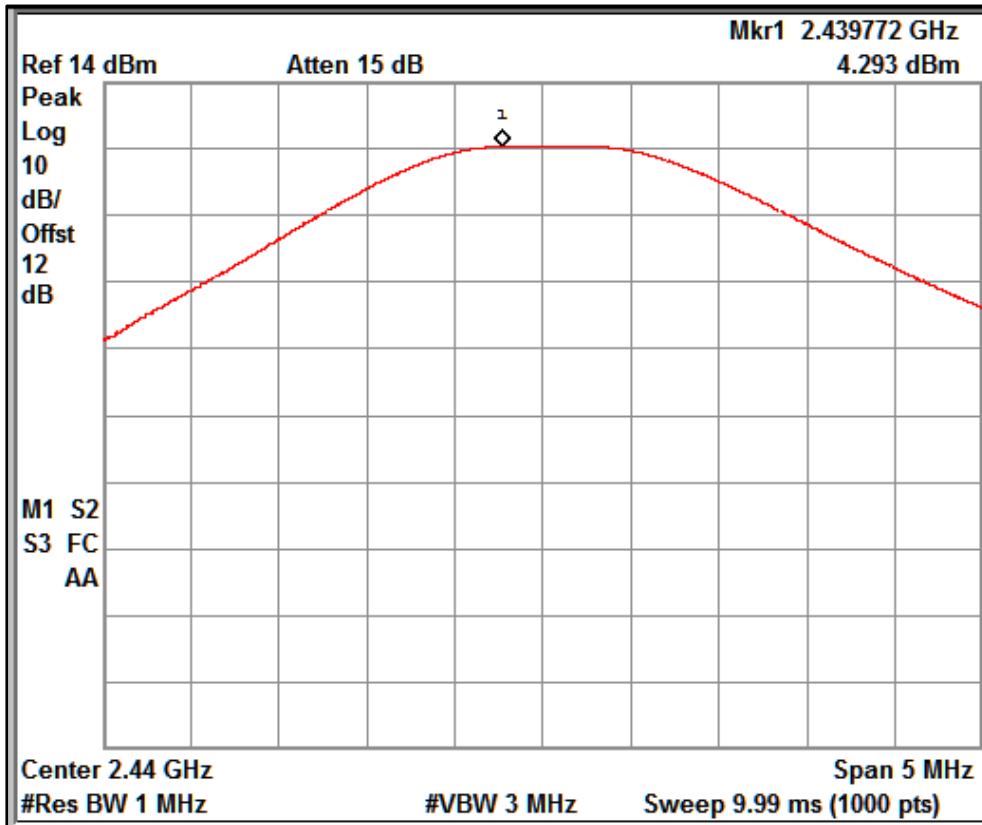

Channel Frequency: 2440MHz

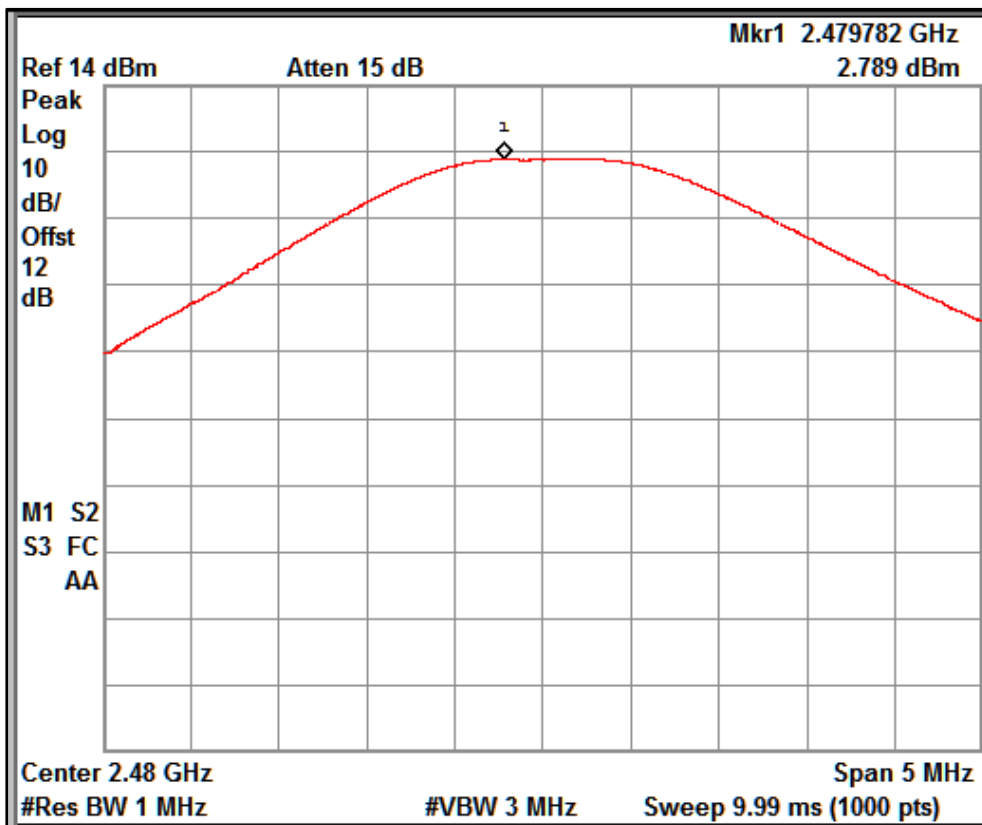

Channel Frequency: 2480MHz

## 9.2 Spurious Radiated Emissions & Restricted Bands of Operation

### Result

### Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205) / IC RSS-GEN, Section 8.9 and 8.10
Test Method	ANSI C63.10
Measurement Location	Fully anechoic chamber
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Reffer TEST METHODOLOGY

**Table 10: Transmitter limits for Radiated emission**

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: \* The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

### Environmental conditions:

Temperature (Norm) = + 24 °C Voltage = 24 V DC (through USB Port and NUP(RS232) Port)

Relative humidity = 62 %

Note: For the above 1 GHz worst case test results observed in power mode 24 V DC (through USB Port)

**Test results:**

Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

**Test Results:**


**Test results for frequency range 9kHz – 30MHz**

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, have not reported


**Test results for frequency range 30MHz – 200MHz**

**Power Mode: 24V DC Through NUP(RS232) Port**

Antenna Polarization	Frequency (MHz)	Peak Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	30.758	25.16	40.00	-14.84
	97.569	25.02	43.50	-18.48
	113.785	28.78	43.50	-14.72
	120.038	24.97	43.50	-18.53
Horizontal	95.913	17.54	43.50	-25.96
	125.008	34.21	43.50	-9.29
	150.002	36.60	43.50	-6.90

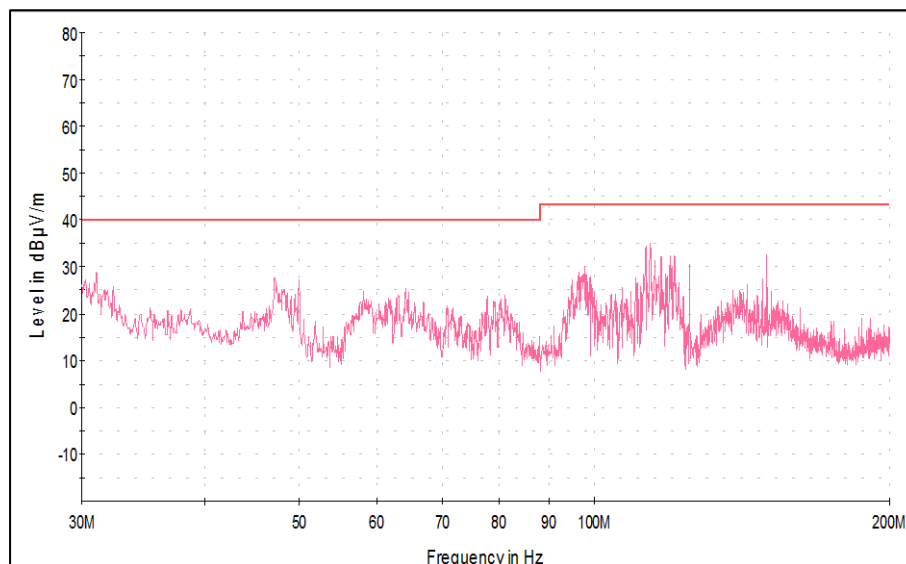


Polarization: Vertical

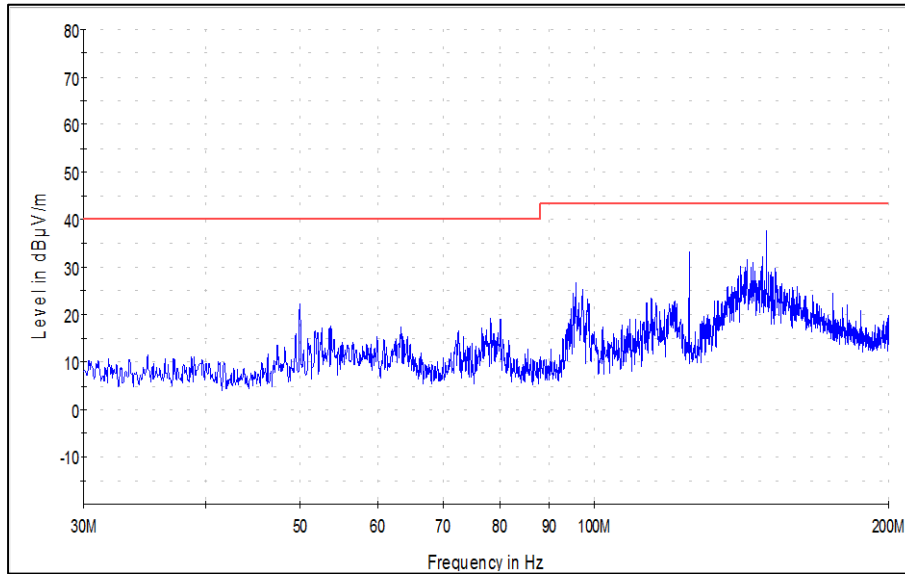

Polarization: Horizontal

**Power Mode: 24V DC Through (USB Port)**

Antenna Polarization	Frequency (MHz)	Peak Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Vertical	38.69	22.30	40.00	-17.70
	49.99	28.12	40.00	-11.88
	124.98	32.09	43.50	-11.41
	149.98	35.02	43.50	-8.48
Horizontal	50.00	21.85	40.00	-18.15
	125.00	30.86	43.50	-12.64
	149.99	34.41	43.50	-9.09
	155.61	32.12	43.50	-11.38

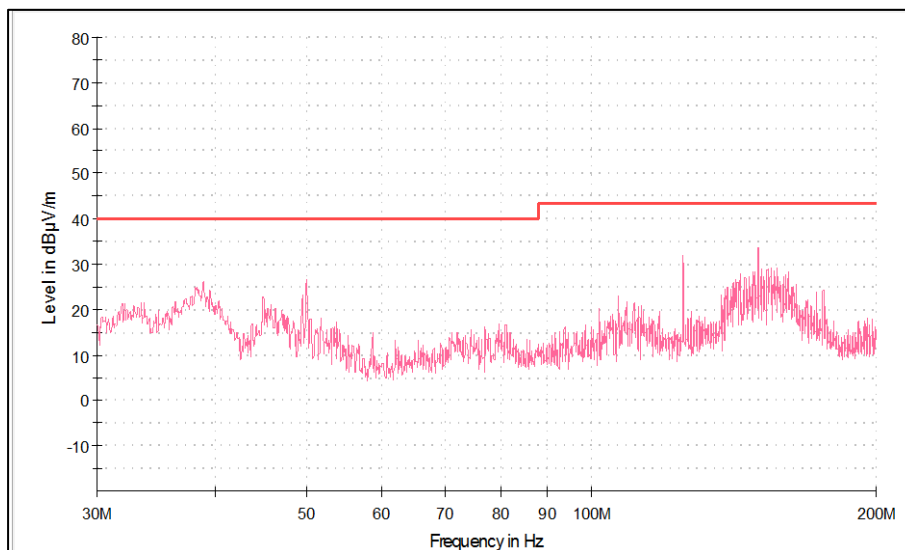


Polarization: Vertical

**Prüfbericht - Nr.:**  
Test Report No.:

**ULR-TC568820300000024F**

**Seite 32 von 46**  
Page 32 of 46

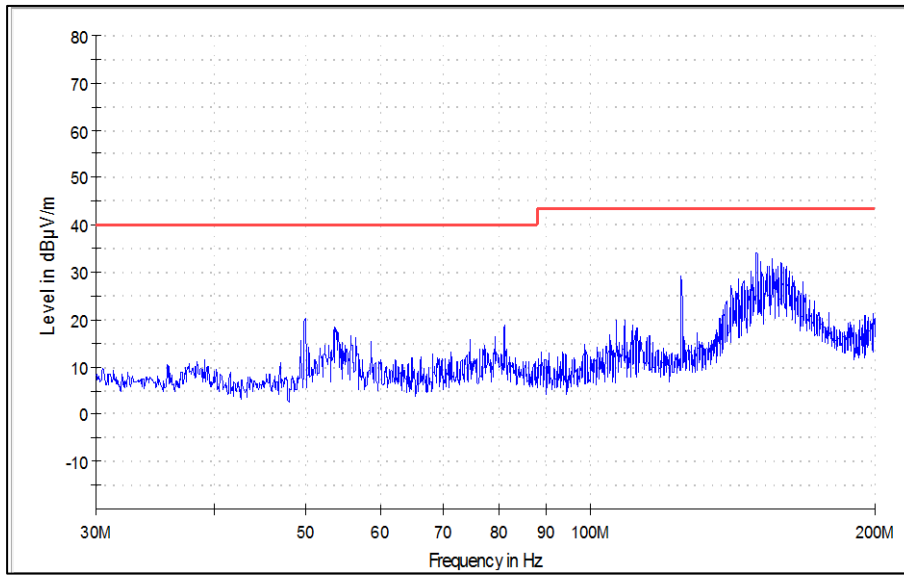


Polarization: Horizontal




**Test results for frequency range 200MHz – 1GHz**

**Power Mode: 24V DC Through NUP(RS232) Port**

Antenna Polarization	Frequency (MHz)	Peak Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Vertical	346.48	28.11	46.00	-17.89
	544.48	32.95	46.00	-13.05
	841.49	32.57	46.00	-13.43
	940.49	37.21	46.00	-8.79
Horizontal	249.97	34.80	46.00	-11.20
	346.49	28.97	46.00	-17.03
	742.48	30.84	46.00	-15.16
	841.50	32.19	46.00	-13.81

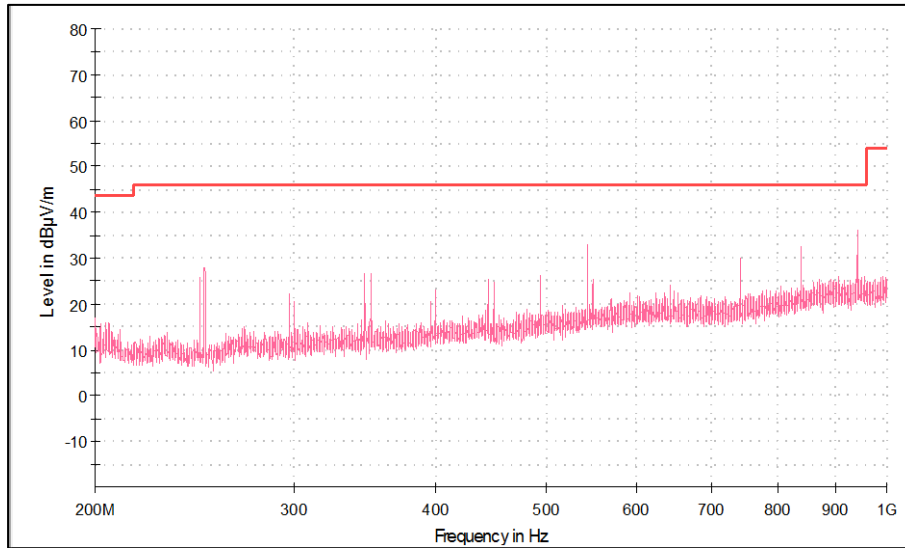


**Polarization: Vertical**

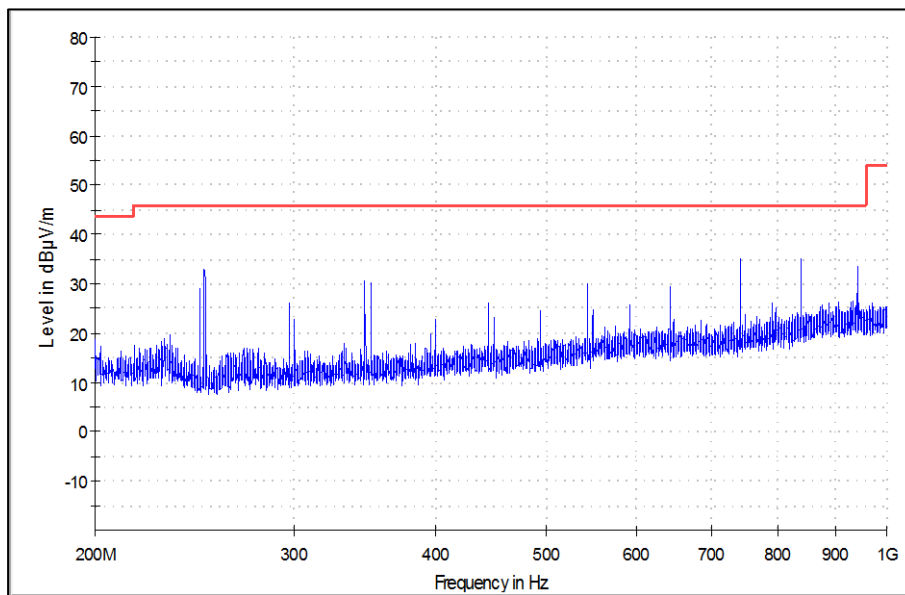


**Polarization: Horizontal**

**Power Mode: 24V DC Through (USB Port)**

Antenna Polarization	Frequency (MHz)	Peak Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Vertical	346.49	25.12	46.00	-20.88
Vertical	445.50	30.54	46.00	-15.46
Vertical	940.50	32.85	46.00	-13.15
Horizontal	249.96	32.76	46.00	-13.24
Horizontal	544.49	34.07	46.00	-11.93
Horizontal	841.49	31.88	46.00	-14.12

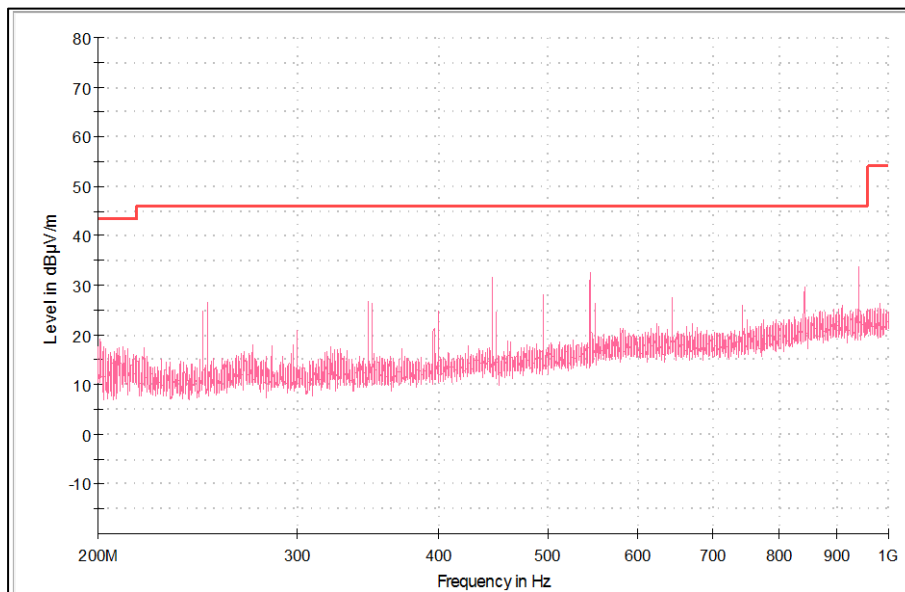

**Polarization: Vertical**

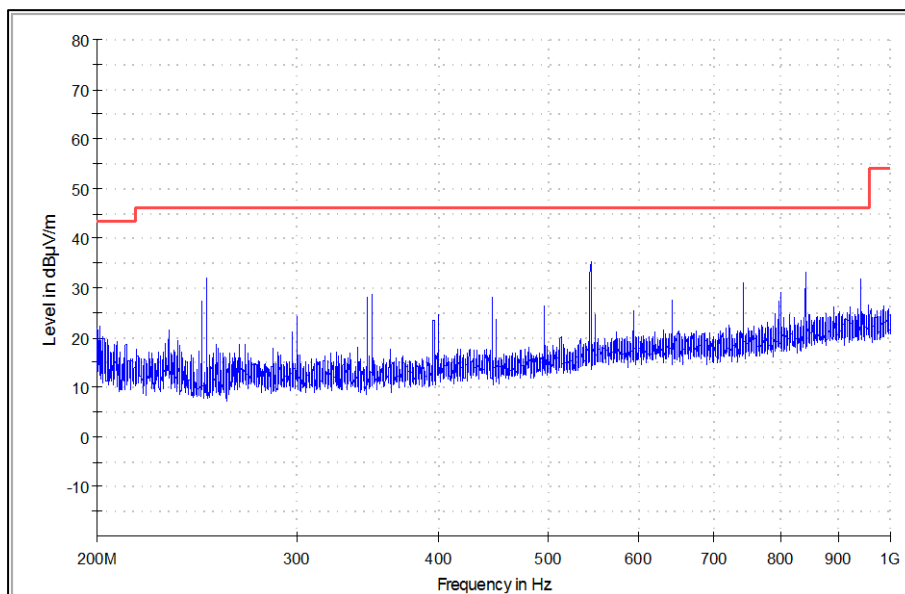

**Polarization: Horizontal**

**Test results for the frequencies above 1GHz**

Data rate : 1Mbps  
Channel Frequency : 2402MHz

Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	Vertical	2390(Pk)	40.53	74*	-33.47
		2390(Av)	26.50	54*	-27.50
		2402(Pk)	102.60	-	-
		2402(Av)	97.55	-	-
		4804(Pk)	39.88	74	-34.12
		4804(Av)	28.91	54	-25.09
		7206(Pk)	47.48	74	-26.52
		7206(Av)	34.07	54	-19.93
	Horizontal	2390(Pk)	40.91	74*	-33.09
		2390(Av)	25.14	54*	-28.86
		2402(Pk)	99.51	-	-
		2402(Av)	94.41	-	-
		4804(Pk)	41.51	74	-32.49
		4804(Av)	29.78	54	-24.22
2440	Vertical	7206(Pk)	47.78	74	-26.22
		7206(Av)	34.14	54	-19.86
		2440(Pk)	100.49	-	-
		2440(Av)	95.43	-	-
		4880(Pk)	40.2	74	-33.8
		4880(Av)	27.85	54	-26.15
	Horizontal	7320(Pk)	47.1	74	-26.9
		7320(Av)	34.21	54	-19.79
		2440(Pk)	97.7	-	-
		2440(Av)	92.59	-	-
Horizontal	4880(Pk)	40.26	74	-33.8	
	4880(Av)	28.26	54	-26.15	
Horizontal	7320(Pk)	47.09	74	-26.9	
	7320(Av)	34.21	54	-19.79	

\*- : Indicate restricted band of operation §15.205  
Pk: Peak Detector; Av: Average Detector

Channel Frequency (MHz)	Measured Frequency (MHz)	Polarization	Measured Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2480	2480(Pk)	Vertical	97.88	-	-
	2480(Av)		92.76	-	-
	2483.5(Pk)		43.22	74*	-30.78
	2483.5(Av)		29.78	54*	-24.22
	4960(Pk)		41.48	74	-32.52
	4960(Av)		28.34	54	-25.66
	7480(Pk)		46.53	74	-27.47
	7480(Av)		34.31	54	-19.69
	2480(Pk)	Horizontal	98.06	-	-
	2480(Av)		92.95	-	-
	2483.5(Pk)		44.11	74*	-29.89
	2483.5(Av)		30.1	54*	-23.9
	4960(Pk)		42.75	74	-31.25
	4960(Av)		31.27	54	-22.73
	7480(Pk)		47.97	74	-26.03
	7480(Av)		34.21	54	-19.79

\*- : Indicate restricted band of operation §15.205  
Pk: Peak Detector; Av: Average Detector


**Table 11: RSE Test Results of Simultaneous Operation with Cellular and Non-Cellular:**

**Note:** As specified under the section 3.3 simultaneous combinations are performed for both AT&T and Verizon Cellular modules, worst-case reported.

Worst case result for BLE and LTE Combination: LTE Band 2 and BLE  
Worst case mode : - Mode 1 with AT&T cellular module


Channel Frequency (MHz)	Antenna Polarization	Measured Frequency (MHz)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	Vertical	4804(Pk)	No Harmonics Found		
		4804(Av)			
		7206(Pk)	No Harmonics Found		
		7206(Av)			
	Horizontal	4804(Pk)	43.30	74	-30.70
		4804(Av)	32.07	54	-21.93
		7206(Pk)	No Harmonics Found		
		7206(Av)			

**Worst Case Test Plots:**

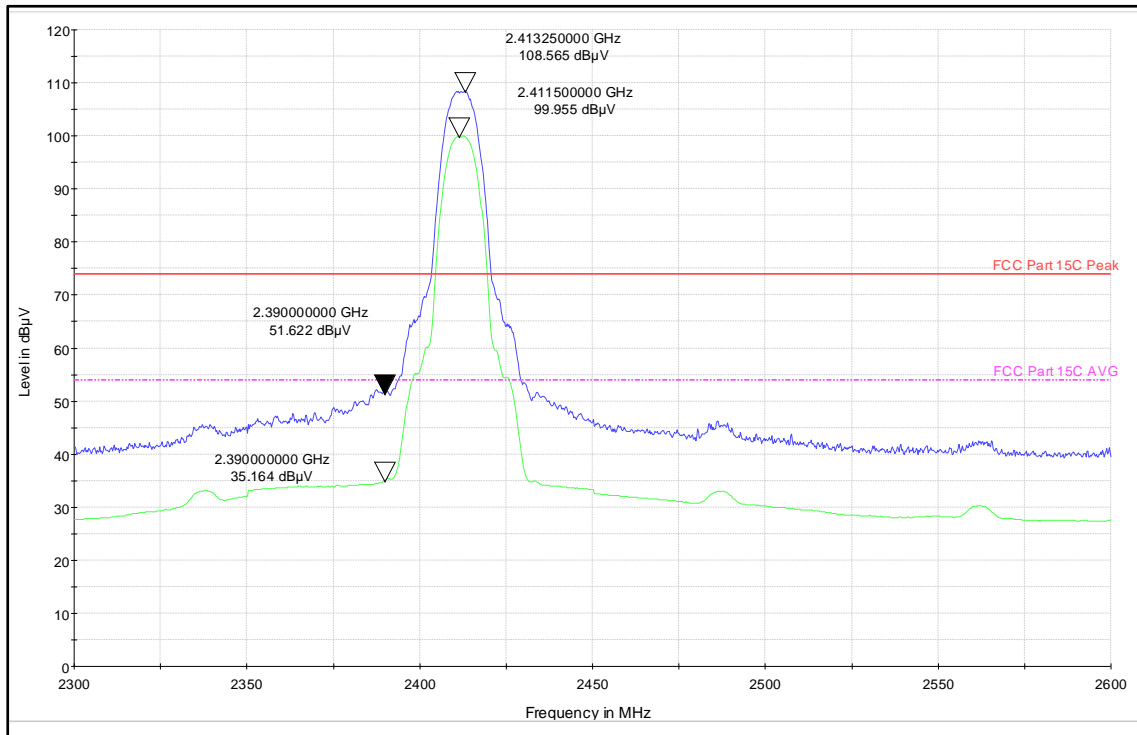


**Fundamental Frequency**

**Polarization: Vertical**

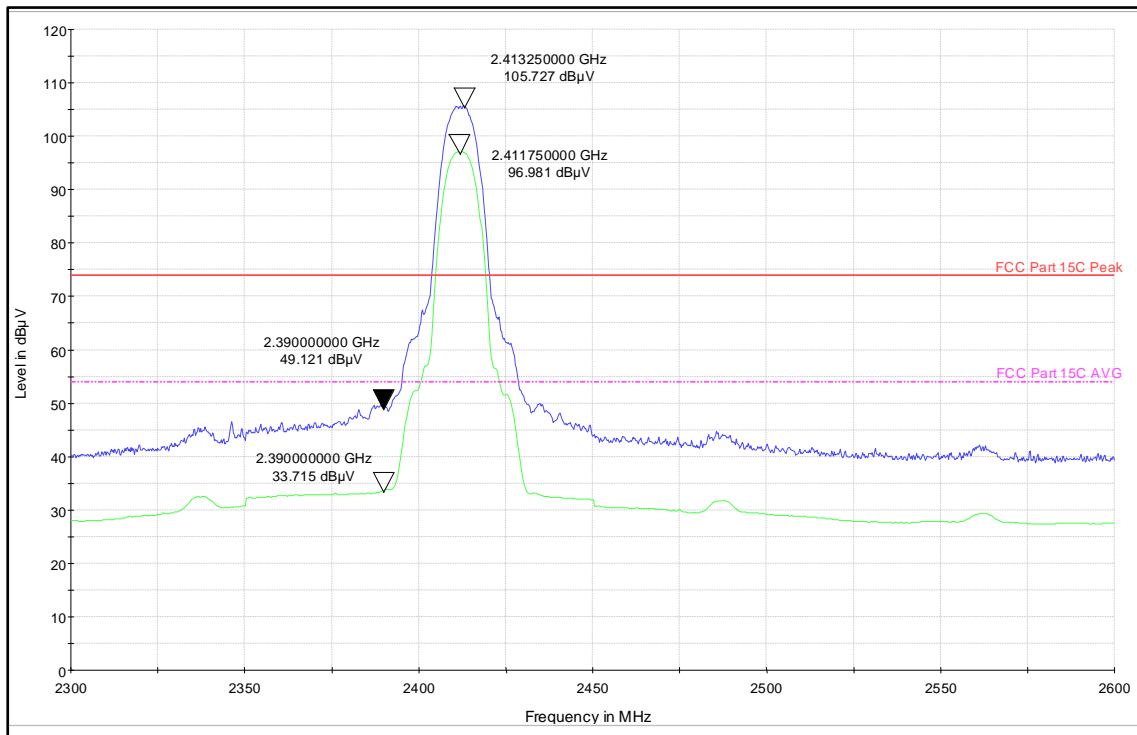


**Fundamental Frequency**

**Polarization: Horizontal**

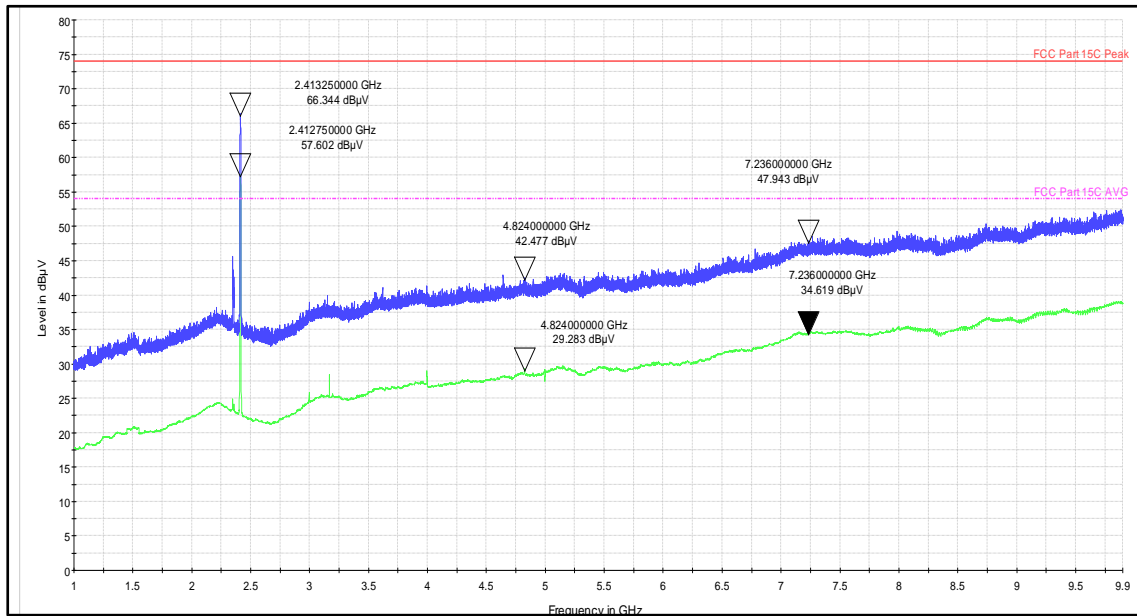


Frequency range:1GHz-9.9GHz

Polarization: Vertical

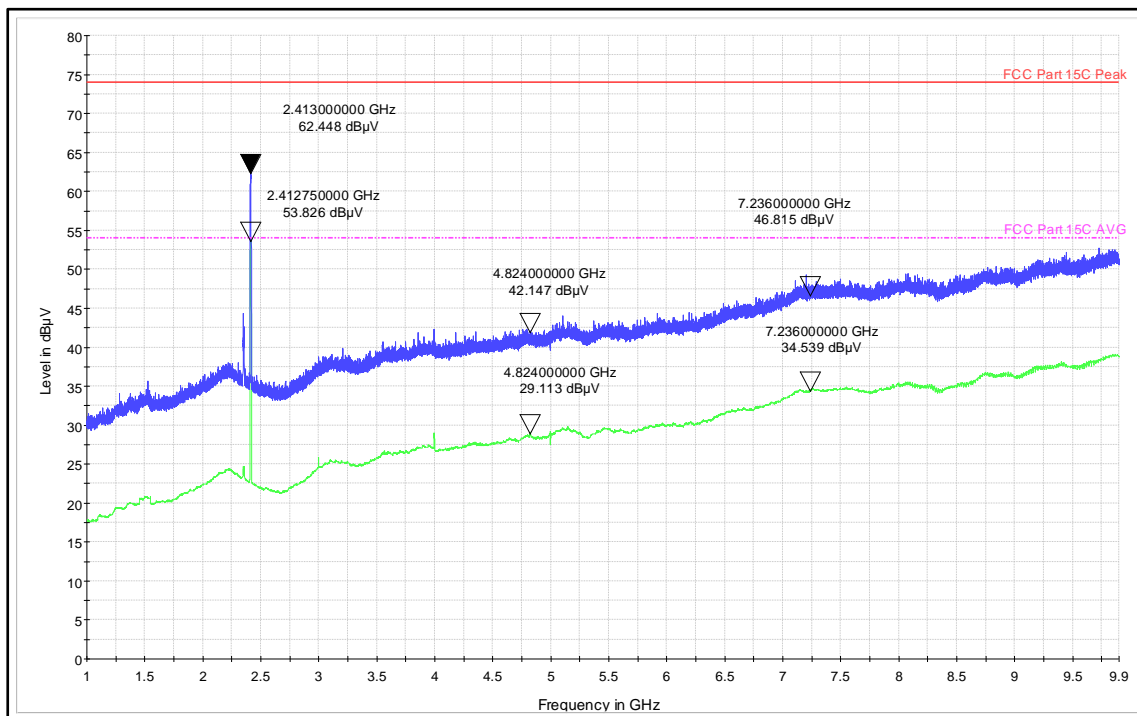


Frequency range:1GHz-9.9GHz

Polarization: Horizontal

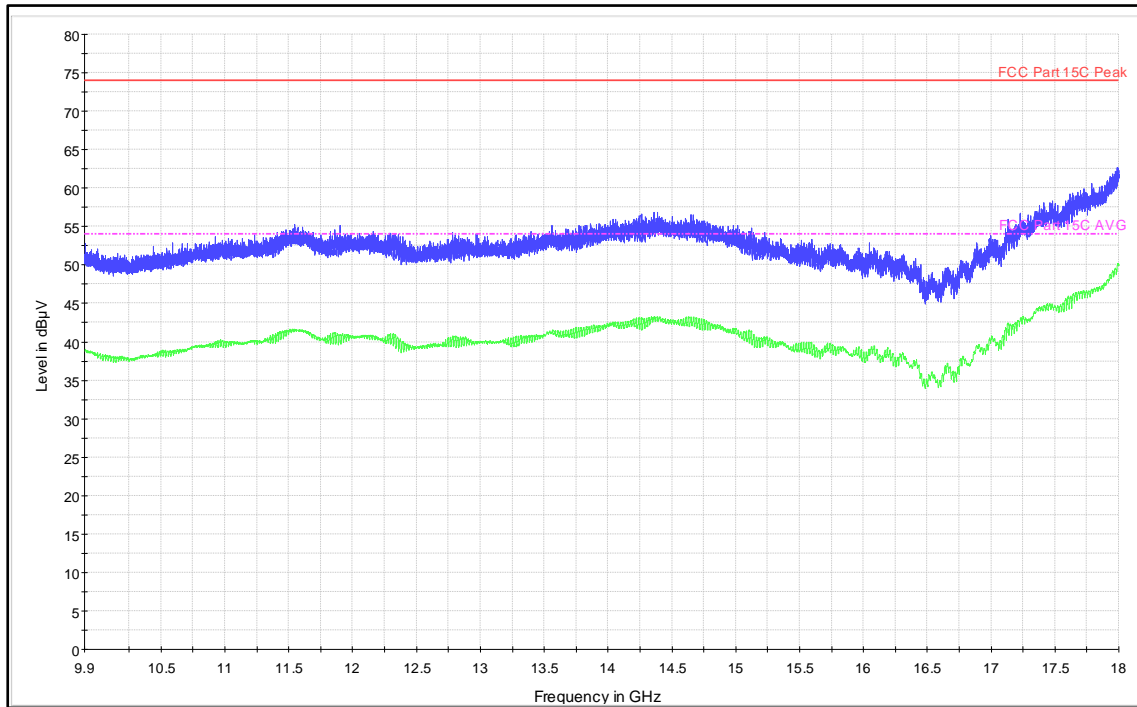


**Frequency range:9.9GHz-18GHz**

**Polarization: Vertical**

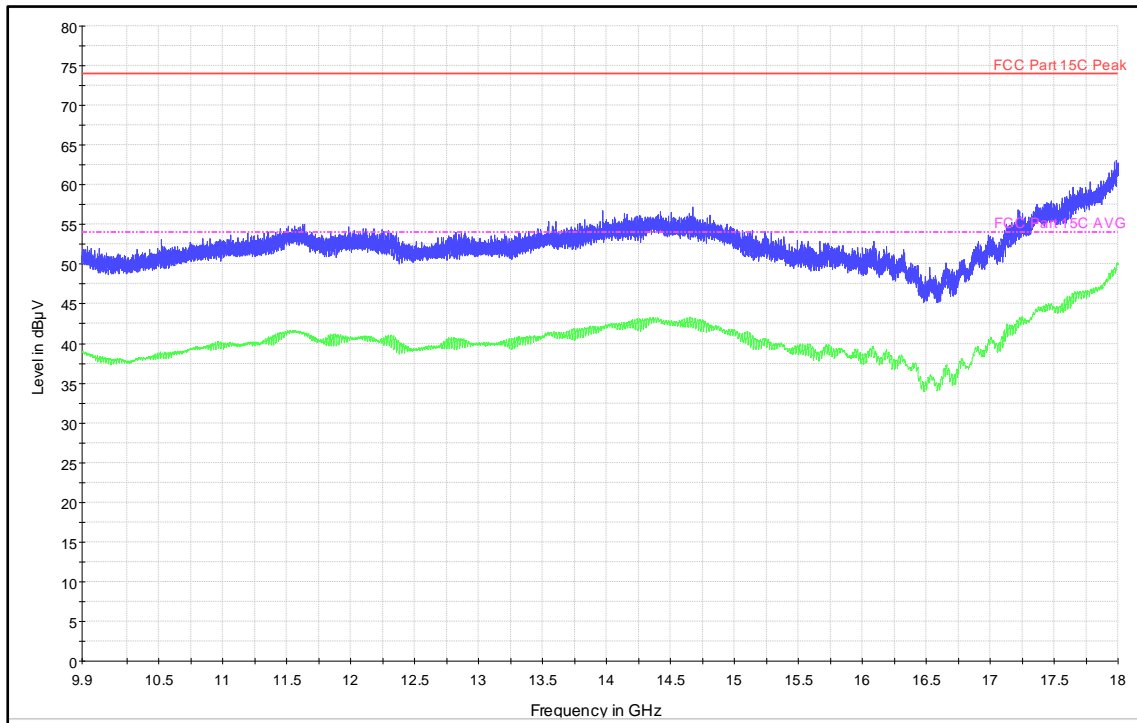


**Frequency range:9.9GHz-18GHz**

**Polarization: Horizontal**

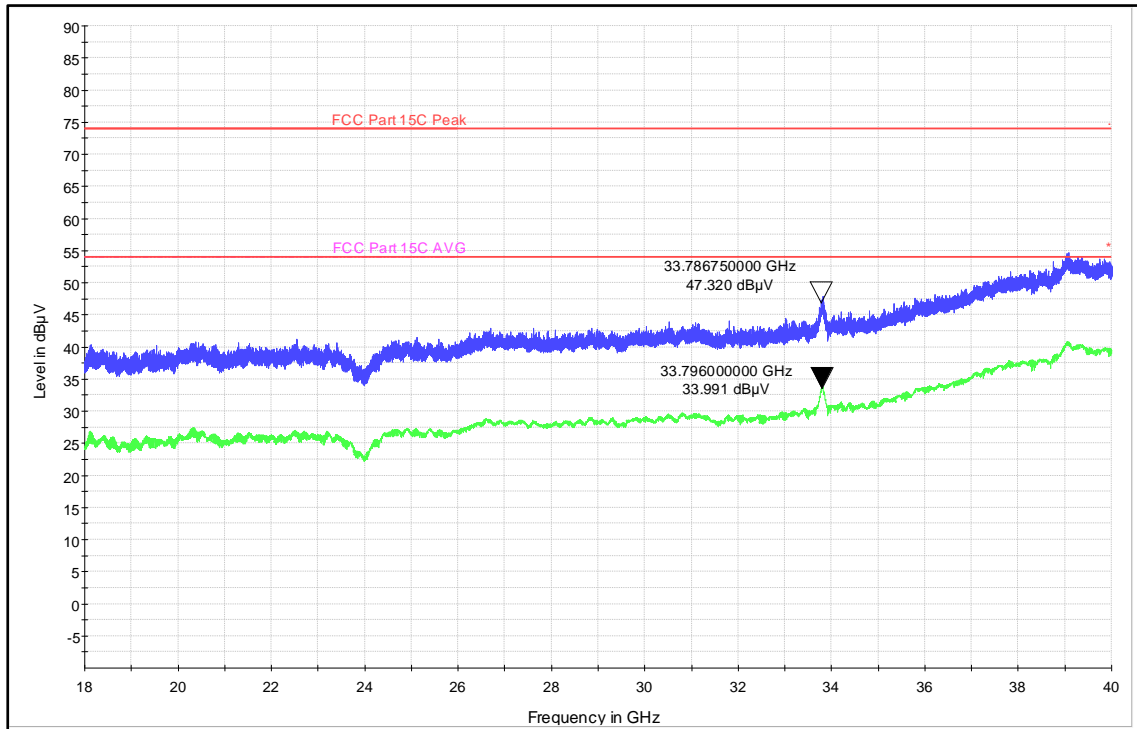

Frequency range:18GHz-40GHz

Polarization: Vertical

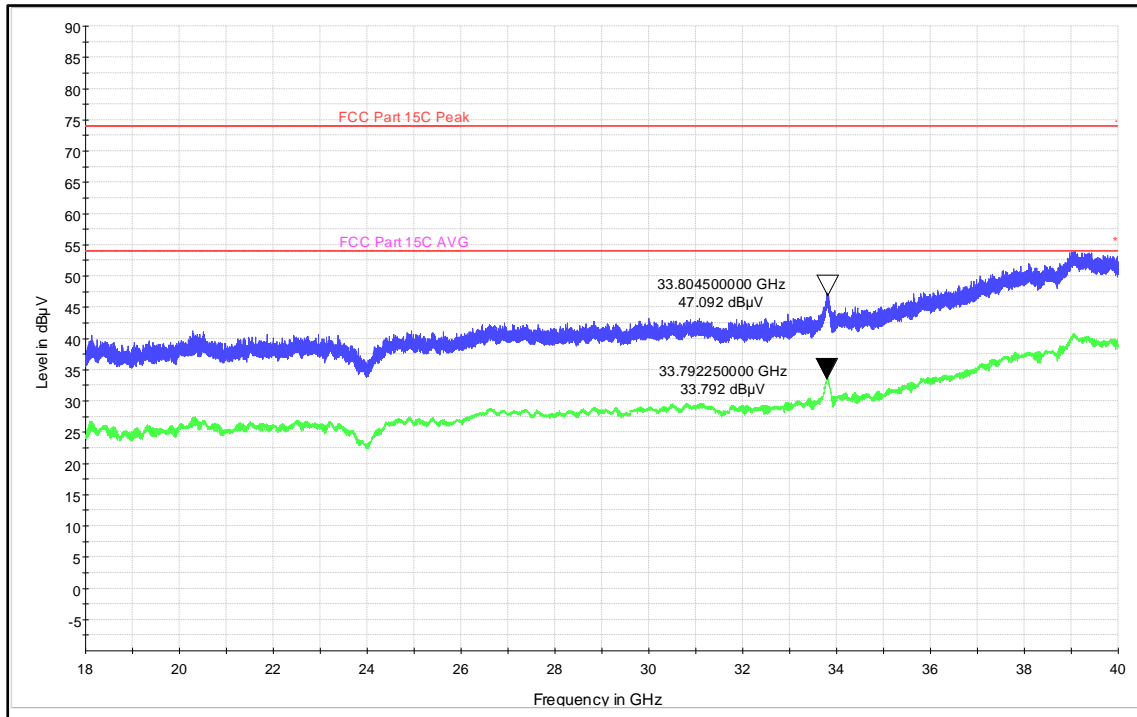

Frequency range:18GHz-40GHz

Polarization: Horizontal



## 10 Conducted Spurious Emission Test on AC Power Line

**Result**

**Pass**

Test Specification : FCC Part 15 Section 15.207 / RSS Gen Issue 5 Section 8.8  
 Test Method : ANSI C 63.10-2013  
 Testing Location : Screened room  
 Measurement Bandwidth : 9kHz  
 Frequency Range : 150kHz – 30MHz  
 Supply Voltage : 110VAC,60Hz  
 Test Method : Refer TEST METHODOLOGY

**\*Note: The product has tested with 24 V DC (through USB Port and NUP(RS232) Port)**

**Limits of section 15.207**

Frequency of emission (MHz)	QP Limit (dBµV)	AV Limit (dBµV/m)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency


**Test Conditions:**

Temperature (Norm) = + 24 °C Voltage = 24 V DC (through USB Port and NUP(RS232) Port)

Relative humidity = 62 %

Test result:


Power Mode: 24V DC Through NUP(RS232) Port

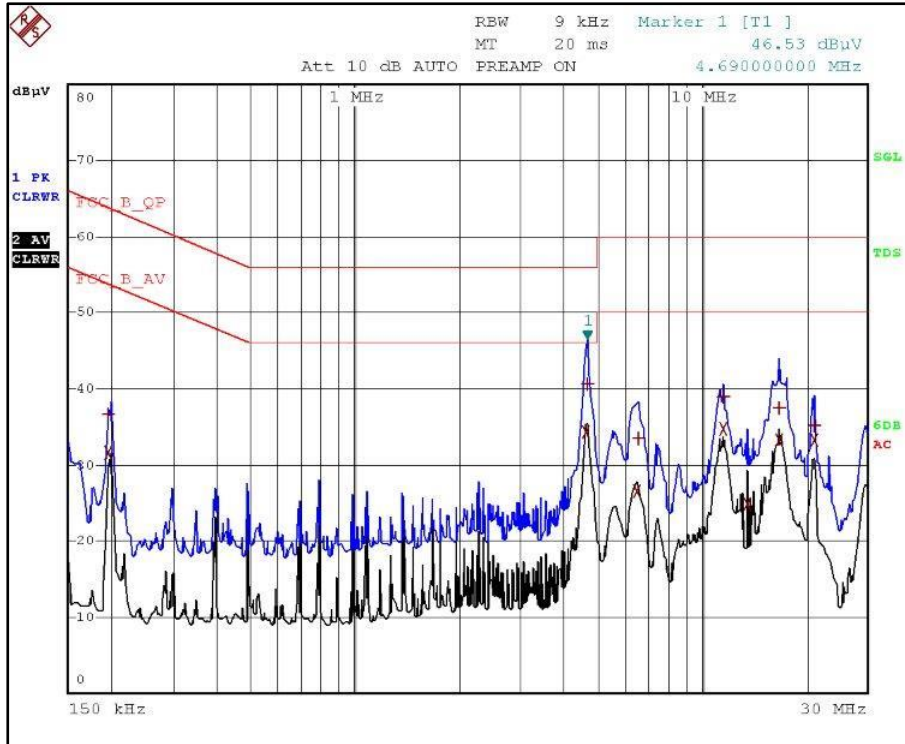

Graph: Line

EDIT PEAK LIST (Final Measurement Results)				
TRACE	FREQUENCY	LEVEL dBµV	DELTA	LIMIT dB
Trace1:	FCC_B_QP			
Trace2:	FCC_B_AV			
Trace3:	---			
2 Average	4.638 MHz	34.41	-11.58	
2 Average	11.554 MHz	34.74	-15.25	
1 Quasi Peak	4.69 MHz	40.67	-15.32	
2 Average	21.038 MHz	33.26	-16.73	
2 Average	16.786 MHz	33.24	-16.75	
1 Quasi Peak	11.554 MHz	38.92	-21.07	
2 Average	198 kHz	31.66	-22.02	
1 Quasi Peak	16.786 MHz	37.53	-22.46	
2 Average	6.53 MHz	26.46	-23.53	
1 Quasi Peak	21.042 MHz	35.17	-24.82	
2 Average	13.562 MHz	24.94	-25.05	
1 Quasi Peak	6.554 MHz	33.41	-26.58	
1 Quasi Peak	198 kHz	36.69	-26.99	

Results: Line

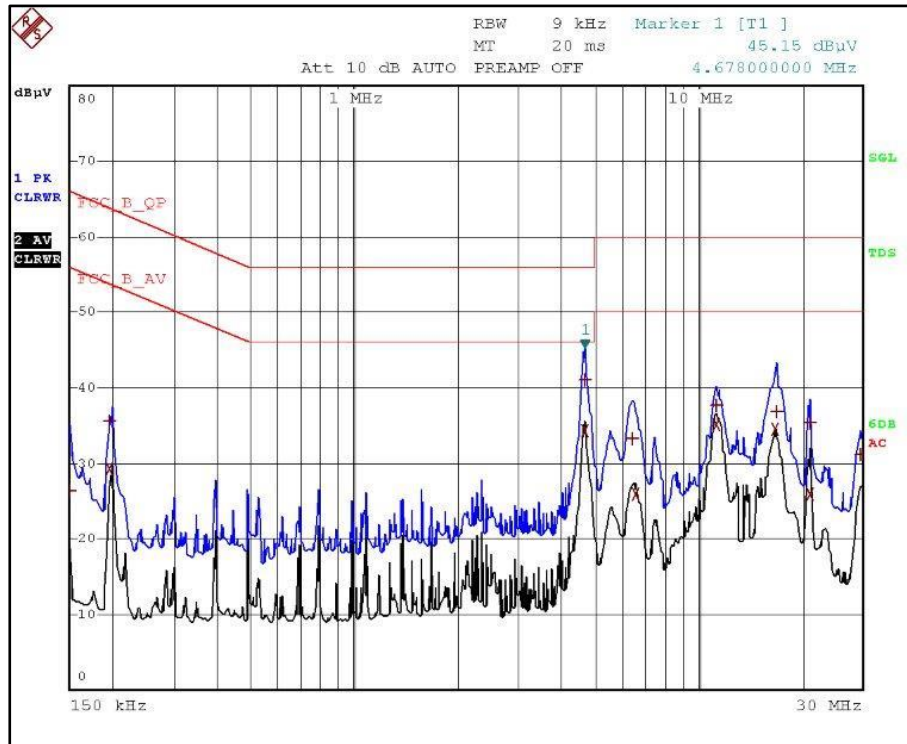

**Graph: Neutral**


EDIT PEAK LIST (Final Measurement Results)

Trace1: FCC\_B\_QP  
Trace2: FCC\_B\_AV  
Trace3: ---

TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	4.678 MHz	34.40	-11.59
2 Average	11.35 MHz	35.24	-14.75
1 Quasi Peak	4.678 MHz	41.09	-14.90
2 Average	16.686 MHz	34.62	-15.37
1 Quasi Peak	11.35 MHz	37.76	-22.23
1 Quasi Peak	16.886 MHz	36.88	-23.11
2 Average	6.57 MHz	25.98	-24.01
2 Average	21.09 MHz	25.90	-24.09
2 Average	198 kHz	29.20	-24.49
1 Quasi Peak	21.086 MHz	35.28	-24.71
1 Quasi Peak	6.418 MHz	33.26	-26.73
1 Quasi Peak	198 kHz	35.64	-28.05
1 Quasi Peak	29.546 MHz	31.18	-28.81
1 Quasi Peak	150 kHz	26.27	-39.72

**Results: Neutral**

Power Mode: 24V DC Through (USB Port)

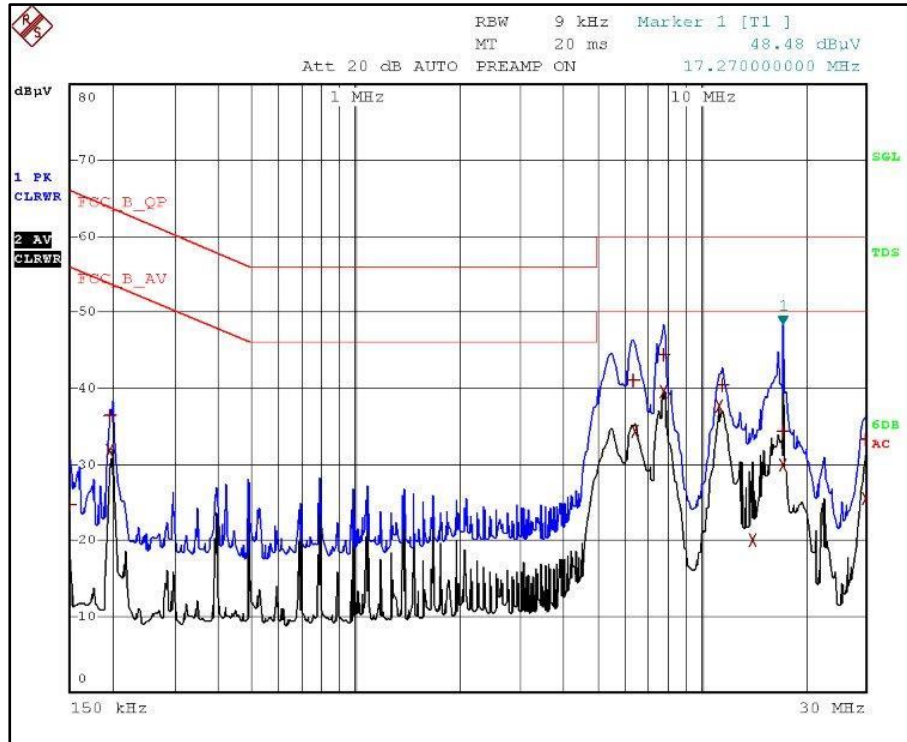


Graph: Line

EDIT PEAK LIST (Final Measurement Results)

Trace1: FCC\_B\_QP  
Trace2: FCC\_B\_AV  
Trace3: ---

TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
2 Average	7.794 MHz	39.57	-10.42
2 Average	11.35 MHz	37.60	-12.39
1 Quasi Peak	7.798 MHz	44.40	-15.59
2 Average	6.426 MHz	34.27	-15.72
1 Quasi Peak	6.358 MHz	41.10	-18.89
1 Quasi Peak	11.55 MHz	40.31	-19.68
2 Average	17.27 MHz	30.02	-19.97
2 Average	198 kHz	31.76	-21.92
2 Average	29.878 MHz	25.48	-24.51
1 Quasi Peak	17.27 MHz	34.26	-25.73
1 Quasi Peak	29.934 MHz	33.27	-26.73
1 Quasi Peak	198 kHz	36.36	-27.33
2 Average	14.078 MHz	19.98	-30.01
1 Quasi Peak	150 kHz	24.62	-41.37

Results: Line

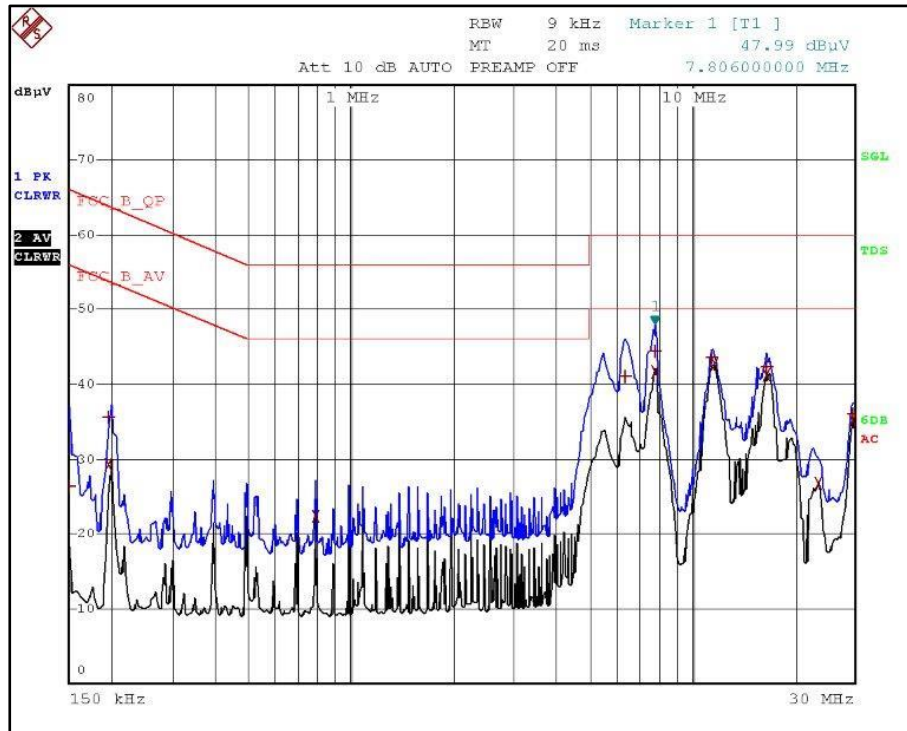

Graph: Neutral

EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	FCC_B_QP		
Trace2:	FCC_B_AV		
Trace3:	---		
2 Average	11.65 MHz	42.80	-7.19
2 Average	7.81 MHz	41.73	-8.26
2 Average	16.578 MHz	41.17	-8.82
2 Average	29.706 MHz	35.13	-14.86
1 Quasi Peak	7.806 MHz	44.36	-15.63
1 Quasi Peak	11.454 MHz	43.66	-16.33
1 Quasi Peak	16.578 MHz	42.40	-17.59
1 Quasi Peak	6.398 MHz	40.94	-19.05
2 Average	23.498 MHz	26.73	-23.26
2 Average	790 kHz	22.35	-23.64
1 Quasi Peak	29.606 MHz	35.91	-24.08
2 Average	198 kHz	29.20	-24.48
1 Quasi Peak	198 kHz	35.57	-28.12
1 Quasi Peak	150 kHz	26.44	-39.55

Graph: Results

## 11 LIST OF TABLES

Table 1: List of test and measurement instruments .....	6
Table 2: Instrument application Software versions .....	7
Table 3: Ratings and System Details as declared by Client* .....	8
Table 4: Measurement Uncertainty .....	9
Table 5: TUV Sample identification details .....	10
Table 6: List of Wi-Fi center Frequencies .....	11
Table 7: List of BLE Center frequencies .....	11
Table 8: Transmitter limits for Radiated emission .....	18
Table 9: RSE Test Results of Simultaneous Operation with Cellular and Non-Cellular: .....	25
Table 10: Transmitter limits for Radiated emission .....	29
Table 11: RSE Test Results of Simultaneous Operation with Cellular and Non-Cellular: .....	36

\*\*\*\*\*END OF TEST REPORT\*\*\*\*\*