



EUROFINS PRODUCT SERVICE GMBH



Testing Cert #1983.01

TEST- REPORT

Compliance Test Report

**FCC PART 15 SUBPART C
IC RSS 210 ISSUE 7**

FCC ID: PV7-WIBEAR-E

Component

WiBear-E, AN00K60055

Bluetooth Radio Part

TEST REPORT NUMBER: G0M21008-3605-P-15



Eurofins Product Service GmbH
Storkower Str. 38c, 15526 Reichenwalde,
Germany

Phone +49-33631-888 0
Fax +49-33631-888 660

TABLE OF CONTENTS

1	General Information	4
1.1	Notes	4
1.2	Testing laboratory	5
1.3	Details of approval holder	6
1.4	Application details	6
1.5	Test item	6
1.6	Test standards	7
1.7	Acronyms and abbreviations	7
2	Technical test	8
2.1	Summary of test results	8
2.2	Test environment	8
2.3	Test equipment utilized	9
2.4	Sample emission level calculation	10
2.5	Test results	11
3	Informational Transmitter parameters	12
3.1	Transmitter Modes for conformance testing	12
3.2	Occupied Bandwidth	13
4	Transmitter parameters	15
4.1	20dB Bandwidth	15
4.2	Frequency hopping channel number	17
4.3	Frequency hopping channel spacing	19
4.4	Time of occupancy (Dwell time)	21
4.5	Maximum peak conducted output power	23
4.6	Maximum e.i.r.p. output power	25
4.7	Transmitter band-edge compliance	27
4.8	Transmitter conducted spurious emissions	29
4.9	Transmitter radiated spurious emissions	31
5	Power Line parameters	34
5.1	AC power line conducted emissions	34
Annex A	Photos	35
Annex B	Transmitter occupied bandwidth	38

Annex C	Transmitter 20dB bandwidth	44
Annex D	Hopping channels	53
Annex E	Hopping channel separation	57
Annex F	Time of occupancy	58
Annex G	AC Powerline Conducted Emissions	59
Annex H	Transmitter conducted spurious emissions	61
Annex I	Band edge compliance	79
Annex J	Transmitter radiated spurious emissions	91

1 General Information

1.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

Eurofins Product Service GmbH is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.


The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the Eurofins Product Service GmbH.

This document is subject to the General Terms and Conditions and the Testing and Certification System of Eurofins Product Service GmbH, available on request or accessible at www.pt.eurofins.com

Operator:

01.11.2010

M. Handrik



Date	Eurofins-Lab.	Name	Signature
------	---------------	------	-----------

Technical responsibility for area of testing:

01.11.2010

J. Zimmermann



Date	Eurofins	Name	Signature
------	----------	------	-----------

1.2 Testing laboratory

EUROFINS PRODUCT SERVICE GMBH
Storkower Strasse 38c
D-15526 Reichenwalde b. Berlin
Germany
Telefon : +49 33631 888 00
Telefax : +49 33631 888 660

DAR ACCREDITED TESTING LABORATORY
DAR-REGISTRATION NUMBER: DAT-P-268/08

RECOGNIZED NOTIFIED BODY EMC
REGISTRATION NUMBER: BNetzA-bS EMV-07/61

RECOGNIZED NOTIFIED BODY R&TTE
REGISTRATION NUMBER: BNetzA-bS-02/51-53

FCC FILED TEST LABORATORY
REG.-No. 96970

A2LA ACCREDITED TESTING LABORATORY
CERTIFICATE No. 1983.01

BLUETOOTH QUALIFICATION TEST FACILITY (BQTF)
ACCREDITED BY BLUETOOTH QUALIFICATION REVIEW BOARD

INDUSTRY CANADA FILED TEST LABORATORY
REG. NO. IC 3470

Test location, where different:

Name : ./.
Street : ./.
Town : ./.
Country : ./.
Telephone : ./.
Fax : ./.

1.3 Details of approval holder

Name : lesswire AG
Street : Im Technologiepark 1
Town : 15236 Frankfurt/Oder
Country : Germany
Telephone : 030 / 6392 8282
Fax : 030 / 6392 8287

Contact : Herr Ralph Meyfarth
Telephone : 030 / 6392 8282

1.4 Application details

Date of receipt of application : 31.08.2010
Date of receipt of test item : 31.08.2010
Date of test : 09. – 10.09.2010

1.5 Test item

Description of test item : Component
Type identification : WiBear-E, AN00K60055
Brand Name : WiBear
Serial number : 00543
Hardware version : 1.0
Software version : 10.38.x
Equipment type : Radio module

Technical data

Frequency range : 2400 - 2483.5MHz
Radio Technology : Bluetooth with EDR
Tested frequencies : F₁ 2402MHz
Tested frequencies : F₂ 2441MHz
Tested frequencies : F₃ 2480MHz
Antenna type : external
Antenna model : ELAP01-D25, Elcard Wireless Systems Oy
Number of antennas : 1
Antenna gain : 2.0dBi
(Declared by approval holder)
Power supply : 3.3VDC
Duty cycle : 46%
Operating mode : semi duplex

Spreading technique : FHSS
Modulations : GFSK, PI/4-DQPSK, 8-PSK
Device classification : Mobile Device (Human Body distance > 20 cm)
Additional information : The results in this test report cover only the bluetooth radio part of the EUT.

Manufacturer:
(if applicable)

Name : lesswire AG
Street : Im Technologiepark 1
Town : 15236 Frankfurt/Oder
Country : Germany

1.6 Test standards

Technical standard : **FCC PART 15 SUBPART C**
 IC RSS 210 ISSUE 7

1.7 Acronyms and abbreviations

EUT : Equipment under Test
TX : Transmission
RX : Reception
RBW : Measurement Resolution Bandwidth
Pol : Measurement Polarization
e.i.r.p. : Equivalent isotropic radiated power
FHSS : Frequency hopping spread spectrum
DSSS : Direct Sequence Spread Spectrum
OFDM : Orthogonal frequency division multiplexing
CCK : Complementary code keying
GFSK : Gaussian frequency shift keying
DQPSK : Differential quadrature phase shift keying
PSK : Phase shift keying
T_{nom} : Nominal Temperature
T_{min} : Minimum Temperature
T_{max} : Maximum Temperature
V_{nom} : Nominal Supply Voltage
V_{min} : Minimum Supply Voltage
V_{max} : Maximum Supply Voltage
VDC : DC voltage
N/A : Not applicable
IC : Industry Canada

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 2.4 were ascertained in the course of the tests performed.

2.2 Test environment

Temperature : 22 ... 26°C

Relative humidity content : 20 ... 75%

Air pressure : 86 ... 103kPa

Extreme conditions parameters:

V_{nom} : 3.3VDC

$V_{min} (V_{nom}-15\%)$: -

$V_{max} (V_{nom}+15\%)$: -

T_{nom} : 25°C

Other parameter: None

2.3 Test equipment utilized

Measurement Equipment List					
No.	Measurement device:	Type:	Manufacturer:	Last Cal.	Next Cal.
ETS 0086	Semi-anechoic chamber	AC1	Frankonia	12.03.2010	12.03.2011
ETS 0271	Spectrum Analyzer	FSEK30	Rohde & Schwarz	19.03.2009	19.03.2011
ETS 0012	Biconical Antenna	HK 116	Rohde & Schwarz	29.01.2010	29.01.2011
ETS 0336	LPD Antenna	HL 223	Rohde & Schwarz	28.01.2010	28.01.2011
ETS 0018	Horn Antenna	BBHA 9120D	Schwarzbeck	26.08.2010	26.08.2011
ETS 0432	Amplifier-Matrix			02.06.2010	02.06.2012
ETS 0496	Spectrum Analyzer	FSP30	Rohde & Schwarz	26.08.2010	26.08.2011
ETS 0086	Semi-anechoic chamber	AC1	Frankonia	12.03.2010	12.03.2011

2.4 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit = Margin
21.5 dB μ V		+ 26 dB		= 47.5 dB μ V/m		: 47.5 dB μ V/m - 57.0 dB μ V/m = -9.5 dB

2.5 Test results

 1st test

 test after modification

 production test

Test case	Clause	Required	Result	Remarks
INFORMATIONAL TRANSMITTER PARAMETERS				
Occupied Bandwidth	IC RSS-Gen. 4.6.1	<input checked="" type="checkbox"/>		
TRANSMITTER PARAMETERS				
20dB Bandwidth	FCC § 15.247(a)(1) IC RSS-210 § A8.1	<input checked="" type="checkbox"/>	PASS	
Frequency hopping channel number	FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	<input checked="" type="checkbox"/>	PASS	
Frequency hopping channel spacing	FCC § 15.247(a)(1) IC RSS-210 § A8.1	<input checked="" type="checkbox"/>	PASS	
Time of occupancy (dwell time)	FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	<input checked="" type="checkbox"/>	PASS	
Maximum peak conducted output power	FCC § 15.247(b) IC RSS-210 § A8.4	<input checked="" type="checkbox"/>	PASS	
Maximum peak e.i.r.p. output power	FCC § 15.247(b) IC RSS-210 § A8.4	<input checked="" type="checkbox"/>	PASS	
Band-edge Compliance	FCC § 15.247(d) IC RSS-210 § A8.5	<input checked="" type="checkbox"/>	PASS	
Conducted spurious emissions	FCC § 15.247(d) IC RSS-210 § A8.5	<input checked="" type="checkbox"/>	PASS	
Radiated spurious emissions	FCC § 15.247(d) FCC § 15.209 IC RSS-210 § A8.5 IC RSS-Gen § 4.9	<input checked="" type="checkbox"/>	PASS	
RECEIVER PARAMETERS				
Radiated spurious emissions	FCC § 15.109 IC RSS-Gen § 4.10 IC RSS-Gen § 7.2.3	<input type="checkbox"/>	N/A	IC only
POWER LINE PARAMETERS				
AC power line conducted emissions	FCC § 15.207 IC RSS-Gen. 7.2.2	<input checked="" type="checkbox"/>	PASS	

3 Informational Transmitter parameters

3.1 Transmitter Modes for conformance testing

The following transmission modes are elected for compliance testing.

TEST MODE DH5	
Conditions	
Spread Spectrum :	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Spreading Technique :	FHSS
Modulation :	GFSK
Packet Type :	DH5
Data rate :	1Mbps
Duty Cycle :	46%


TEST MODE 2-DH5	
Conditions	
Spread Spectrum :	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Spreading Technique :	FHSS
Modulation :	$\pi/4$ -DQPSK
Packet Type :	2-DH5
Data rate :	2Mbps
Duty Cycle :	46%

TEST MODE 3-DH5	
Conditions	
Spread Spectrum :	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Spreading Technique :	FHSS
Modulation :	8-PSK
Packet Type :	3-DH5
Data rate :	3Mbps
Duty Cycle :	46%

3.2 Occupied Bandwidth

According to RSS-Gen Section 4.6.1 the 99% emission bandwidth occupied by the modulated transmitted signal has to be reported as calculated or measured.

3.2.1 Measurement procedure

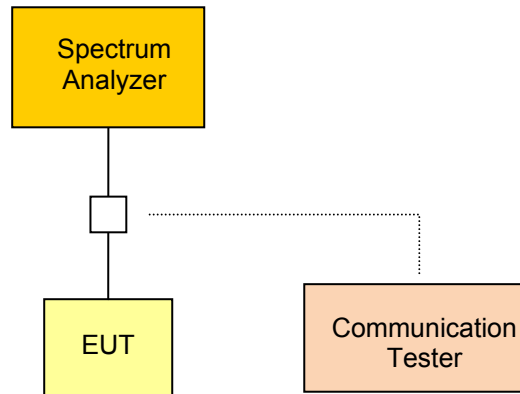

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) with maximum power under normal test conditions. The span of the analyzer is set wide enough to capture all significant emissions of the modulation spectrum. The resolution bandwidth is set as close as possible to 1% of the selected span without being below 1%. The occupied bandwidth is then measured and evaluated by an internal measurement procedure of the analyzer.

3.2.2 Results

Transmitter occupied bandwidth			
Measurement Conditions			
Power occupation :		99%	
Channel [MHz]	Lower edge frequency [MHz]	Upper edge frequency [MHz]	Occupied Bandwidth [MHz]
Test mode DH5			
2402	2401.6	2402.5	0.882
2441	2440.6	2441.5	0.892
2480	2479.5	2480.5	0.912
Test mode 3-DH5			
2402	2401.4	2402.6	1.143
2441	2440.4	2441.6	1.132
2480	2479.4	2480.6	1.142
See attached diagram in Annex			
Verdict			PASS

4 Transmitter parameters

4.1 20dB Bandwidth


According FCC rules 47 CFR 15.247(a)(1) and RSS-210 Section A8.1 the 20dB Bandwidth determines the necessary carrier spacing used in the frequency hopping system.

4.1.1 Limits

According FCC and IC rules frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

20dB bandwidth limits	
Output Power	20dB Bandwidth Limit
$\leq 125\text{mW} / 21\text{dBm}$	1.5 * carrier spacing
125mW – 1W / 21 – 30dBm	1.0 * carrier spacing

4.1.2 Measurement procedure

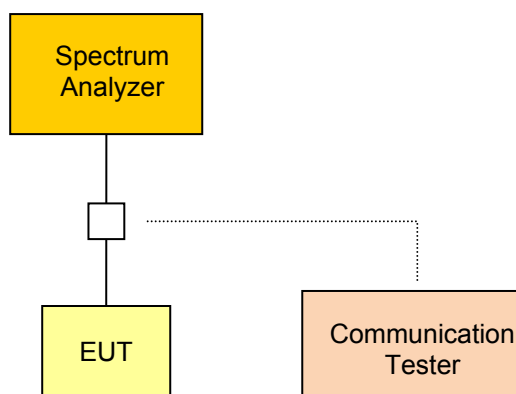

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) with maximum power under normal test conditions. The resolution bandwidth is set to 1% of the 20dB bandwidth of the emission spectrum ($VBW \geq RBW$). The center frequency is set to the hopping channel center frequency. The span of the analyzer is set to 2 -3 times the 20dB bandwidth. The bandwidth is determined using markers with peak detector and max hold.

According to 47 CFR 15.31 battery power equipment is measured using new batteries and equipment using external power supply is measured with 85%, 100% and 115% of the nominal rated supply voltage.

4.1.3 Results

20dB bandwidth		
Measurement Conditions		
Max. output power :	5.42dBm	
Carrier spacing :	1MHz	
Channel [MHz]	20dB Bandwidth [MHz]	Bandwidth Limit [MHz]
Test mode DH5		
2402	0.9434	≤ 1.5
2441	0.9434	≤ 1.5
2480	0.9434	≤ 1.5
Test mode 2-DH5		
2402	1.1859	≤ 1.5
2441	1.1859	≤ 1.5
2480	1.1859	≤ 1.5
Test mode 3-DH5		
2402	1.1991	≤ 1.5
2441	1.2212	≤ 1.5
2480	1.2212	≤ 1.5
See attached diagrams in Annex		
Measurement uncertainty		4.22dB
Verdict		PASS

4.2 Frequency hopping channel number


According FCC rules 47 CFR 15.247(a)(1)(iii) and RSS-210 Section A8.1 the number of hopping channels used, determines if the system can be certified as a hopping system and also the power level the system can use.

4.2.1 Limits

According FCC and IC rules frequency hopping systems shall use a minimum of 15 hopping channels. If the hopping system uses at least 75 hopping channels, the maximum conducted output power can be increased from 0.125W to 1W.

Frequency hopping channel number limits	
Max. conducted output Power	Minimum number of channels
$\leq 125\text{mW} / 21\text{dBm}$	15
125mW – 1W / 21 - 30dBm	75

4.2.2 Measurement procedure

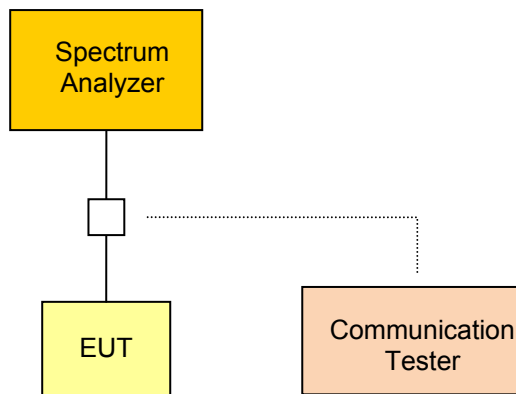

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) with hopping activated. The resolution bandwidth is set to 1% of the span ($VBW \geq RBW$) and the span is set to 2400 – 2483.5MHz. The power level is measured with peak detector and max hold.

4.2.3 Results

Number of hopping channels	
Measurement Conditions	
Test mode :	DH5
Max. output power :	9.8dBm
Number of channels	Hopping channel limit
79	≥ 15
See attached diagrams in Annex	
Measurement uncertainty	4.22dB
Verdict	PASS

4.3 Frequency hopping channel spacing


According FCC rules 47 CFR 15.247(a)(1) and RSS-210 Section A8.1 the minimum hopping channel frequency spacing is correlated to the 20dB bandwidth of the hopping channel emission and and maximum peak output power.

4.3.1 Limits

According FCC and IC rules frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Frequency hopping channel spacing limits	
Max. conducted output Power	Minimum hopping channel spacing
$\leq 125\text{mW} / 21\text{dBm}$	$\geq 25\text{kHz}$ or $\frac{2}{3}$ of 20dB bandwidth
125mW – 1W / 21 – 30dBm	$\geq 25\text{kHz}$ or 20dB bandwidth

4.3.2 Measurement procedure

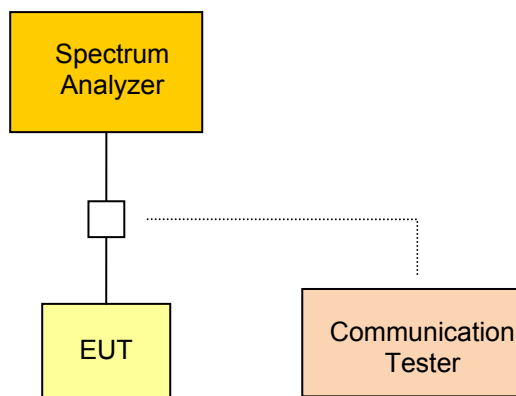

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) with hopping activated. The resolution bandwidth is set to 1% of the span ($VBW \geq RBW$) and the span is set wide enough to capture two adjacent channels. The power level is measured with peak detector and max hold.

4.3.3 Results

Frequency hopping channel spacing	
Measurement Conditions	
Test mode :	DH5
Tested channels :	2441MHz / 2442MHz
Max. output power :	5.42dBm
Channel spacing [kHz]	Channel spacing limit [kHz]
1000.0	$\geq \frac{2}{3} * 943.4 = 629$
See attached diagrams in Annex	
Measurement uncertainty	4.22dB
Verdict	PASS

4.4 Time of occupancy (Dwell time)


According FCC rules 47 CFR 15.247(a)(1)(iii) and RSS-210 Section A8.1 the average time of occupancy on any channel is limited.

4.4.1 Limits

According FCC and IC rules the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Time of occupancy (dwell time) limits	
Dwell time limit	Channel occupancy period
0.4s	0.4 * Number of hopping channels

4.4.2 Measurement procedure

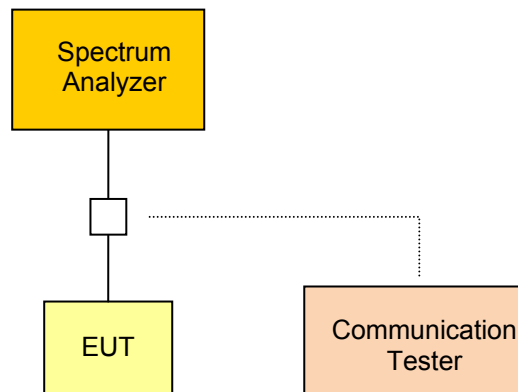

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) with hopping activated. The resolution bandwidth is set to 1MHz ($VBW \geq RBW$) and the span is set to zero centered on a hopping channel. The sweep time is set large enough to capture the dwell time. The power level is measured with peak detector and max hold.

4.4.3 Results

Time of occupancy (Dwell time)	
Measurement Conditions	
Test mode :	DH5
Tested channel :	2441
Number of hopping channels :	79
Time of occupancy	Channel occupancy periode
63 * 2.893ms = 0.182s	31.6s
See attached diagrams in Annex	
Measurement uncertainty	4.22dB
Verdict	PASS

4.5 Maximum peak conducted output power

According FCC rules 47 CFR 15.247(b)(1) and RSS-210 Section A8.4 the maximum peak conducted output power is limited and has been verified.


4.5.1 Limits

For frequency hopping systems operating in the band 2400-2483.5 MHz employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

Maximum peak conducted output power limits	
Number of Hopping Channels	Conducted Power Limit
≥ 75	1W (30dBm)*
15 - 74	125mW (21dBm)*

*) The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.5.2 Measurement procedure

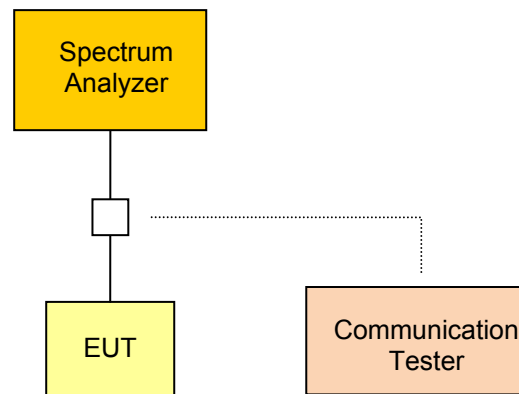

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) with maximum power under normal test conditions. The resolution bandwidth is set higher than the 20dB Bandwidth of the emission spectrum ($VBW \geq RBW$). The span of the analyzer is set larger than 5 times the resolution bandwidth. The maximum power emitted by the EUT is measured using peak detector and max hold.

According to 47 CFR 15.31 battery power equipment is measured using new batteries and equipment using external power supply is measured with 85%, 100% and 115% of the nominal rated supply voltage.

4.5.3 Results

Maximum peak conducted output power		
Measurement Conditions		
Antenna gain :	2.0dBi	
Power correction :	0dB	
Number of Hopping channels :	79	
Channel [MHz]	Conducted output power [dBm]	Power Limit [dBm]
Test mode DH5		
2402	5.38	≤ 30
2441	5.42	≤ 30
2480	5.34	≤ 30
Test mode 2-DH5		
2402	2.91	≤ 30
2441	3.10	≤ 30
2480	3.38	≤ 30
Test mode 3-DH5		
2402	2.91	≤ 30
2441	3.09	≤ 30
2480	3.10	≤ 30
See attached diagrams in Annex		
Measurement uncertainty		4.22dB
Verdict		PASS

4.6 Maximum e.i.r.p. output power

According FCC rules 47 CFR 15.247(b)(1) and RSS-210 Section A8.4 the maximum peak e.i.r.p. conducted output power is limited and has be verified.


4.6.1 Limits

According to the FCC Rules the conducted output power limit specified is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. This translates to the following e.i.r.p. power limits.

Maximum e.i.r.p. output power limits	
Number of Hopping Channels	E.I.R.P. Power Limit
≥ 75	4W e.i.r.p. (36dBm e.i.r.p.)
15 - 74	500mW e.i.r.p. (27dBm e.i.r.p.)*

*) According RSS-210 the e.i.r.p. output power is generally limited to 4W (36dBm) without limit on the number of hopping channels.

4.6.2 Measurement procedure

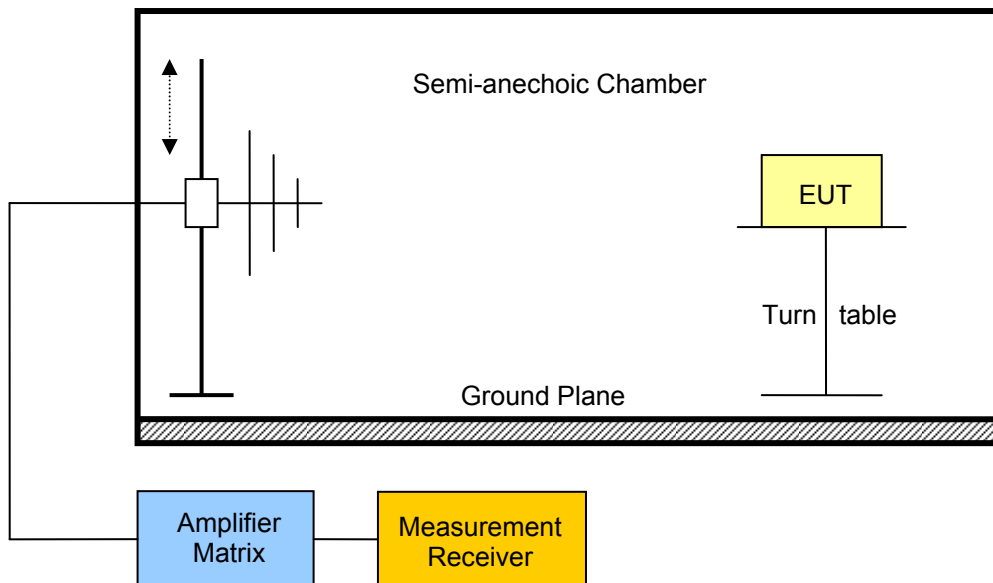

The EUT is placed on a table in a semi-anechoic chamber. The EUT is activated with the transmission modes stated in the test report. The emission level of all emission up to the 10th harmonic is scanned. In the frequency range below 1GHz a resolution bandwidth of 100kHz is used and above 1GHz a resolution bandwidth of 1MHz is used. To obtain the peak emission level the EUT is rotated through 360° and the height of the measurement antenna changed. All emission that come to within 20dB of the limit line are recorded.

Alternate validation procedure

Alternatively the e.i.r.p. power is calculated from the declared antenna gain and the measured maximum peak conducted output power.

Which method has been used is stated in the result table.

4.6.3 Results

Maximum e.i.r.p. output power		
Measurement Conditions		
Validation methode :	<input type="checkbox"/> Measurement <input checked="" type="checkbox"/> Alternate	
Antenna gain :	2.0dBi	
Channel [MHz]	E.I.R.P. output power [dBm e.i.r.p.]	E.I.R.P. Power Limit [dBm e.i.r.p.]
Test mode DH5		
2402	7.38	≤ 36
2441	7.42	≤ 36
2480	7.34	≤ 36
Test mode 2-DH5		
2402	4.91	≤ 36
2441	5.10	≤ 36
2480	5.38	≤ 36
Test mode 3-DH5		
2402	4.91	≤ 36
2441	5.09	≤ 36
2480	5.10	≤ 36
See attached diagrams in Annex		
Measurement uncertainty		4.22dB
Verdict		PASS

4.7 Transmitter band-edge compliance


According FCC rules 47 CFR 15.209, 15.247(d) and RSS-210 Section A8.5 the emission level of out-of-band emissions are limited and has to be validated.

4.7.1 Limits

The emission limit of out of band emission in any 100kHz bandwidth outside the frequency band in which the spread spectrum device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits (see "Transmitter spurious emissions"-measurement) is not required.

Transmitter band-edge emission limits	
TX-Power Detector	Out of band attenuation
Peak	-20dBc/100kHz
RMS	-30dBc/100kHz

4.7.2 Measurement procedure

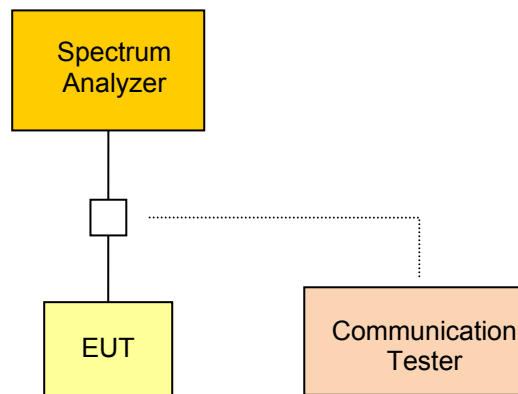

The EUT is connected to a spectrum analyzer and set to transmission mode (using a communication tester if needed) without hopping with maximum power under normal test conditions. The span of the analyzer is set large enough to capture the maximum emission within the emission band as well as any modulation product which fall outside the authorized band of operation. The resolution bandwidth is set to 1% of the span ($VBW \geq RBW$). The

A marker is set on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Using the delta-marker function the highest peak of the in-band emission is measured.

The same measurement procedure is repeated in hopping mode.

4.7.3 Results

Transmitter band-edge emissions		
Measurement Conditions		
Power mode :	Peak	
Mode	Lower edge emission [dBc]	Upper edge emission [dBc]
Test mode DH5		
Hopping	-41.95	-41.33
Single	-41.60	-42.45
Test mode 2-DH5		
Hopping	-39.03	-37.99
Single	-39.90	-38.27
Test mode 3-DH5		
Hopping	-39.18	-38.96
Single	-39.62	-40.10
See attached diagram in Annex		
Verdict	PASS	

4.8 Transmitter conducted spurious emissions


According FCC rules 47 CFR 15.247(d) and RSS-210 Section A8.5 unwanted emissions in the spurious domain are power limited and has to be validated.

4.8.1 Limits

The emission limit of out of band emission in any 100kHz bandwidth outside the frequency band in which the spread spectrum device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits (see "Transmitter radiated spurious emissions"-measurement) is not required.

Transmitter conducted spurious emission limits	
TX-Power Detector	Out of band attenuation
Peak	-20dBc/100kHz
RMS	-30dBc/100kHz

4.8.2 Measurement procedure

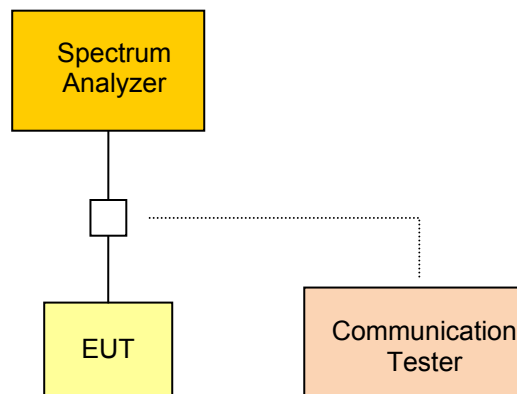

The EUT is connected to a spectrum analyzer and set to transmission mode with maximum power under normal test conditions. The span of the analyzer is set large enough to capture the maximum emission within the emission band as well as any spurious emission outside the authorized band of operation. The resolution bandwidth is set to 100kHz ($VBW \geq RBW$). The emissions are measured using peak detector and max hold.

The measurement is performed over the frequency range of 30MHz up to the tenth harmonic.

4.8.3 Results

Transmitter conducted spurious emissions						
Measurement Conditions						
Modulated :		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Channel Frequency [MHz]	Emission Frequency [MHz]	Emission Level [dBm]	Peak field Strength [dBm]	Limit [dBm]	Detector	Margin [dB]
Test mode DH5						
2402	6687.4	-42.60	4.44	-15.56	peak	-27.04
2441	6667.3	-42.70	5.39	-14.61	peak	-28.09
2480	6887.8	-43.66	4.85	-15.15	peak	-28.51
Test mode 3-DH5						
2402	6707.4	-43.16	-0.52	-20.52	peak	-22.64
2441	6667.4	-42.32	2.78	-17.22	peak	-25.10
2480	6787.6	-42.37	1.42	-18.58	peak	-23.79
See attached diagrams in Annex						
Verdict				PASS		

4.9 Transmitter radiated spurious emissions

According FCC rules 47 CFR 15.209, 15.247(d) and RSS-210 Section A8.5 unwanted emissions in the spurious domain are power limited and has to be validated.

4.9.1 Limits

The emission limit of out of band emission in any 100kHz bandwidth outside the frequency band in which the spread spectrum device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits (see "Transmitter spurious emissions"-measurement) is not required.

Transmitter out-of-band emission limits	
TX-Power Detector	Out of band attenuation
Peak	-20dBc/100kHz
RMS	-30dBc/100kHz


In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Tranmitter restricted band spurious emission limits				
Frequency range [MHz]	Detector	Limit [$\mu\text{V}/\text{m}$]	Calculated Limit 3m [dB $\mu\text{V}/\text{m}$]	Measurement Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3

When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

4.9.2 Measurement procedure

The spurious emission measurement is performed on 3m a semi-anechoic test site.

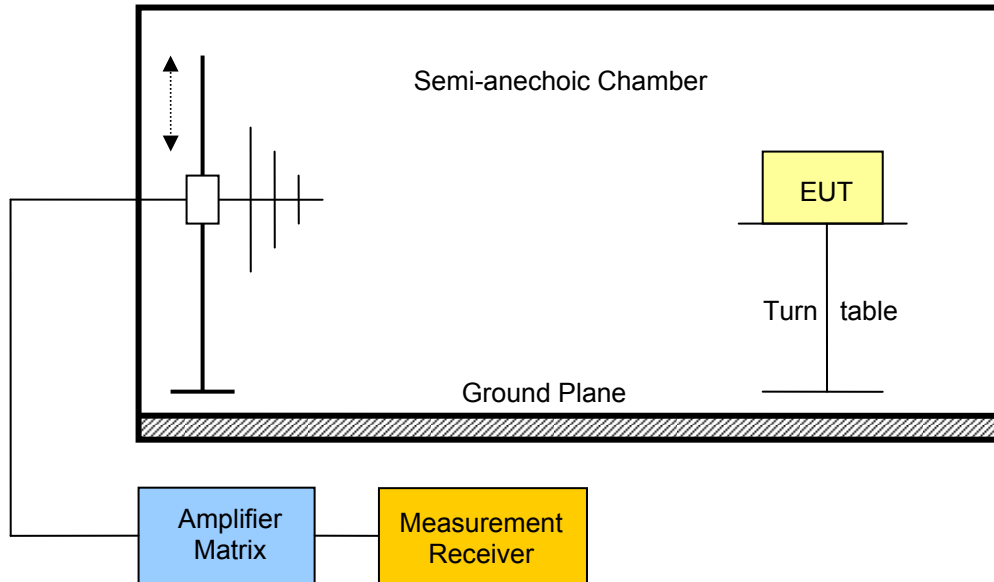

The EUT is placed on a non-metallic table. Any emission is received by the measurement antenna and measured via a measurement receiver connected to the antenna. To obtain the maximum emission the EUT is rotated through 360°.

Due to practical reasons the spurious emission level check is first performed with a peak detector and the quasi-peak and average limits.

If any emission is detected that gets close to the emission limit the detector is changed and the quasi-peak or average detector is used. Which detector is used is determined by the emission frequency. If pulsed transmission is used, averaging over the pulse train is used.

The measurement values are also corrected to obtain the field strength values at the defined measurement distances of the emission limits.

The measurement is performed over the frequency range of 30MHz up to the tenth harmonic.

4.9.3 Results

Transmitter radiated spurious emissions – DH5						
Measurement Conditions						
Measurement distance :		3m				
Modulated :		<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Channel Frequency [MHz]	Emission Frequency [MHz]	Polarization	Measured Field Strength [dB μ V/m]	Limit@3m [dB μ V/m]	Detector	Margin [dB]
Test mode DH5						
2402	4802	v	53.7	74	peak	-20.3
2402	4804	v	46.8	54	average	-7.2
2441	4882	v	53.6	74	Peak	-20.4
2441	4882	v	45.8	54	average	-8.2
2480	4954	v	53.6	74	peak	-20.4
2480	4960	v	45.8	54	average	-8.2
Test mode 3-DH5						
2402	<i>No significant spurious emissions</i>					
2441	<i>No significant spurious emissions</i>					
2480	<i>No significant spurious emissions</i>					
See attached diagrams in Annex						
Verdict					PASS	

5 Power Line parameters

5.1 AC power line conducted emissions

According FCC rules 47 CFR 15.207 and RSS-Gen Section 7.2.2 for any intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits given below.

5.1.1 Limits

AC power line emission limits		
Frequency [MHz]	Conducted Limit [dB μ V]	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

5.1.2 Measurement procedure

The ac power line emissions are measured using a 50 μ H / 50 Ω line impedance stabilization network (LINS). The radio frequency voltage between each power line and ground at the power terminal is measured.

5.1.3 Results

AC power line emissions	
Conducted emission level	
See attached Diagram	
Verdict	PASS


Annex B Transmitter occupied bandwidth

RSS Gen Occupied Bandwidth

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	GFSK / DH5



Ref Lvl	20 dBm	Marker 1 [T1]	2.40183467 GHz	RBW	30 kHz	RF Att	40 dB
				VBW	100 kHz		
				SWT	14 ms	Unit	dBm

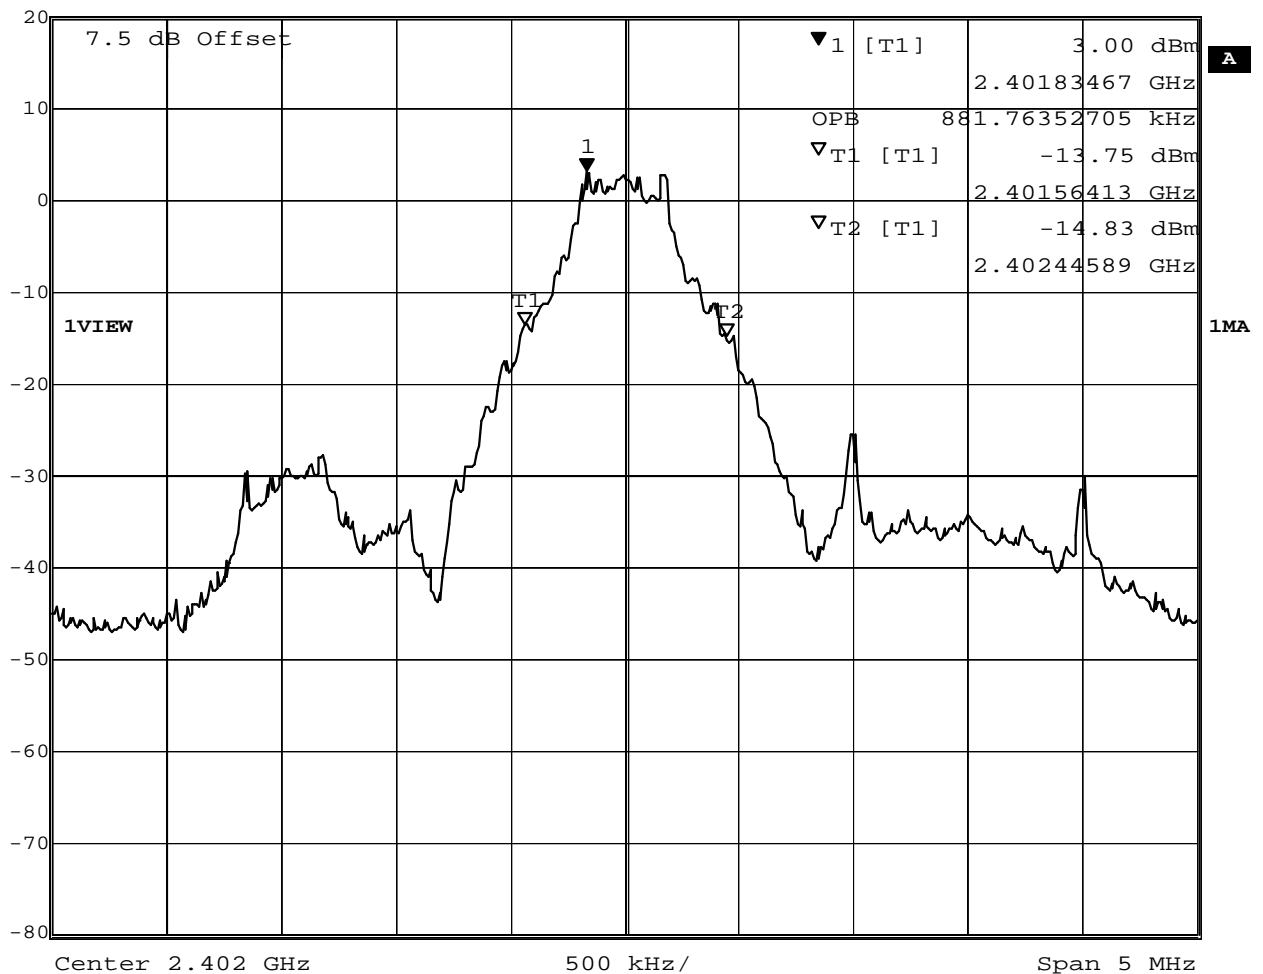


Comment A: Occupied bandwidth: 881.8 KHz
Date: 10.SEP.2010 07:55:09

Test Report No.: G0M21008-3605-P-15

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

**RSS Gen
Occupied Bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	GFSK / DH5

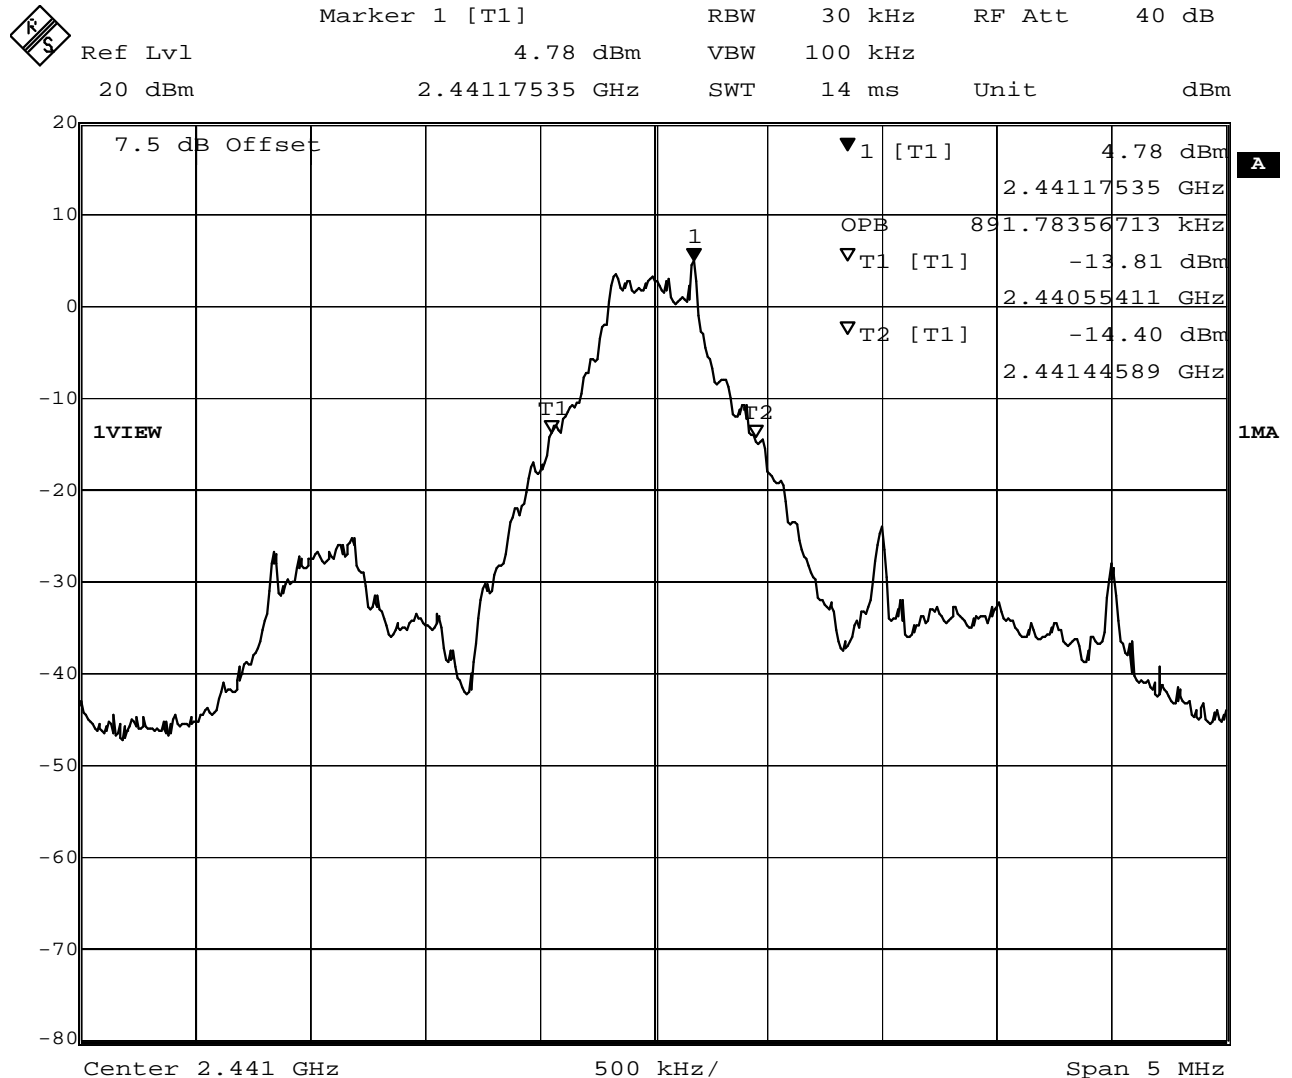


Comment A: Occupied bandwidth: 891.8 KHz
Date: 10.SEP.2010 08:00:31

**RSS Gen
Occupied Bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	GFSK / DH5



Marker 1 [T1]	RBW	30 kHz	RF Att	40 dB
Ref Lvl	3.72 dBm	VBW	100 kHz	
20 dBm	2.48018537 GHz	SWT	14 ms	Unit dBm

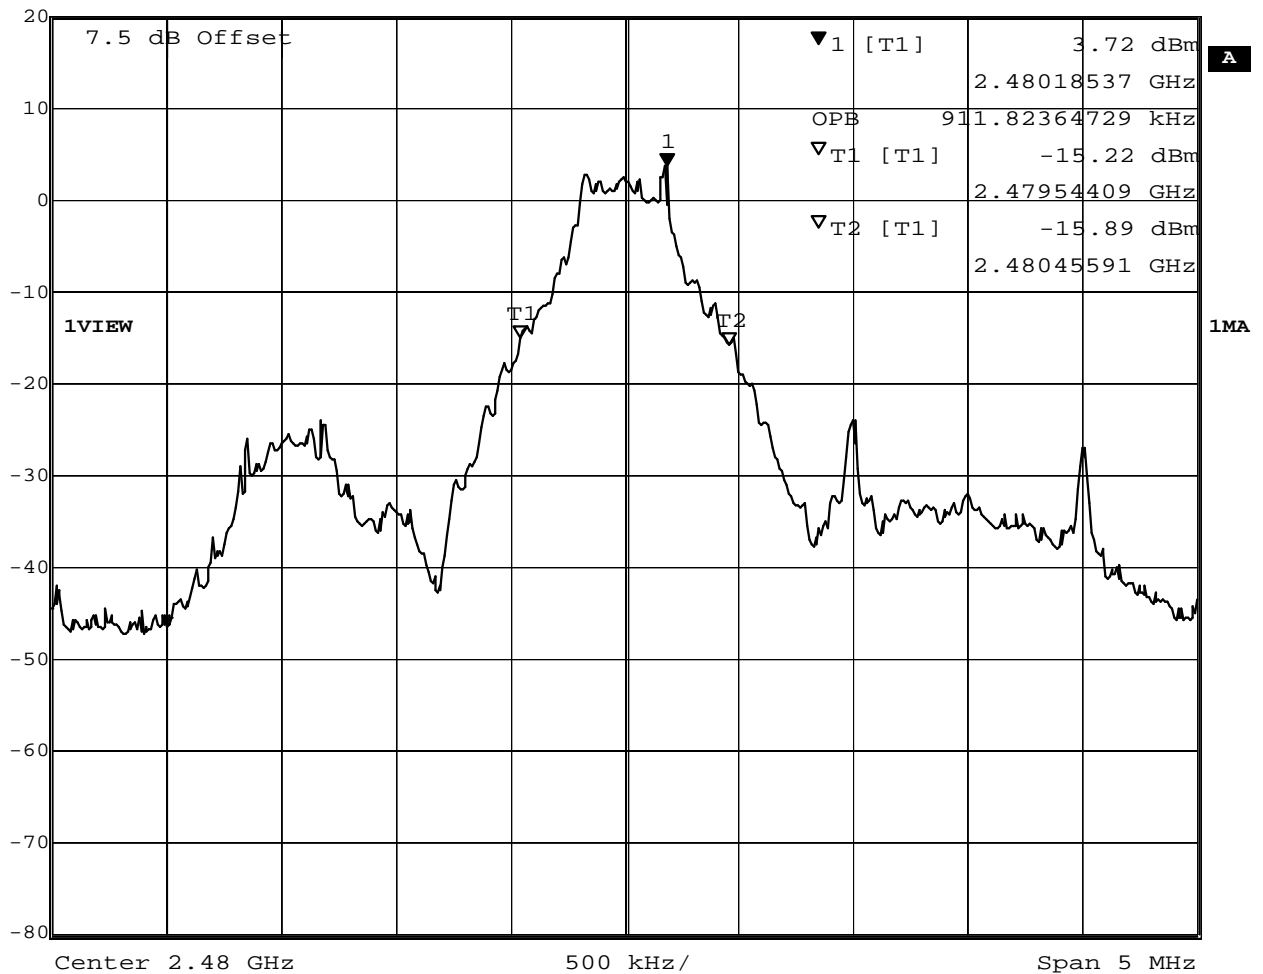


Comment A: Occupied bandwidth: 911.8 KHz
Date: 10.SEP.2010 08:01:49

Test Report No.: G0M21008-3605-P-15

**RSS Gen
Occupied Bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 0 / 2402 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	8DPSK / 3-DH5

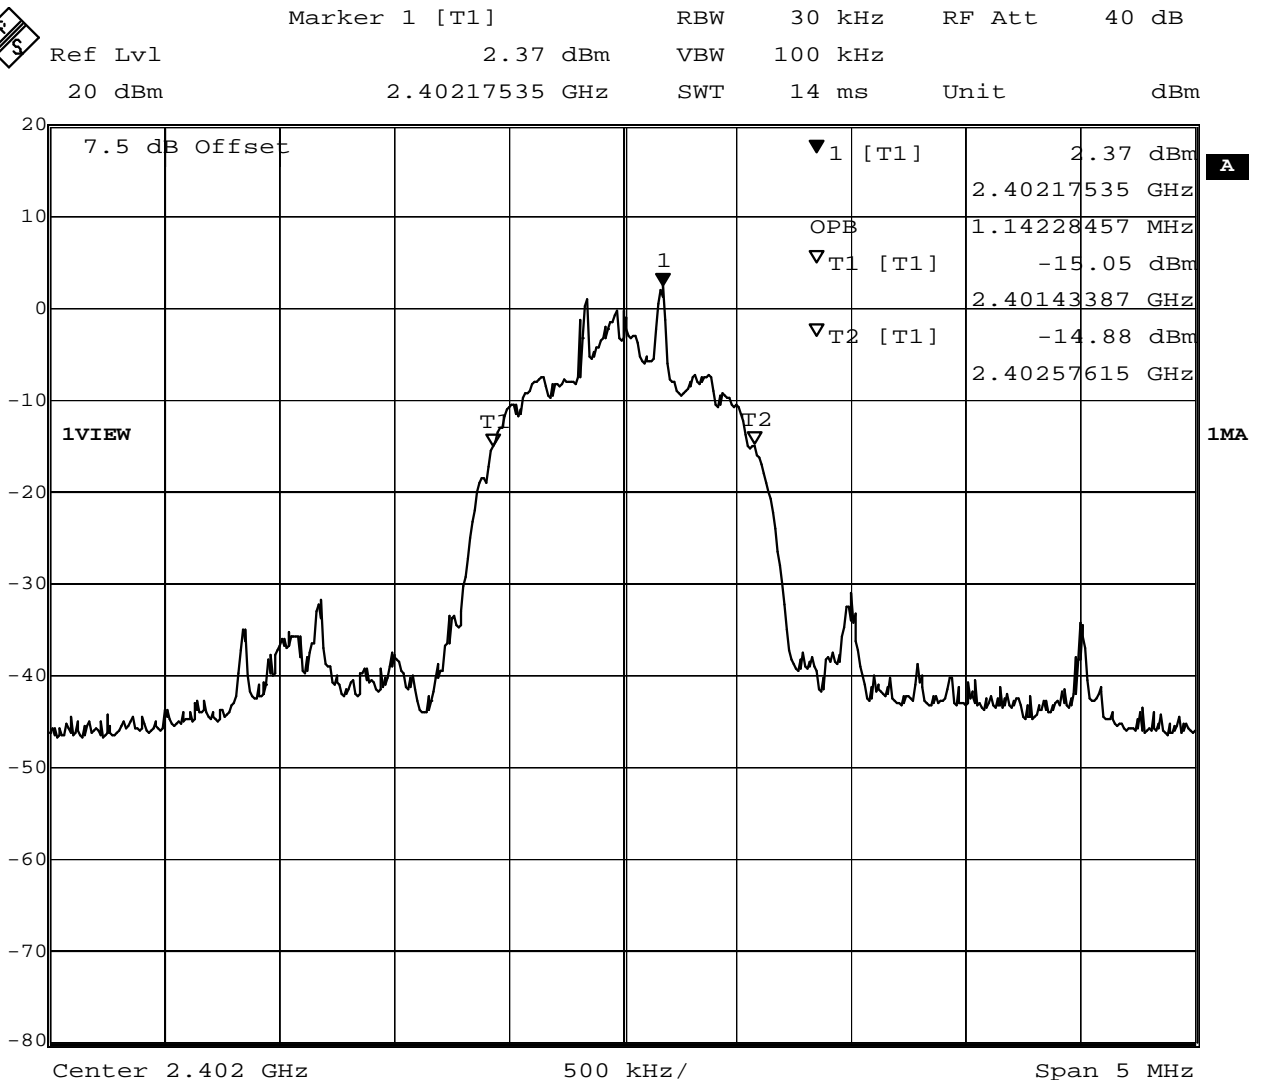

Comment A: Occupied bandwidth: 1142.3 KHz

Date: 10.SEP.2010 07:57:05


 Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 41 of 110

**RSS Gen
Occupied Bandwidth**


EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 39 / 2441 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	8DPSK / 3-DH5

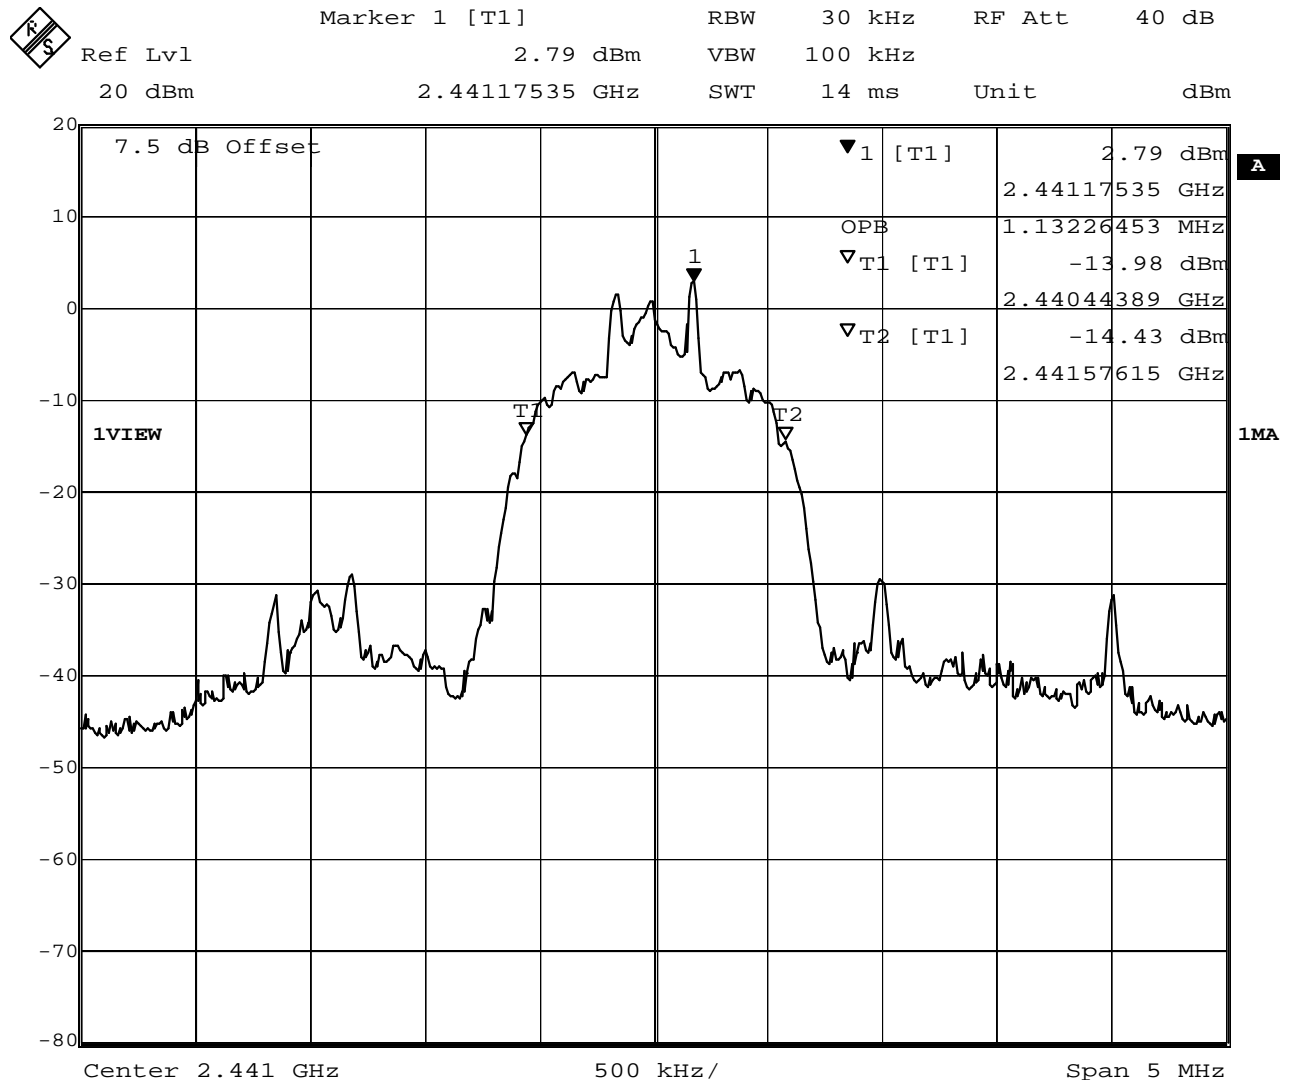

Comment A: Occupied bandwidth: 1132.3 KHz
Date: 10.SEP.2010 07:59:03

**RSS Gen
Occupied Bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	4.4.1 Occupied Bandwidth
Comment 1	Channel.: 78 / 2480 MHz
Comment 2	A spectrum analyzer with an integrated 99% power bandwidth function is used
Comment 3	8DPSK / 3-DH5

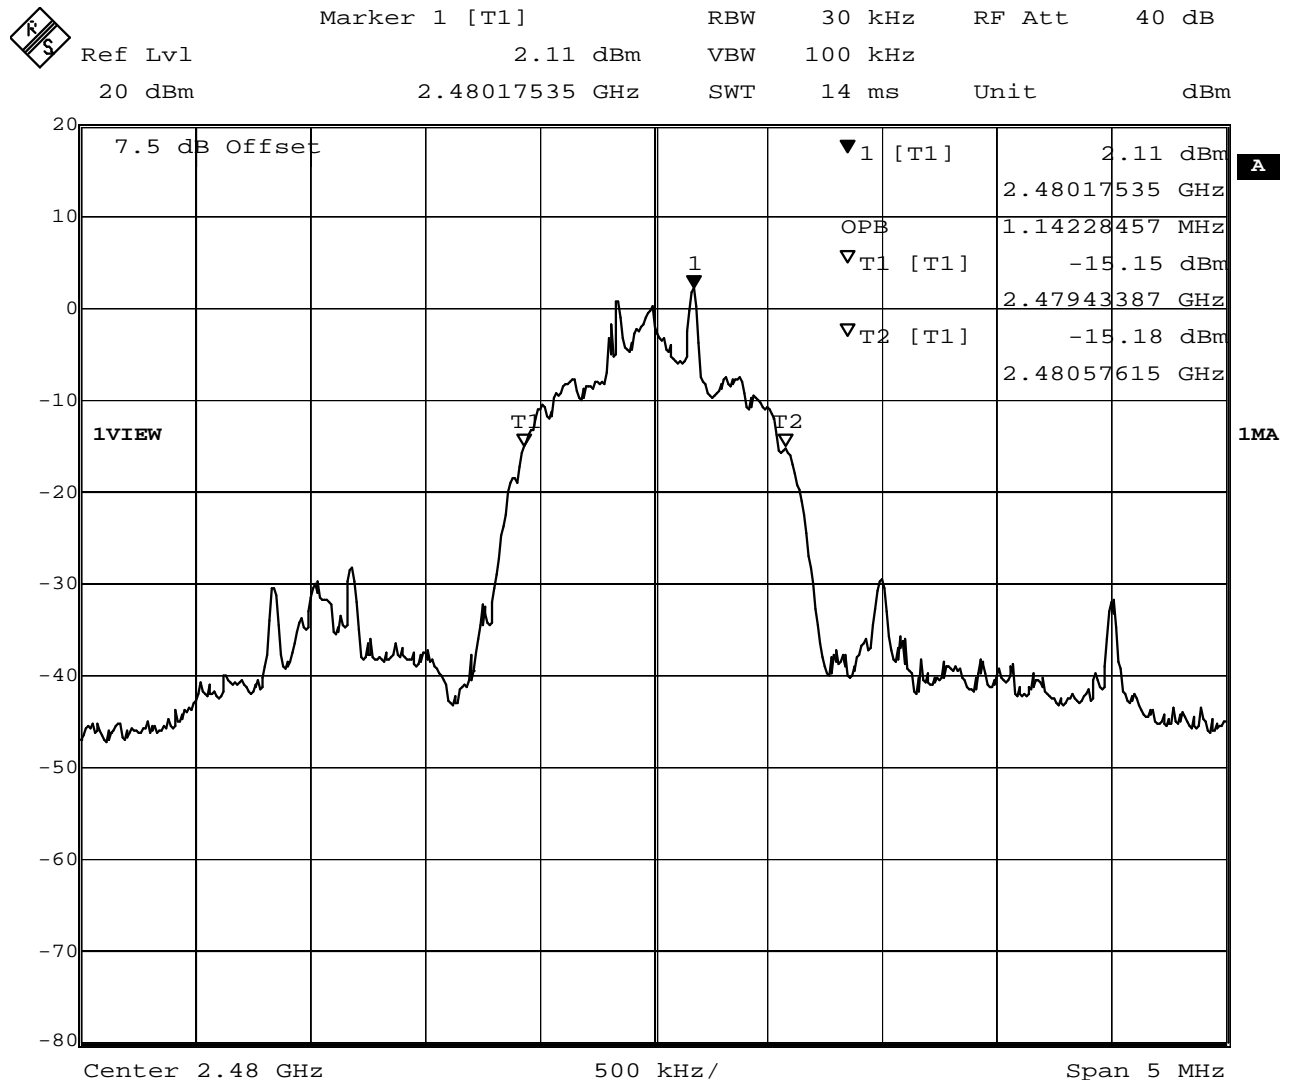

Comment A: Occupied bandwidth: 1142.3 KHz
 Date: 10.SEP.2010 08:03:17

 Test Report No.: G0M21008-3605-P-15


Annex C Transmitter 20dB bandwidth

FCC part 15.247
20 dB bandwidth

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz / GFSK
Comment 3	DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	0.32 dB	VBW	10 kHz	
10 dBm	943.42525050 kHz	SWT	56 ms	Unit dBm

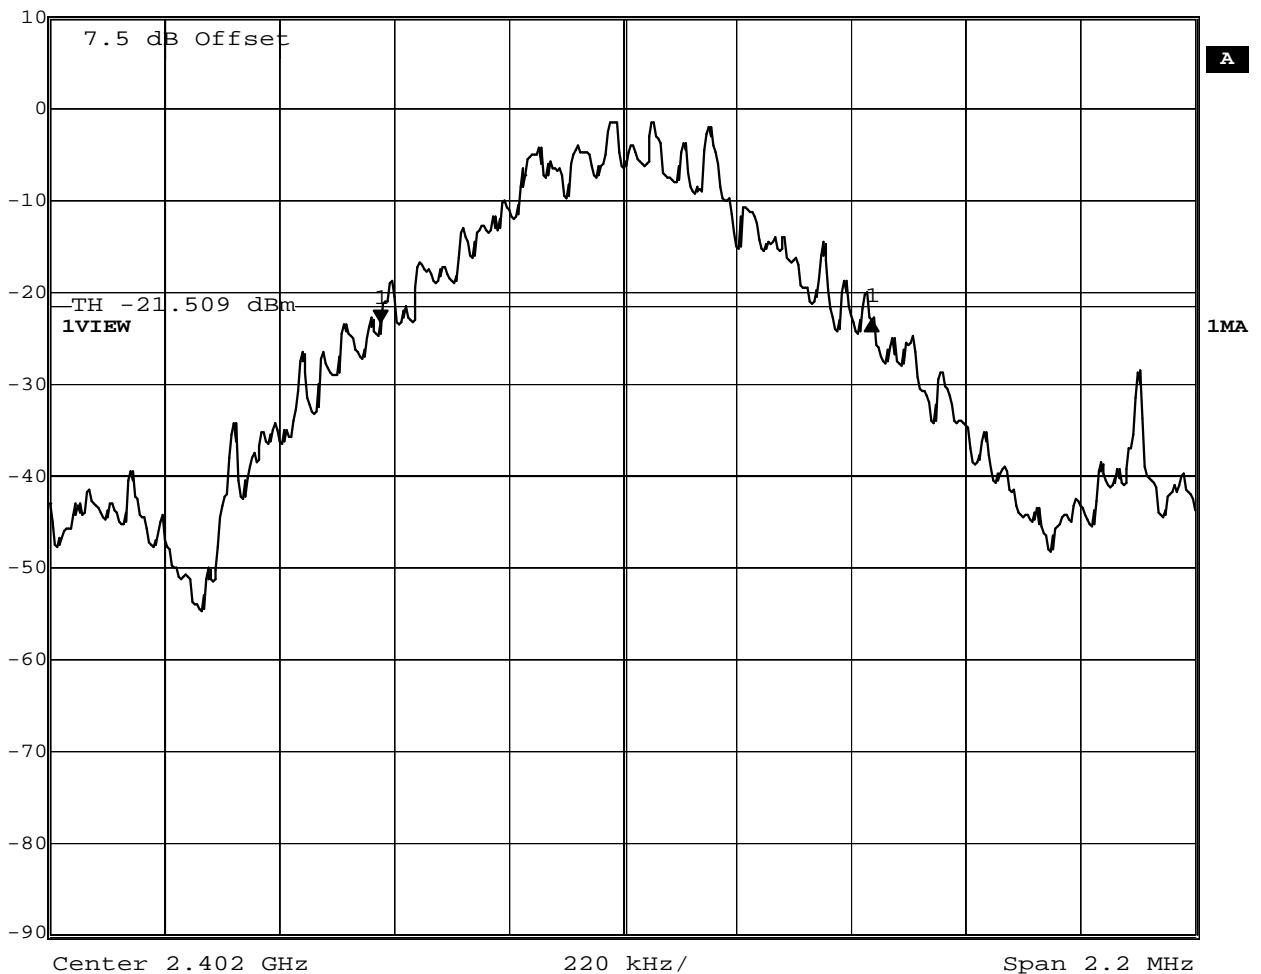

Comment A: 20 dB bandwidth: 943.4 KHz
Date: 9.SEP.2010 13:52:40

Test Report No.: G0M21008-3605-P-15

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 44 of 110

FCC part 15.247
20 dB bandwidth

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz / GFSK
Comment 3	DH5



	Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	0.38 dB	VBW	10 kHz		
10 dBm	943.41643286 kHz	SWT	56 ms	Unit	dBm

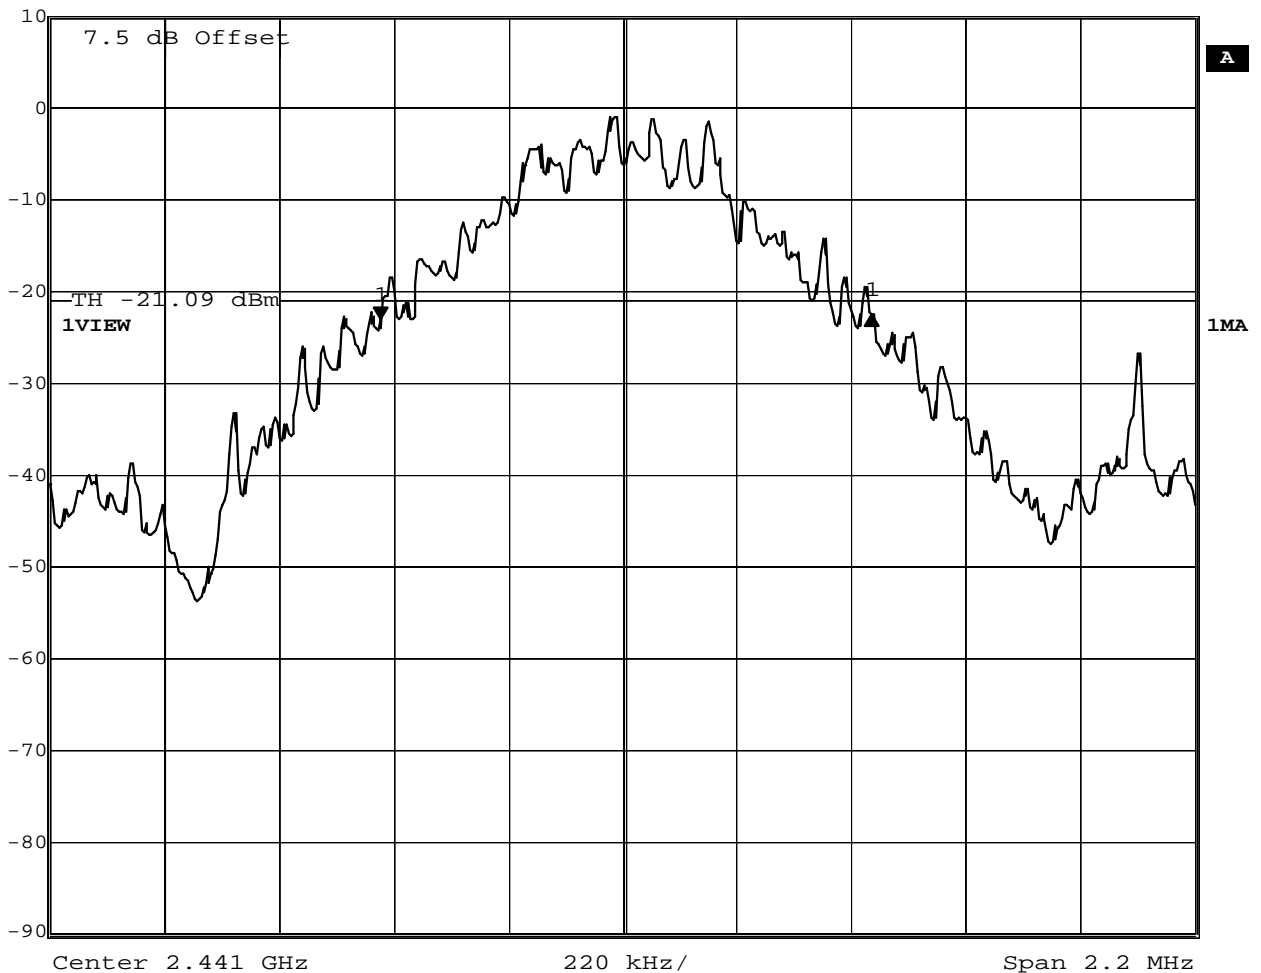


Comment A: 20 dB bandwidth: 943.4 KHz
 Date: 9.SEP.2010 14:14:32

FCC part 15.247
20 dB bandwidth

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz / GFSK
Comment 3	DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	0.09 dB	VBW	10 kHz	
10 dBm	943.42525050 kHz	SWT	56 ms	Unit dBm

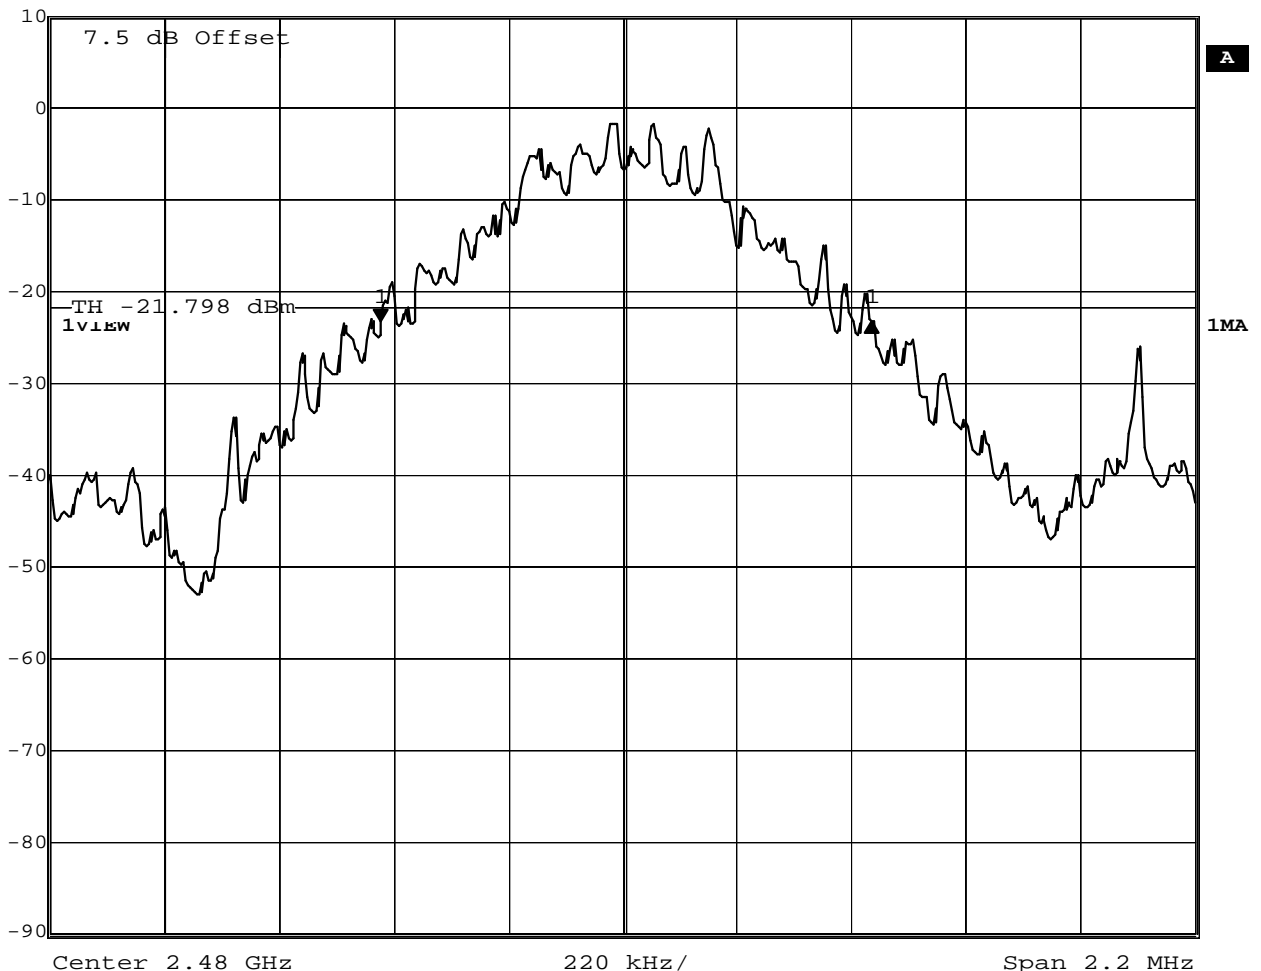


Comment A: 20 dB bandwidth: 943.4 KHz
 Date: 9.SEP.2010 14:17:23

**FCC part 15.247
20 dB bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz / $\pi/4$ -DQPSK
Comment 3	2-DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	-0.86 dB	VBW	10 kHz	
10 dBm	1.18593667 MHz	SWT	56 ms	Unit dBm

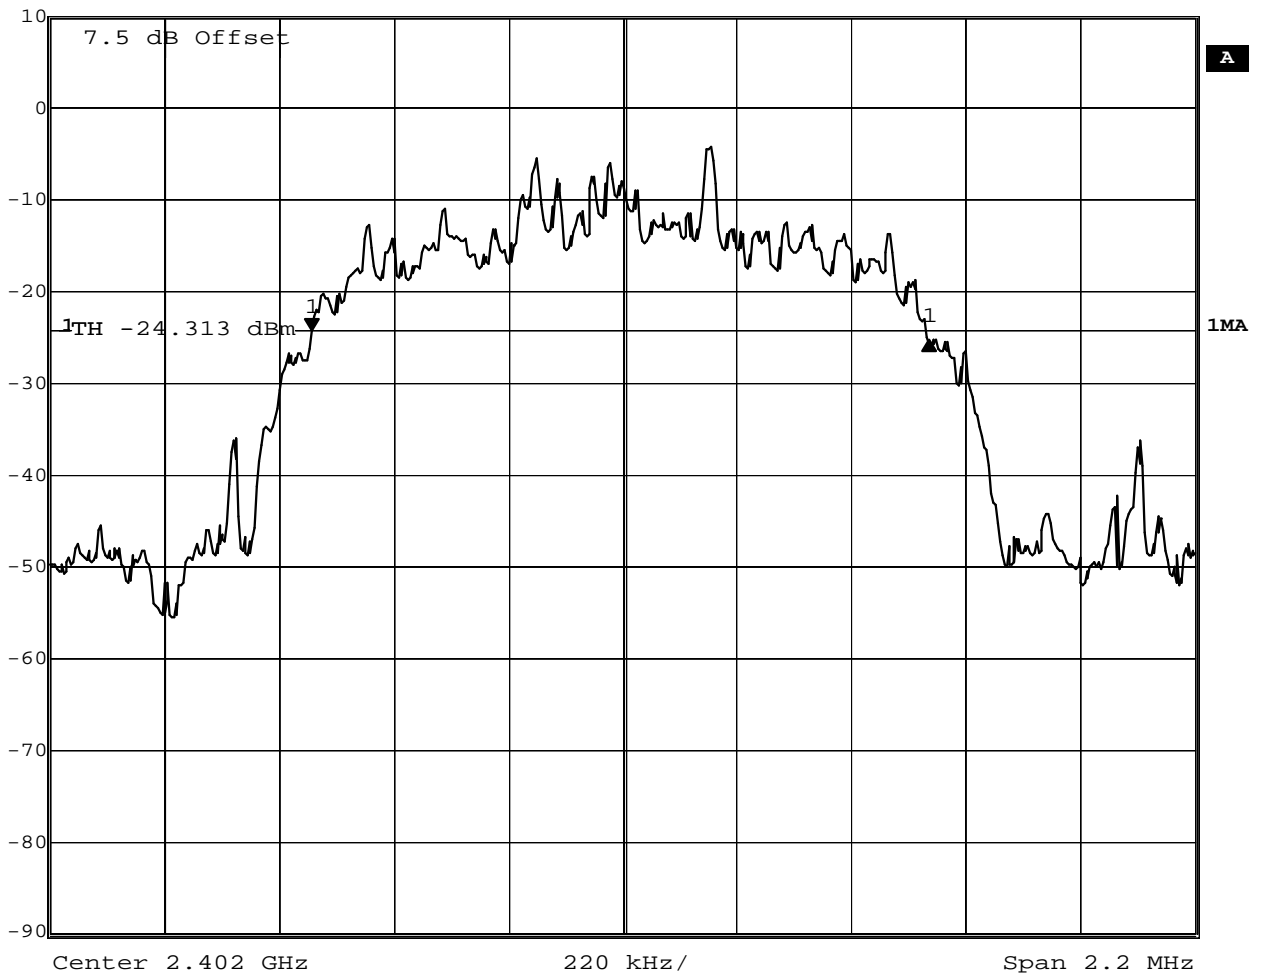


Comment A: 20 dB bandwidth: 1185.9 KHz
Date: 9.SEP.2010 13:56:42

FCC part 15.247
20 dB bandwidth

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz / $\pi/4$ -DQPSK
Comment 3	2-DH5



	Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	-0.43 dB	VBW	10 kHz		
10 dBm	1.18593667 MHz	SWT	56 ms	Unit	dBm

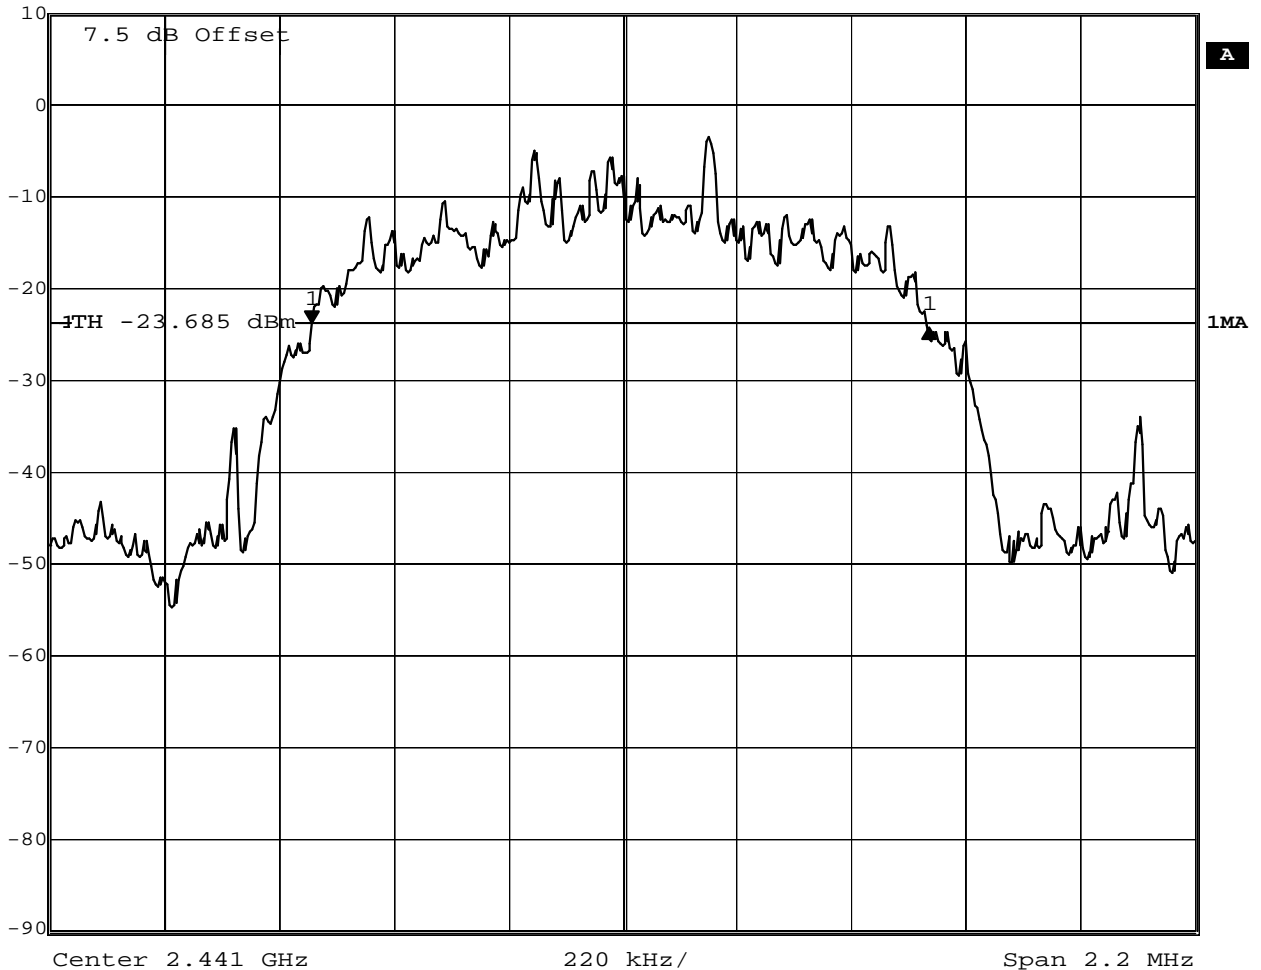

Comment A: 20 dB bandwidth: 1185.9 KHz

Date: 9.SEP.2010 14:12:04


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247
20 dB bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz / $\pi/4$ -DQPSK
Comment 3	2-DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	-0.55 dB	VBW	10 kHz	
10 dBm	1.18593667 MHz	SWT	56 ms	Unit dBm

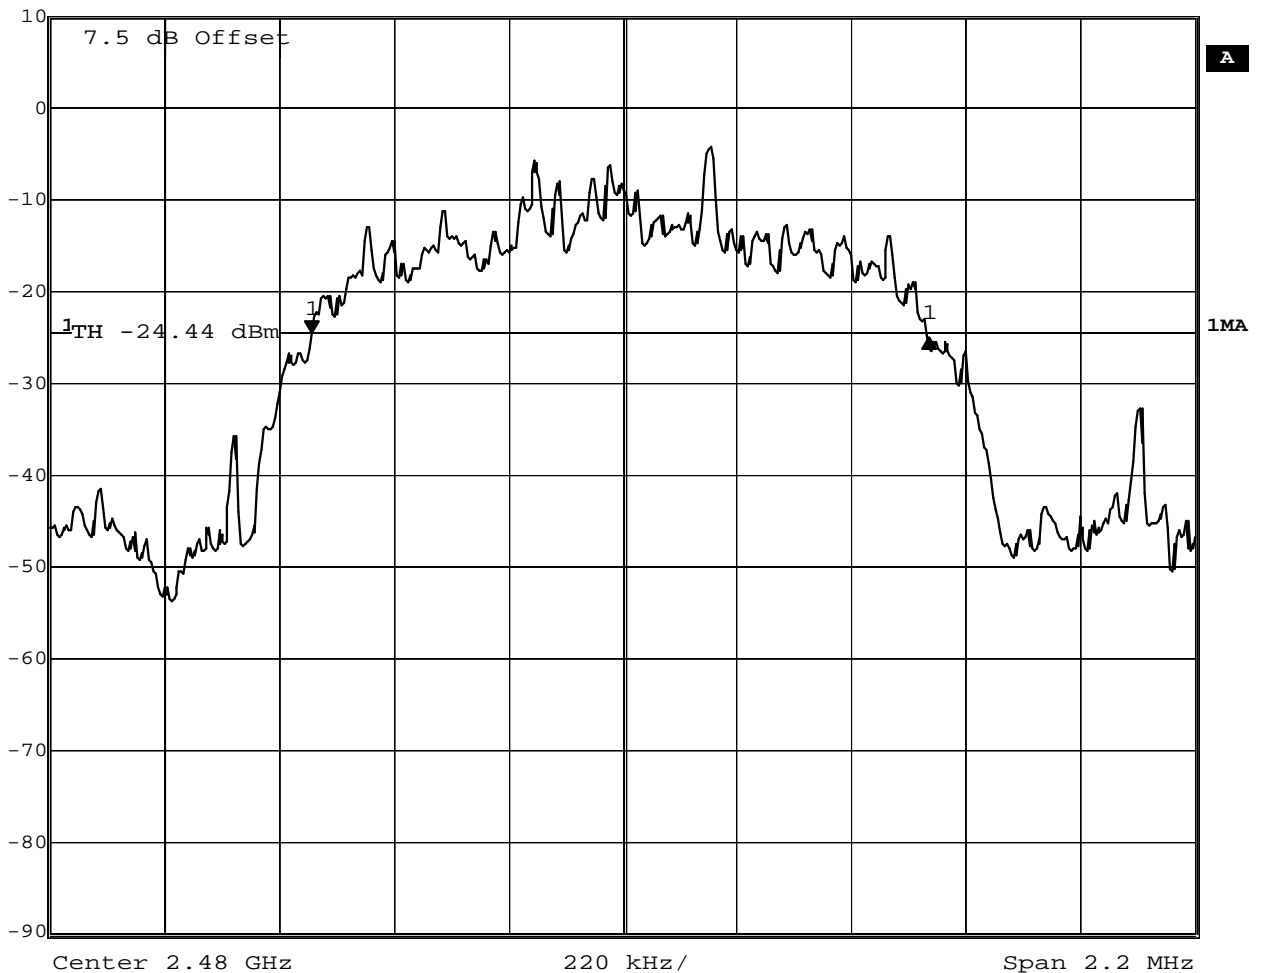

Comment A: 20 dB bandwidth: 1185.9 KHz


Date: 9.SEP.2010 14:19:48

**FCC part 15.247
20 dB bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 0 / 2402 MHz / 8DPSK
Comment 3	3-DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	0.44 dB	VBW	10 kHz	
10 dBm	1.19912786 MHz	SWT	56 ms	Unit dBm

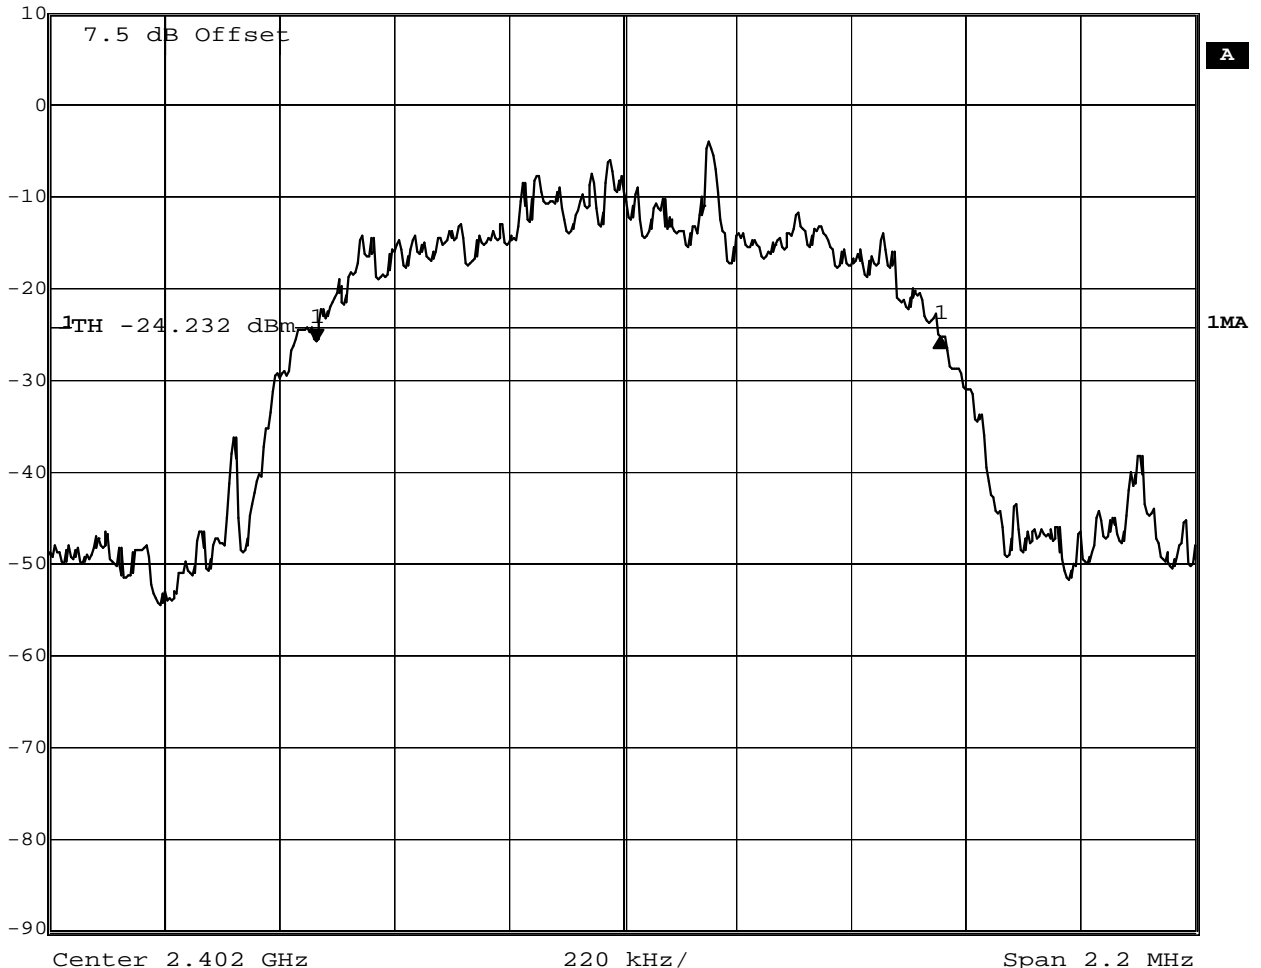


Comment A: 20 dB bandwidth: 1199.1 KHz
Date: 9.SEP.2010 13:59:28

**FCC part 15.247
20 dB bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 39 / 2441 MHz / 8DPSK
Comment 3	3-DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	-0.75 dB	VBW	10 kHz	
10 dBm	1.22121603 MHz	SWT	56 ms	Unit dBm

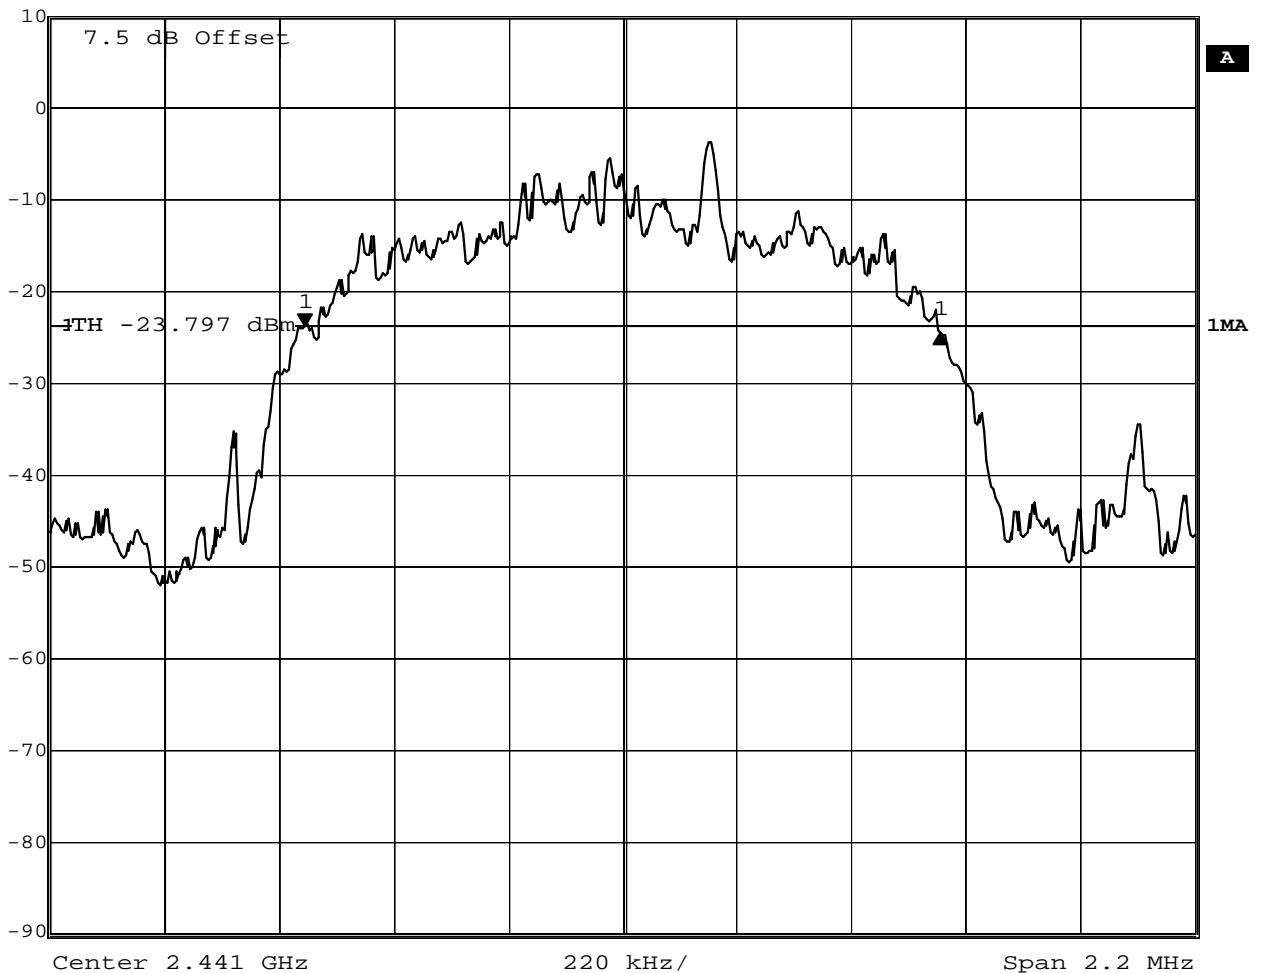

Comment A: 20 dB bandwidth: 1221.2 KHz
Date: 9.SEP.2010 14:05:07


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247
20 dB bandwidth**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	20 dB bandwidth
Comment 2	Channel.: 78 / 2480 MHz / 8DPSK
Comment 3	3-DH5



Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	-0.80 dB	VBW	10 kHz	
10 dBm	1.22121603 MHz	SWT	56 ms	Unit dBm

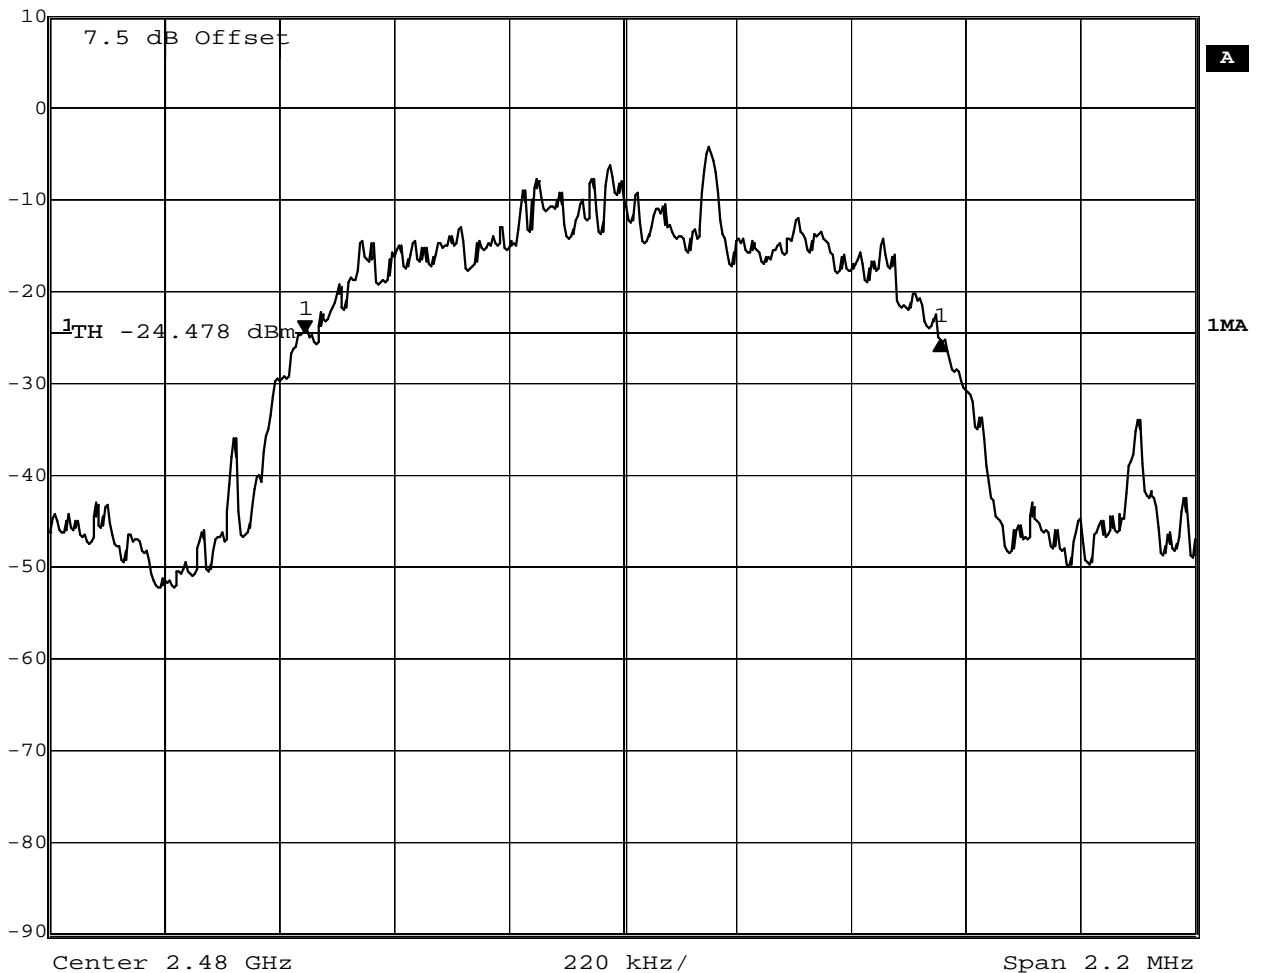

Comment A: 20 dB bandwidth: 1221.2 KHz
Date: 9.SEP.2010 14:22:50

Annex D Hopping channels


FCC part 15.247

Number of hopping frequencies

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 0-13 / GFSK
Comment 3	DH5



Ref Lvl	RBW	300 kHz	RF Att	30 dB
10 dBm	VBW	300 kHz	Unit	dBm
	SWT	5 ms		

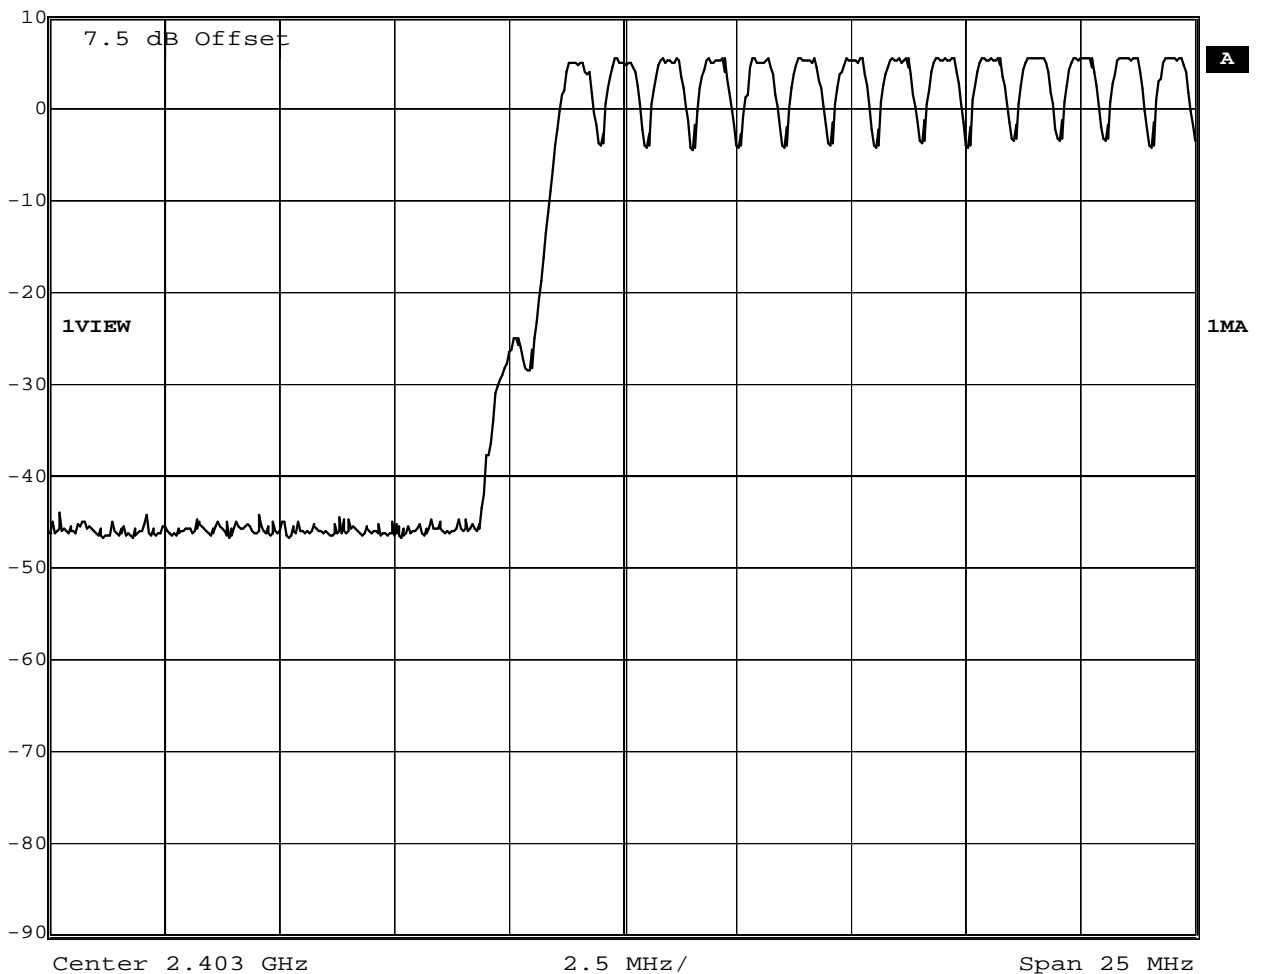

Comment A: Number of hopping frequencies

Date: 9.SEP.2010 15:44:22


Test Report No.: G0M21008-3605-P-15

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 53 of 110

FCC part 15.247
Number of hopping frequencies

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 14-38 / GFSK
Comment 3	DH5

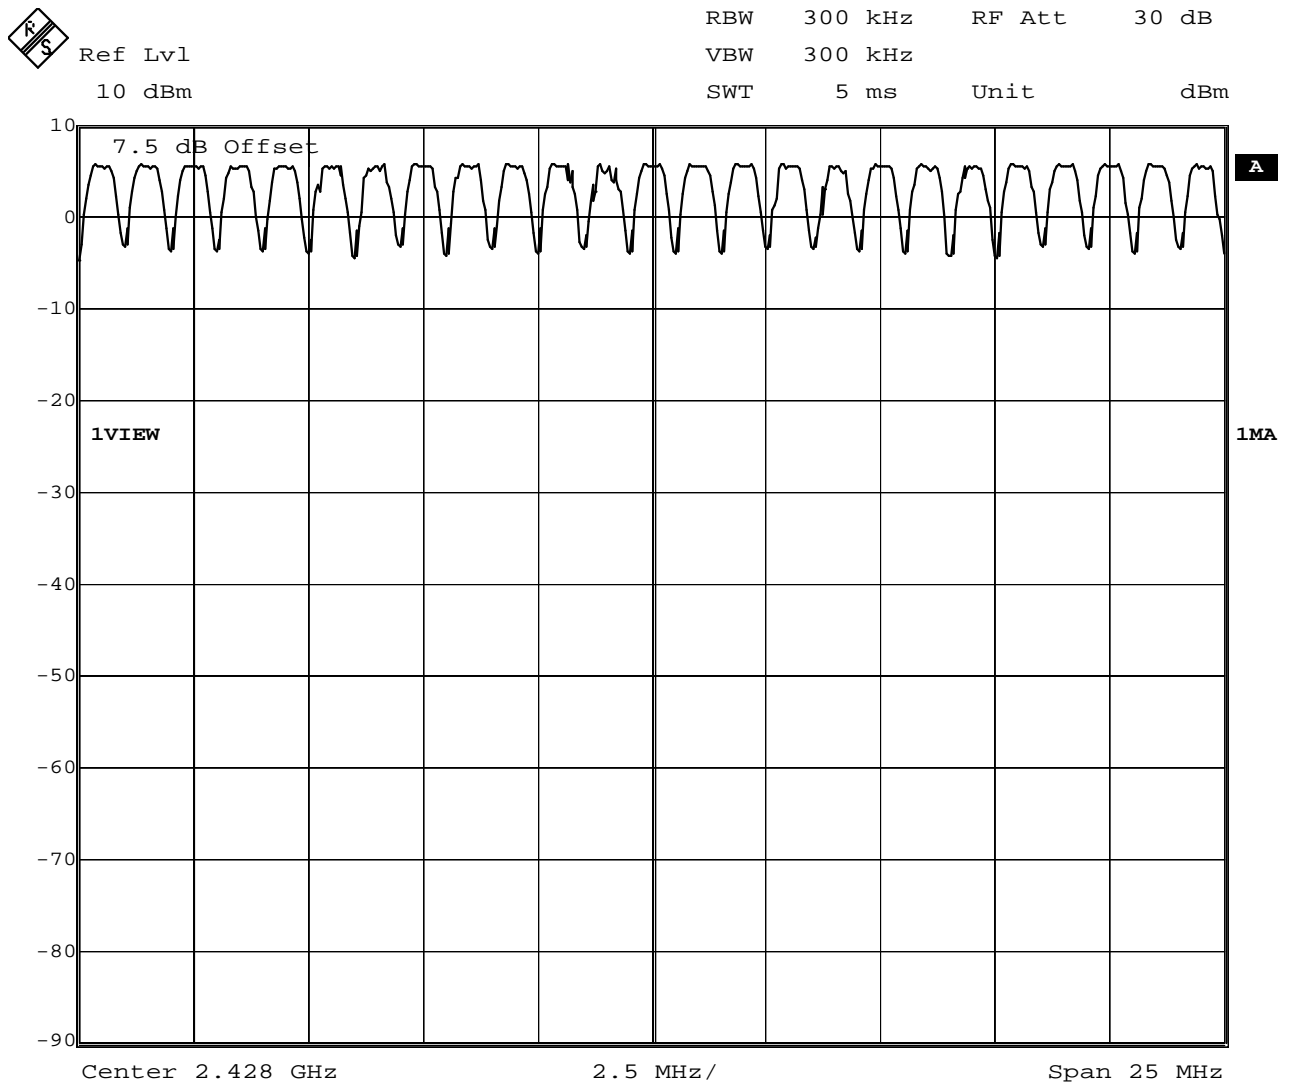


Comment A: Number of hopping frequencies

Date: 9.SEP.2010 15:46:36

FCC part 15.247
Number of hopping frequencies

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.:39-63 / GFSK
Comment 3	DH5

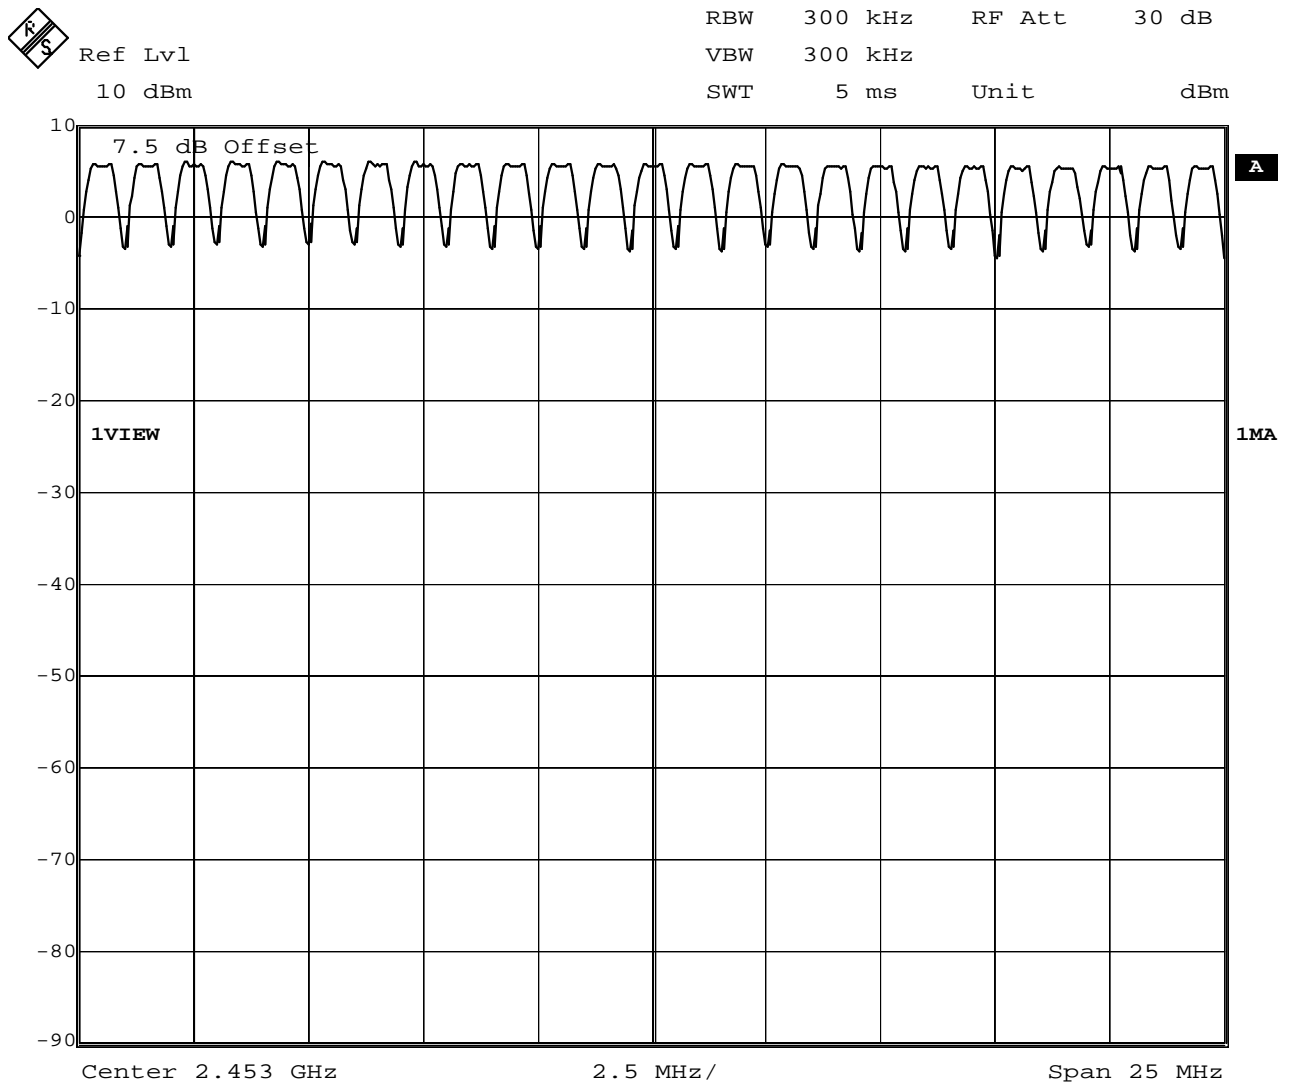


Comment A: Number of hopping frequencies

Date: 9.SEP.2010 15:51:17

FCC part 15.247
Number of hopping frequencies

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	Number of hopping frequencies
Comment 2	Channel.: 64-78 / GFSK
Comment 3	DH5

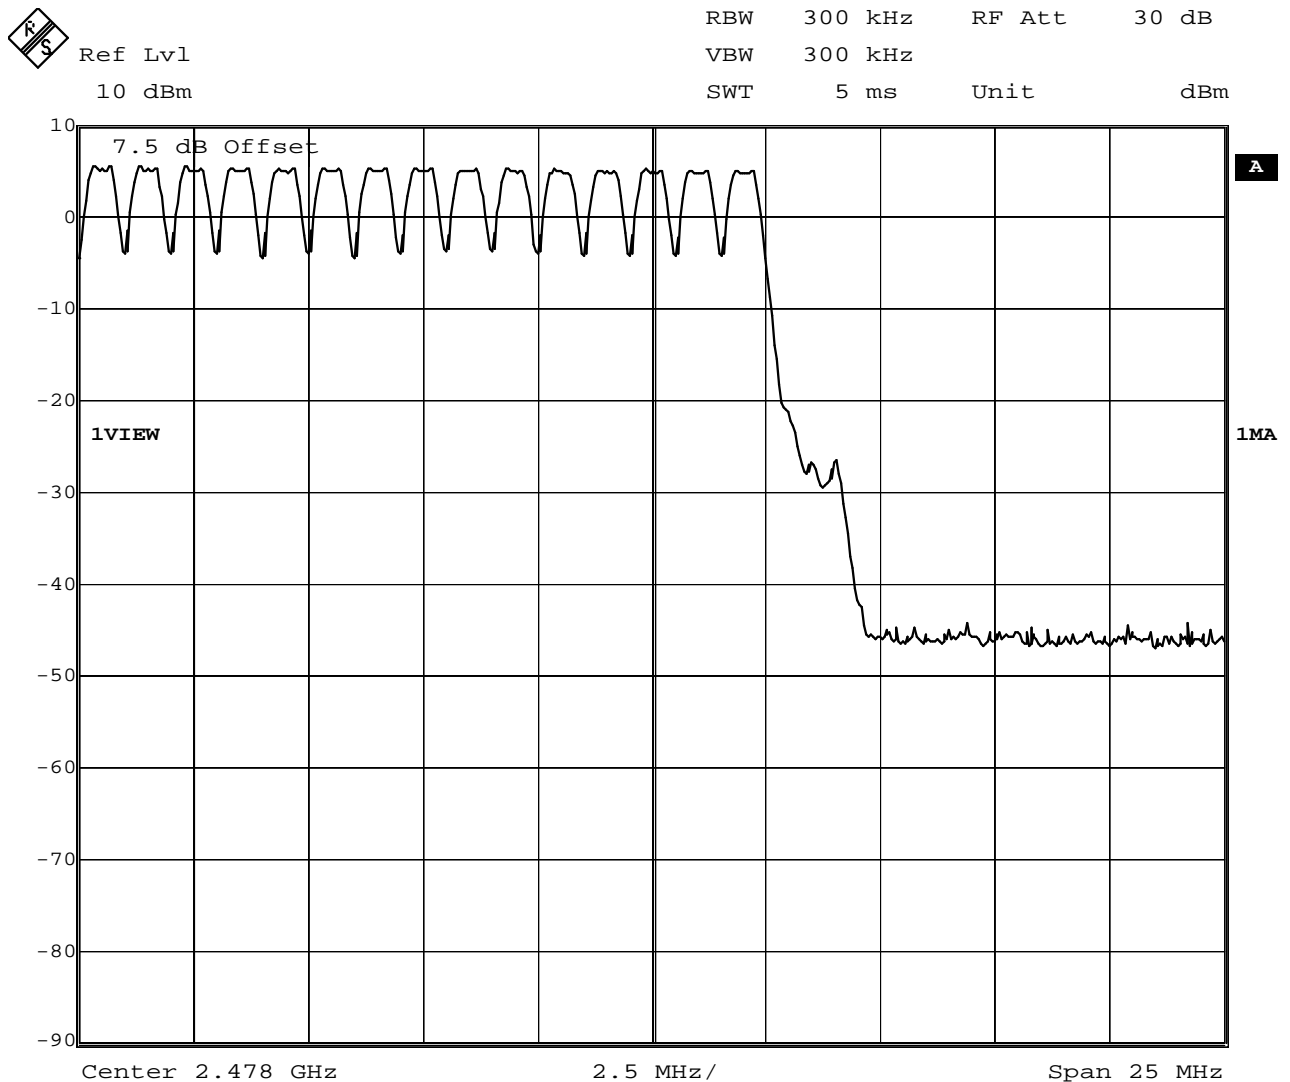

Comment A: Number of hopping frequencies

Date: 9.SEP.2010 15:54:07

Annex E Hopping channel separation


FCC part 15.247

Carrier frequency separation

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)(1)
Comment 1	Carrier frequency separation
Comment 2	Channel.: 39/40 / 2441/2442 MHz / GFSK
Comment 3	Hopping mode / DH5



Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	0.26 dB	VBW	100 kHz	
20 dBm	1.00000000 MHz	SWT	5 ms	Unit dBm

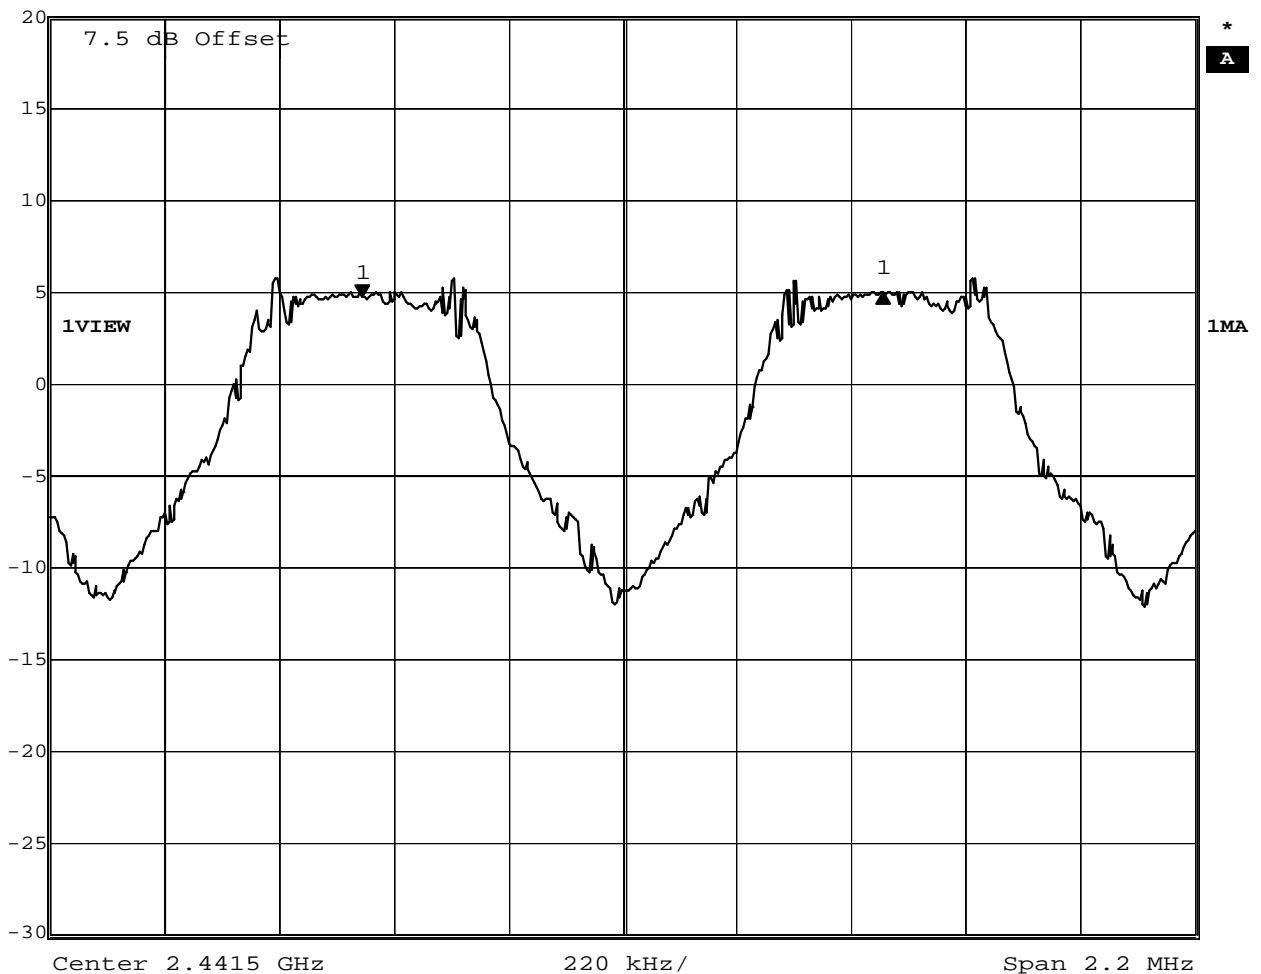

Comment A: Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass

Date: 9.SEP.2010 15:41:35

Test Report No.: G0M21008-3605-P-15

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 57 of 110

Annex F Time of occupancy


FCC part 15.247

Time of occupancy (dwell time)

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(a)
Comment 1	Time of occupancy
Comment 2	Channel.: 39 / 2441 MHz (Hopping mode) / GFSK / DH5
Comment 3	63 events * 2.893 ms result: 182.264 ms



Delta 1 [T1]	RBW	1 MHz	RF Att	40 dB
Ref Lvl	-0.11 dB	VBW	1 MHz	
25 dBm	2.893085 ms	SWT	4 ms	Unit dBm

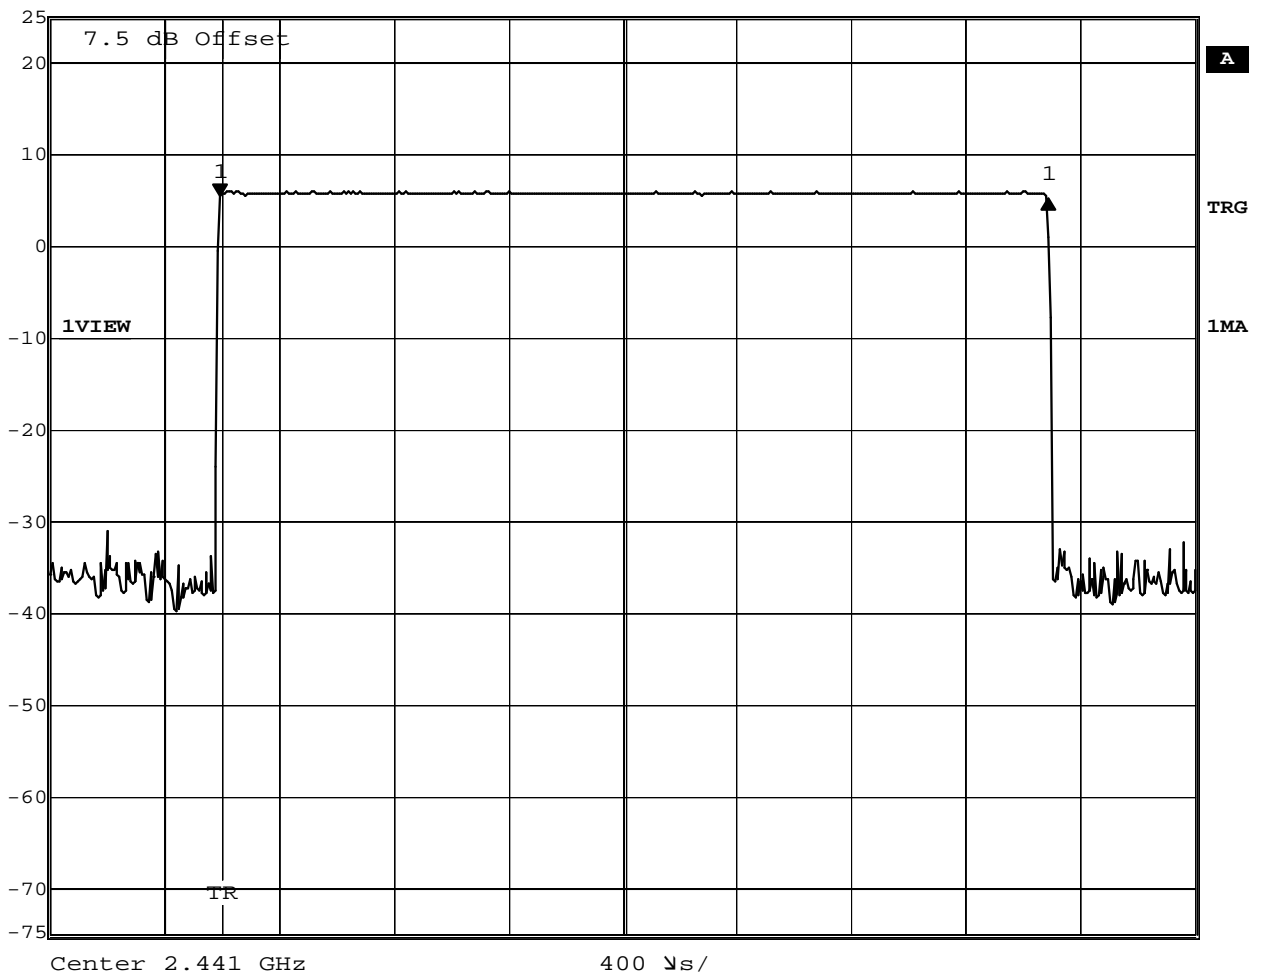

Comment A: Burst length=2.89309 ms

Date: 10.SEP.2010 08:07:22

Test Report No.: G0M21008-3605-P-15

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 58 of 110

Annex G AC Powerline Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15C

Order number: G0M21008-3605


Manufacturer: lesswire AG
 EUT Name: WiBear-E, AN00K60055
 Model: AN00960055
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Klein
 Test Conditions: Tnom: 23°C, Unom: 120VAC
 LISN: ESH2-Z5 L
 Mode: powered from notebook
 Test Date: 03.09.2010
 Note:

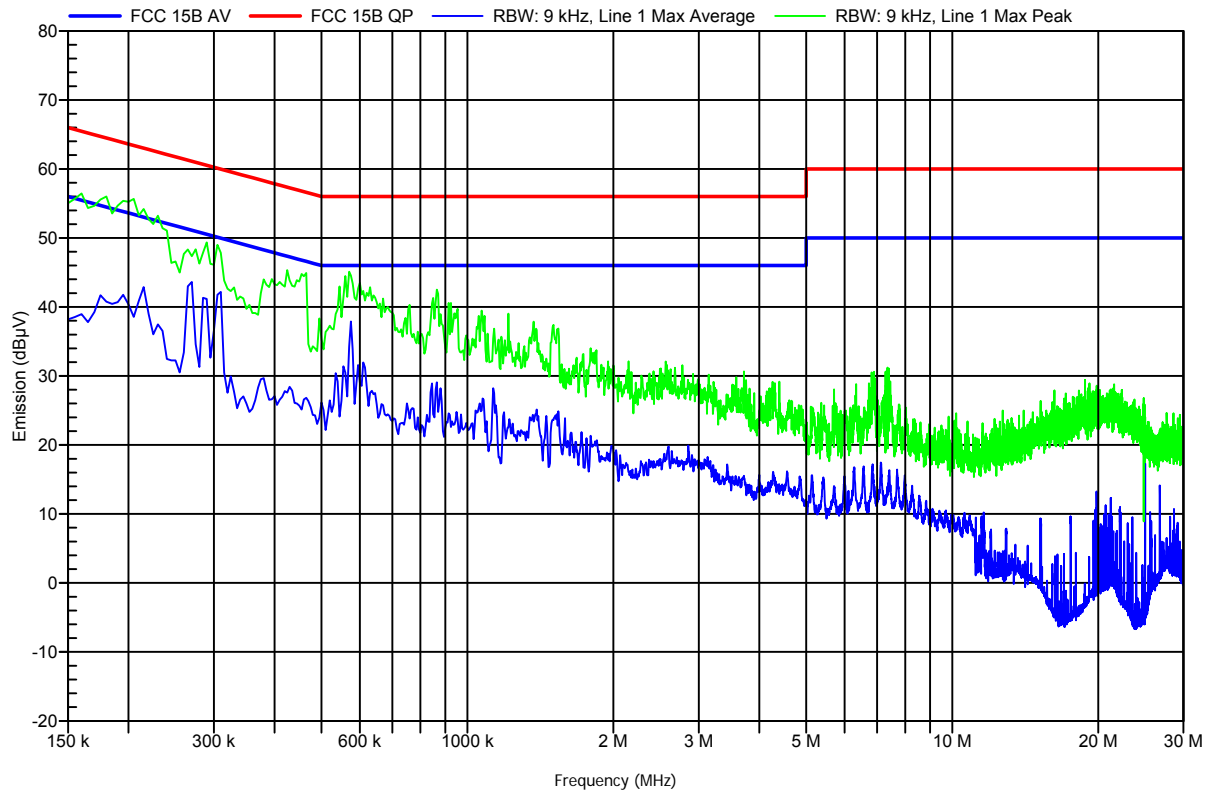

EMI voltage test in the ac-mains according to FCC 15C

Order number: G0M21008-3605


Manufacturer: lesswire AG
 EUT Name: WiBear-E, AN00K60055
 Model: AN00960055
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Klein
 Test Conditions: Tnom: 23°C, Unom: 120VAC
 LISN: ESH2-Z5 N
 Mode: powered from notebook
 Test Date: 03.09.2010
 Note:

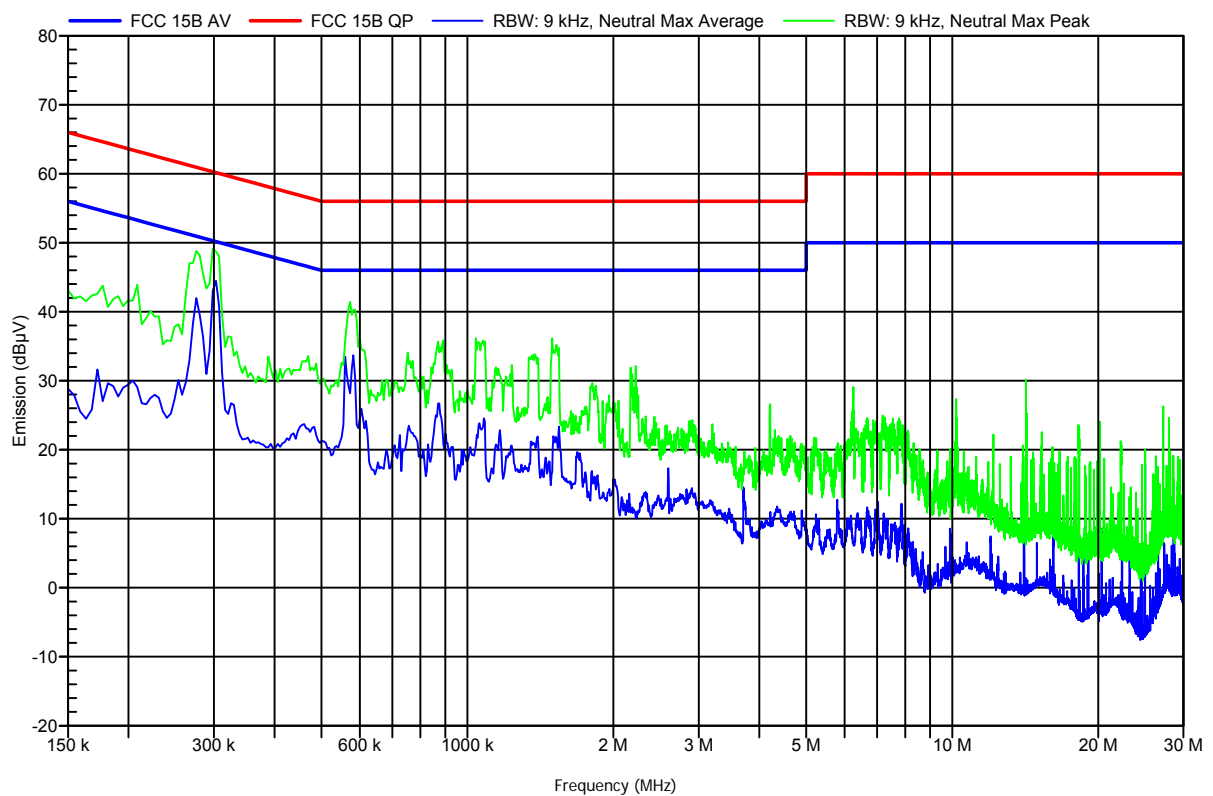

Annex H Transmitter conducted spurious emissions

FCC part 15.247 (d) Spurious Emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 0 / 2402 MHz
Comment 3	GFSK / DH5

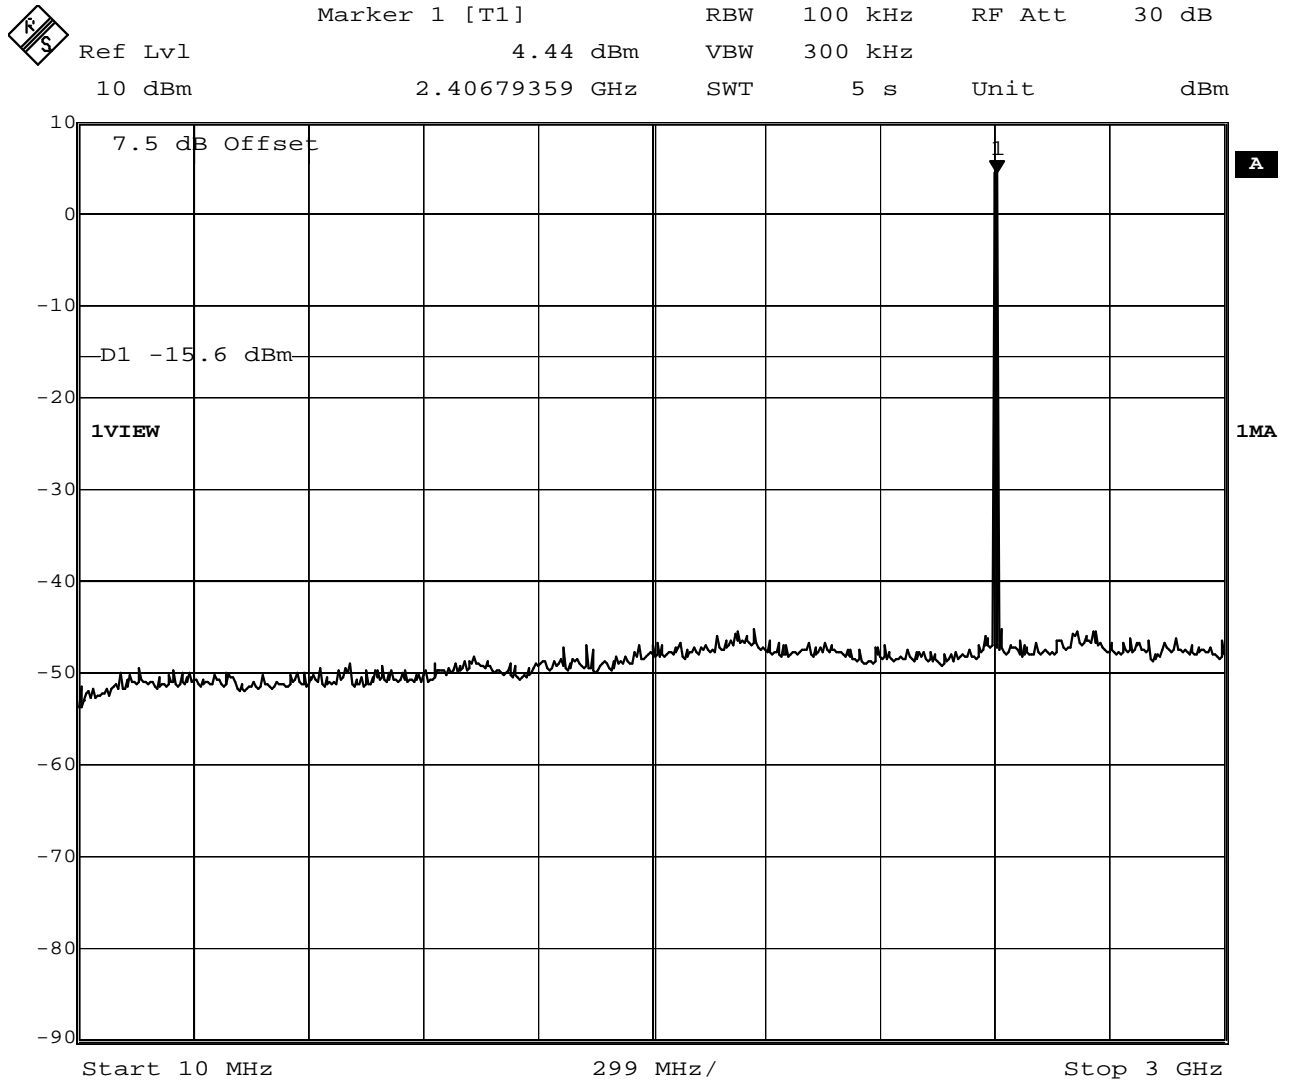

Date: 10.SEP.2010 08:40:57

Test Report No.: G0M21008-3605-P-15

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 61 of 110

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 0 / 2402 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-42.60 dBm	VBW	300 kHz		
10 dBm	6.68737475 GHz	SWT	5 s	Unit	dBm

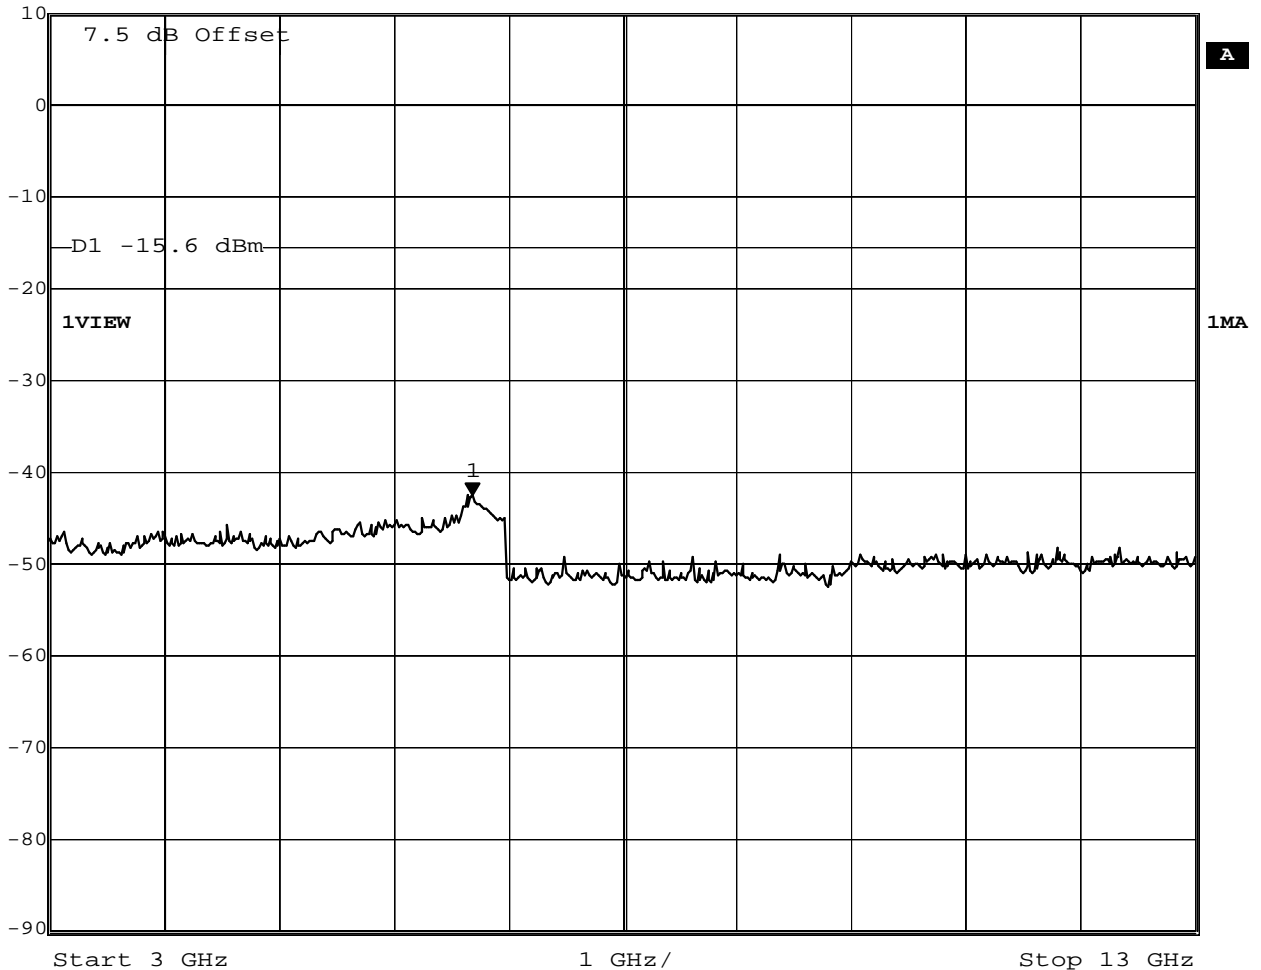

Date: 10.SEP.2010 08:42:49

Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 62 of 110

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 0 / 2402 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-44.72 dBm	VBW	300 kHz		
10 dBm	26.50000000 GHz	SWT	5 s	Unit	dBm

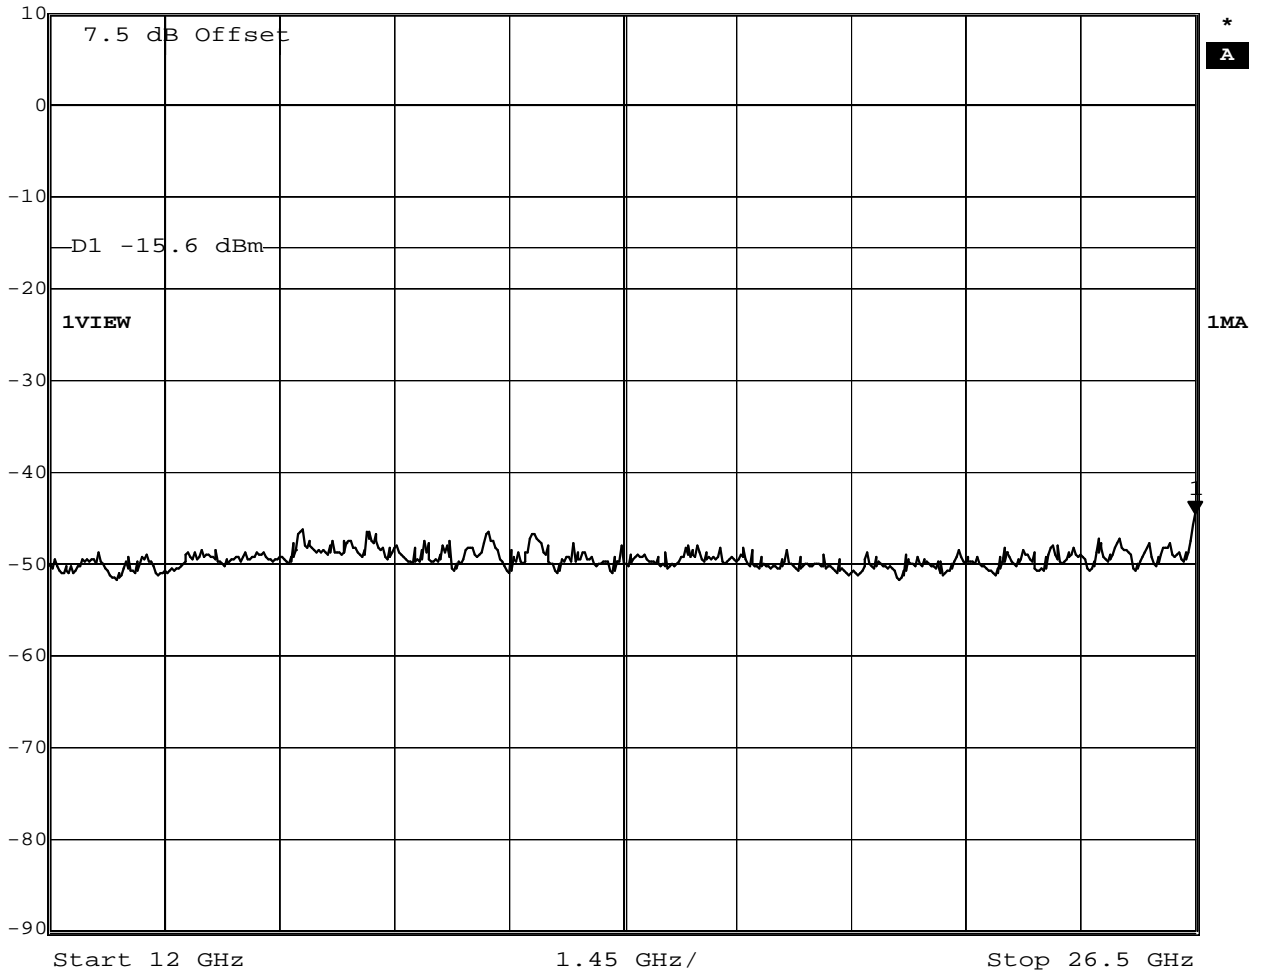

Date: 10.SEP.2010 08:44:22


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 39 / 2441 MHz
Comment 3	GFSK / DH5



Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	5.39 dBm	VBW	300 kHz	
10 dBm	2.44274549 GHz	SWT	5 s	Unit dBm

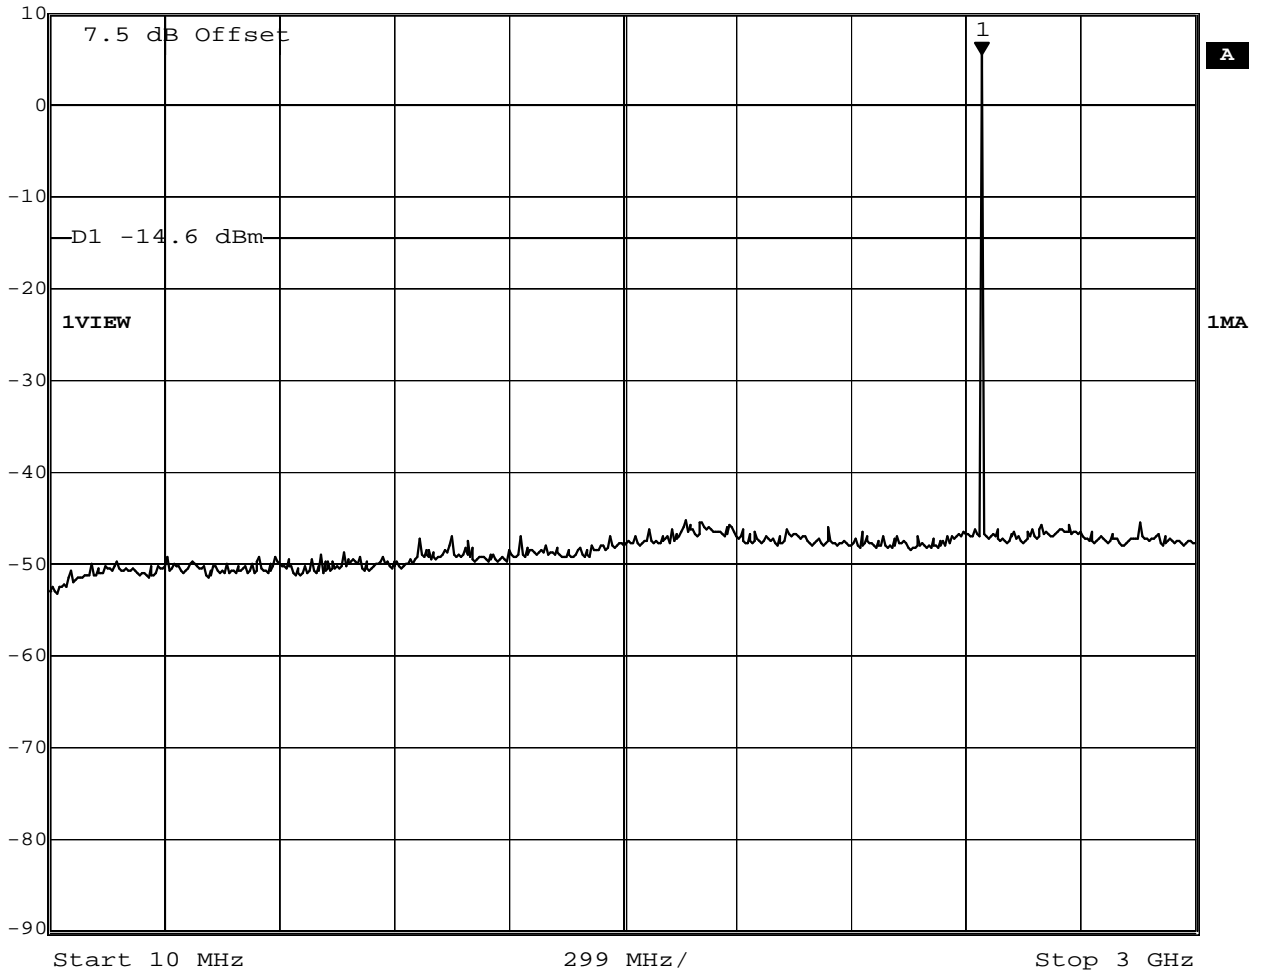

Date: 10.SEP.2010 09:07:53

Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 64 of 110

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 39 / 2441 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-42.70 dBm	VBW	300 kHz		
10 dBm	6.66733467 GHz	SWT	5 s	Unit	dBm

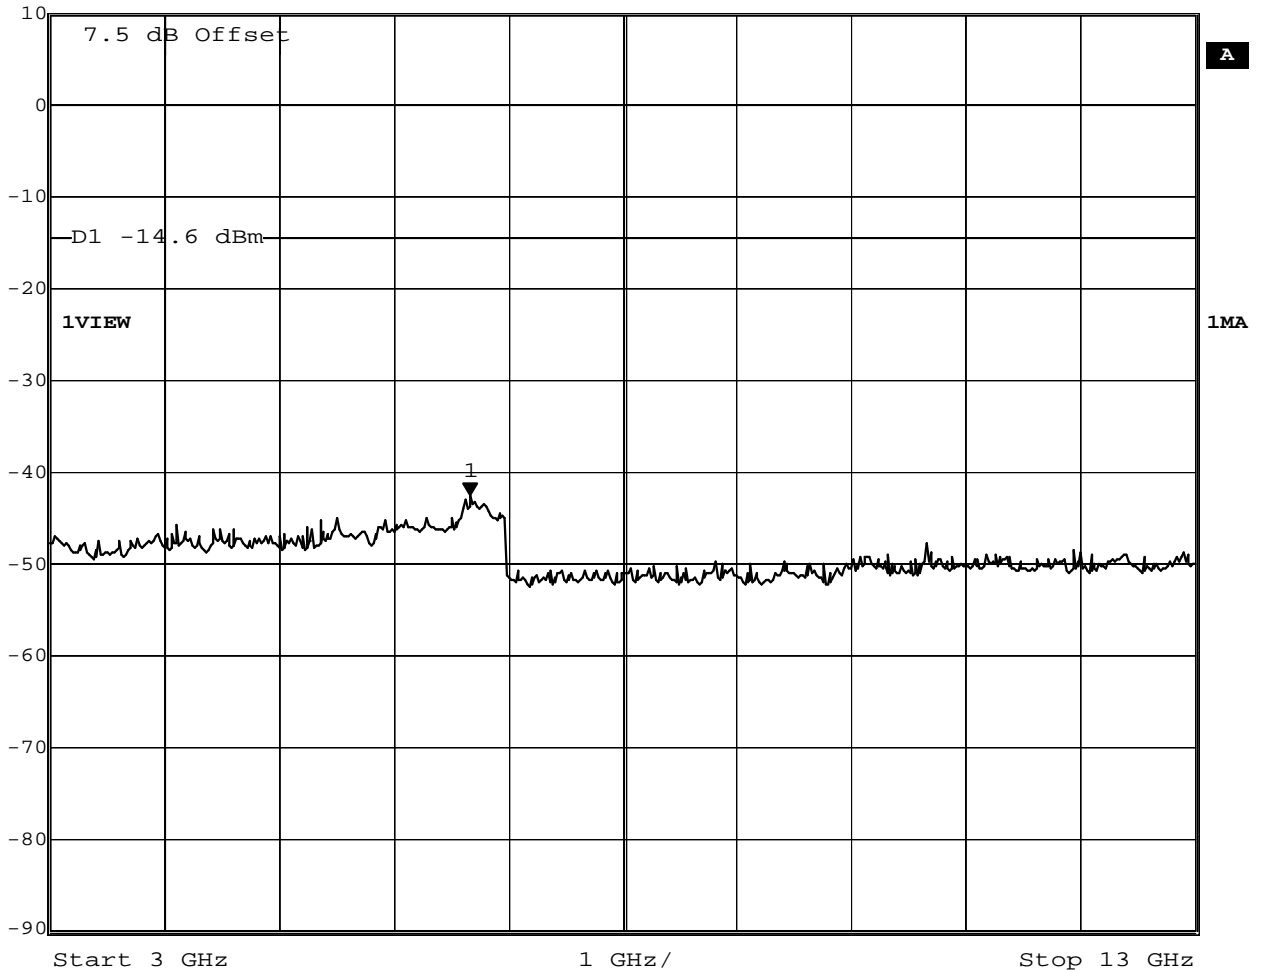

Date: 10.SEP.2010 09:08:57

Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 65 of 110

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 39 / 2441 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-45.78 dBm	VBW	300 kHz		
10 dBm	16.86873747 GHz	SWT	5 s	Unit	dBm

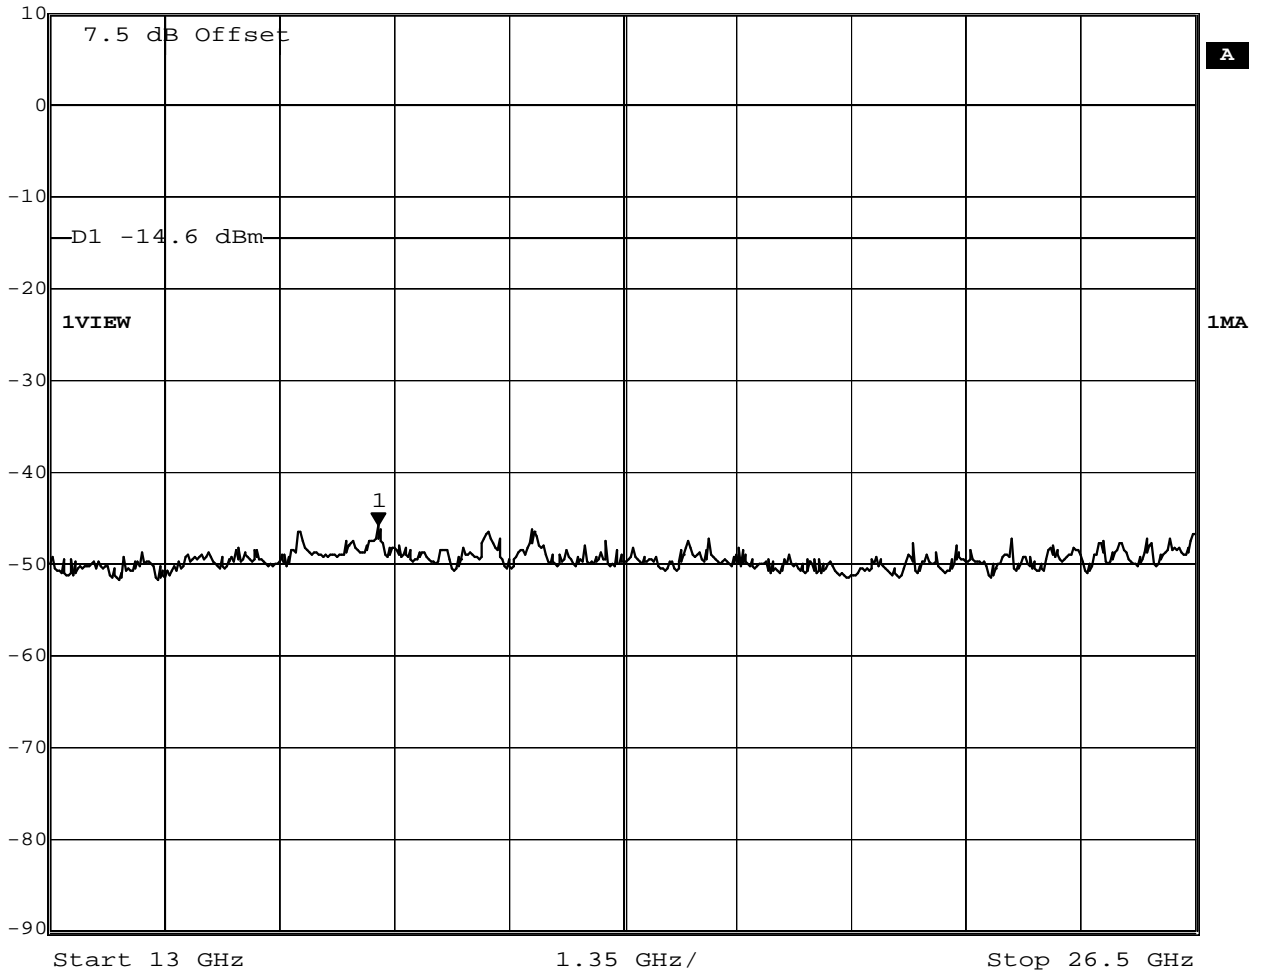

Date: 10.SEP.2010 09:10:03


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 78 / 2480 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	4.85 dBm	VBW	300 kHz		
10 dBm	2.48468938 GHz	SWT	5 s	Unit	dBm

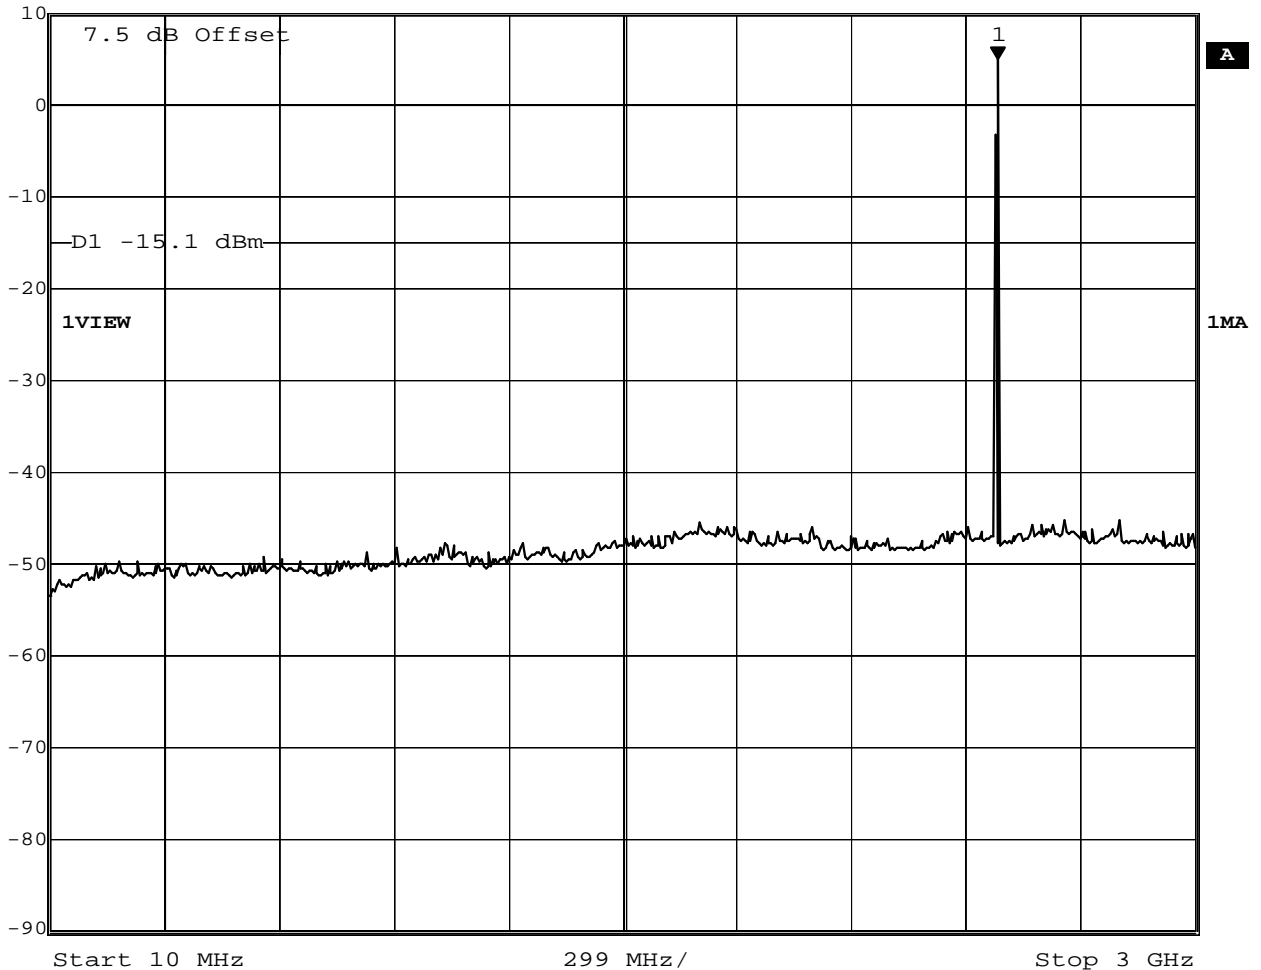

Date: 10.SEP.2010 09:12:57

Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 67 of 110

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 78 / 2480 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-43.66 dBm	VBW	300 kHz		
10 dBm	6.88777555 GHz	SWT	5 s	Unit	dBm

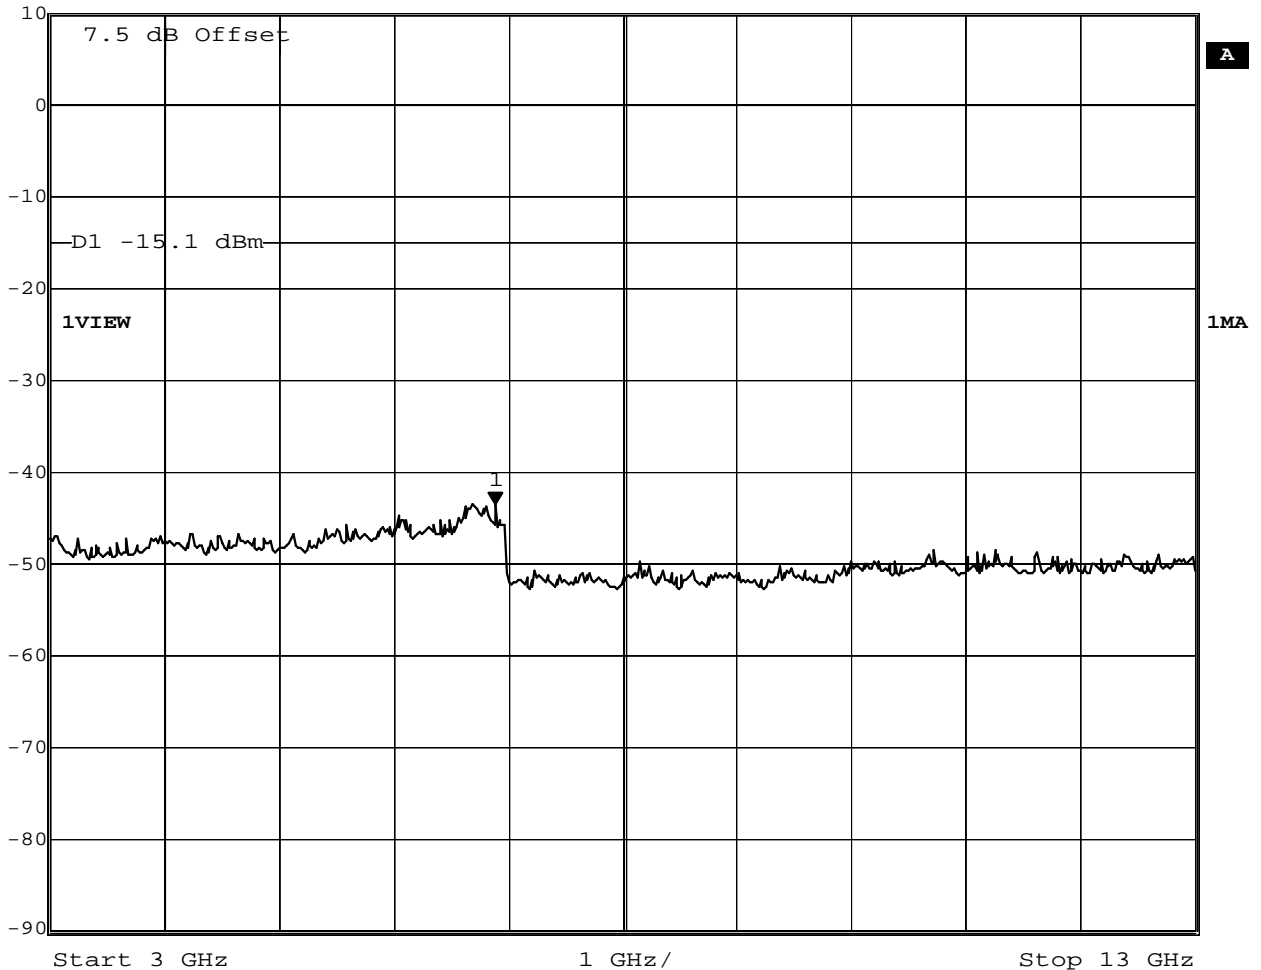

Date: 10.SEP.2010 09:13:52


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 78 / 2480 MHz
Comment 3	GFSK / DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-46.01 dBm	VBW	300 kHz		
10 dBm	26.50000000 GHz	SWT	5 s	Unit	dBm

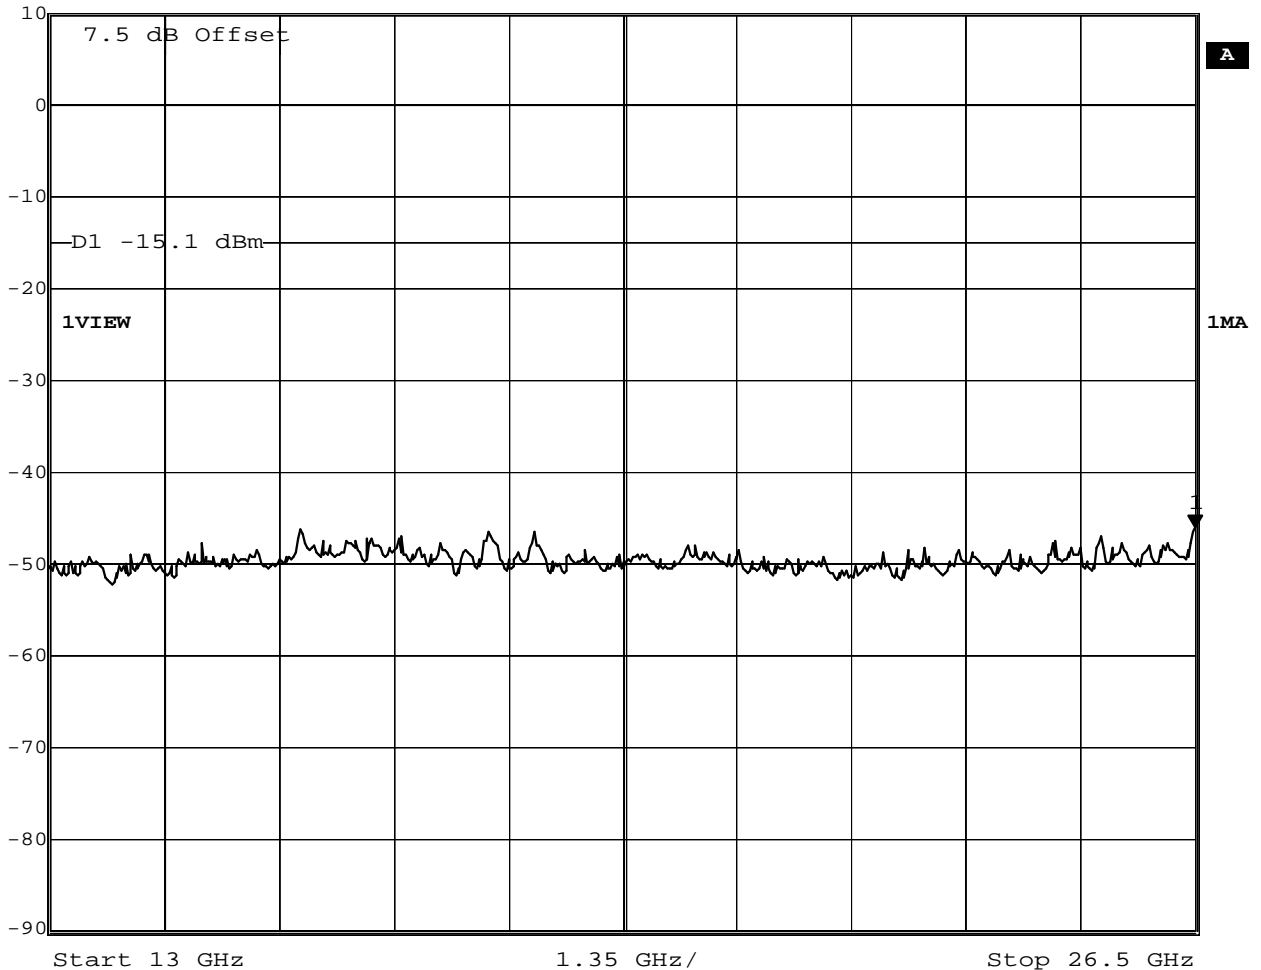

Date: 10.SEP.2010 09:15:17


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 0 / 2402 MHz
Comment 3	8DPSK / 3-DH5



Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-0.52 dBm	VBW	300 kHz	
10 dBm	2.40080160 GHz	SWT	5 s	Unit dBm

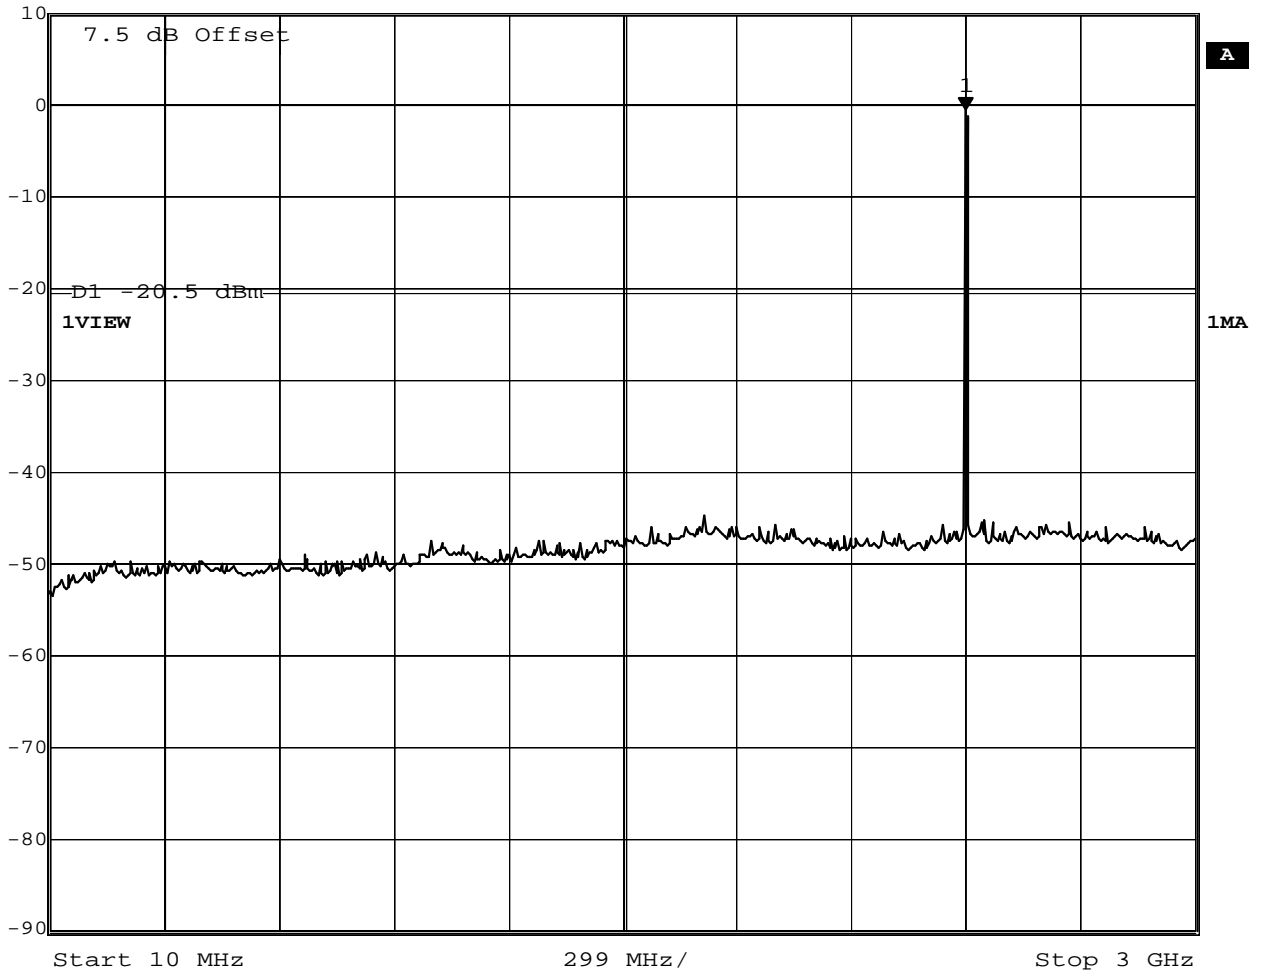

Date: 10.SEP.2010 08:47:19


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 0 / 2402 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-43.16 dBm	VBW	300 kHz		
10 dBm	6.70741483 GHz	SWT	5 s	Unit	dBm

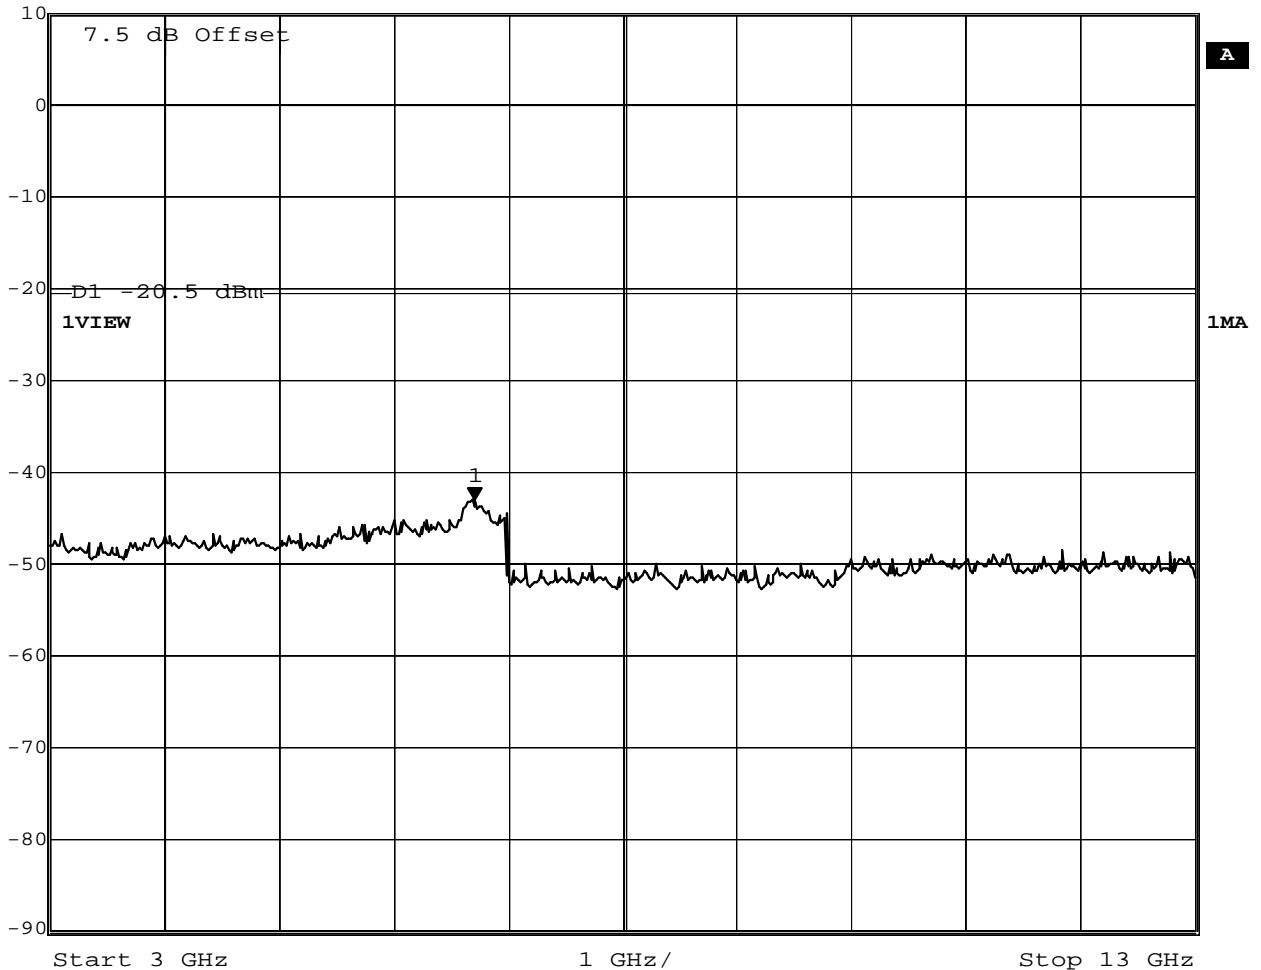

Date: 10.SEP.2010 08:48:37


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 0 / 2402 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-45.43 dBm	VBW	300 kHz		
10 dBm	15.16733467 GHz	SWT	5 s	Unit	dBm

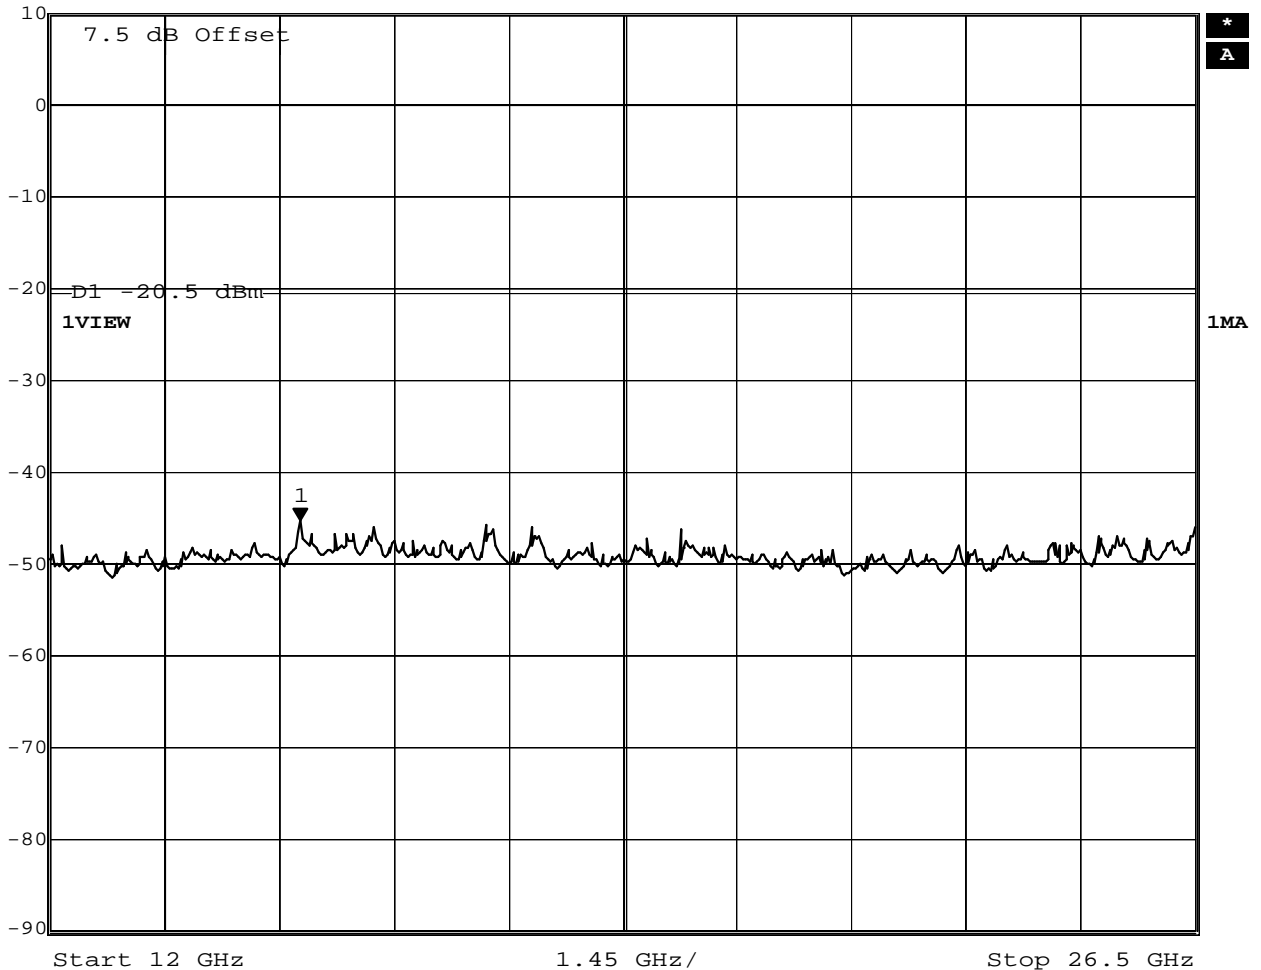

Date: 10.SEP.2010 08:54:05


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 39 / 2441 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	2.78 dBm	VBW	300 kHz		
10 dBm	2.44274549 GHz	SWT	5 s	Unit	dBm

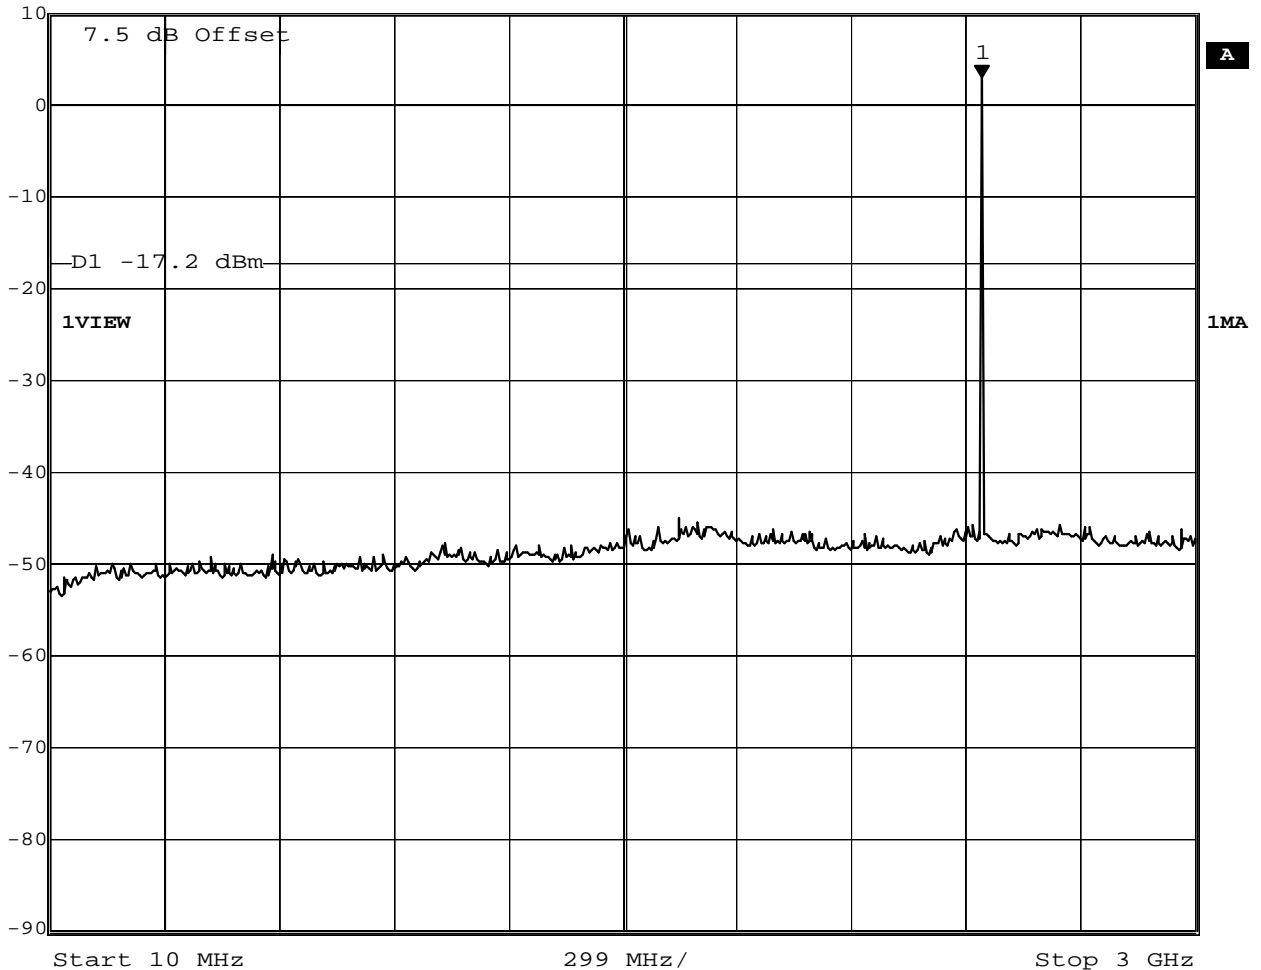

Date: 10.SEP.2010 08:57:57


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 39 / 2441 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-42.32 dBm	VBW	300 kHz		
10 dBm	6.66733467 GHz	SWT	5 s	Unit	dBm

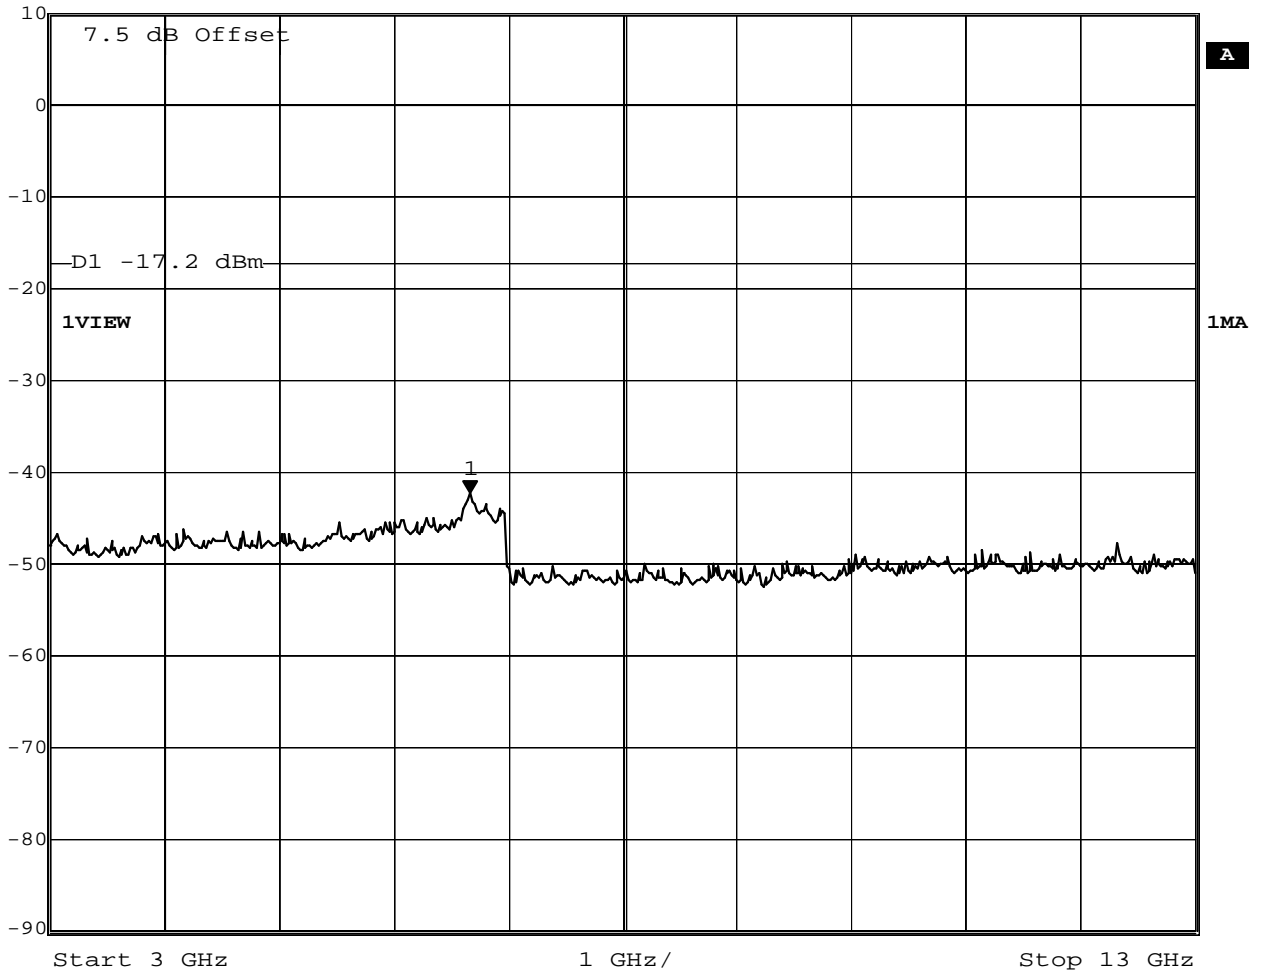

Date: 10.SEP.2010 09:04:13


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 39 / 2441 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-46.26 dBm	VBW	300 kHz		
10 dBm	26.50000000 GHz	SWT	5 s	Unit	dBm

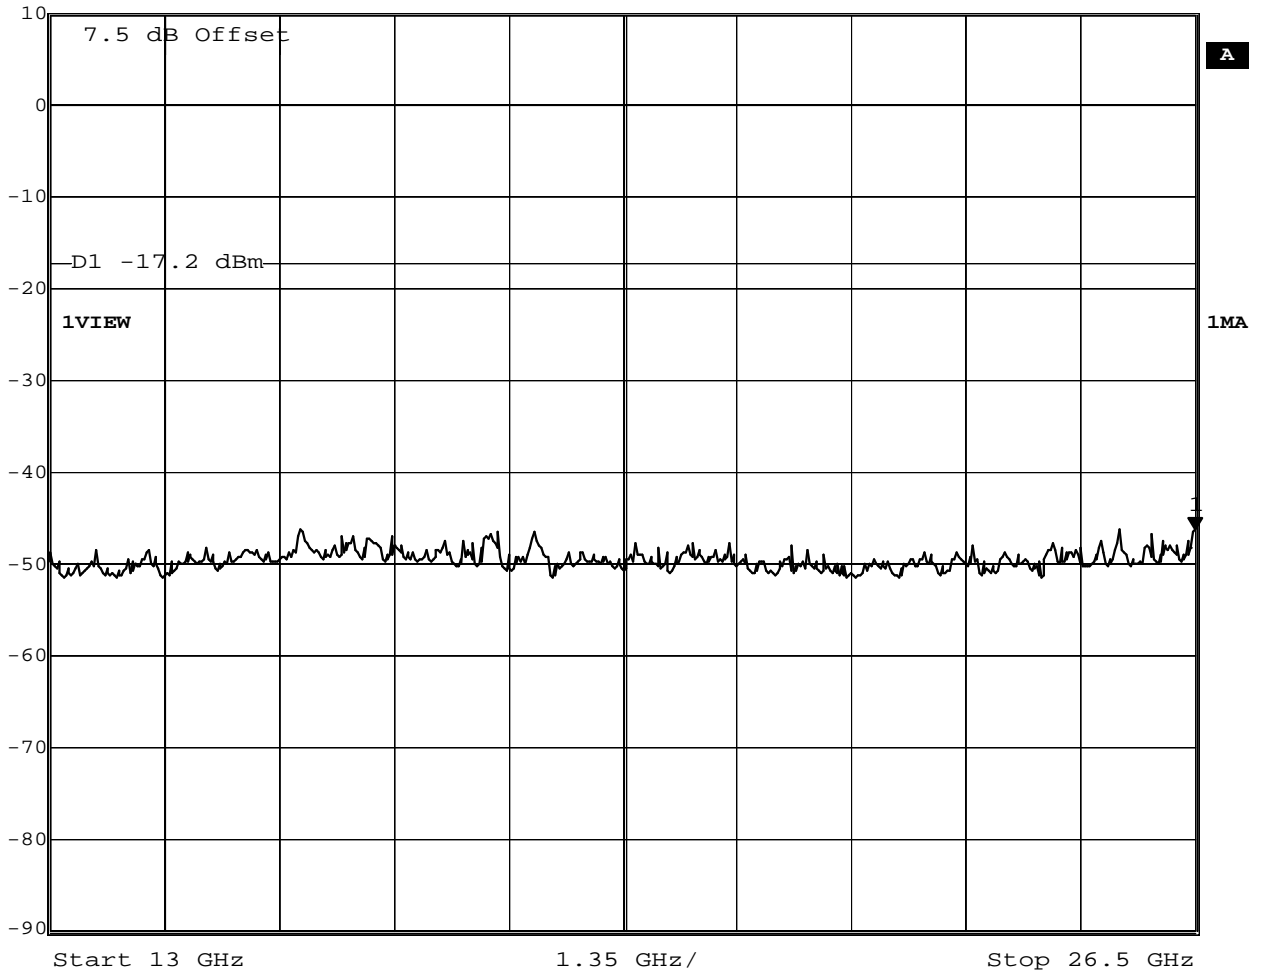

Date: 10.SEP.2010 09:05:15


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 78 / 2480 MHz
Comment 3	8DPSK / 3-DH5



Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	1.42 dBm	VBW	300 kHz	
10 dBm	2.48468938 GHz	SWT	5 s	Unit dBm

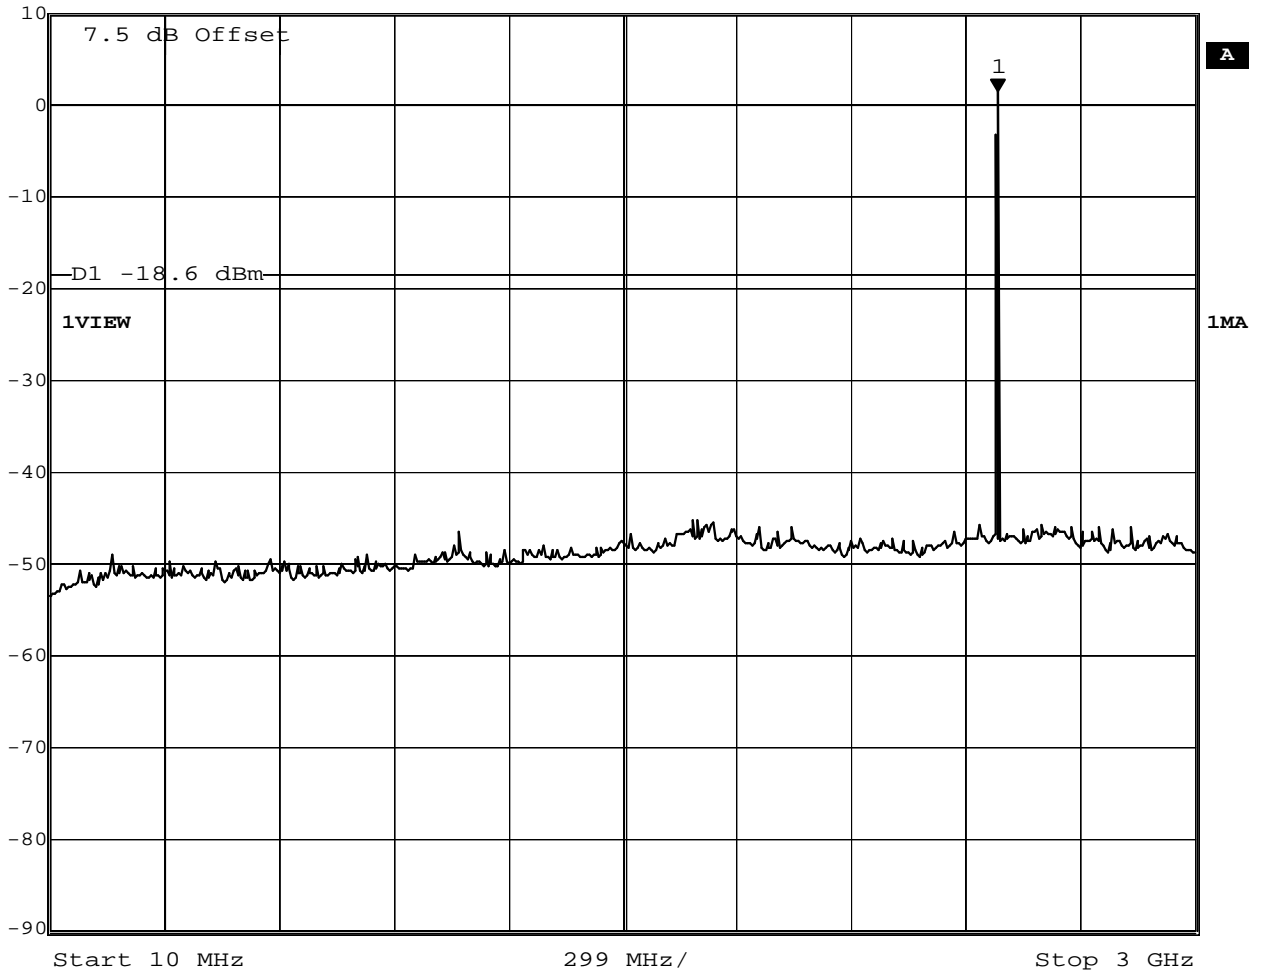

Date: 10.SEP.2010 09:16:47

Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 76 of 110

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 78 / 2480 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-42.37 dBm	VBW	300 kHz		
10 dBm	6.78757515 GHz	SWT	5 s	Unit	dBm

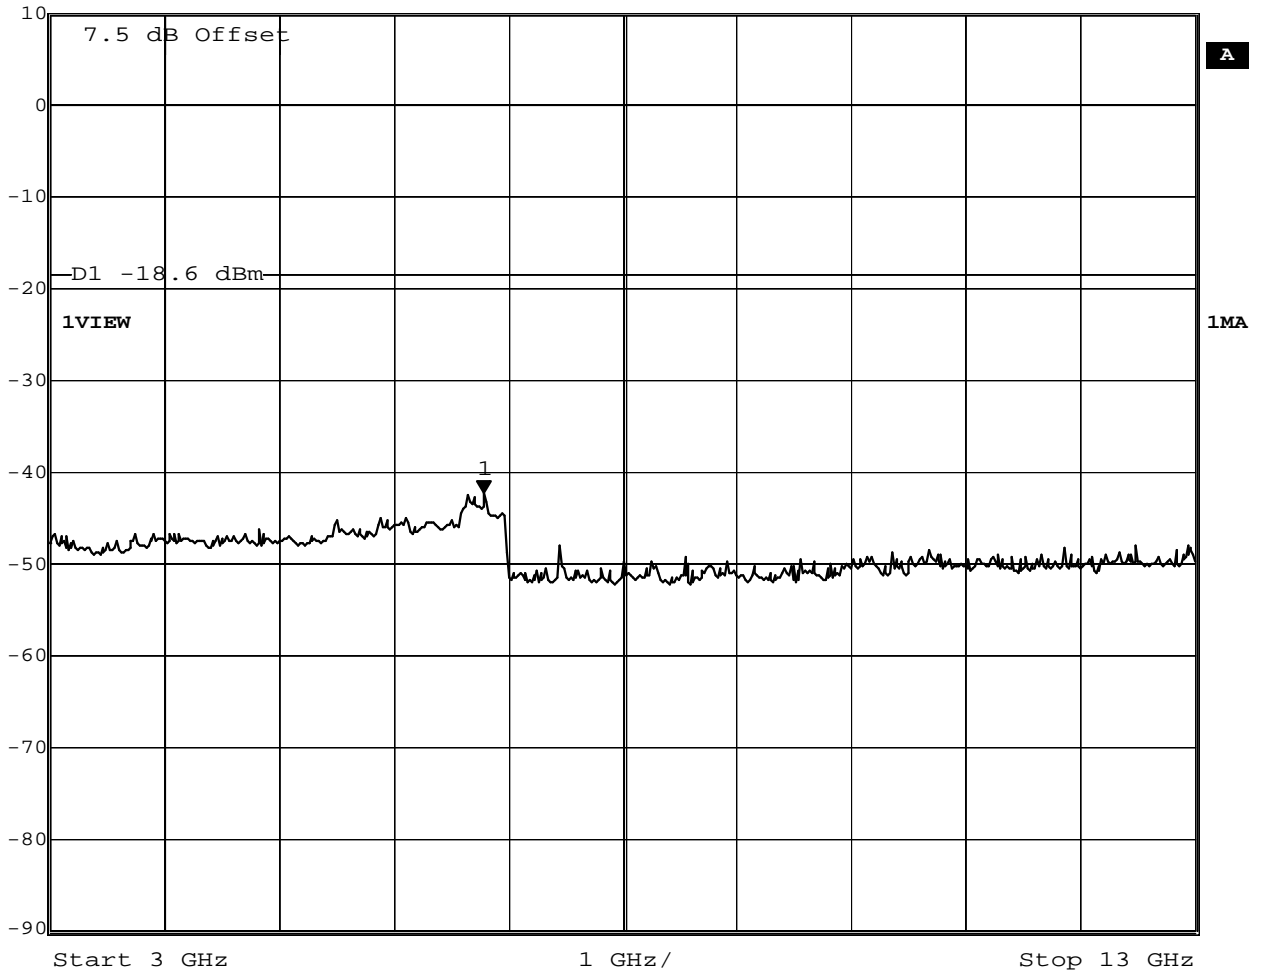

Date: 10.SEP.2010 09:18:20


Test Report No.: G0M21008-3605-P-15

**FCC part 15.247 (d)
Spurious Emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15.247 (d)
Comment 1	Spurious Emissions conducted
Comment 2	Channel : 78 / 2480 MHz
Comment 3	8DPSK / 3-DH5



	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
Ref Lvl	-46.04 dBm	VBW	300 kHz		
10 dBm	18.70841683 GHz	SWT	5 s	Unit	dBm

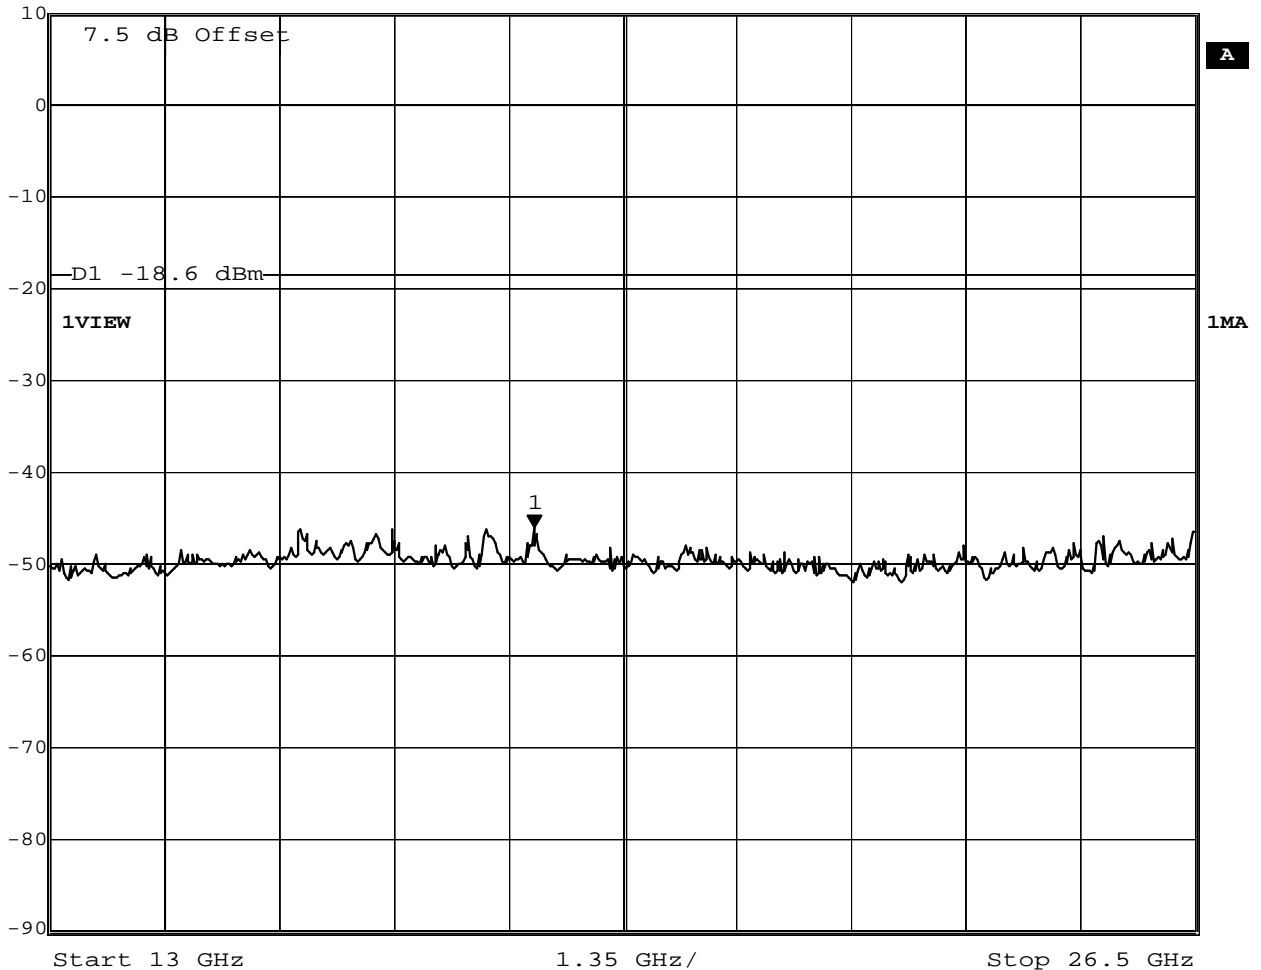

Date: 10.SEP.2010 09:19:16

Test Report No.: G0M21008-3605-P-15

 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 78 of 110

Annex I Band edge compliance

FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz / GFSK
Comment 3	Hopping mode / DH5

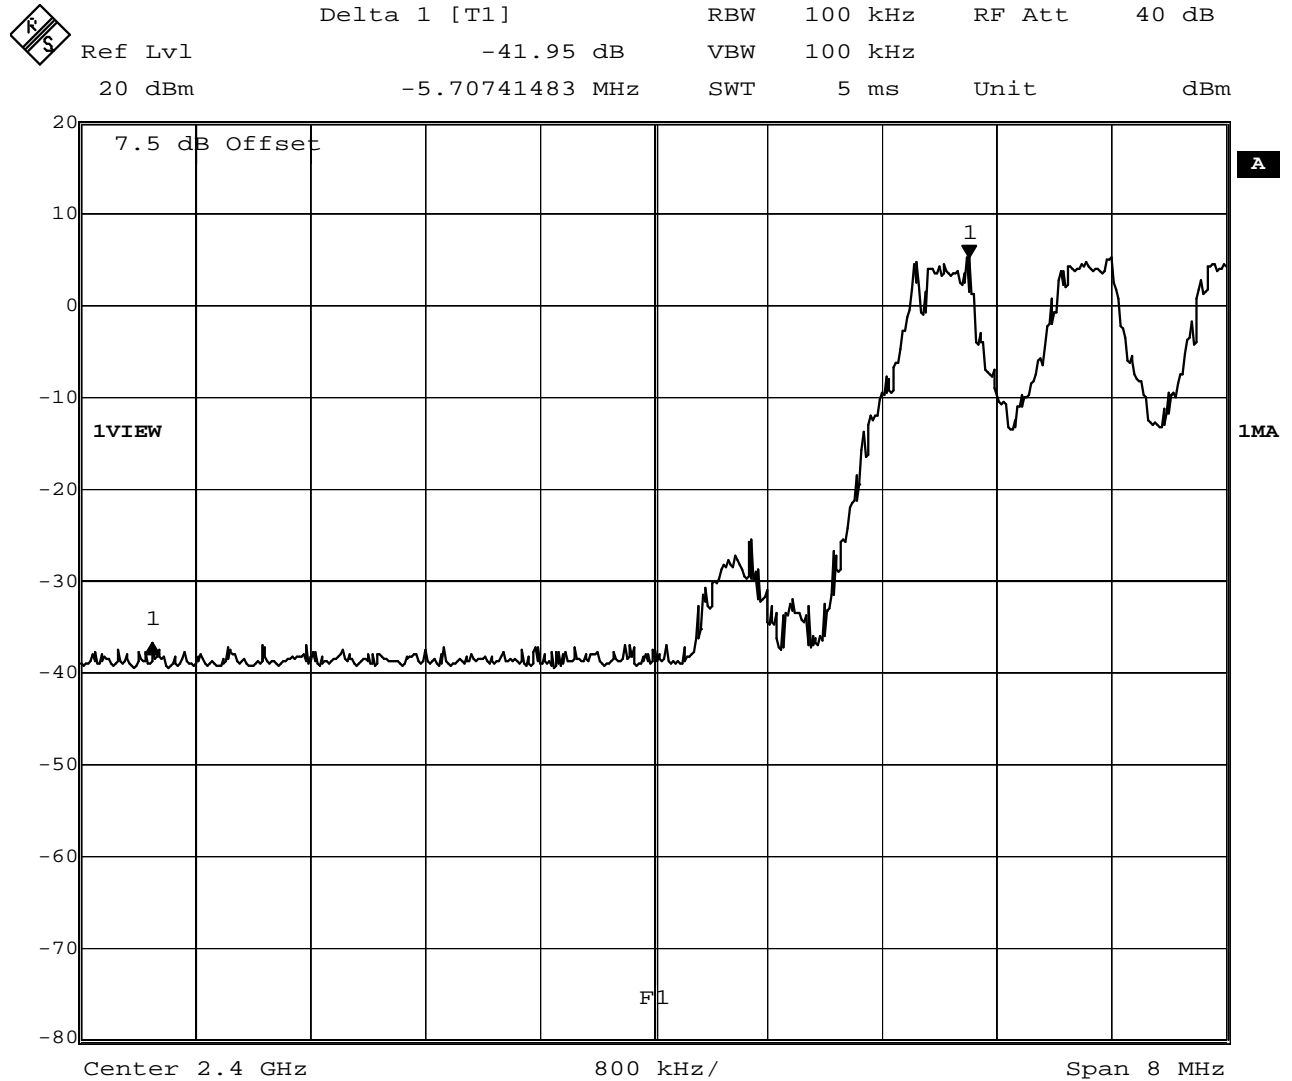

Comment A: Limit: Marker Delta value >20 dB; Result: PASS


Date: 9.SEP.2010 14:43:19

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz / GFSK
Comment 3	Hopping mode / DH5




Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-41.33 dB	VBW	100 kHz	
20 dBm	7.10220441 MHz	SWT	5 ms	Unit dBm

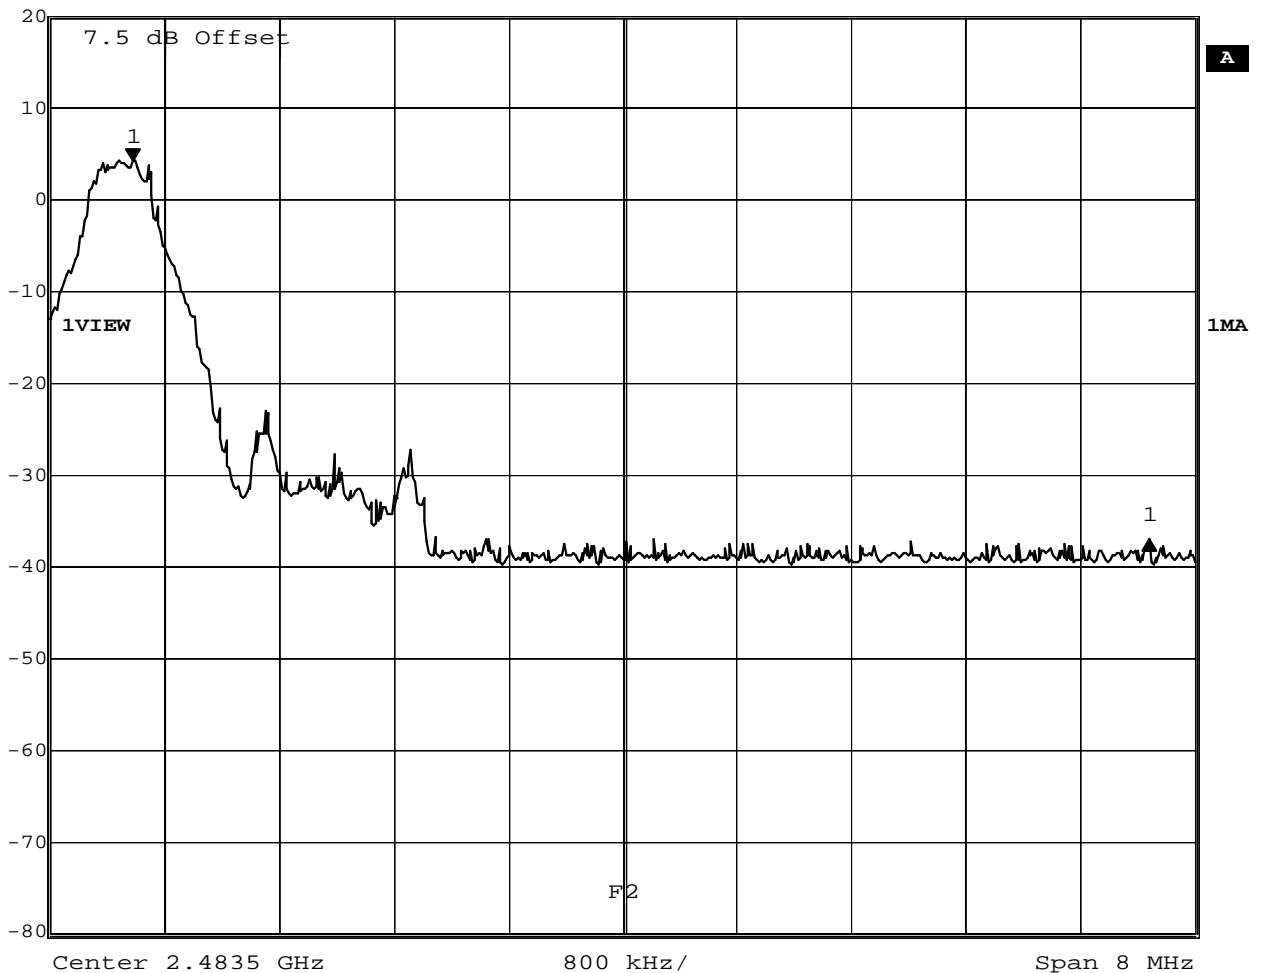

Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 9.SEP.2010 15:30:21

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz / GFSK
Comment 3	Single frequency mode / DH5

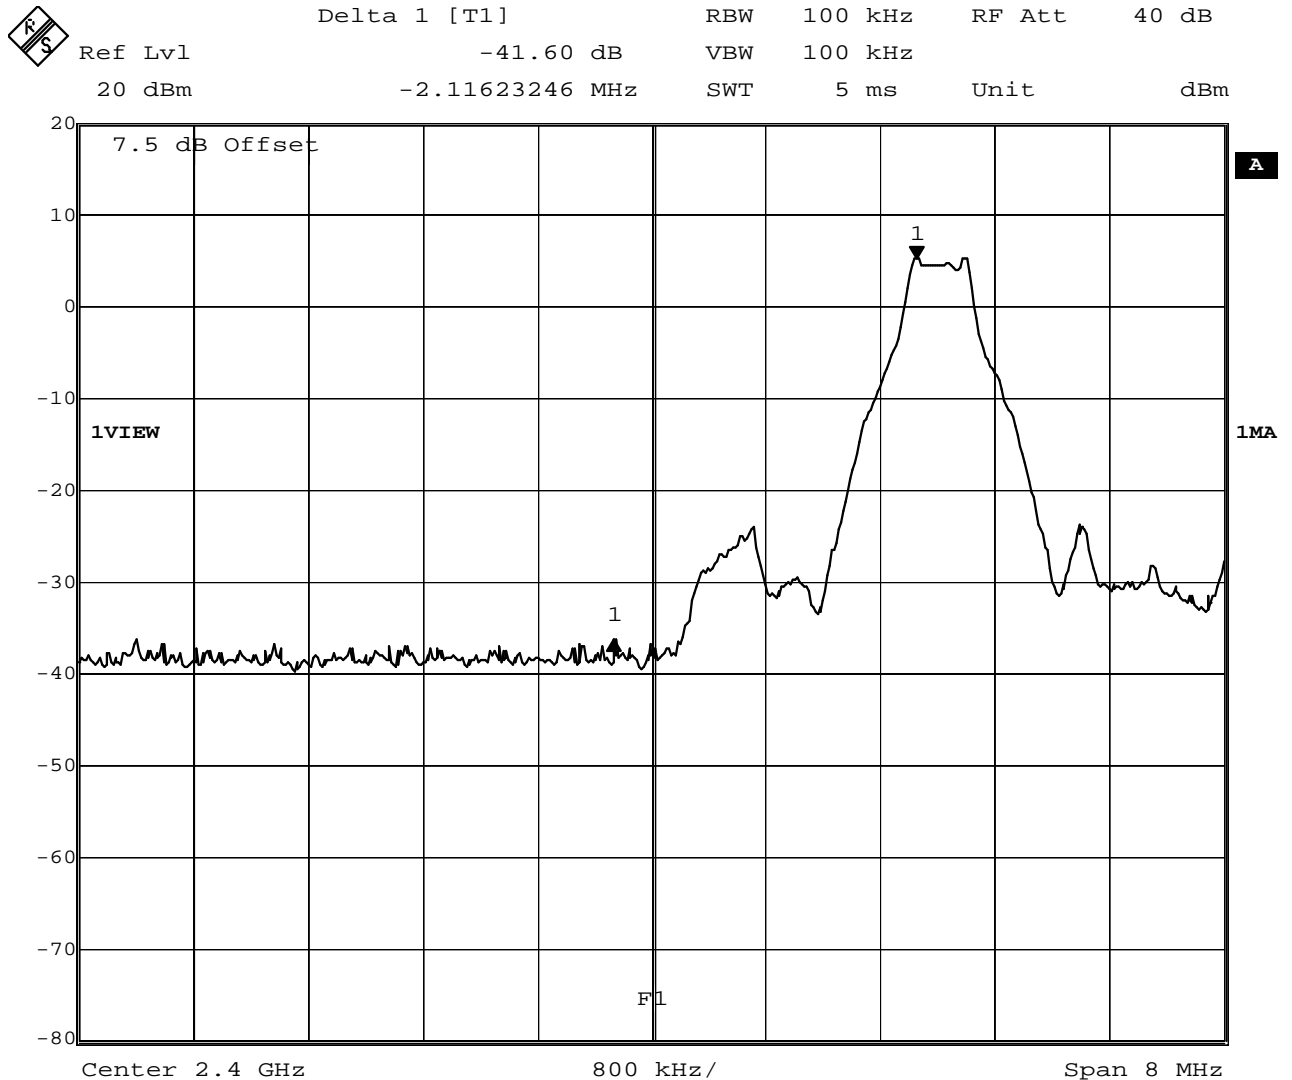


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 9.SEP.2010 14:40:09

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz / GFSK
Comment 3	Single frequency mode / DH5



	Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-42.45 dB	VBW	100 kHz		
20 dBm	4.52104208 MHz	SWT	5 ms	Unit	dBm

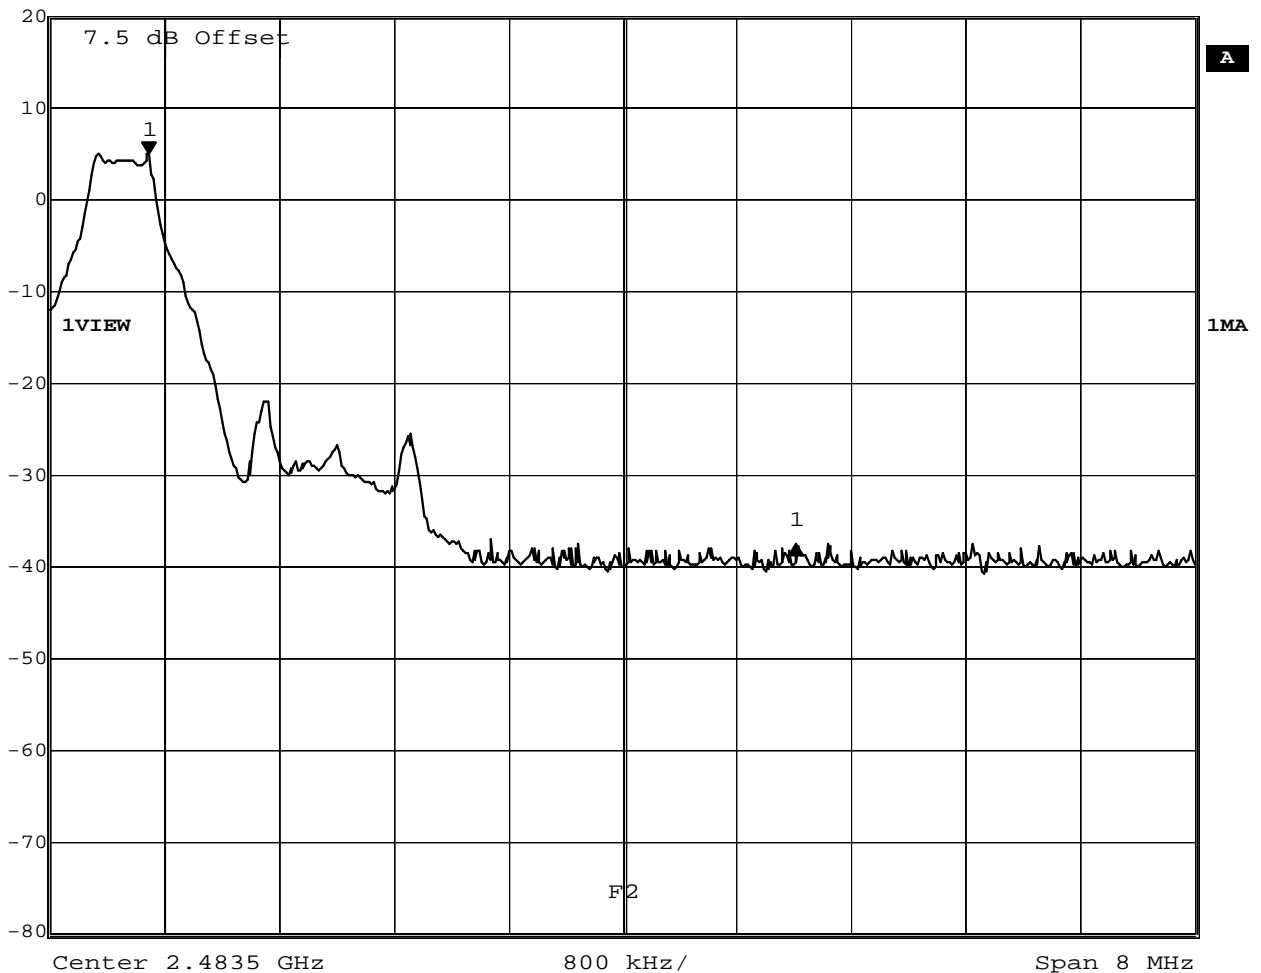


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 9.SEP.2010 14:25:59

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz / $\pi/4$ -DQPSK
Comment 3	Hopping mode / 2-DH5



	Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-39.03 dB	VBW	100 kHz		
20 dBm	-5.33867735 MHz	SWT	5 ms	Unit	dBm

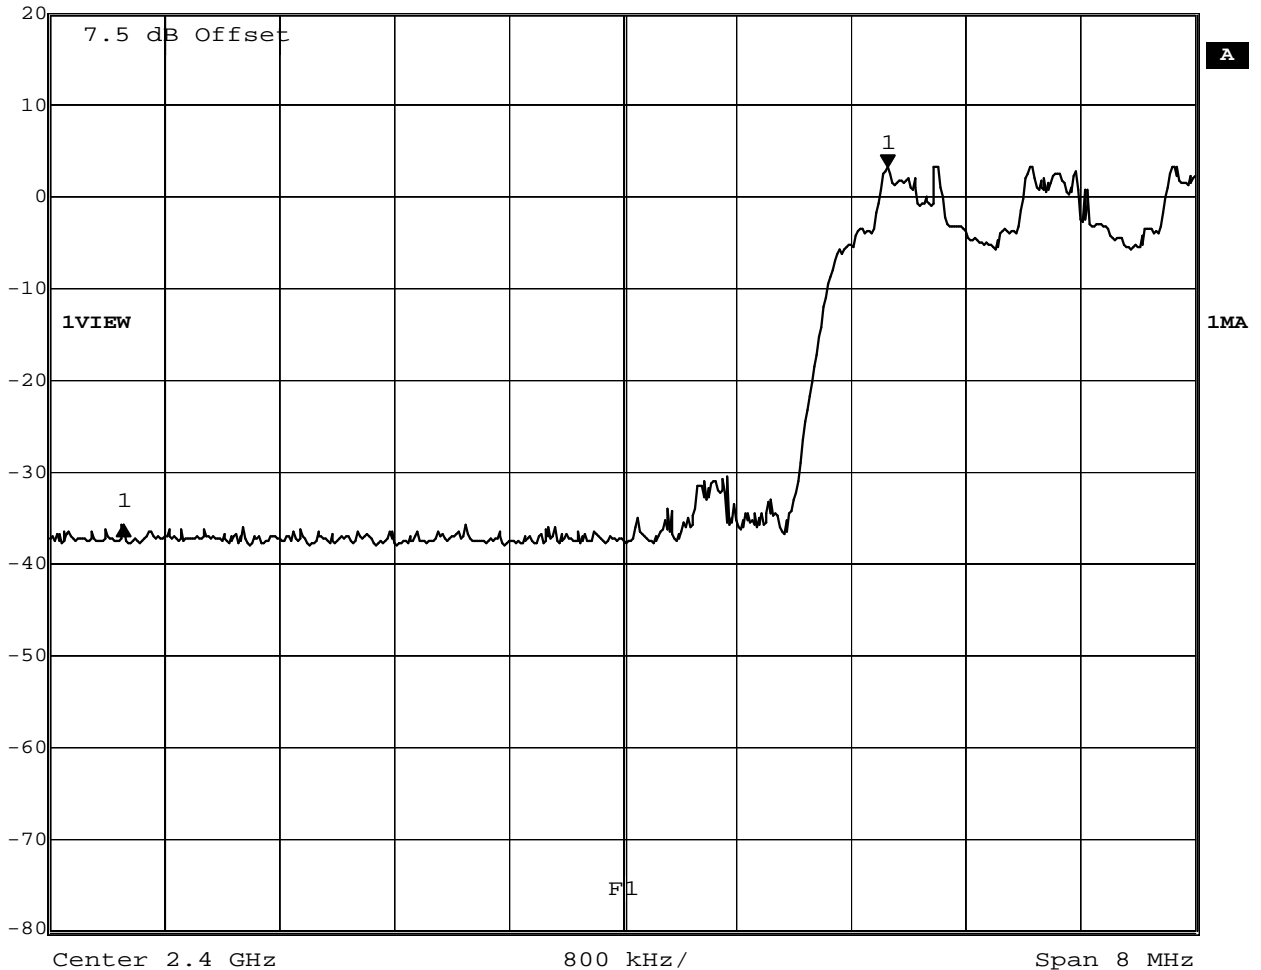

Comment A: Limit: Marker Delta value >20 dB; Result: PASS


Date: 9.SEP.2010 15:04:17

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz / $\pi/4$ -DQPSK
Comment 3	Hopping mode / 2-DH5



Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-37.99 dB	VBW	100 kHz	
20 dBm	5.56312625 MHz	SWT	5 ms	Unit dBm

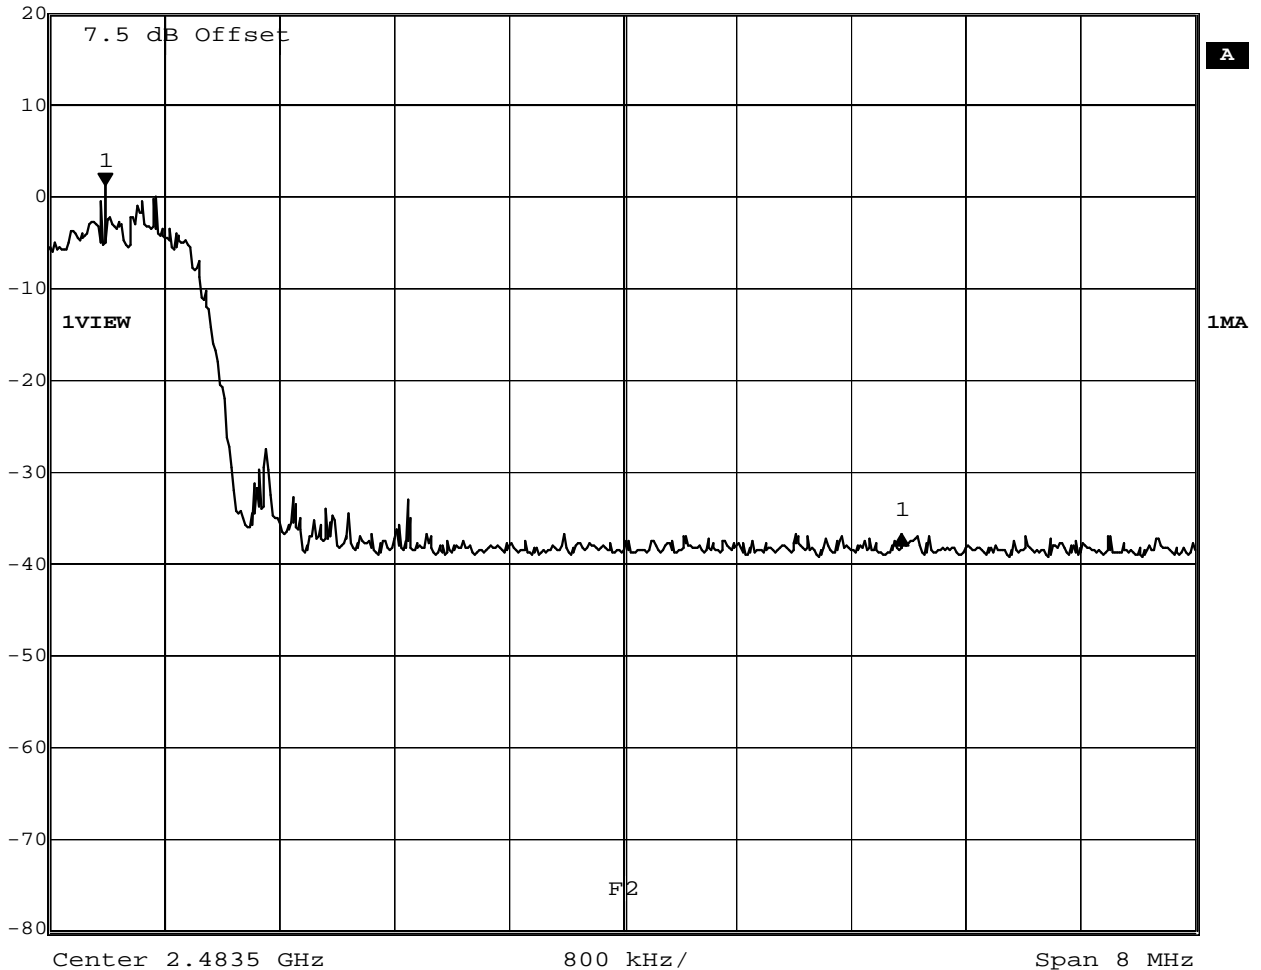


Date: 9.SEP.2010 15:28:08

Test Report No.: G0M21008-3605-P-15

**FCC part 15.247
Band-edge compliance of RF conducted emissions**

EUT RF module with BT and WLAN
Model WiBear-E, AN00K60055
Approval Holder lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage 23°C / Vnom
Test Site / Operator Eurofins Product Service GmbH / Mr. Handrik
Test Specification FCC part 15 section 247(c)
Comment 1 Band-edge compliance
Comment 2 Channel.: 0 / 402 MHz / π/4-DQPSK
Comment 3 Single frequency mode / 2-DH5

	Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	-39.90 dB	VBW	100 kHz	
	20 dBm	-3.30260521 MHz	SWT	5 ms	Unit
					dBm

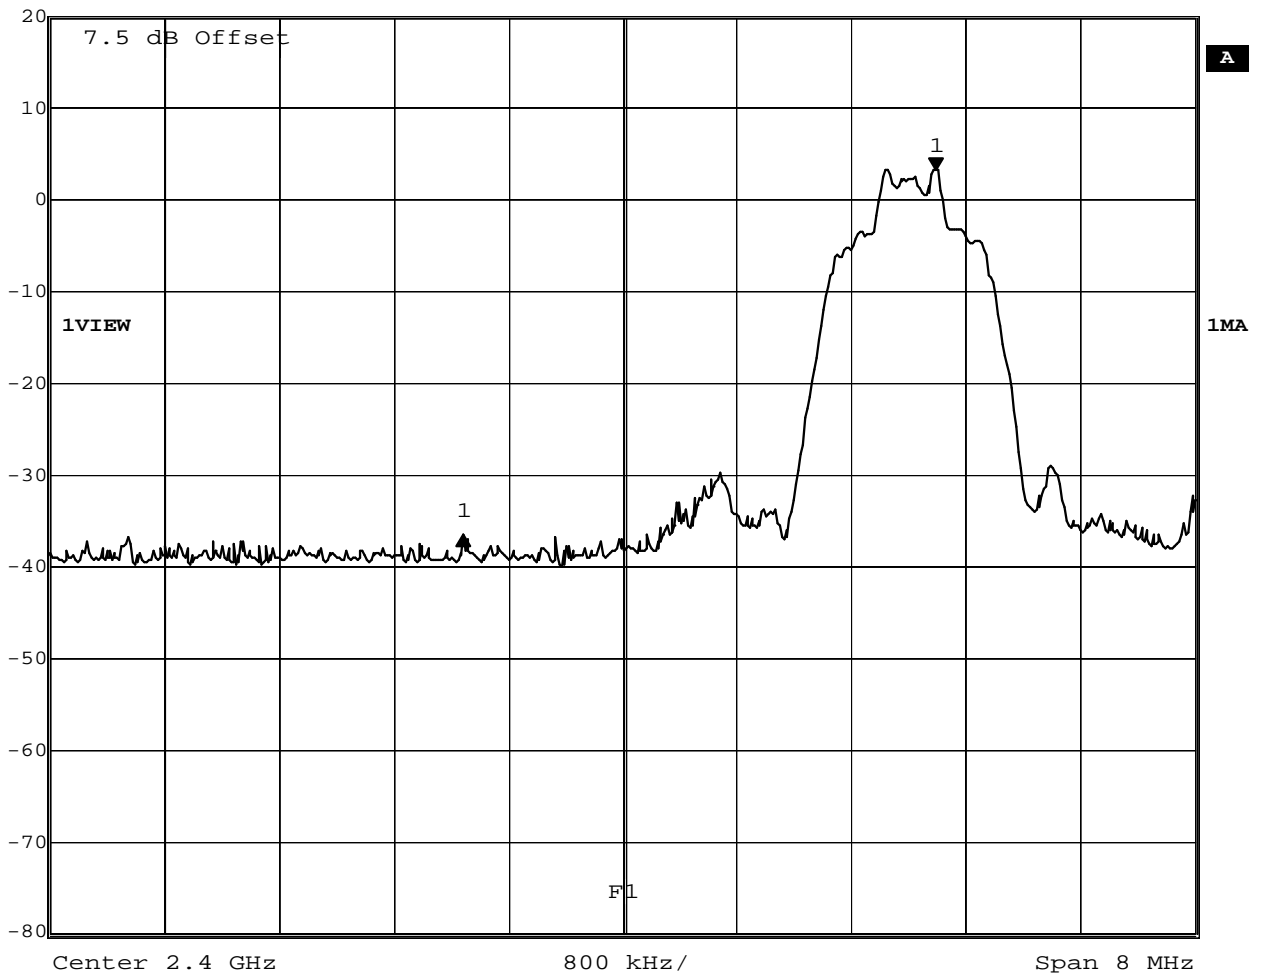


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
Date: 9.SEP.2010 14:37:35

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz / $\pi/4$ -DQPSK
Comment 3	Single frequency mode / 2-DH5



Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-38.27 dB	VBW	100 kHz	
20 dBm	6.46092184 MHz	SWT	5 ms	Unit dBm

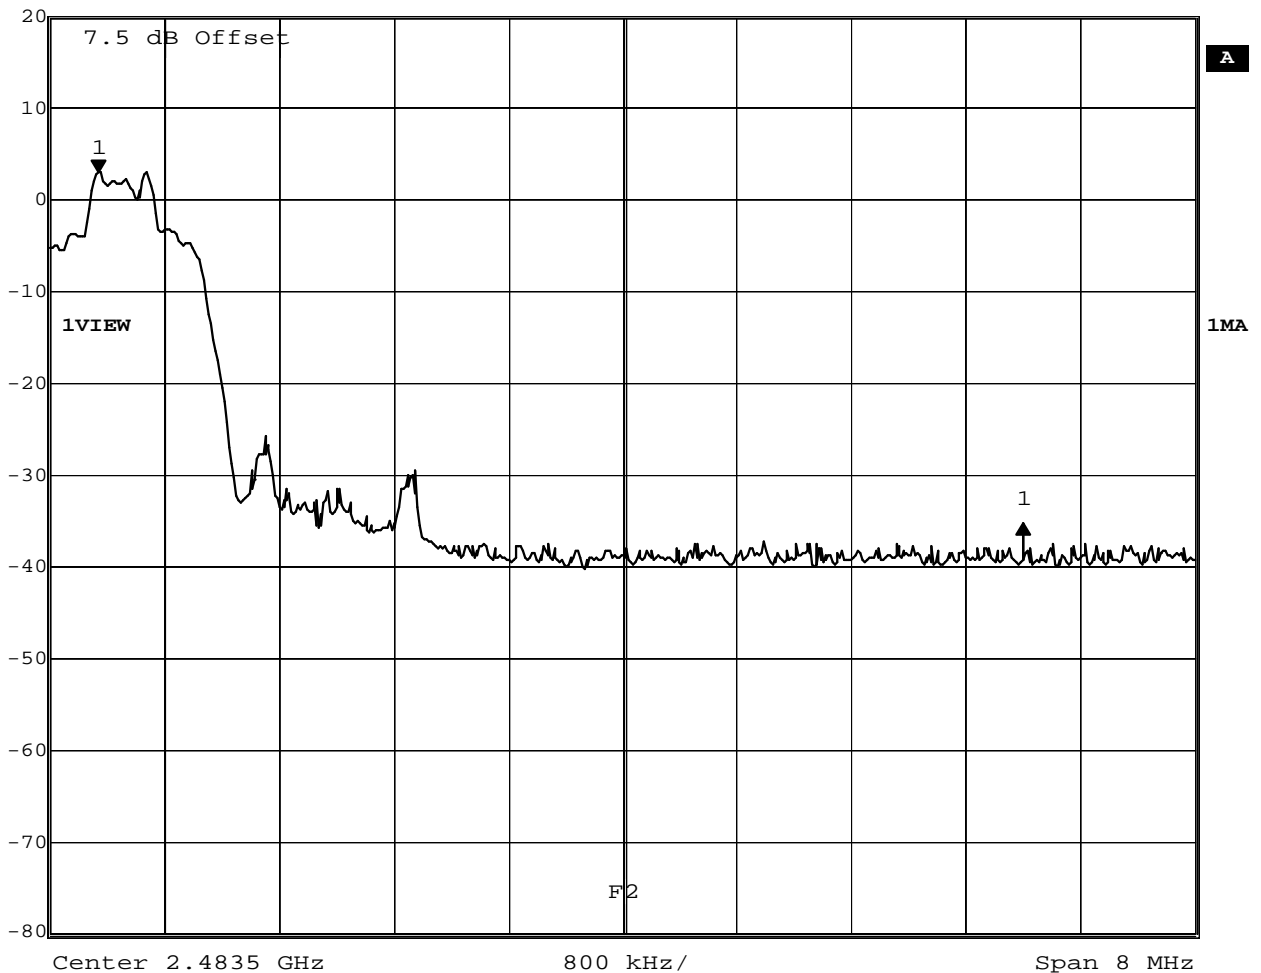


Comment A: Limit: Marker Delta value >20 dB; Result: PASS

Date: 9.SEP.2010 14:29:13

**FCC part 15.247
Band-edge compliance of RF conducted emissions**

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz / 8DPSK
Comment 3	Hopping mode / 3-DH5

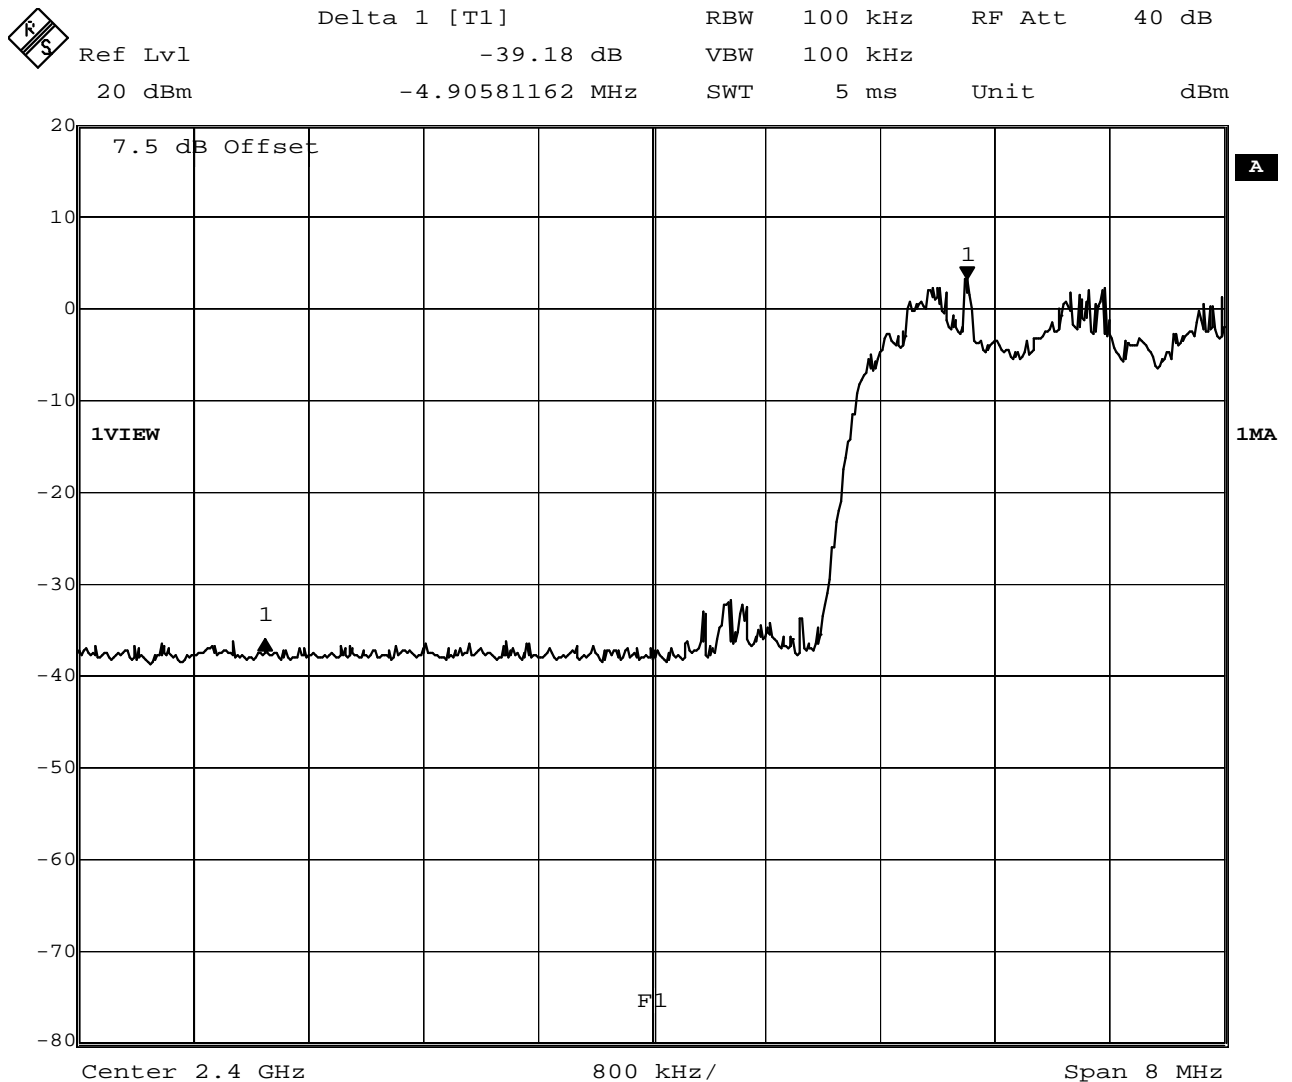


Comment A: Limit: Marker Delta value >20 dB; Result: PASS
Date: 9.SEP.2010 15:13:10

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz / 8DPSK
Comment 3	Hopping mode / 3-DH5



Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-38.96 dB	VBW	100 kHz	
20 dBm	3.81563126 MHz	SWT	5 ms	Unit dBm

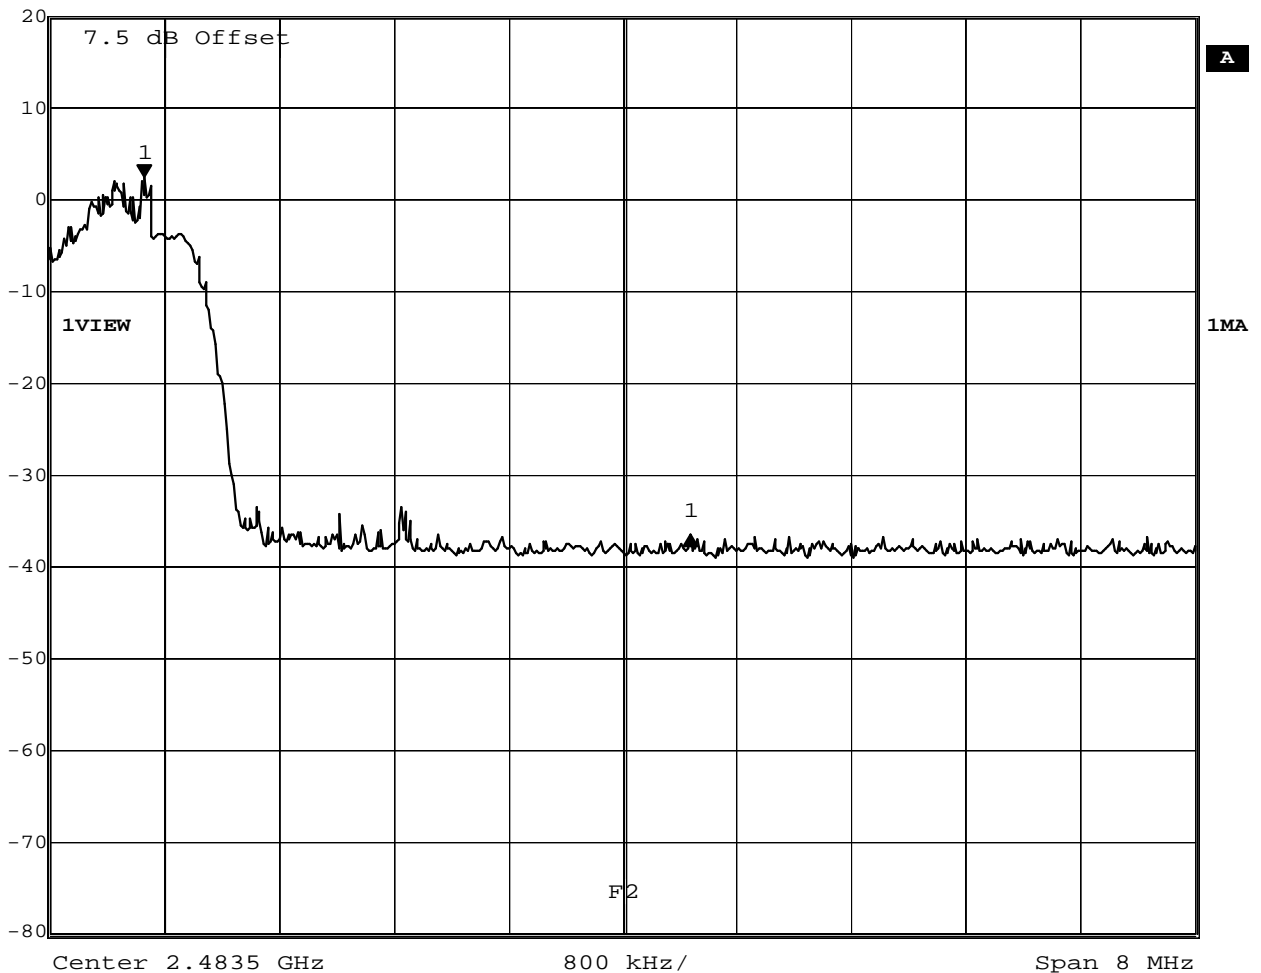

Comment A: Limit: Marker Delta value >20 dB; Result: PASS


Date: 9.SEP.2010 15:22:02

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 402 MHz / 8DPSK
Comment 3	Single frequency mode / 3-DH5



	Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-39.62 dB	VBW	100 kHz		
20 dBm	-3.92785571 MHz	SWT	5 ms	Unit	dBm

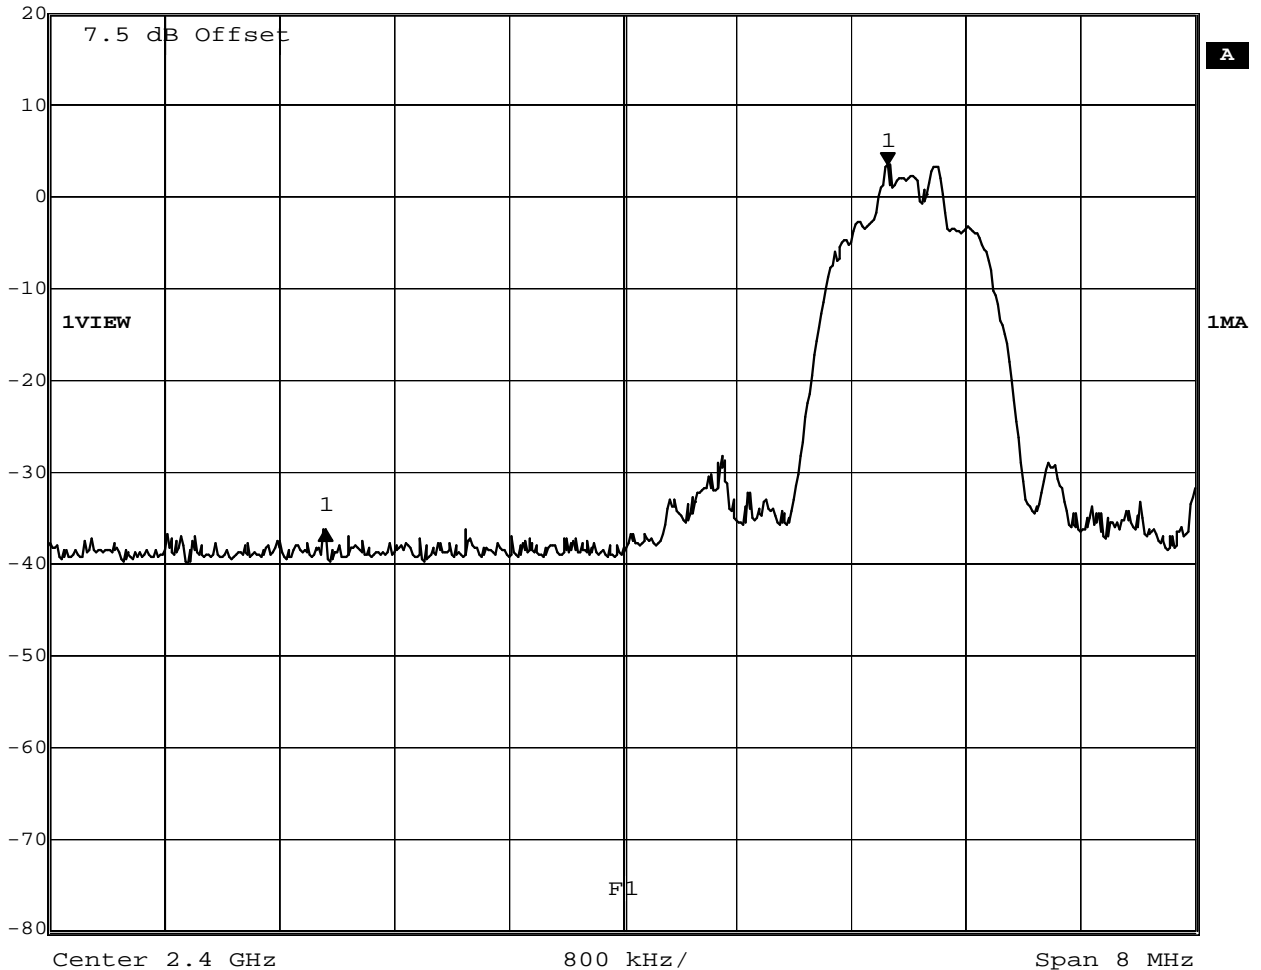

Comment A: Limit: Marker Delta value >20 dB; Result: PASS


Date: 9.SEP.2010 14:34:49

FCC part 15.247
Band-edge compliance of RF conducted emissions

EUT	RF module with BT and WLAN
Model	WiBear-E, AN00K60055
Approval Holder	lesswire AG / Ord.: G0M21008-3605
Temperature / Voltage	23°C / Vnom
Test Site / Operator	Eurofins Product Service GmbH / Mr. Handrik
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz / 8DPSK
Comment 3	Single frequency mode / 3-DH5



Delta 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	-40.10 dB	VBW	100 kHz	
20 dBm	4.77755511 MHz	SWT	5 ms	Unit dBm

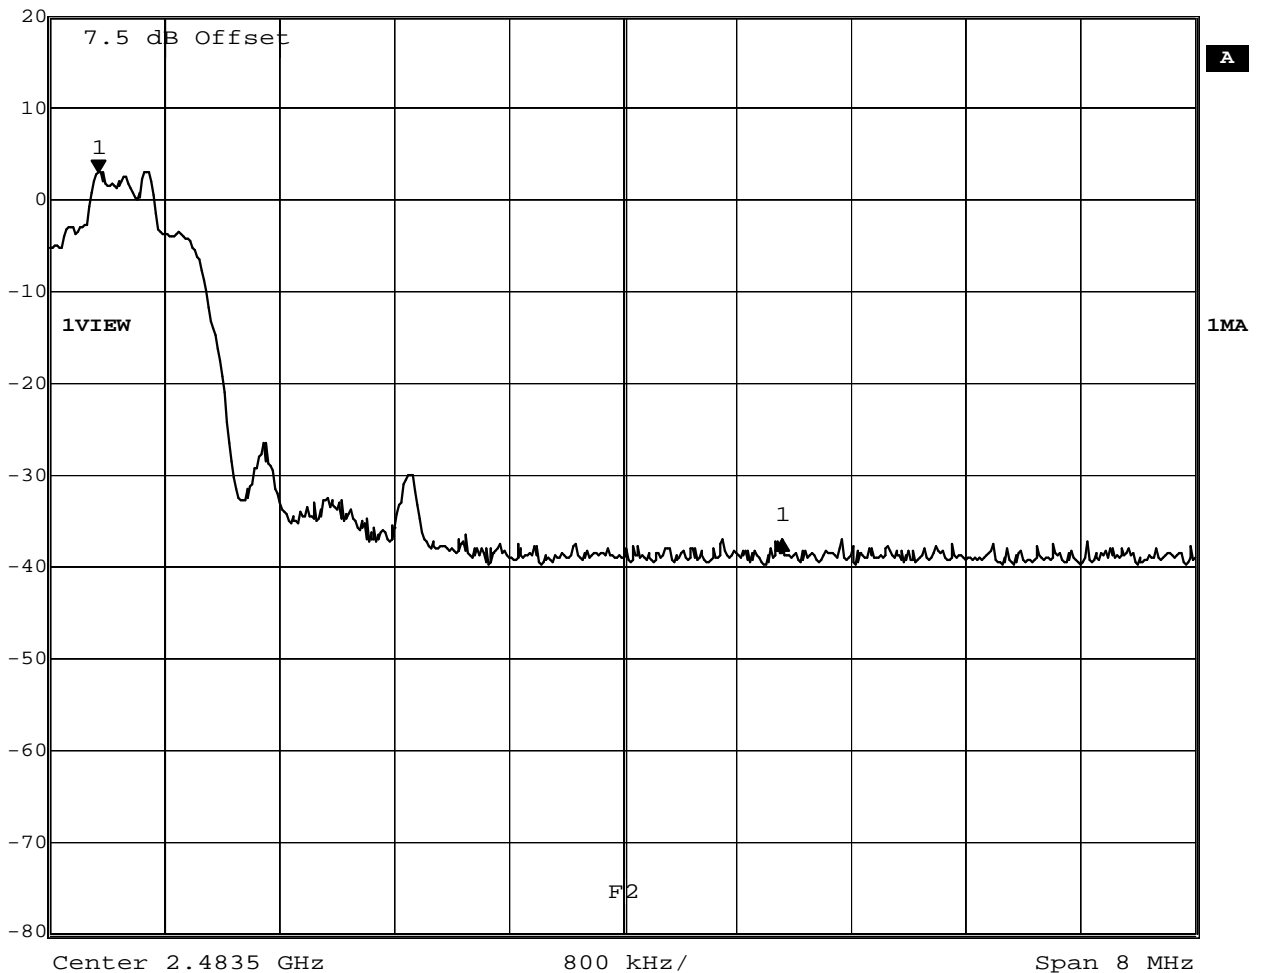

Comment A: Limit: Marker Delta value >20 dB; Result: PASS
 Date: 9.SEP.2010 14:31:53


Annex J Transmitter radiated spurious emissions

Only plot containing significant spurious emission are given in this annex.

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2480 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 45.64dBuV/m, RBW: 1MHz

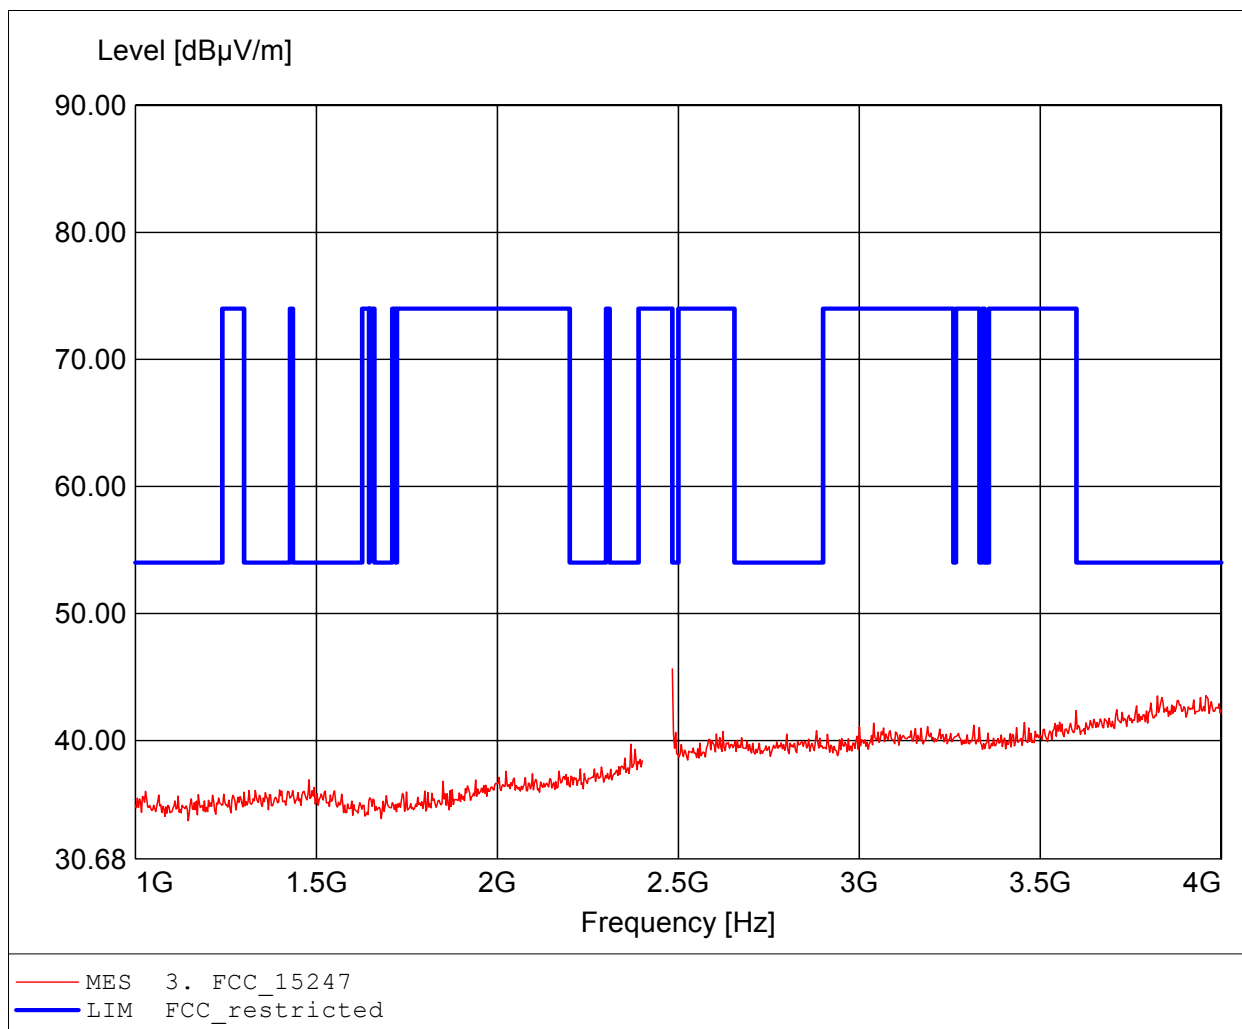

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 45.25dBµV/m, RBW: 1MHz

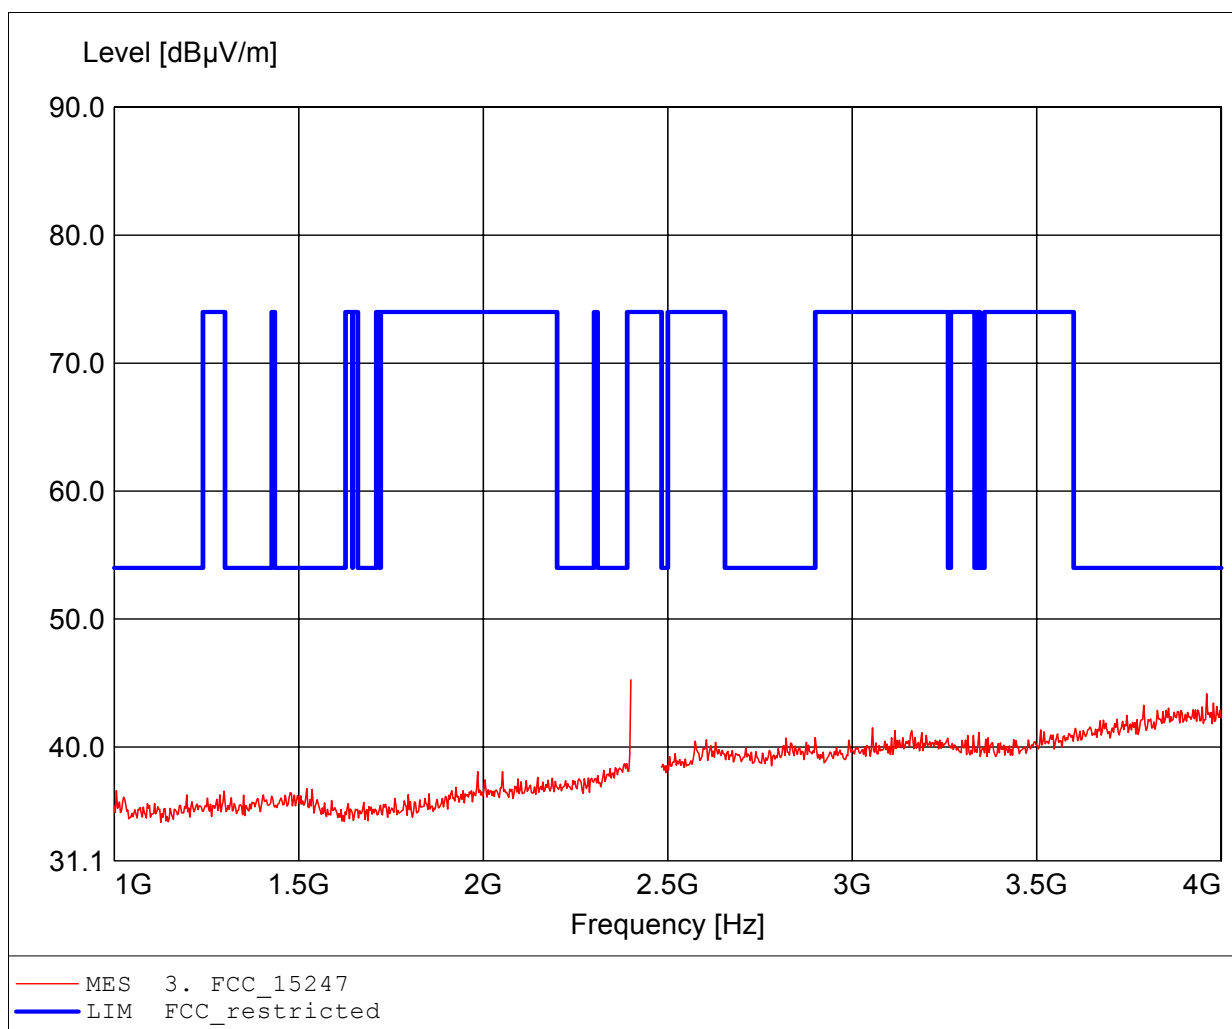

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 51.09dBuV/m, RBW: 1MHz

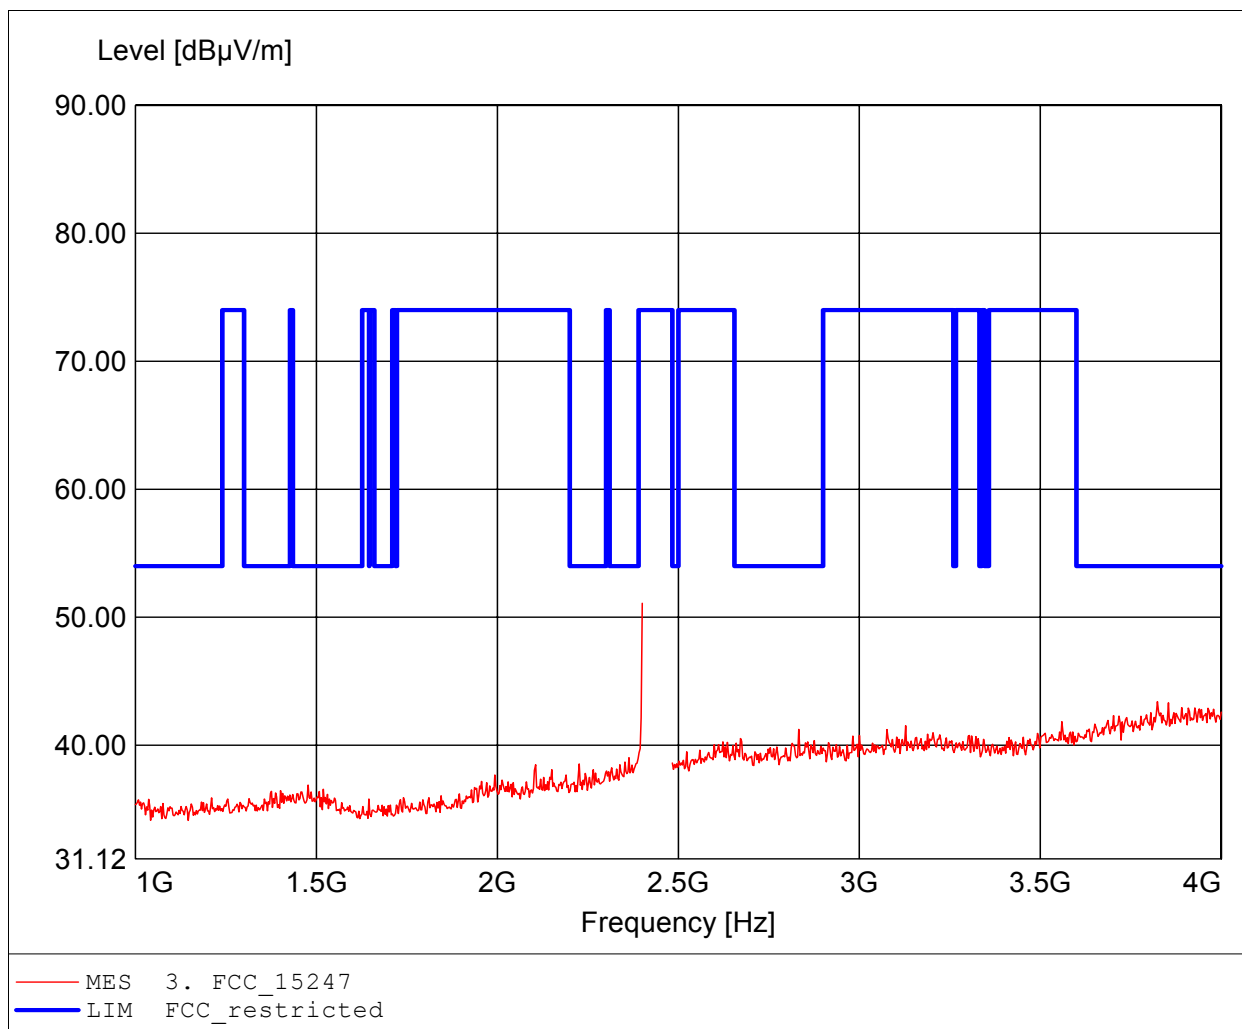

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2441 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 50.72dBuV/m, RBW: 1MHz

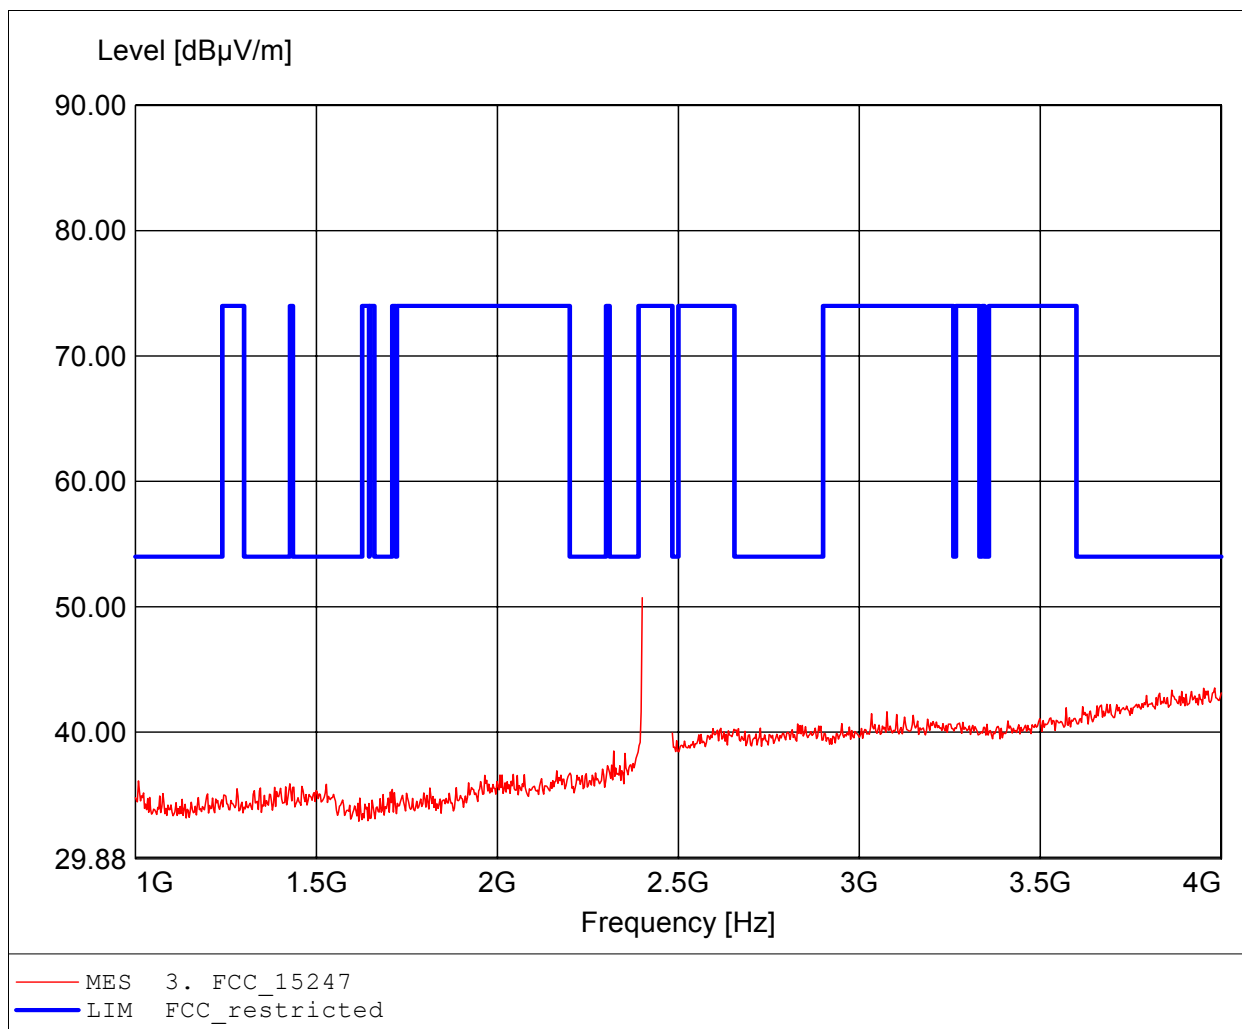

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2480 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 50.40dBµV/m, RBW: 1MHz

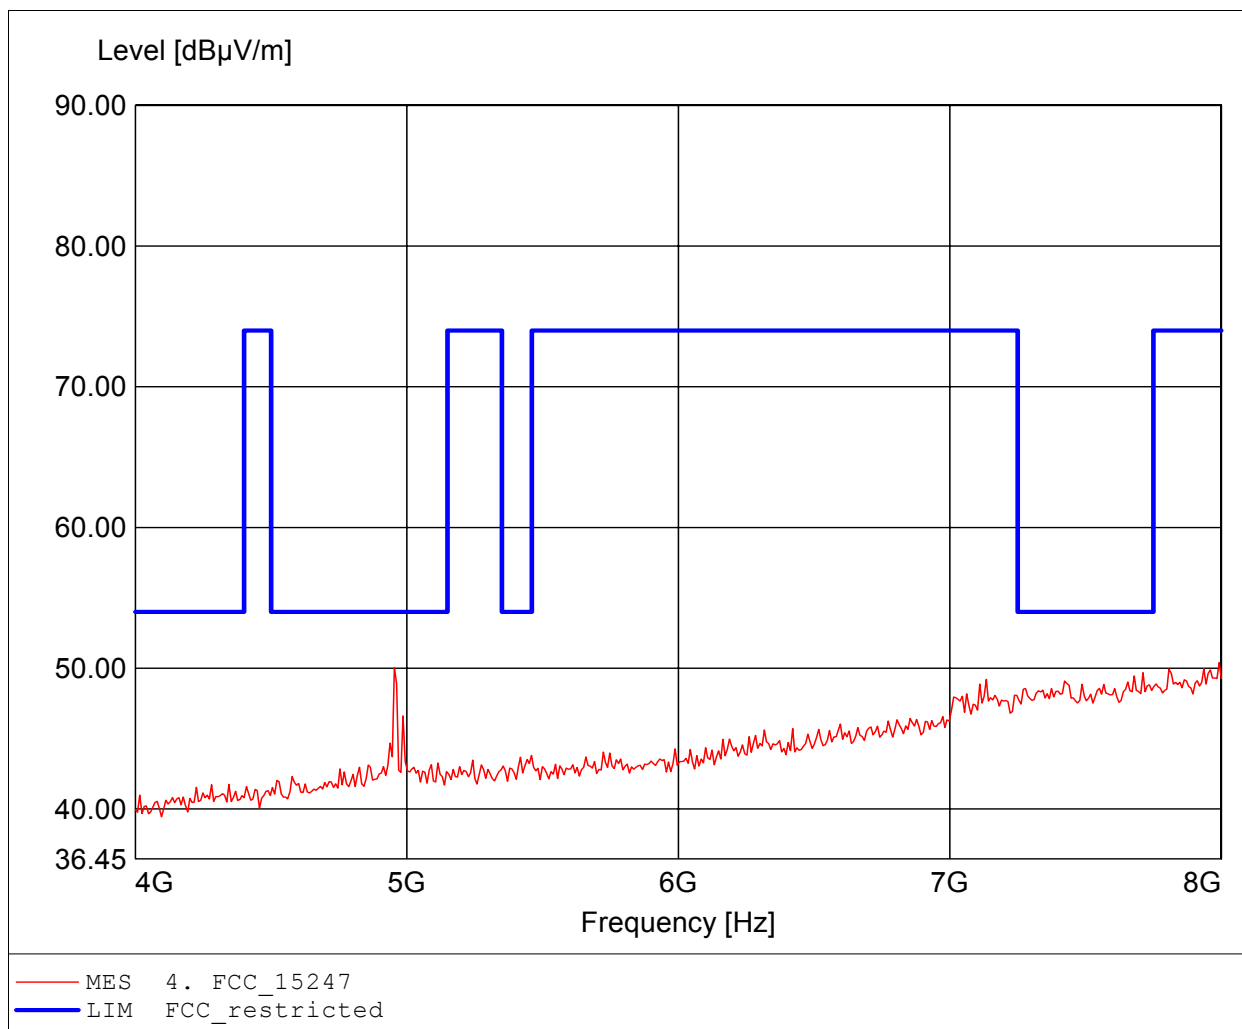

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2480 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.954GHz, Emax: 53.61dBuV/m, RBW: 1MHz

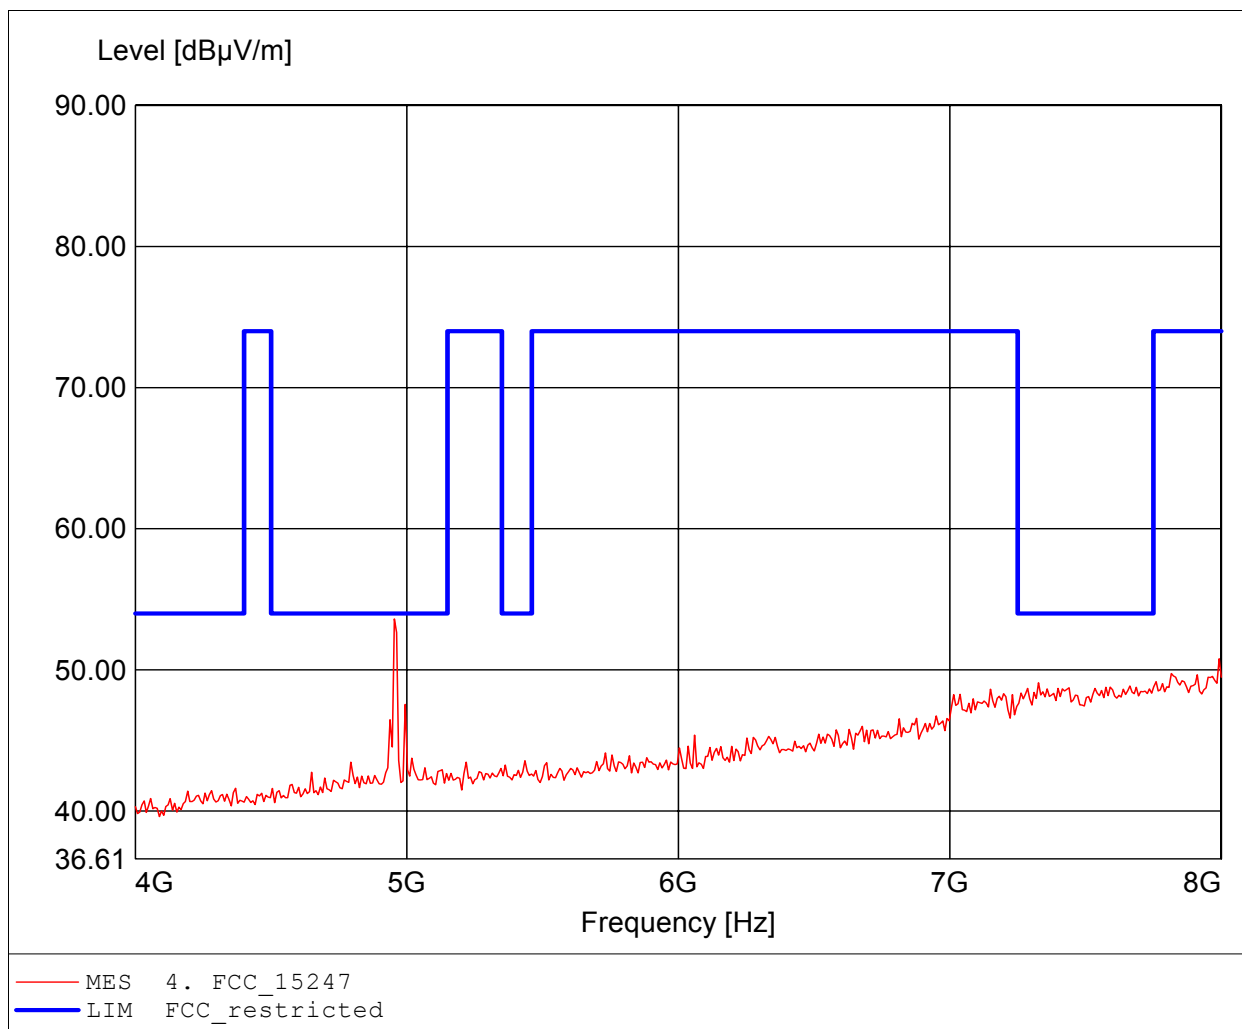

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2480 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 4.960GHz, Emax: 45.77dBuV/m, RBW: 1MHz

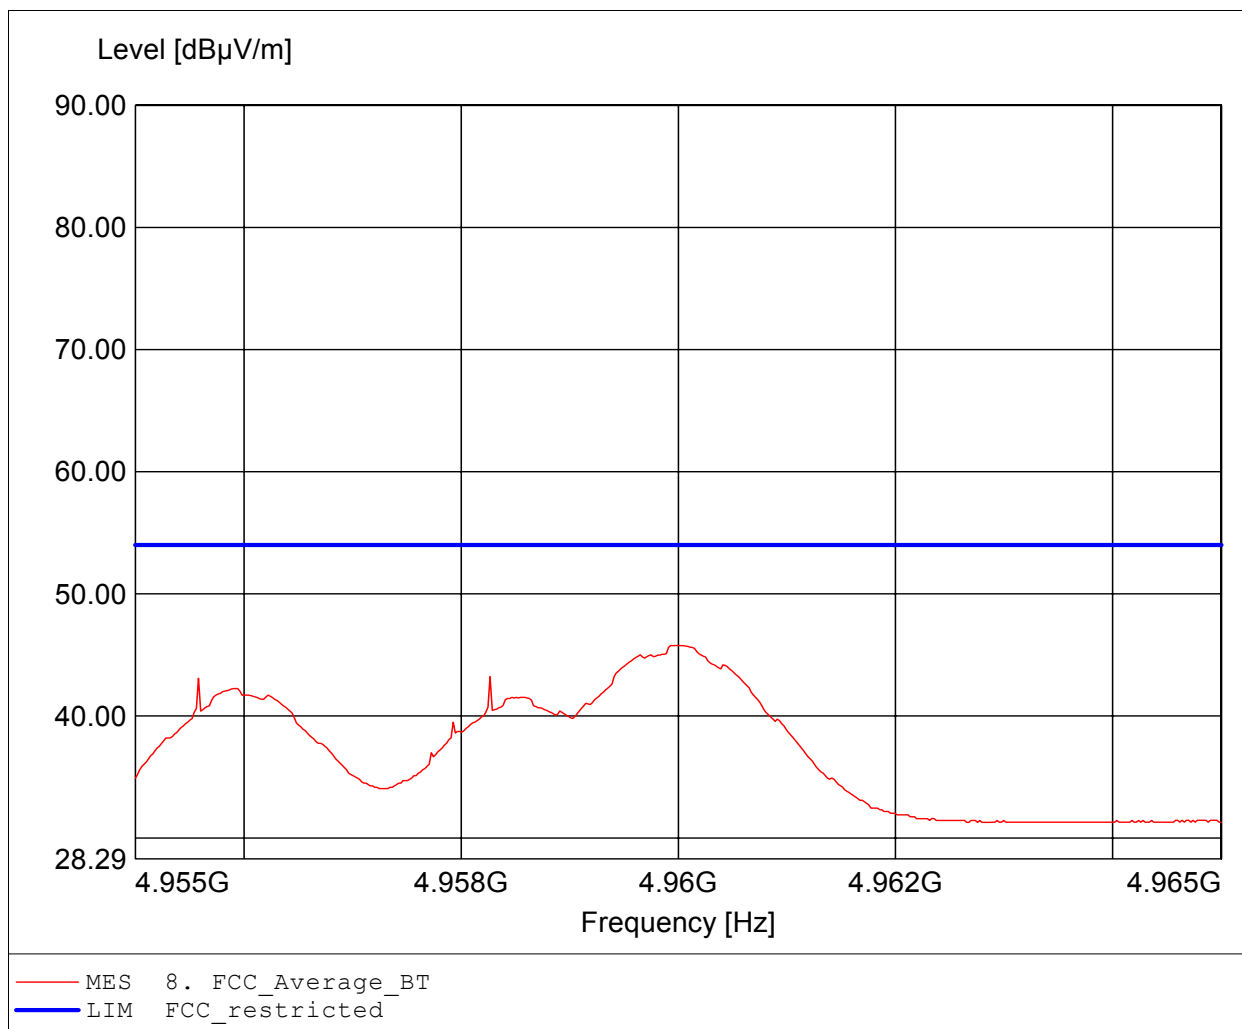

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 50.56dBµV/m, RBW: 1MHz

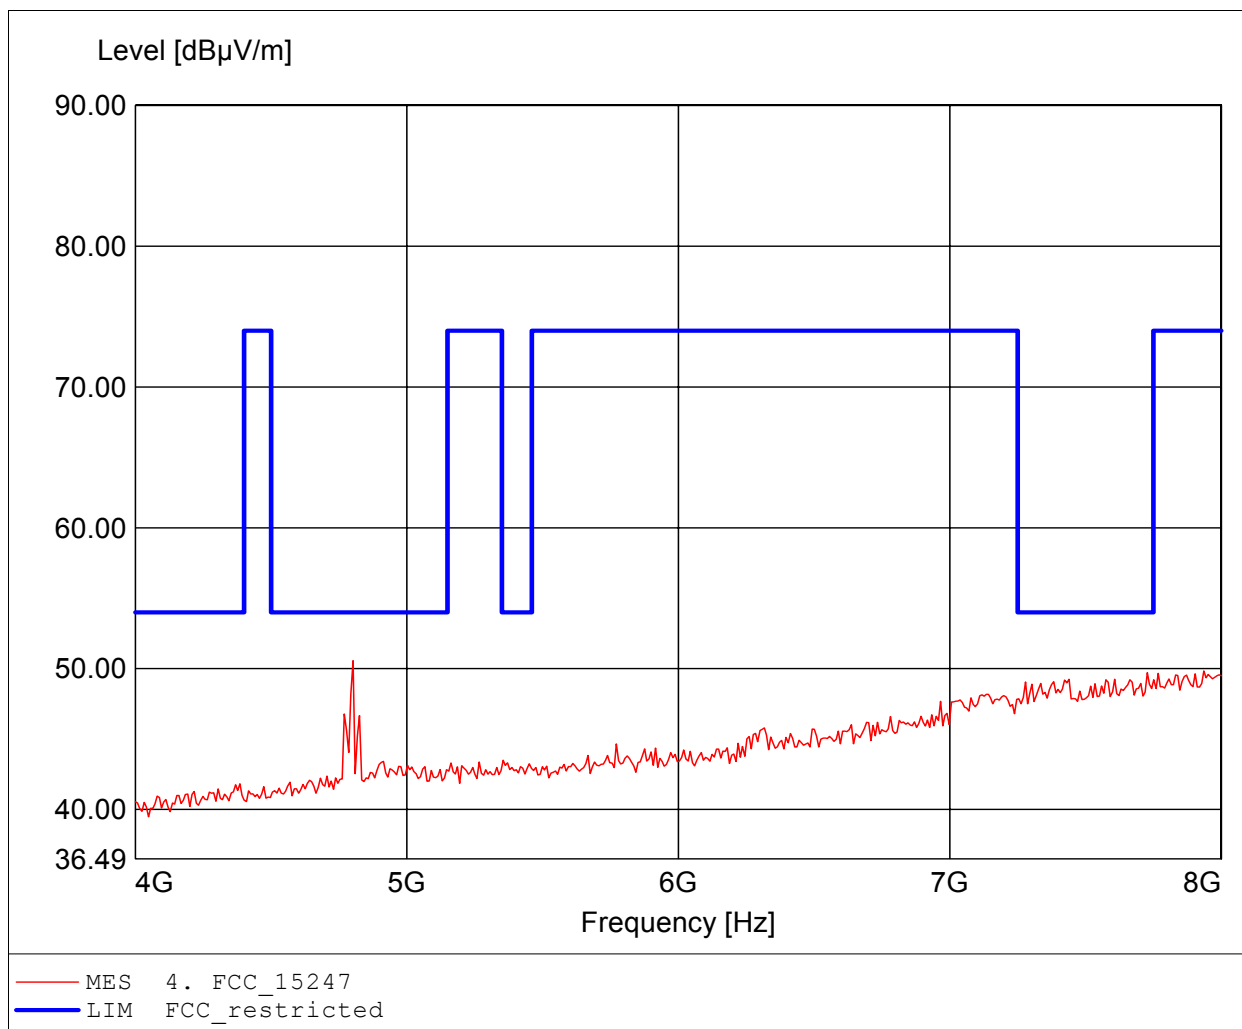

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 53.73dBuV/m, RBW: 1MHz

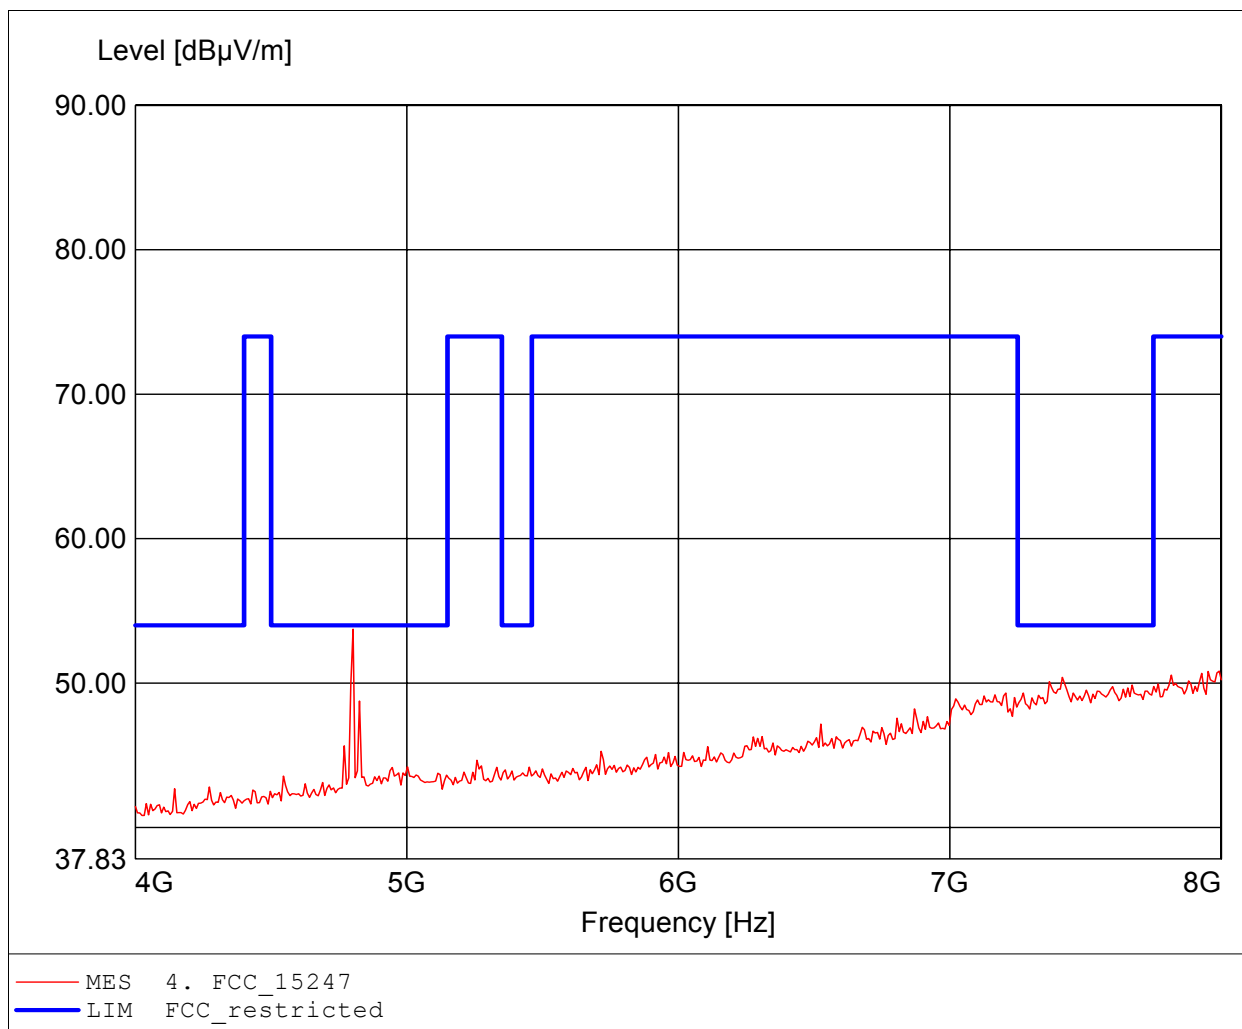

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.804GHz, Emax: 46.79dBuV/m, RBW: 1MHz

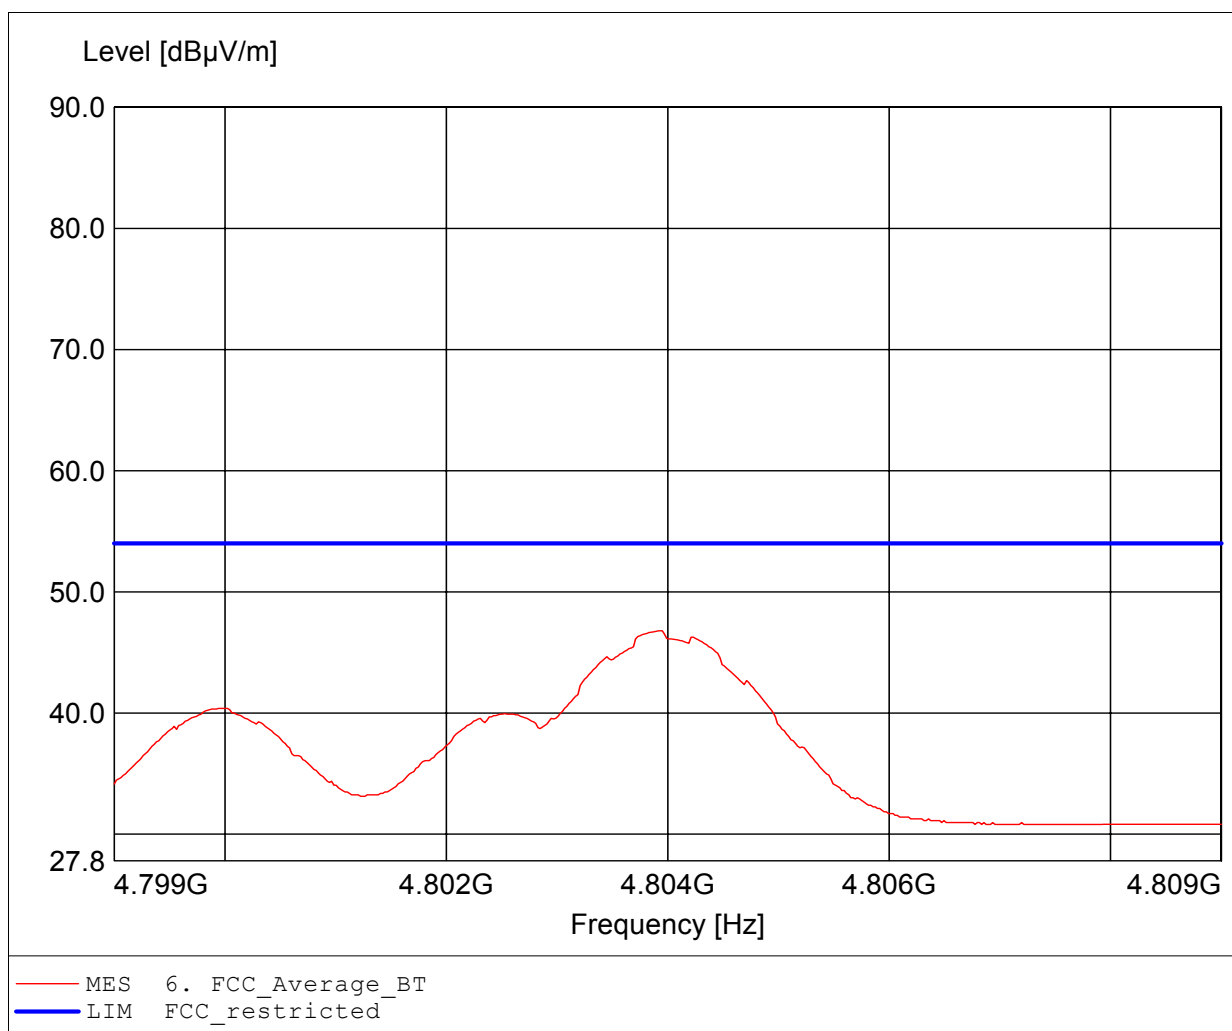

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2441 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 50.26dBµV/m, RBW: 1MHz

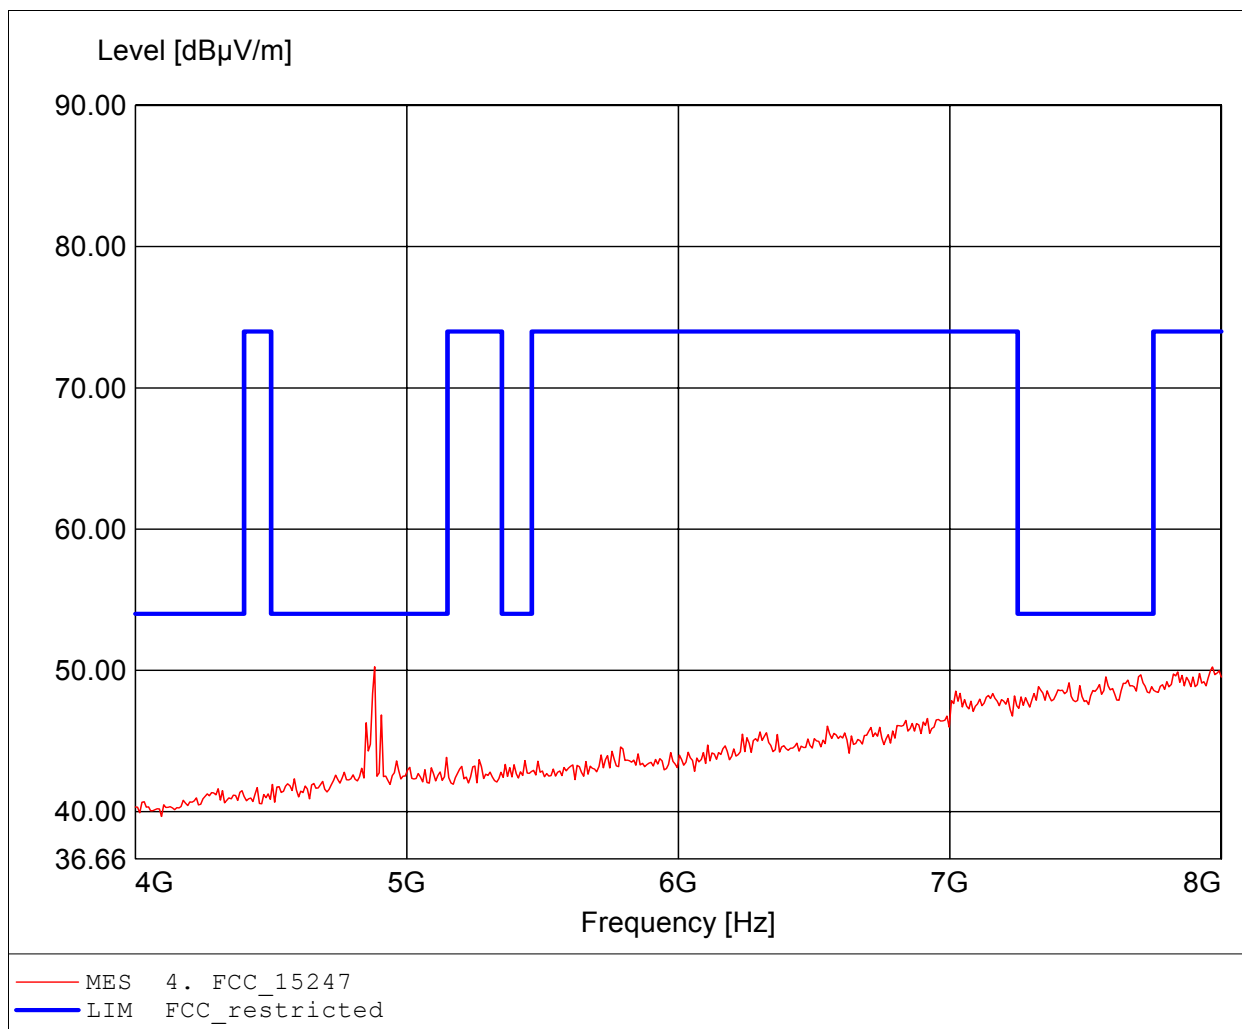

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2441 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 53.55dBuV/m, RBW: 1MHz

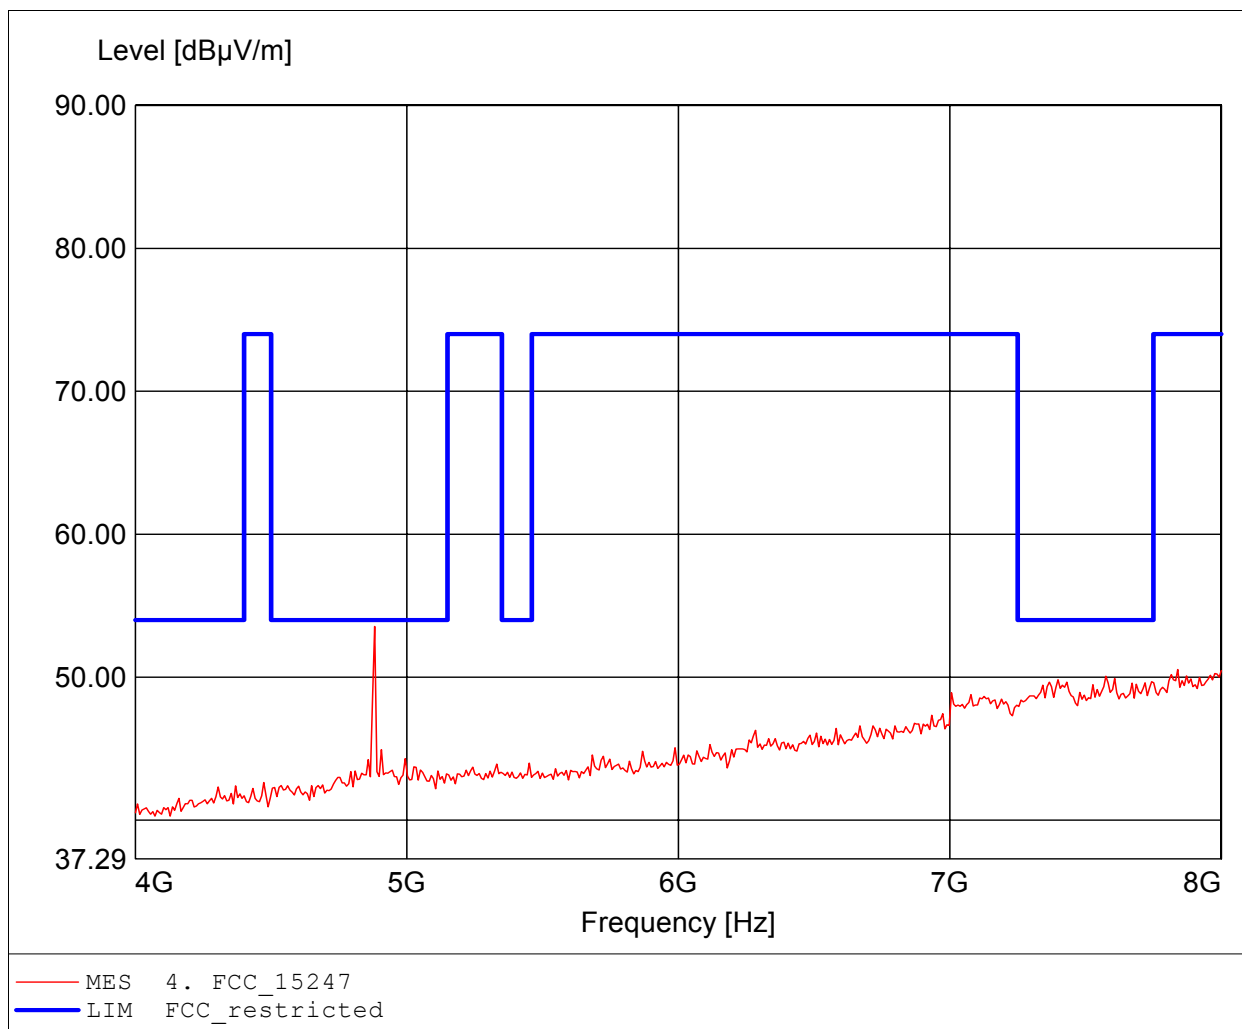

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth basic, 2441 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 4.882GHz, Emax: 45.79dBuV/m, RBW: 1MHz

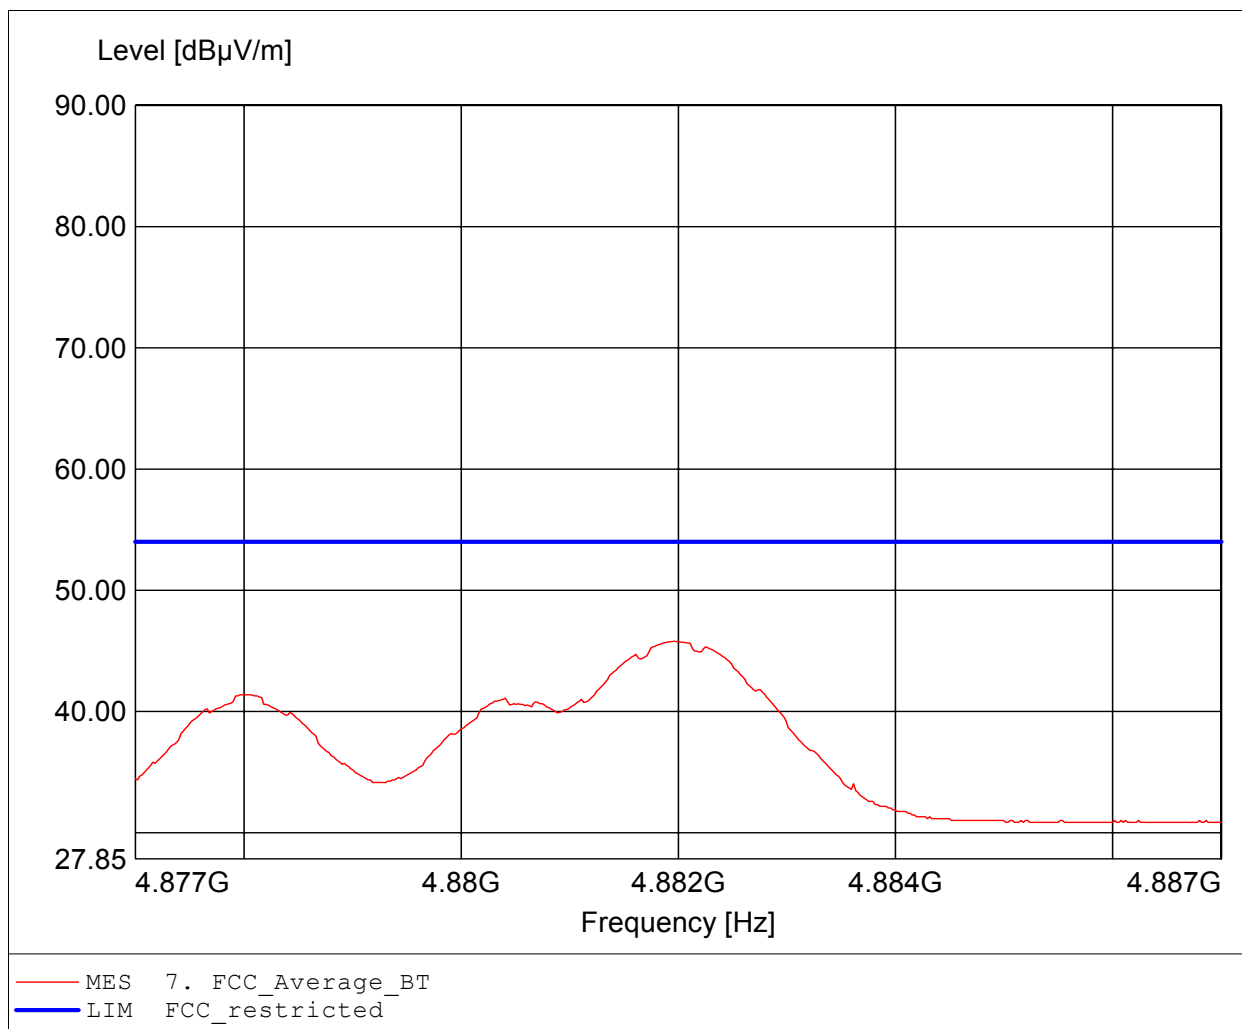

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth EDR, 2480 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.976GHz, Emax: 49.99dBuV/m, RBW: 1MHz

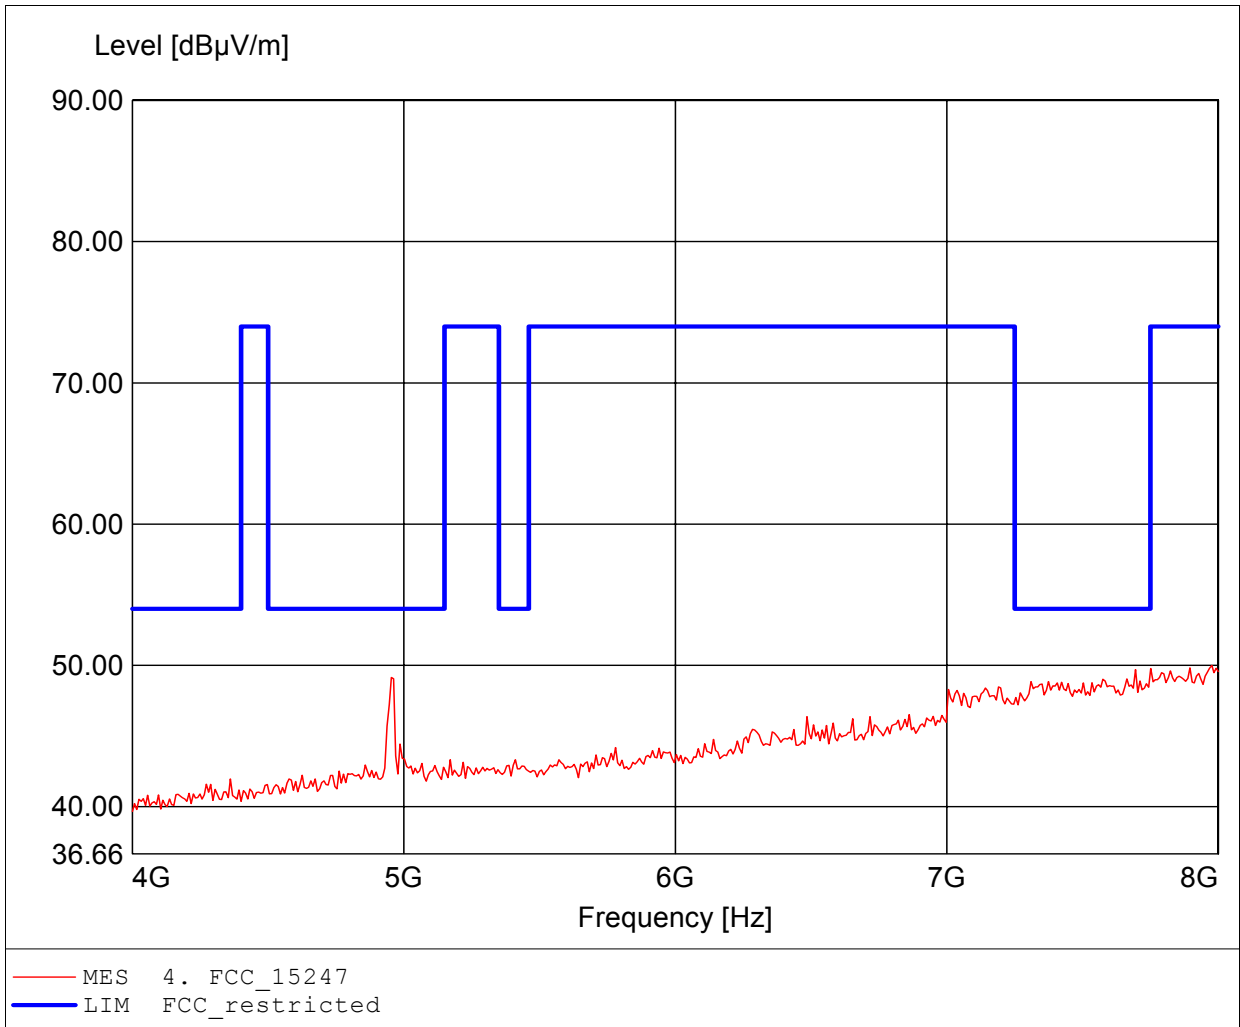

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth EDR, 2480 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.816GHz, Emax: 50.85dBuV/m, RBW: 1MHz

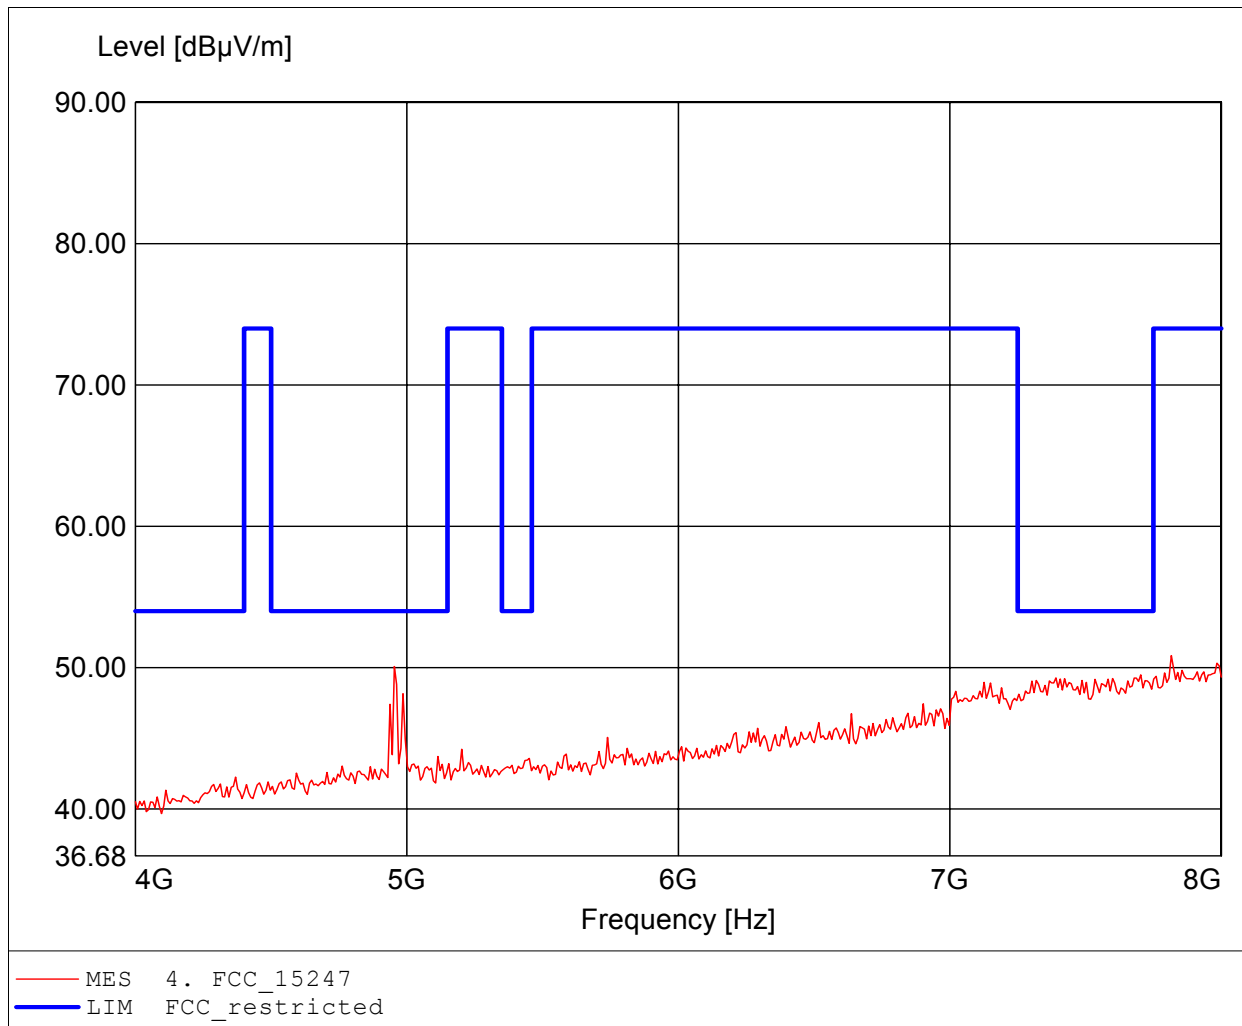

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth EDR, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 50.82dBuV/m, RBW: 1MHz

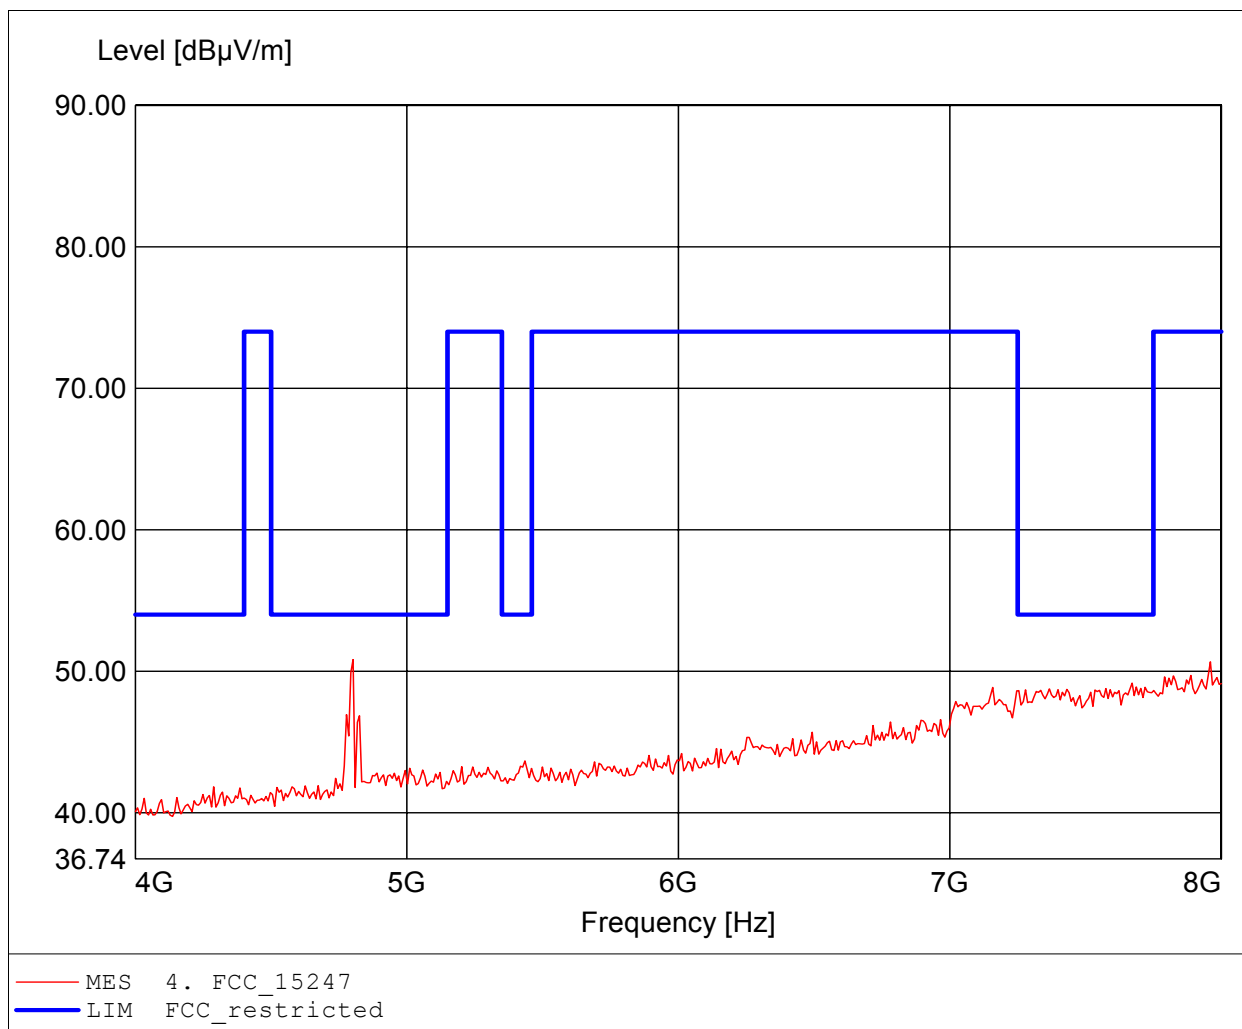

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth EDR, 2402 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 50.42dBuV/m, RBW: 1MHz

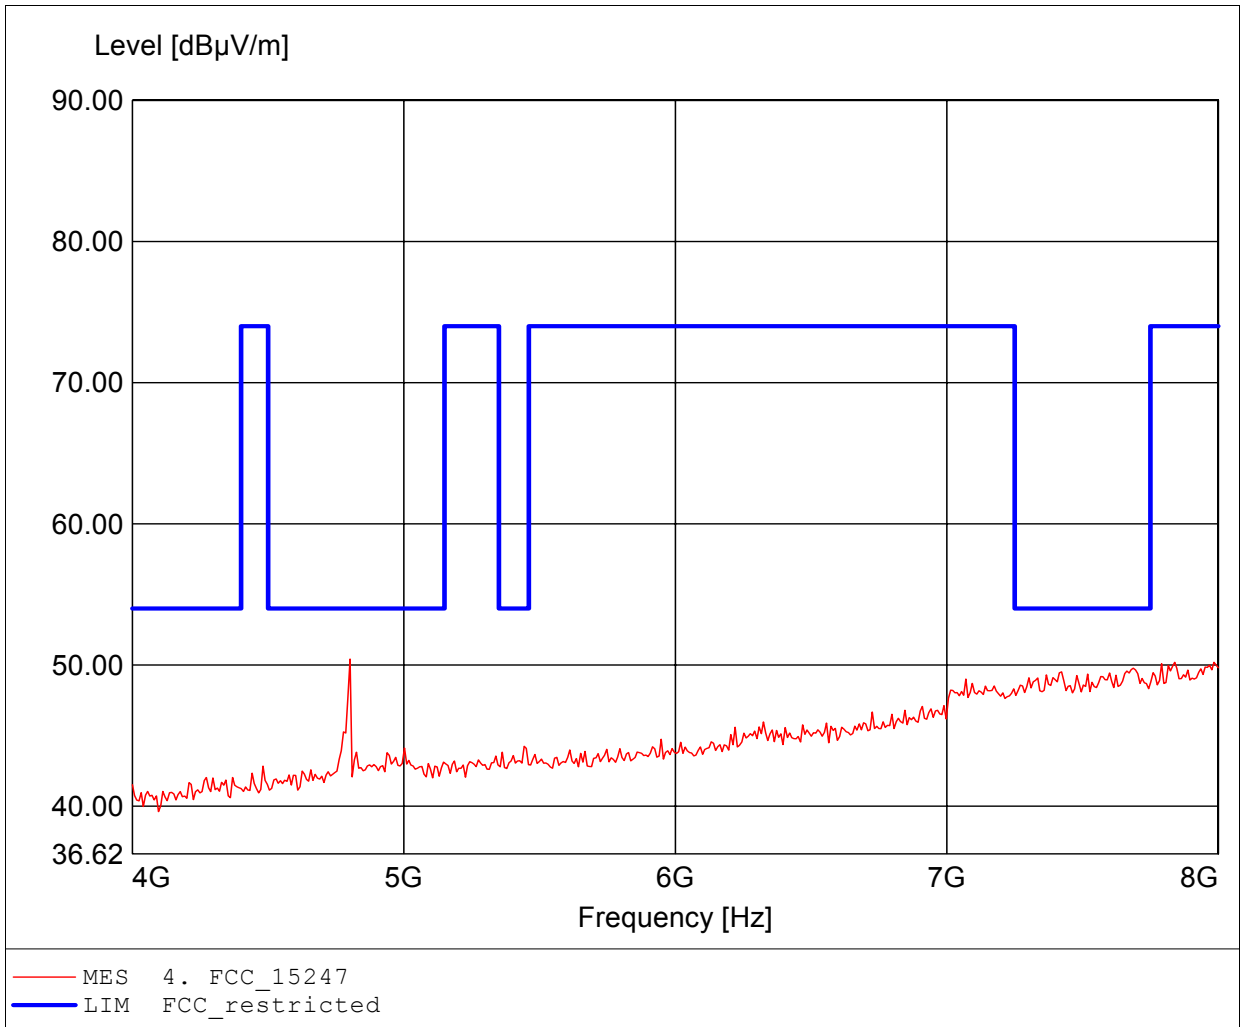

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth EDR, 2441 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.583GHz, Emax: 50.30dBµV/m, RBW: 1MHz

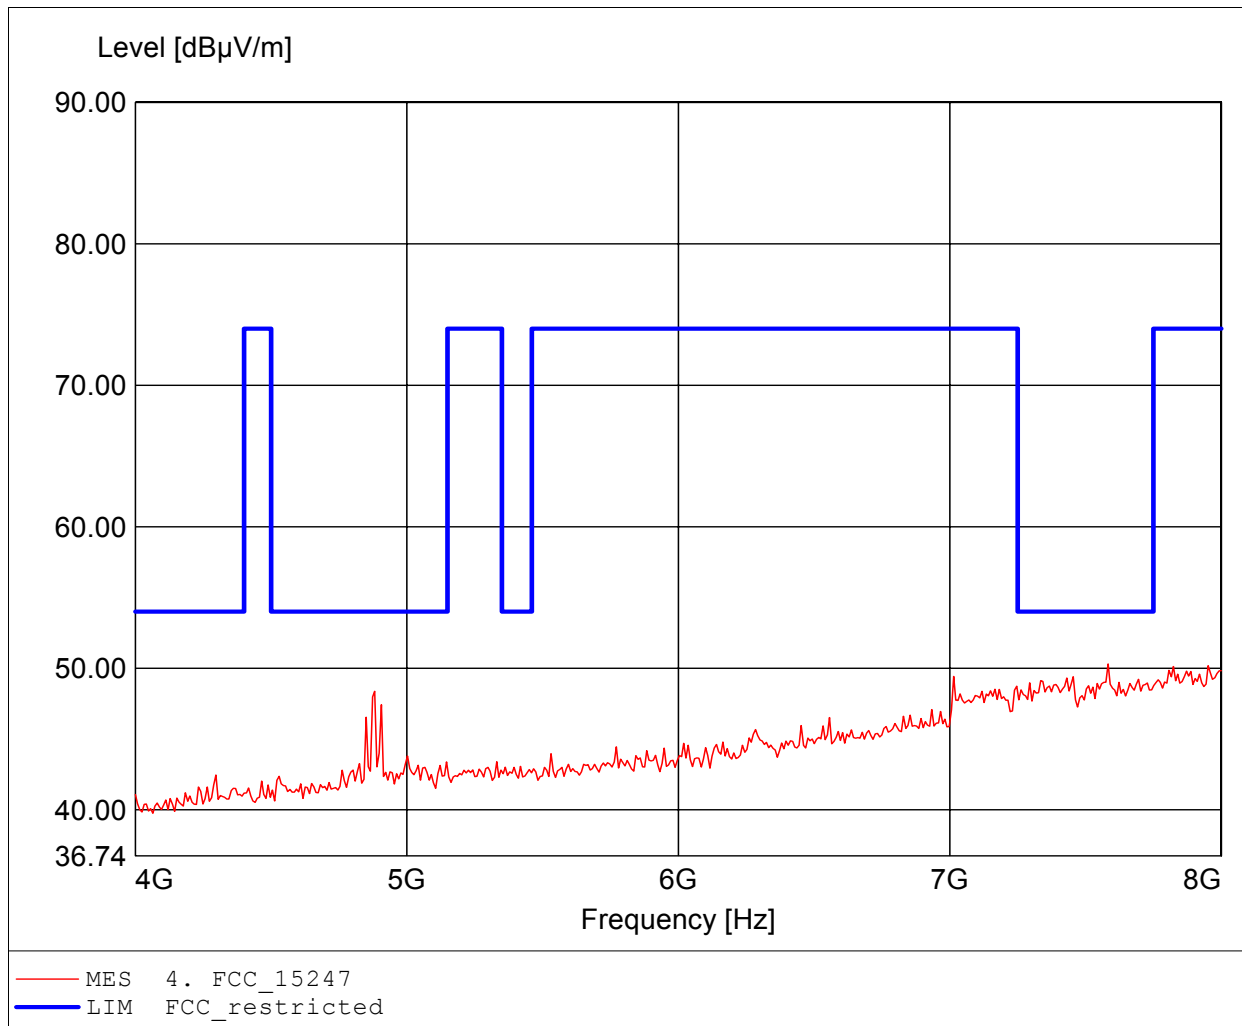

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: lesswire AG / Ord.: G0M21008-3605
EUT: Component
Model: WiBear-E / setup: Bluetooth EDR, 2441 MHz
Test Site / Operator: Eurofins Product Service GmbH / Mr. Treffke
Test Condition: Temp.: 24°C / Unom.: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 51.19dBµV/m, RBW: 1MHz

