



Inter**Lab**<sup>®</sup>

FCC Measurement/Technical Report on

WLAN transceiver

WiBear11n- DF1

FCC ID PV7-WIBEAR11N-DF1

IC: 7738A-WB11NDF1

**Report Reference:** MDE\_LESSW\_1302\_FCCb

**Test Laboratory:**

Borsigstrasse 11  
Germany  
7Layers AG  
40880 Ratingen



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H.-J. Meckelburg  
Dr. H. Ansorge

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385



## Table of Contents

<b>0</b>	<b>Applied Standards and Test Summary</b>	<b>3</b>
0.1	Applied Standards	3
0.2	FCC-IC Correlation Table	4
0.3	Measurement Summary / Signatures	5
<b>1</b>	<b>Administrative Data</b>	<b>11</b>
1.1	Testing Laboratory	11
1.2	Project Data	11
1.3	Applicant Data	11
1.4	Manufacturer Data	11
<b>2</b>	<b>Test object Data</b>	<b>12</b>
2.1	General EUT Description	12
2.2	EUT Main components	13
2.3	Ancillary Equipment	13
2.4	Auxiliary Equipment	14
2.5	EUT Setups	14
2.6	Operating Modes	15
2.7	Special software used for testing	15
2.8	Product labelling	15
<b>3</b>	<b>Test Results</b>	<b>16</b>
3.1	Conducted emissions (AC power line)	16
3.2	Emission bandwidth (26 dB / 99 %)	19
3.3	Maximum conducted output power	22
3.4	Peak Power Spectral Density	25
3.5	Peak Excursion	28
3.6	Frequency Stability	31
3.7	Undesirable Emissions / General Field Strength Limits; Restricted Band and Radiated Emission Limits, Band Edge	32
<b>4</b>	<b>Test Equipment</b>	<b>38</b>
<b>5</b>	<b>Photo Report</b>	<b>47</b>
<b>6</b>	<b>Setup Drawings</b>	<b>47</b>



## **0 Applied Standards and Test Summary**

### **0.1 Applied Standards**

#### **Type of Authorization**

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-13 Edition) and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

#### **Note:**

The tests were selected and performed with reference to the FCC Public Notice "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General U-NII Test Procedures v01r03, 2013-4-08"

Instead of applying ANSI C63.4–1992 which is referenced in the FCC Public Note, the newer ANSI C63.4–2009 is applied.

#### **Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.**



## 0.2 FCC-IC Correlation Table

### Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment

#### UNII equipment +)

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Occupied bandwidth	§ 15.403 (i) (26 dB)	RSS-210 Issue 8: A9.2, 9.4 (99%)
Peak conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-210 Issue 8: A9.2, 9.4
Peak power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-210 Issue 8: A9.2, 9.4
Peak excursion	§ 15.407 (a) (6)	N/A
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	15.407 (b) § 15.209 (a)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A9.2, 9.4
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 3: 7.2.6, 4.7
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-210 Issue 8: A9.2, 9.4
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2
Receiver spurious emissions	-	RSS-210 Issue 8: 2.3; RSS Gen Issue 3: 6 *)

\*) Receivers which are part of Transceivers are exempted with respect to Notice 2012-DRS0126.

+) Devices operating in the band 5725-5825 MHz may also be tested as DTS equipment, FCC §15.247 / Digital Modulation Systems IC RSS-210, Annex 8, where operation up to 5850 MHz is permitted.



### 0.3 Measurement Summary / Signatures

<b>FCC Part 15, Subpart C</b>		<b>§ 15.207</b>	
Conducted emissions (AC power line)			
The measurement was performed according to ANSI C63.4			
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 4	Setup_a01	AC Port (power line)	passed

<b>FCC Part 15, Subpart E</b>		<b>§ 15.403 (i)</b>	
26dB Emission bandwidth			
The measurement was performed according to FCC § 15.31			
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
a-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	-
a-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 38, 40 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 46, 40 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 54, 40 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 62, 40 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 102, 40 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 110, 40 MHz	Setup_b01	Temp.ant.connector	-
n-Mode, CH 134, 40 MHz	Setup_b01	Temp.ant.connector	-

**FCC Part 15, Subpart E****§ 15.407 (a)(1,2,3,4)**

Maximum Conducted Output Power

The measurement was performed according to FCC § 15.31

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
a-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 38, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 46, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 54, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 62, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 102, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 110, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 134, 40 MHz	Setup_b01	Temp.ant.connector	Passed

**FCC Part 15, Subpart E****§ 15.407 (a)(1,2,3,5)**

Peak Power Spectral Density

The measurement was performed according to FCC § 15.31

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
a-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 38, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 46, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 54, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 62, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 102, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 110, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 134, 40 MHz	Setup_b01	Temp.ant.connector	Passed



**FCC Part 15, Subpart E**

**§ 15.407 (a)(6)**

Peak Excursion

The measurement was performed according to FCC § 15.31

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
a-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	Passed
a-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 36, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 44, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 48, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 52, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 56, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 64, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 100, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 116, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 140, 20 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 38, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 46, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 54, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 62, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 102, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 110, 40 MHz	Setup_b01	Temp.ant.connector	Passed
n-Mode, CH 134, 40 MHz	Setup_b01	Temp.ant.connector	Passed

**FCC Part 15, Subpart E**

**§ 15.407 (g)**

Frequency Stability

The measurement was performed according to FCC § 15.31

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
n-Mode, CH 52, 20 MHz*	Setup_b01	Temp.ant.connector	-

\* test was performed with CW signal on channel 52, 5260 MHz





**FCC Part 15, Subpart E**

**§ 15.407 (b)(1,2,3,4)**

Undesirable Emissions

The measurement was performed according to ANSI C63.4

<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
a-Mode, CH 36, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 44, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 48, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 52, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 56, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 64, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 100, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 116, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 140, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 36, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 44, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 48, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 52, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 56, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 64, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 100, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 116, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 140, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 38, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 46, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 54, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 62, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 102, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 110, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 134, 40 MHz	Setup_b01	Enclosure	Passed

**FCC Part 15, Subpart C & E**

**§ 15.205, § 15.209  
§ 15.407 (b)(5,6)**

General Field Strength Limits; Restricted Bands and Radiated Emission Limits

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
a-Mode, CH 36, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 44, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 48, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 52, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 56, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 64, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 100, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 116, 20 MHz	Setup_b01	Enclosure	Passed
a-Mode, CH 140, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 36, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 44, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 48, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 52, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 56, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 64, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 100, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 116, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 140, 20 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 38, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 46, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 54, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 62, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 102, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 110, 40 MHz	Setup_b01	Enclosure	Passed
n-Mode, CH 134, 40 MHz	Setup_b01	Enclosure	Passed

**FCC Part 15, Subpart E**

**§ 15.407 (h)**

Dynamic Frequency selection


The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
-	-	-	Not performed

Responsible for Accreditation Scope:



Responsible for Test Report:

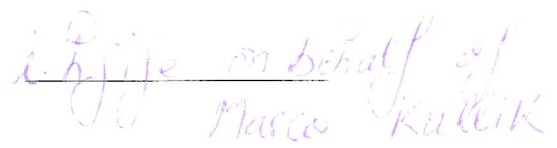



## 1 Administrative Data

### 1.1 Testing Laboratory

Company Name: 7Layers AG  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:  
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Robert Machulec  
Dipl.-Ing. Thomas Hoell  
Dipl.-Ing. Andreas Petz  
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-03-13

### 1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Marco Kullik  
Date of Test(s): 2013-12-09 to 2014-02-26  
Date of Report: 2014-03-14

### 1.3 Applicant Data

Company Name: Lesswire AG  
Address: Rudower Chaussee 30  
12489 Berlin  
Germany  
Contact Person: Mr. Dr. Daniel Dietterle

### 1.4 Manufacturer Data

Company Name: PRETTL Electronics AG  
Address: Robert-Bosch-Straße 10,  
01454 Radeberg, Germany  
Contact Person: Kerstin Sauer



## 2 Test object Data

### 2.1 General EUT Description

<b>Equipment under Test:</b>	IEEE 802.11a/b/g/n WLAN transceiver
<b>Type Designation:</b>	WiBear11n
<b>Kind of Device:</b>	Transceiver module
<b>(optional)</b>	
<b>Voltage Type:</b>	DC
<b>Voltage Level:</b>	1.8 V and 3.3 V
<b>Tested Modulation Type:</b>	DBPSK; OFDM:BPSK; OFDM:64-QAM

#### General product description:

The EUT is industrial universal module, targeted for integration into different Original Equipment Manufacturer products. The module is designed for both - simultaneous and independent operation of the following:

IEEE 802.11a/b/g/n payload data rates for Wireless Local Area Network (WLAN), Bluetooth 3.0+High Speed (HS) and Bluetooth 2.1+EDR. It provides a complete end-to-end solution for low power applications. It includes an integrated MAC/Baseband processor and RF front-end components, and can connect to a host processor via SDIO interface.

#### Specific product description for the EUT:

The EUT is a dual band WLAN (802.11 a/b/g/n, 2.5 and 5 GHz) and Bluetooth module with one joint antenna connector for WLAN and Bluetooth. In IEEE 802.11n mode it supports 20 MHz and 40 MHz bandwidth channels (both with MCS7), providing 72.2 Mbit/s, and 150 Mbit/s transfer data rates respectively.

The object of this test report is the WLAN transceiver, consequently switched on the IEEE 802.11 a/n modes, working in the 5 GHz bands. In IEEE 802.11n mode, it was tested with 20 MHz and 40 MHz channel bandwidth.

#### The EUT provides the following ports:

##### Ports

- Enclosure
- Antenna connector
- DC port
- Data port

**The main components of the EUT are listed and described in chapter 2.2**



## 2.2 EUT Main components

### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: LS000a01)	WLAN transceiver	WiBear11n- DF1	AN00J93172 C43380045 499	C4	14.44.35.p200
Remark: mounted on evaluation board (AUX4), the EUT has no integral antenna.					
EUT B (Code: LS000b01)	WLAN transceiver	WiBear11n- DF1	AN00J93172 C43380045 500	C4	14.44.35.p200
Remark: mounted on evaluation board (AUX5), the EUT has no integral antenna.					
EUT C (Code: LS000s01)	WLAN transceiver	WiBear11n- DF1	AN00J93172 C43380045 520	C4	14.44.35.p200
Remark: mounted on evaluation board (AUX6), the EUT has no integral antenna.					
EUT D (Code: LS000x01)	WLAN transceiver	WiBear11n- DF1	AN00J93172 C43380045 559	C4	14.44.35.p200
Remark: mounted on evaluation board (AUX7), the EUT has no integral antenna.					

NOTE: The short description is used to simplify the identification of the EUT in this test report.

## 2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.
-	-	-	-	-	-

## 2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status
AUX1	Laptop Acer TravelMate 5720	Model: 2205	LXTK20603274 4008D6A2000	-	WinXP Prof.EN
AUX2	AC/DC Adapter for AUX1 Acer/LITEON	Model PA-1900-24	870923010AR	Rev A06	-
AUX3	cable & adapter board & SDIO connector to the host PC	Lesswire AG HOST SDIO	SDIO 1	-	-
AUX4	evaluation board with antenna connector and antenna disabled.	EB1 & Antenova A10194 dual-band WLAN/BT antenna	#20	-	-
AUX5	evaluation board with antenna (gain = 4.1 dBi) enabled and antenna connector (open).	EB1 & Antenova A10194 dual-band WLAN/BT antenna	#7	-	-
AUX6	evaluation board with antenna (gain = 4.1 dBi) enabled and antenna connector (open).	EB1 & Antenova A10194 dual-band WLAN/BT antenna	#19	-	-
AUX7	evaluation board with antenna connector and antenna disabled.	EB1 & Antenova A10194 dual-band WLAN/BT antenna	#8	-	-
AUX8	DC Power Supply	Philips PE 1540	WB2045	-	-

## 2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_01	EUT A + AUX1 to AUX3 + AUX4	setup for the conducted tests
Setup_02	EUT B + AUX1 to AUX3 + AUX5	setup for radiated measurements
Setup_03	EUT C + AUX1 to AUX3 + AUX6	setup for radiated measurements
Setup_04	EUT D + AUX1 to AUX3 + AUX7	setup for the conducted tests
Setup_05	EUT C + AUX1 to AUX3 + AUX6 + AUX8	Setup for the test "Conducted Emissions"



## 2.6 Operating Modes

### 2.6.1 Test Channels

UNII-Subband 1 5150 - 5250 MHz			UNII-Subband 2A 5250 - 5350 MHz			UNII-Subband 2C 5470 - 5725 MHz			UNII-Subband 3 5725 - 5825 MHz		
<b>20 MHz Test Channels (Channel No./Frequency [MHz]):</b>											
Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top
36	44	48	52	56	64	100	116	140	-	-	-
5180	5220	5240	5260	5280	5320	5500	5580	5700	-	-	-
<b>40 MHz Test Channels (Channel No./Frequency [MHz]):</b>											
Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top
38	-	46	54	-	62	102	110	134	-	-	-
5190	-	5230	5270	-	5310	5510	5550	5670	-	-	-

COMMENT: Subband 3 not tested!

### 2.6.2 Datarates

WLAN a-Mode; Channel Bandwidth: 20 MHz ; Data rate: 6 Mbit/s
WLAN n-Mode; Channel Bandwidth: 20 MHz ; Data rate: 72.2 Mbit/s
WLAN n-Mode; Channel Bandwidth: 40 MHz ; Data rate: 150 Mbit/s

## 2.7 Special software used for testing

Marvell Labtool 8787 software is used to set the EUT into the different operating modes.

## 2.8 Product labelling

### 2.8.1 FCC ID label

Please refer to the documentation of the applicant.

### 2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



## 3 Test Results

### 3.1 Conducted emissions (AC power line)

**Standard** FCC Part 15 Subpart C

**The test was performed according to:** ANSI C 63.4

#### 3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

##### Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

##### Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.





### 3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dBµV)	AV Limit (dBµV)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor:  $\text{Limit (dB}\mu\text{V)} = 20 \log (\text{Limit } (\mu\text{V})/1\mu\text{V})$ .

### 3.1.3 Test Protocol


Temperature: 23 °C  
 Air Pressure: 1013 hPa  
 Humidity: 37 %

Op. Mode	Setup	Port
Mode 5580 MHz, CH:116, a-mode, 6Mbps	Setup_05	DC Port

Power line	Frequency MHz	Measured value dBµV	Margin dBµV	Remarks
-	-	-	-	-

Remark: No final measurement was performed because no frequencies (peaks) were found within the offset for acceptance analysis during the preliminary scan. Please see annex for the measurement plot.

### 3.1.4 Measurement Plot (showing the highest value, "worst case")

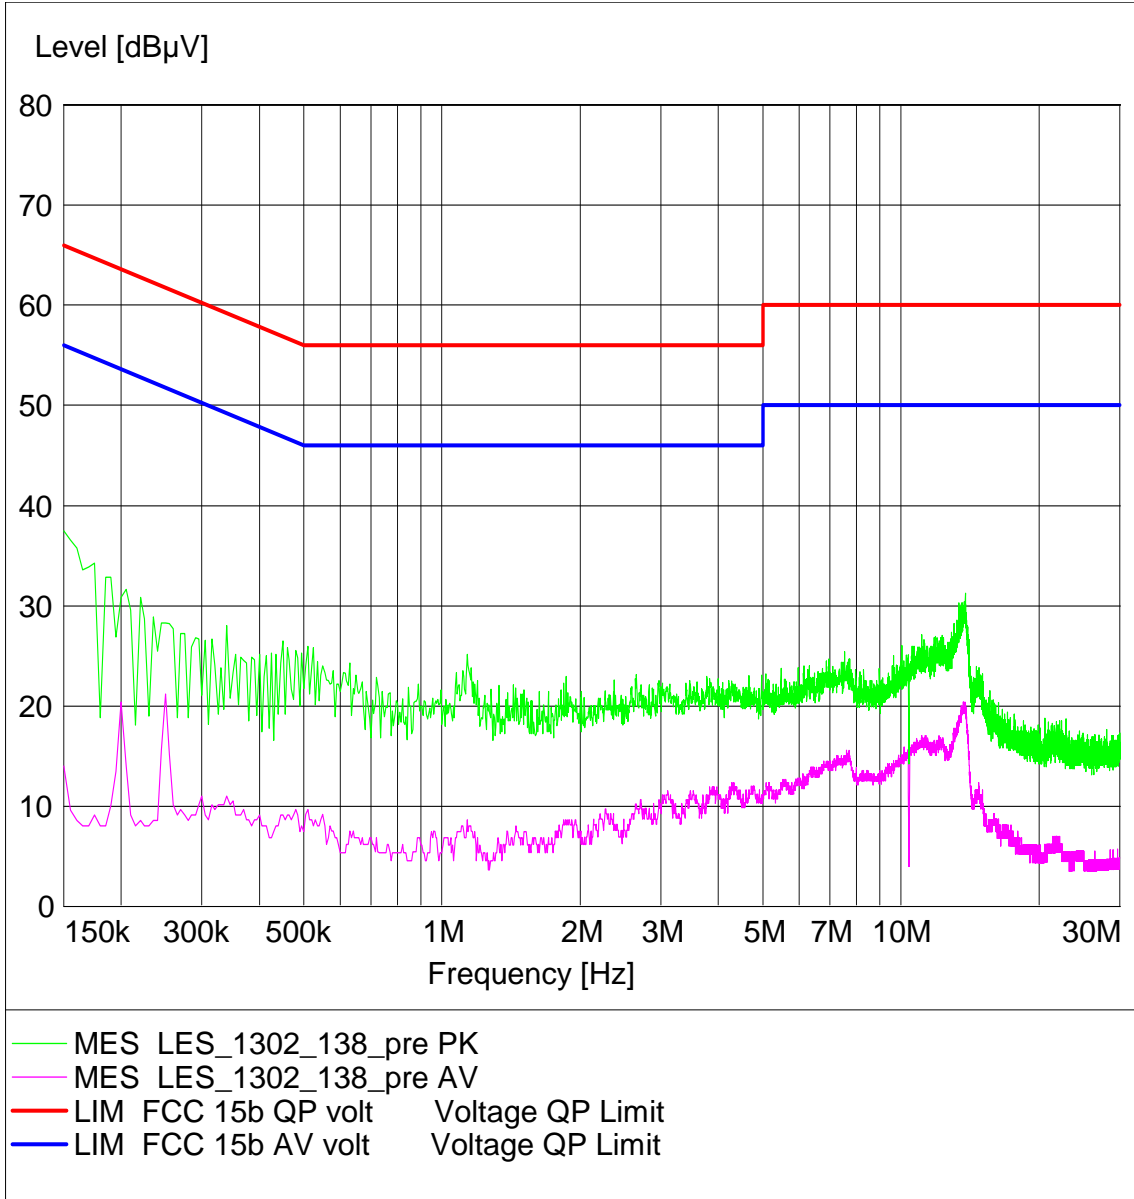



## **3.2 Emission bandwidth (26 dB / 99 %)**

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

### **3.2.1 Test Description**

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth (26 dB and 99%).

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 200 kHz (appr. 1 % of emission bandwidth)
- Video Bandwidth (VBW): 300 kHz
- Detector: Peak
- Trace: Maxhold
- Sweeps: > 200
- Sweeptime: coupled

### **3.2.2 Test Requirements / Limits**

FCC Part 15, Subpart E, §15.403 (i)

There exists no applicable limits. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.



### 3.2.3 Test Protocol

Ambient temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 40 %


<b>WLAN a-Mode; 20 MHz; 6 Mbit/s</b>			
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>26 dB Bandwidth [MHz]</b>
UNII-Subband 1	36	5180	19.808
	44	5220	19.808
	48	5240	19.808
UNII-Subband 2A	52	5260	19.808
	56	5280	19.872
	64	5320	19.872
UNII-Subband 2C	100	5500	19.872
	116	5580	19.872
	140	5700	19.872

<b>WLAN n-Mode; 20 MHz; 72.2 Mbit/s</b>			
UNII-Subband 1	36	5180	20.513
	44	5220	20.256
	48	5240	20.320
UNII-Subband 2A	52	5260	20.385
	56	5280	20.385
	64	5320	20.449
UNII-Subband 2C	100	5500	20.385
	116	5580	20.641
	140	5700	20.577

<b>WLAN n-Mode; 40 MHz; 150 Mbit/s</b>			
UNII-Subband 1	38	5180	40.224
	46	5180	40.064
UNII-Subband 2A	54	5180	40.224
	62	5180	40.144
UNII-Subband 2C	102	5510	40.464
	110	5550	40.304
	134	5670	40.385

NOTE: The 99% bandwidth test was not performed

### 3.2.4 Measurement Plot (showing the highest value, "worst case")

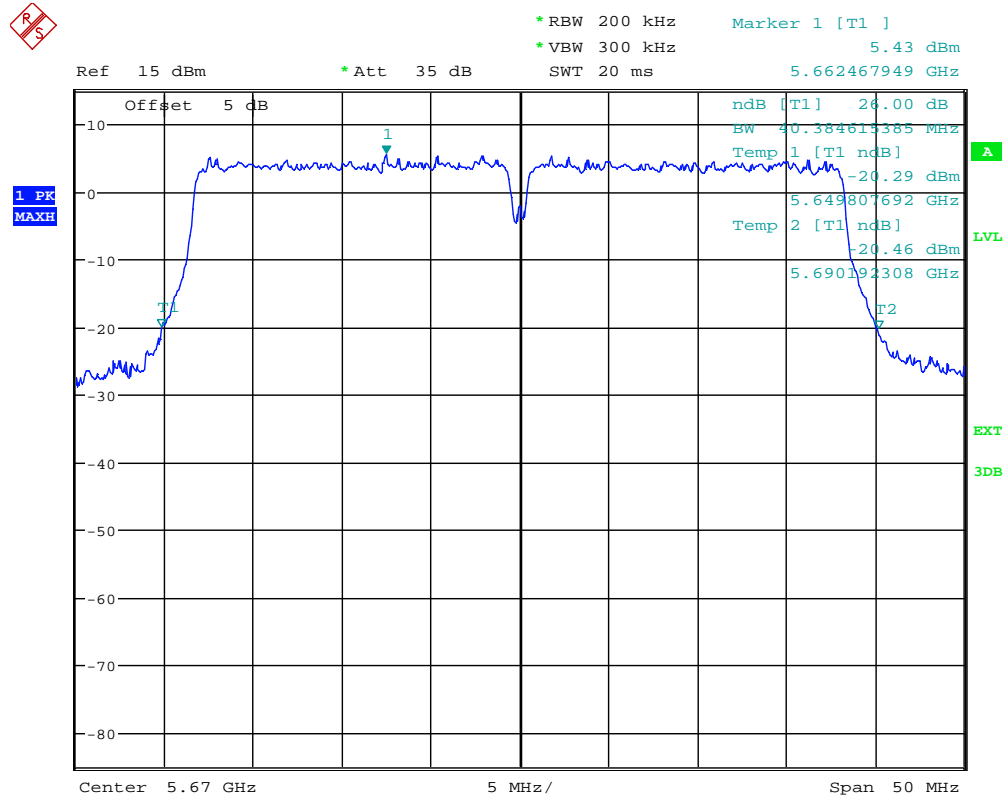

Date: 23.JAN.2014 10:46:04



### 3.3 Maximum conducted output power

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

#### 3.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: RMS
- Trace: Average
- Sweeps: 100
- Sweeptime: coupled

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08", method **SA-1**.

#### 3.3.2 Test Requirements / Limits

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

Limit: 50 mW (17 dBm) or 4 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 250 mW (24 dBm) or 11 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.825GHz bands:

Limit: 1 W (30 dBm) or 17 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

### 3.3.3 Test Protocol

Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 40 %

The antenna gain is excluded in the table.

Ambient temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 40 %


<b>WLAN a-Mode; 20 MHz; 6 Mbit/s</b>					
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>Output Power [dBm]</b>	<b>Limit [dBm]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	36	5180	12.4	17.0	4.6
	44	5220	13.1	17.0	3.9
	48	5240	12.9	17.0	4.1
UNII-Subband 2A	52	5260	13.0	24.0	11.0
	56	5280	13.0	24.0	11.0
	64	5320	12.7	24.0	11.3
UNII-Subband 2C	100	5500	12.7	24.0	11.3
	116	5580	12.9	24.0	11.1
	140	5700	13.1	24.0	10.9

<b>WLAN n-Mode; 20 MHz; 72.2 Mbit/s</b>					
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>Output Power [dBm]</b>	<b>Limit [dBm]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	36	5180	13.8	17.0	3.2
	44	5220	14.2	17.0	2.8
	48	5240	14.0	17.0	3.0
UNII-Subband 2A	52	5260	15.0	24.0	9.0
	56	5280	14.5	24.0	9.5
	64	5320	13.9	24.0	10.1
UNII-Subband 2C	100	5500	14.9	24.0	9.1
	116	5580	14.4	24.0	9.6
	140	5700	14.0	24.0	10.0

<b>WLAN n-Mode; 40 MHz; 150 Mbit/s</b>					
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>Output Power [dBm]</b>	<b>Limit [dBm]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	38	5180	13.3	17.0	3.7
	46	5180	13.7	17.0	3.3
UNII-Subband 2A	54	5180	13.6	24.0	10.4
	62	5180	13.7	24.0	10.3
UNII-Subband 2C	102	5510	14.2	24.0	9.8
	110	5550	14.3	24.0	9.7
	134	5670	14.3	24.0	9.7



### 3.3.4 Measurement Plot (showing the highest value, "worst case")

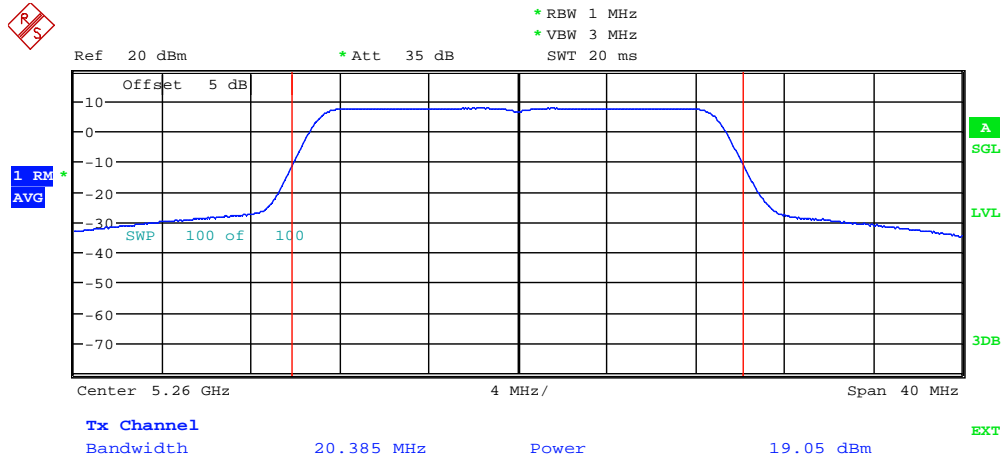

Date: 17.JAN.2014 14:09:46

The antenna gain is included in the plot.





### 3.4 Peak Power Spectral Density

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

#### 3.4.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the Peak Power Spectral Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: RMS
- Trace: Average
- Sweeps: 100
- Sweptime: coupled
- Marker: Peak

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08", method **SA-1**.

#### 3.4.2 Test Requirements / Limits

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

Limit: 4 dBm/MHz

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.825GHz bands:

Limit: 17 dBm/MHz

### 3.4.3 Test Protocol

Ambient temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 40 %


The antenna gain is excluded in the table.

<b>WLAN a-Mode; 20 MHz; 6 Mbit/s</b>					
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>Power Density [dBm/MHz]</b>	<b>Limit [dBm]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	36	5180	1.1	4.0	2.9
	44	5220	1.9	4.0	2.1
	48	5240	1.6	4.0	2.4
UNII-Subband 2A	52	5260	1.7	11.0	9.3
	56	5280	1.7	11.0	9.3
	64	5320	1.4	11.0	9.6
UNII-Subband 2C	100	5500	1.5	11.0	9.5
	116	5580	1.7	11.0	9.3
	140	5700	1.9	11.0	9.1

<b>WLAN n-Mode; 20 MHz; 72.2 Mbit/s</b>					
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>Power Density [dBm/MHz]</b>	<b>Limit [dBm]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	36	5180	2.5	4.0	1.5
	44	5220	2.7	4.0	1.3
	48	5240	2.7	4.0	1.3
UNII-Subband 2A	52	5260	2.6	11.0	8.4
	56	5280	2.6	11.0	8.4
	64	5320	2.6	11.0	8.4
UNII-Subband 2C	100	5500	2.5	11.0	8.5
	116	5580	2.1	11.0	8.9
	140	5700	2.3	11.0	8.7

<b>WLAN n-Mode; 40 MHz; 150 Mbit/s</b>					
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>Power Density [dBm/MHz]</b>	<b>Limit [dBm]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	38	5180	-1.3	4.0	5.3
	46	5180	-0.9	4.0	4.9
UNII-Subband 2A	54	5180	-1.1	11.0	12.1
	62	5180	-0.9	11.0	11.9
UNII-Subband 2C	102	5510	-1.4	11.0	12.4
	110	5550	-1.1	11.0	12.1
	134	5670	-1.3	11.0	12.3

### 3.4.4 Measurement Plot (showing the highest value, "worst case")

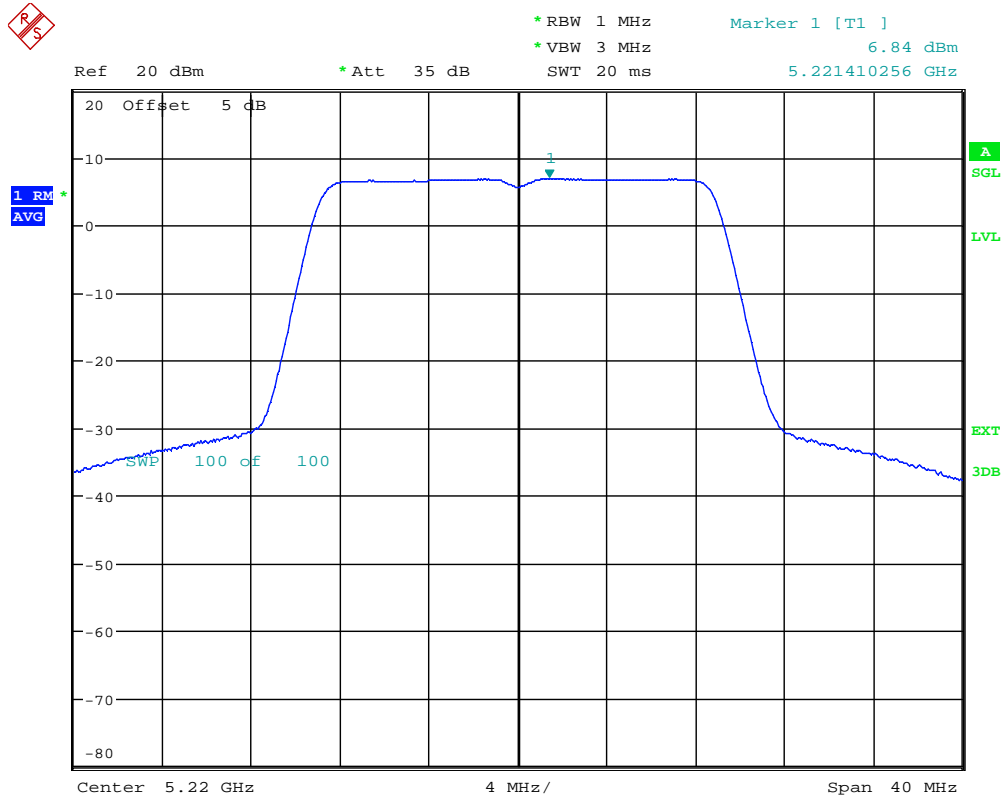

Date: 17.JAN.2014 13:10:07

The antenna gain is included in the plot.



### **3.5 Peak Excursion**

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

#### **3.5.1 Test Description**

The Equipment Under Test (EUT) was set up in a shielded room to perform the Peak Excursion measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: Peak
- Trace: Maxhold
- Sweeps: 200
- Sweeptime: 100 ms
- Marker: Peak

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08",

#### **3.5.2 Test Requirements / Limits**

FCC Part 15, Subpart E, § 15.407 (a), (6)

Peak excursion must not exceed 13 dB compared to the Peak Power Spectral Density.



### 3.5.3 Test Protocol

Ambient temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 40 %


The antenna gain is excluded in the table.

<b>WLAN a-Mode; 20 MHz; 6 Mbit/s</b>							
<b>UNII-Band</b>	<b>Channel No.</b>	<b>Frequency [MHz]</b>	<b>PPSD [dBm/MHz]</b>	<b>Peak Value [dBm/MHz]</b>	<b>Peak Excursion [dB]</b>	<b>Limit [dB]</b>	<b>Margin to Limit [dB]</b>
UNII-Subband 1	36	5180	1.1	10.1	9.0	13.0	4.0
	44	5220	1.9	10.7	8.8	13.0	4.2
	48	5240	1.6	11.8	10.2	13.0	2.8
UNII-Subband 2A	52	5260	1.7	10.5	8.8	13.0	4.2
	56	5280	1.7	10.5	8.8	13.0	4.2
	64	5320	1.4	10.4	9.0	13.0	4.0
UNII-Subband 2C	100	5500	1.5	10.4	8.9	13.0	4.1
	116	5580	1.7	10.5	8.8	13.0	4.2
	140	5700	1.9	10.7	8.8	13.0	4.2

<b>WLAN n-Mode; 20 MHz; 72.2 Mbit/s</b>							
UNII-Subband 1	36	5180	2.5	8.3	5.8	13.0	7.2
	44	5220	2.7	9.4	6.7	13.0	6.3
	48	5240	2.7	9.7	7.0	13.0	6.0
UNII-Subband 2A	52	5260	2.6	9.6	7.0	13.0	6.0
	56	5280	2.6	9.6	7.0	13.0	6.0
	64	5320	2.6	10.0	7.4	13.0	5.6
UNII-Subband 2C	100	5500	2.5	9.7	7.2	13.0	5.8
	116	5580	2.1	9.9	7.8	13.0	5.2
	140	5700	2.3	9.8	7.5	13.0	5.5

<b>WLAN n-Mode; 40 MHz; 150 Mbit/s</b>							
UNII-Subband 1	38	5180	-1.3	8.9	10.2	13.0	2.8
	46	5180	-0.9	9.0	9.9	13.0	3.1
UNII-Subband 2A	54	5180	-1.1	9.1	10.2	13.0	2.8
	62	5180	-0.9	9.0	9.9	13.0	3.1
UNII-Subband 2C	102	5510	-1.4	8.8	10.2	13.0	2.8
	110	5550	-1.1	8.9	10.0	13.0	3.0
	134	5670	-1.3	8.7	10.0	13.0	3.0

### 3.5.4 Measurement Plot (showing the highest value, "worst case")

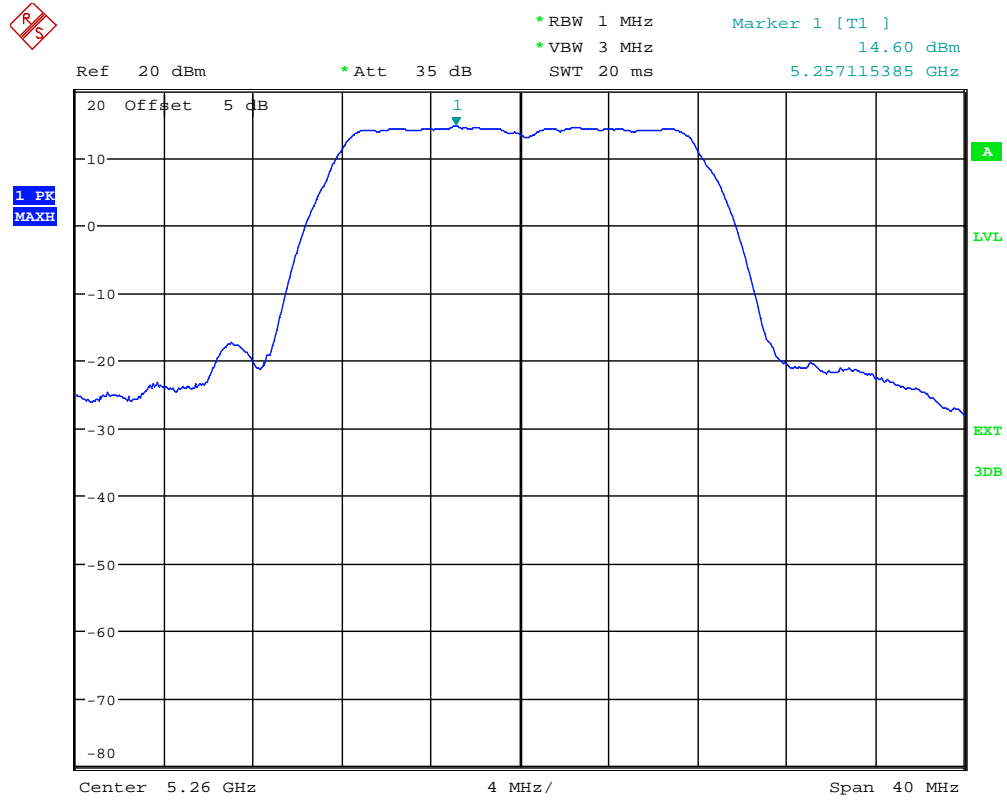

Date: 23.JAN.2014 13:41:16

The antenna gain is included in the plot.



### 3.6 Frequency Stability

**Standard** FCC Part 15, Subpart E

#### 3.6.1 Test Description

The Equipment Under Test (EUT) was set up in an temperature chamber to perform the frequency stability test.

The results recorded, were measured while the EUT is transmitting a CW signal on the required frequency.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Frequency Counter activated, Resolution 1 Hz

#### 3.6.2 Test Requirements / Limits

FCC Part 15, Subpart E, § 15.407 (g)

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

#### 3.6.3 Test Protocol

Ambient temperature: 23 °C

Air Pressure: 1006 hPa

Humidity: 36 %

<b>UNII-Band</b>	<b>Channel No</b>	<b>Channel Center Frequency [MHz]</b>	<b>Temp [°C]</b>	<b>Voltage [V]</b>	<b>Time [min]</b>	<b>Measured Center Frequency [MHz]</b>	<b>Freq. Error [kHz]</b>
UNII-Subband 2A	52	5260	23	3.3	0	5260.007753	7.8
	52	5260	23	3.3	1	5260.004861	4.9

### **3.7 Undesirable Emissions / General Field Strength Limits; Restricted Band and Radiated Emission Limits, Band Edge**

**Standard** FCC Part 15, Subpart C & E

**The test was performed according to:** ANSI C 63.4

#### **3.7.1 Test Description**

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

##### **1. Measurement up to 30 MHz**

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The Loop antenna HFH2-Z2 is used.

**Step 1:** pre measurement

- Anechoic chamber
- Antenna distance: 10m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 - 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2:** final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

##### **2. Measurement above 30 MHz and up to 1 GHz**

**Step 1:** Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 - 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 - 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2:** second measurement





For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-180$  to  $180^\circ$
- Turntable step size:  $45^\circ$
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45^\circ$
- Antenna height: 0.5 m

**Step 3:** final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by  $\pm 22.5^\circ$  around this value.

During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $\pm 25$  cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-22.5^\circ$  to  $+22.5^\circ$  around the determined value
- Height variation range:  $-0.25$  m to  $+0.25$  m around the determined value

**Step 4:** final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s



**Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- RBW = VBW = 1000 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

In the frequency range 25 – 40 GHz the measurement was performed conducted.

**3.7.2 Test Requirements / Limits**

FCC Part 15 Subpart E , §15.407 (b)(1.2.3.4)

FCC Part 15, Subpart C, §15.247 (b)(5,6)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Calculated Limits(dBµV/m @10m)	Limits(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300 59.1 dB	(48.5 – 13.8) + 30 dB	78.5 – 43.8
0.49 – 1.705	24000/F(kHz)	30 19.1 dB	(48.9 – 23.0) + 10 dB	58.9 – 33.0
1.705 – 30	30	30 19.1 dB	29.5 + 10 dB	39.5

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

### 3.7.3 Test Protocol

#### Limit types:

RB – Emissions falls into a “Restricted Band” according FCC 15.205

UE – “Undesirable Emission Limit” according FCC 15.407

BE – Band Edge Limit

#### 3.7.3.1 Measurement up to 30 MHz

Ambient temperature: 23 °C

Air Pressure: 1009 hPa

Humidity: 38 %

WLAN a-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]	Limit Type
-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

#### 3.7.3.2 Measurement above 30 MHz

Ambient temperature: 23 °C

Air Pressure: 1009 hPa

Humidity: 38 %

WLAN a-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
52	5260	5250.0	87.0	PEAK	1000	88.0	1.0	UE
52	5260	5250.0	63.5	AV	1000	68.0	4.5	UE
48	5240	5250	84.9	PEAK	1000	88.0	3.1	UE
48	5240	5250	61.7	AV	1000	68.0	6.3	UE
100	5500	7333.5	45.2	PEAK	1000	74.0	28.8	RB
100	5500	7333.5	38.6	AV	1000	54.0	15.4	RB
140	5700	7600.0	37.7	AV	1000	54.0	16.3	RB
116	5580	7440.0	43.4	AV	1000	54.0	10.6	RB

WLAN n-Mode; 20 MHz; 72.2 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]	Limit Type
48	5240	5250.0	86.1	PEAK	1000	88.0	1.9	UE
48	5240	5250.0	48.1	AV	1000	68.0	19.9	UE

WLAN n-Mode; 40 MHz; 150 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]	Limit Type
-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.


### 3.7.3.3 Band Edge

Ambient temperature: 23 °C  
 Air Pressure: 1009 hPa  
 Humidity: 38 %

WLAN a-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
36	5180	5150.0	56.8	PEAK	1000	74.0	17.2	BE
36	5180	5150.0	38.8	AV	1000	54.0	15.2	BE
64	5320	5350.0	50.80	PEAK	1000	74.0	23.2	BE
64	5320	5350.0	35.5	AV	1000	54.0	18.5	BE
100	5500	5460.0	47.2	PEAK	1000	74.0	26.8	BE
100	5500	5460.0	35.4	AV	1000	54.0	18.6	BE

WLAN n-Mode; 20 MHz; 72.2 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]	Limit Type
36	5180	5150.0	46.2	PEAK	1000	74.0	27.8	BE
36	5180	5150.0	34.2	AV	1000	54.0	19.8	BE

### 3.7.4 Measurement Plot Band Edge (showing the highest value, "worst case")

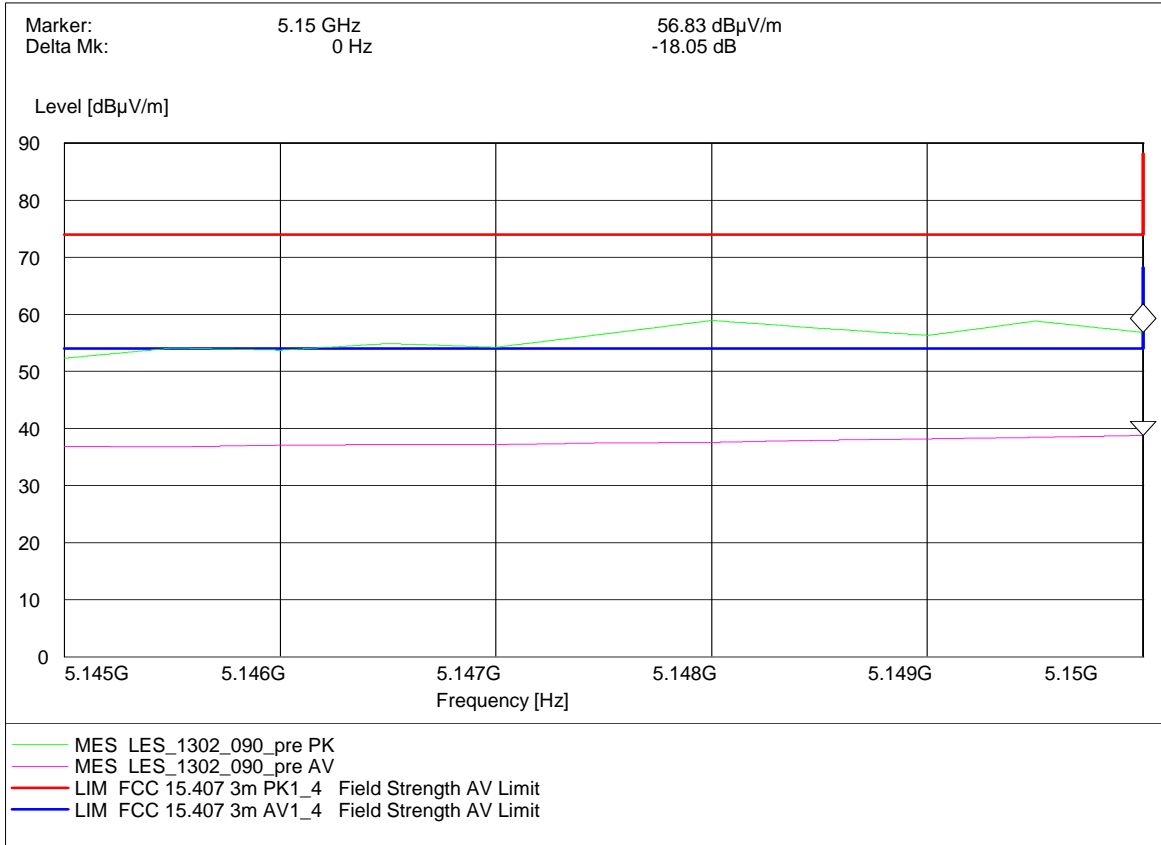



## 4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 2</b>		
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6.00 m <sup>3</sup>		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC, IC)	2011/01/10	2014/01/10
	NSA (FCC)	2014/01/09	2017/01/09

### Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Air compressor	none	-	Atlas Copco	
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11	2014/01/10
	IC listing 3699A-1 3m		2011/02/07	2014/02/06
	FCC listing 96716 3m Part15/18		2014/01/09	2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH	
EMC camera	CE-CAM/1	-	CE-SYS	
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi	
Filter ISDN	B84312-C110-E1		Siemens&Matsushita	
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita	



**Test Equipment Auxiliary Equipment for Conducted emissions**

**Lab ID:** Lab 1  
**Manufacturer:** Rohde & Schwarz GmbH & Co.KG  
**Description:** EMI Conducted Auxiliary Equipment

**Single Devices for Auxiliary Equipment for Conducted emissions**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner		
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2014/02/06	2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG		
	Standard calibration			2013/03/01	2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration			2014/01/10	2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration			2011/02/08	2014/02/07
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration			2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2013/03/01	2015/02/28

### Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH		
Antenna mast	AS 620 P	620/37	HD GmbH		
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
				2009/06/04	2014/06/03
Biconical dipole	VUBA 9117 Standard Calibration	9117-108	Schwarzbeck	2012/01/18	2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch		
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax		
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	2012/05/18	2015/05/17
	Standard Calibration				
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	2012/06/26	2015/06/25
	Standard Calibration				
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170				
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
				2012/12/18	2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG		
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
				2011/10/27	2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH		
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH		





**Single Devices for Auxiliary Equipment for Radiated emissions (continued)**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

**Test Equipment Auxiliary Test Equipment**

<b>Lab ID:</b>	<b>Lab 2, Lab 3</b>
<i>Manufacturer:</i>	see single devices
<i>Description:</i>	Single Devices for various Test Equipment
<i>Type:</i>	various
<i>Serial Number:</i>	none

**Single Devices for Auxiliary Test Equipment**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04   2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13   2015/06/12
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

### Test Equipment Digital Signalling Devices

**Lab ID:** Lab 1, Lab 2, Lab 3  
**Description:** Signalling equipment for various wireless technologies.

#### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/11/24	2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Initial factory calibration		2012/01/26	2014/01/25
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/11/28	2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG	
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16	
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/12/07	2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02	
	SW: K62, K69		2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG	



**Test Equipment Emission measurement devices**

**Lab ID:** Lab 1, Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

**Single Devices for Emission measurement devices**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Personal Computer	Dell	30304832059	Dell	
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG	
	Standard calibration		2013/05/03	2014/05/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG	
	Standard calibration		2013/04/30	2014/04/29
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2011/05/12	2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2011/12/05	2013/12/31
	Standard Calibration		2014/01/07	2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03	

**Test Equipment Multimeter 12**

**Lab ID:** Lab 4  
**Description:** Ex-Tech 520  
**Serial Number:** 05157876

**Single Devices for Multimeter 12**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Customized calibration		2013/12/04	2015/12/03



### Test Equipment Radio Lab Test Equipment

**Lab ID:** Lab 3  
**Description:** Radio Lab Test Equipment

#### Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD Standard calibration	828110/016	Rohde & Schwarz GmbH & Co.KG 2013/05/03 2014/05/02
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS Standard calibration	5489/001	Datum-Beverly 2013/06/24 2014/06/23
Sensor Head A	NRV-Z1 Standard calibration	827753/005	Rohde & Schwarz GmbH & Co.KG 2013/04/30 2014/04/29
Signal Generator SME	SME03 <i>Calibration Details</i> Standard calibration	827460/016	Rohde & Schwarz GmbH & Co.KG <i>Last Execution</i> <i>Next Exec.</i> 2011/11/25 2014/11/24
Signal Generator SMP	SMP02 <i>Calibration Details</i> Standard calibration	836402/008	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26 <i>Calibration Details</i> Standard Calibration	840061/005	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i> 2013/02/12 2015/02/11
Temperature Chamber Vötsch 03	VT 4002 <i>Calibration Details</i> Customized calibration	58566002150010	Vötsch <i>Last Execution</i> <i>Next Exec.</i> 2012/03/12 2014/03/11



### Test Equipment Regulatory Bluetooth RF Test Solution

**Lab ID:** Lab 4  
**Description:** Regulatory Bluetooth RF Tests  
**Type:** Bluetooth RF  
**Serial Number:** 001

### Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.	
Bluetooth Signalling Unit CBT		100302	Rohde & Schwarz GmbH & Co.KG	
	Standard calibration		2013/08/28	2014/08/27
Power Meter NRVD	NRVD	832025/059	2013/08/26 2014/08/25	
	Standard calibration			
Power Sensor NRV Z1 A	PROBE	832279/013	2013/08/28 2014/08/27	
	Standard calibration			
Power Supply	NGSM 32/10	2725	2013/06/14 2015/06/13	
	Standard calibration			
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH	
	Standard calibration		2013/08/27	2014/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG	
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	2013/06/21 2016/06/20	
	Standard calibration			

### Test Equipment Shielded Room 02

**Lab ID:** Lab 1  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

### Test Equipment Shielded Room 07

**Lab ID:** Lab 4  
**Description:** Shielded Room 4m x 6m

### Test Equipment T/H Logger 04

**Lab ID:** Lab 4  
**Description:** Lufft Opus10  
**Serial Number:** 7481

### Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 04 (Environ)		7481	Lufft Mess- und Regeltechnik GmbH



**Test Equipment Temperature Chamber 01**

**Lab ID:** Lab 4  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber KWP 120/70  
**Type:** Weiss  
**Serial Number:** see single devices


**Single Devices for Temperature Chamber 01**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2012/03/12   2014/03/11

## 5 Photo Report

Please refer to external report.

## 6 Setup Drawings

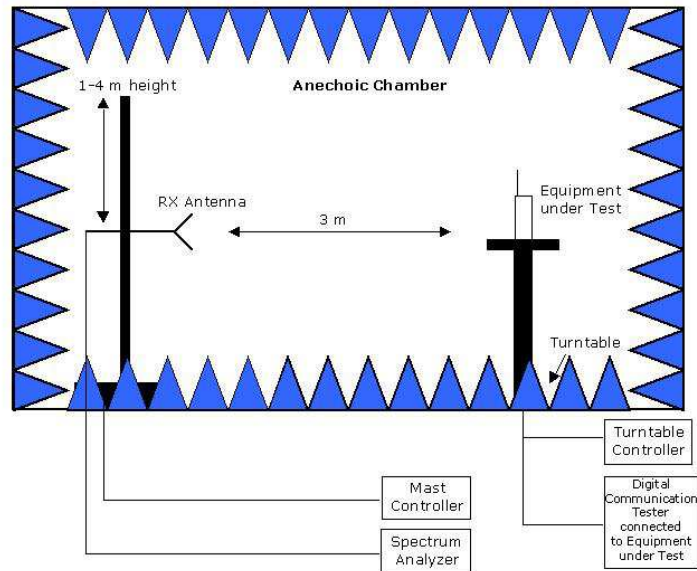

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.