



FCC PART 15B



TEST REPORT

For

Motic China Group Co., Ltd.

MOTIC BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE, XIAMEN, FUJIAN, CHINA

FCC ID: PVEMOTICAM T

Report Type: Original Report	Product Type: Moticam T
Test Engineer: Ares Liu	
Report Number: R2XM131202054-00A	
Report Date: 2014-01-20	
Reviewed By: RF Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.
* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2).
This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....5

 JUSTIFICATION5

 EUT EXERCISE SOFTWARE5

 EQUIPMENT MODIFICATIONS5

 SUPPORT EQUIPMENT LIST AND DETAILS5

 EXTERNAL I/O CABLE.....5

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....8

 MEASUREMENT UNCERTAINTY8

 EUT SETUP8

 EMI TEST RECEIVER SETUP.....9

 TEST PROCEDURE9

 CORRECTED AMPLITUDE & MARGIN CALCULATION9

 TEST EQUIPMENT LIST AND DETAILS.....10

 TEST RESULTS SUMMARY10

 TEST DATA10

FCC §15.109 - RADIATED EMISSIONS13

 MEASUREMENT UNCERTAINTY13

 EUT SETUP13

 EMI TEST RECEIVER SETUP.....14

 TEST PROCEDURE14

 CORRECTED AMPLITUDE & MARGIN CALCULATION14

 TEST EQUIPMENT LIST AND DETAILS.....15

 TEST RESULTS SUMMARY15

 TEST DATA15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Motic China Group Co., Ltd's* product, model *Moticam T (FCC ID: PVEMOTICAMT)* (the "EUT") in this report is a *Moticam T*, which measures approximately: 20.4 cm (L) x 16.0 cm (W) x 15.1 cm (H), input voltage: DC5.0V from adapter.

Adapter Information:

Model: GFP121DA-050200B-1

Input: AC 100-240V, 50-60Hz 0.36A

Output: DC 5.0V, 2A

All measurement and test data in this report was gathered from production sample serial number: 131202054 (Assigned by BACL, Dongguan). The EUT was received on 2013-12-09

Objective

This report is prepared on behalf of *Motic China Group Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: *PVEMOTICAMT* for Wi-Fi

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user). The highest operating frequency is 1600 MHz

EUT Exercise Software

Winthrax.exe was used in the test, which was provided by the manufacturer.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05D C
SAST	Modem	AEM-2100	0293
Kingmax	USB Flash Disk	8GB	/

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Parallel Cable	Yes	No	1.2	Laptop	Printer
USB Cable	Yes	No	1.2	EUT	Laptop
Serial Cable	Yes	No	1.2	Laptop	Modem
USB Cable	Yes	Yes	1.8	Keyboard	Laptop

Block Diagram of Test Setup

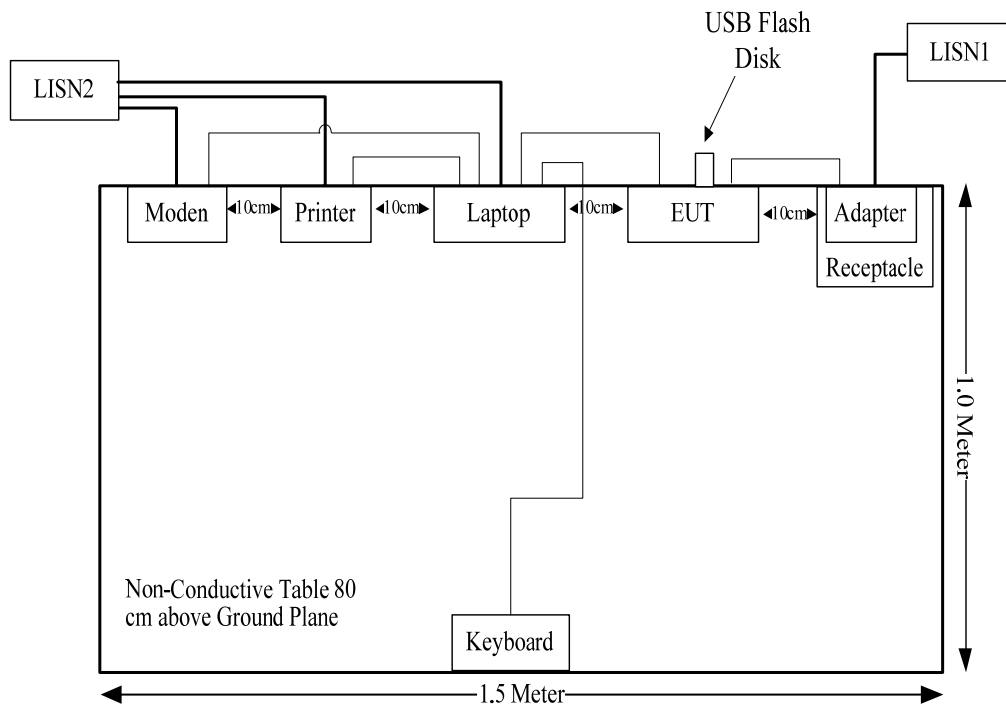

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

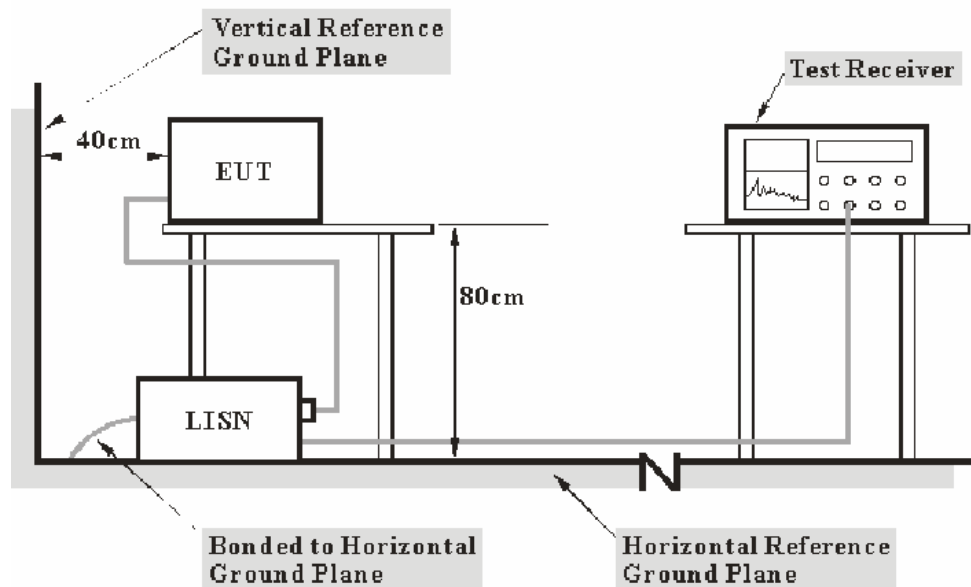

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2013-2-18	2014-2-17
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

1.74 dB at 0.380 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	20.5°C
Relative Humidity:	32 %
ATM Pressure:	102.1 kPa

The testing was performed by Ares Liu on 2014-01-15.

Test mode: USB Downloading

120 V, 60 Hz, Line:

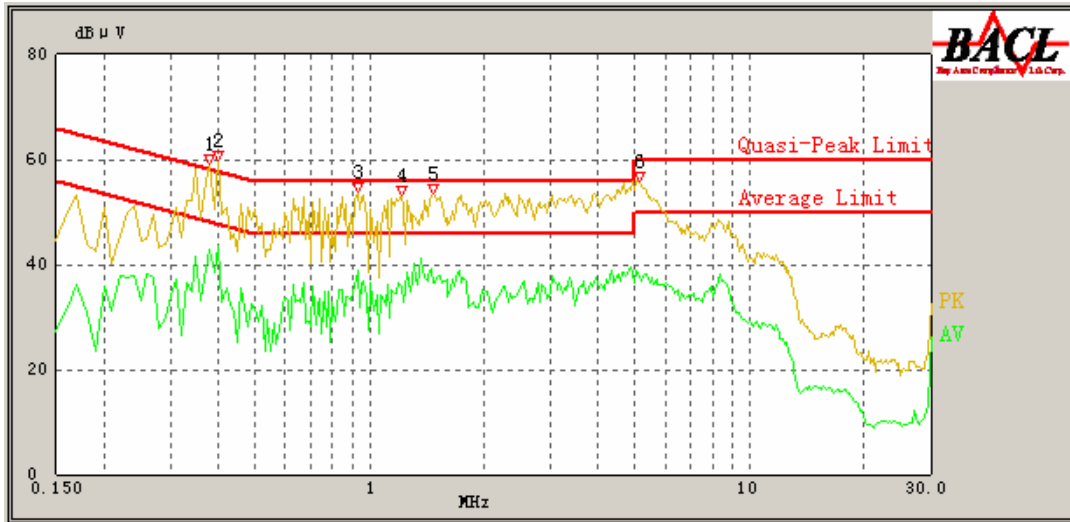

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.380	56.54	9.68	58.28	1.74*	QP
0.380	42.76	9.68	48.28	5.54	AV
0.400	55.74	9.68	57.85	2.11*	QP
0.400	43.34	9.68	47.85	4.51	AV
0.930	48.29	9.68	56.00	7.71	QP
0.930	38.95	9.68	46.00	7.05	AV
1.210	47.50	9.68	56.00	8.50	QP
1.210	35.98	9.68	46.00	10.02	AV
1.470	47.86	9.68	56.00	8.14	QP
1.470	36.59	9.68	46.00	9.41	AV
5.130	48.89	9.71	60.00	11.11	QP
5.100	38.63	9.71	50.00	11.37	AV

*Within measurement uncertainty!

120 V, 60 Hz, Neutral:



Frequency (MHz)	Cord. Reading (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/AV/QP)
0.390	54.40	9.67	58.06	3.66	QP
0.390	43.84	9.67	48.06	4.22	AV
0.680	45.12	9.67	56.00	10.88	QP
0.680	37.10	9.67	46.00	8.90	AV
0.930	47.19	9.69	56.00	8.81	QP
0.930	38.99	9.69	46.00	7.01	AV
2.490	46.82	9.69	56.00	9.18	QP
2.490	38.25	9.69	46.00	7.75	AV
4.130	47.79	9.73	56.00	8.21	QP
4.160	40.91	9.73	46.00	5.09	AV
5.020	49.92	9.75	60.00	10.08	QP
5.040	40.29	9.75	50.00	9.71	AV

FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

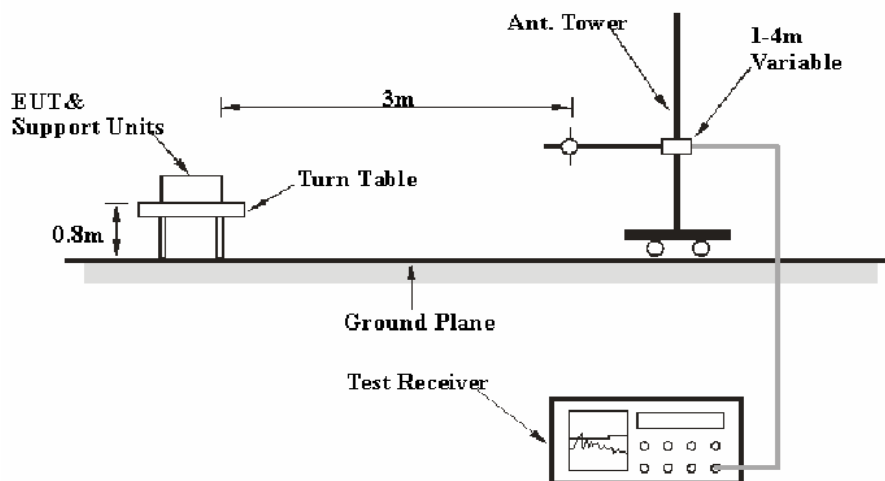

Above 1GHz:

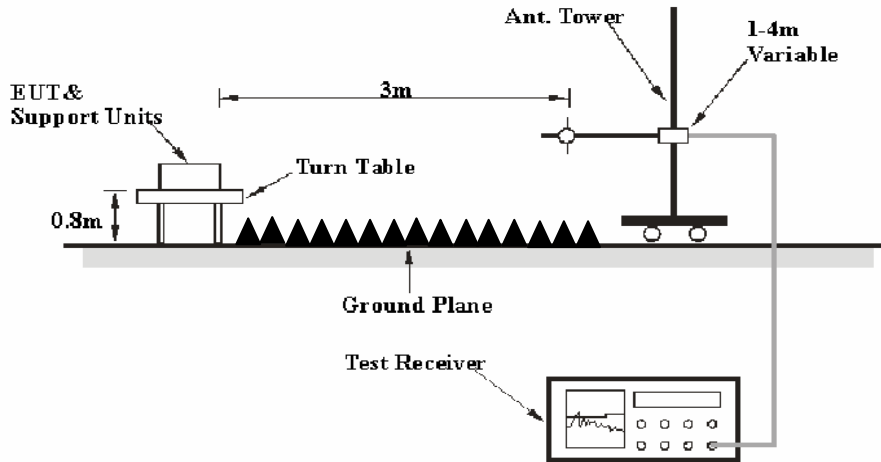

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 8 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2011-9-6	2014-9-5
HP	AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM	DE31388	2013-5-7	2014-5-6
ETS-Lindgren	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	N/A	N/A
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:

1.50 dB at 706.0900 MHz in the Vertical polarization

Test Data

Environmental Conditions


Temperature:	19.7 °C
Relative Humidity:	48 %
ATM Pressure:	101 kPa

The testing was performed by Ares Liu on 2014-01-07.

1) Below 1G:

Test mode: USB Downloading


Horizontal:

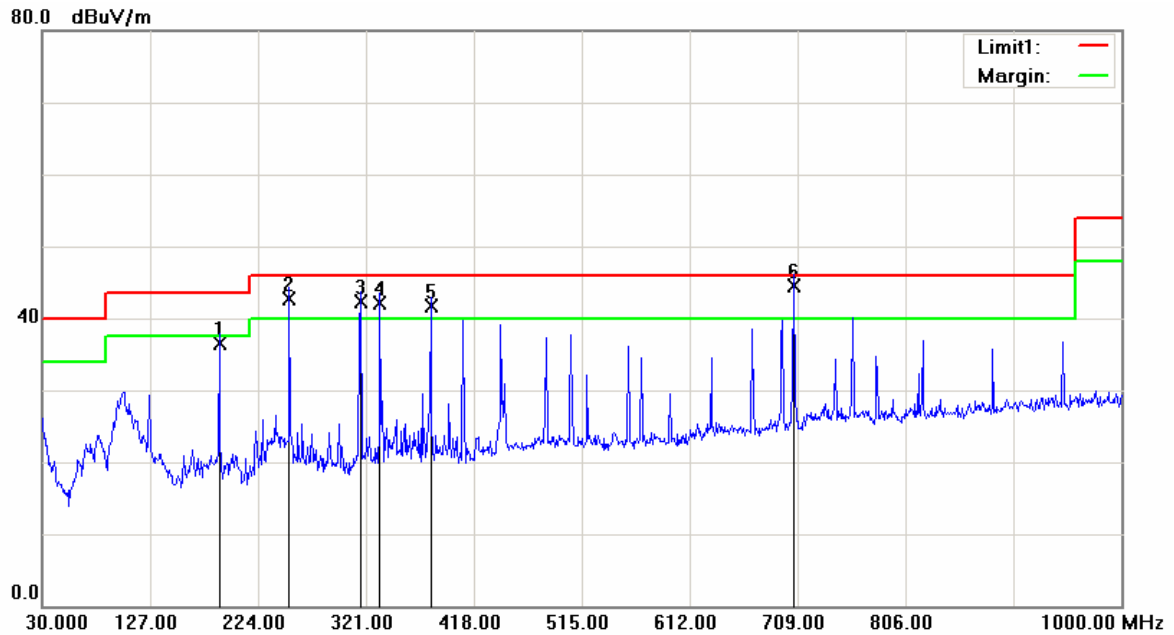

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
189.0800	45.00	QP	-8.50	36.50	43.50	7.00
252.1300	50.33	QP	-7.53	42.80	46.00	3.20*
316.1500	47.49	QP	-5.19	42.30	46.00	3.70*
333.6100	47.08	QP	-4.88	42.20	46.00	3.80*
379.2000	45.52	QP	-3.82	41.70	46.00	4.30*
706.0900	43.25	QP	1.25	44.50	46.00	1.50*

*Within measurement uncertainty!

Vertical:

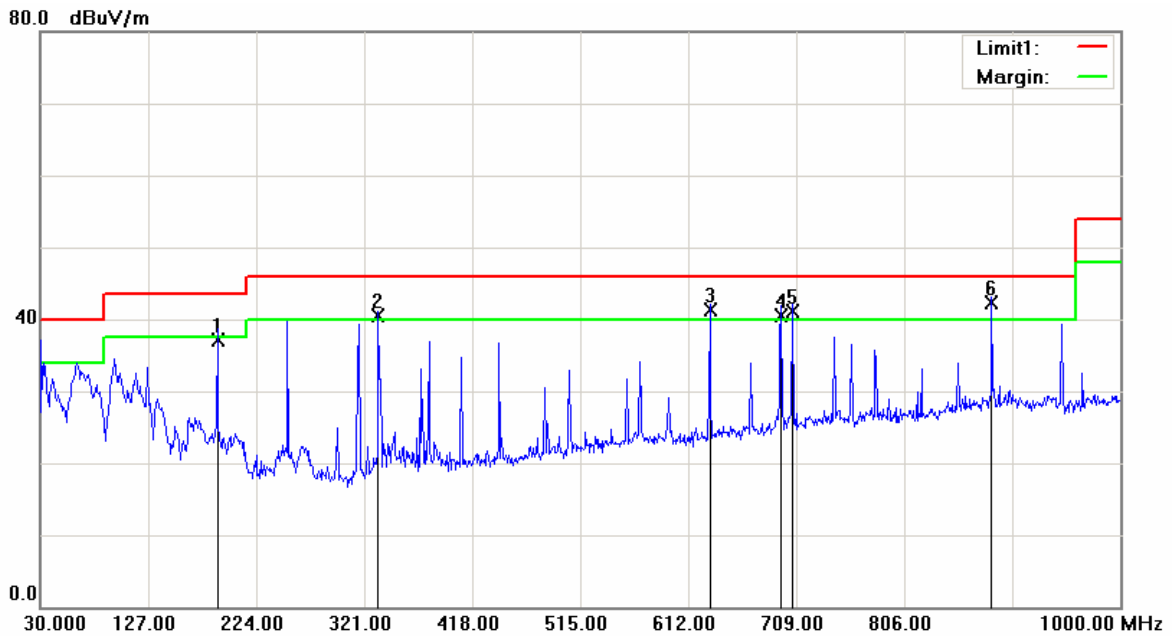


Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
189.0800	45.60	QP	-8.50	37.10	43.50	6.40
333.6100	45.38	QP	-4.88	40.50	46.00	5.50
631.4000	40.73	QP	0.57	41.30	46.00	4.70*
695.4200	39.49	QP	1.11	40.60	46.00	5.40
706.0900	39.85	QP	1.25	41.10	46.00	4.90*
884.5700	38.75	QP	3.55	42.30	46.00	3.70*

2) Above 1G:

Test mode: USB Downloading


Horizontal:

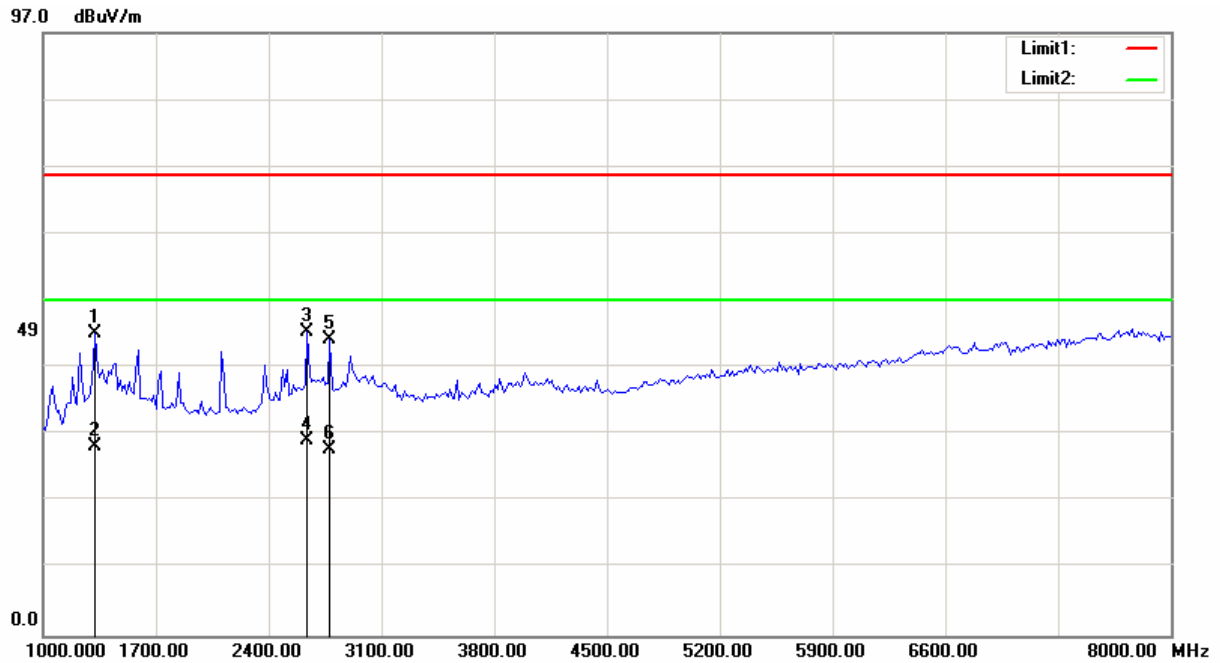

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1322.645	49.78	peak	-1.09	48.69	74.00	25.31
1322.645	31.52	AVG	-1.09	30.43	54.00	23.57
2641.283	45.12	peak	3.70	48.82	74.00	25.18
2641.283	27.63	AVG	3.70	31.33	54.00	22.67
2781.563	43.18	peak	4.52	47.70	74.00	26.30
2781.563	25.47	AVG	4.52	29.99	54.00	24.01

Vertical:

97.0 dBuV/m

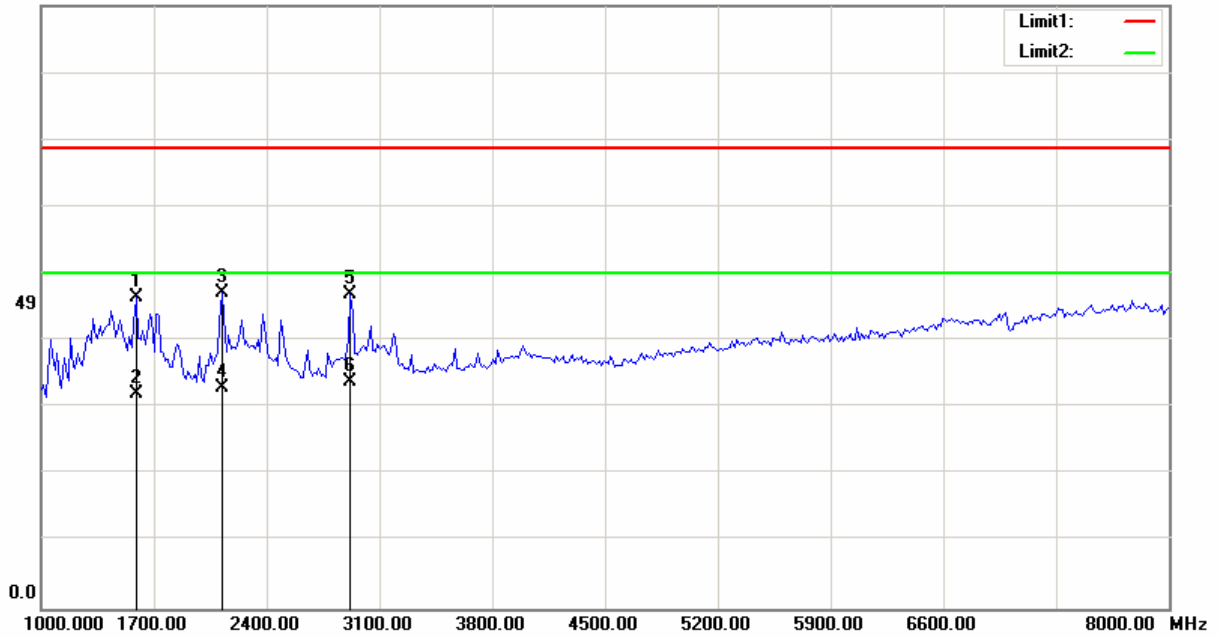

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1589.178	50.03	peak	0.10	50.13	74.00	23.87
1589.178	34.52	AVG	0.10	34.62	54.00	19.38
2122.244	49.08	peak	1.72	50.80	74.00	23.20
2122.244	33.69	AVG	1.72	35.41	54.00	18.59
2921.844	44.24	peak	6.24	50.48	74.00	23.52
2921.844	30.17	AVG	6.24	36.41	54.00	17.59

***** END OF REPORT *****