

FCC Part 15C Measurement and Test Report

For

Motic china group Co.,Ltd.

Motic BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE

XIAMEN FUJIAN, CHINA, 361006

FCC ID: PVEMT-1001

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Tablet PC</u>
Tested Model:	<u>MT-1001</u>
Report No.:	<u>STR17028189I-1</u>
Tested Date:	<u>2017-02-25 to 2017-03-30</u>
Issued Date:	<u>2017-07-01</u>
Tested By:	<u>Neil Wong / Engineer</u> <i>Neil Wong</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY.....4

1.4 TEST FACILITY.....4

1.5 EUT SETUP AND TEST MODE.....5

1.6 MEASUREMENT UNCERTAINTY.....5

1.7 TEST EQUIPMENT LIST AND DETAILS.....6

2. SUMMARY OF TEST RESULTS.....7

3. RF EXPOSURE.....8

3.1 STANDARD APPLICABLE.....8

3.2 TEST RESULT.....8

4. ANTENNA REQUIREMENT.....9

4.1 STANDARD APPLICABLE.....9

4.2 EVALUATION INFORMATION.....9

5. POWER SPECTRAL DENSITY.....10

5.1 STANDARD APPLICABLE.....10

5.2 TEST PROCEDURE.....10

5.3 ENVIRONMENTAL CONDITIONS.....10

5.4 SUMMARY OF TEST RESULTS/PLOTS.....11

6. 6DB BANDWIDTH.....21

6.1 STANDARD APPLICABLE.....21

6.2 TEST PROCEDURE.....21

6.3 ENVIRONMENTAL CONDITIONS.....21

6.4 SUMMARY OF TEST RESULTS/PLOTS.....21

7. RF OUTPUT POWER.....32

7.1 STANDARD APPLICABLE.....32

7.2 TEST PROCEDURE.....32

7.3 ENVIRONMENTAL CONDITIONS.....32

7.4 SUMMARY OF TEST RESULTS/PLOTS.....33

8. FIELD STRENGTH OF SPURIOUS EMISSIONS.....43

8.1 MEASUREMENT UNCERTAINTY.....43

8.2 STANDARD APPLICABLE.....43

8.3 TEST PROCEDURE.....43

8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....45

8.5 ENVIRONMENTAL CONDITIONS.....45

8.6 SUMMARY OF TEST RESULTS/PLOTS.....45

9. OUT OF BAND EMISSIONS.....53

9.1 STANDARD APPLICABLE.....53

9.2 TEST PROCEDURE.....53

9.3 ENVIRONMENTAL CONDITIONS.....54

9.4 SUMMARY OF TEST RESULTS/PLOTS.....54

10. CONDUCTED EMISSIONS.....76

10.1 MEASUREMENT UNCERTAINTY.....76

10.2 TEST PROCEDURE.....76

10.3 BASIC TEST SETUP BLOCK DIAGRAM.....76

10.4 ENVIRONMENTAL CONDITIONS.....76

10.5 TEST RECEIVER SETUP.....77

10.6 SUMMARY OF TEST RESULTS/PLOTS.....77

10.7 CONDUCTED EMISSIONS TEST DATA.....77

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Motic china group Co.,Ltd.
Address of applicant: Motic BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE
XIAMEN FUJIAN, CHINA, 361006

Manufacturer: Motic china group Co.,Ltd.
Address of manufacturer: Motic BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE
XIAMEN FUJIAN, CHINA, 361006

General Description of EUT	
Product Name:	Tablet PC
Trade Name:	Motic
Model No.:	MT-1001
Adding Model(s):	/
Rated Voltage:	DC 3.7V by battery
Battery Capacity:	7000mAh
Power Adapter Model:	/
Software Version:	F1006F.I25LK.1.12
Hardware Version:	9149C
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n(HT20)
Frequency Range:	2412-2462MHz
RF Output Power:	19.93dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 72.2Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	Antenna 1: 2.1dBi, Antenna 2: 2.1dBi

1.2 Test Standards

The following report is prepared on behalf of the Motic china group Co.,Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V04 for digital transmission systems and KDB 662911 D01 Multiple Transmitter Output v02r01 shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 V04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz			Limit dBm/3kHz
		Chain 1	Chain 2	Total	
802.11b	2412	-9.547	-12.64	-7.81	8
	2437	-9.409	-13.13	-7.87	8
	2462	-10.477	-14.55	-9.04	8
802.11g	2412	-11.352	-20.21	-10.82	8
	2437	-13.426	-17.21	-11.91	8
	2462	-12.164	-21.49	-11.68	8
802.11n HT20	2412	-13.331	-22.76	-12.86	8
	2437	-13.444	-21.33	-12.79	8
	2462	-12.817	-22.16	-12.34	8

Please refer to the following test plots:

Chain 1


802.11b-Low Channel




802.11b-Middle Channel




802.11b-High Channel

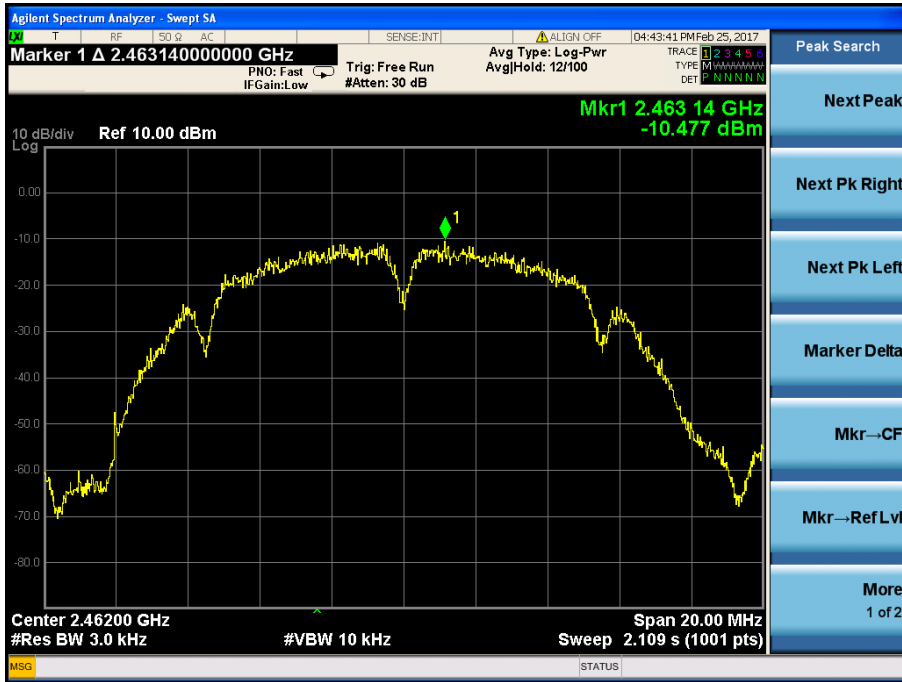


802.11g-Low Channel

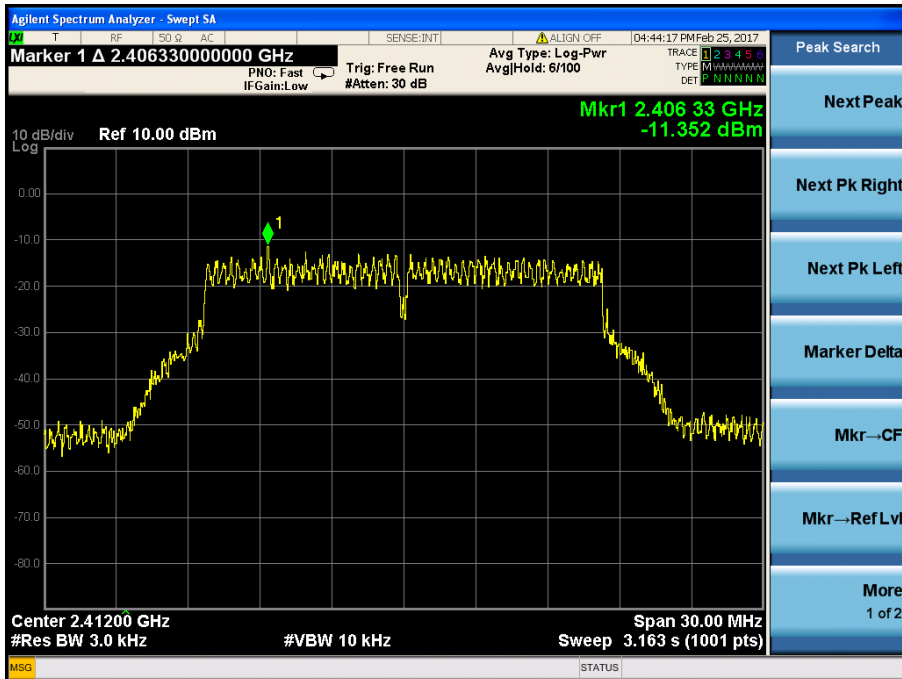


802.11g-Middle Channel

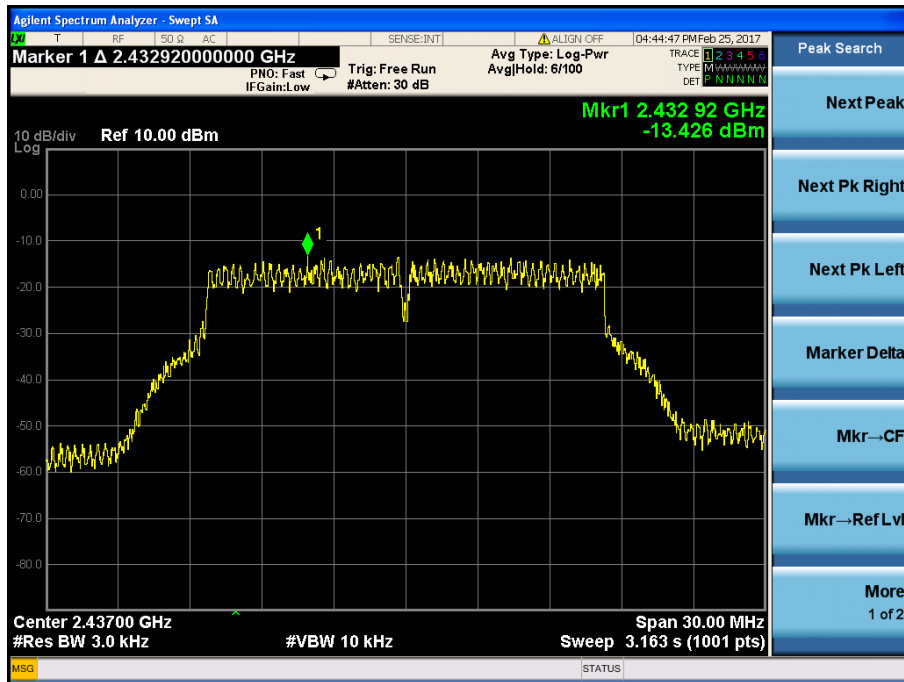


802.11g-High Channel

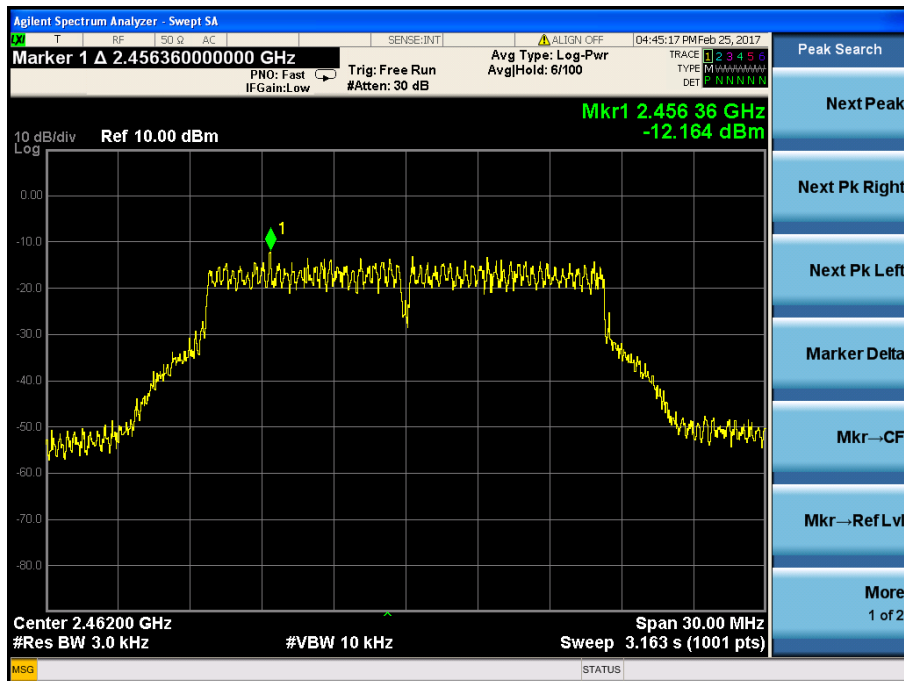


802.11n-HT20-Low Channel

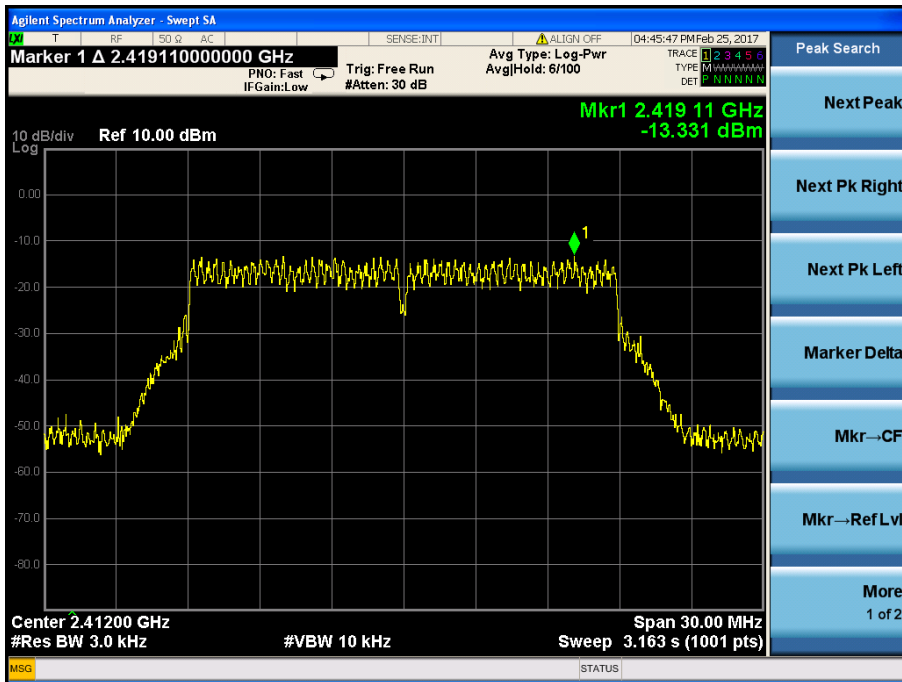

802.11n-HT20-Middle Channel

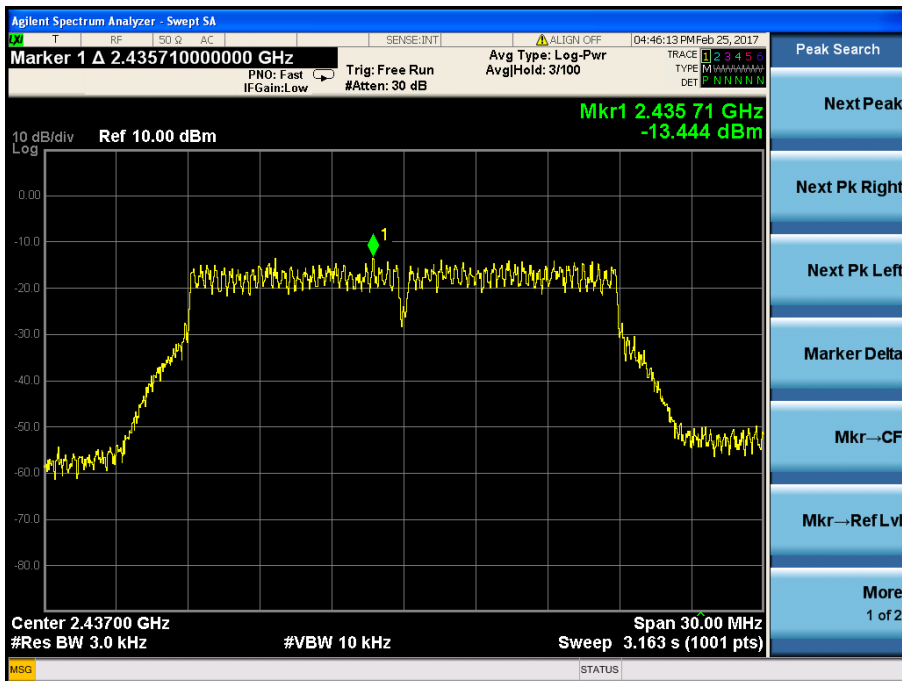


802.11n-HT20-High Channel

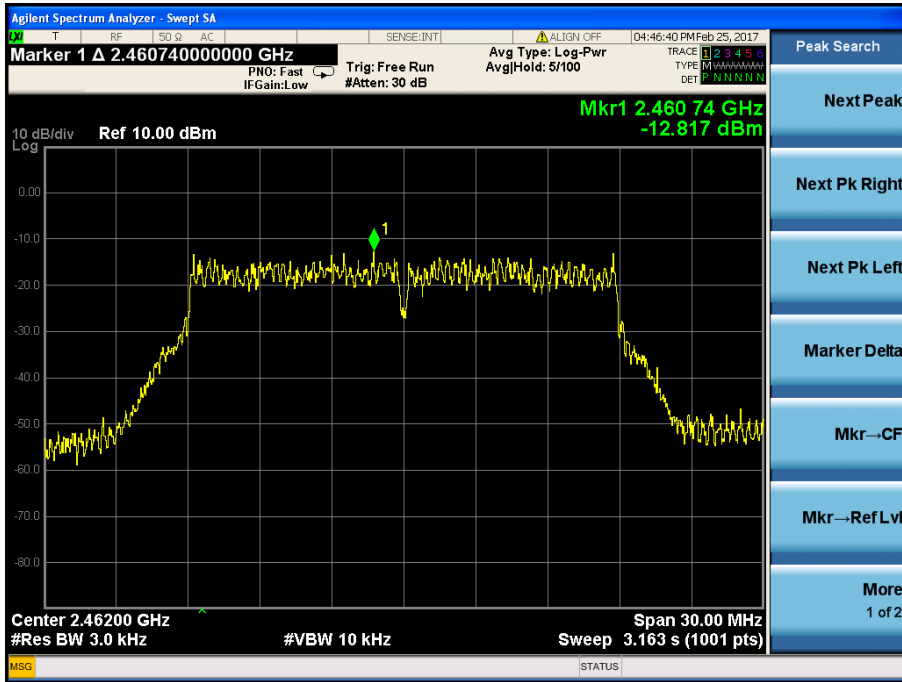


Chain 2


802.11b-Low Channel

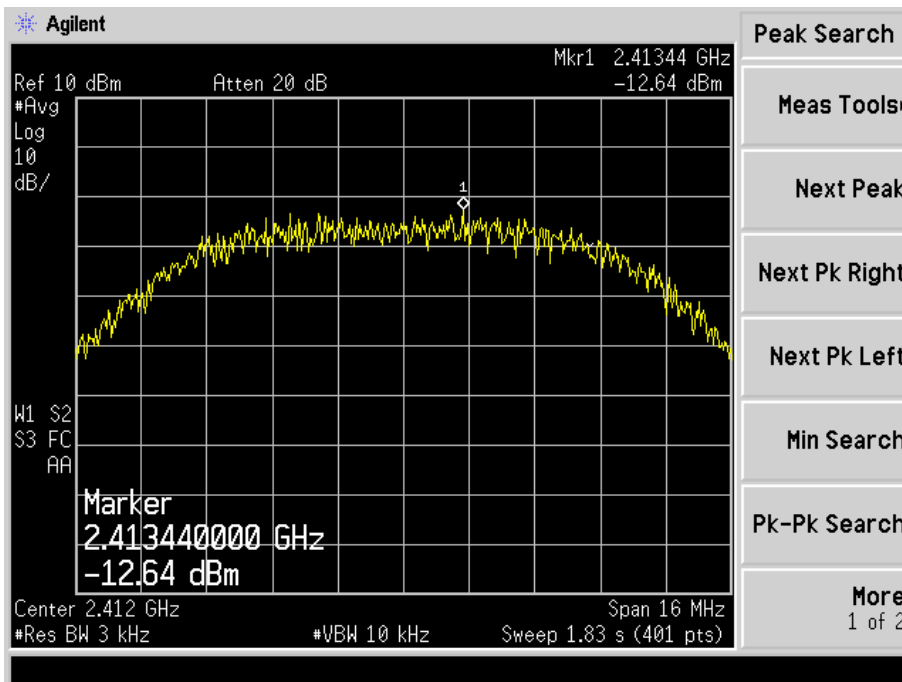


802.11b-Middle Channel

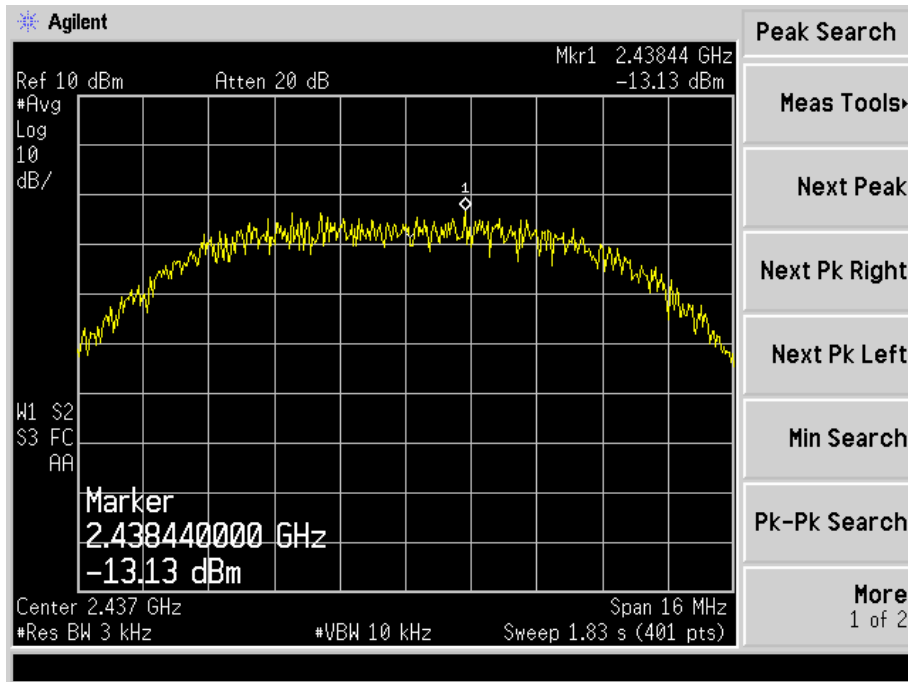


802.11b-High Channel

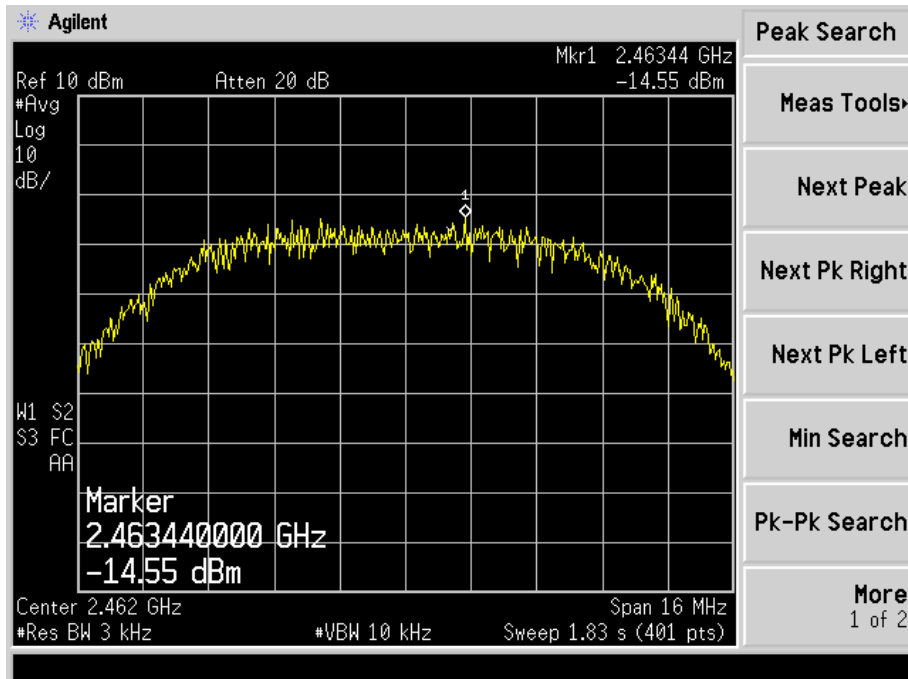


802.11g-Low Channel

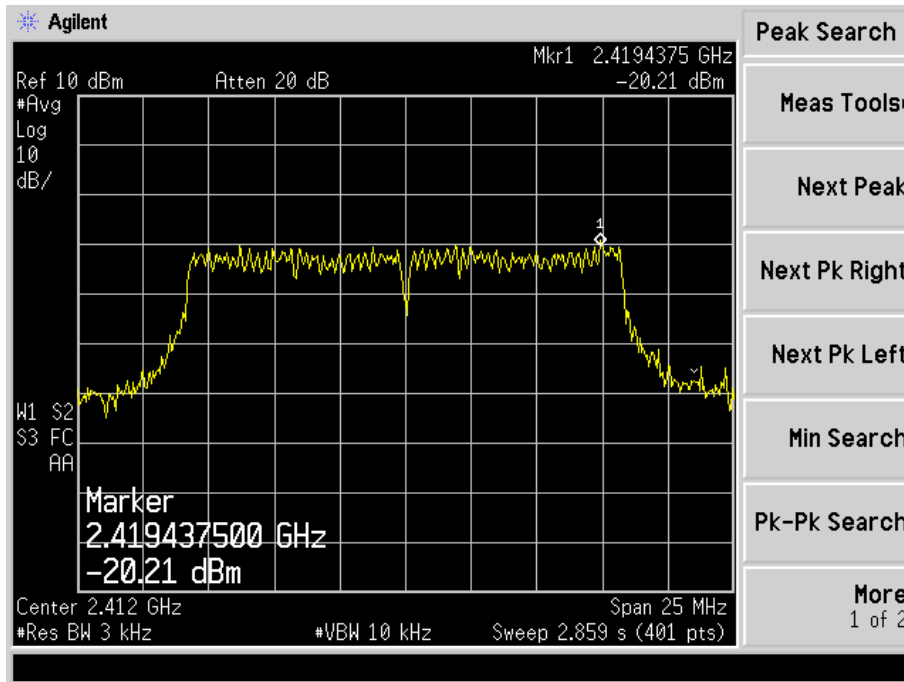


802.11g-Middle Channel

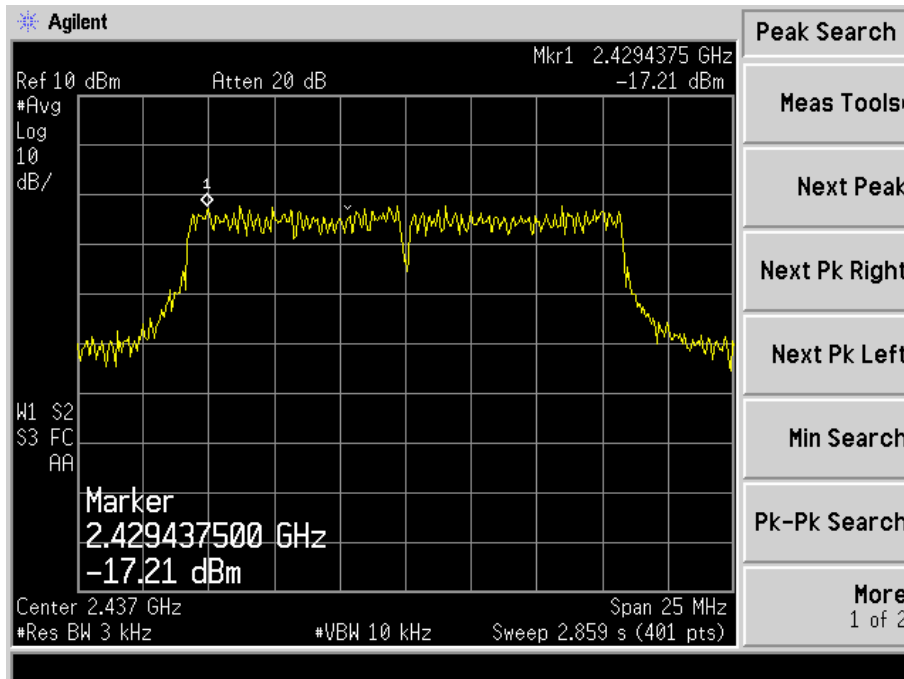


802.11g-High Channel

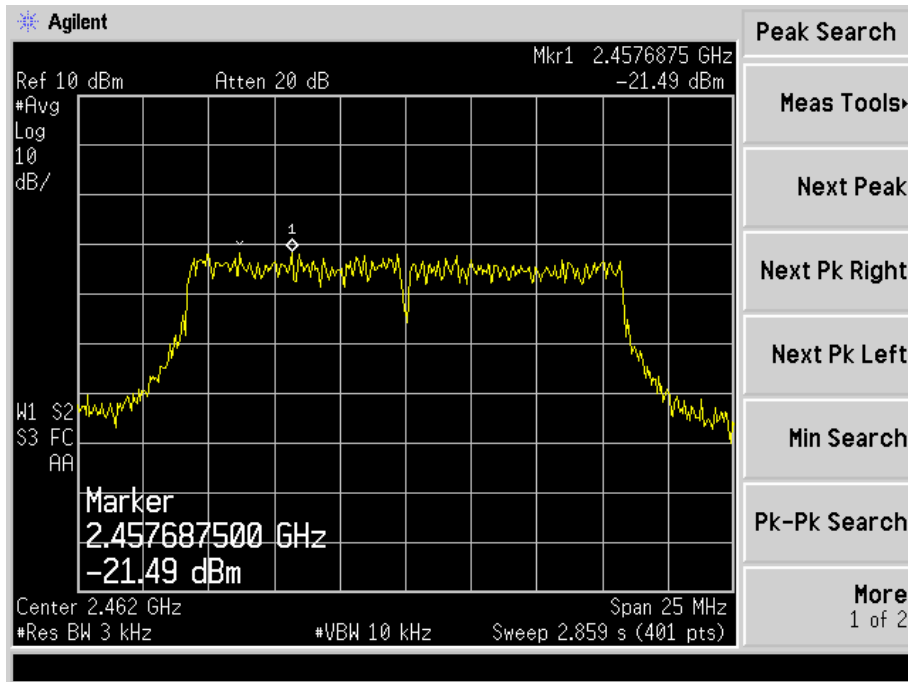


802.11n-HT20-Low Channel

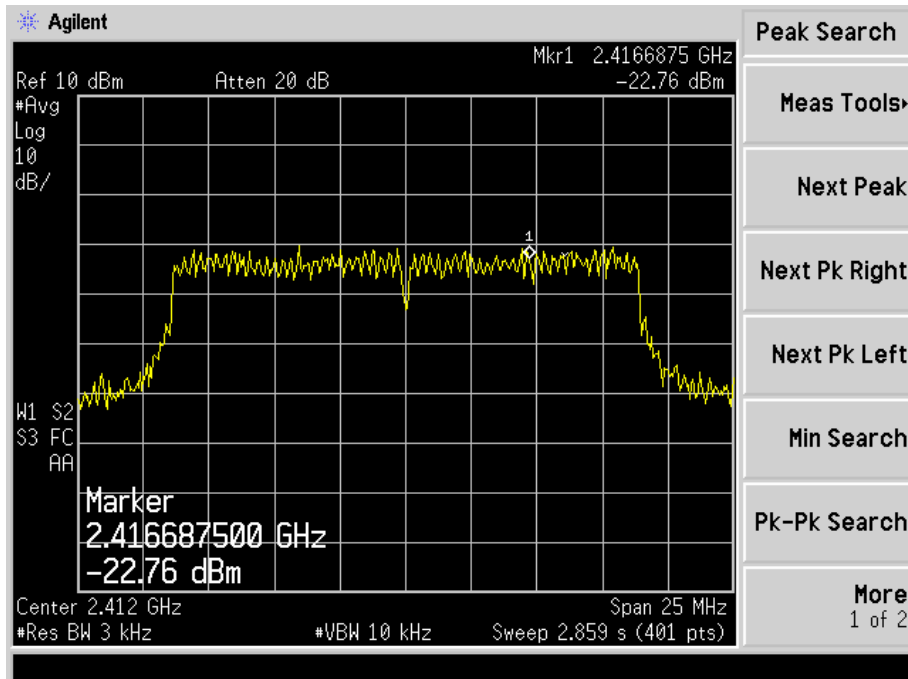

802.11n-HT20-Middle Channel

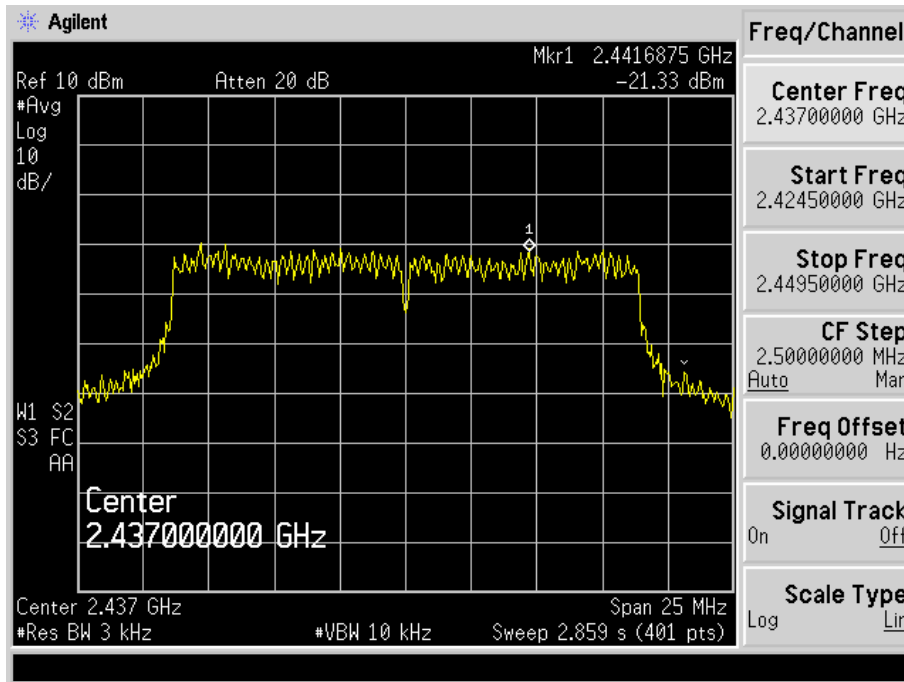

802.11n-HT20-High Channel

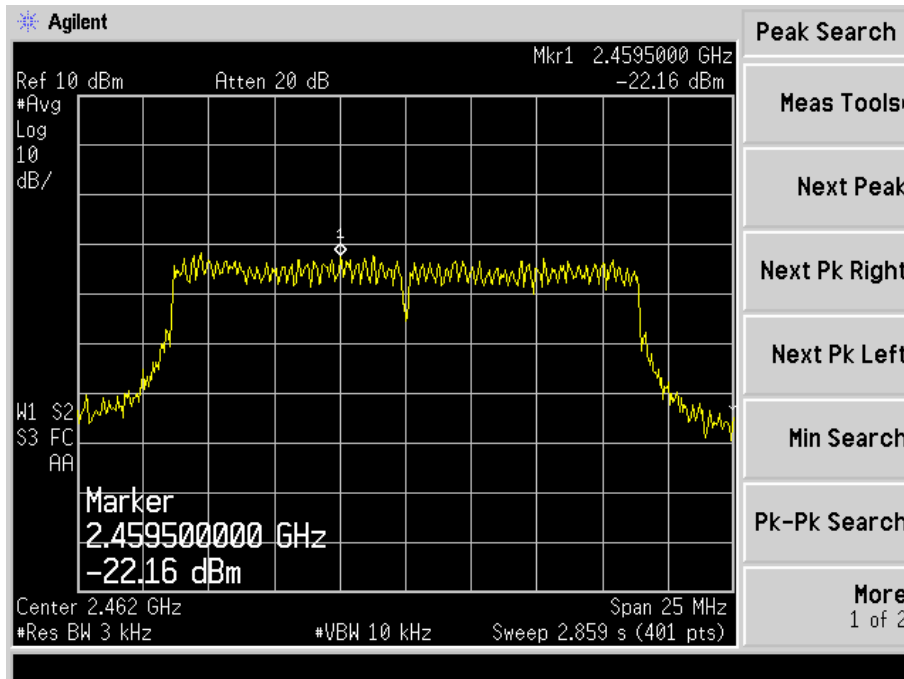

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions

Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

Chain 1

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.061	11.252	≥500
	2437	9.070	11.535	≥500
	2462	8.599	11.380	≥500
802.11g	2412	16.40	16.577	≥500
	2437	16.38	16.562	≥500
	2462	16.37	16.563	≥500
802.11n-HT20	2412	17.60	17.756	≥500
	2437	17.60	17.756	≥500
	2462	17.61	17.740	≥500


Chain 2

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.043	11.515	≥500
	2437	9.071	11.569	≥500
	2462	9.080	11.586	≥500
802.11g	2412	16.37	16.568	≥500
	2437	16.39	16.580	≥500
	2462	16.39	16.565	≥500
802.11n-HT20	2412	17.60	17.748	≥500
	2437	17.62	17.758	≥500
	2462	17.61	17.735	≥500


Please refer to the following test plots:

Chain 1


802.11b-Low Channel

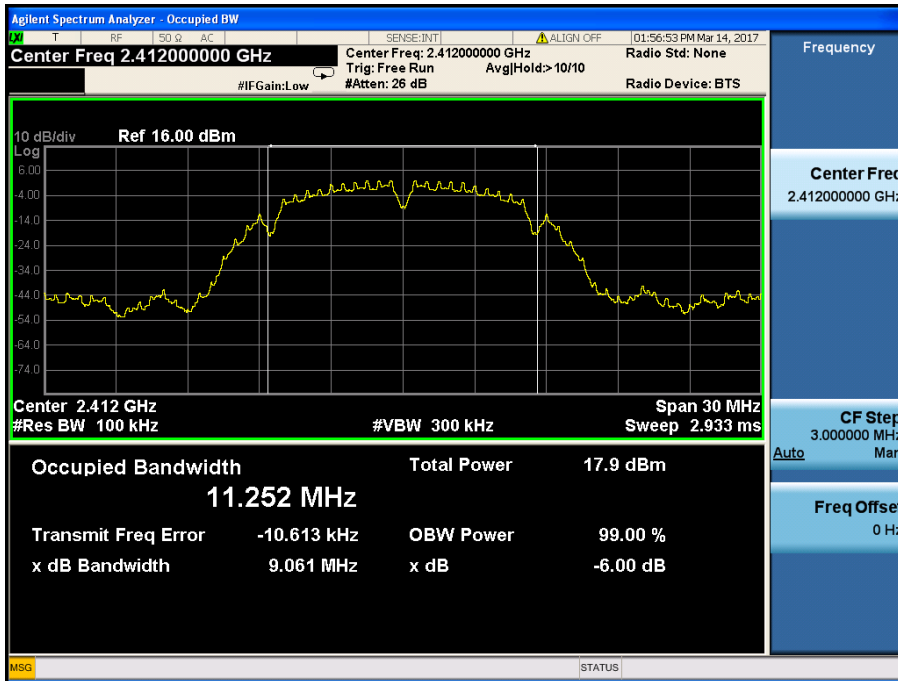


802.11b-Middle Channel

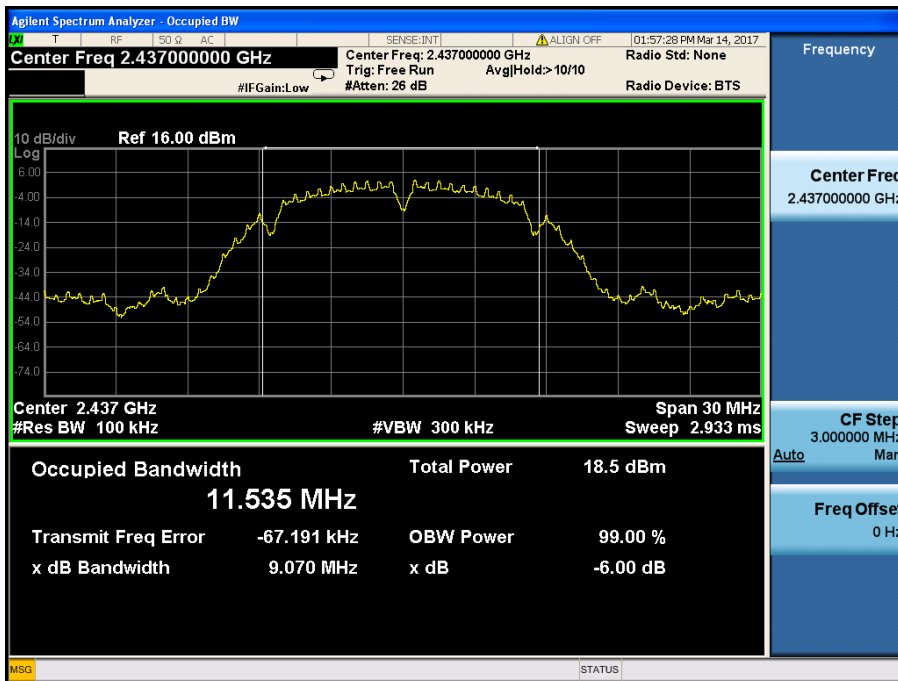


802.11b-High Channel

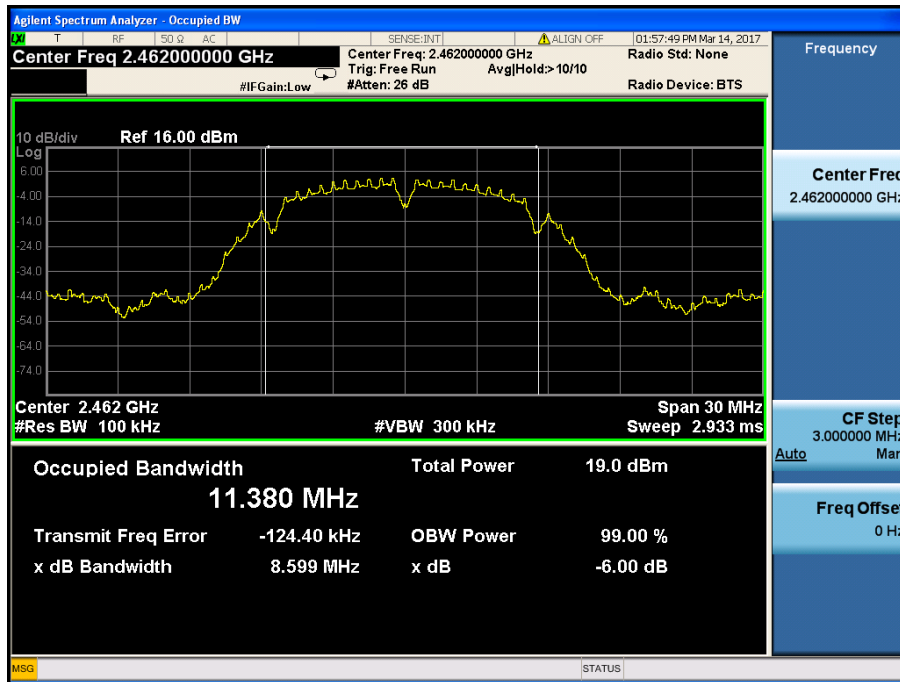


802.11g-Low Channel

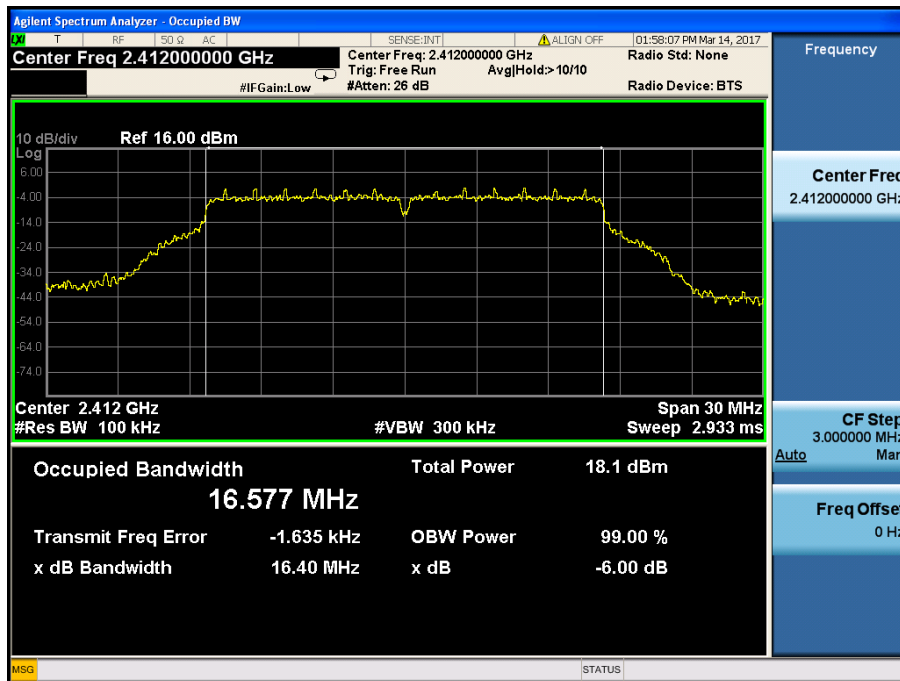


802.11g-Middle Channel

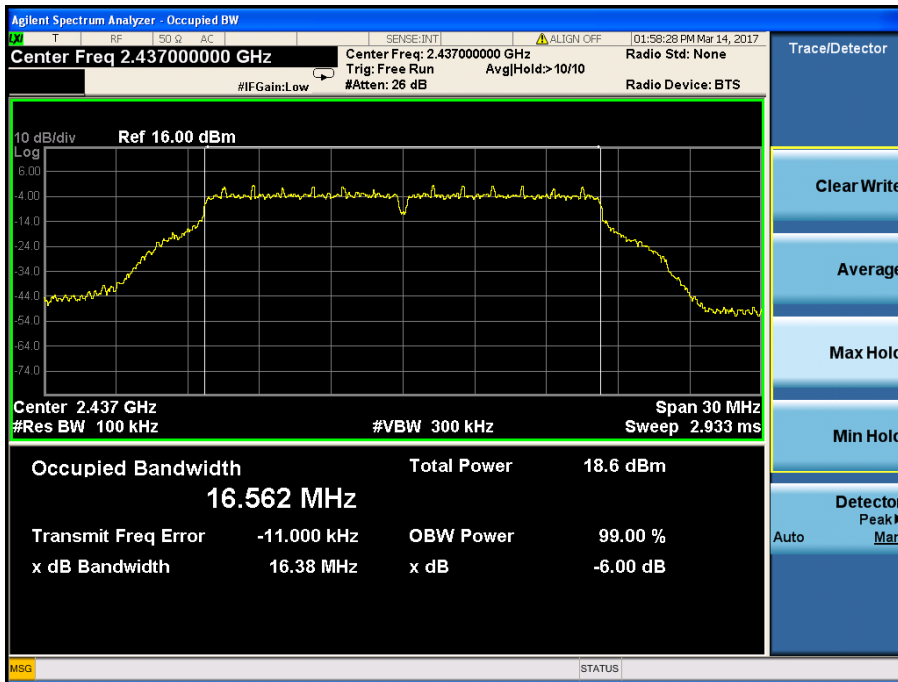


802.11g-High Channel

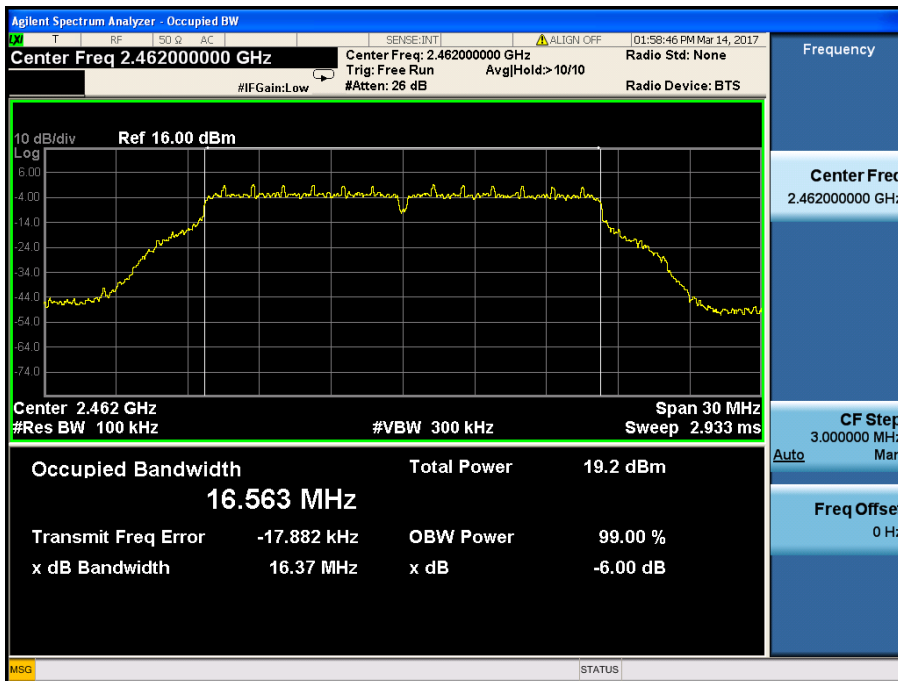


802.11n-HT20-Low Channel

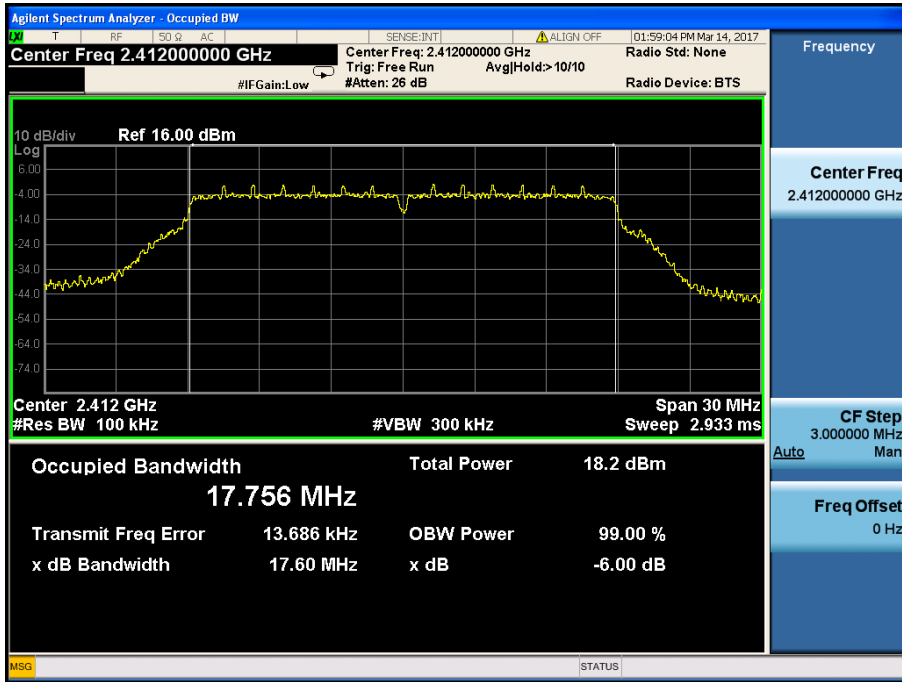

802.11n-HT20-Middle Channel

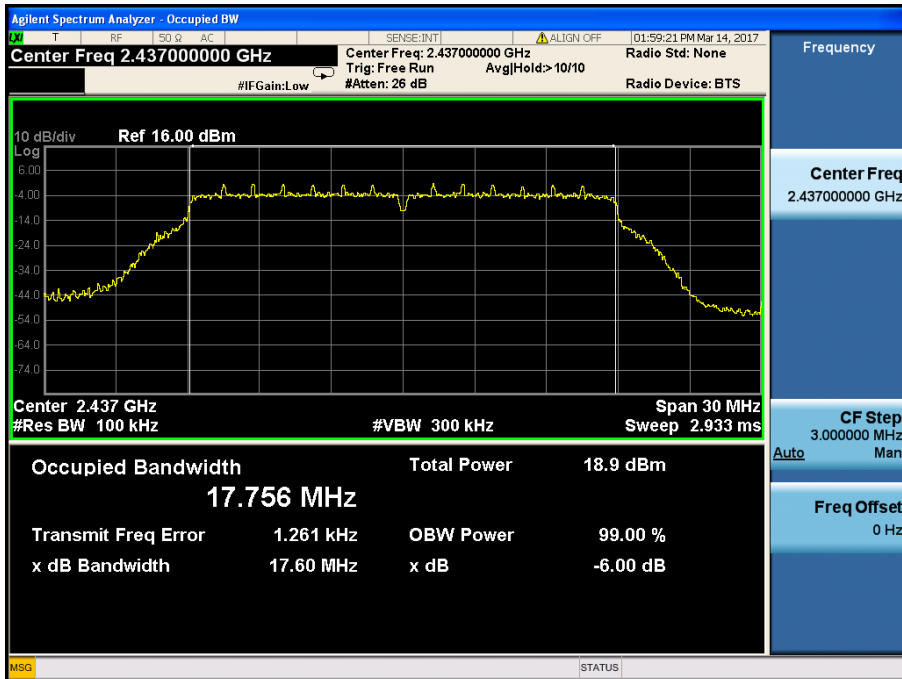


802.11n-HT20-High Channel

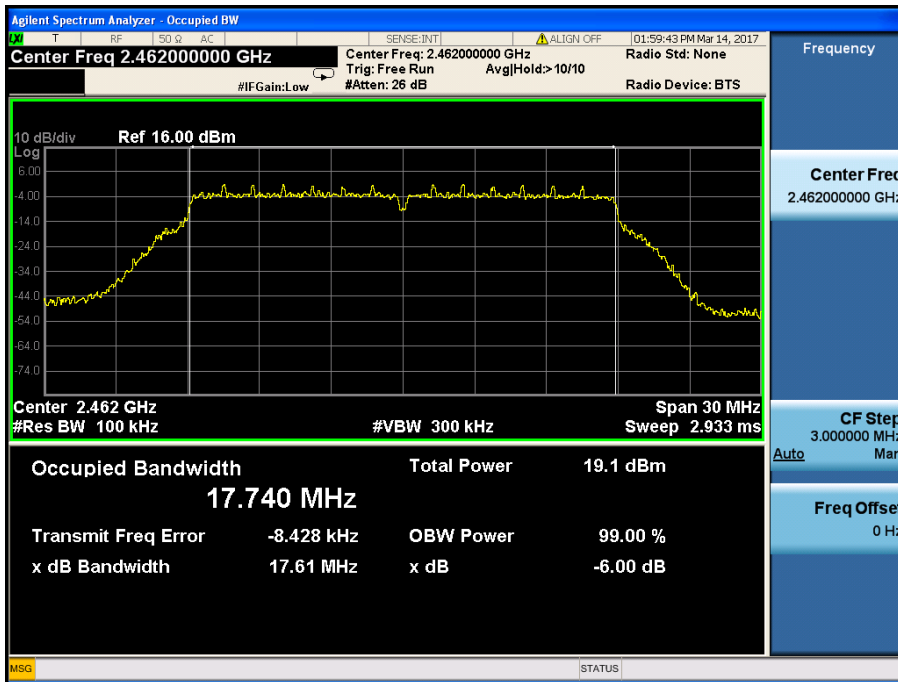


Chain 2


802.11b-Low Channel

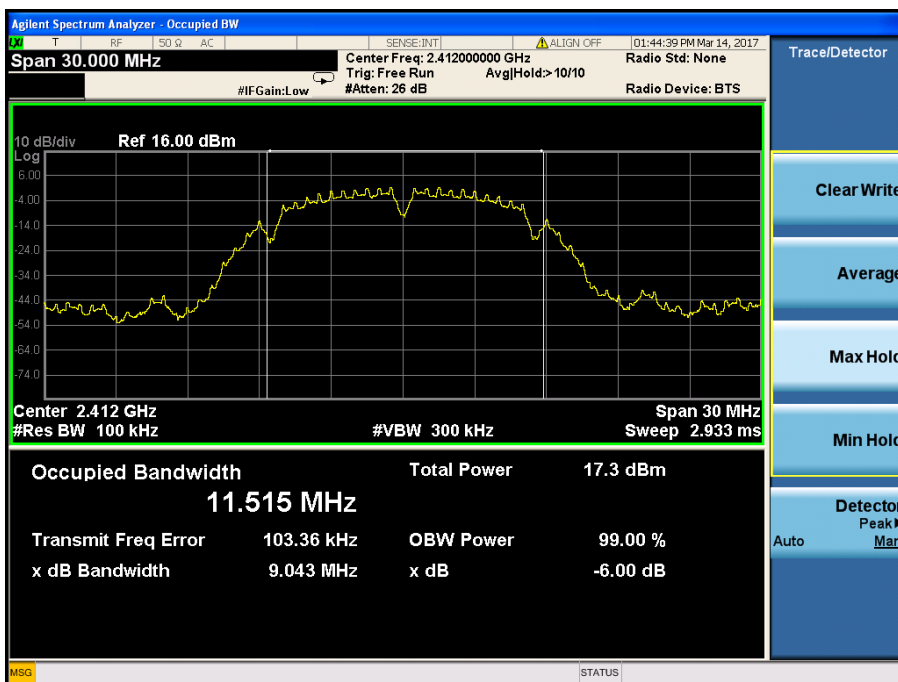


802.11b-Middle Channel

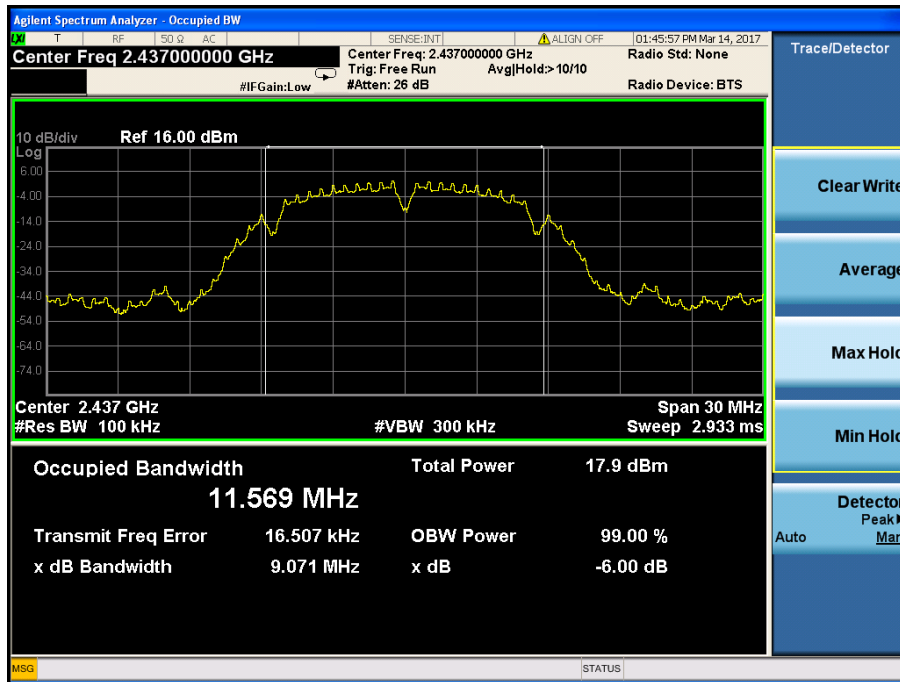


802.11b-High Channel

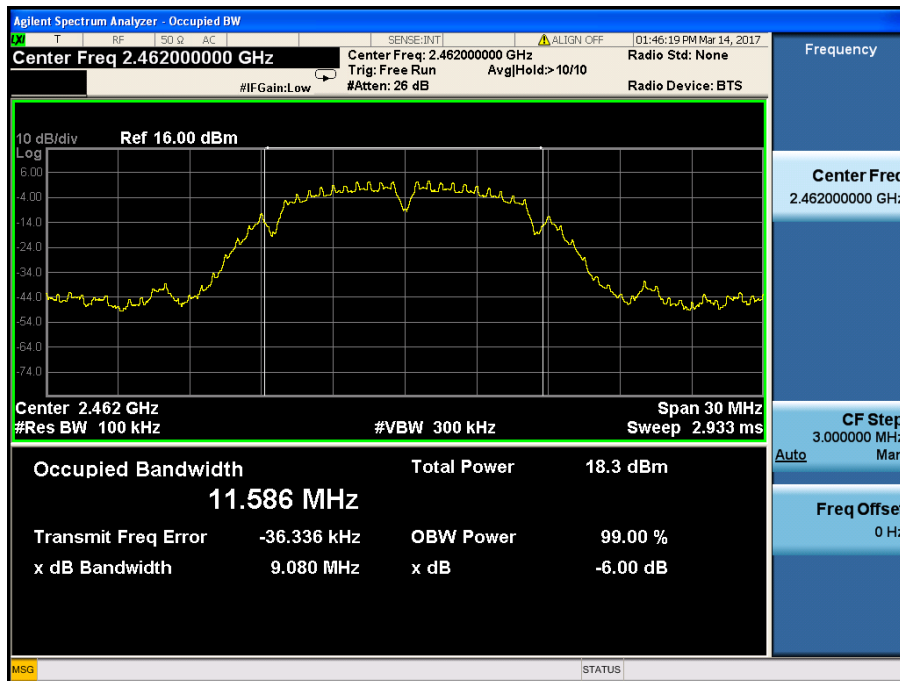


802.11g-Low Channel

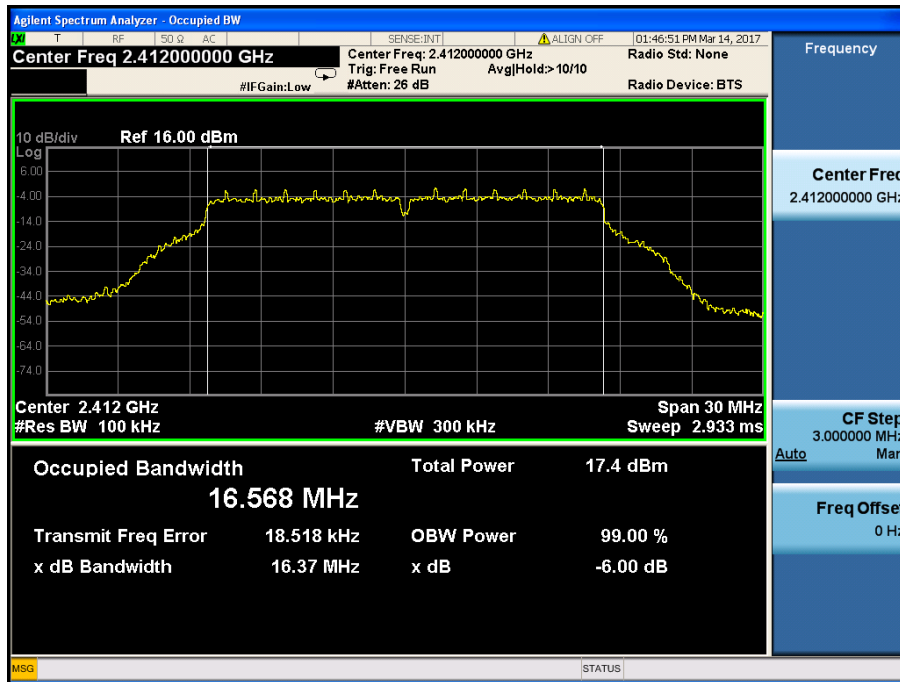


802.11g-Middle Channel

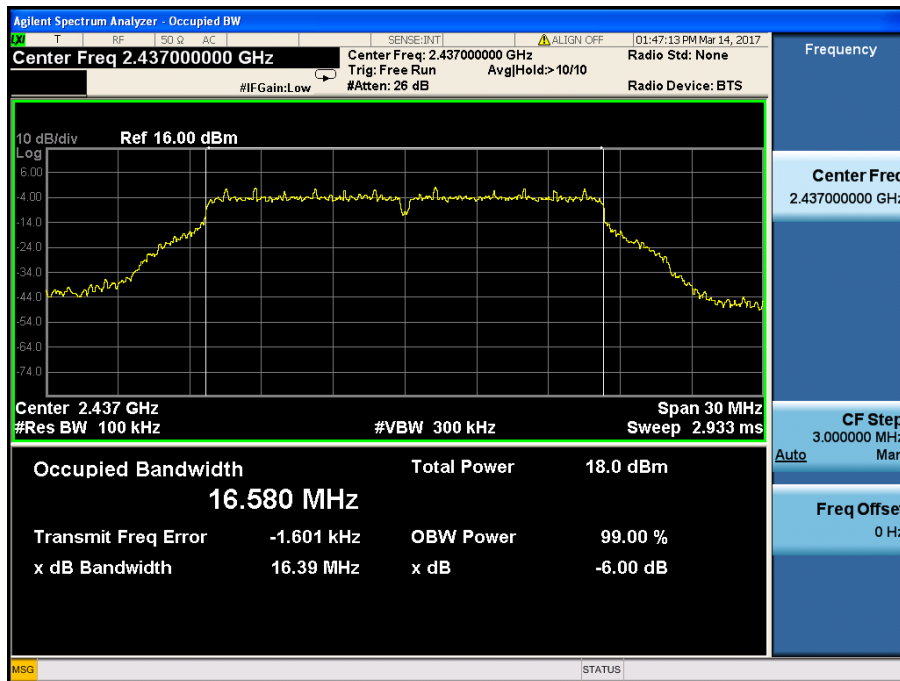


802.11g-High Channel

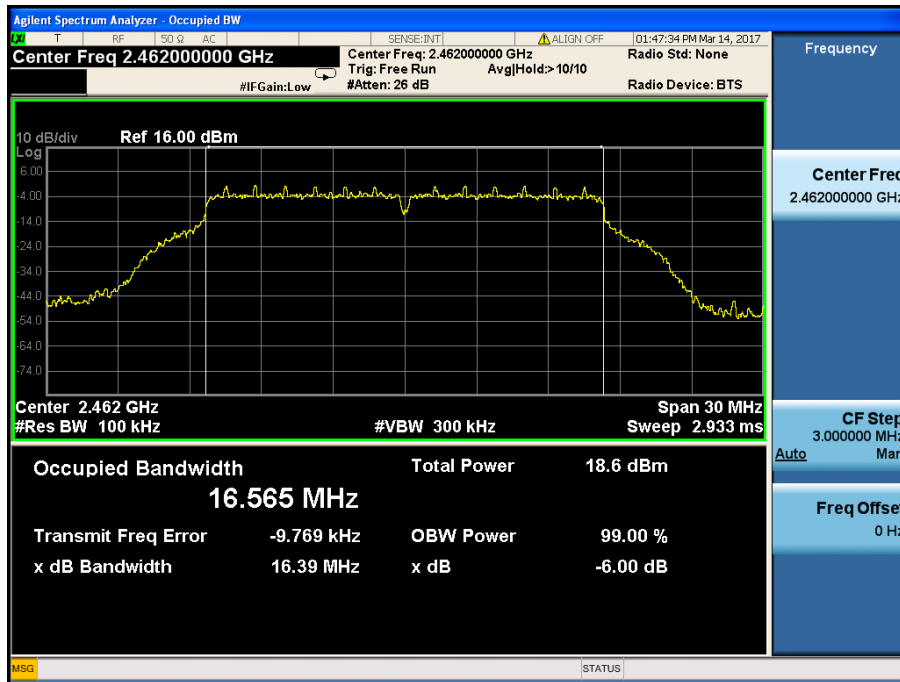


802.11n-HT20-Low Channel

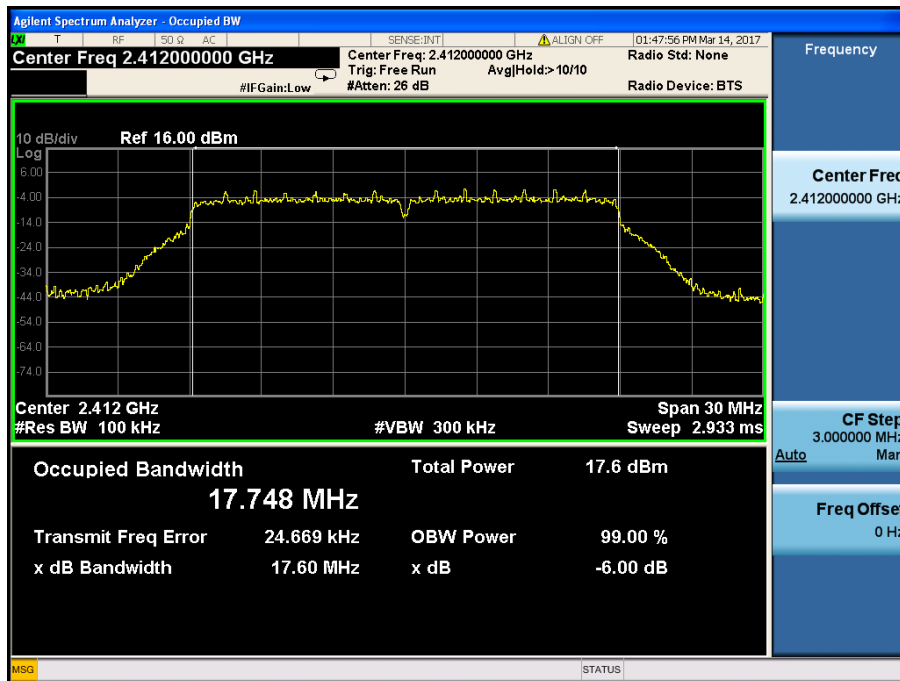

802.11n-HT20-Middle Channel

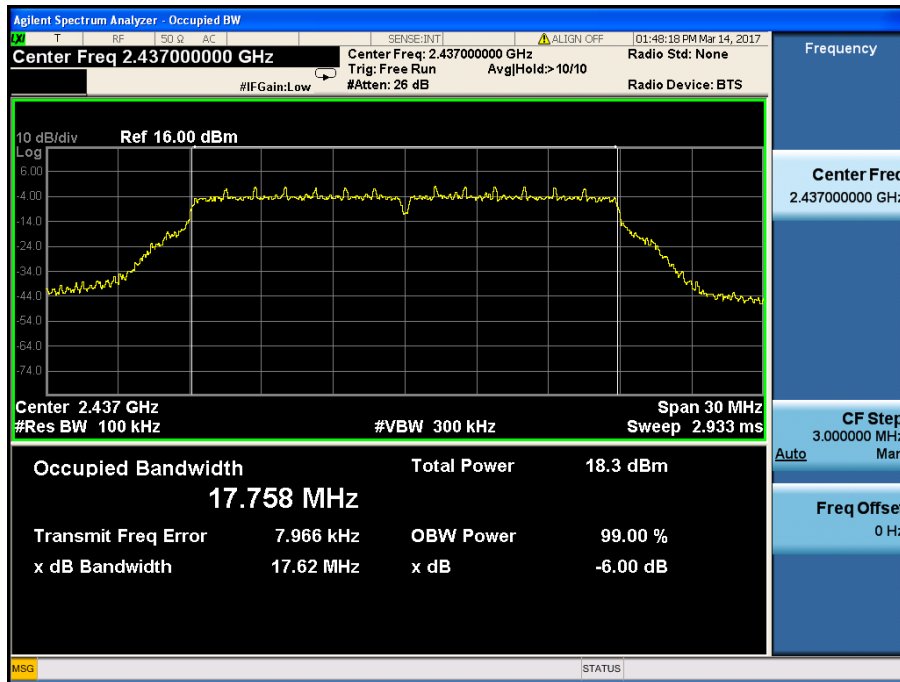

802.11n-HT20-High Channel

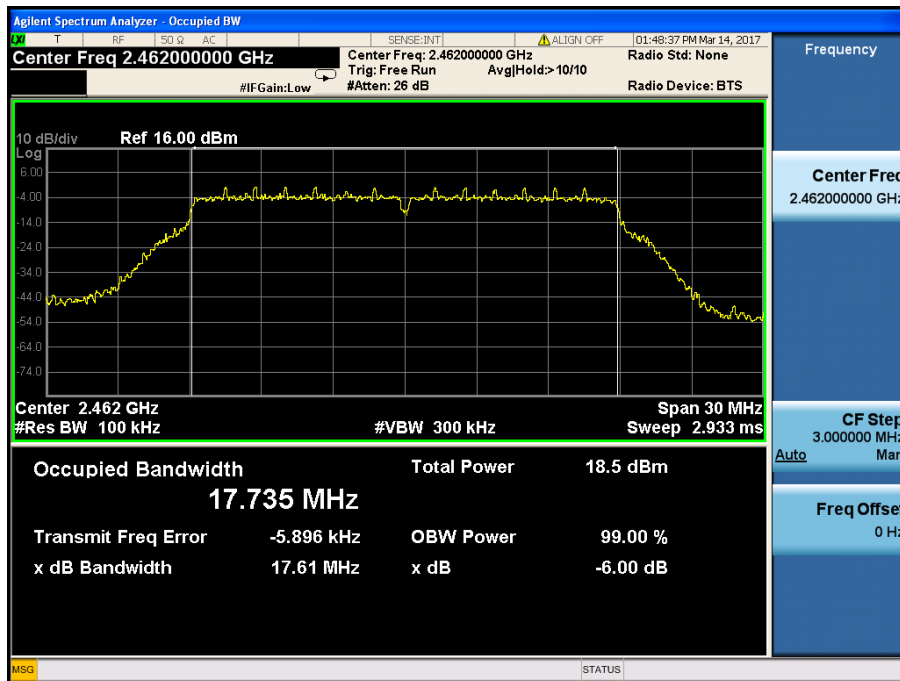

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to KDB-558074 D01 v04, (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98 \%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Power 1 dBm	Power 2 dBm	Total Power dBm	Output Power mW	Limit mW
802.11b_ 11Mbps	2412	12.2	11.22	14.75	29.839	1000
	2437	12.62	11.95	15.31	33.949	1000
	2462	13.05	12.33	15.72	37.284	1000
802.11g_54Mbps	2412	16.53	15.78	19.18	82.822	1000
	2437	17.27	16.29	19.82	95.893	1000
	2462	17.52	16.76	19.92	98.264	1000
802.11n HT20_MCS7	2412	16.45	15.78	19.14	82.001	1000
	2437	16.84	16.29	19.58	90.866	1000
	2462	17.25	16.57	19.93	98.483	1000


Please refer to the following test plots:

Chain 1


802.11b-11Mbps-Low Channel

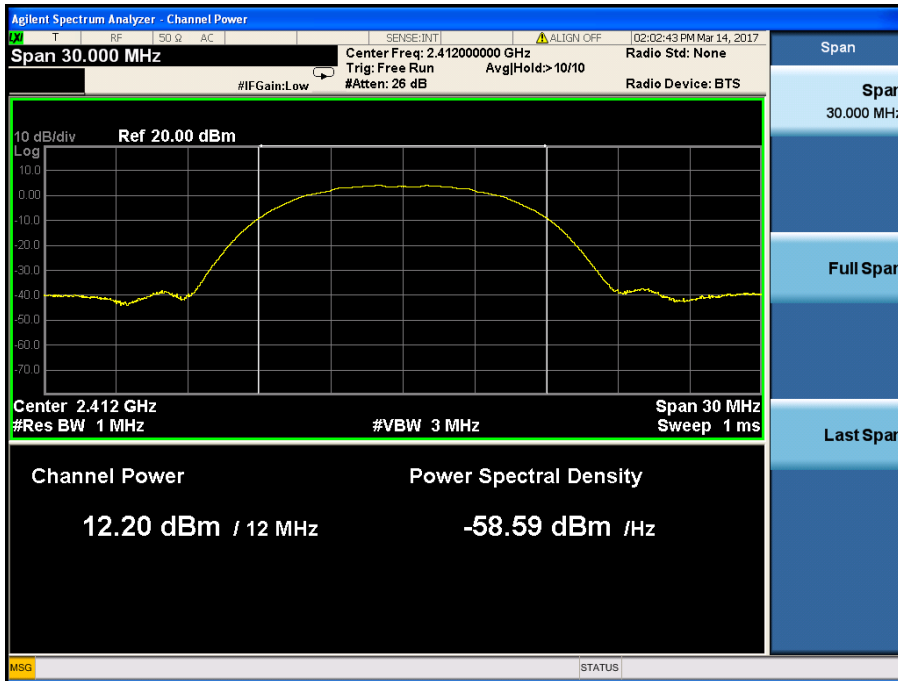


802.11b -11Mbps-Middle Channel

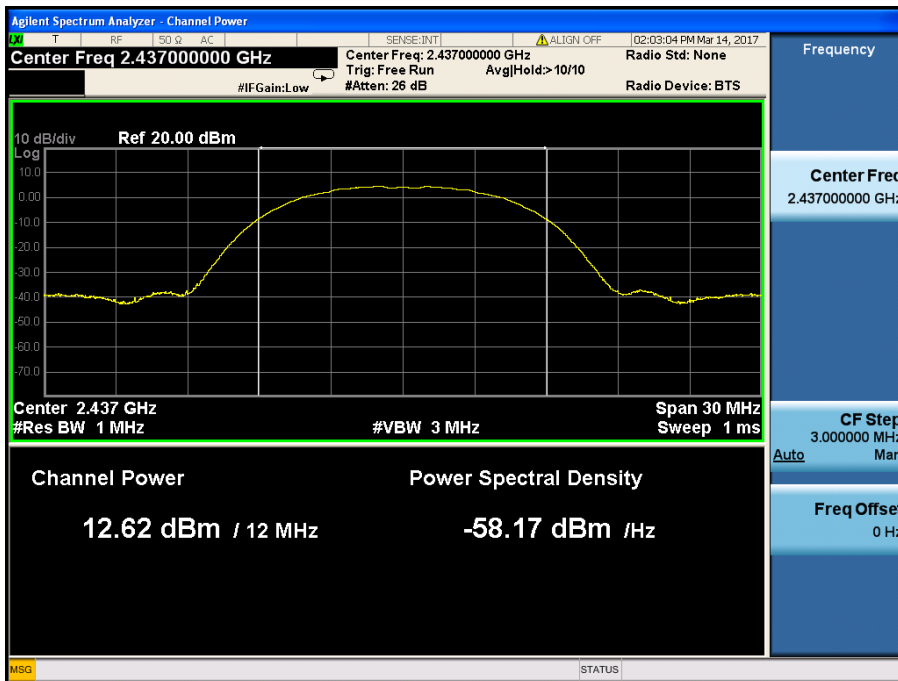


802.11b -11Mbps-High Channel

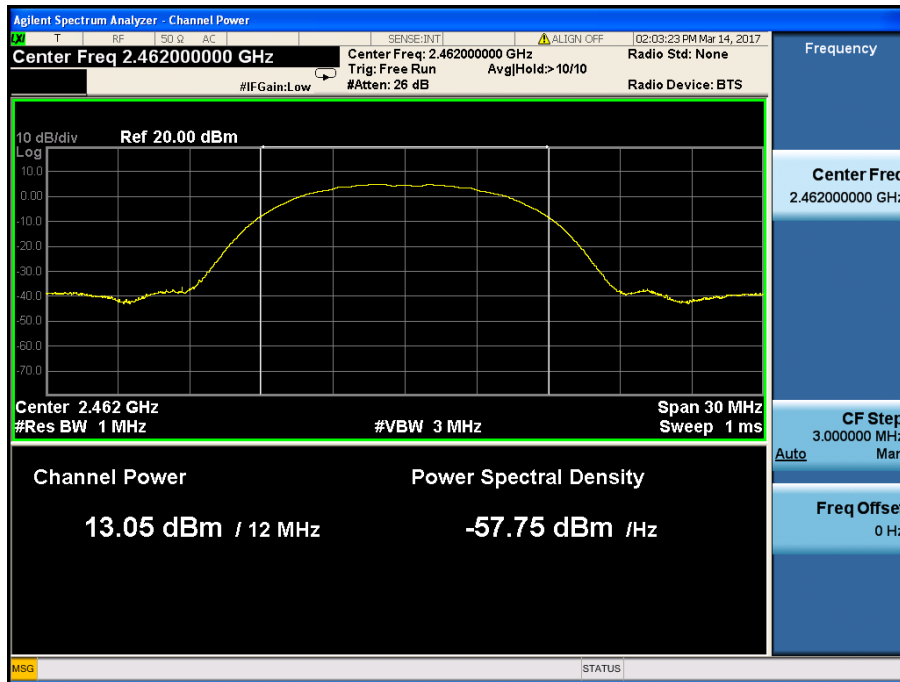


802.11g-54Mbps-Low Channel

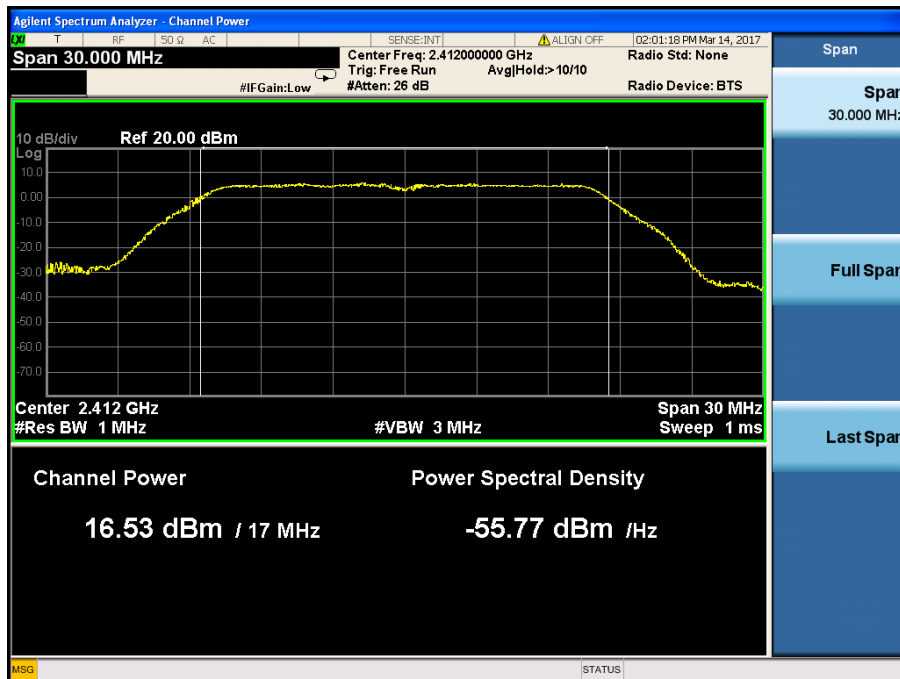


802.11g-54Mbps-Middle Channel

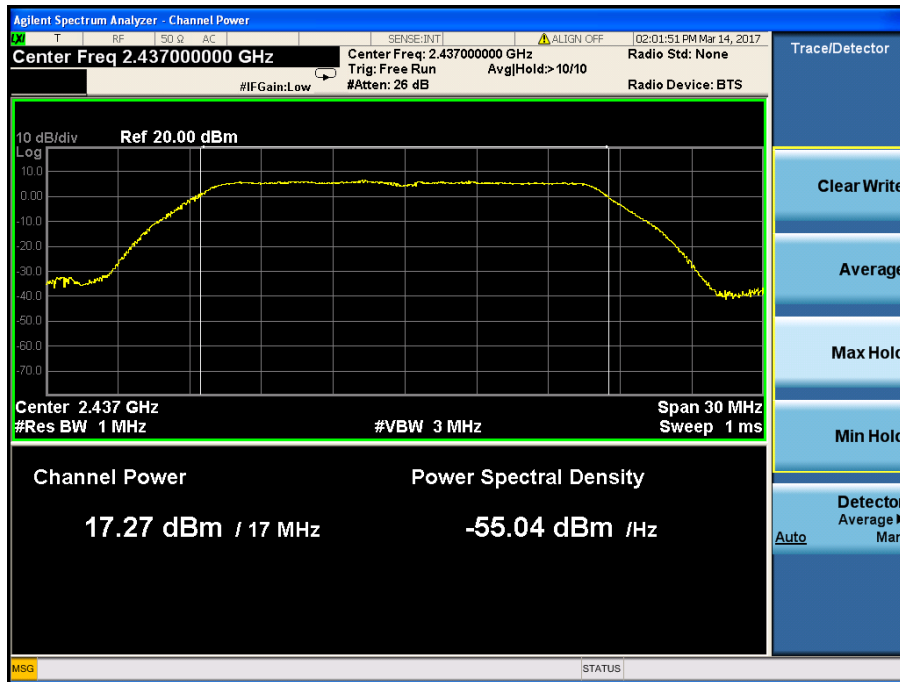


802.11g-54Mbps-High Channel

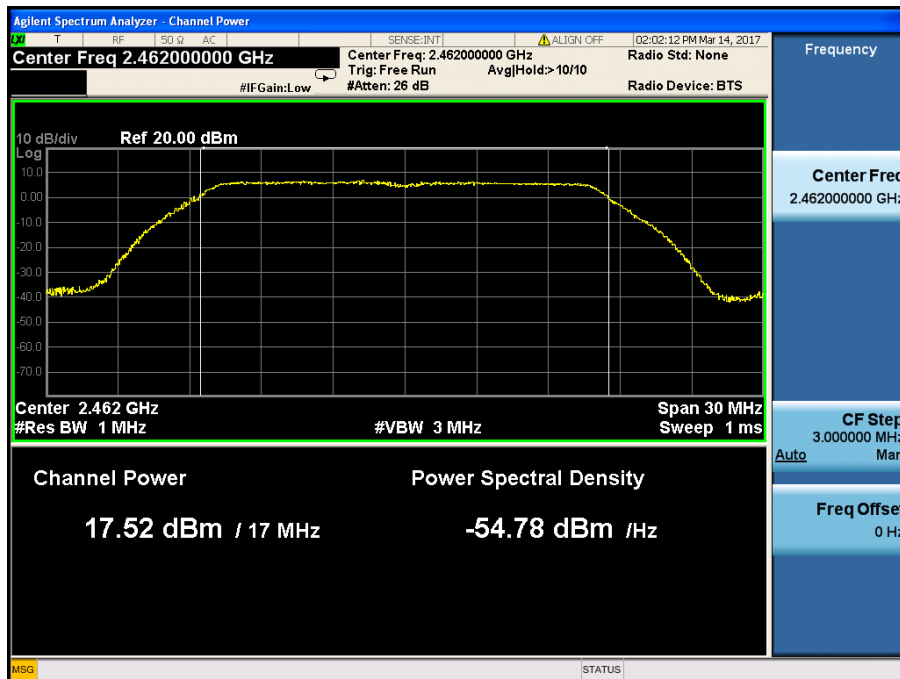


802.11n-HT20-MCS7-Low Channel

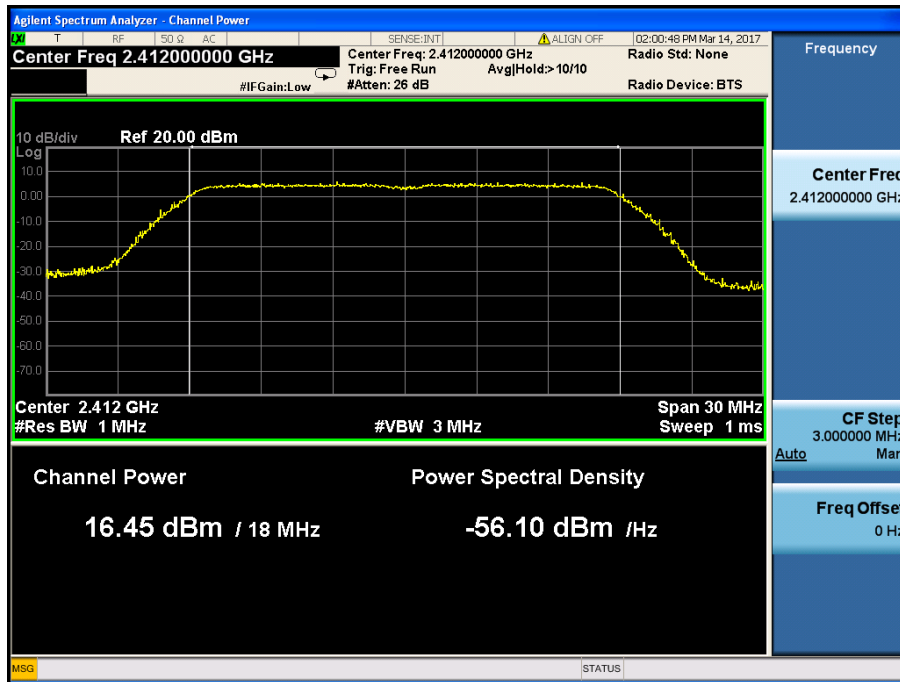

802.11n-HT20-MCS7-Middle Channel

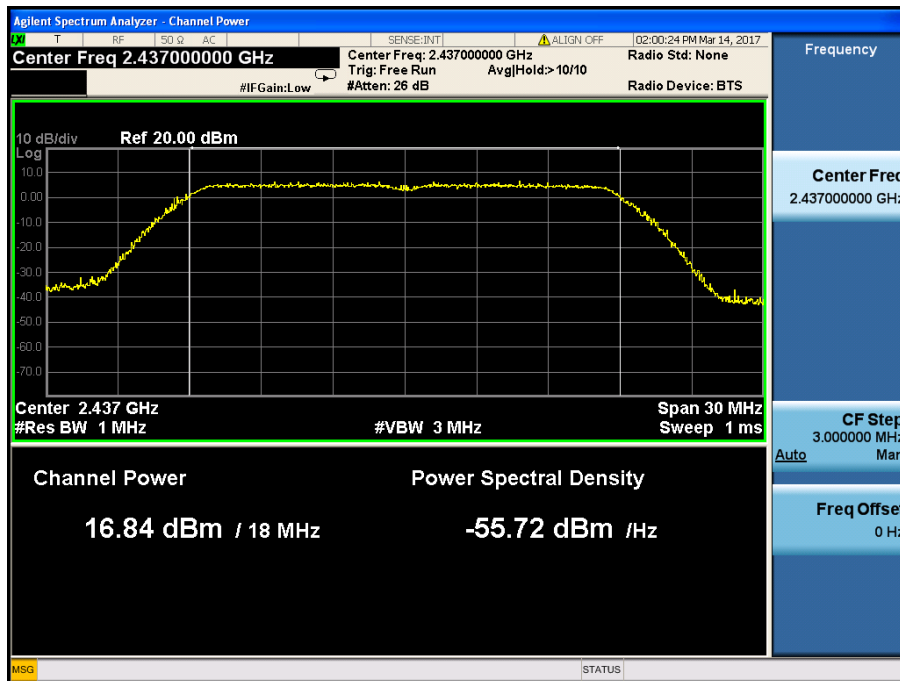


802.11n-HT20-MCS7-High Channel

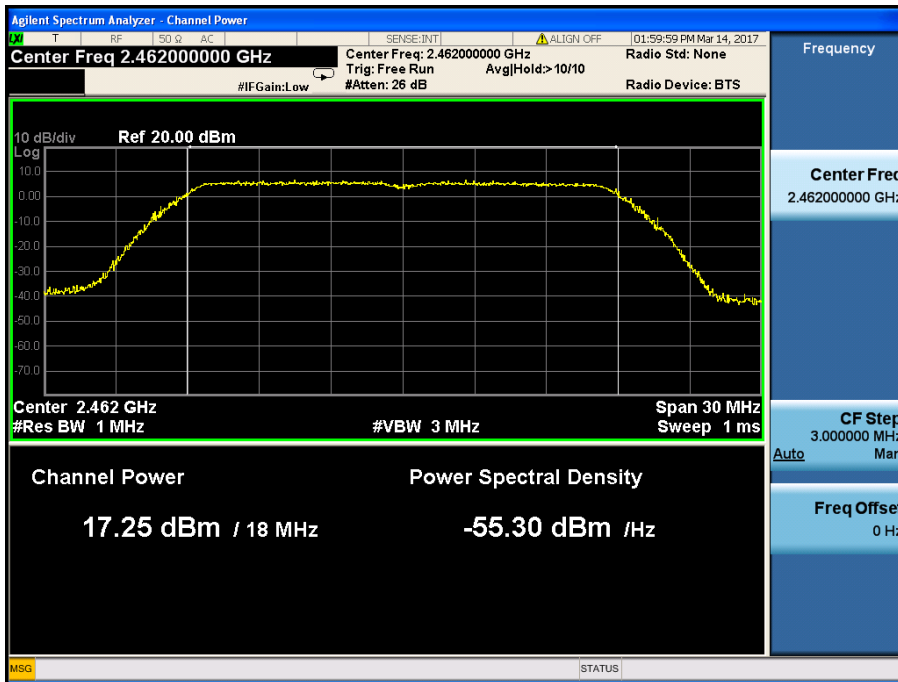


Chain 2


802.11b-11Mbps-Low Channel

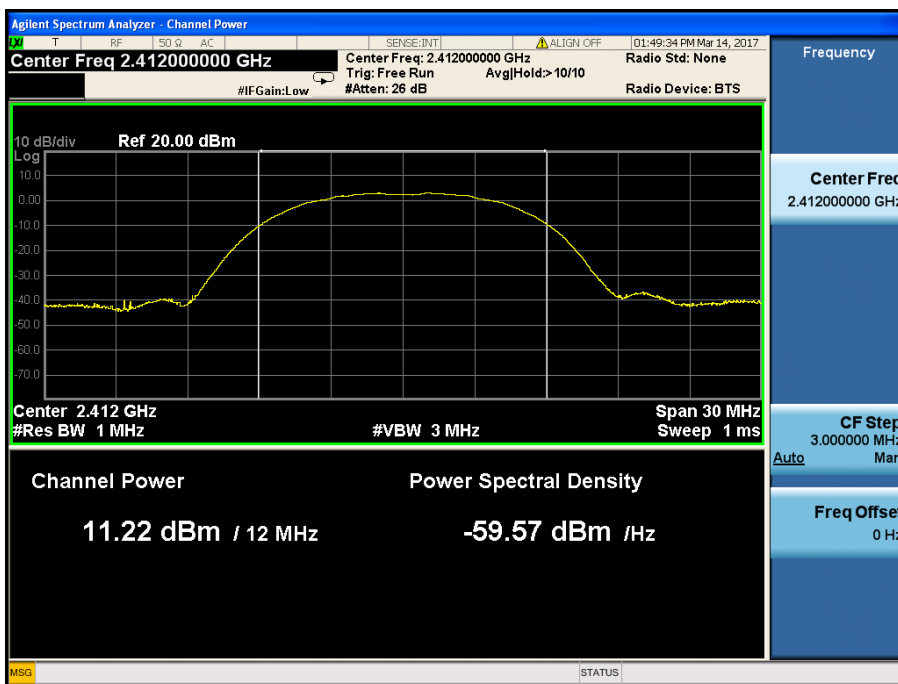


802.11b -11Mbps-Middle Channel

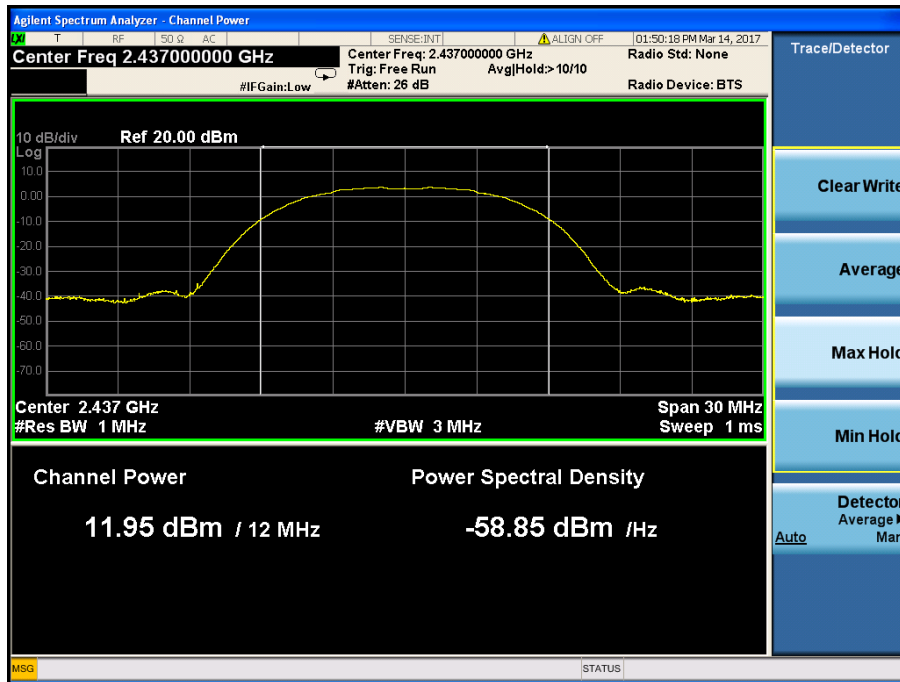


802.11b -11Mbps-High Channel

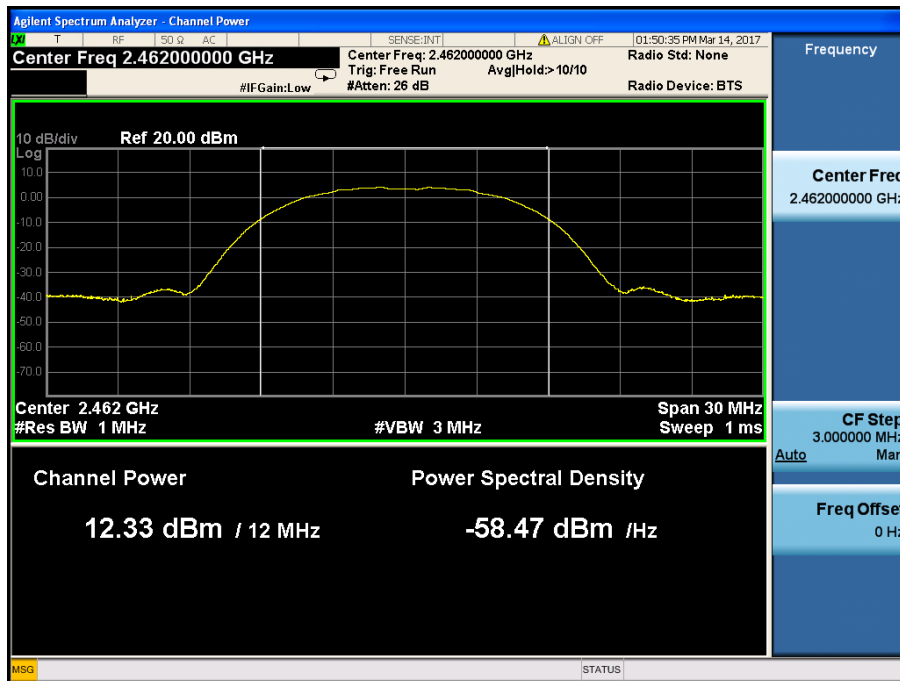


802.11g-54Mbps-Low Channel

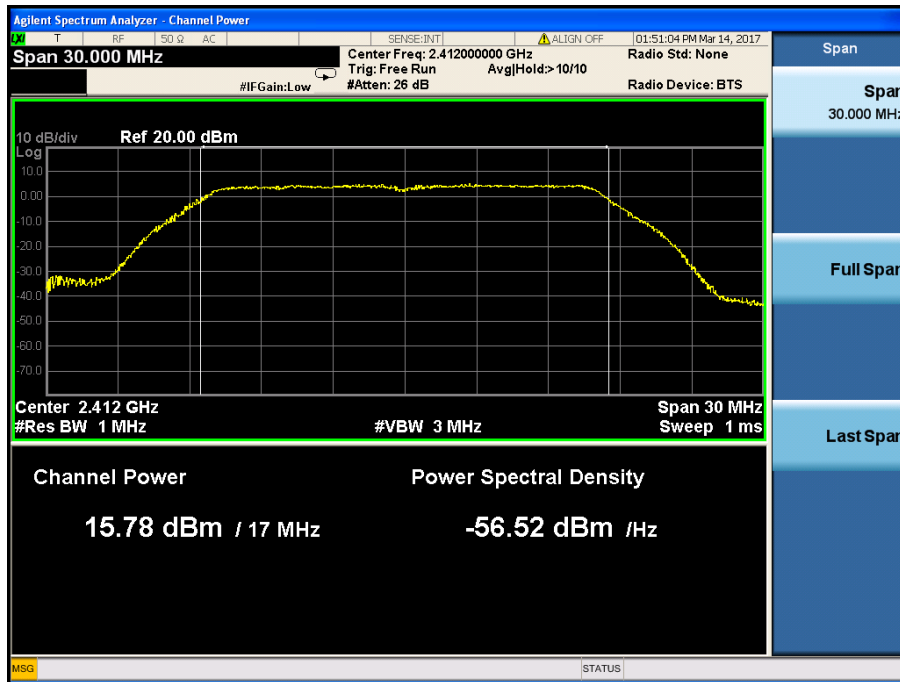


802.11g-54Mbps-Middle Channel

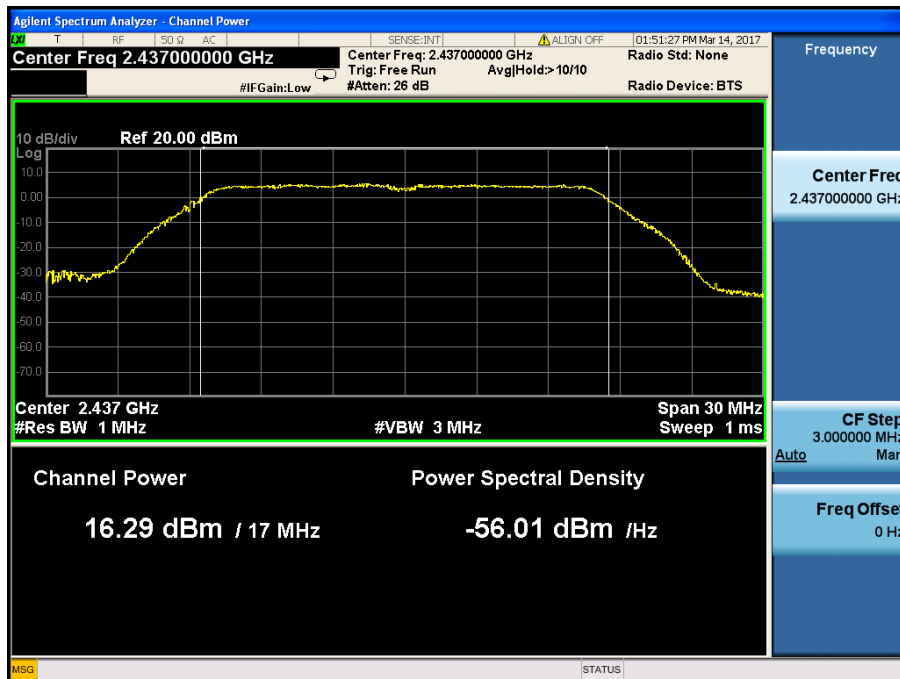


802.11g-54Mbps-High Channel

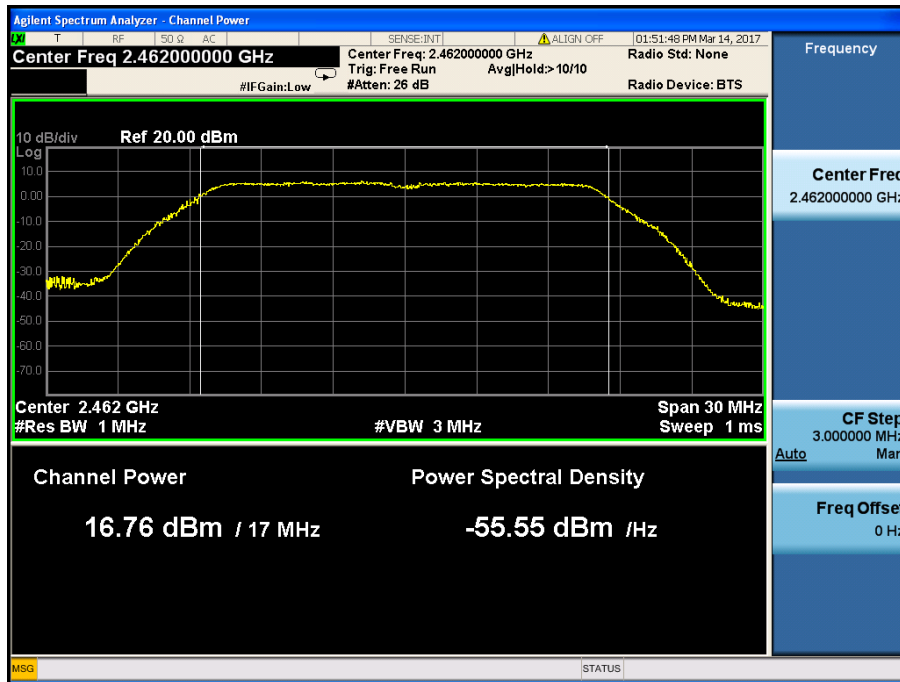


802.11n-HT20-MCS7-Low Channel

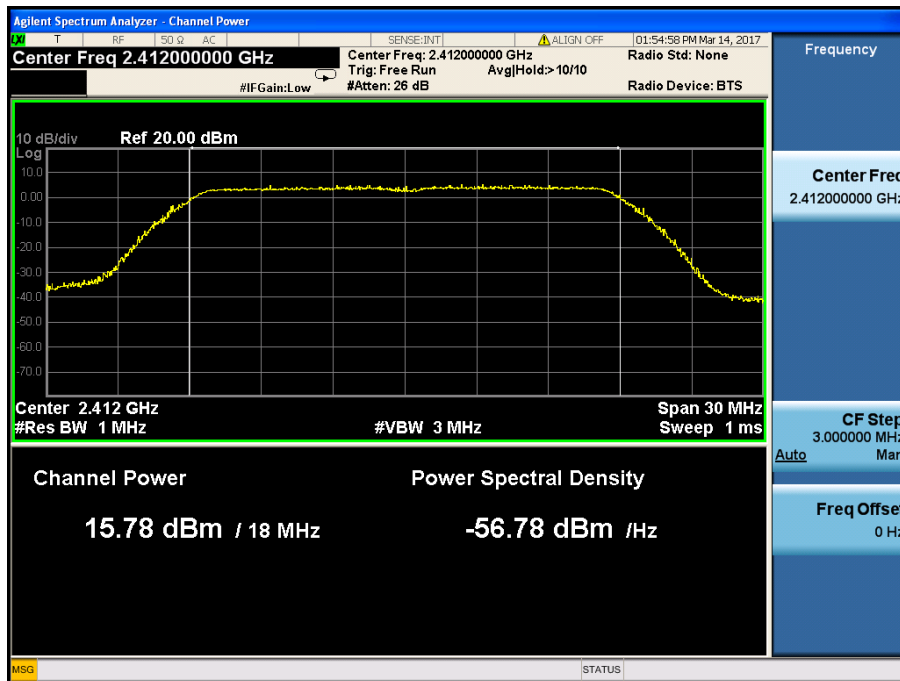

802.11n-HT20-MCS7-Middle Channel

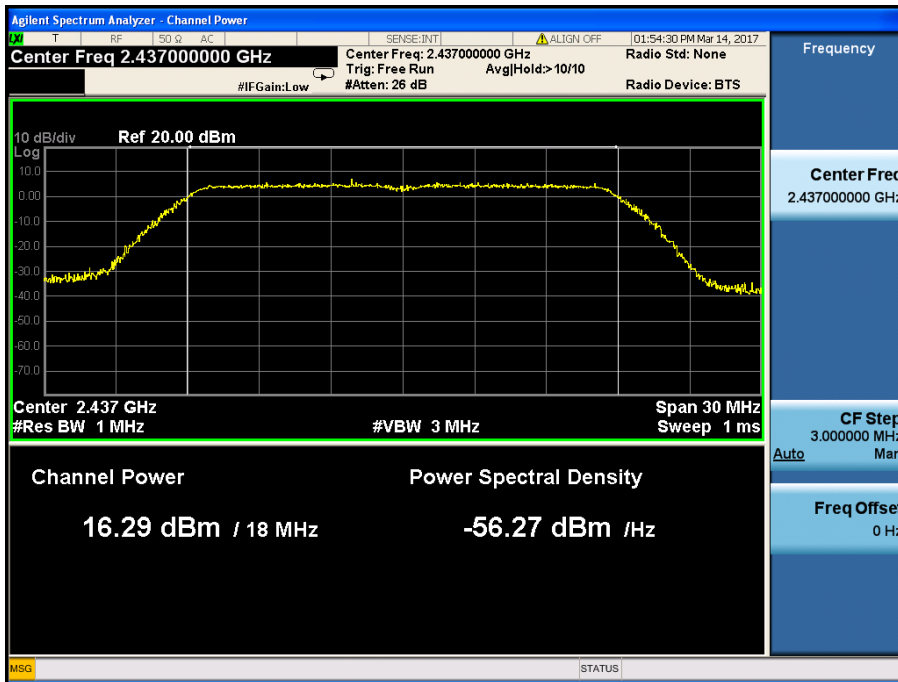

802.11n-HT20-MCS7-High Channel

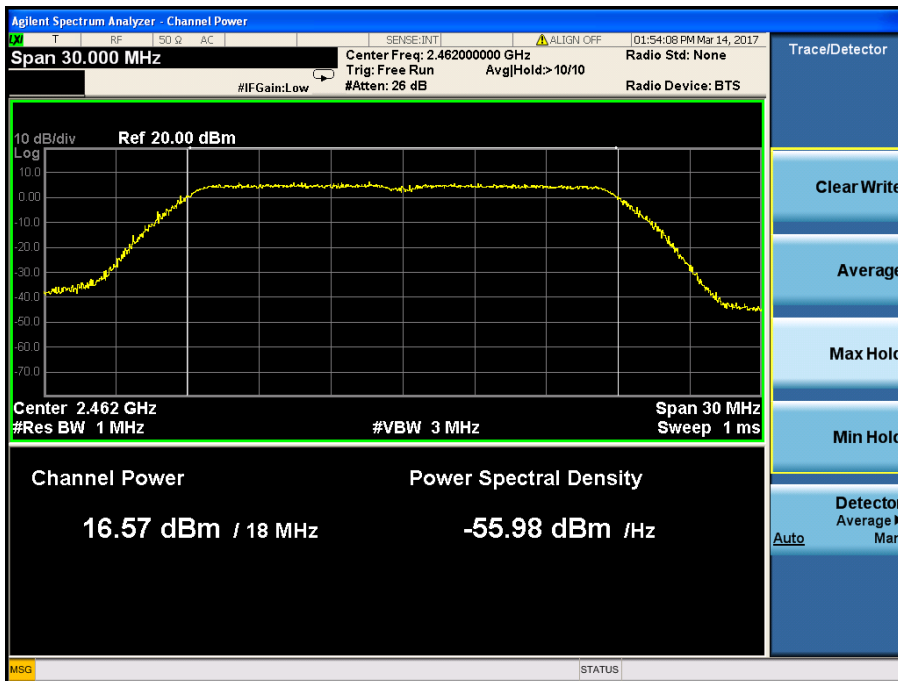

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

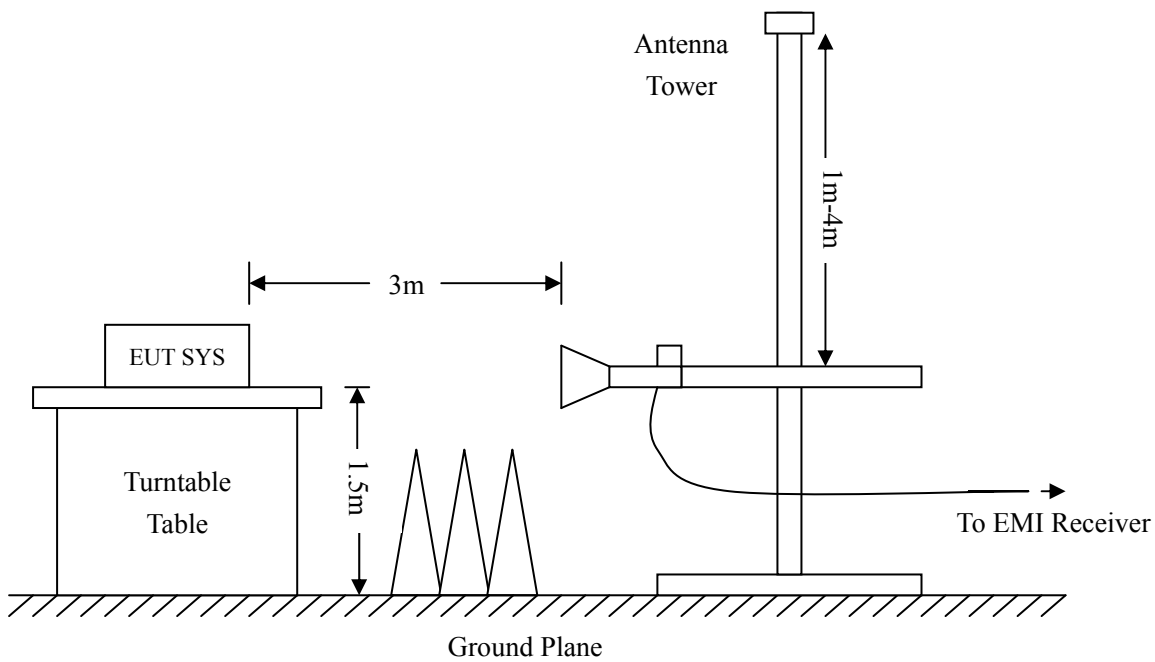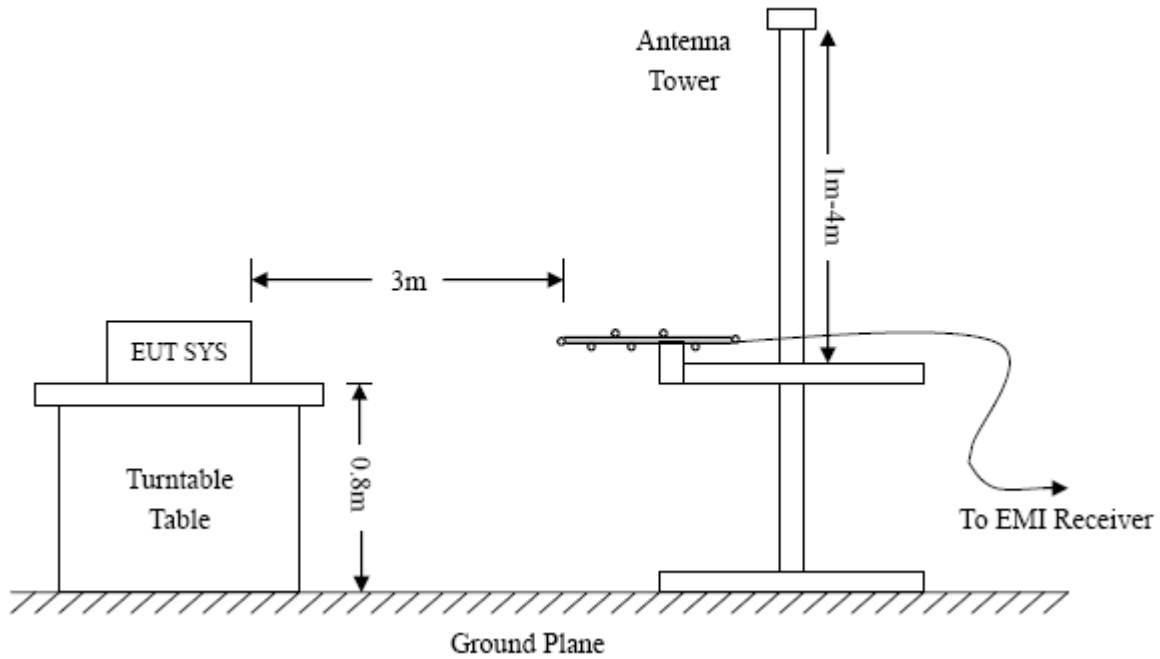

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.6 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: *Tablet PC*
 Tested Model: *MT-1001*
 Operating Condition: *802.11b Transmitting Low Channel-2412MHz (worst case)*
 Comment: *DC 3.7V by battery*

Test Specification: *Horizontal*

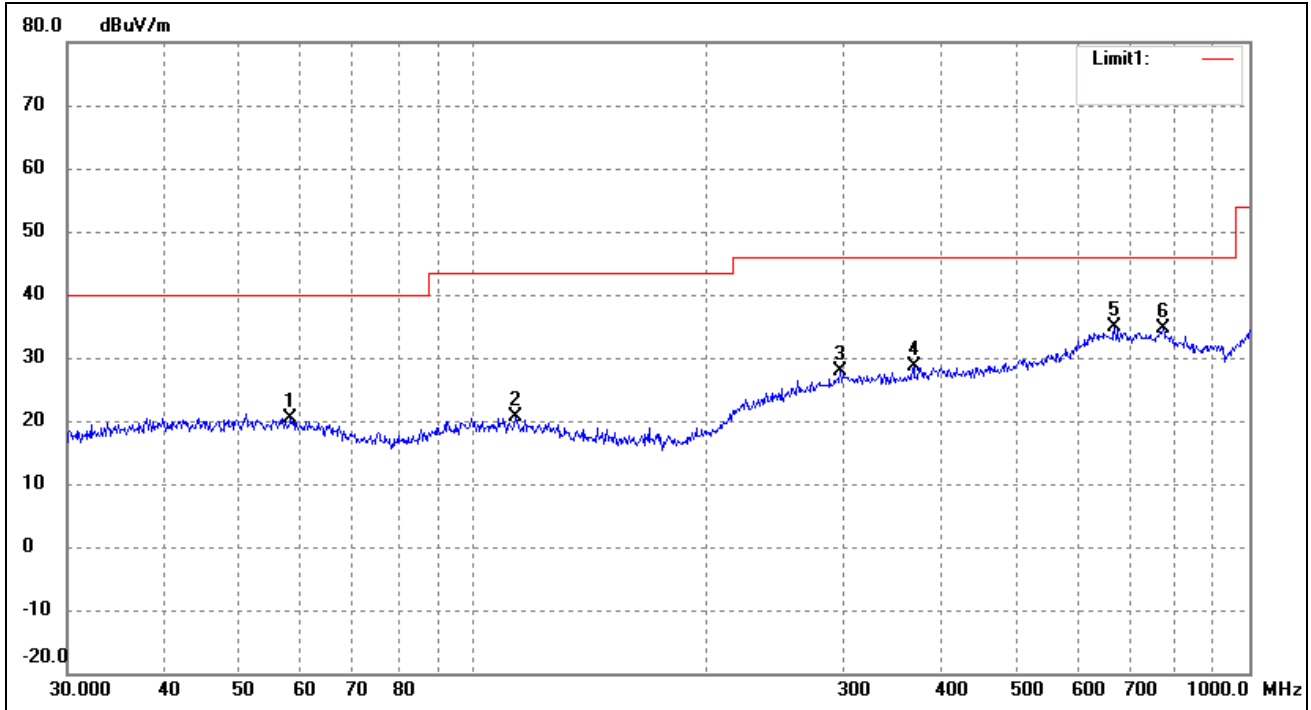

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	58.2030	15.43	4.98	20.41	40.00	-19.59	235	100	peak
2	113.3163	15.84	4.86	20.70	43.50	-22.80	94	100	peak
3	297.2241	16.09	11.84	27.93	46.00	-18.07	350	100	peak
4	369.4047	16.88	11.86	28.74	46.00	-17.26	105	100	peak
5	670.4893	16.65	18.16	34.81	46.00	-11.19	182	100	peak
6	774.1584	17.36	17.19	34.55	46.00	-11.45	347	100	peak

Test Specification: Vertical

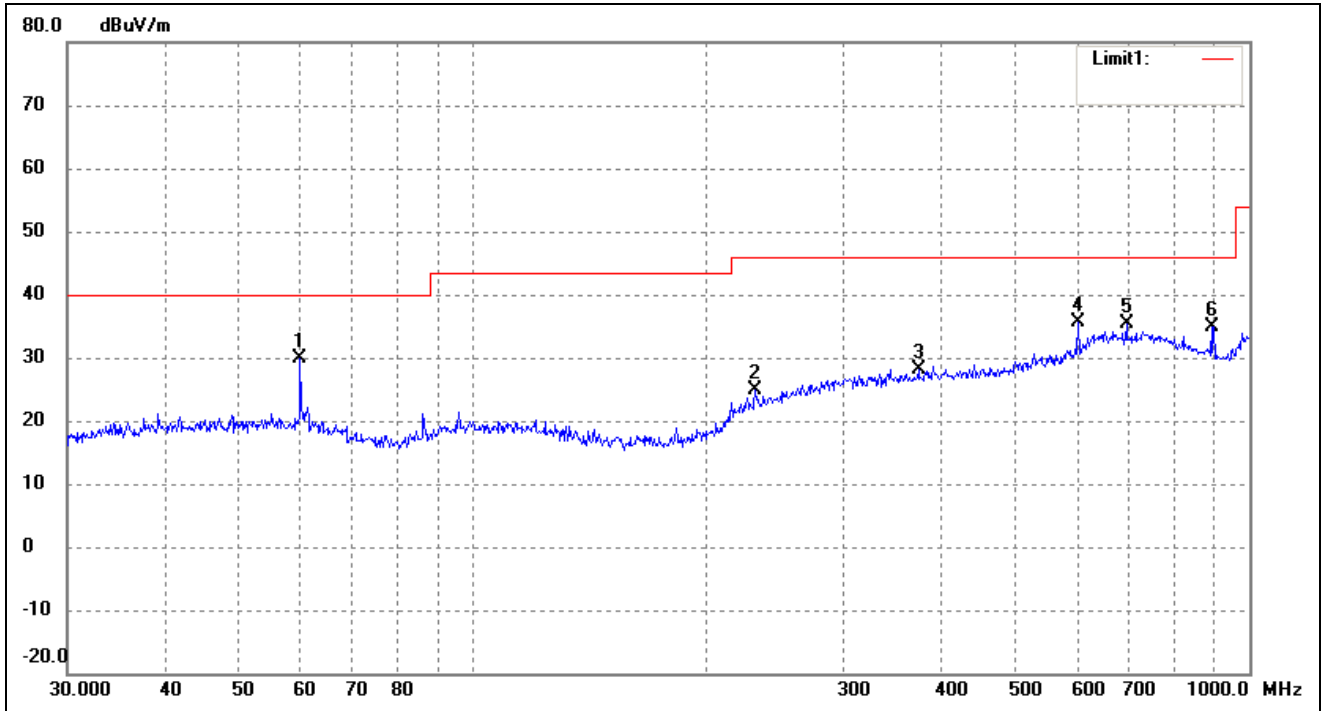


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.8588	24.94	5.03	29.97	40.00	-10.03	292	100	peak
2	230.9068	16.41	8.35	24.76	46.00	-21.24	94	100	peak
3	374.6225	16.38	11.83	28.21	46.00	-17.79	125	100	peak
4	601.4265	17.04	18.66	35.70	46.00	-10.30	109	100	peak
5	694.4174	17.70	17.61	35.31	46.00	-10.69	332	100	peak
6	893.8567	19.37	15.55	34.92	46.00	-11.08	102	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz (worst case)


Comment: DC 3.7V by battery

Test Specification: Horizontal

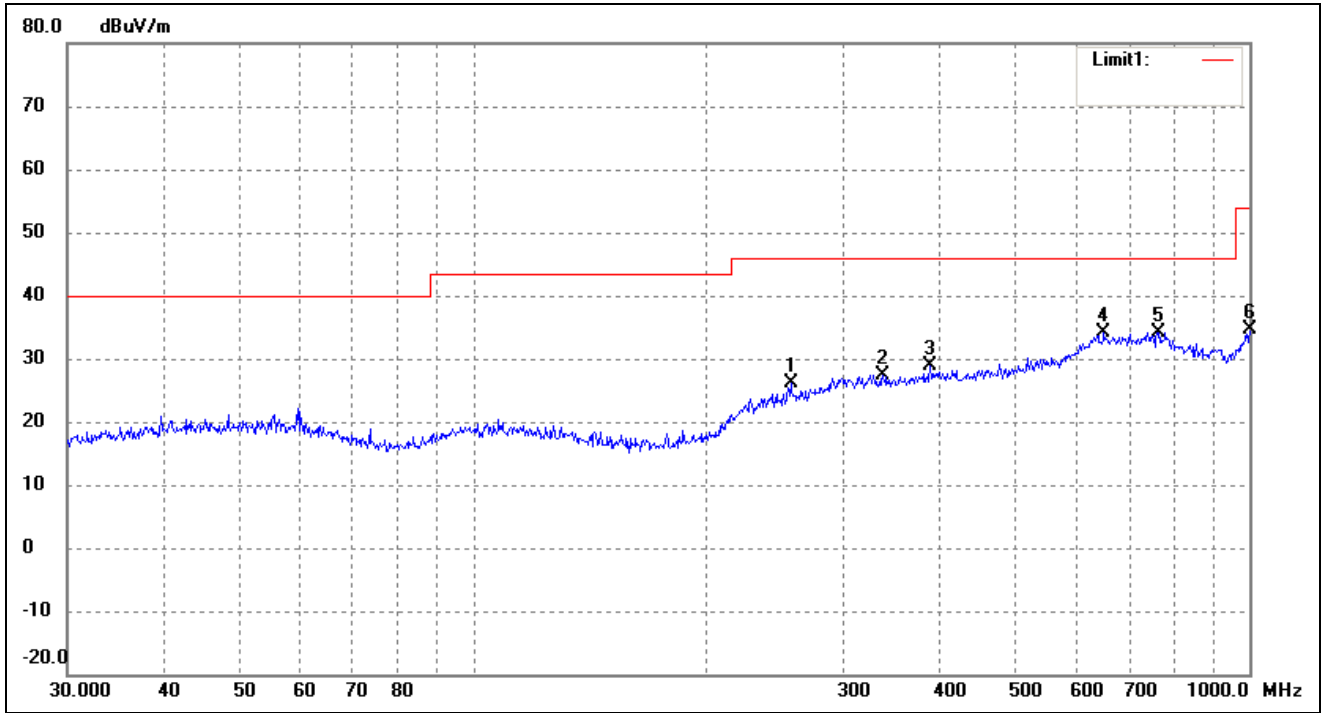

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	256.5211	16.68	9.56	26.24	46.00	-19.76	276	100	peak
2	337.2155	15.89	11.45	27.34	46.00	-18.66	346	100	peak
3	387.9920	16.66	12.14	28.80	46.00	-17.20	86	100	peak
4	649.6597	16.25	17.84	34.09	46.00	-11.91	210	100	peak
5	763.3757	16.29	17.95	34.24	46.00	-11.76	70	100	peak
6	1000.0000	15.47	19.11	34.58	54.00	-19.42	153	100	peak

Test Specification: Vertical

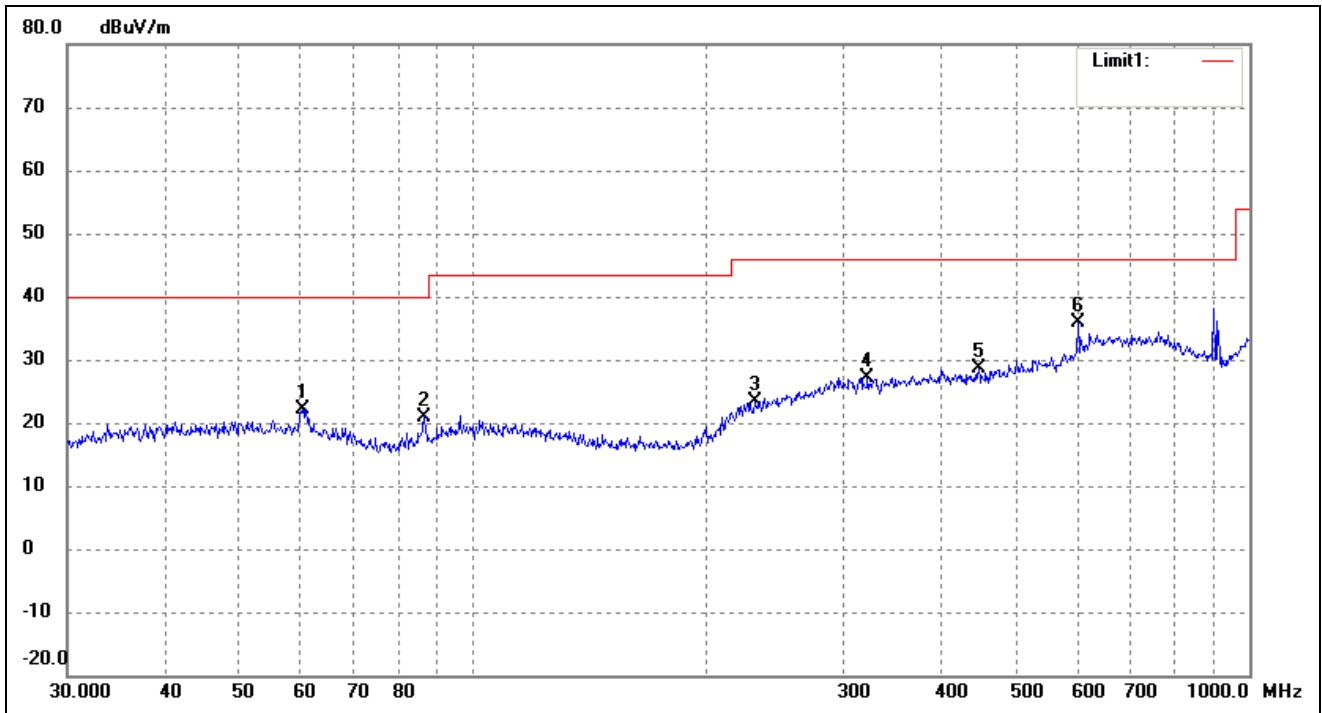


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.2801	17.15	4.98	22.13	40.00	-17.87	84	100	peak
2	86.5029	18.20	2.80	21.00	40.00	-19.00	322	100	peak
3	230.9068	14.93	8.35	23.28	46.00	-22.72	96	100	peak
4	322.1886	15.24	11.88	27.12	46.00	-18.88	94	100	peak
5	447.9822	15.84	12.71	28.55	46.00	-17.45	169	100	peak
6	601.4265	17.21	18.66	35.87	46.00	-10.13	165	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz (worst case)


Comment: DC 3.7V by battery

Test Specification: Horizontal

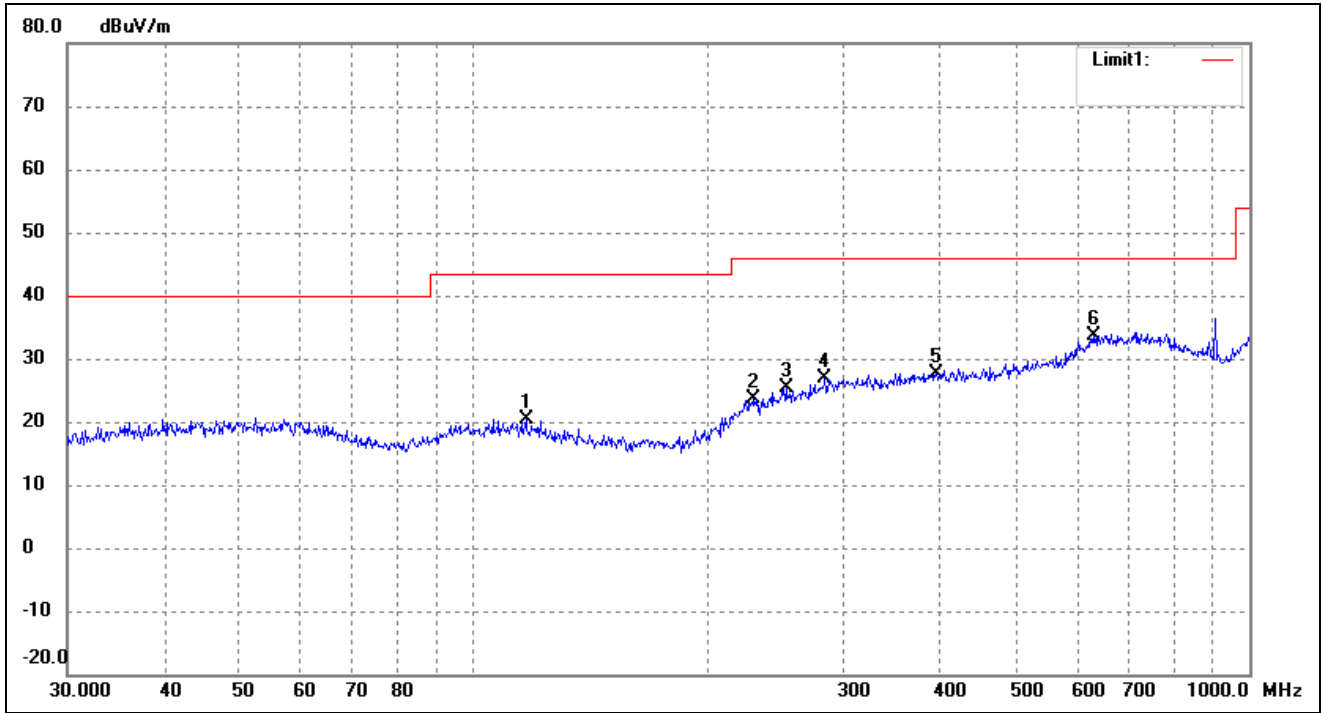

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	116.9495	15.65	4.83	20.48	43.50	-23.02	183	100	peak
2	230.0985	15.26	8.31	23.57	46.00	-22.43	124	100	peak
3	252.9482	16.01	9.42	25.43	46.00	-20.57	84	100	peak
4	283.9792	15.62	11.30	26.92	46.00	-19.08	103	100	peak
5	394.8545	15.25	12.46	27.71	46.00	-18.29	235	100	peak
6	629.4772	15.86	17.70	33.56	46.00	-12.44	200	100	peak

Test Specification: Vertical

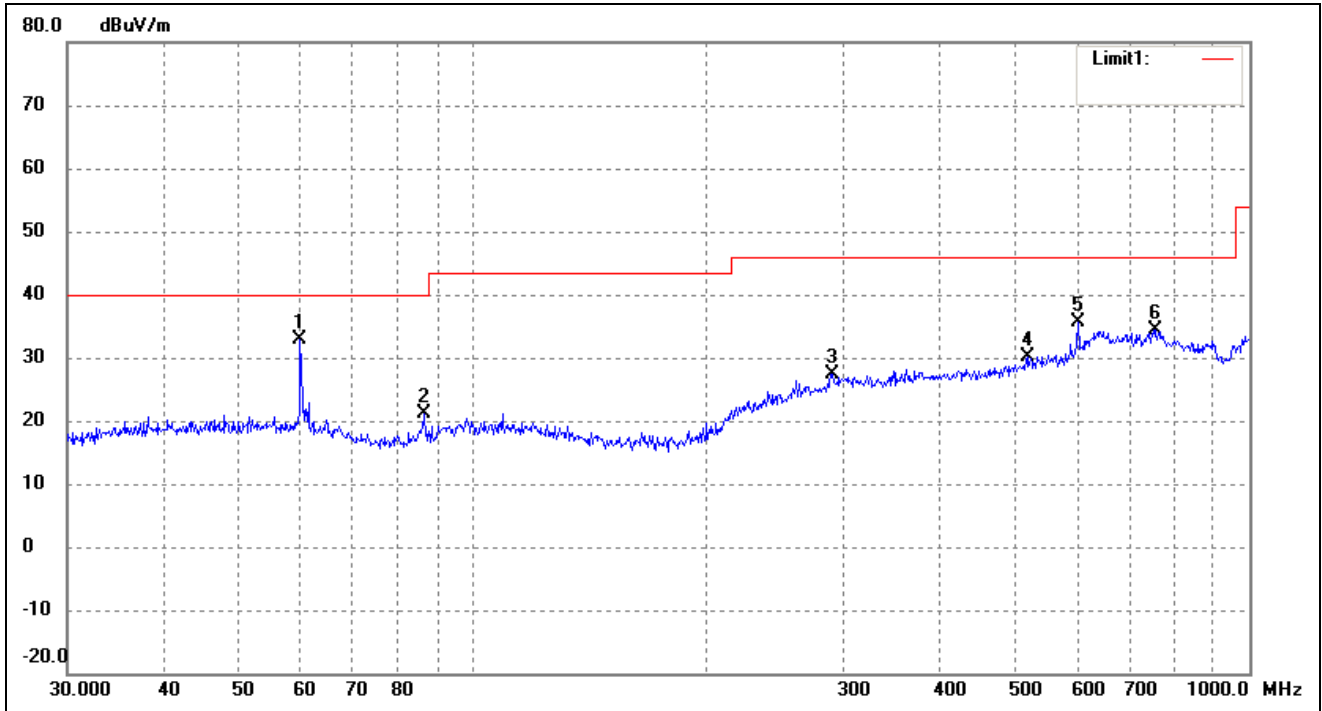

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.8588	27.74	5.03	32.77	40.00	-7.23	91	100	peak
2	86.5029	18.34	2.80	21.14	40.00	-18.86	191	100	peak
3	290.0172	15.85	11.57	27.42	46.00	-18.58	60	100	peak
4	517.2480	16.25	13.81	30.06	46.00	-15.94	146	100	peak
5	601.4265	16.86	18.66	35.52	46.00	-10.48	156	100	peak
6	758.0408	16.24	18.23	34.47	46.00	-11.53	347	100	peak

Spurious Emissions Above 1GHz
Test Mode: 802.11b (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	66.69	-3.87	62.82	74	-11.18	H	PK
4824.000	51.11	-3.87	47.24	54	-6.76	H	AV
7236.000	66.31	1.14	67.45	74	-6.55	H	PK
7236.000	46.24	1.19	47.43	54	-6.57	H	AV
4824.000	65.16	-3.86	61.30	74	-12.70	V	PK
4824.000	52.29	-3.86	48.43	54	-5.57	V	AV
7236.000	67.16	1.1	68.26	74	-5.74	V	PK
7236.000	47.74	1.1	48.84	54	-5.16	V	AV
Middle Channel-2437MHz							
4874.000	65.81	-3.74	62.07	74	-11.93	H	PK
4874.000	53.78	-3.74	50.04	54	-3.96	H	AV
7311.000	66.39	1.47	67.86	74	-6.14	H	PK
7311.000	47.32	1.47	48.79	54	-5.21	H	AV
4874.000	66.92	-3.74	63.18	74	-10.82	V	PK
4874.000	51.06	-3.74	47.32	54	-6.68	V	AV
7311.000	67.27	1.47	68.74	74	-5.26	V	PK
7311.000	48.14	1.47	49.61	54	-4.39	V	AV
High Channel-2462MHz							
4924.000	66.98	-3.59	63.39	74	-10.61	H	PK
4924.000	50.05	-3.59	46.46	54	-7.54	H	AV
7386.000	67.60	1.79	69.39	74	-4.61	H	PK
7386.000	47.70	1.79	49.49	54	-4.51	H	AV
4924.000	64.87	-3.59	61.28	74	-12.72	V	PK
4924.000	49.78	-3.59	46.19	54	-7.81	V	AV
7386.000	66.53	1.79	68.32	74	-5.68	V	PK
7386.000	47.14	1.79	48.93	54	-5.07	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

Ant. 1:

802.11b-Lowest Bandedge


Vertical (Worst case)

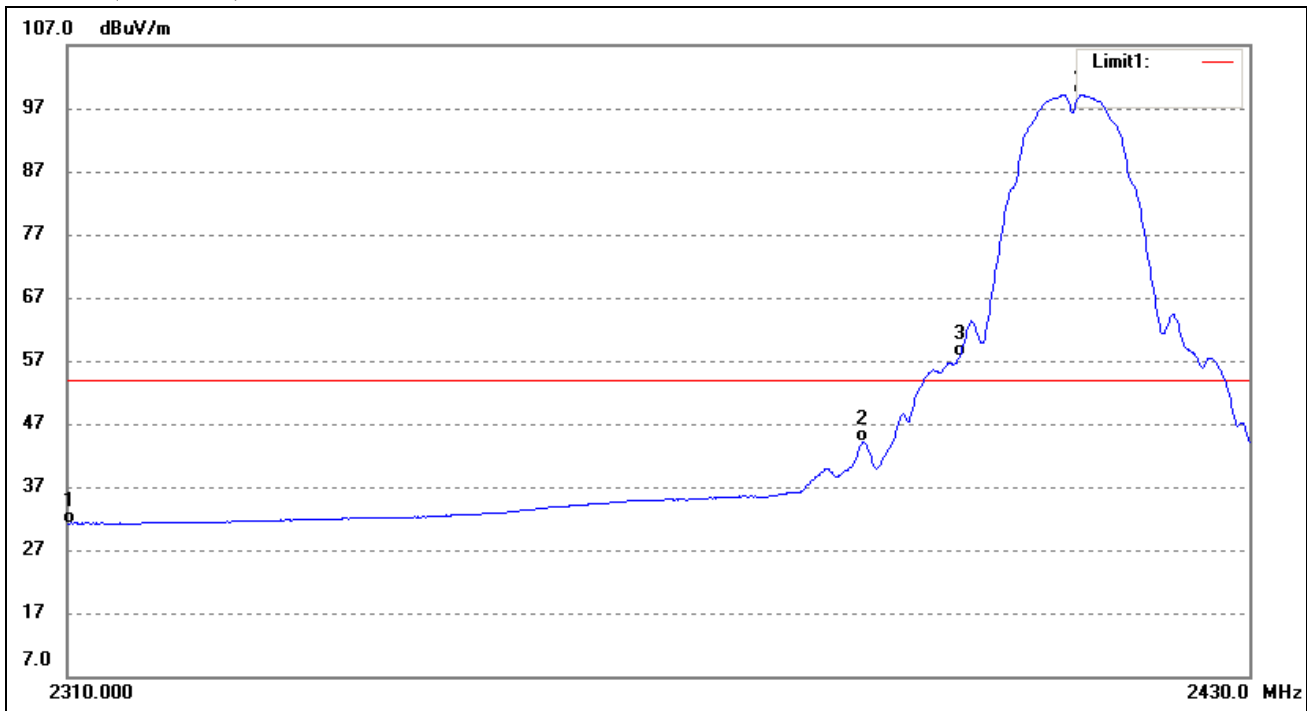

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.58	-3.35	31.23	54.00	-22.77	Average Detector
	2310.000	45.64	-3.35	42.29	74.00	-31.71	Peak Detector
2	2390.000	48.34	-4.29	44.05	54.00	-9.95	Average Detector
	2390.000	56.08	-4.29	51.79	74.00	-22.21	Peak Detector
3	2400.000	62.10	-4.40	57.70	Delta=41.41dBc		Average Detector
4	2412.465	103.55	-4.44	99.11		Average Detector	

802.11b-Highest Bandedge


Vertical (Worst case)

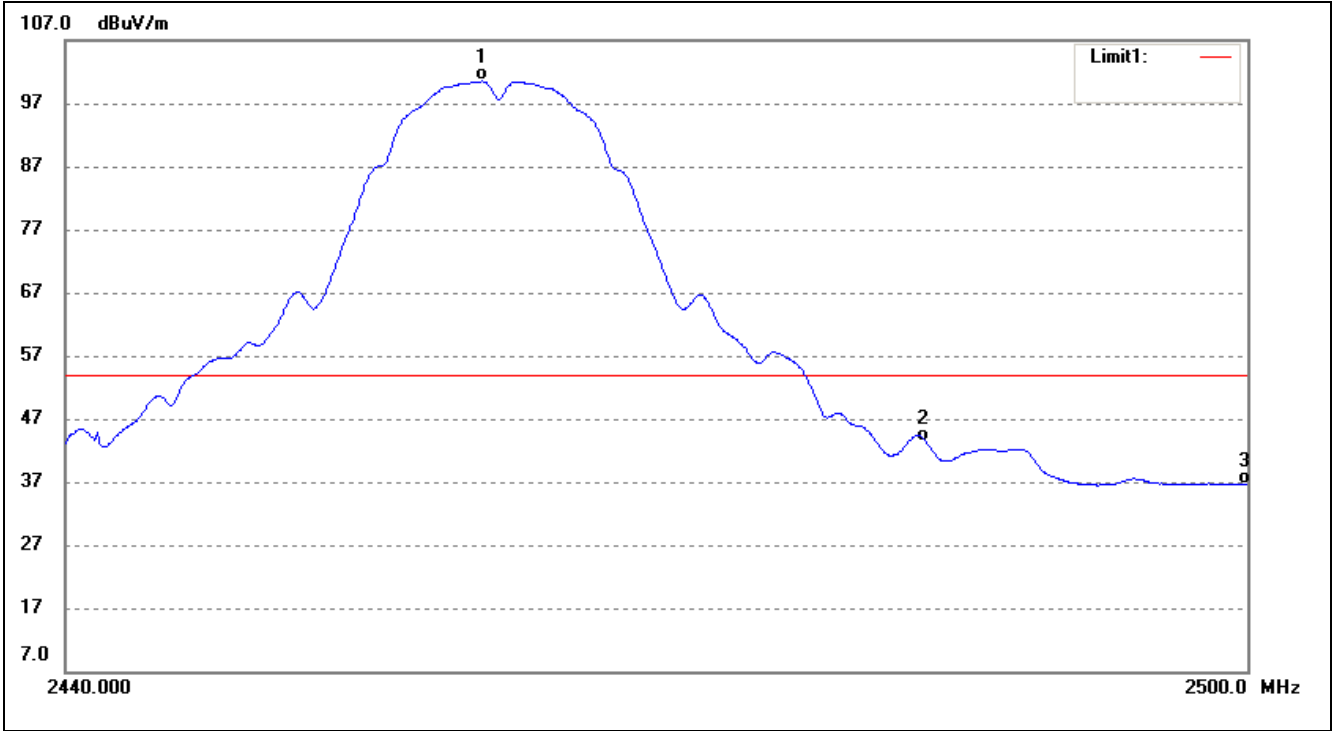

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.014	104.90	-4.38	100.52	/	/	Average Detector
	2460.416	109.17	-4.38	104.79	/	/	Peak Detector
2	2483.500	47.72	-4.36	43.36	54.00	-10.64	Average Detector
	2483.500	55.29	-4.36	50.93	74.00	-23.07	Peak Detector
3	2500.000	40.92	-4.34	36.58	54.00	-17.42	Average Detector
	2500.000	52.22	-4.34	47.88	74.00	-26.12	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

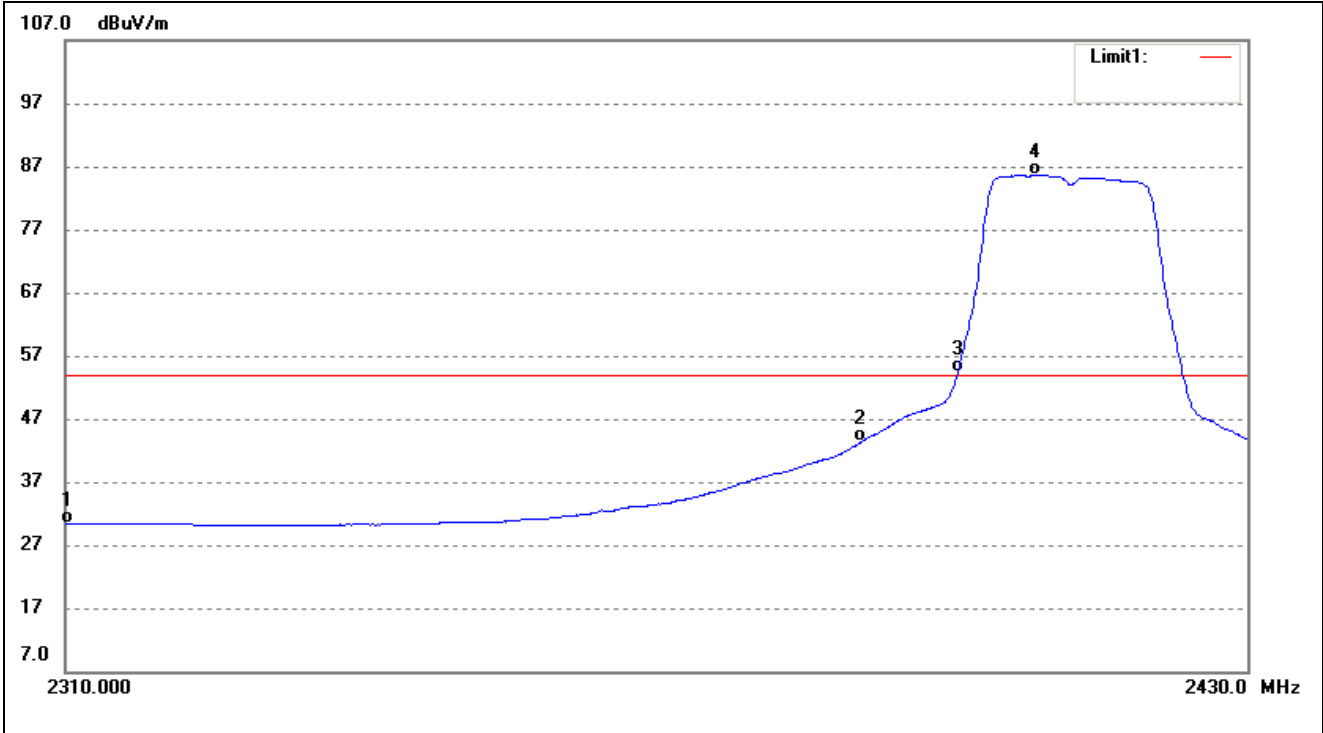

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.79	-3.35	30.44	54.00	-23.56	Average Detector
	2310.000	43.26	-3.35	39.91	74.00	-34.09	Peak Detector
2	2390.000	47.67	-4.29	43.38	54.00	-10.62	Average Detector
	2390.000	61.02	-4.29	56.73	74.00	-17.27	Peak Detector
3	2400.000	58.70	-4.40	54.30	Delta=31.31dBc		Average Detector
4	2408.071	90.06	-4.45	85.61			Average Detector

802.11g-Highest Bandedge


Vertical (Worst case)

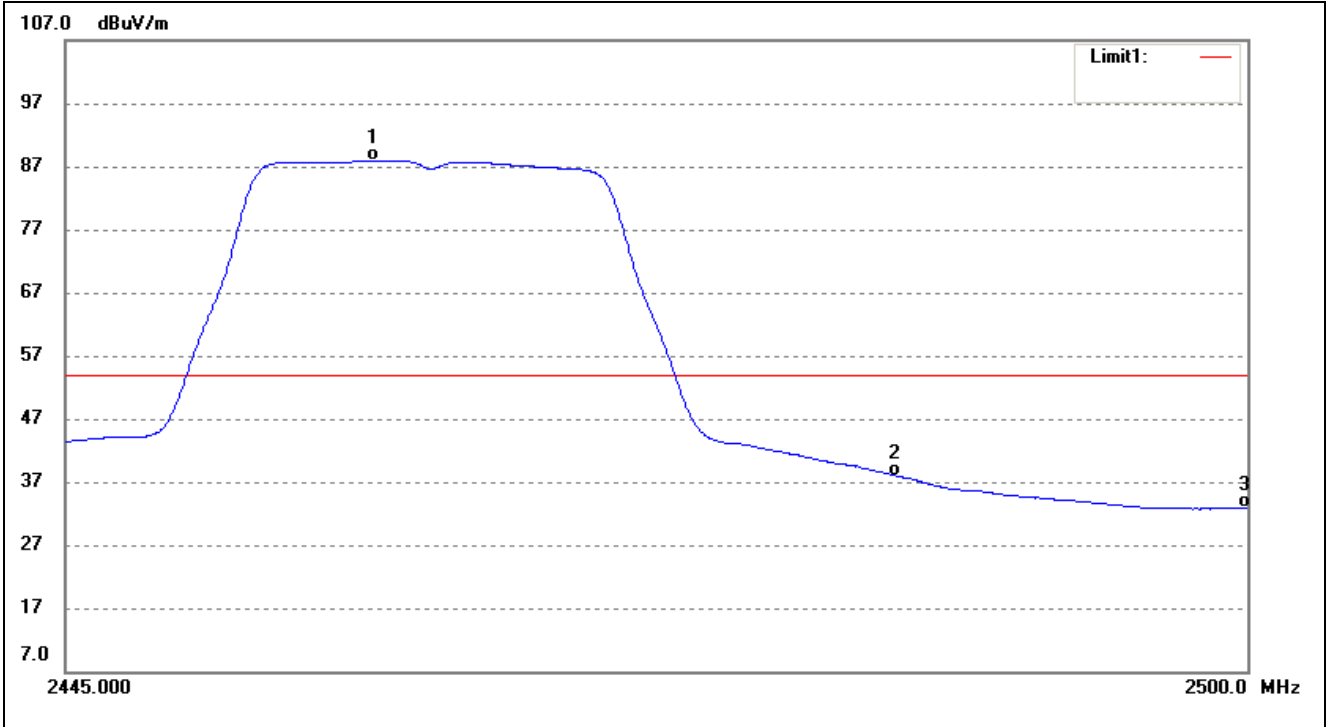

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.237	92.28	-4.39	87.89	/	/	Average Detector
	2457.050	102.17	-4.39	97.78	/	/	Peak Detector
2	2483.500	42.35	-4.36	37.99	54.00	-16.01	Average Detector
	2483.500	55.71	-4.36	51.35	74.00	-22.65	Peak Detector
3	2500.000	37.24	-4.34	32.90	54.00	-21.10	Average Detector
	2500.000	48.31	-4.34	43.97	74.00	-30.03	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

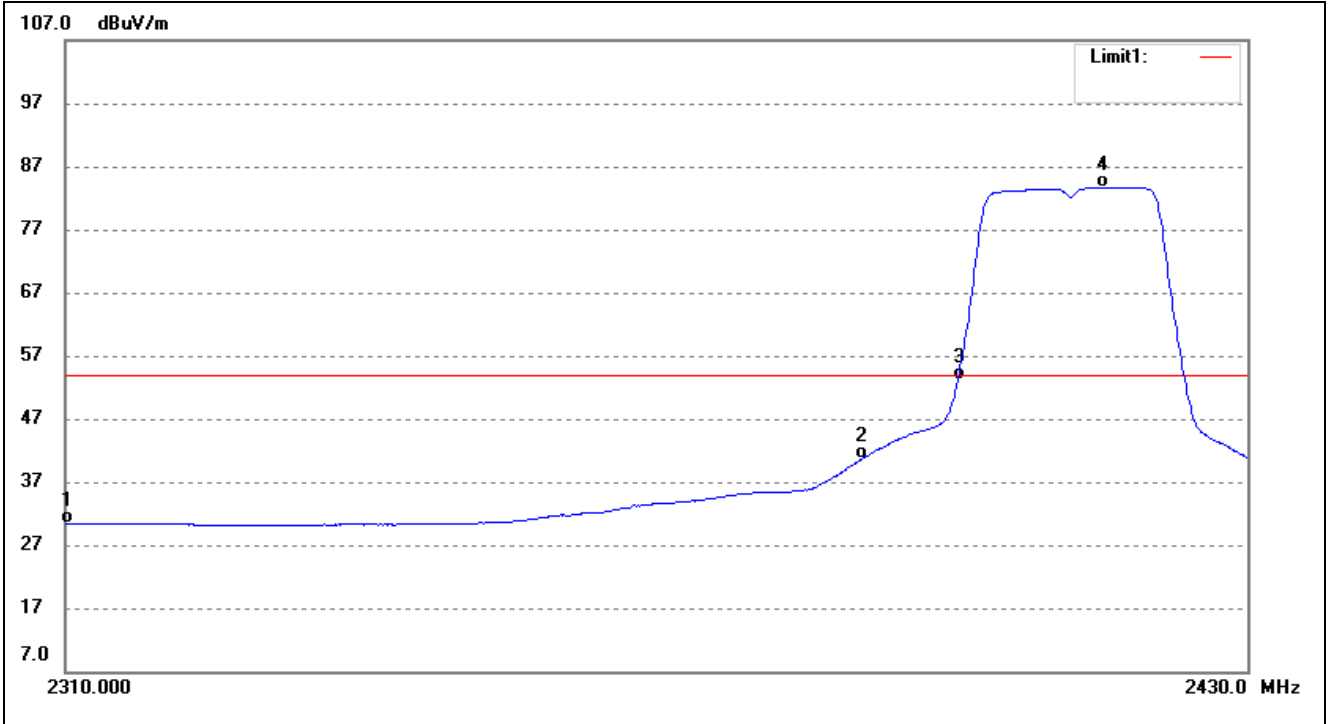

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.83	-3.35	30.48	54.00	-23.52	Average Detector
	2310.000	44.51	-3.35	41.16	74.00	-32.84	Peak Detector
2	2390.000	44.85	-4.29	40.56	54.00	-13.44	Average Detector
	2390.000	59.85	-4.29	55.56	74.00	-18.44	Peak Detector
3	2400.000	57.45	-4.40	53.05	54.00	-0.95	Average Detector
	2400.000	75.71	-4.40	71.31	74.00	-2.69	Peak Detector
4	2415.032	88.12	-4.44	83.68	/	/	Average Detector
	2416.133	98.49	-4.43	94.06	/	/	Peak Detector


802.11n-HT20-Highest Bandedge

Vertical (Worst case)

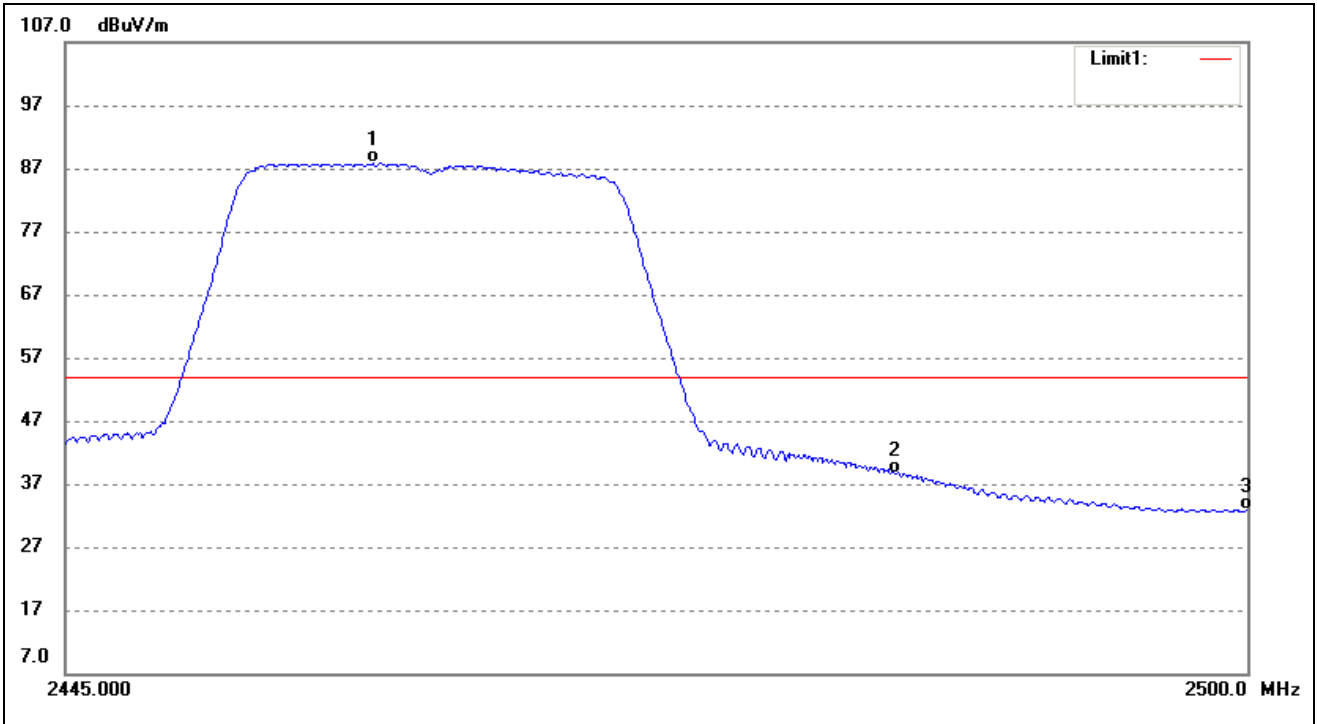


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.182	92.17	-4.39	87.78	/	/	Average Detector
	2460.058	102.67	-4.38	98.29	/	/	Peak Detector
2	2483.500	43.06	-4.36	38.70	54.00	-15.30	Average Detector
	2483.500	59.69	-4.36	55.33	74.00	-18.67	Peak Detector
3	2500.000	37.18	-4.34	32.84	54.00	-21.16	Average Detector
	2500.000	48.59	-4.34	44.25	74.00	-29.75	Peak Detector


Ant. 1
 Out-of-Band and Spurious Emission (Conducted)
 802.11b
 Low Channel

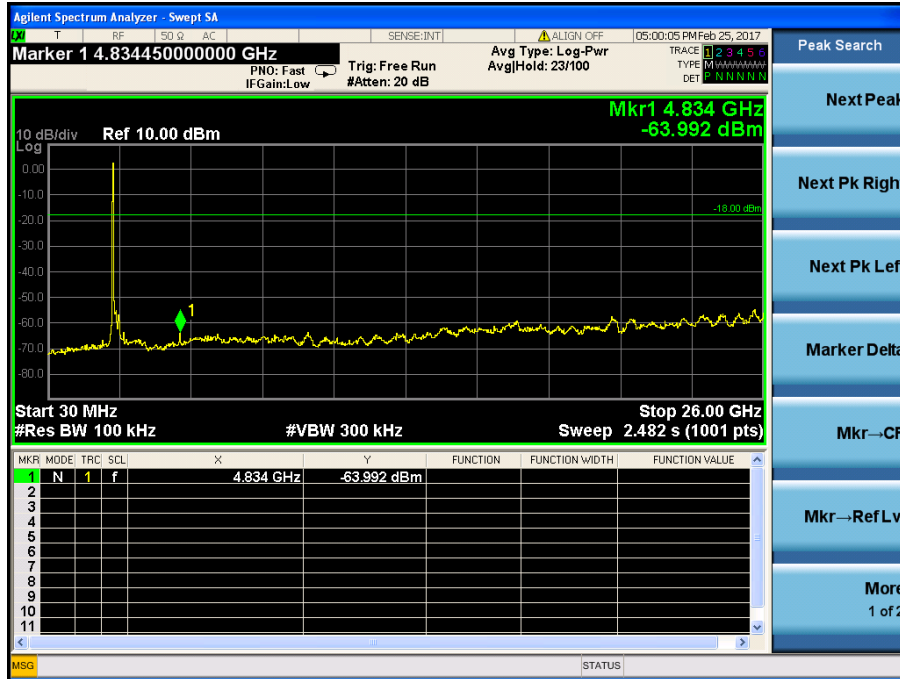


Middle Channel

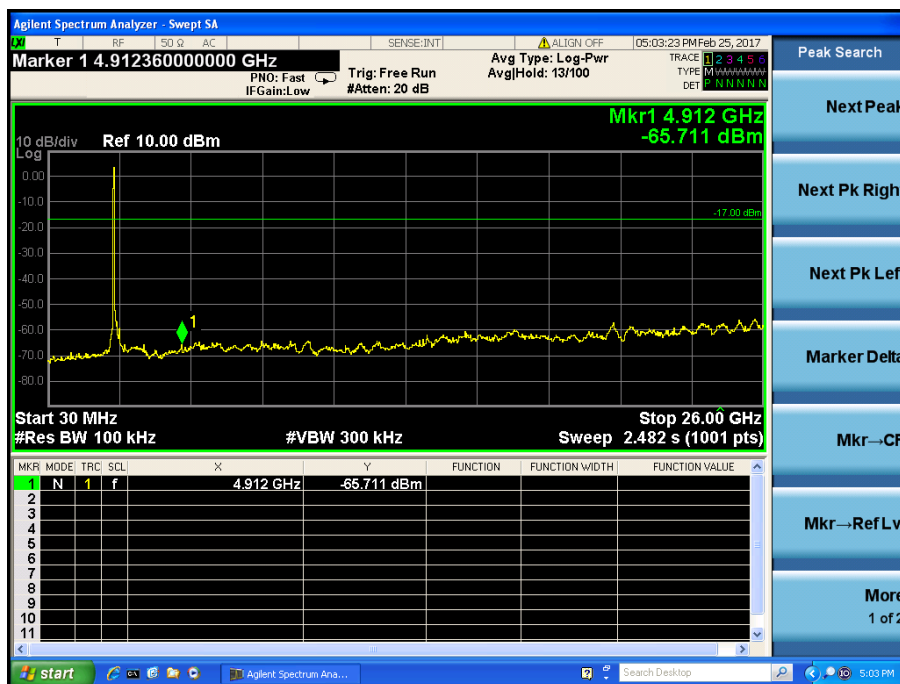


High Channel

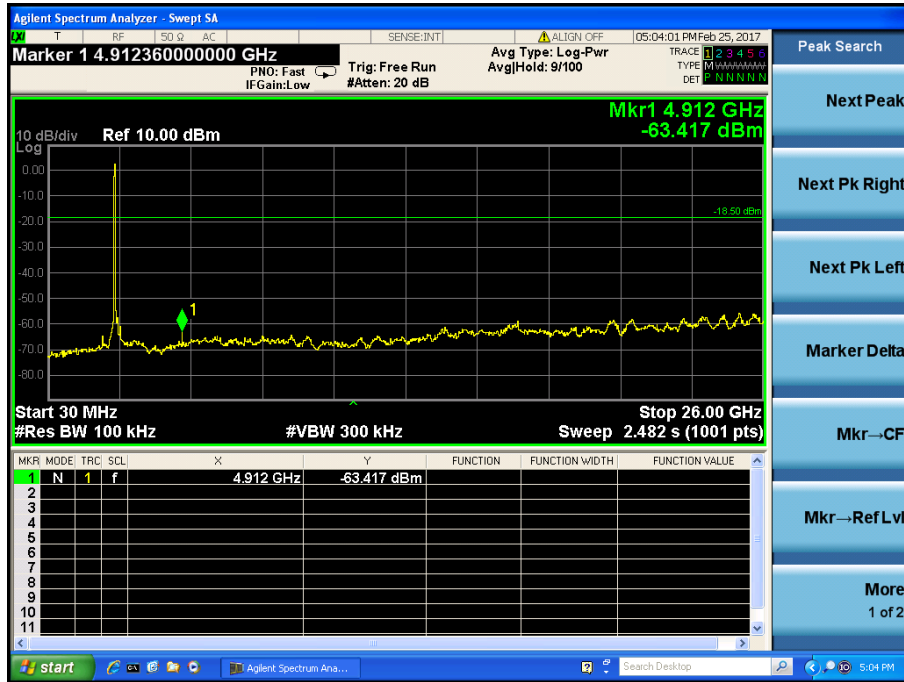


802.11g
Low Channel

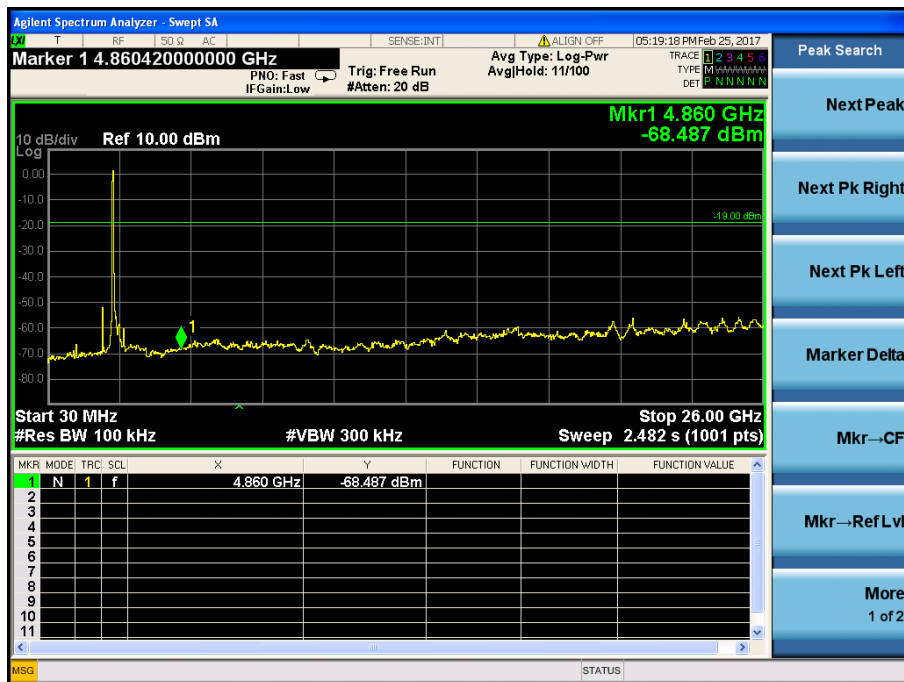


Middle Channel

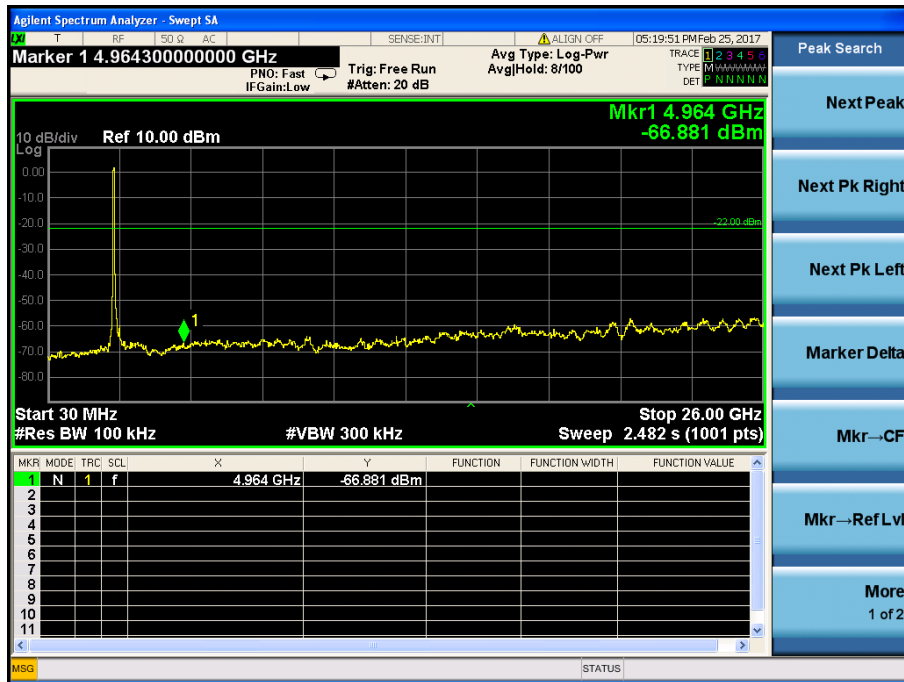


High Channel

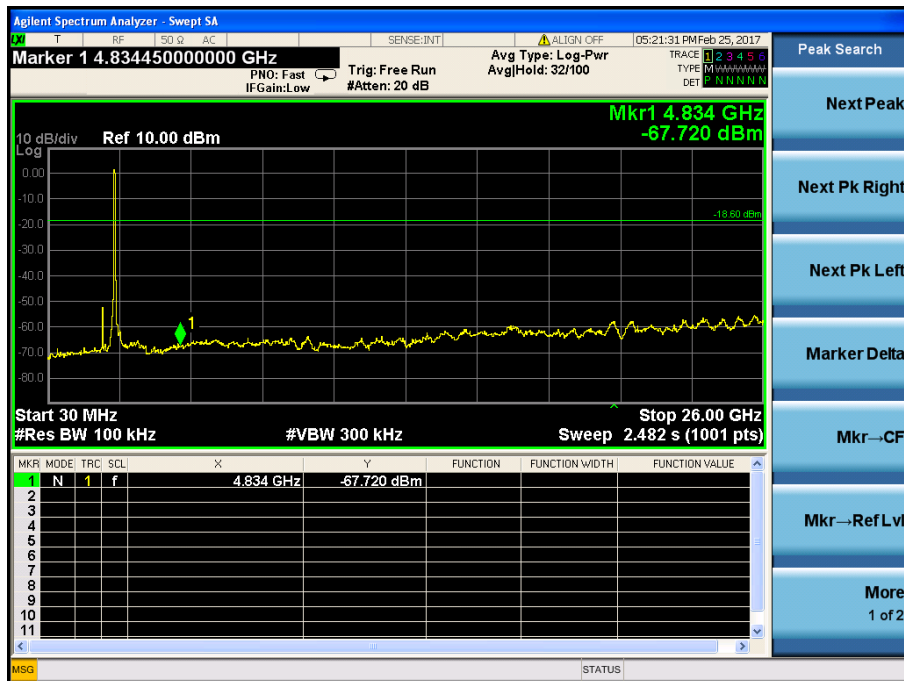


11n-HT20
Low Channel

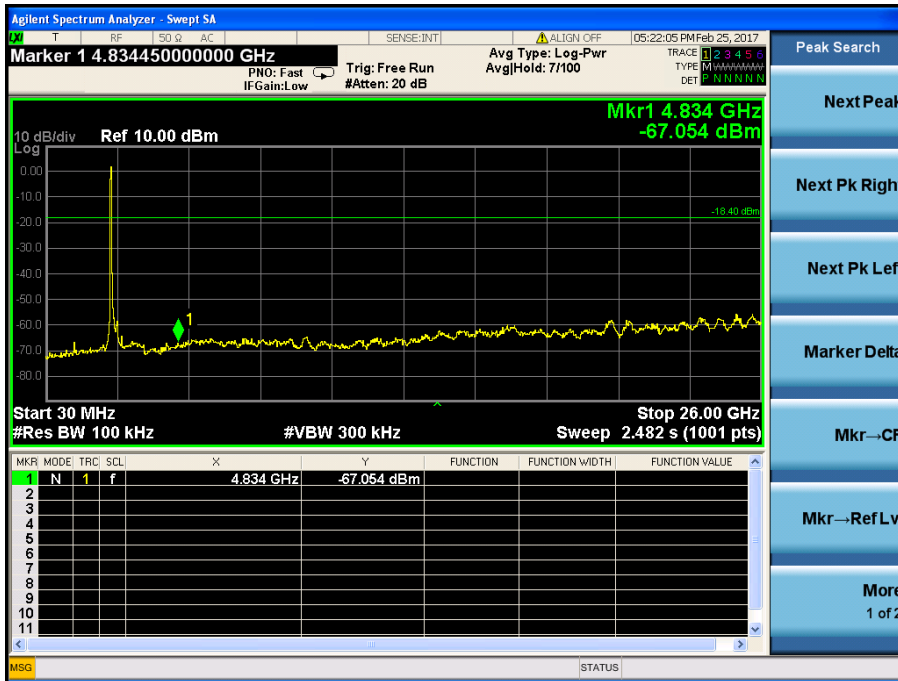


Middle Channel

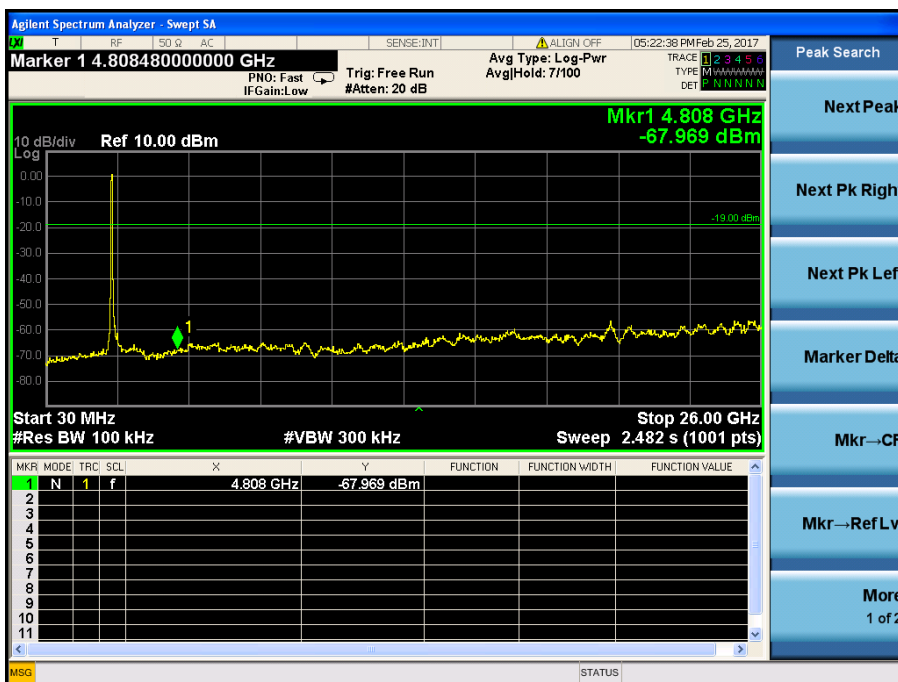

High Channel

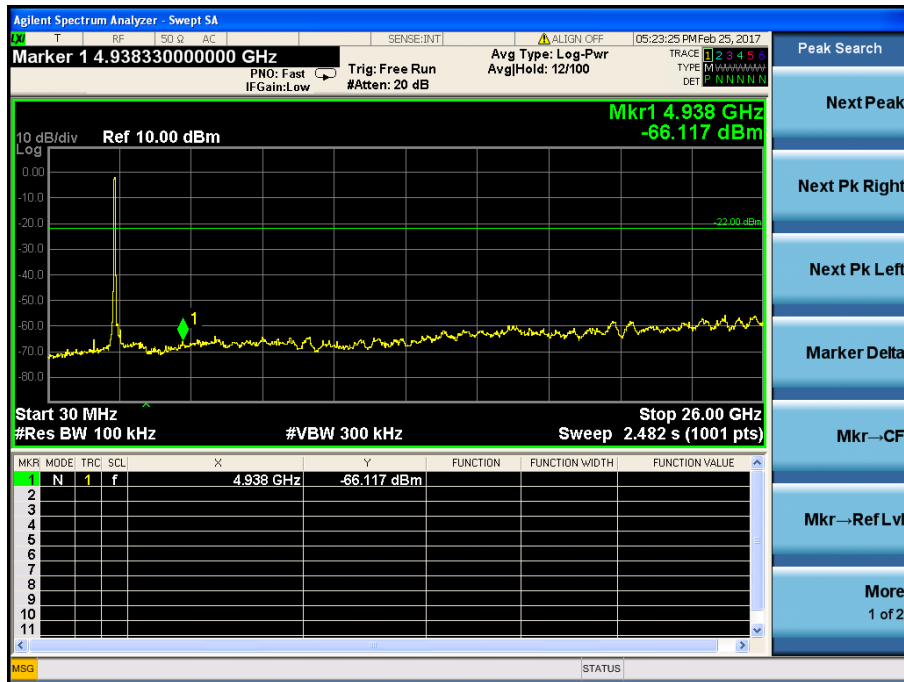


Ant. 2:
 802.11b-Lowest Bandedge
 Vertical (Worst case)

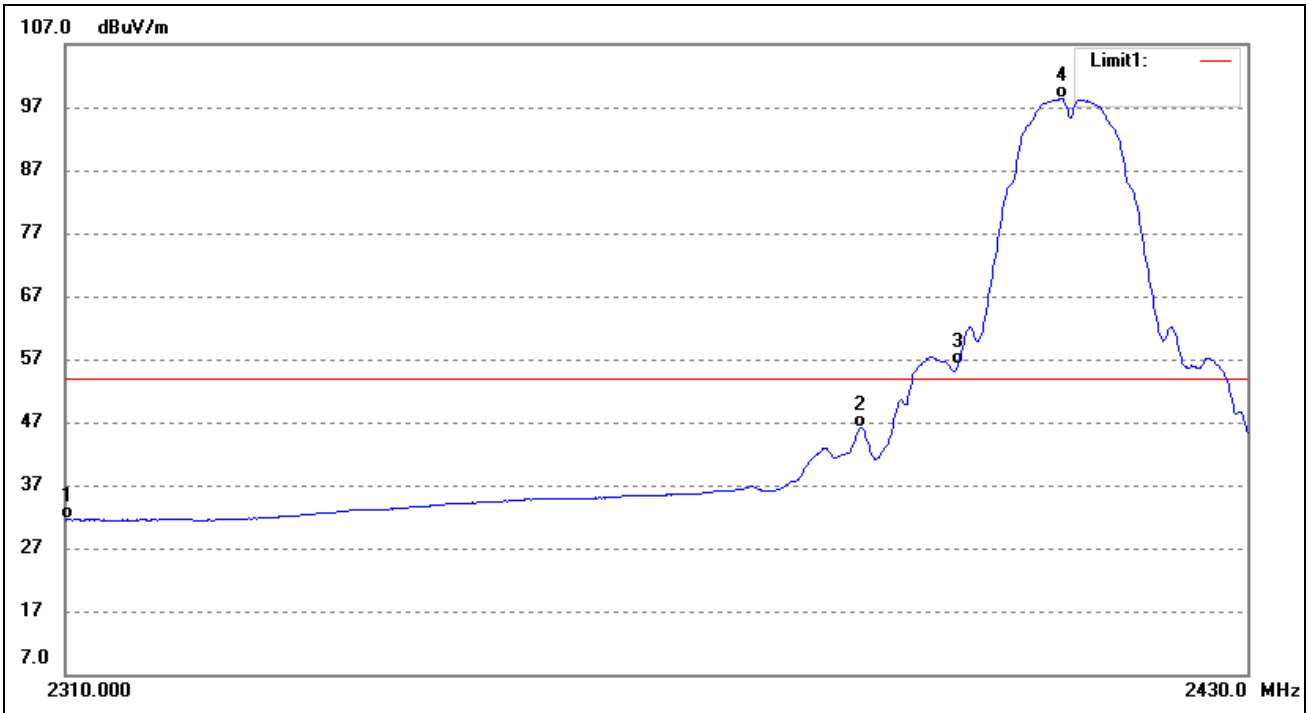

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.86	-3.35	31.51	54.00	-22.49	Average Detector
	2310.000	47.03	-3.35	43.68	74.00	-30.32	Peak Detector
2	2390.000	50.50	-4.29	46.21	54.00	-7.79	Average Detector
	2390.000	57.62	-4.29	53.33	74.00	-20.67	Peak Detector
3	2400.000	60.43	-4.40	56.03	Delta=42.25dBc		Average Detector
4	2410.756	102.72	-4.44	98.28			Average Detector

802.11b-Highest Bandedge


Vertical (Worst case)

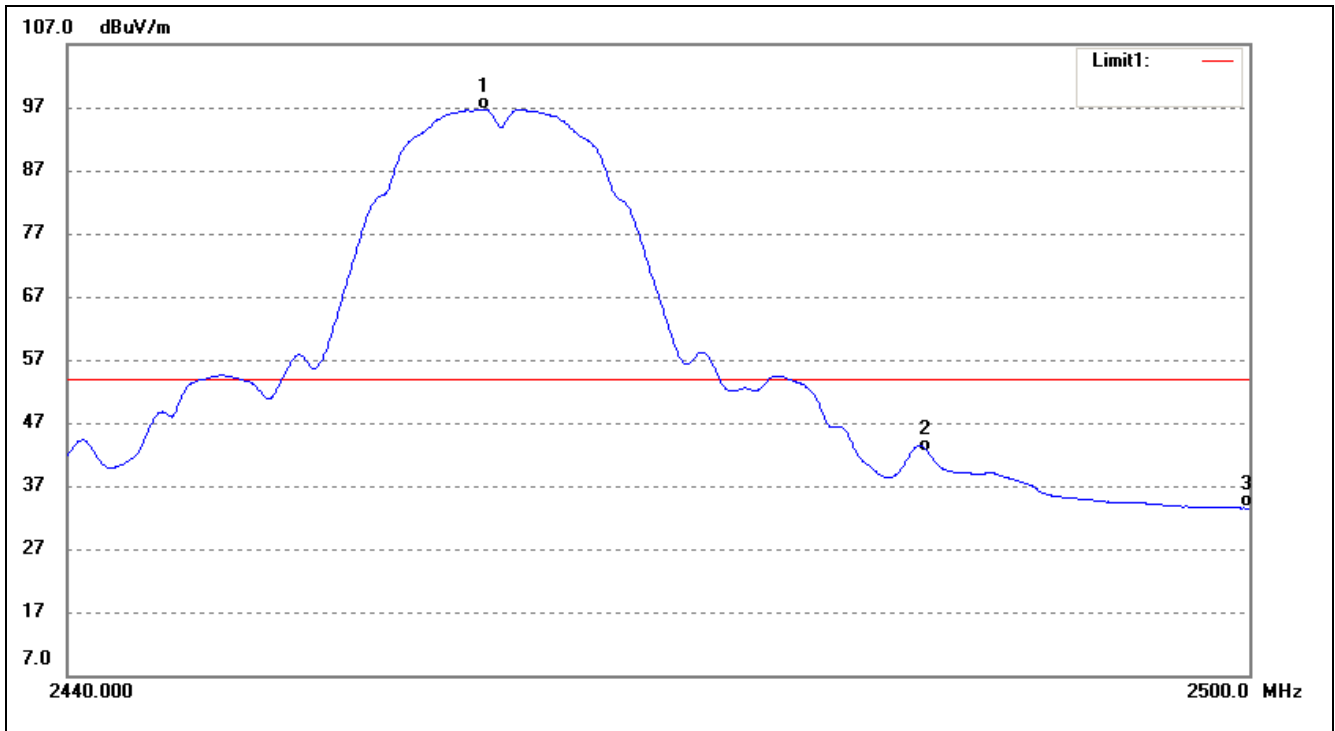

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.014	101.10	-4.38	96.72	/	/	Average Detector
	2460.416	105.47	-4.38	101.09	/	/	Peak Detector
2	2483.500	46.77	-4.36	42.41	54.00	-11.59	Average Detector
	2483.500	55.37	-4.36	51.01	74.00	-22.99	Peak Detector
3	2500.000	37.87	-4.34	33.53	54.00	-20.47	Average Detector
	2500.000	49.95	-4.34	45.61	74.00	-28.39	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

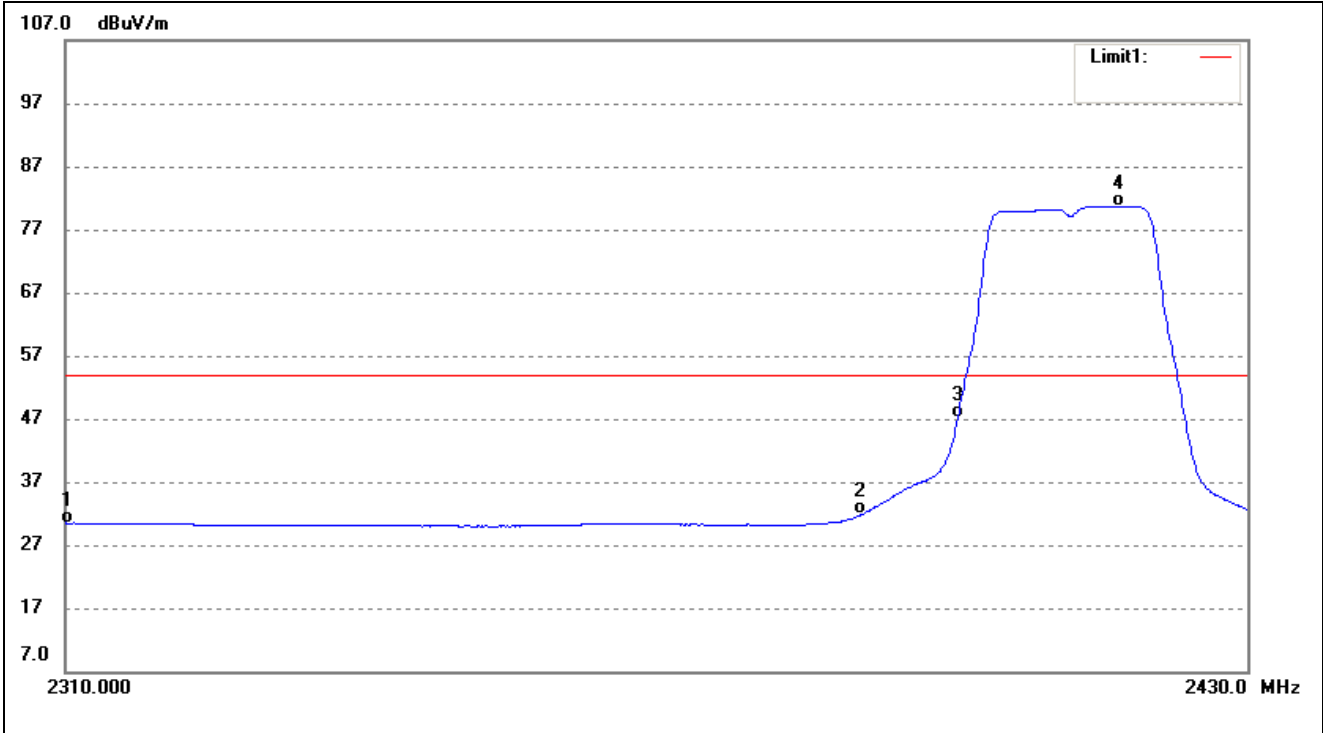

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.85	-3.35	30.50	54.00	-23.50	Average Detector
	2310.000	44.81	-3.35	41.46	74.00	-32.54	Peak Detector
2	2390.000	36.11	-4.29	31.82	54.00	-22.18	Average Detector
	2390.000	49.04	-4.29	44.75	74.00	-29.25	Peak Detector
3	2400.000	51.49	-4.40	47.09	54.00	-6.91	Average Detector
	2400.000	69.77	-4.40	65.37	74.00	-8.63	Peak Detector
4	2416.501	85.15	-4.43	80.72	/	/	Average Detector
	2417.602	95.47	-4.43	91.04	/	/	Peak Detector

802.11g-Highest Bandedge


Vertical (Worst case)

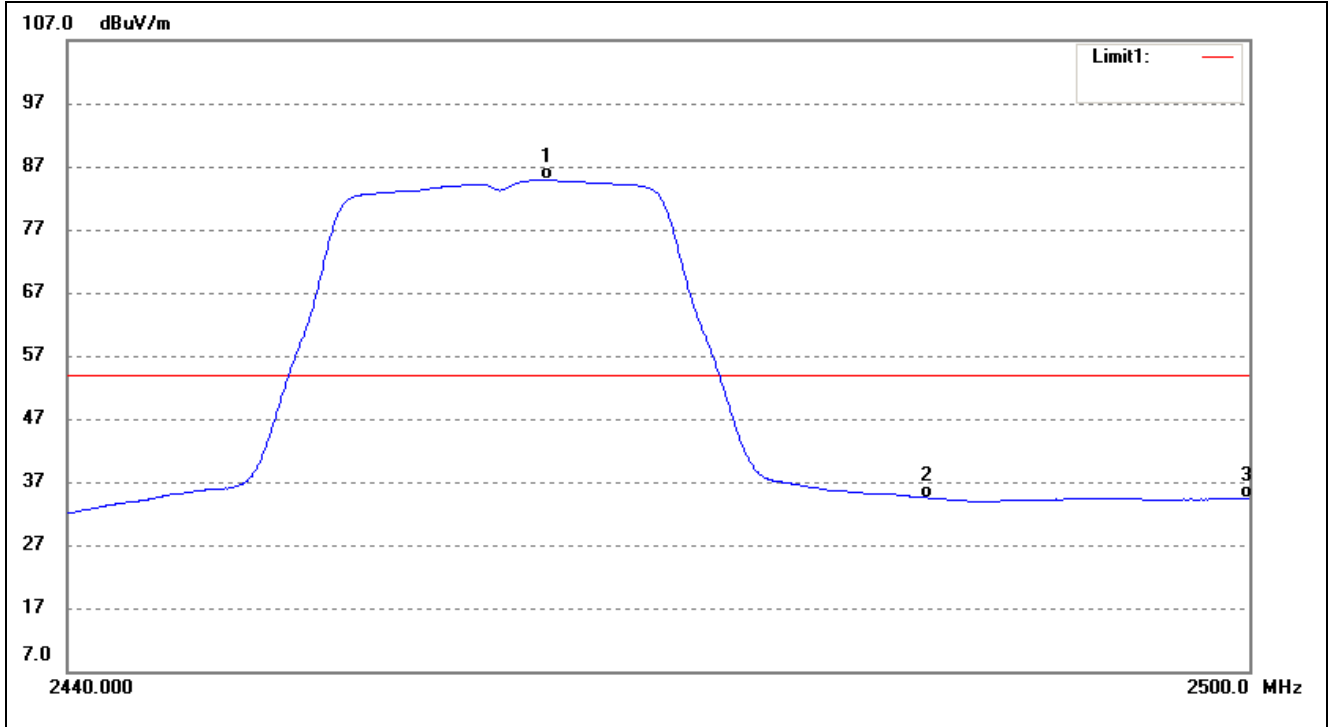

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.184	89.19	-4.38	84.81	/	/	Average Detector
	2464.663	98.78	-4.38	94.40	/	/	Peak Detector
2	2483.500	38.84	-4.36	34.48	54.00	-19.52	Average Detector
	2483.500	52.15	-4.36	47.79	74.00	-26.21	Peak Detector
3	2500.000	38.73	-4.34	34.39	54.00	-19.61	Average Detector
	2500.000	50.40	-4.34	46.06	74.00	-27.94	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

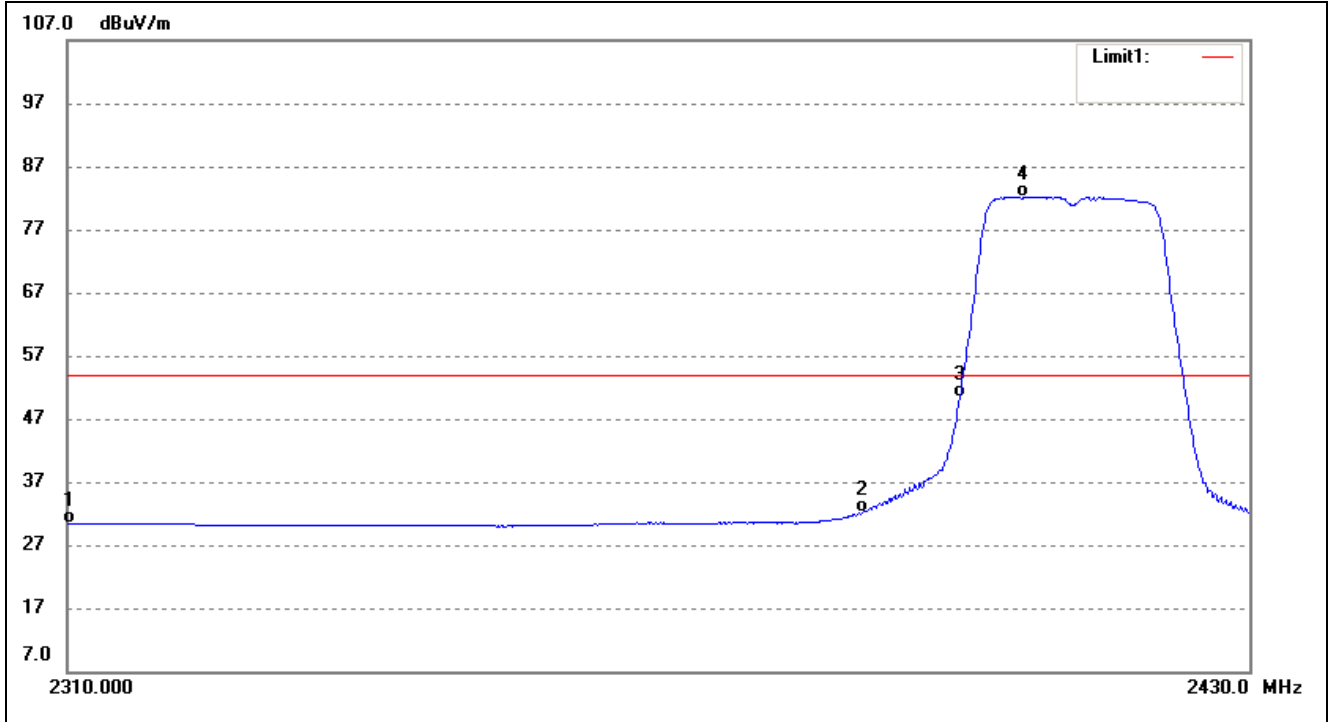

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.78	-3.35	30.43	54.00	-23.57	Average Detector
	2310.000	44.27	-3.35	40.92	74.00	-33.08	Peak Detector
2	2390.000	36.50	-4.29	32.21	54.00	-21.79	Average Detector
	2390.000	47.47	-4.29	43.18	74.00	-30.82	Peak Detector
3	2400.000	54.82	-4.40	50.42	54.00	-3.58	Average Detector
	2400.000	73.09	-4.40	68.69	74.00	-5.31	Peak Detector
4	2406.608	86.65	-4.45	82.20	/	/	Average Detector
	2409.901	97.02	-4.44	92.58	/	/	Peak Detector


802.11n-HT20-Highest Bandedge

Vertical (Worst case)

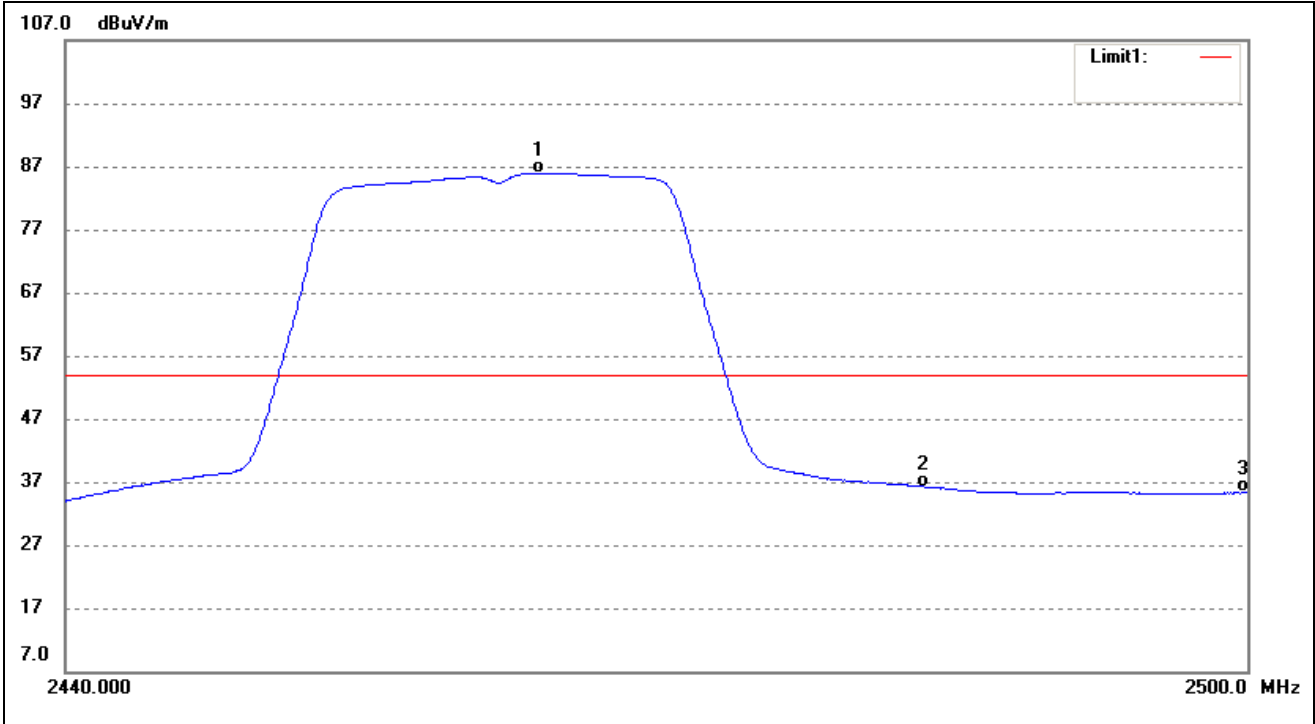


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.885	90.27	-4.38	85.89	/	/	Average Detector
	2466.101	100.81	-4.37	96.44	/	/	Peak Detector
2	2483.500	40.57	-4.36	36.21	54.00	-17.79	Average Detector
	2483.500	53.07	-4.36	48.71	74.00	-25.29	Peak Detector
3	2500.000	39.64	-4.34	35.30	54.00	-18.70	Average Detector
	2500.000	51.69	-4.34	47.35	74.00	-26.65	Peak Detector


Ant. 2
802.11b
Low Channel

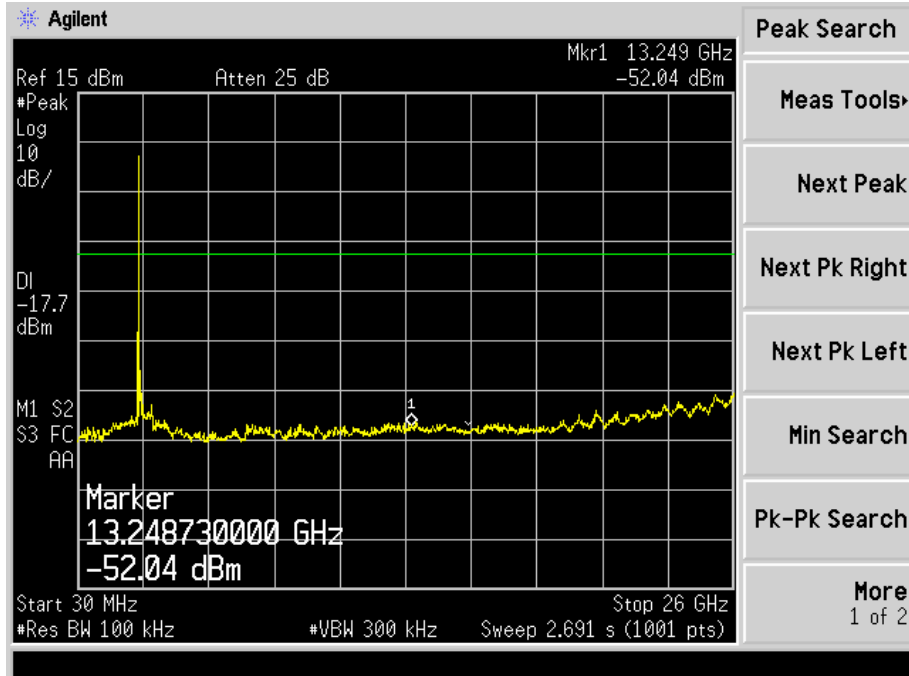

Middle Channel

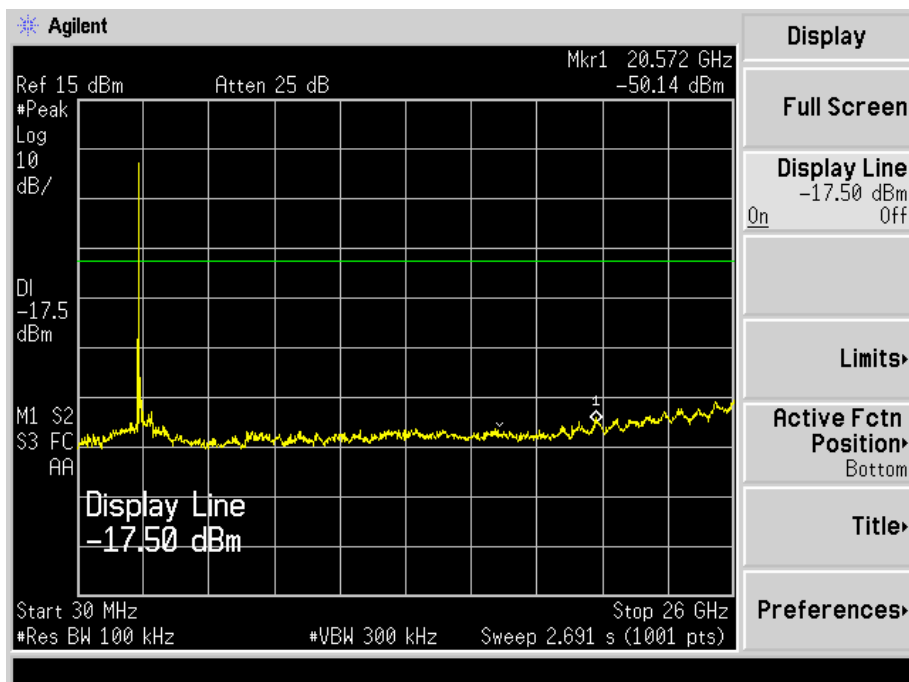


High Channel

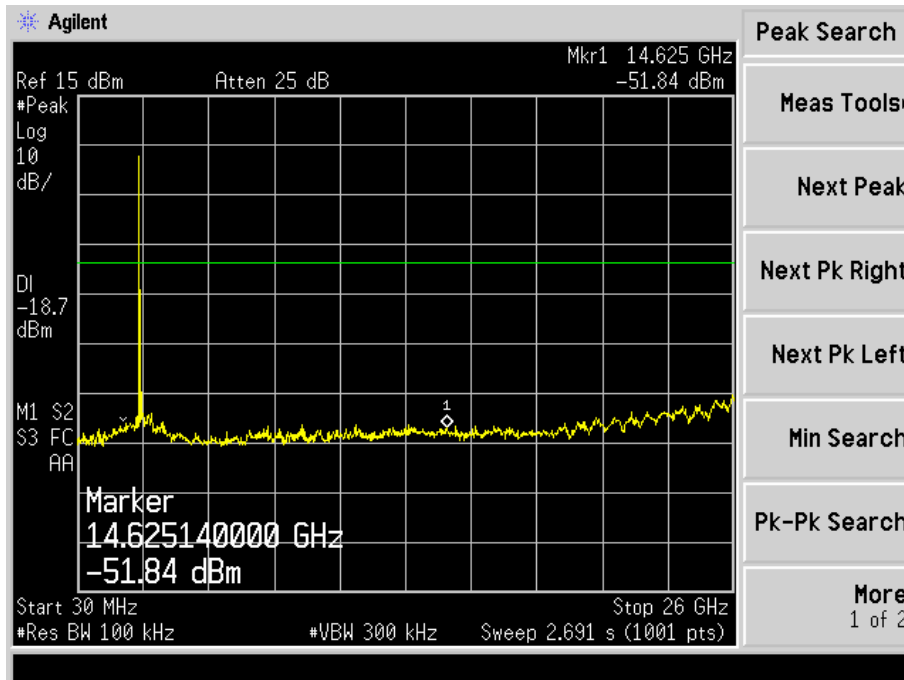


802.11g


Low Channel

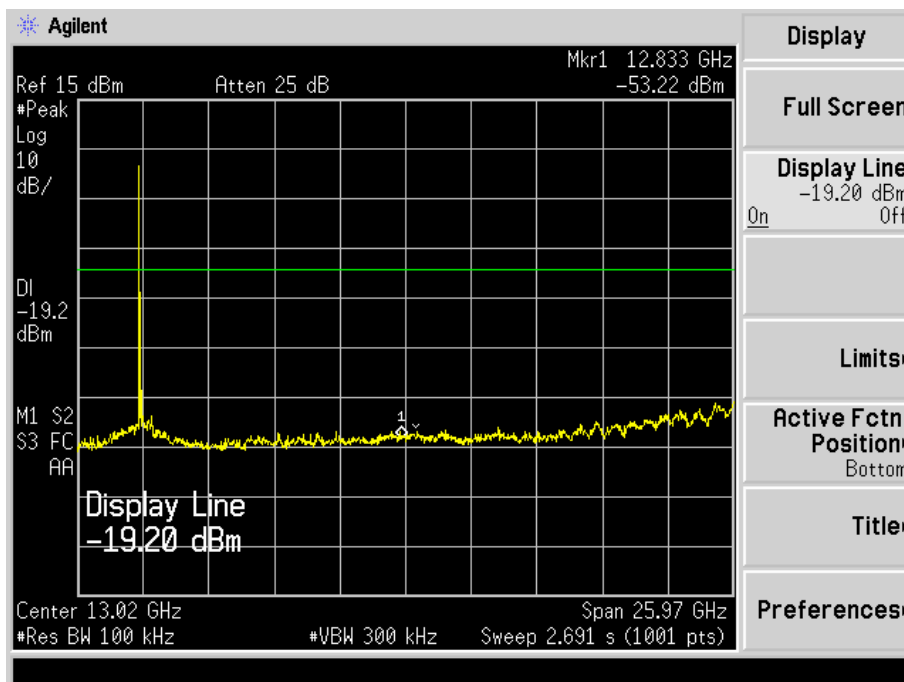


Middle Channel

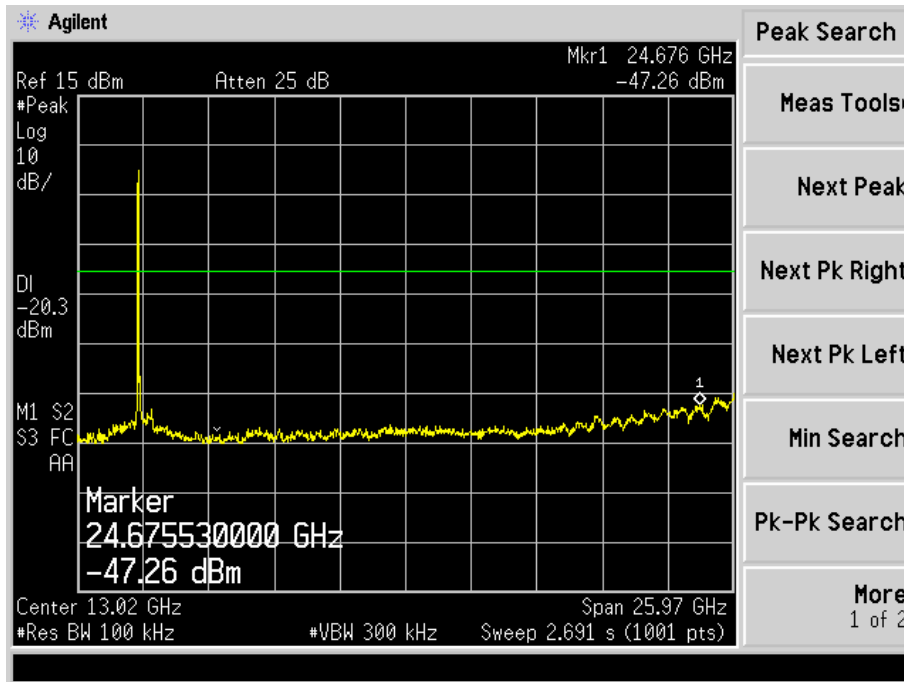


High Channel

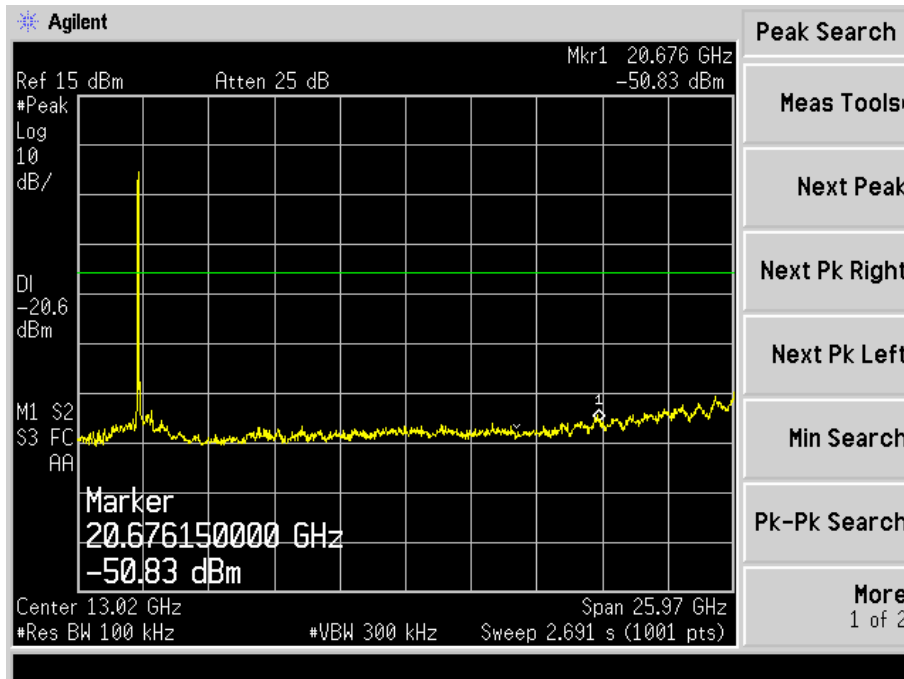


802.11n-HT20
Low Channel

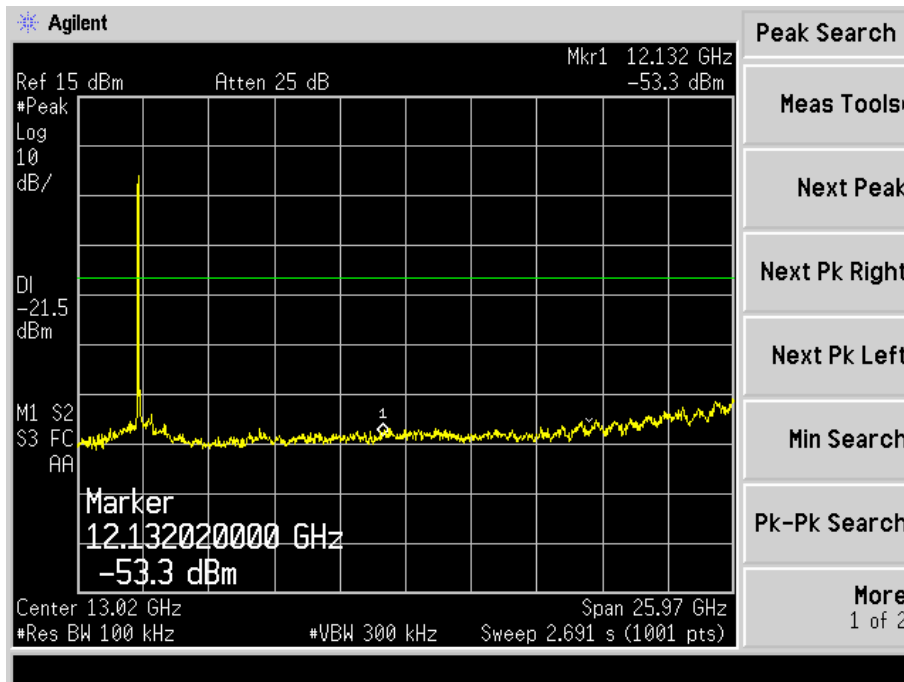

Middle Channel

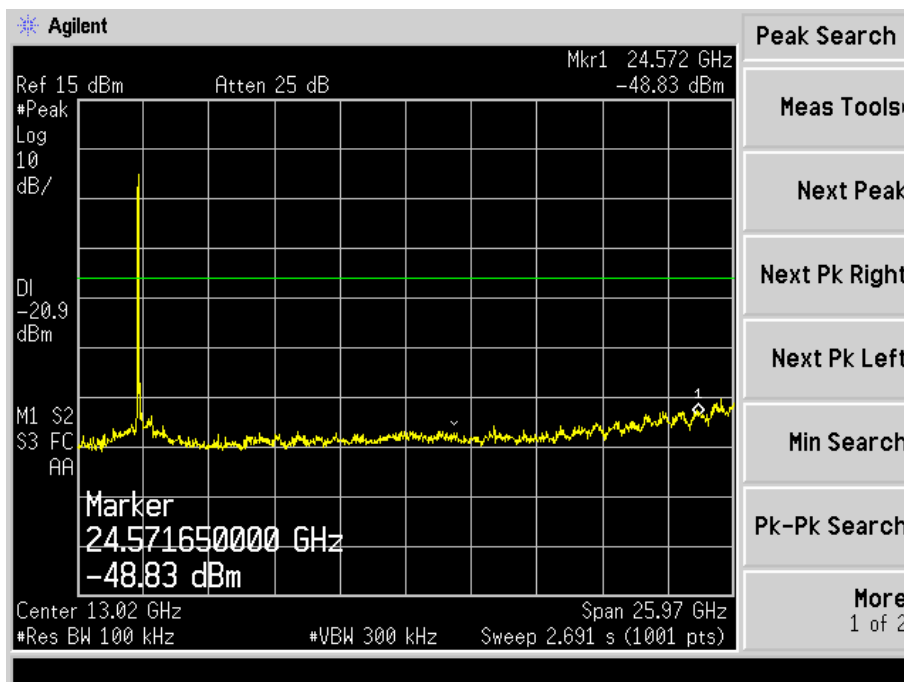

High Channel

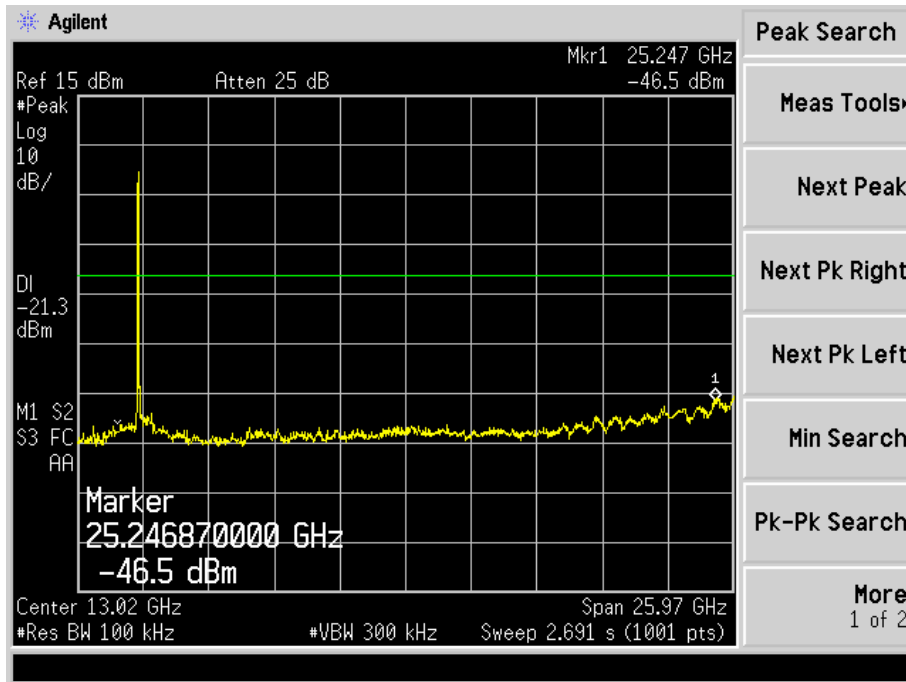

10. Conducted Emissions

10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.3 Basic Test Setup Block Diagram

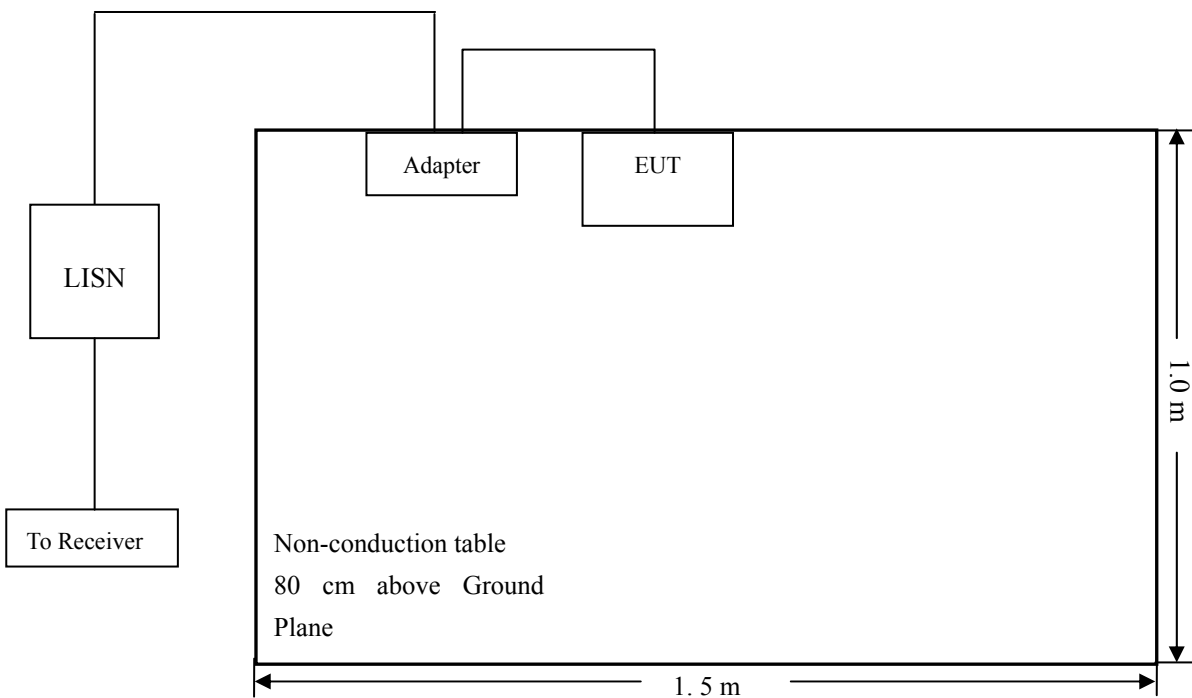

10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.6 Summary of Test Results/Plots

According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-11.30 dB at 0.5300 MHz in the **Neutral** mode, **QP** detector, **0.15-30MHz**

10.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Tablet PC
 Tested Model: MT-1001
 Operating Condition: Transmitting(Wi-Fi)
 Comment: AC 120V/60Hz; Adapter DC 5V

Test Specification: Neutral

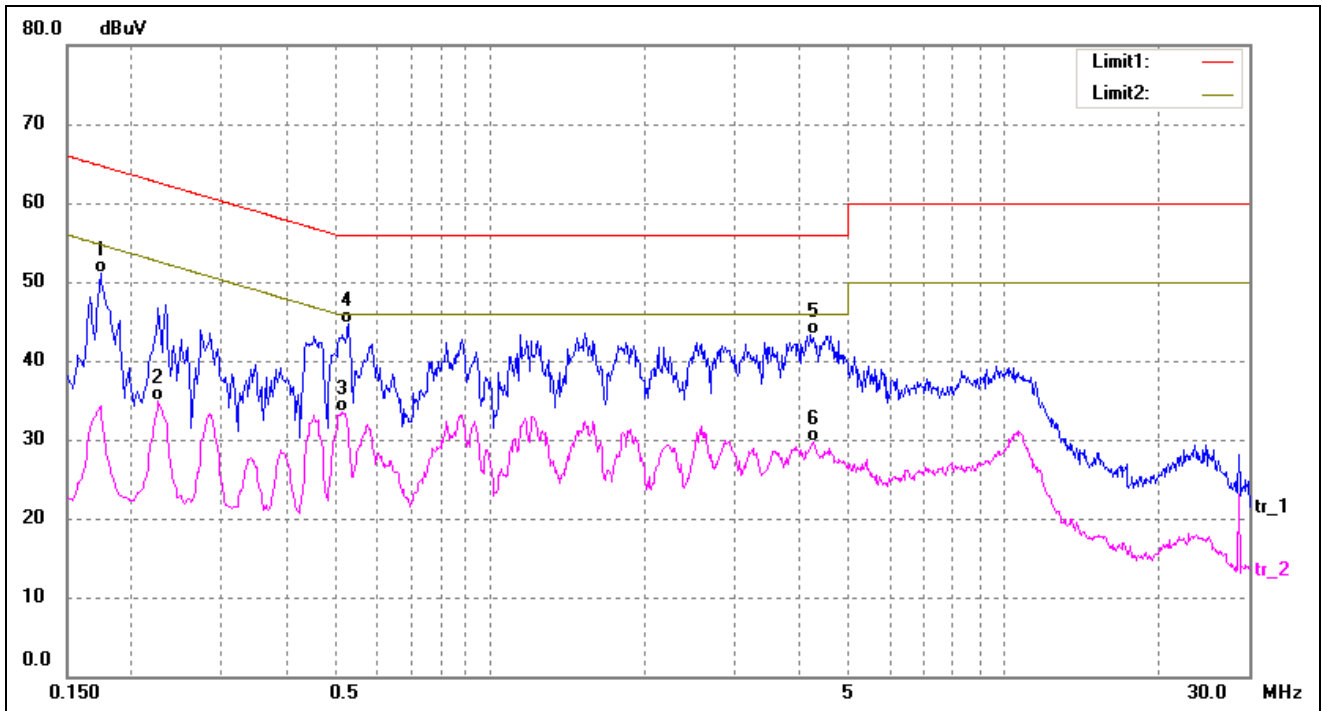

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	41.23	9.83	51.06	64.77	-13.71	QP
2	0.2260	25.04	9.80	34.84	52.60	-17.76	AVG
3	0.5140	23.71	9.80	33.51	46.00	-12.49	AVG
4*	0.5300	34.90	9.80	44.70	56.00	-11.30	QP
5	4.2020	33.67	9.68	43.35	56.00	-12.65	QP
6	4.2540	20.06	9.68	29.74	46.00	-16.26	AVG

Test Specification: Line

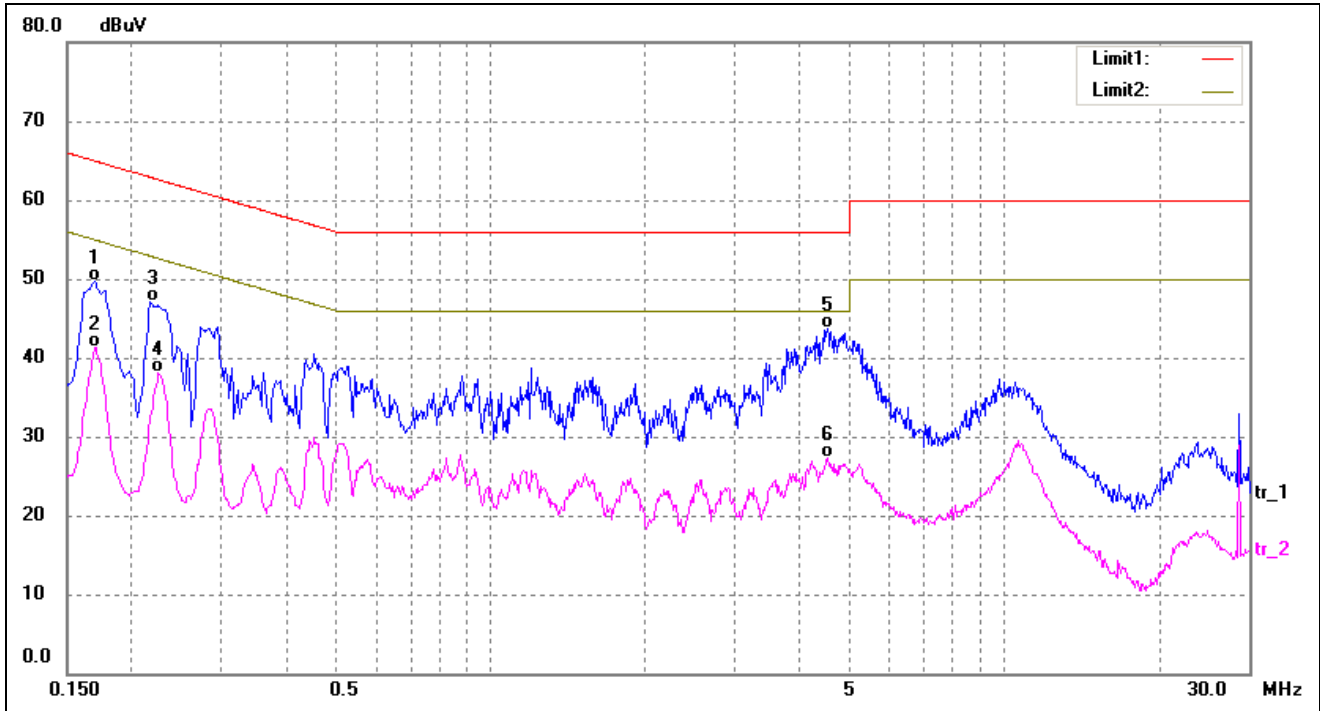

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	39.95	9.83	49.78	64.96	-15.18	QP
2	0.1700	31.55	9.83	41.38	54.96	-13.58	AVG
3	0.2180	37.24	9.80	47.04	62.89	-15.85	QP
4	0.2260	28.23	9.80	38.03	52.60	-14.57	AVG
5*	4.5460	34.05	9.67	43.72	56.00	-12.28	QP
6	4.5460	17.70	9.67	27.37	46.00	-18.63	AVG

***** END OF REPORT *****