

Annex 5

Number of hopping frequencies


(1 page)

The client has received this report in electronic form. DELTA keeps a paper copy of the report.

For practical purposes, DANAK's liability conditions are enclosed as the last page of part 1 of the report, but are not included in the total number of pages.

The PDF-version consists of 3 parts. This is part 3.

THE KNOXLEDGE CENTER

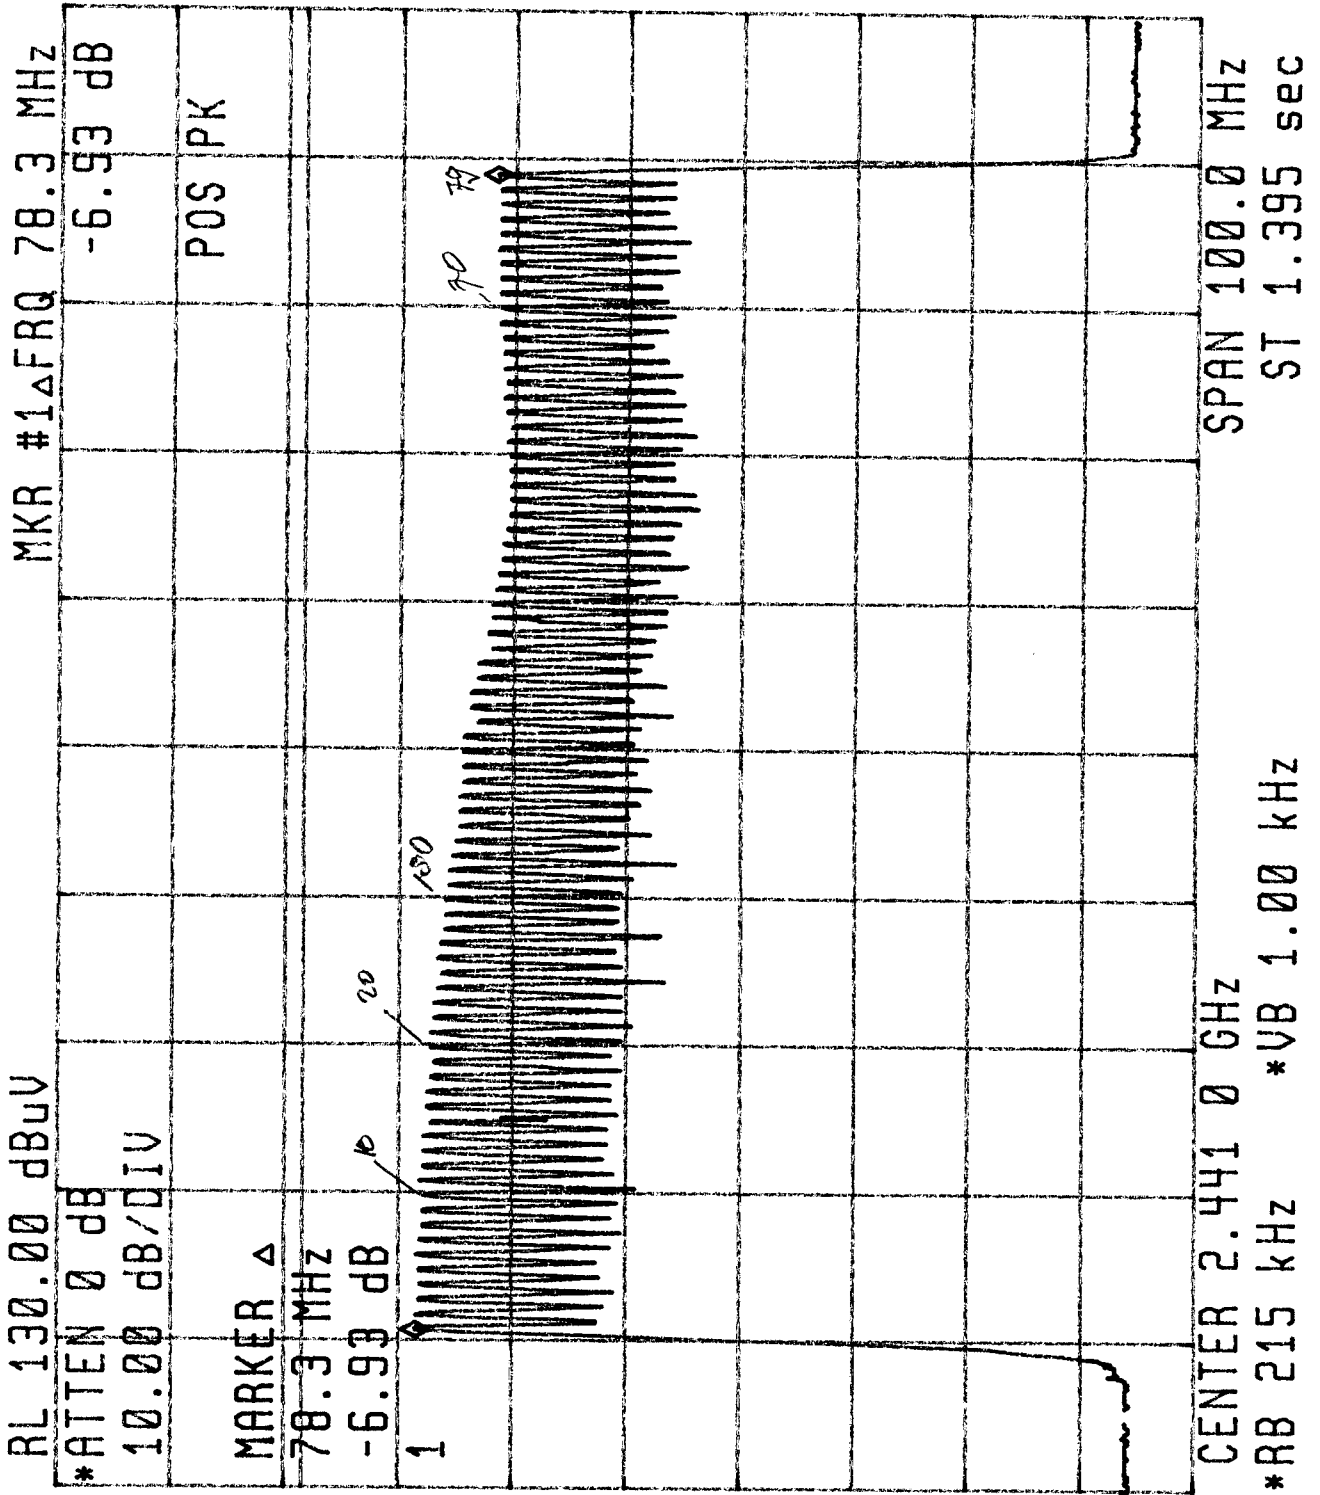

Sheet 102


DELTA

Annex 6

20 dB bandwidth

(2 page)

RL 130.00 dBuV MKR #1 ΔFRQ 735 kHz

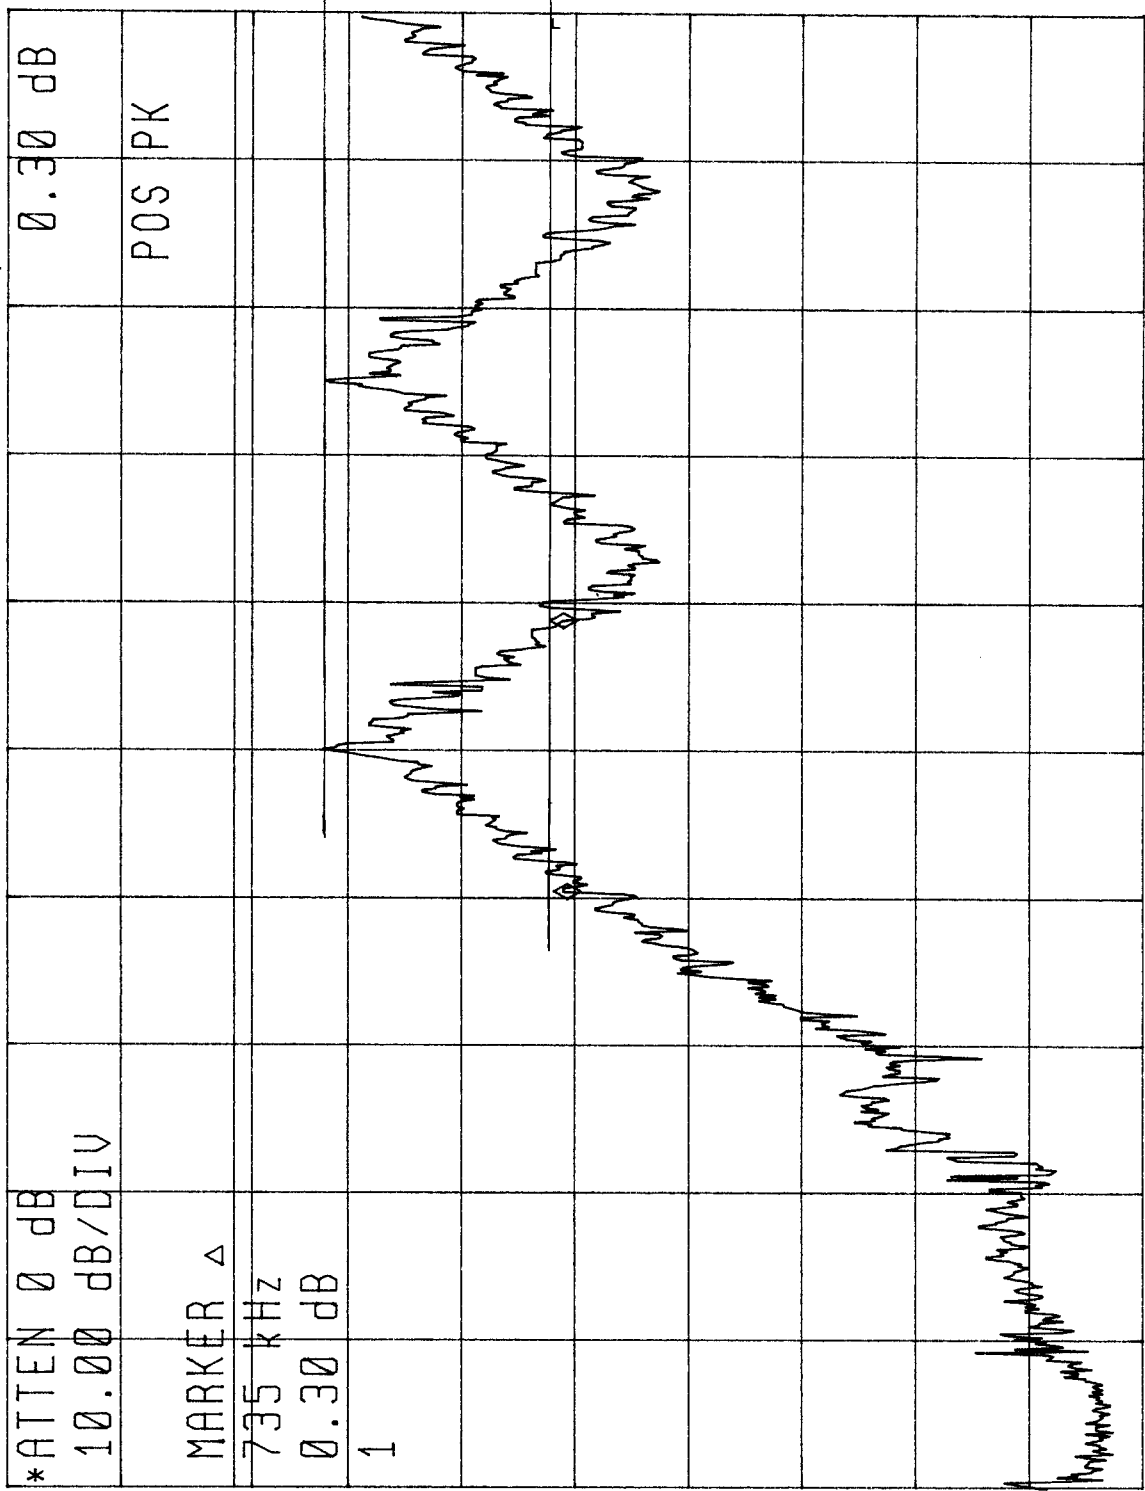

*ATTEN 0 dB
10.00 dB/DIV

MARKER Δ
735 kHz
0.30 dB
1

CENTER 2.401 980 GHz
*RB 10.0 kHz *VB 30.0 kHz
SPAN 4.000 MHz
ST 120.0 msec

EXT

RL 130.00 dBuV

MKR #1 Δ FRQ 490 kHz

*ATTEN 0 dB

10.00 dB/DIV

-0.25 dB

POS PK

MARKER Δ

490 kHz

-0.25 dB

1

20dB BW
0.78MHz

START 2.401 000 GHz

STOP 2.403 000 GHz

*RB 10.0 kHz

*VB 30.0 kHz

ST 60.00 msec

DELTA

Sheet 101

Annex 7


Time of occupancy

(2 pages)

RL 130.00 dBuV

*ATTEN 0 dB

10.00 dB/DIV

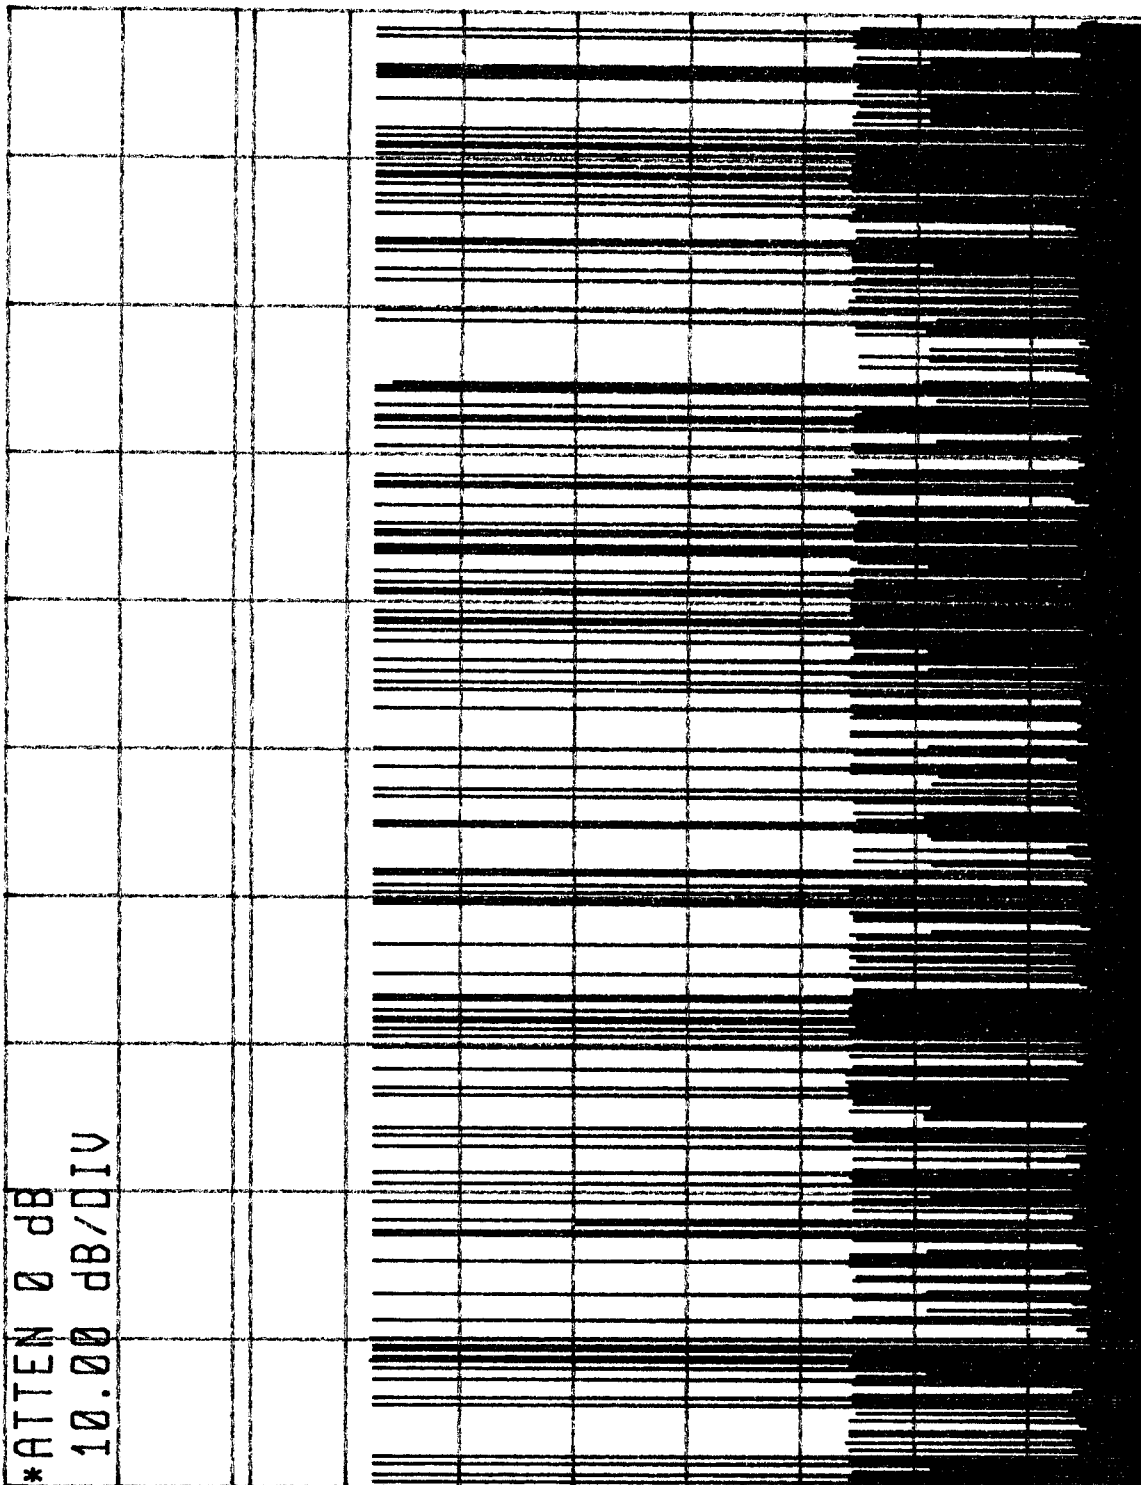

CENTER 2.441 000 000 GHz

*RB 100 kHz

*VB 3.00 kHz


SPAN 0 Hz

*ST 30.00 sec

INT

108 x 3ms
324ms
in 309

INT

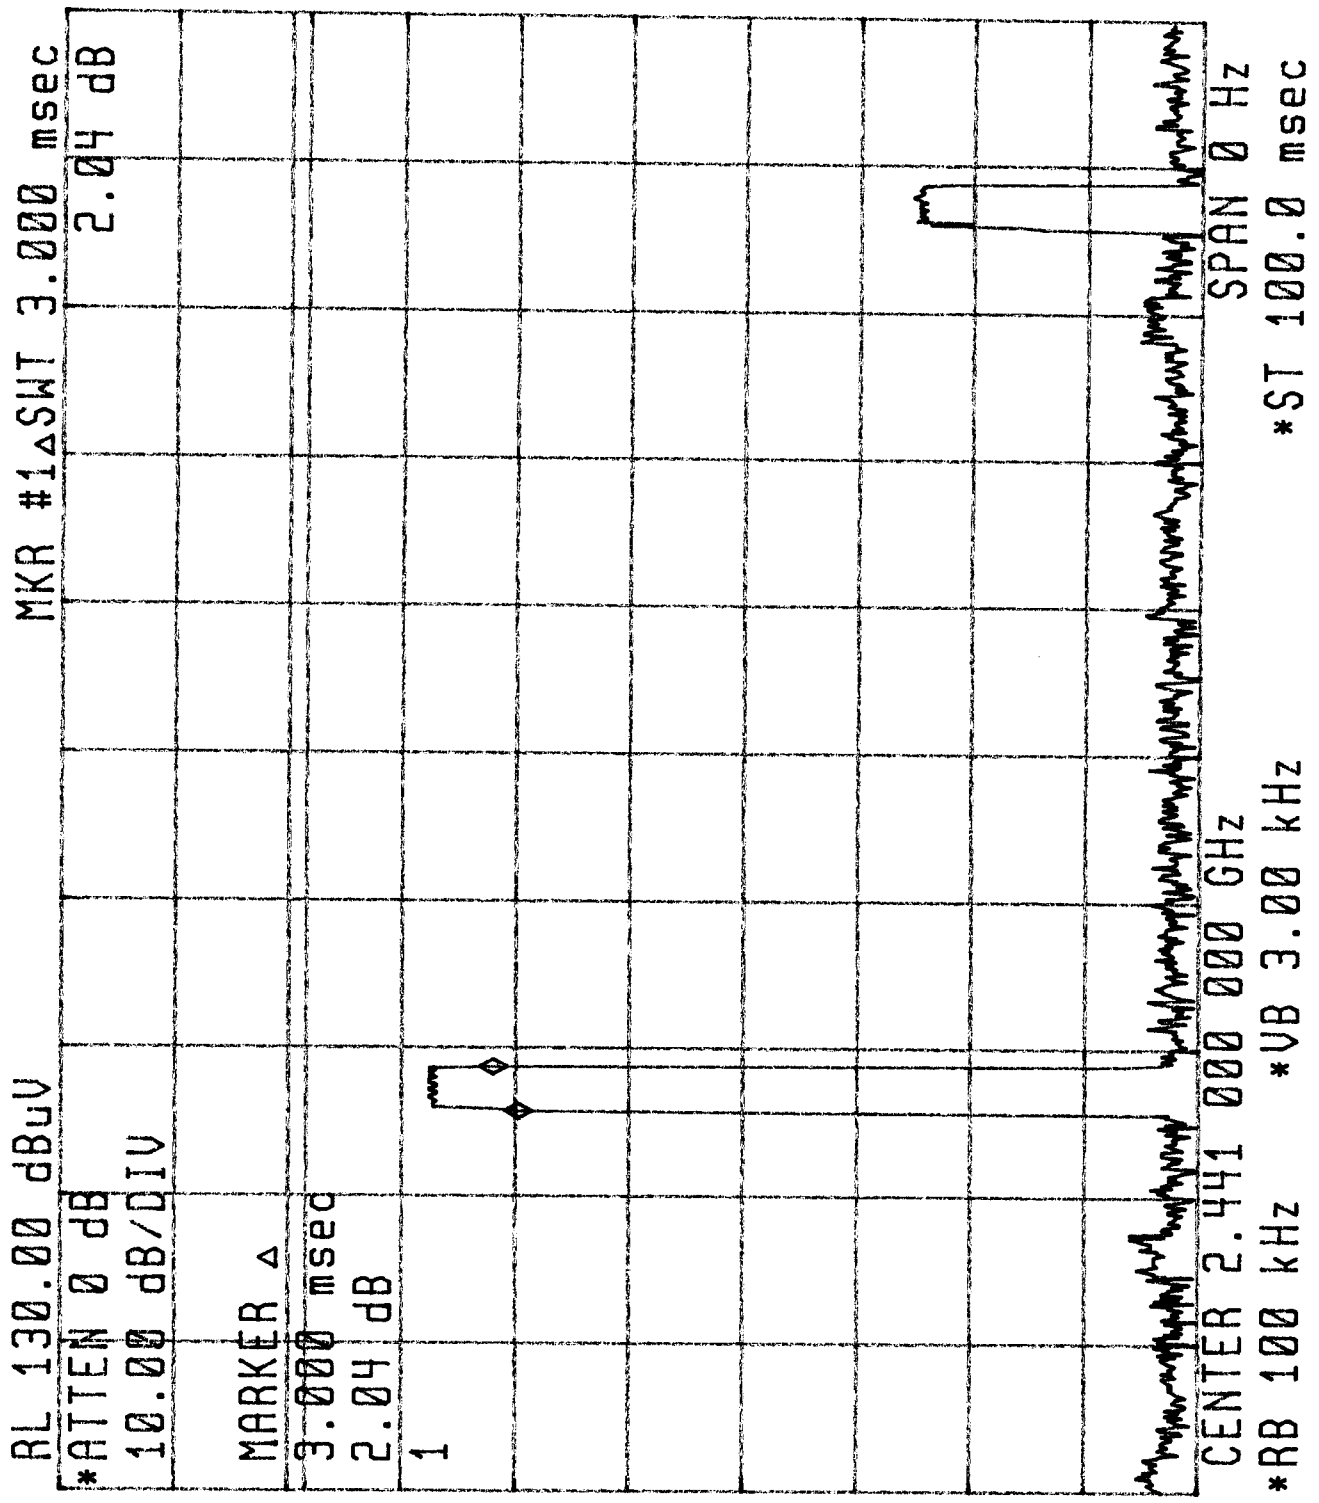


Annex 8


Carrier frequency separation


(1 pages)


INT

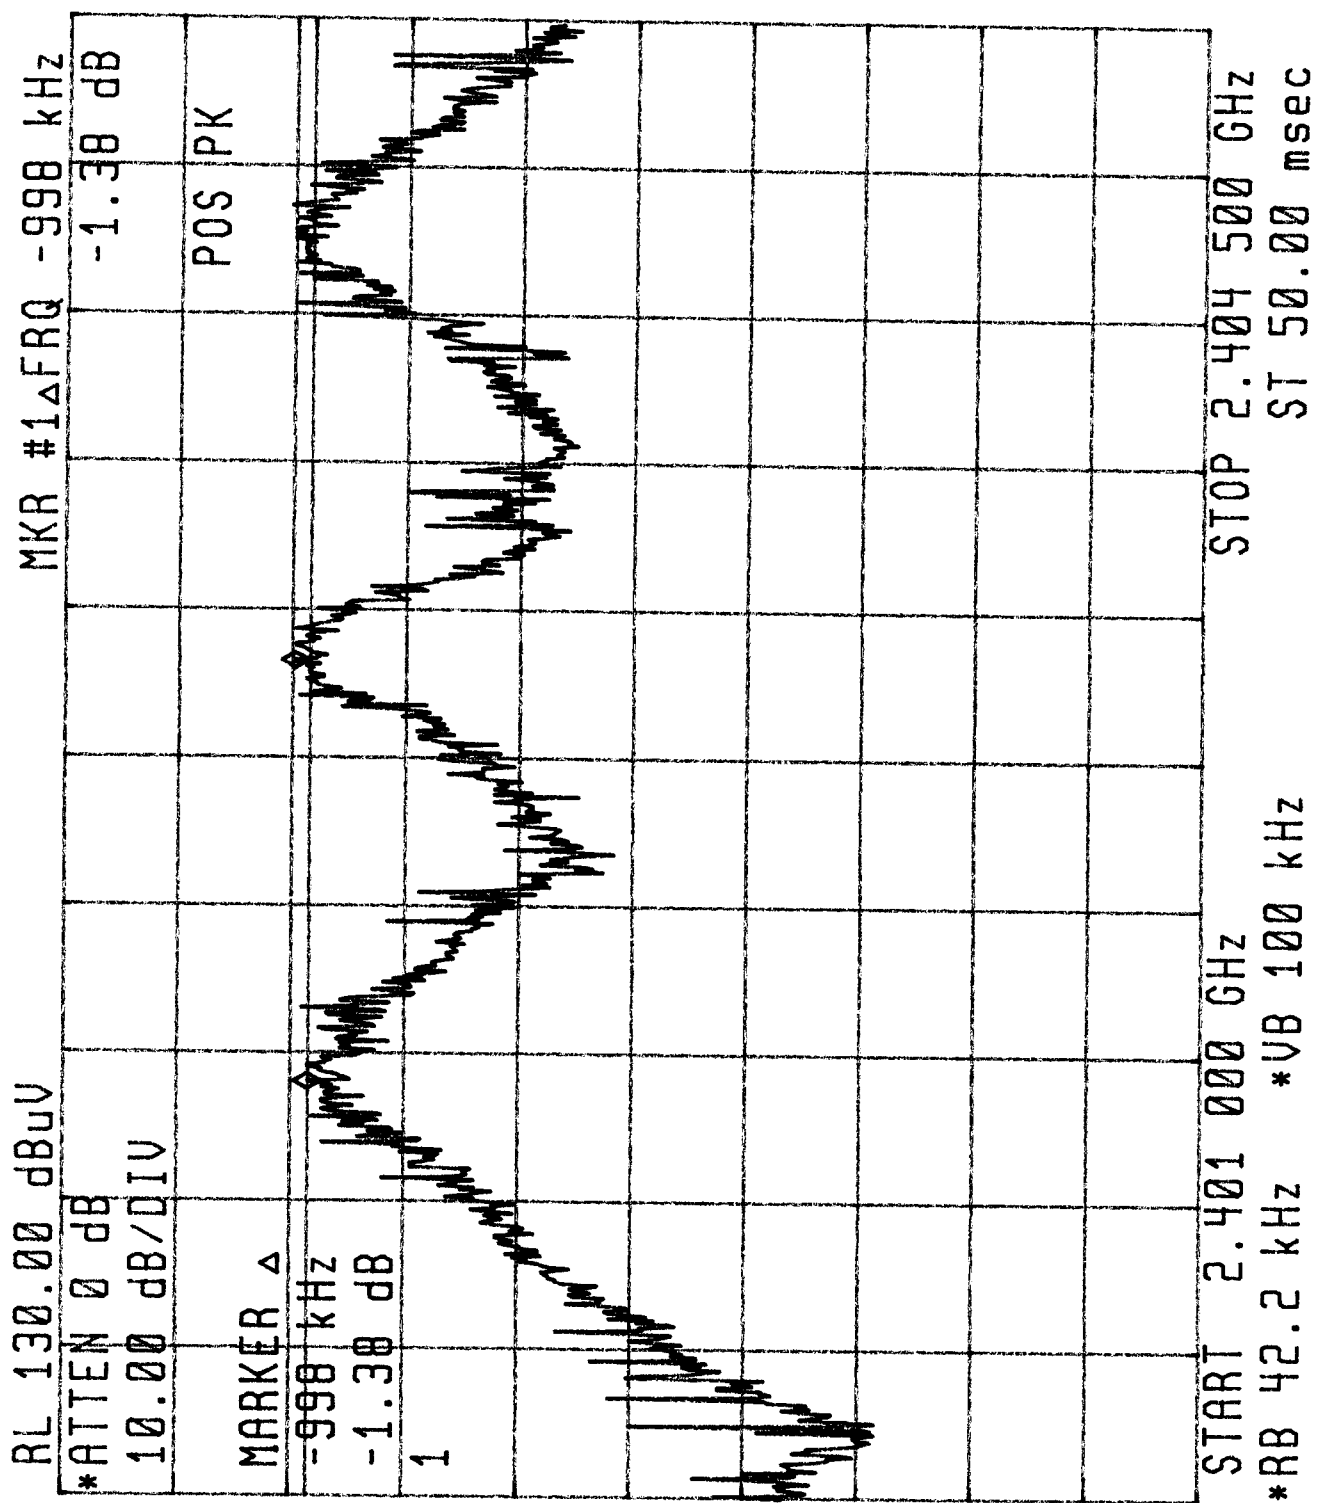


Annex 9
Occupied bandwidth
(4 pages)

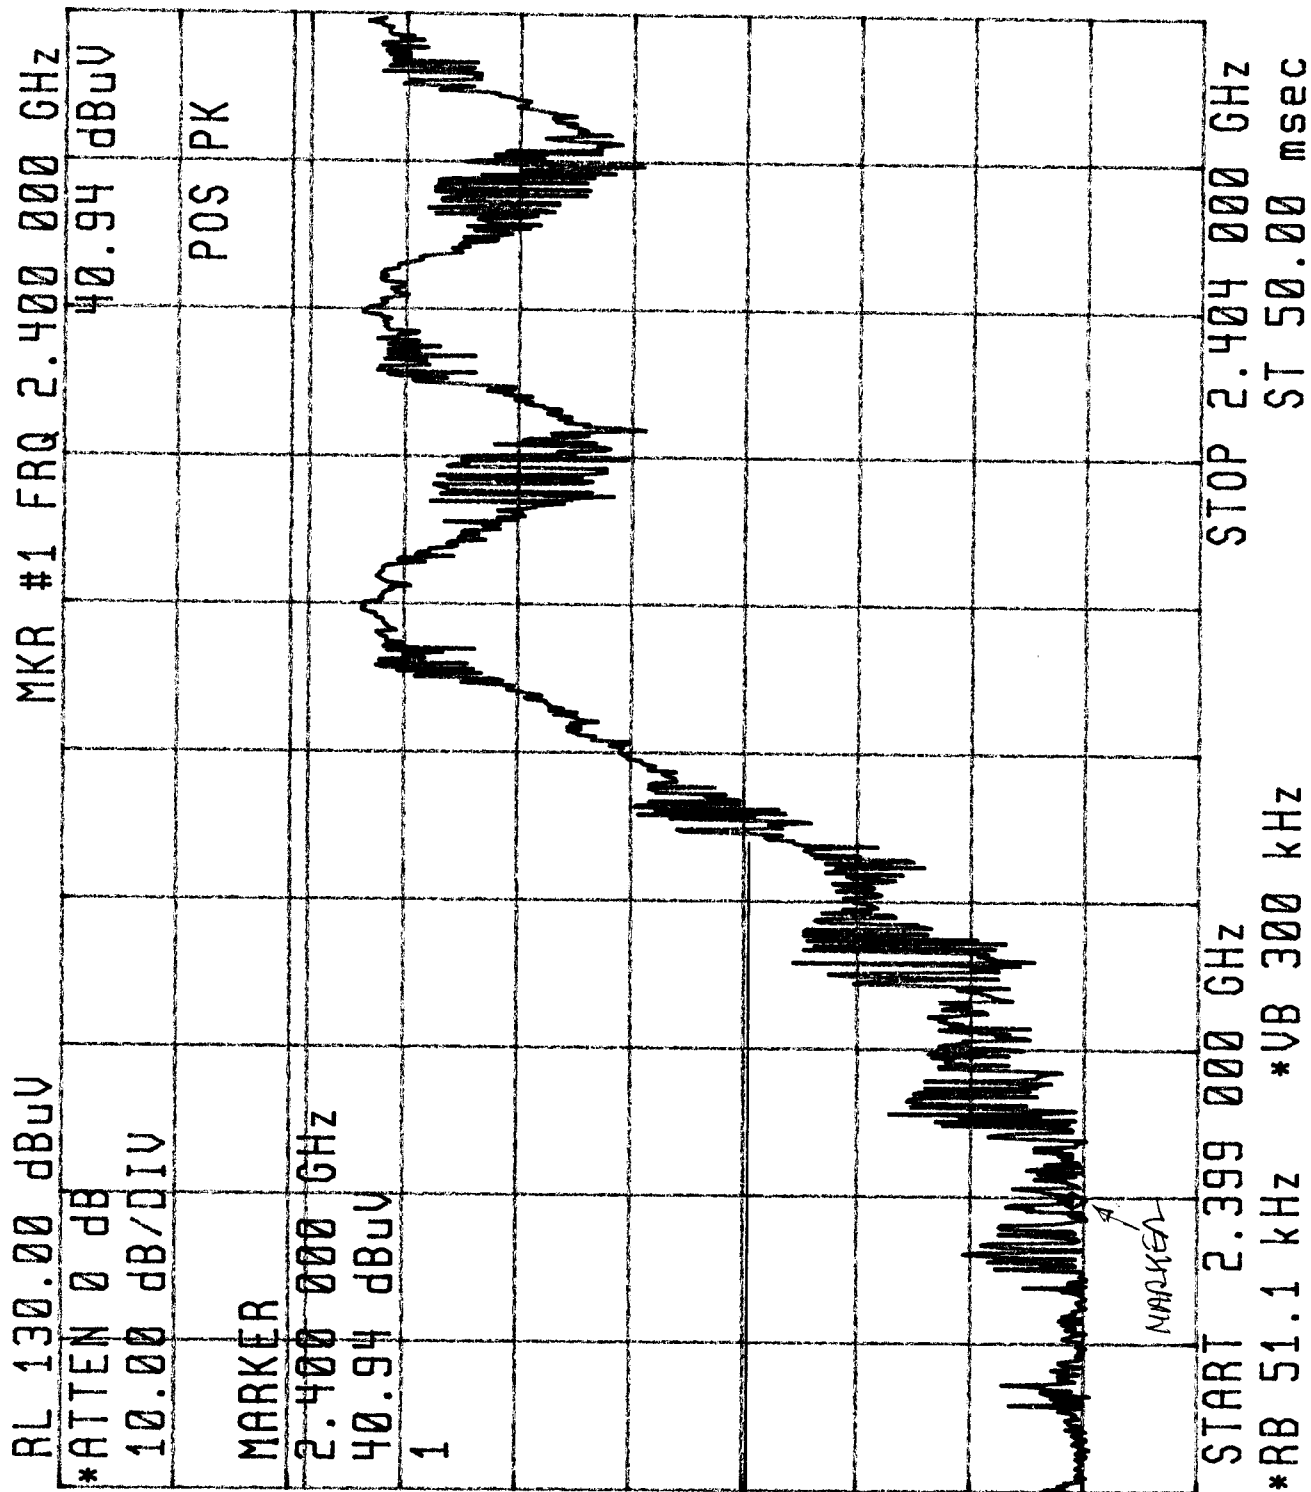

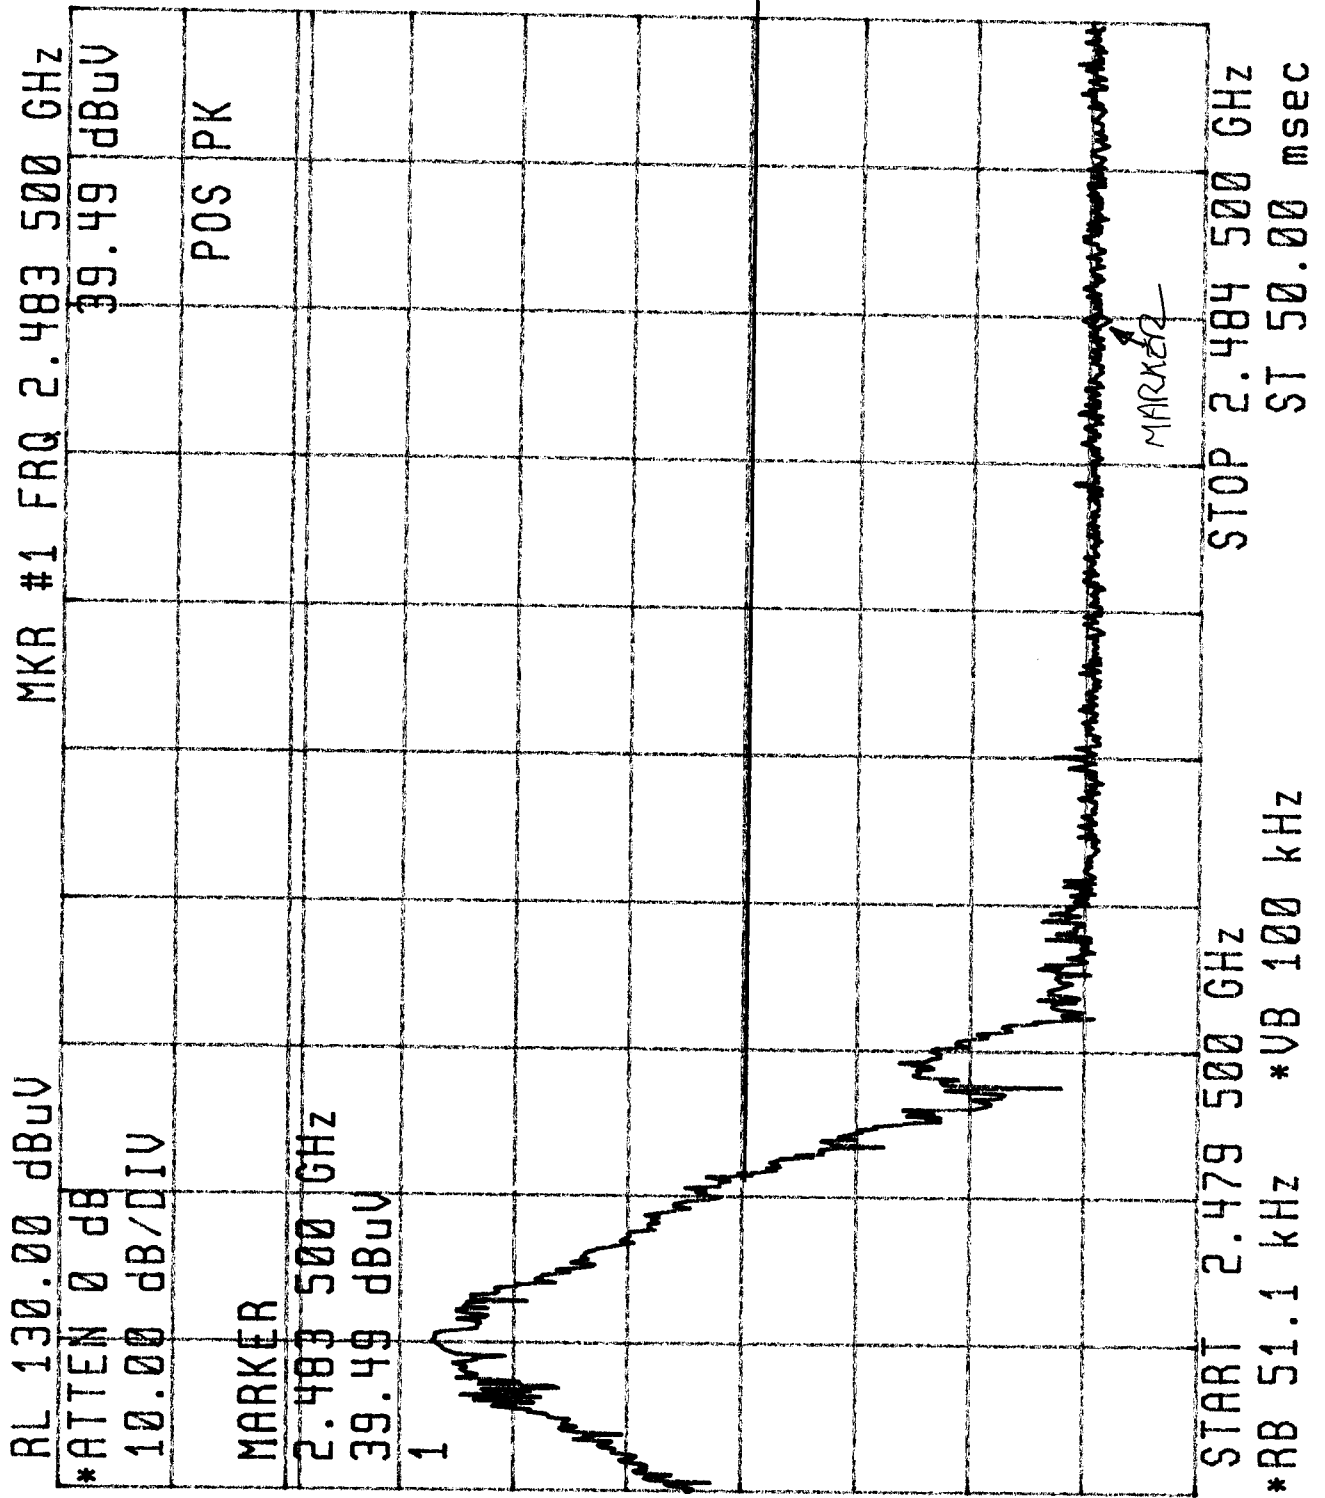

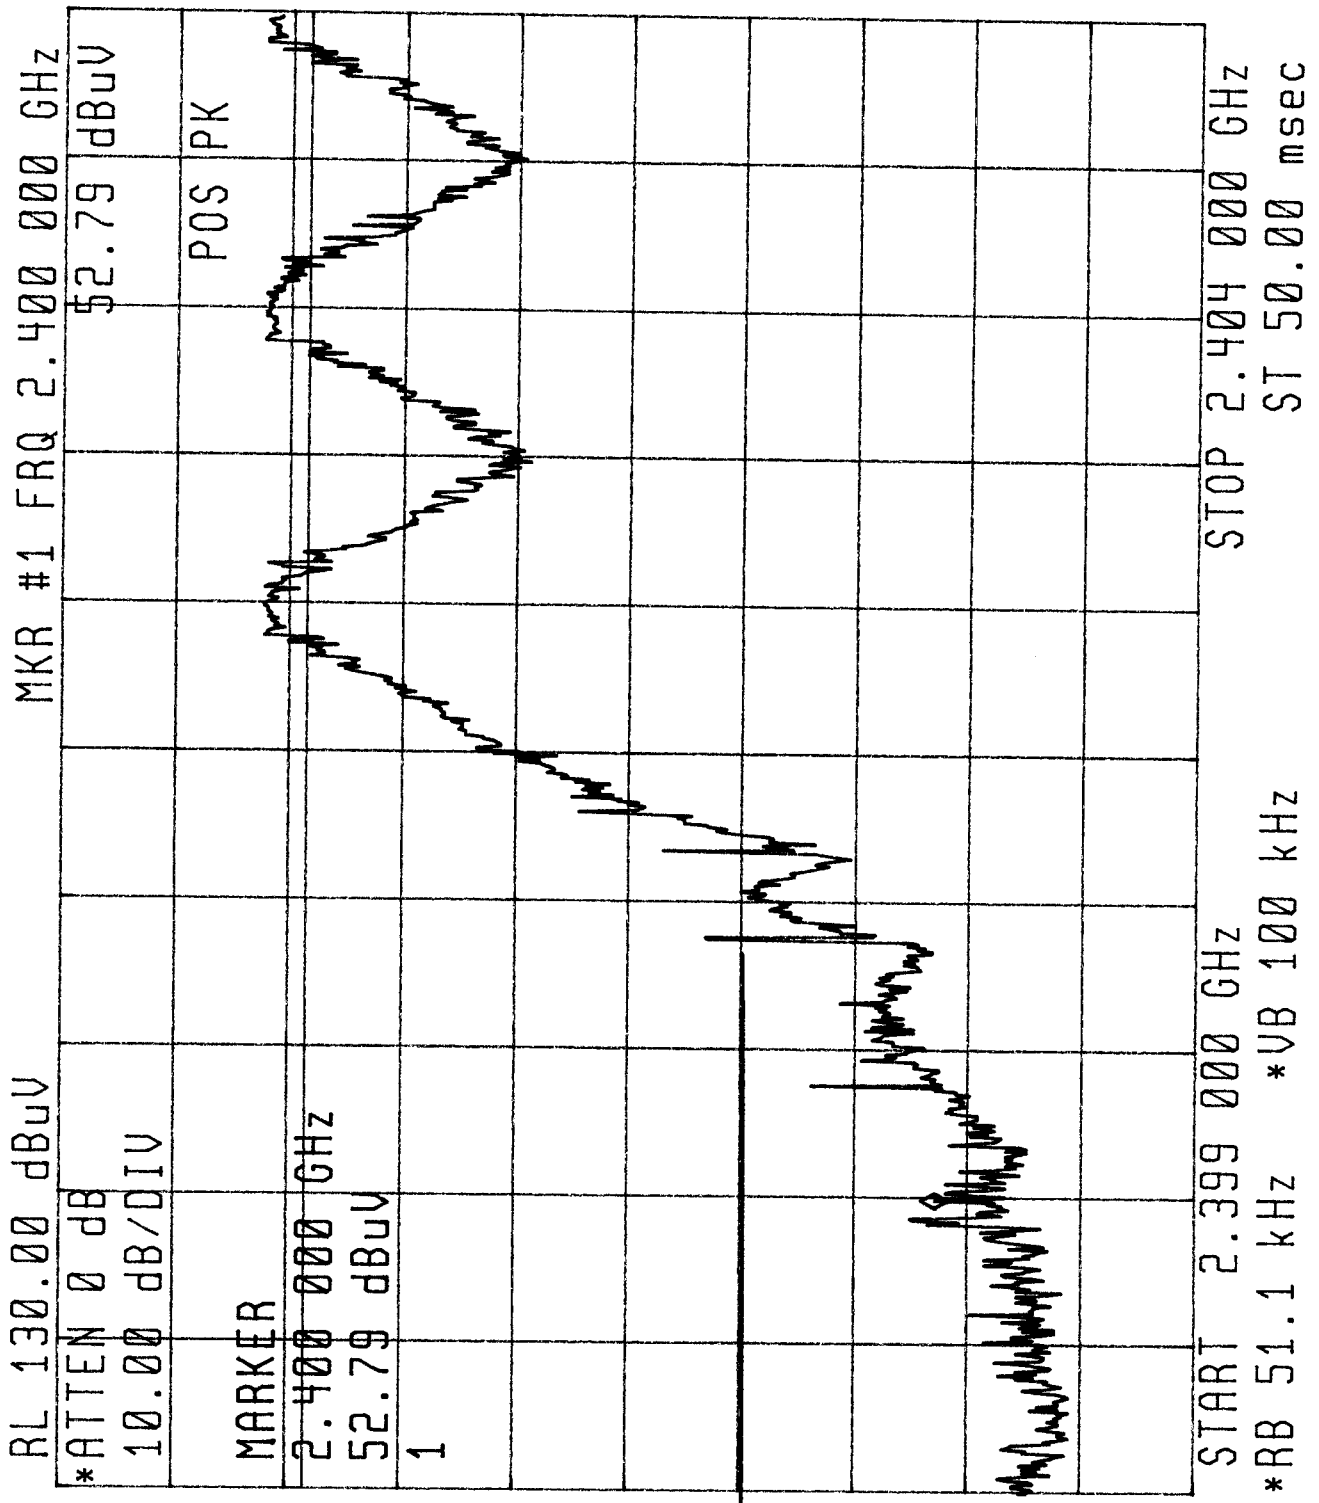

54 dBuV

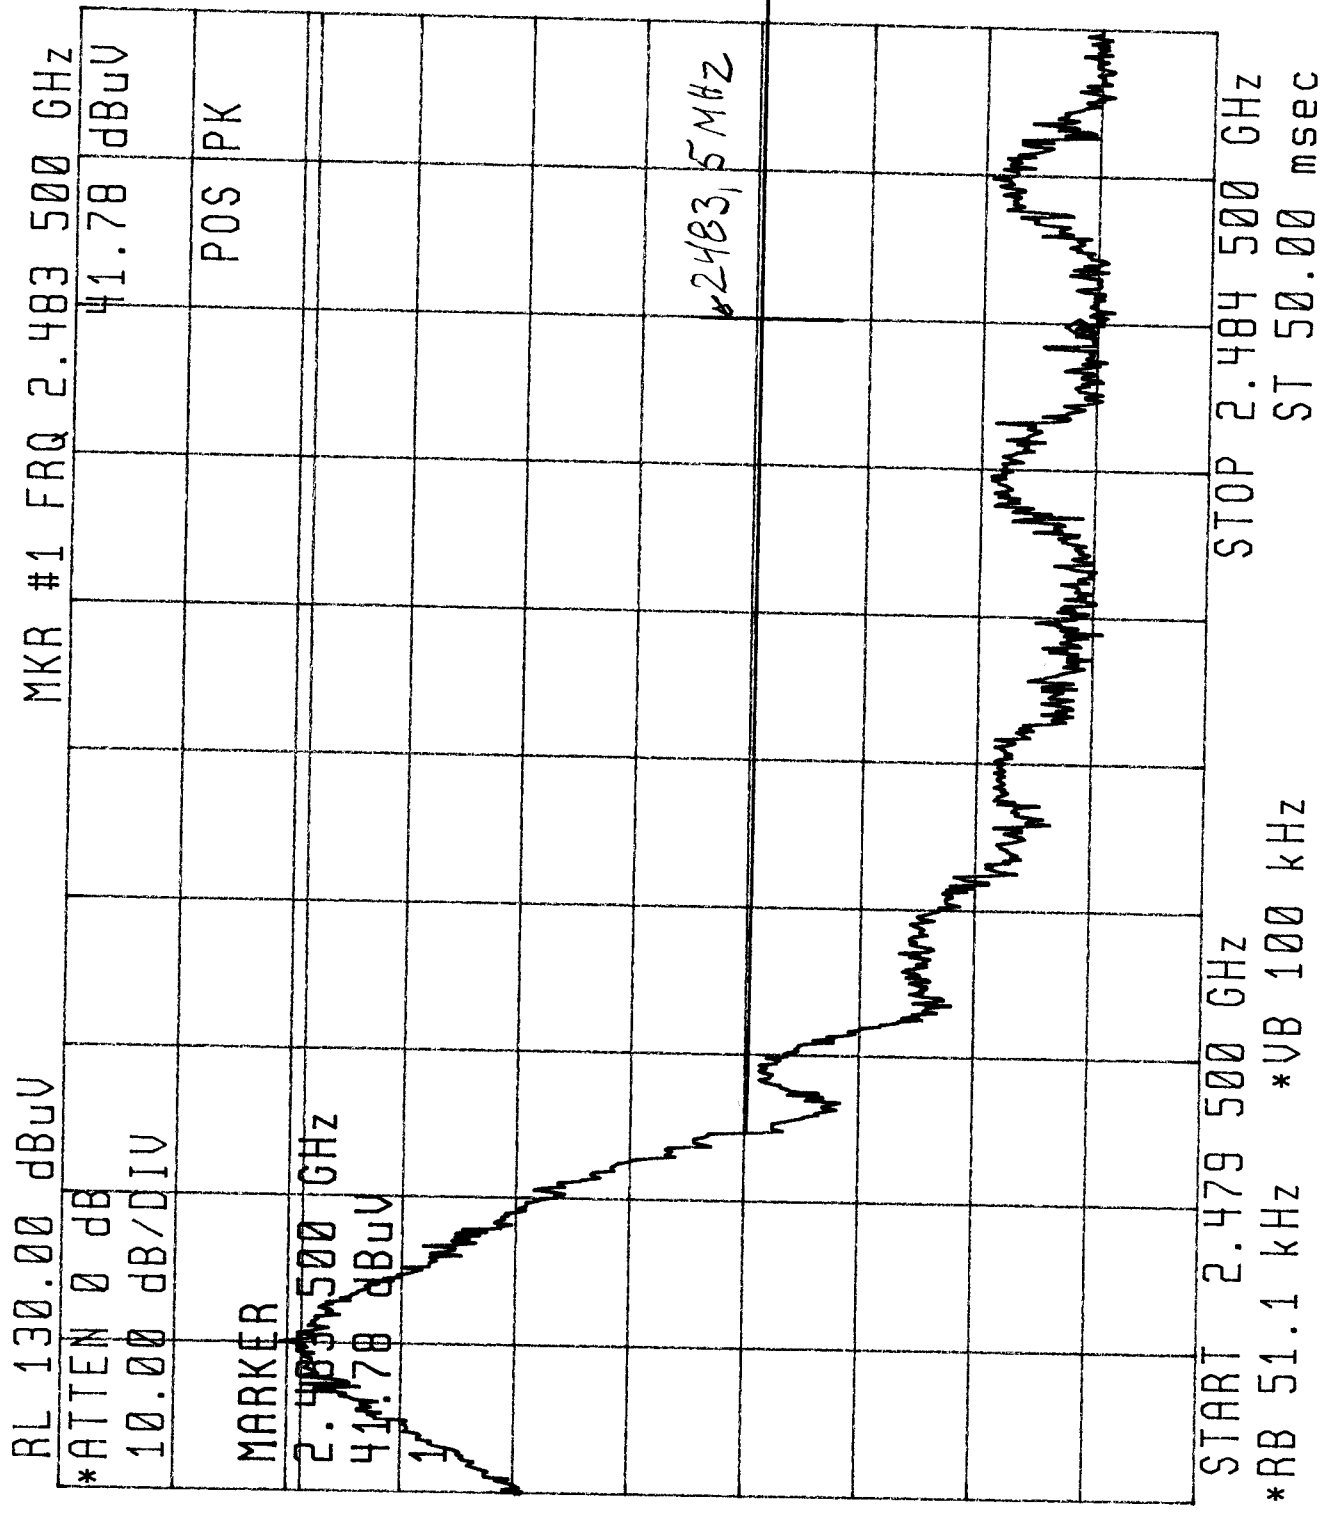


Annex 10


Peak output power

(2 pages)

EXR AUT,
TX HI 2400
RX HI
HORV

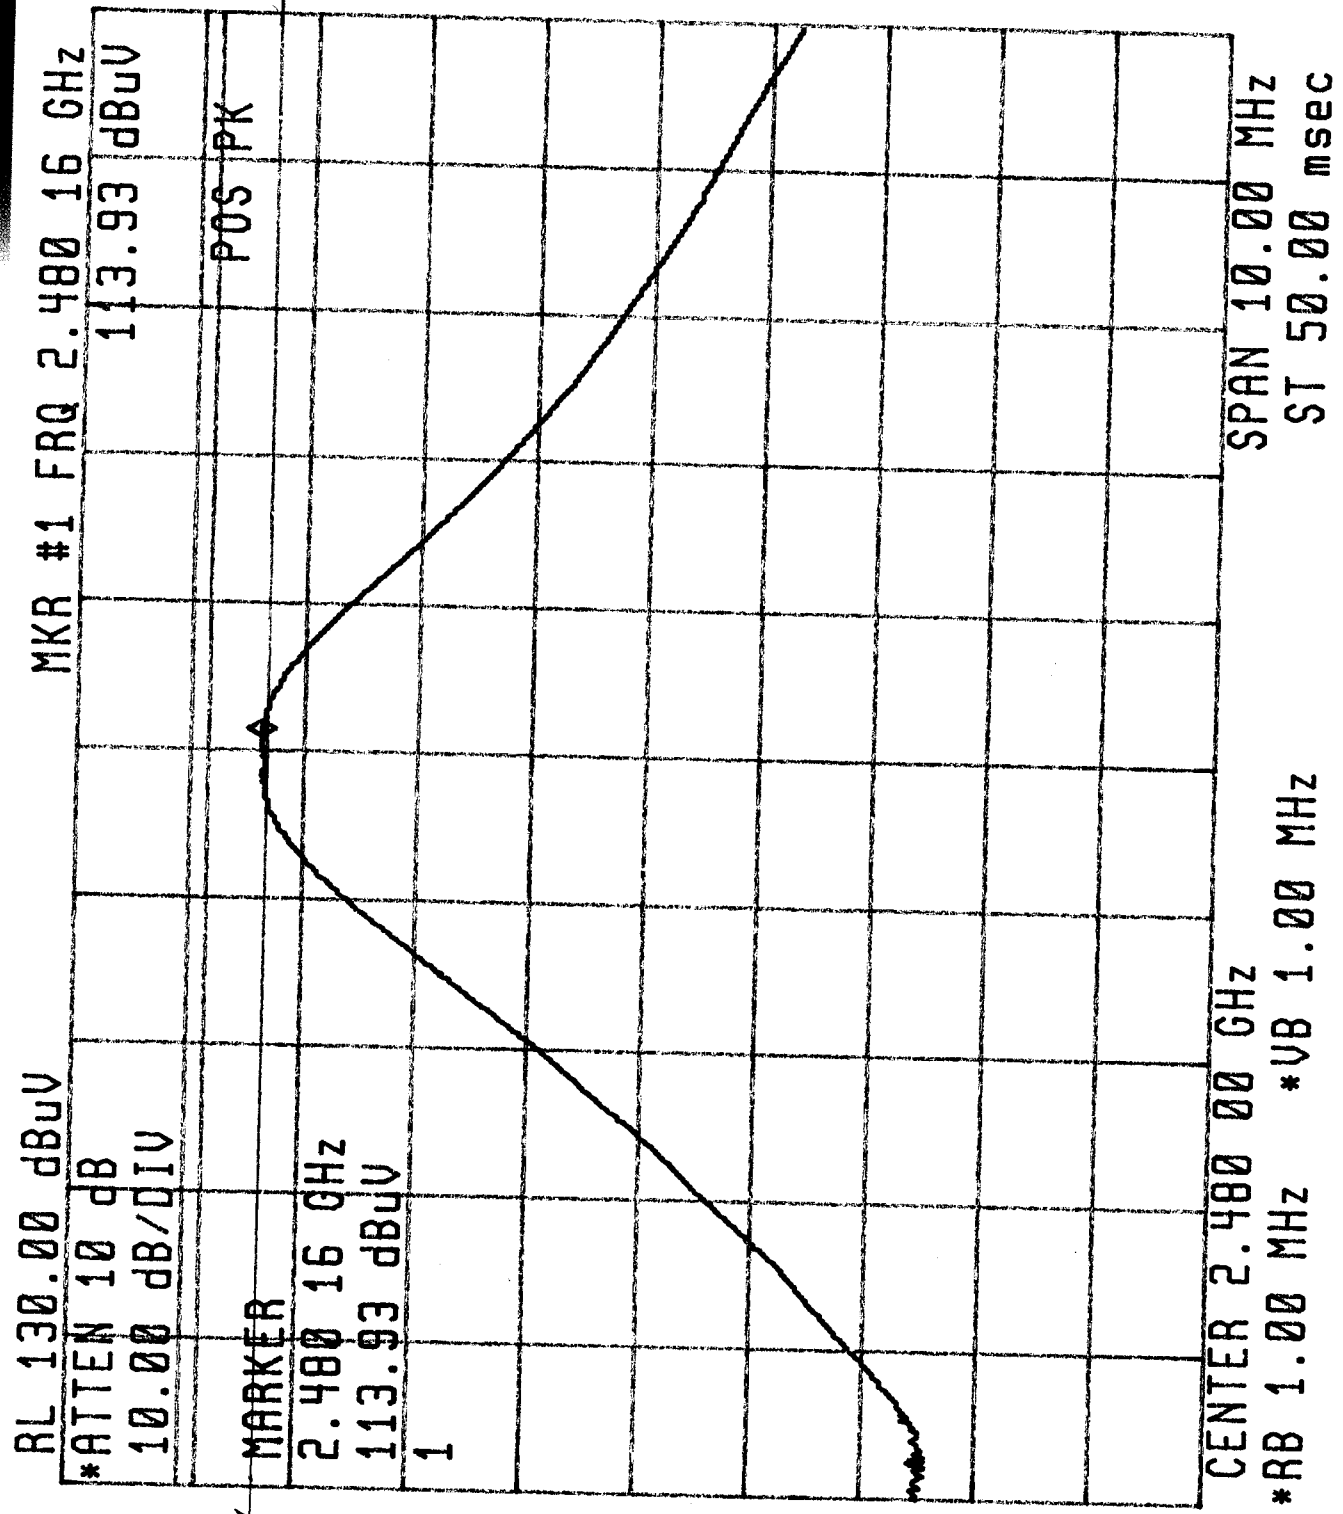

odbm



INTERNAL ANT

HOP-ON


HOP-ON

0dBm

54dBuV

RL 130.00 dBuV

MKR #1 FRQ 1.891 GHz

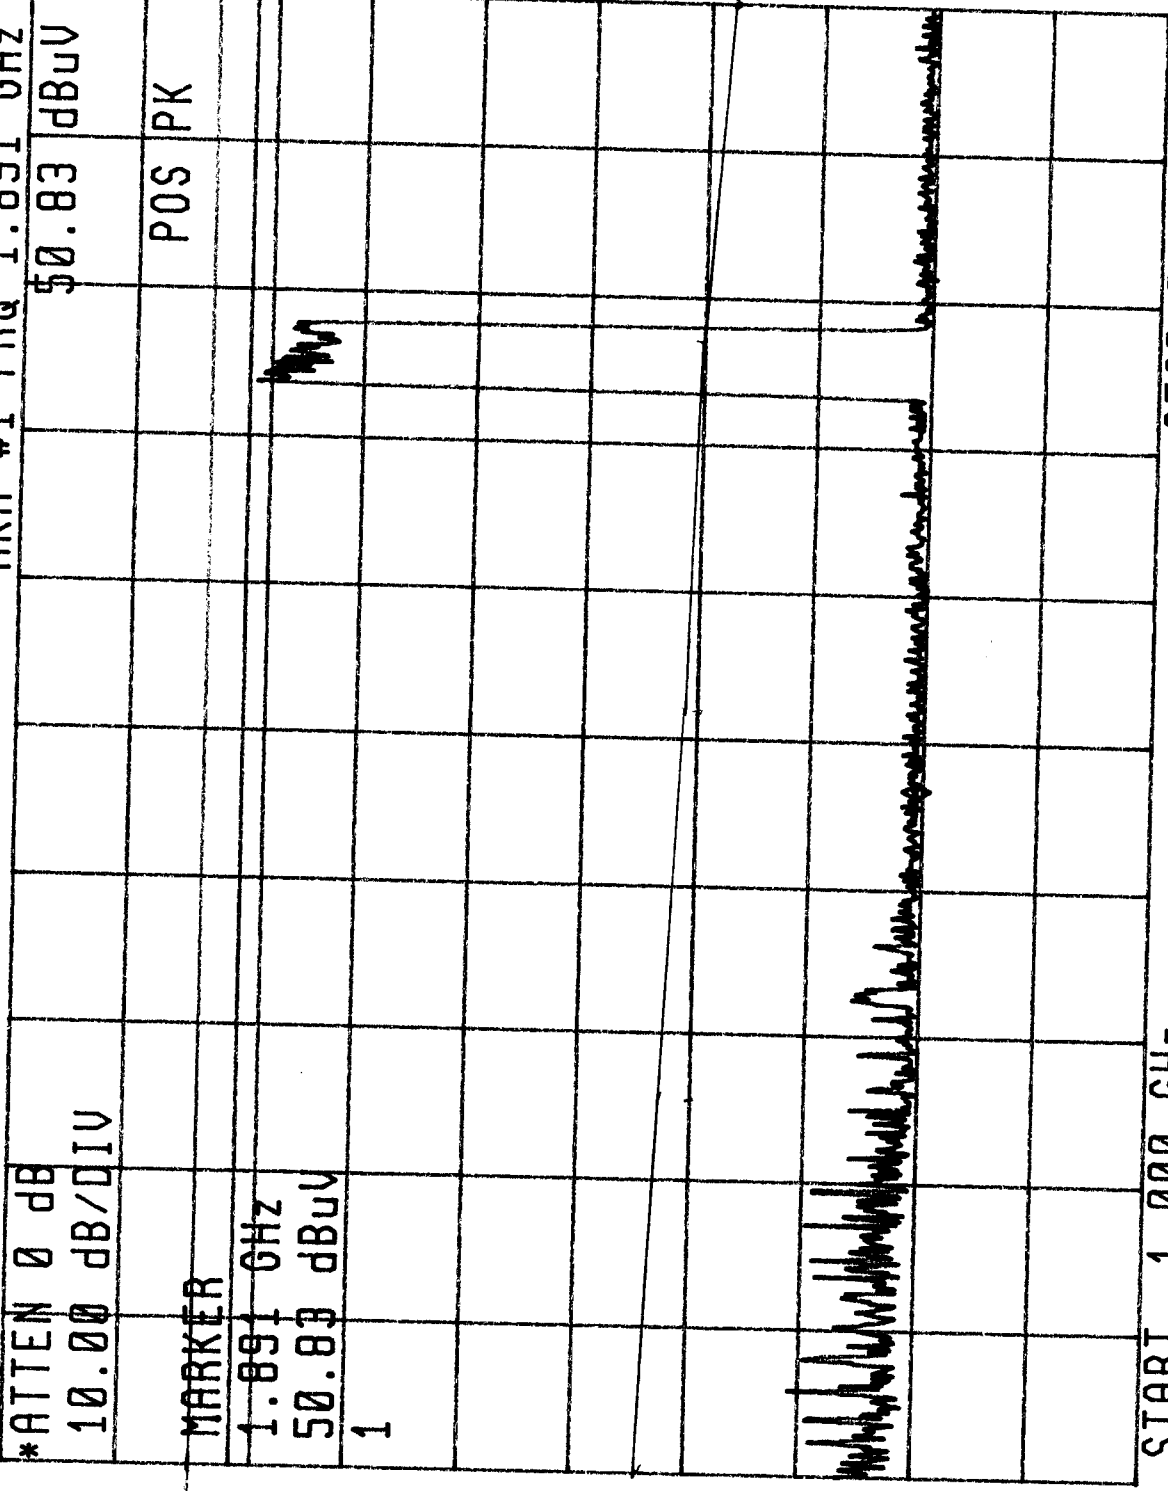


START 1.000 GHz
*RB 1.00 MHz *VB 1.00 MHz
STOP 2.900 GHz
ST 50.00 msec

Annex 11

Relative power in 100 kHz bandwidth


(4 pages)


EX

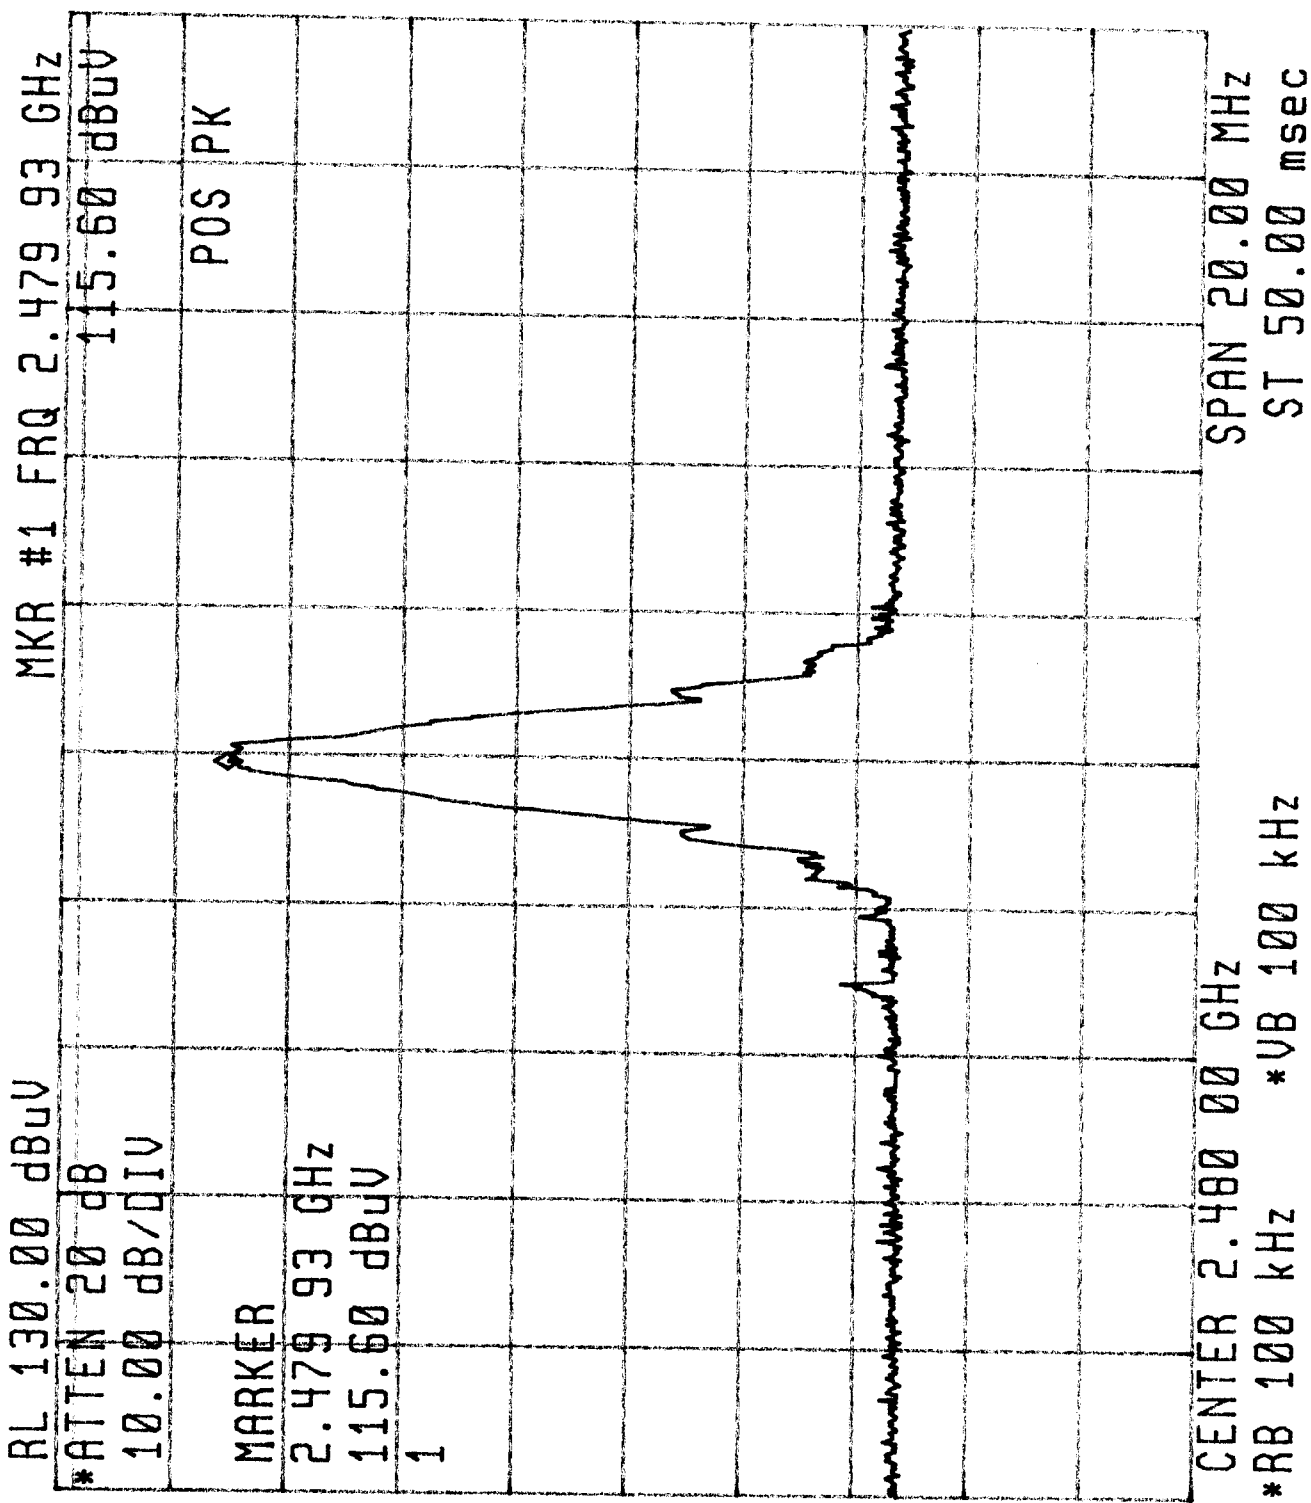

EX


3, harmon
of 2180

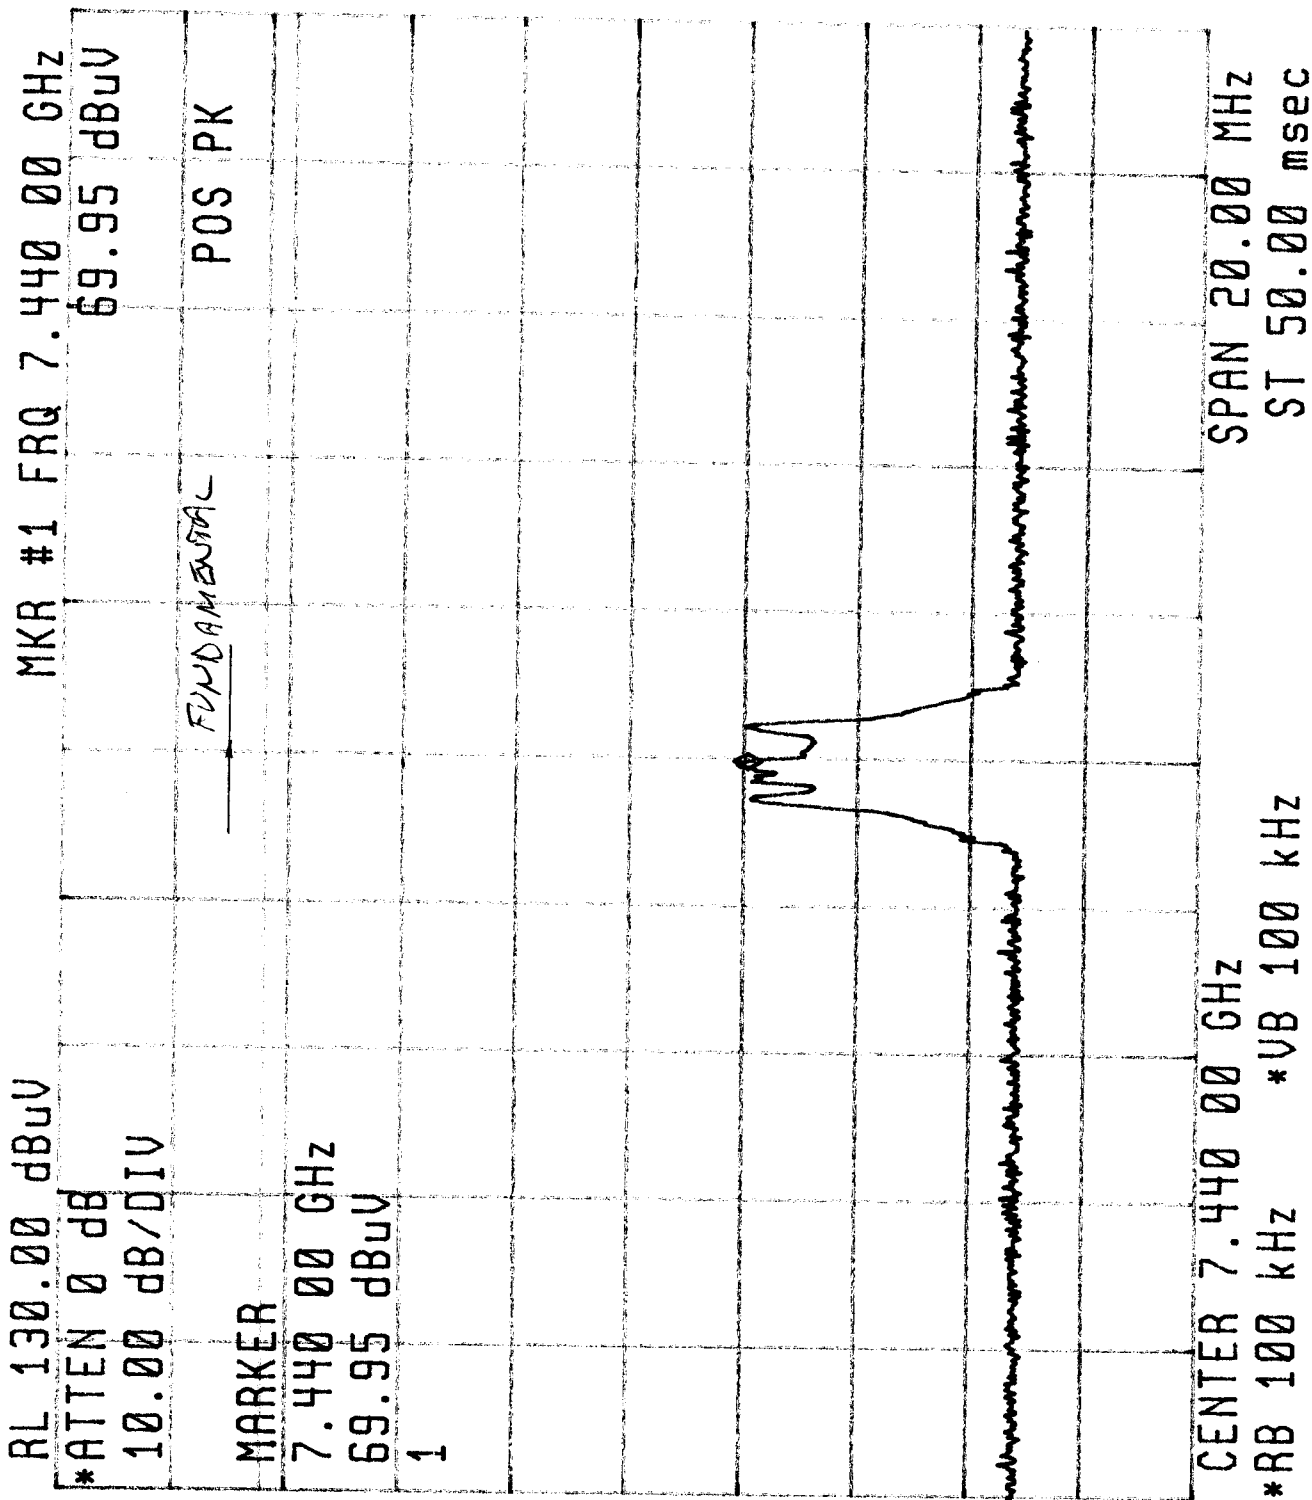

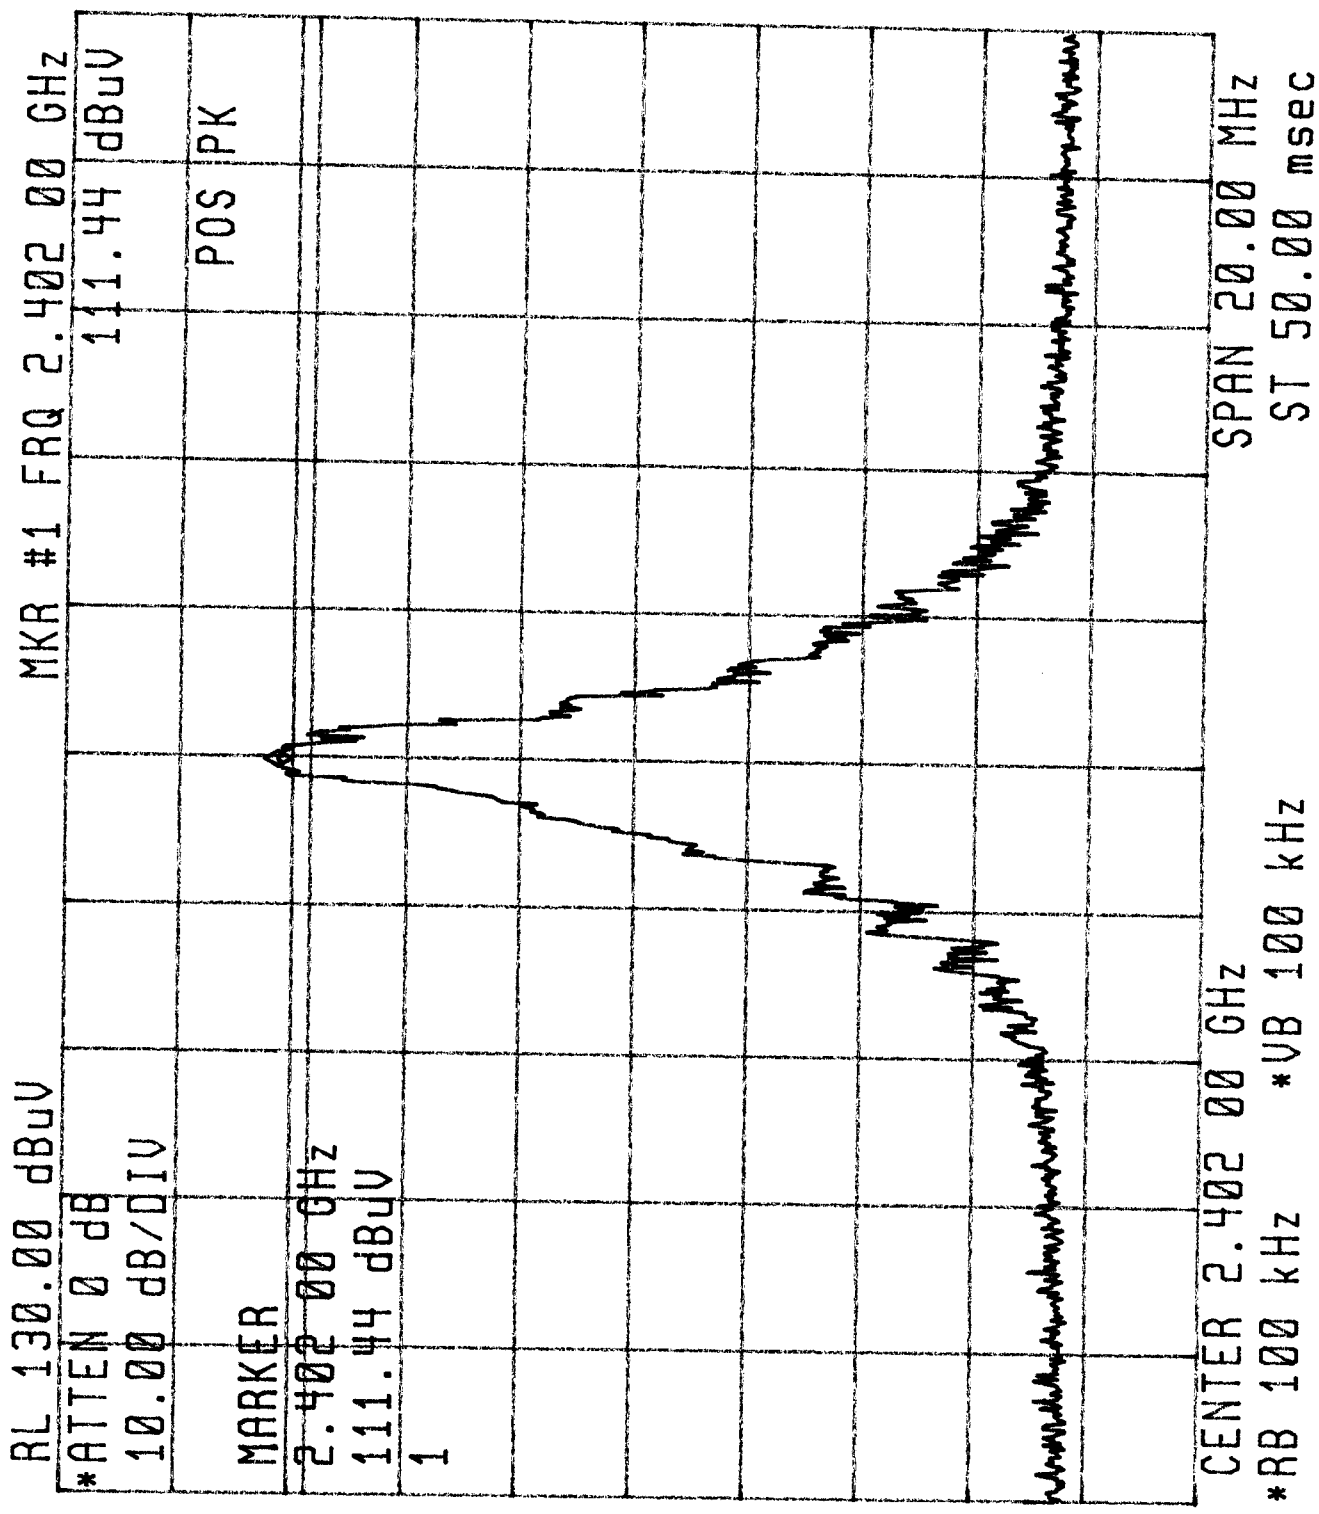

12T

2. HARM
OF 2402

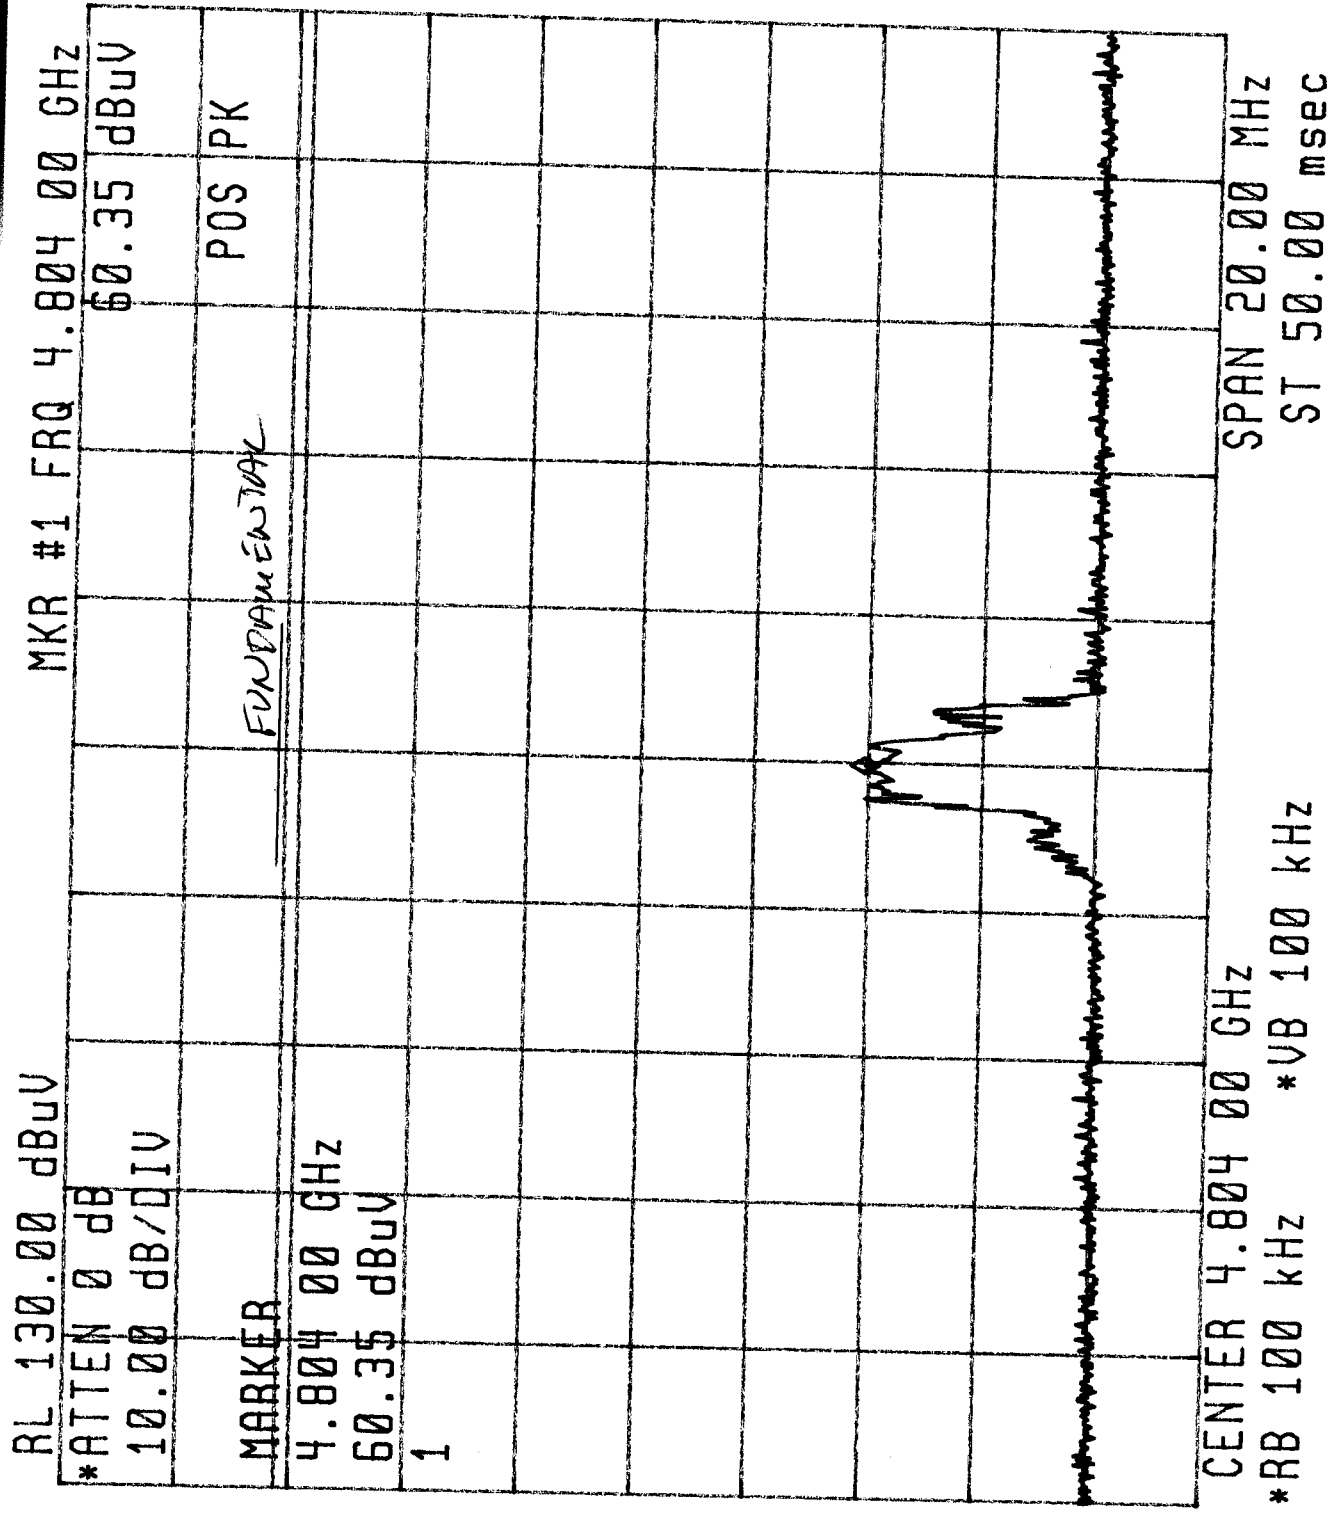


Annex 12

Peak power spectral density

(2 pages)

EXT ANT
INQ-MODE
HOR
0 dBm
-6.7 dBm

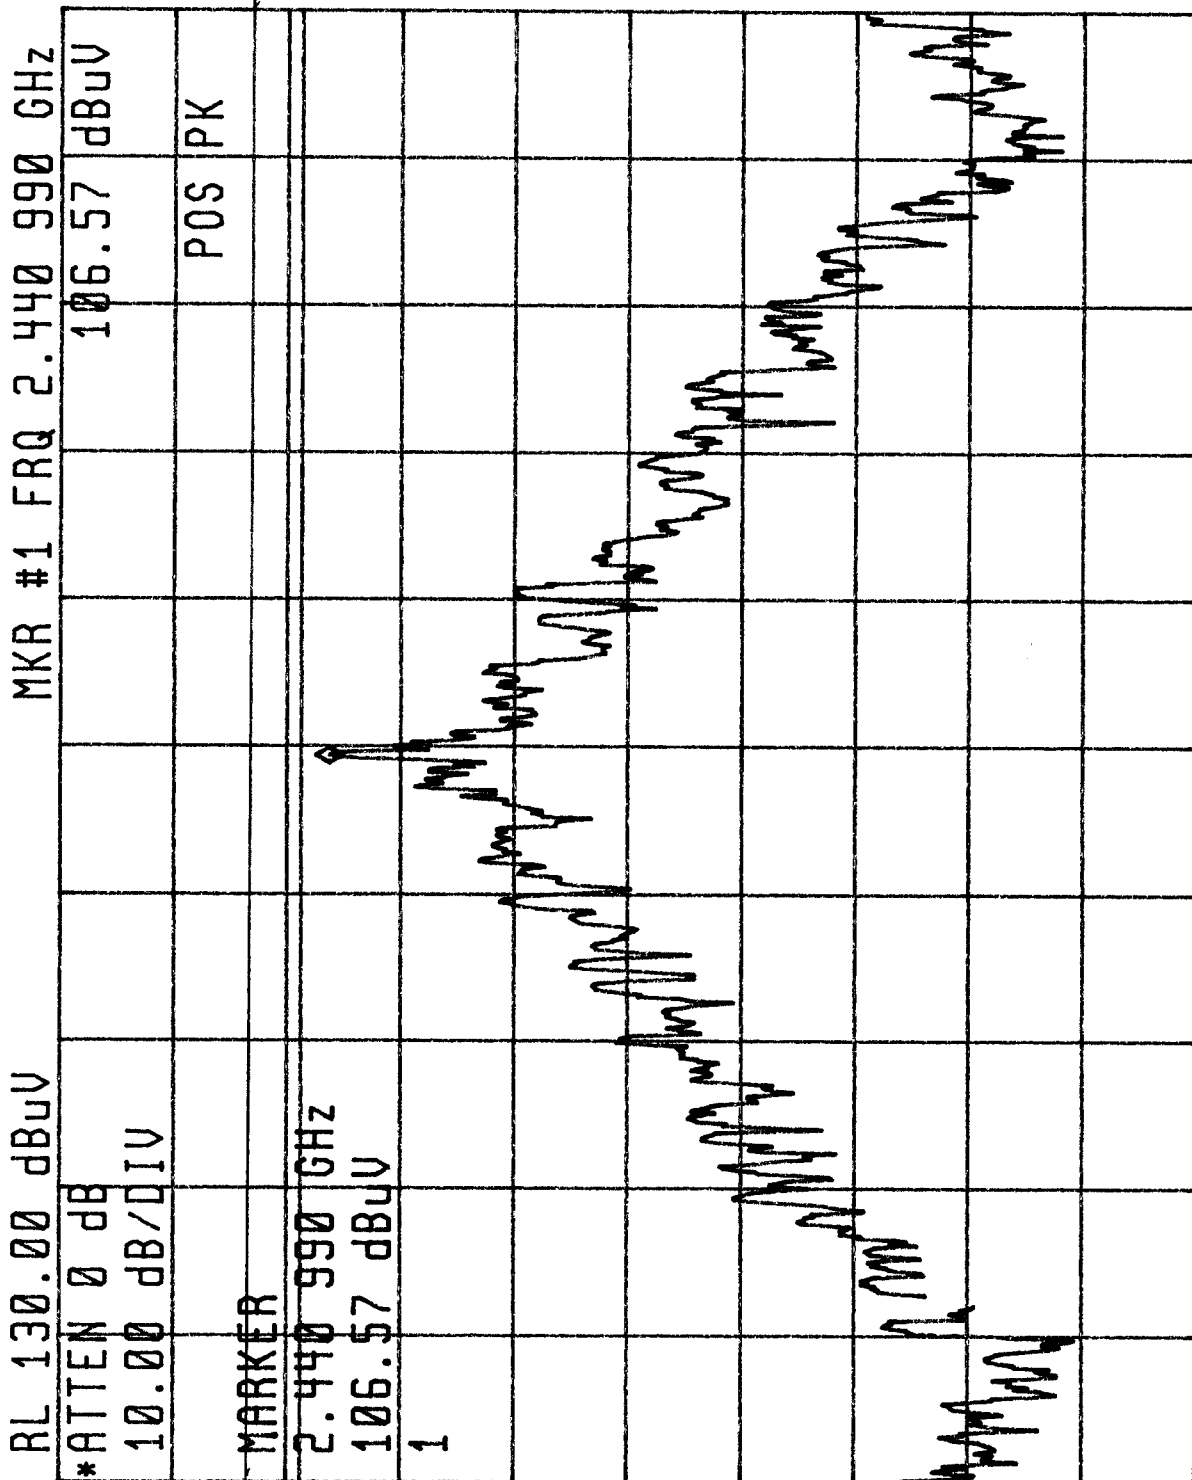

CENTER 2.441 000 GHz
*RB 3.00 kHz *VB 3.00 kHz
SPAN 2.000 MHz
ST 666.7 msec

EXT ANT

PAGE MODE

HOR.

0 dBm

-10, 5 dBm

