

TEST REPORT

Test Report Reference: R80660_A

Equipment under Test: cB-0905-02-01

FCC ID: PVH090502L1

IC: 5325A-090502L1

Applicant: connectBlue AB

Manufacturer: connectBlue AB

**Test Laboratory
(CAB)**

**accredited by DATech in der TGA GmbH
in compliance with DIN EN ISO/IEC 17025
under the Reg. No. DAT-P-105/99-21,**

**recognized by Bundesnetzagentur
under the Reg.-No. BNetzA-CAB-02/21-104/1,**

CAB Designation Number DE0004,

**listed by
FCC 31040/SIT1300F2
FCC Test site registration number 90877**

TEST REPORT REFERENCE: R80660_A

Contents	Page
1 IDENTIFICATION	4
1.1 APPLICANT	4
1.2 MANUFACTURER	4
1.3 DATES	4
1.4 TEST LABORATORY	5
1.5 RESERVATION	5
1.6 NORMATIVE REFERENCES	5
1.7 TEST RESULTS	5
2 TECHNICAL DATA OF EQUIPMENT	6
2.1 DEVICE UNDER TEST	6
2.2 PERIPHERY DEVICES	7
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	7
4 ADDITIONAL INFORMATION	8
5 APPLICATION OVERVIEW	9
6 TEST RESULTS	10
6.1.1 TEST RESULTS (20 dB BANDWIDTH)	10
6.2 CARRIER FREQUENCY SEPARATION	12
6.2.1 METHOD OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)	12
6.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)	13
6.3 NUMBER OF HOPPING FREQUENCIES	15
6.3.1 METHOD OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)	15
6.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)	16
6.4 DWELL TIME	17
6.4.1 METHOD OF MEASUREMENT (DWELL TIME)	17
6.4.2 TEST RESULTS (DWELL TIME)	18
6.5 MAXIMUM PEAK OUTPUT POWER	20
6.5.1 METHOD OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)	20
6.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)	21
6.6 CONDUCTED EMISSIONS (TRANSMITTER)	23
6.6.1 METHOD OF MEASUREMENT (CONDUCTED EMISSIONS)	23
6.6.2 TEST RESULTS (CONDUCTED EMISSIONS)	24

TEST REPORT REFERENCE: R80660_A

Contents (continued):	Page
6.7 BAND-EDGE COMPLIANCE.....	28
6.7.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE (RADIATED))	28
6.7.2 TEST RESULT (BAND-EDGE COMPLIANCE (RADIATED)).....	29
6.8 RADIATED EMISSIONS.....	33
6.8.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)	33
6.8.2 TEST RESULTS (RADIATED EMISSIONS).....	40
6.8.2.1 PRELIMINARY MEASUREMENT (9 kHz to 25 GHz).....	40
6.8.2.2 FINAL MEASUREMENT (30 MHz to 1 GHz)	49
6.8.2.3 FINAL MEASUREMENT (1 GHz to 25 GHz)	51
6.9 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz).....	54
6.9.1 METHOD OF MEASUREMENT	54
6.9.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)	55
7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	57
8 LIST OF ANNEXES	58

TEST REPORT REFERENCE: R80660_A

1 IDENTIFICATION

1.1 APPLICANT

Name:	connectBlue AB
Address:	Norra Vallgatan 64 3V
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Martin Engdahl
Tel:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
e-mail address:	martin.engdahl@connectblue.se

1.2 MANUFACTURER

Name:	connectBlue AB
Address:	Norra Vallgatan 64 3V
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Martin Engdahl
Tel:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
e-mail address:	martin.engdahl@connectblue.se

1.3 DATES

Date of receipt of test sample:	14 February 2008
Start of test:	14 February 2008
End of test:	10 March 2008

TEST REPORT REFERENCE: R80660_A

1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
D-32825 Blomberg **Phone: +49 (0) 52 35 / 95 00-0**
Germany **Fax: +49 (0) 52 35 / 95 00-10**

Test engineer: Dieter SÜTTHOFF 18 March 2008

Name Signature Date

Test report checked: Bernd STEINER 18 March 2008

Name Signature Date

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

Stamp

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4:2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC 47 CFR Part 2** General Rules and Regulations
- [3] **FCC 47 CFR Part 15** Radio Frequency Devices (Subpart B)
- [4] **RSS-210 Issue 7 June 2007** Low power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
- [5] **RSS-Gen Issue 2 June 2007** General Requirements and Information for the Certification of Radiocommunication Equipment

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: R80660_A

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment: *	Bluetooth module
Type designation: *	cB-0905-02-01
FCC ID: *	PVH090502L1
IC: *	5325A-090502L1
Antenna type: *	External
Antenna gain: *	Refer table below
Antenna connector: *	UFL connector
Power supply: *	3.0 V DC to 3.6 V DC
Type of modulation: *	FHSS (GFSK)
Operating frequency range:*	2.402 to 2.480 GHz
Number of channels: *	79
Temperature range: *	-30 °C to 85 °C

*: declared by the applicant

Bluetooth operates in the unlicensed ISM band at 2.4 GHz. In North America (USA and Canada) a band with a width of 83.5 MHz is available. In this band 79 RF channels spaced 1 MHz apart are defined. The channel is represented by a pseudo random hopping sequence through the 79 channels. The normally occupancy time of one frequency will be 625 µs. The ordinary hopping rate will be 1600 hops/s. All frequencies will be used equally.

Used antennas:

model name*	Antenna type	Rated Antenna gain*
R380.500.139	external	+2.0 dBi

*: declared by the applicant

The following external I/O cables were used:

Cable	Length	Shielding	Connector
DC in	2 m *	No	6.3 mm jack plug

*: Length during the test if no other specified.

TEST REPORT REFERENCE: R80660_A

2.2 PERIPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

- The Bluetooth module was connected to a carrier board (cB-0903-03), which was delivered by the applicant. The carrier board was supplied via an external power supply with 5.0 V DC.
- A personal computer with a terminal-software was used, connected temporary to the carrier board, for setting the equipment into the necessary operation mode. During the measurement procedures the personal computer was disconnected.

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

The EUT is intended to be used in several bluetooth applications. Because the cB-0905-02 is a module, which will be implemented in a final application, it was mounted on a carrier board to change the operation modes of the EUT from a Laptop with test software. The tests were carried out with one unmodified sample with an antenna connector (sample marked with "24") and with an external antenna R380.500.139.

During the tests the test sample was powered by an external power supply via the carrier board with 5.0 V DC.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a length of 27 byte and with a pattern type DH5 was used.


For selecting an operation mode, a personal computer with a software delivered by the applicant was connected to the carrier board. After adjusting the operating mode, the personal computer was removed. To do this the test-engineer was instructed by the applicant.

During the tests, the EUT was not labelled with a FCC-label.

The following operation modes were used during the tests:

Operation mode	Description of the operation mode
1	Continuous transmitting on 2402 MHz
2	Continuous transmitting on 2441 MHz
3	Continuous transmitting on 2480 MHz
4	Transmitter hopping on all channels
5	Continuous receiving on 2441 MHz

TEST REPORT REFERENCE: R80660_A

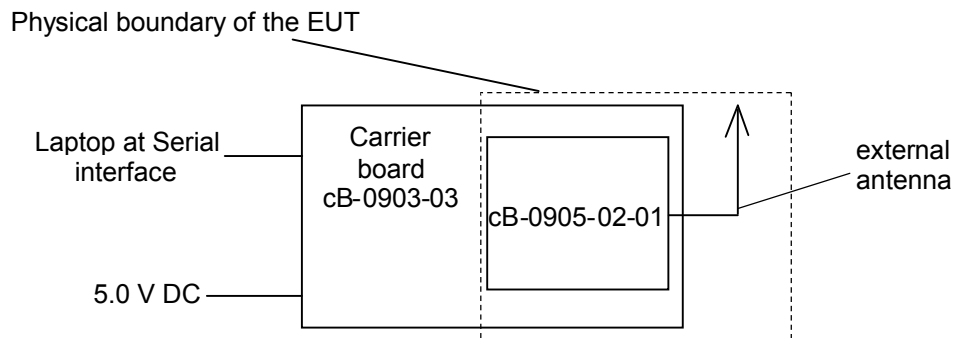

4 ADDITIONAL INFORMATION

The cB-0905-02-01 is the same module as cB-0905-02 (FCC ID PVH090502L) apart from the below listed changes. The cB-0905-02 was already tested under PHOENIX-TESTLAB test report reference R61184_A Edition 1. The reason for this report is to show the compliance of the module with the listed changes.

Change between cB-0905-02-01 and cB-0905-02 module:

- Component L6 changed to an Film Chip Coil (inductor) with the value 3.9nH (L6 is not mounted in cB-0905-02 module)
- Used Antenna R380.500.139.

TEST REPORT REFERENCE: R80660_A

5 APPLICATION OVERVIEW

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section	RSS 210, Issue 7 [4] or RSS-Gen, Issue 2 [5]	Status	Refer page
20 dB bandwidth	General	15.247 (a) (1)	A8.1 (b) [4]	Passed	10 et seq.
Carrier frequency separation	General	15.247 (a) (1)	A8.1 (b) [4]	Passed	12 et seq.
Number of hopping channels	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (d) [4]	Passed	15 et seq.
Dwell time	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (d) [4]	Passed	17 et seq.
Maximum peak output power	2400.0 – 2483.5	15.247 (b) (1)	A8.4 (2) [4]	Passed	20 et seq..
Conducted emissions (transmitter)	0.009 - 25,000	15.247 (d)	A8.5 [4]	Passed	23 et seq.
Band edge compliance (radiated)	2400.0 – 2483.5	15.247 (d)	A8.5 [4]	Passed	28 et seq.
Radiated emissions (transmitter)	0.009 - 25,000	15.205 (a) 15.209 (a)	A8.5 [4] 2.6 [4]	Passed	33 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	7.2.2 [5]	Passed	54 et seq.
Radiated emissions (receiver)	0.009 - 25,000	15.109 (a)	6 [5] 2.6 [4]	Passed	1 et seq. of R80660_A Annex D


TEST REPORT REFERENCE: R80660_A

6 TEST RESULTS


6.1.1 TEST RESULTS (20 dB BANDWIDTH)

Ambient temperature	20 °C	Relative humidity	46 %
---------------------	-------	-------------------	------

72994_98.wmf: (20 dB bandwidth at the lower end of the assigned frequency band):

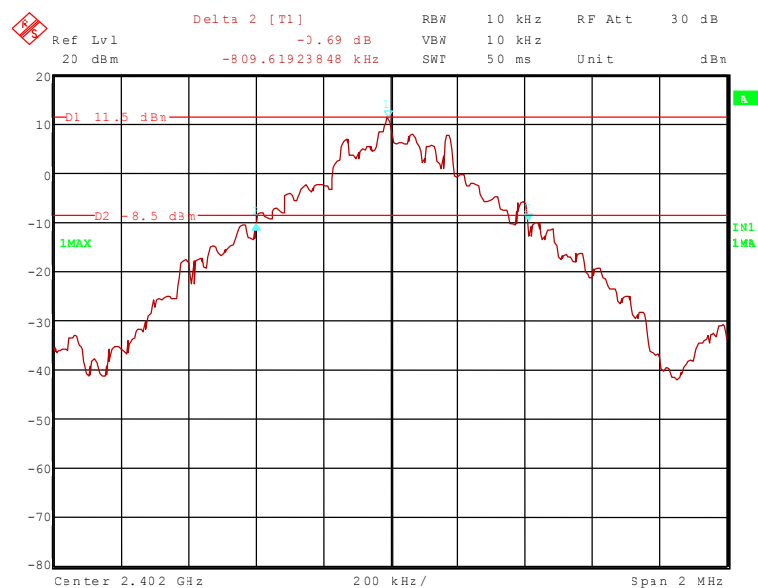


72994_99.wmf: (20 dB bandwidth at the middle of the assigned frequency band):

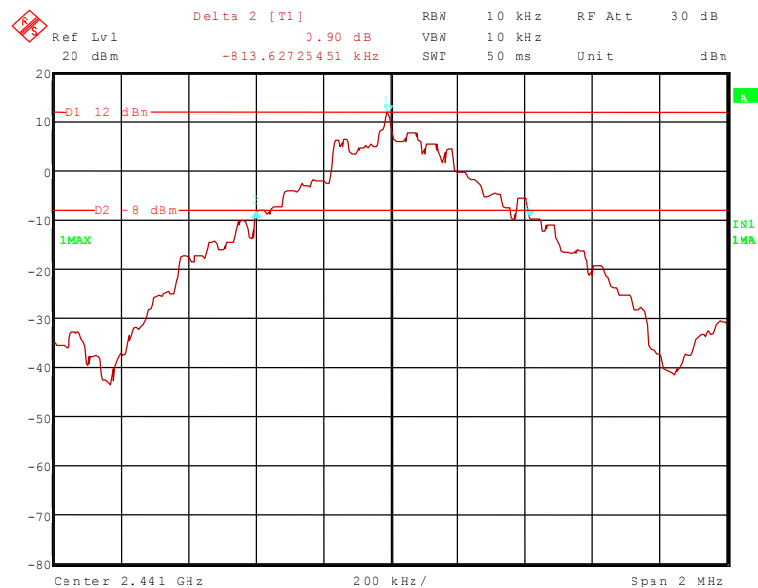

TEST REPORT REFERENCE: R80660_A

72994_100.wmf: (20 dB bandwidth at the upper end of the assigned frequency band):

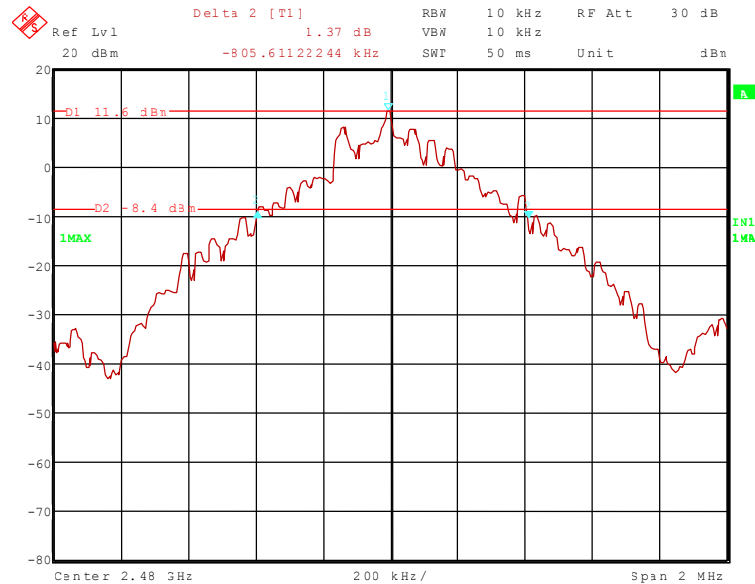

Channel number	Channel frequency [MHz]	20 dB bandwidth [kHz]
0	2402	809.619
39	2441	813.627
78	2480	805.611

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R80660_A

6.2 CARRIER FREQUENCY SEPARATION

6.2.1 METHOD OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.


The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

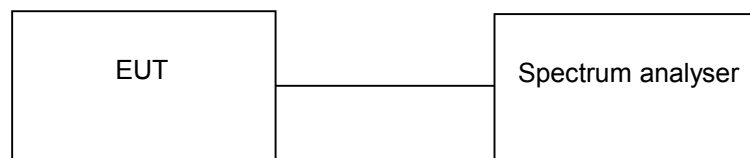


TEST REPORT REFERENCE: R80660_A


6.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)

Ambient temperature	20 °C	Relative humidity	46 %
---------------------	-------	-------------------	------

72194_101.wmf: (channel separation at the lower end of the assigned frequency band):

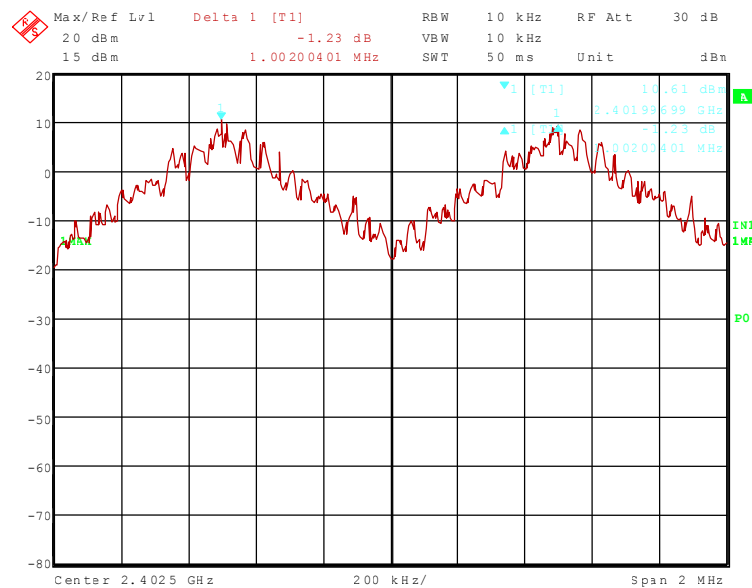


72194_102.wmf: (channel separation at the middle of the assigned frequency band):

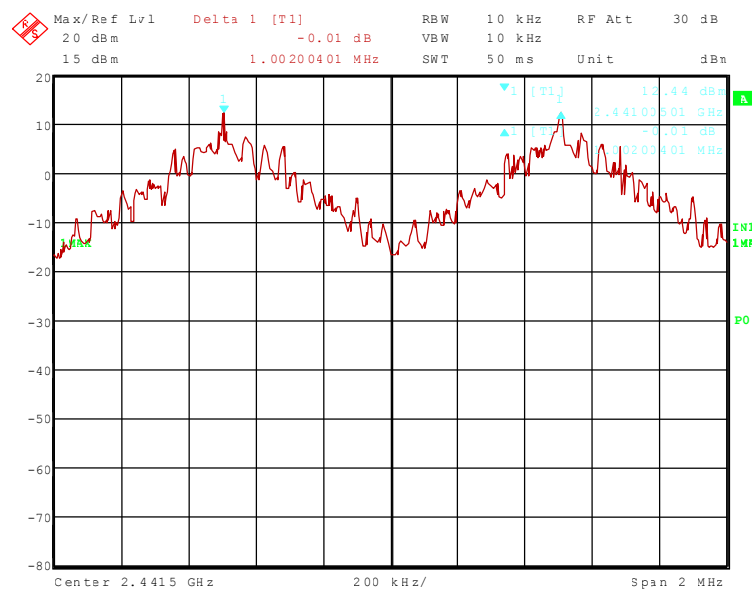

TEST REPORT REFERENCE: R80660_A

72194_103.wmf: (channel separation at the upper end of the assigned frequency band):

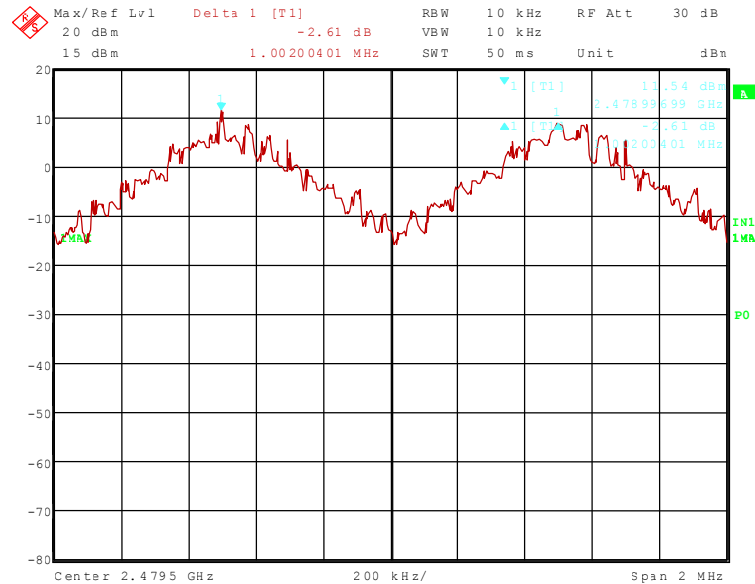

Channel number	Channel frequency [MHz]	Channel separation [kHz]	Minimum limit [kHz]
0	2402	1002.004	539.746 (2/3 * 20 dB bandwidth)
39	2441	1002.004	542.418 (2/3 * 20 dB bandwidth)
78	2480	1002.004	537.074 (2/3 * 20 dB bandwidth)

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R80660_A

6.3 NUMBER OF HOPPING FREQUENCIES

6.3.1 METHOD OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Equal to the assigned frequency band.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.

Test set-up:

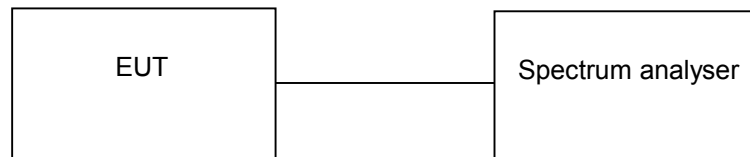


TEST REPORT REFERENCE: R80660_A

6.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)

Ambient temperature	20 °C	Relative humidity	46 %
---------------------	-------	-------------------	------

72194_104.wmf (number of hopping channels):

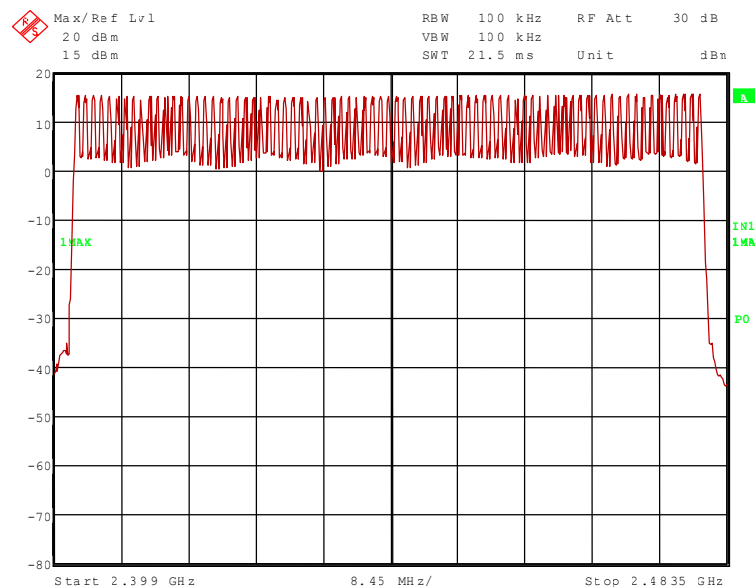

Number of hopping channels	Limit
79	At least 15

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R80660_A

6.4 DWELL TIME

6.4.1 METHOD OF MEASUREMENT (DWELL TIME)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Zero, centred on a hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

If the EUT is possible to operate with different mode of operation (data rates, modulation formats etc.) the test will be repeated with every different operation mode of the EUT.

Test set-up:




TEST REPORT REFERENCE: R80660_A


6.4.2 TEST RESULTS (DWEELL TIME)

Ambient temperature	20 °C	Relative humidity	46 %
---------------------	-------	-------------------	------

72194_105.wmf: (Dwell time at the lower end of the assigned frequency band), hopping mode DH5:

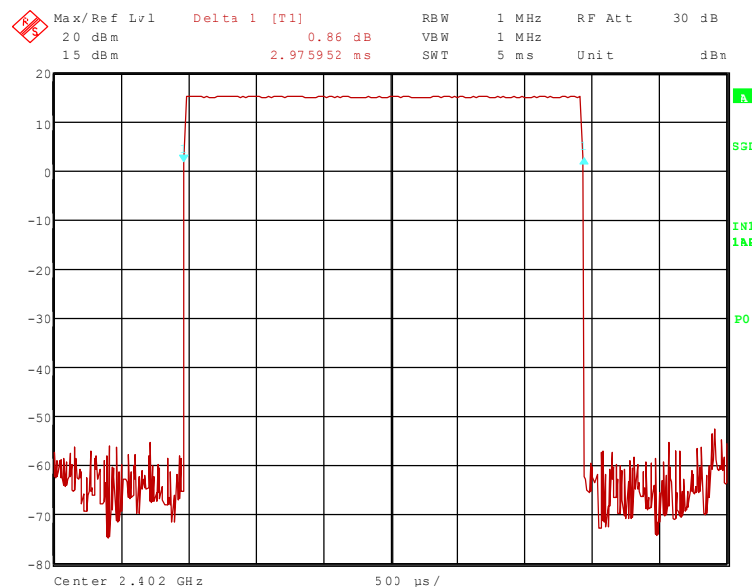


72194_106.wmf: Dwell time at the middle of the assigned frequency band), hopping mode DH5:

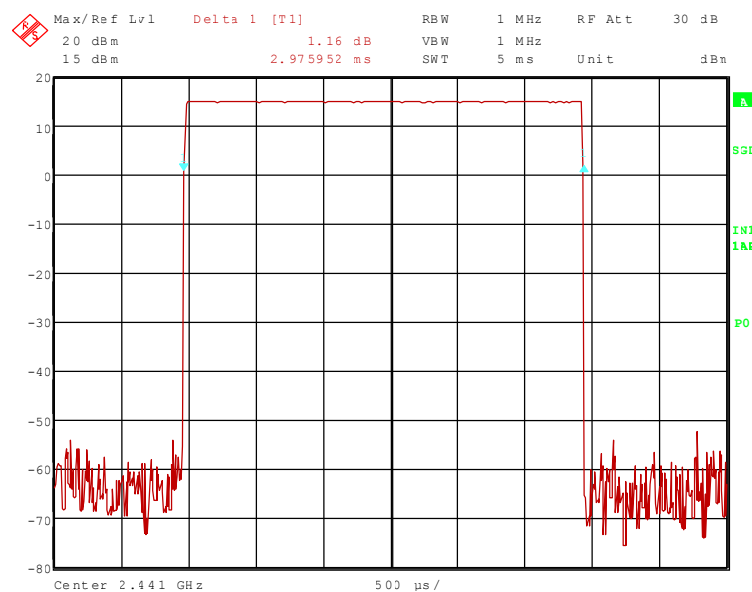

TEST REPORT REFERENCE: R80660_A

72194_107.wmf: (Dwell time at the upper end of the assigned frequency band), hopping mode DH5:

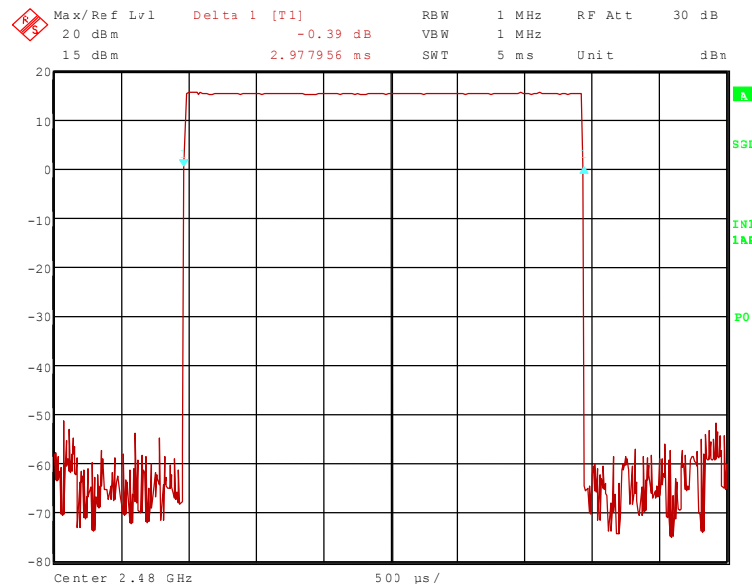

The dwell time is calculated with the following formula:

$$\text{Dwell time} = t_{\text{pulse}} \times n_{\text{hops}} / \text{number of channels} \times 31.6 \text{ s}$$

Where:

t_{pulse} is the measured pulse time (pls. refer the plots of the spectrum analyser above) [s],
 n_{hops} is the number of hops per second in the actual operating mode of the transmitter [1/s].

The hopping rate of the system is 1600 hops per second and the system uses 79 channels. For this reason one time slot has a length of 625 μs.

With the used hopping mode (DH5) a packet need 5 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 266.67 hops per second in transmit mode ($n_{\text{hops}} = 266.667 \text{ 1/s}$)

Channel number	Channel frequency [MHz]	t_{pulse}	Dwell time [ms]
0	2402	2.976 ms	317.440
39	2441	2.976 ms	317.440
78	2480	2.978 ms	317.653

Limit: The dwell time of the channel shall be less than 0.4 s in a 31.6 s period

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R80660_A

6.5 MAXIMUM PEAK OUTPUT POWER

6.5.1 METHOD OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.


The following spectrum analyser settings shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:

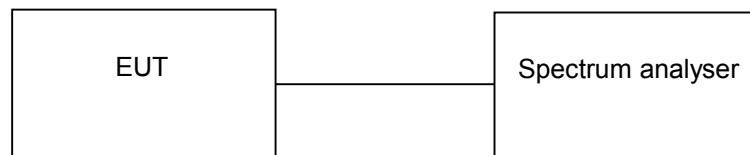


TEST REPORT REFERENCE: R80660_A


6.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)

Ambient temperature	20 °C	Relative humidity	30 %
---------------------	-------	-------------------	------

72194_69.wmf (maximum peak output power at the lower end of the assigned frequency band):

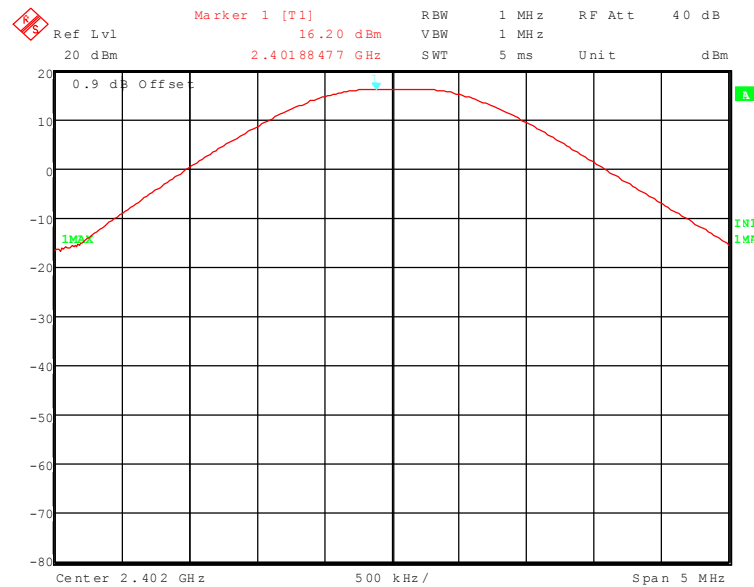


72194_70.wmf (maximum peak output power at the middle of the assigned frequency band):

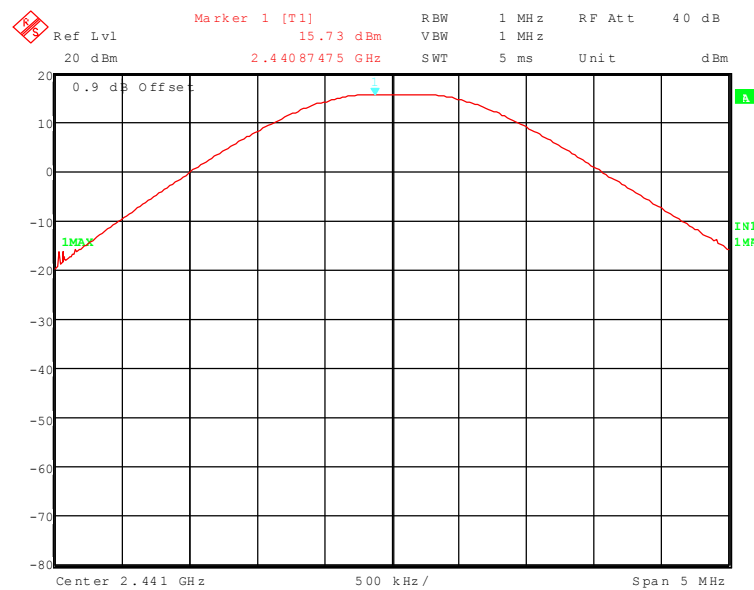

TEST REPORT REFERENCE: R80660_A

72194_71.wmf (maximum peak output power at the upper end of the assigned frequency band):

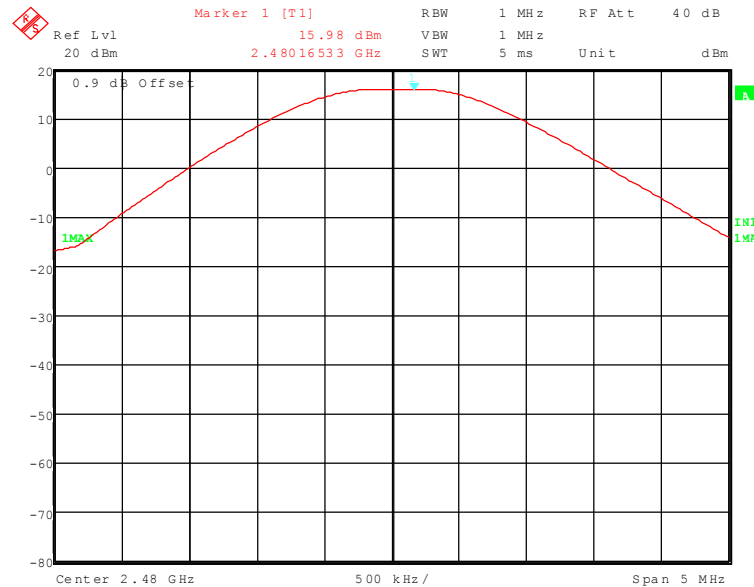

Channel number	Channel frequency [MHz]	Maximum peak output power [dBm]	Antenna gain [dBi]	Peak power limit [dBm]
0	2402	16.2	2.0	30.0
39	2441	15.7	2.0	30.0
78	2480	16.0	2.0	30.0

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R80660_A

6.6 CONDUCTED EMISSIONS (TRANSMITTER)

6.6.1 METHOD OF MEASUREMENT (CONDUCTED EMISSIONS)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.

The following spectrum analyser settings shall be used:

In the frequency range from 9 kHz to 1 MHz:

- Start frequency: 9 kHz.
- Stop frequency: 1 MHz.
- Resolution bandwidth: 200 Hz.
- Video bandwidth: 200 Hz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.


In the frequency range from 1 MHz to 25 GHz:

- Start frequency: 1 MHz.
- Stop frequency: 25 GHz.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: 100 kHz.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set 20 dB below the peak marker. Every emission has to be below the display line.

The measurement will be performed with the EUT operates at the middle, the upper and lower end of the assigned frequency band and with hopping off.

Test set-up:

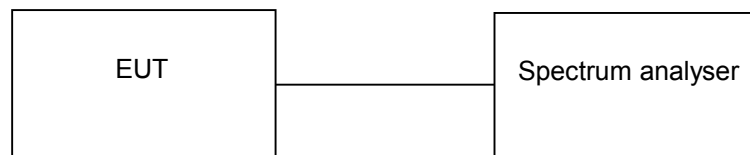


TEST REPORT REFERENCE: R80660_A


6.6.2 TEST RESULTS (CONDUCTED EMISSIONS)

Ambient temperature	20 °C	Relative humidity	34 %
---------------------	-------	-------------------	------

72194_83.wmf (conducted emissions form 9 kHz to 1 MHz, transmitter at 2402 MHz):

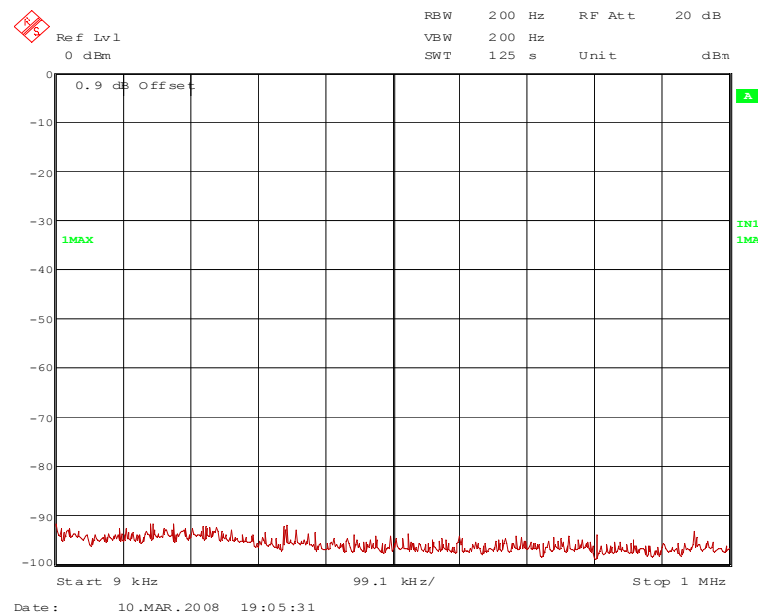


72194_84.wmf (conducted emissions 9 kHz to 1 MHz, transmitter at 2441 MHz):

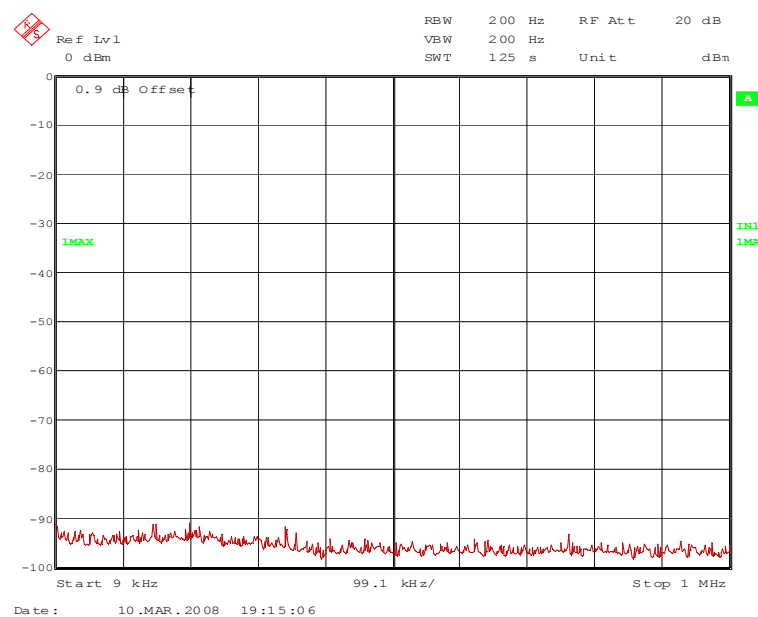


TEST REPORT REFERENCE: R80660_A

72194_85.wmf (conducted emissions 9 kHz to 1 MHz, transmitter at 2480 MHz):

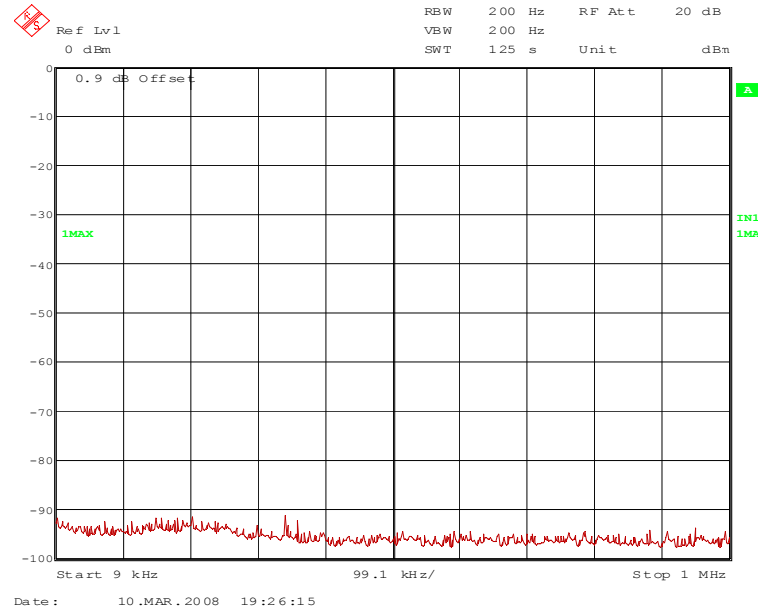


72194_88.wmf (conducted emissions form 1 MHz to 25 GHz, transmitter at 2402 MHz):

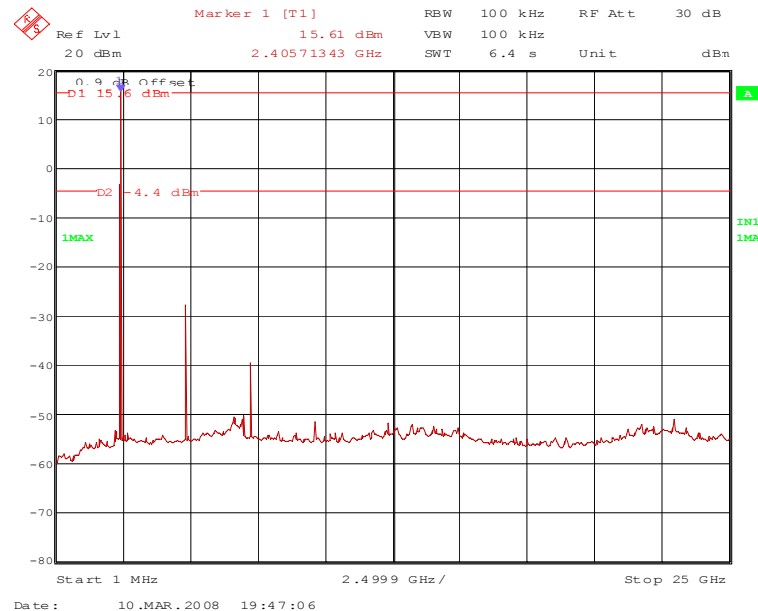


TEST REPORT REFERENCE: R80660_A

72194_87.wmf (conducted emissions 1 MHz to 25 GHz, transmitter at 2441 MHz):

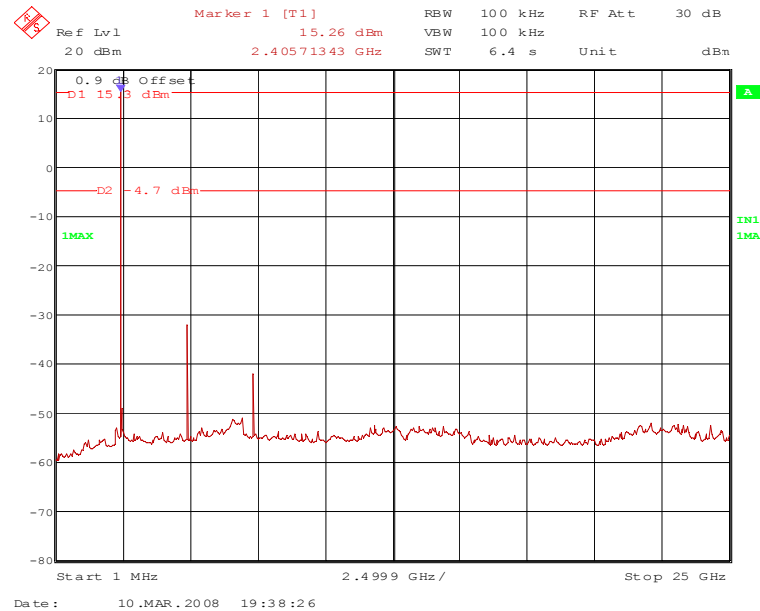

72194_86.wmf (conducted emissions 1 MHz to 25 GHz, transmitter at 2480 MHz):

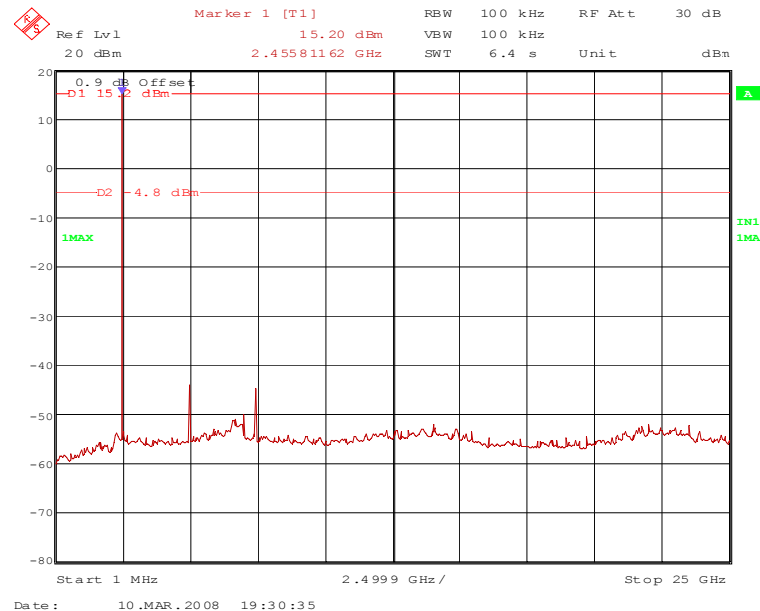

TEST REPORT REFERENCE: R80660_A

Conducted emissions with transmitter operates at 2402 MHz						
Frequency	Result dBm	Limit dBm	Margin dB	Reading dBm	Cable loss dB *	Reference level [dBm]
4.804 GHz	-27.5	-4.4	23.1	-27.7	0.2	15.6
7.206 GHz	-39.2	-4.4	34.8	-39.6	0.4	15.6
Conducted emissions with transmitter operates at 2441 MHz						
Frequency	Result dBm	Limit dBm	Margin dB	Reading dBm	Cable loss dB *	Reference level [dBm]
4.882 GHz	-31.9	-4.7	27.2	-32.1	0.2	15.3
7.323 GHz	-41.6	-4.7	39.9	-42.0	0.4	15.3
Conducted emissions with transmitter operates at 2480 MHz						
Frequency	Result dBm	Limit dBm	Margin dB	Reading dBm	Cable loss dB *	Reference level [dBm]
4.960 GHz	-33.8	-4.8	29.0	-34.0	0.2	15.2
7.440 GHz	-44.6	-4.8	39.8	-45.0	0.4	15.2

*: Cable loss including the display offset (0.9 dB)

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

31, 46, 54

TEST REPORT REFERENCE: R80660_A

6.7 BAND-EDGE COMPLIANCE

6.7.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE (RADIATED))

The same test set-up as used for the final radiated emission measurement shall be used (refer also subclause 5.8.1 of this test report). The measurements shall be carried out with using a resolution bandwidth of 100 kHz.

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. This frequency shall be measured with the EMI receiver as described in subclause 5.8.1 of this test report, but 100 kHz resolution bandwidth shall be used.


The measurement will be performed at the upper end of the assigned frequency band and with hopping on and off.

TEST REPORT REFERENCE: R80660_A


6.7.2 TEST RESULT (BAND-EDGE COMPLIANCE (RADIATED))

Ambient temperature	20 °C	Relative humidity	30 %
---------------------	-------	-------------------	------

72194eg8.wmf (radiated band-edge compliance, lower band edge, hopping off):

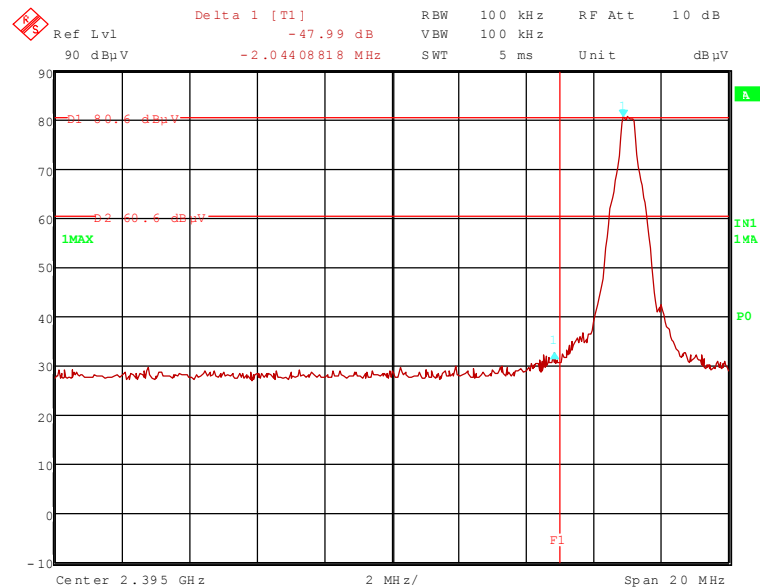


72194eg7.wmf (radiated band-edge compliance, lower band edge, hopping on):

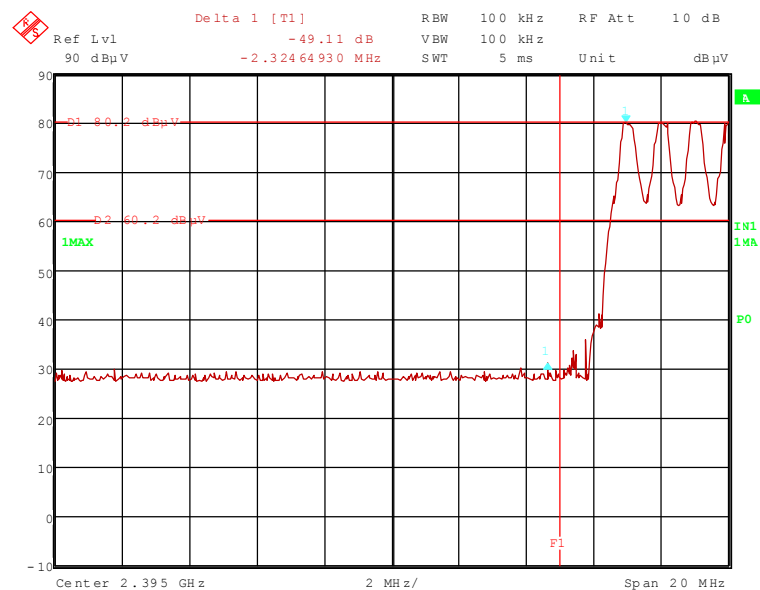


TEST REPORT REFERENCE: R80660_A

72194eg5.wmf (radiated band-edge compliance, upper band edge, hopping off):

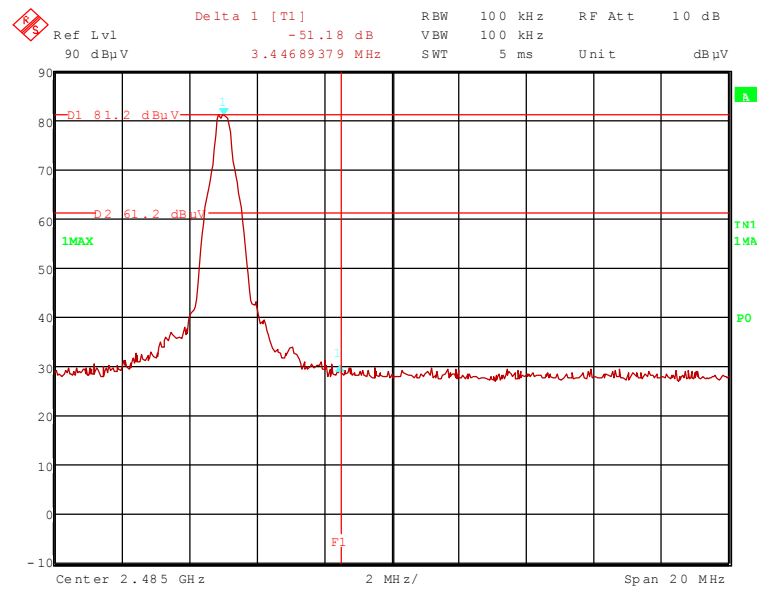

72194eg6.wmf (radiated band-edge compliance, upper band edge, hopping on):

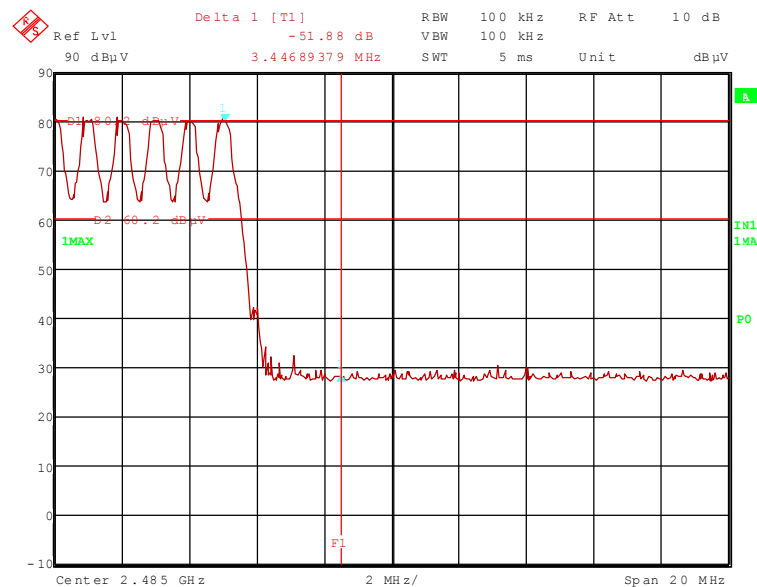

TEST REPORT REFERENCE: R80660_A

The plots on the page before are showing the radiated band-edge compliance for the upper band-edge, with and without hopping. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.247 (d). The frequency line 1 (F1) shows the edge of the assigned frequency.

Band-edge compliance (lower band edge, hopping disenabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	114.4	-	-	81.9	28.8	0.0	3.7	150	Vert.	-
2.400	66.6	94.4	27.8	33.9	29.0	0.0	3.7	150	Vert.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	111.7	-	-	79.2	28.8	0.0	3.7	150	Vert.	-
2.400	52.5	91.7	39.2	20.0	28.8	0.0	3.7	150	Vert.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (lower band edge, hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	114.4	-	-	81.9	28.8	0.0	3.7	150	Vert.	-
2.400	65.3	94.4	29.1	32.8	28.8	0.0	3.7	150	Vert.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	75.5	-	-	43.0	28.8	0.0	3.7	150	Vert.	-
2.400	51.4	55.5	4.1	18.9	28.8	0.0	3.7	150	Vert.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

TEST REPORT REFERENCE: R80660_A

Band-edge compliance (upper band edge, hopping disabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	114.3	-	-	81.5	29.0	0.0	3.8	150	Vert.	-
2.484	63.1	74.0	10.9	30.3	29.0	0.0	3.8	150	Vert.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	111.6	-	-	78.8	29.0	0.0	3.8	150	Vert.	-
2.484	42.0	54.0	12.0	9.2	29.0	0.0	3.8	150	Vert.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (upper band edge, hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	114.3	-	-	81.5	29.0	0.0	3.8	150	Vert.	-
2.484	62.4	74.0	11.6	29.6	29.0	0.0	3.8	150	Vert.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	75.0	-	-	42.2	29.0	0.0	3.8	150	Vert.	-
2.484	41.3	54.0	12.7	8.5	29.0	0.0	3.8	150	Vert.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R80660_A

6.8 RADIATED EMISSIONS

6.8.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into five stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 25 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 25 GHz.

All measurements will be carried out with the EUT working on the middle and upper and lower edge of the assigned frequency band. For this reason the hopping function of the EUT has to be disabled.


Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

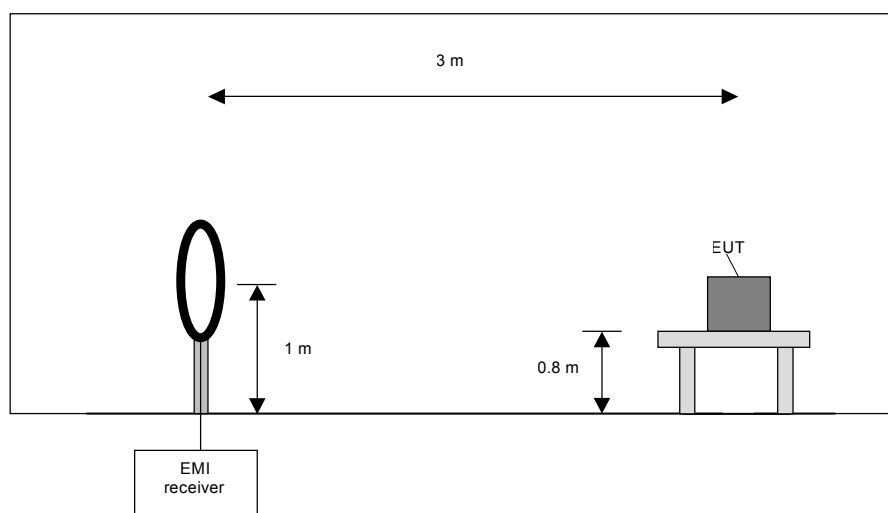

TEST REPORT REFERENCE: R80660_A

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the during the preliminary measurement detected frequencies the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

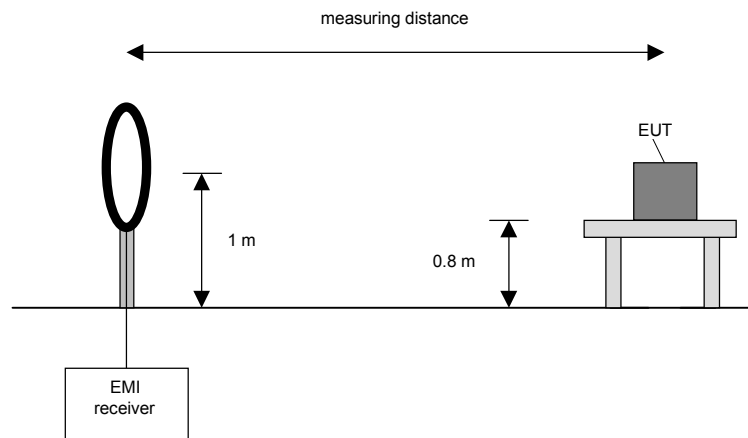

TEST REPORT REFERENCE: R80660_A

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

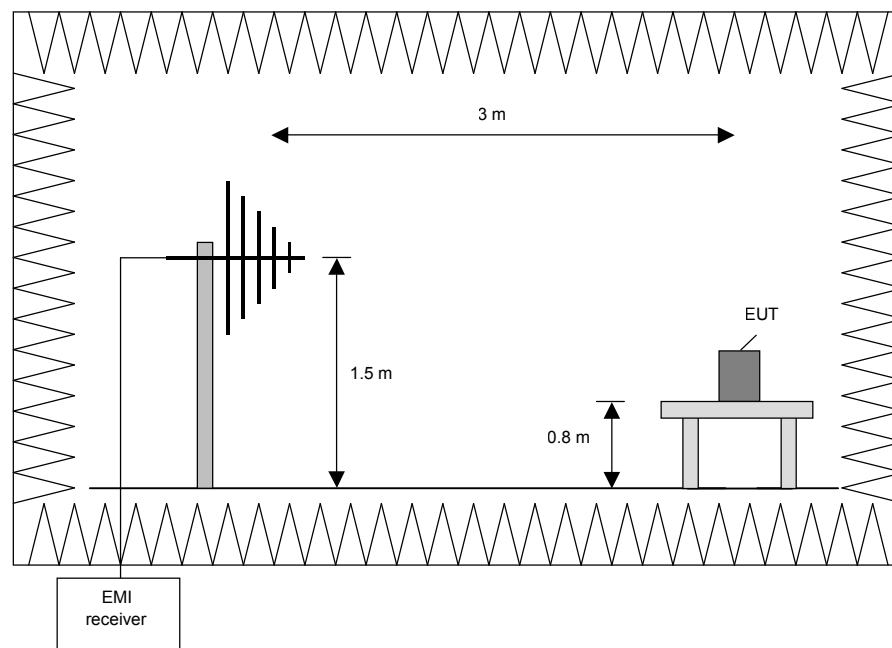

TEST REPORT REFERENCE: R80660_A

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

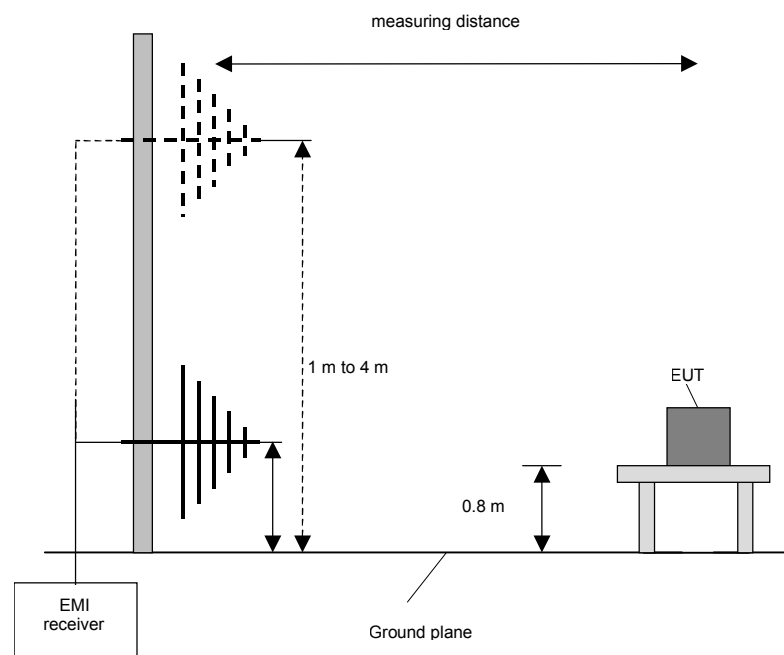

TEST REPORT REFERENCE: R80660_A

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

Preliminary and final measurement (1 GHz to 25 GHz)

This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].


Preliminary measurement (1 GHz to 25 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 25 GHz	100 kHz

TEST REPORT REFERENCE: R80660_A

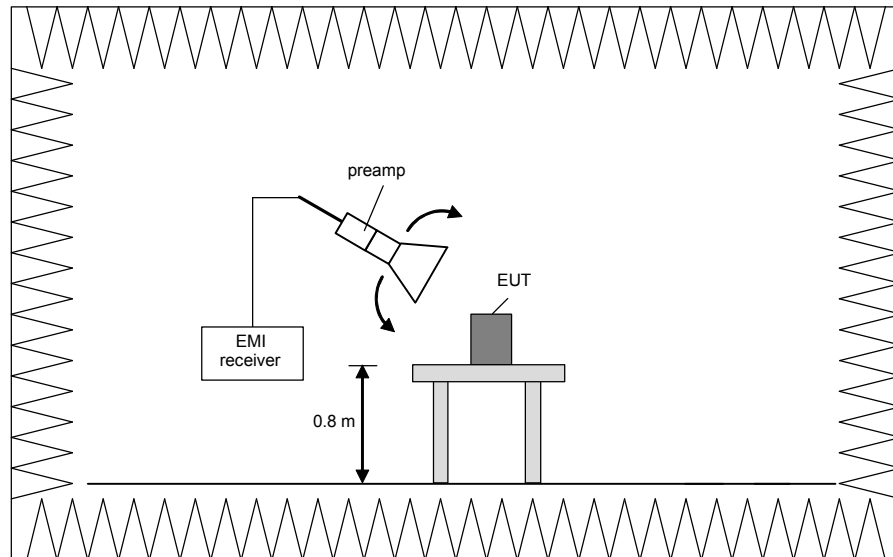


Final measurement (1 GHz to 25 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 GHz	1 MHz

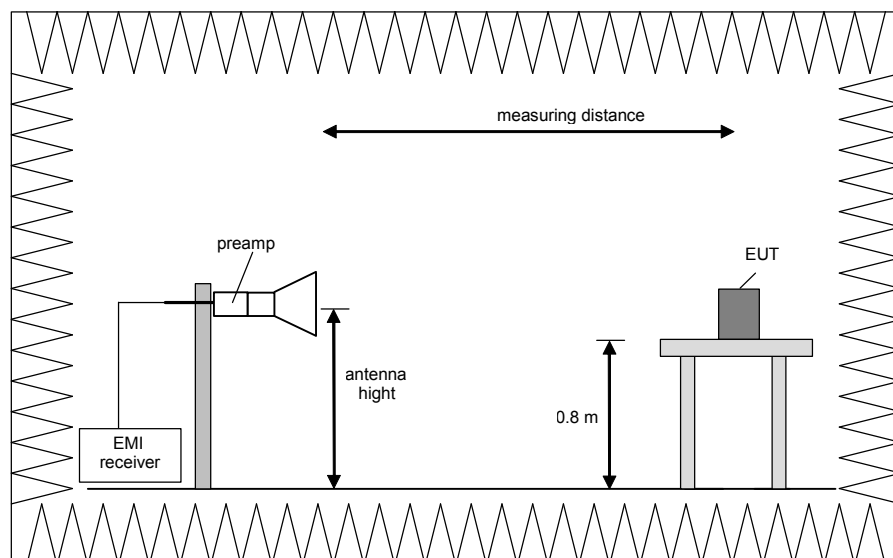

TEST REPORT REFERENCE: R80660_A

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz and 18 GHz to 25 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

TEST REPORT REFERENCE: R80660_A


6.8.2 TEST RESULTS (RADIATED EMISSIONS)

6.8.2.1 PRELIMINARY MEASUREMENT (9 kHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
- Test record: Where not otherwise stated the test was carried out in test mode 2 of the EUT, because there was no difference to the other test modes. All results are shown in the following.
- Supply voltage: During all measurements the EUT was supplied with 5.0 V DC via the carrier board.

72194_57.wmf: Spurious emissions, from 9 kHz to 150 kHz

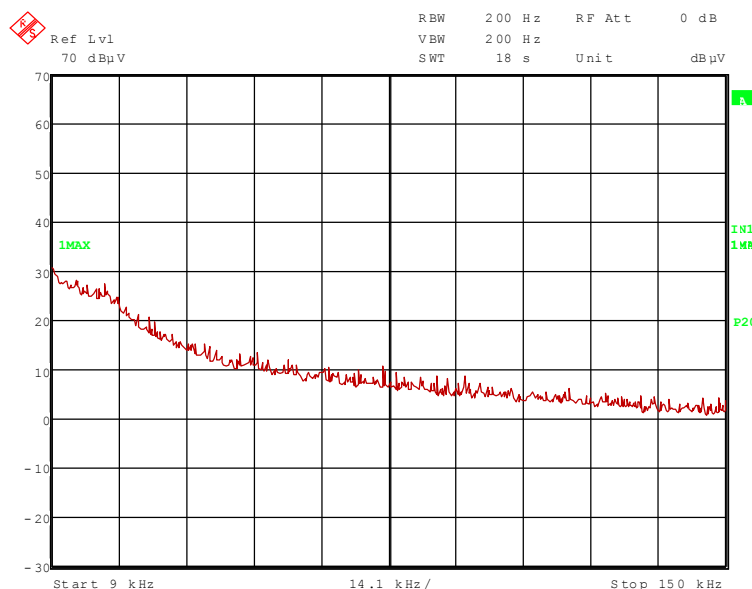


TEST EQUIPMENT USED FOR THE TEST:


29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R80660_A

72194_58.wmf: Spurious emissions, from 150 kHz to 1 MHz

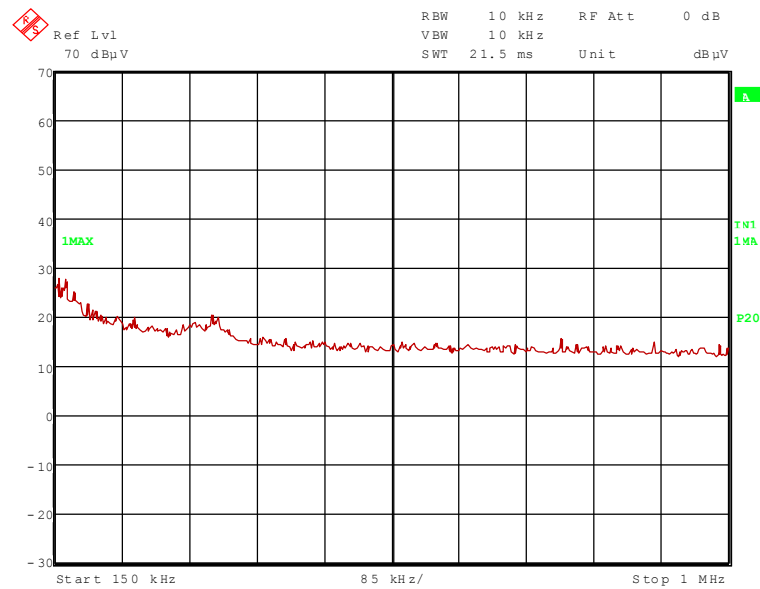


72194_59.wmf: Spurious emissions, from 1 MHz to 30 MHz

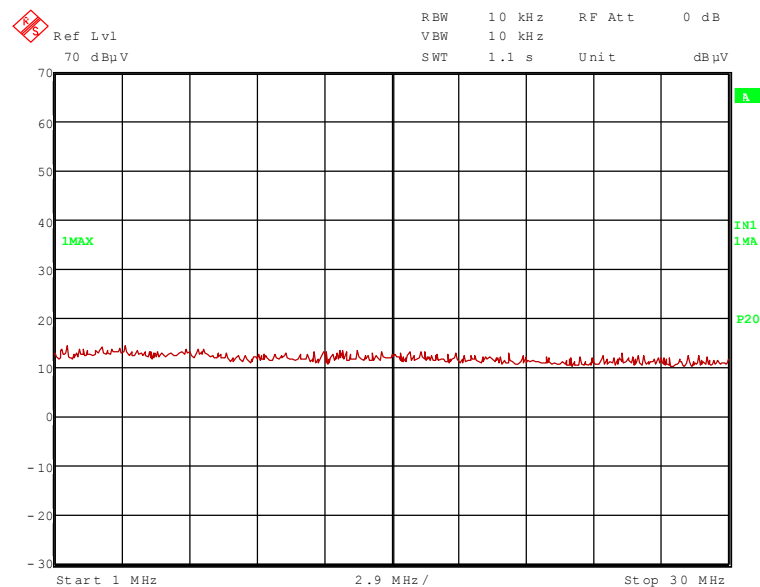


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the outdoor test site.

TEST REPORT REFERENCE: R80660_A

72194_53.wmf: Spurious emissions, from 30 MHz to 230 MHz

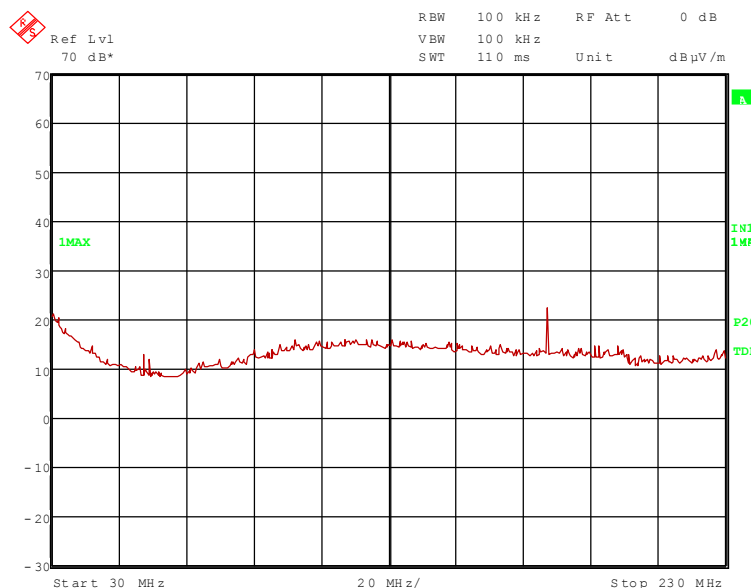

72194_54.wmf: Spurious emissions, from 230 MHz to 1 GHz

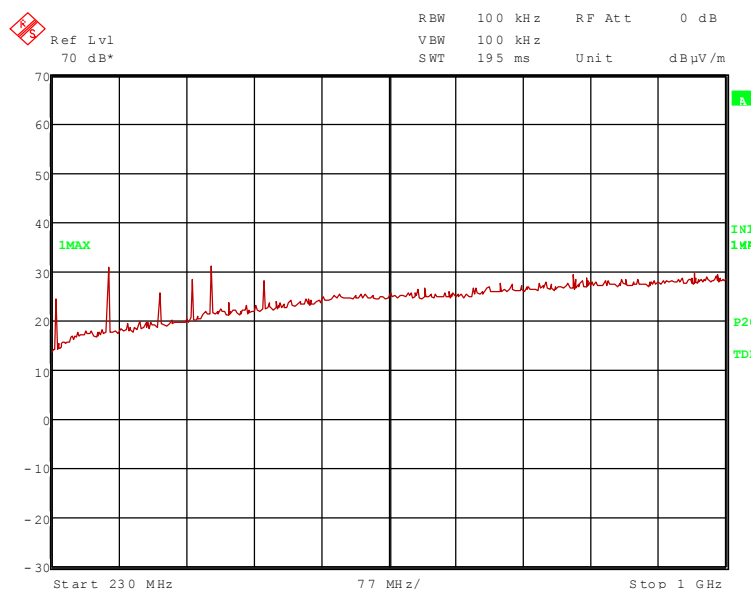

The following frequencies were found during the preliminary radiated emission test:

- 176.946 MHz, 235.928 MHz, 294.910 MHz, 353.892 MHz, 412.876 MHz and 471.855 MHz.

The following frequency was found inside the restricted bands:


- none.

These frequencies have to be measured on the open area test site. The results were presented in the following

TEST REPORT REFERENCE: R80660_A

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

72194_20.wmf (1 GHz to 4 GHz):

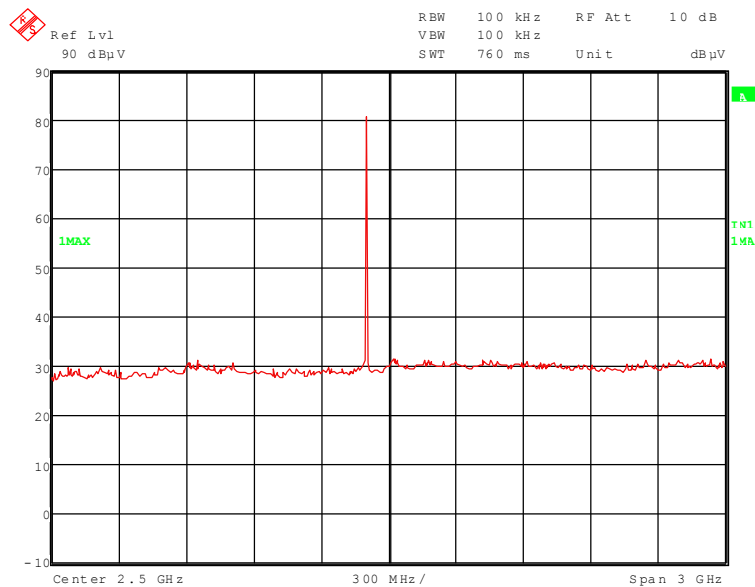


72194_17.wmf (4 GHz to 12 GHz):




TEST REPORT REFERENCE: R80660_A

72194_44.wmf (12 GHz to 18 GHz):

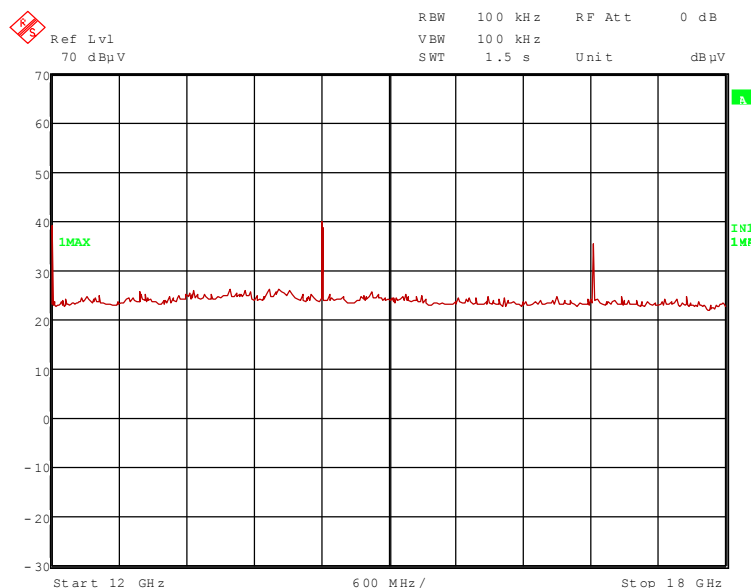

72194_43.wmf (18 GHz to 25 GHz):

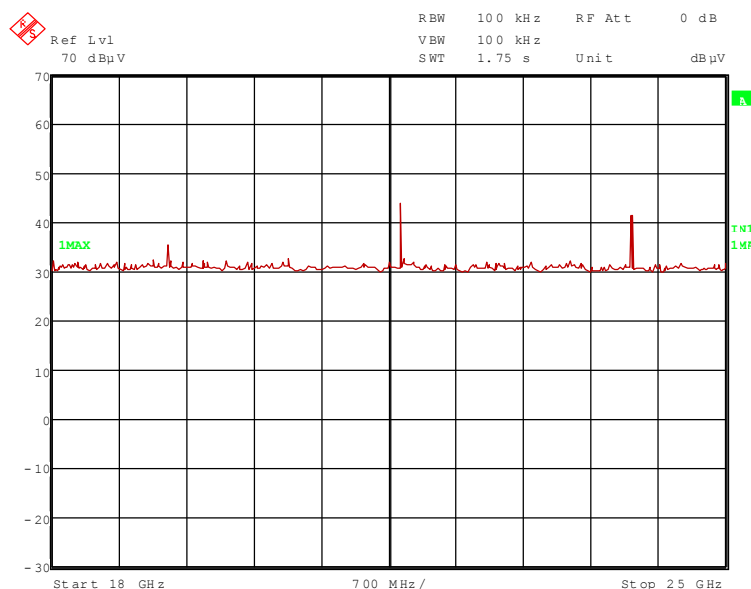

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 4.804 GHz, 12.010 GHz and 19.216 GHz

The following frequency was found outside the restricted bands during the preliminary radiated emission test:


- 2.402 GHz, 7.206 GHz, 9.608 GHz, 14.412 GHz, 16.812 GHz, 21.618 GHz and 24.020 GHz

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST REPORT REFERENCE: R80660_A

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

72194_19.wmf (4 GHz to 12 GHz):

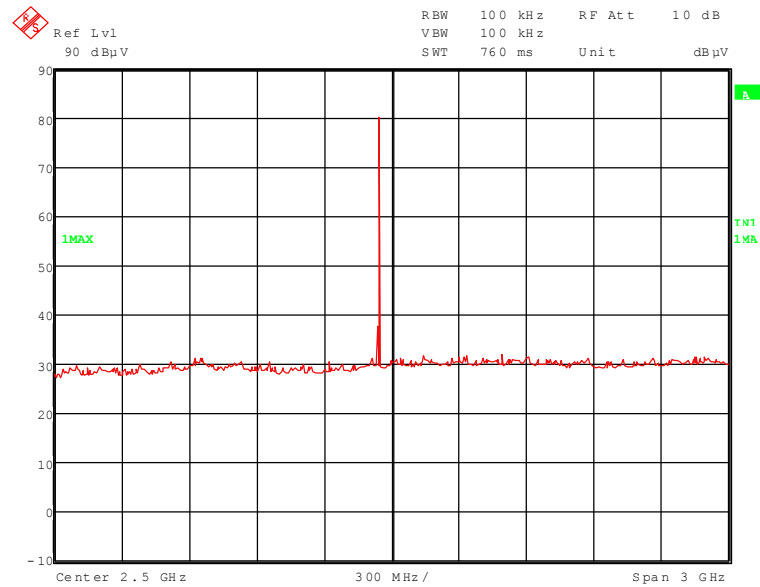


72194_18.wmf (4 GHz to 12 GHz):

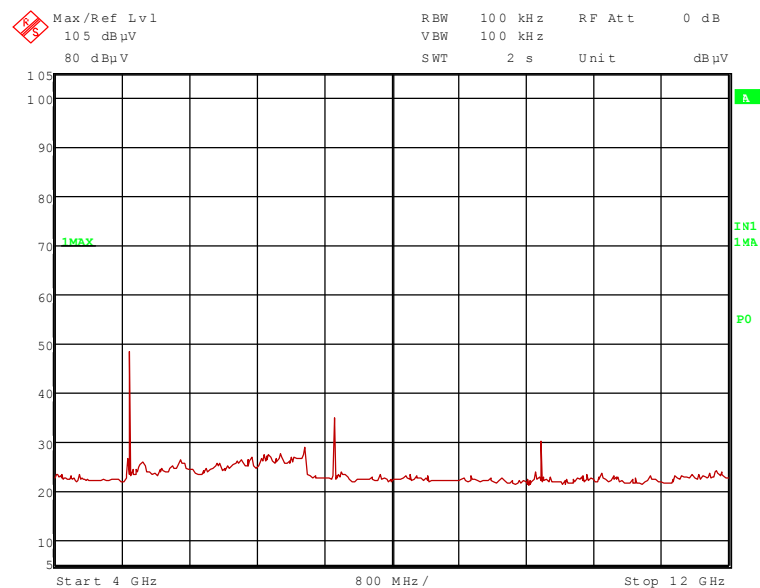


TEST REPORT REFERENCE: R80660_A

72194_41.wmf (12 GHz to 18 GHz):

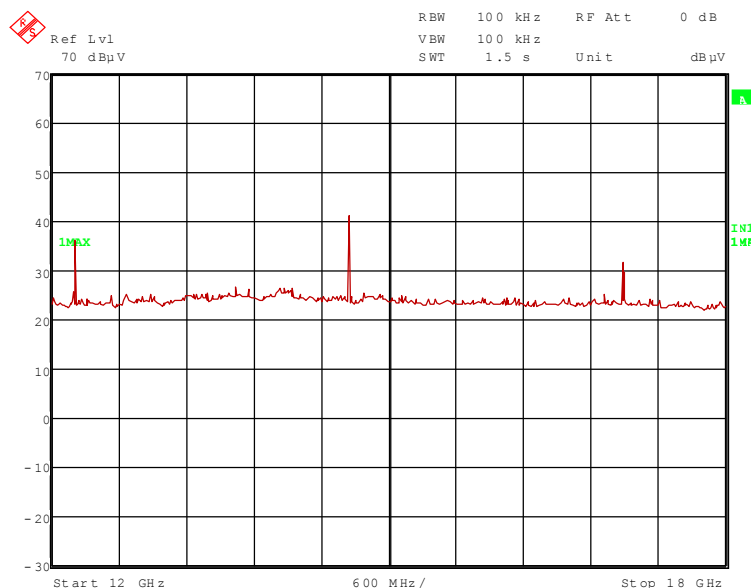

72194_42.wmf (18 GHz to 25 GHz):

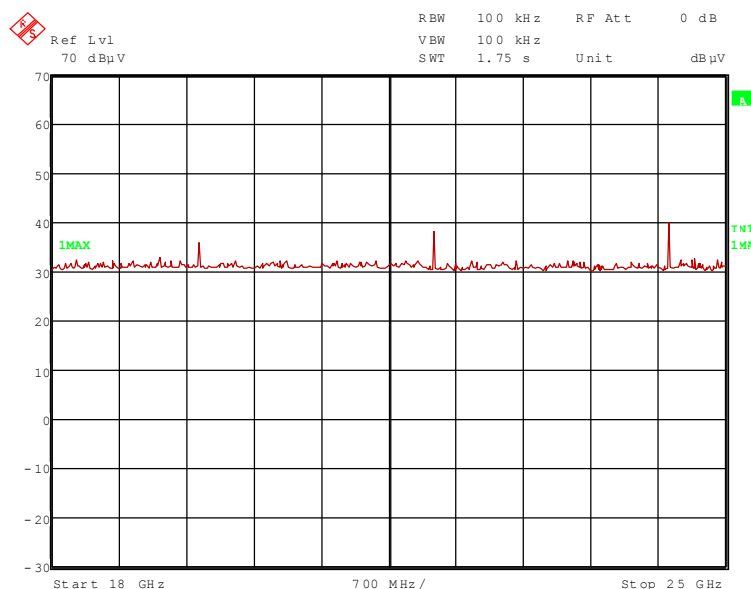

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 4.882 GHz, 7.323 GHz, 12.205 GHz and 19.528 GHz

The following frequency was found outside the restricted bands during the preliminary radiated emission test:


- 2.441 GHz, 9.764 GHz, 14.646 GHz, 17.087 GHz, 21.969 GHz and 24.410 GHz

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST REPORT REFERENCE: R80660_A

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

72194_18.wmf (1 GHz to 4 GHz):

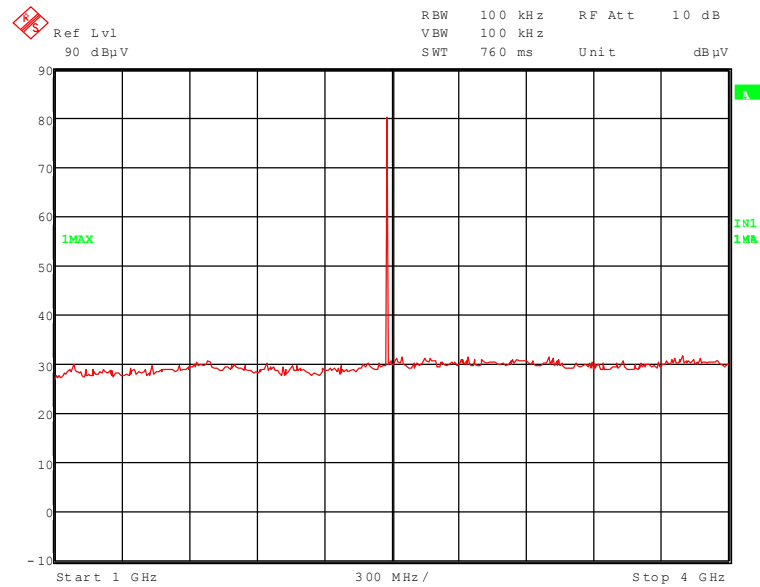


72194_15.wmf (4 GHz to 12 GHz):

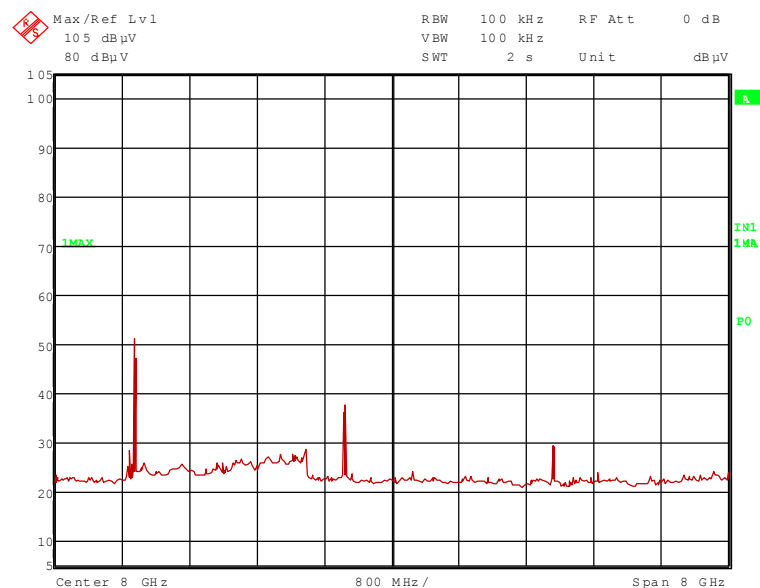


TEST REPORT REFERENCE: R80660_A

72194_45.wmf (12 GHz to 18 GHz):

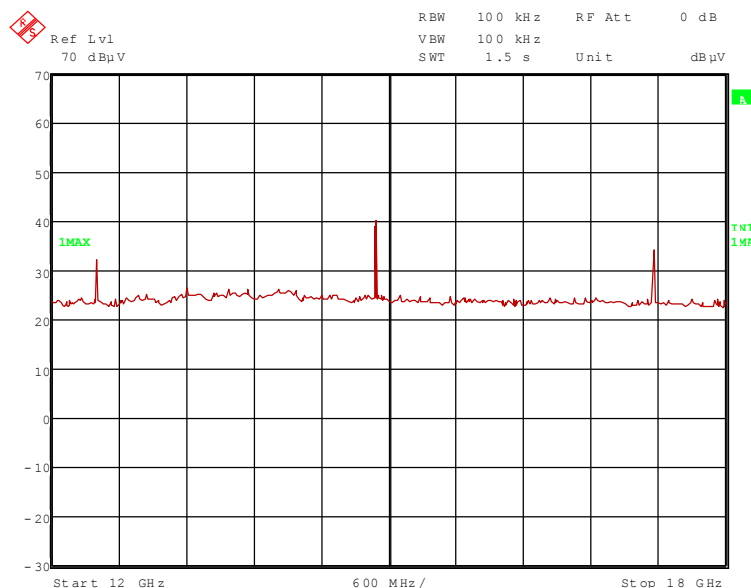

72194_46.wmf (18 GHz to 25 GHz):

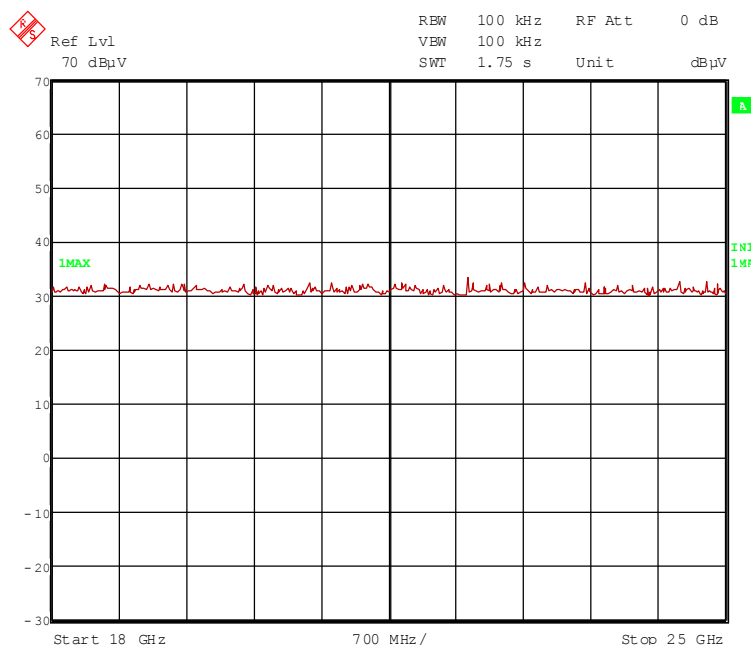

The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 4.960 GHz, 7440 GHz and 12.400 GHz

The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.480 GHz, 9.920 GHz, 14.880 GHz and 17.360 GHz

These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST REPORT REFERENCE: R80660_A


6.8.2.2 FINAL MEASUREMENT (30 MHz to 1 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

- Position of EUT:** The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide:** The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
- Supply voltage:** During all measurements the EUT was supplied with 5.0 V DC via the carrier board.
- Test record:** The test was carried out in test mode 2 of the EUT, because there was no difference to the other test modes.
- Resolution bandwidth:** For all measurements a resolution bandwidth of 120 kHz was used.
- Test results:** The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above mentioned standard. The measured points marked with x are the measured results of the standard subsequent measurement on the open area test site.

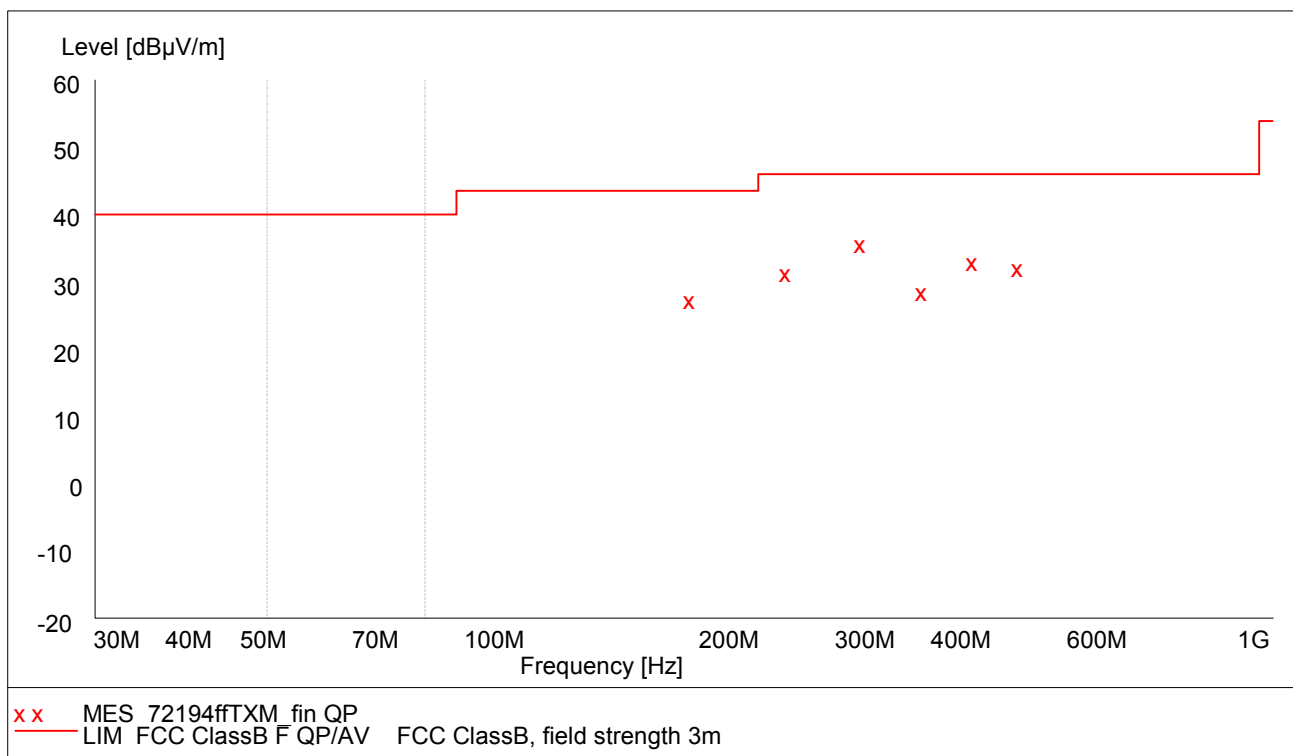

TEST REPORT REFERENCE: R80660_A

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.

Result measured with the quasipeak detector:

(These values are marked in the above diagram by x)

Spurious emissions outside restricted bands									
Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
176.946	27.90	43.5	15.6	17.6	8.8	1.5	136.0	90.00	Hor.
235.928	32.00	46.0	14.0	20	10.3	1.7	125.0	217.00	Hor.
294.910	36.10	46.0	9.9	21.5	12.7	1.9	100.0	292.00	Hor.
353.892	28.90	46.0	17.1	12.6	14.3	2.0	100.0	114.00	Hor.
412.876	33.60	46.0	12.4	14.7	16.6	2.3	100.0	293.00	Hor.
471.855	32.50	46.0	13.5	13	17.1	2.4	100.0	297.00	Vert.
Spurious emissions in restricted bands									
Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
none									
Measurement uncertainty				+2.2 dB / -3.6 dB					

The test results were calculated with the following formula:

Result [dBμV/m] = reading [dBμV] + cable loss [dB] + antenna factor [dB/m]

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

14 – 20

TEST REPORT REFERENCE: R80660_A

6.8.2.3 FINAL MEASUREMENT (1 GHz to 25 GHz)

Ambient temperature	20 °C	Relative humidity	34 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC via the carrier board.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

Result measured with the peak detector:

Frequency MHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2402	114.4	-	-	81.9	28.8	0.0	3.7	150	Vert.	carrier
4804	62.5	74.0	11.5	49.2	33.7	25.7	5.3	150	Vert.	Yes
7206	62.8	94.4	31.6	43.7	36.9	24.6	6.8	150	Hor.	No
9608	62.4	94.4	32.0	40.2	38.3	23.9	7.8	150	Ver.	No
12010	53.9	74.0	20.1	43.7	33.6	25.9	2.5	150	Vert.	Yes
14412	58.2	94.4	36.2	48.5	33.7	26.5	2.5	150	Vert.	No
16812	55.9	94.4	38.5	47.1	33.8	27.5	2.5	150	Vert.	No
19216	49.3	74.0	24.7	47.9	37.1	38.2	2.5	150	Vert.	Yes
21618	48.1	94.4	46.3	46.7	37.2	38.3	2.5	150	Vert.	No
24020	51.8	94.4	42.6	50.9	37.2	38.8	2.5	150	Vert.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency MHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2402	111.7	-	-	79.2	28.8	0.0	3.7	150	Vert.	carrier
4804	53.3	54.0	0.7	40	33.7	25.7	5.3	150	Vert.	Yes
7206	55.5	91.7	36.2	36.4	36.9	24.6	6.8	150	Hor.	No
9608	52.8	91.7	38.9	30.6	38.3	23.9	7.8	150	Ver.	No
12010	42.3	54.0	11.7	32.1	33.6	25.9	2.5	150	Vert.	Yes
14412	43.6	91.7	48.1	33.9	33.7	26.5	2.5	150	Vert.	No
16812	37.5	91.7	54.2	28.7	33.8	27.5	2.5	150	Vert.	No
19216	31.6	54.0	22.4	30.2	37.1	38.2	2.5	150	Vert.	Yes
21618	33.1	91.7	58.6	31.7	37.2	38.3	2.5	150	Vert.	No
24020	34.1	91.7	57.6	33.2	37.2	38.8	2.5	150	Vert.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

TEST REPORT REFERENCE: R80660_A

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

Result measured with the peak detector:

Frequency MHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height Cm	Pol.	Restr. Band
2441	113.8	-	-	81.2	28.9	0.0	3.7	150	Vert.	carrier
4882	65.4	74.0	8.6	52.0	33.8	25.7	5.3	150	Vert.	Yes
7323	59.3	74.0	14.7	40.0	37.1	24.6	6.8	150	Vert.	Yes
9764	60.6	93.8	33.2	38.2	38.4	23.9	7.9	150	Ver.	No
12205	52.5	74.0	21.5	42.3	33.6	25.9	2.5	150	Vert.	Yes
14646	57.8	93.8	36.0	48.2	33.7	26.6	2.5	150	Vert.	No
17087	55.1	93.8	38.7	46.2	33.8	27.4	2.5	150	Vert.	No
19528	46.7	74.0	27.3	45.3	37.1	38.2	2.5	150	Vert.	Yes
21969	46.9	93.8	46.9	45.5	37.2	38.3	2.5	150	Vert.	No
24410	48.6	93.8	45.2	47.8	37.2	38.9	2.5	150	Vert.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency MHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height Cm	Pol.	Restr. Band
2441	111.2	-	-	78.6	28.9	0.0	3.7	150	Vert.	carrier
4882	51.9	54.0	2.1	38.5	33.8	25.7	5.3	150	Vert.	Yes
7323	51.1	54.0	2.9	31.8	37.1	24.6	6.8	150	Vert.	Yes
9764	40.6	91.2	50.6	18.2	38.4	23.9	7.9	150	Ver.	No
12205	40.4	54.0	13.6	30.2	33.6	25.9	2.5	150	Vert.	Yes
14646	43.6	91.2	47.6	34.0	33.7	26.6	2.5	150	Vert.	No
17087	32.0	91.2	59.2	23.1	33.8	27.4	2.5	150	Vert.	No
19528	30.3	54.0	23.7	28.9	37.1	38.2	2.5	150	Vert.	Yes
21969	32.0	91.2	59.2	30.6	37.2	38.3	2.5	150	Vert.	No
24410	32.5	91.2	58.7	31.7	37.2	38.9	2.5	150	Vert.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

TEST REPORT REFERENCE: R80660_A

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

Result measured with the peak detector:

Frequency MHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2480	114.3	-	-	81.5	29.0	0.0	3.8	150	Vert.	carrier
4960	65.9	74.0	8.1	52.2	34.0	25.6	5.3	150	Vert.	Yes
7440	65.9	74.0	8.1	46.3	37.3	24.5	6.8	150	Vert.	Yes
9920	60.3	94.3	34.0	37.8	38.5	23.9	7.9	150	Vert.	No
12400	52.1	74.0	21.9	41.8	33.7	25.9	2.5	150	Vert.	Yes
14880	57.0	94.3	37.3	47.5	33.7	26.7	2.5	150	Vert.	No
17360	50.8	94.3	43.5	41.6	33.9	27.2	2.5	150	Vert.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency MHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2480	111.6	-	-	78.8	29.0	0.0	3.8	150	Vert.	carrier
4960	52.1	54.0	1.9	38.4	34.0	25.6	5.3	150	Vert.	Yes
7440	53.9	54.0	0.1	34.3	37.3	24.5	6.8	150	Vert.	Yes
9920	49.6	91.6	42.0	27.1	38.5	23.9	7.9	150	Vert.	No
12400	39.5	54.0	14.5	29.2	33.7	25.9	2.5	150	Vert.	Yes
14880	41.5	91.6	50.1	32.0	33.7	26.7	2.5	150	Vert.	No
17360	33.6	91.6	58.0	24.4	33.9	27.2	2.5	150	Vert.	No
Measurement uncertainty						+2.2 dB / -3.6 dB				

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R80660_A


6.9 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)

6.9.1 METHOD OF MEASUREMENT

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

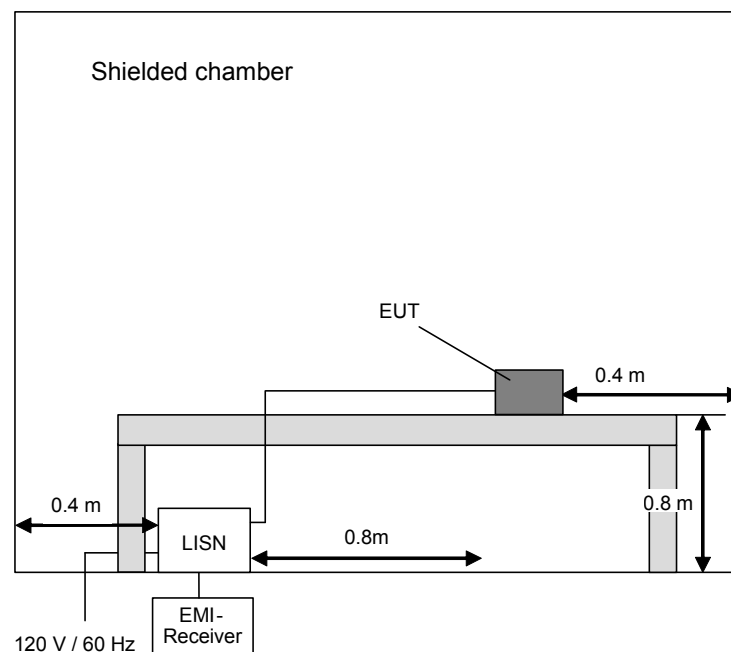

TEST REPORT REFERENCE: R80660_A

6.9.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)

Ambient temperature	21 °C	Relative humidity	39 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Title: AC Powerline Conducted Emission Test with protective ground conductor simulating network

EUT: Bluetooth module CB0905-02-01

Manufacturer: connectBlue

Operating Condition: 120 V / 60 Hz, With AC / DC adapter mascot type 2121


Test site: PHOENIX TESTLAB Blomberg M4

Operator: D. Suetthoff

Test Specification: With R380.500.139 antenna

Comment: Power setting FF

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by x and the average measured points by +.

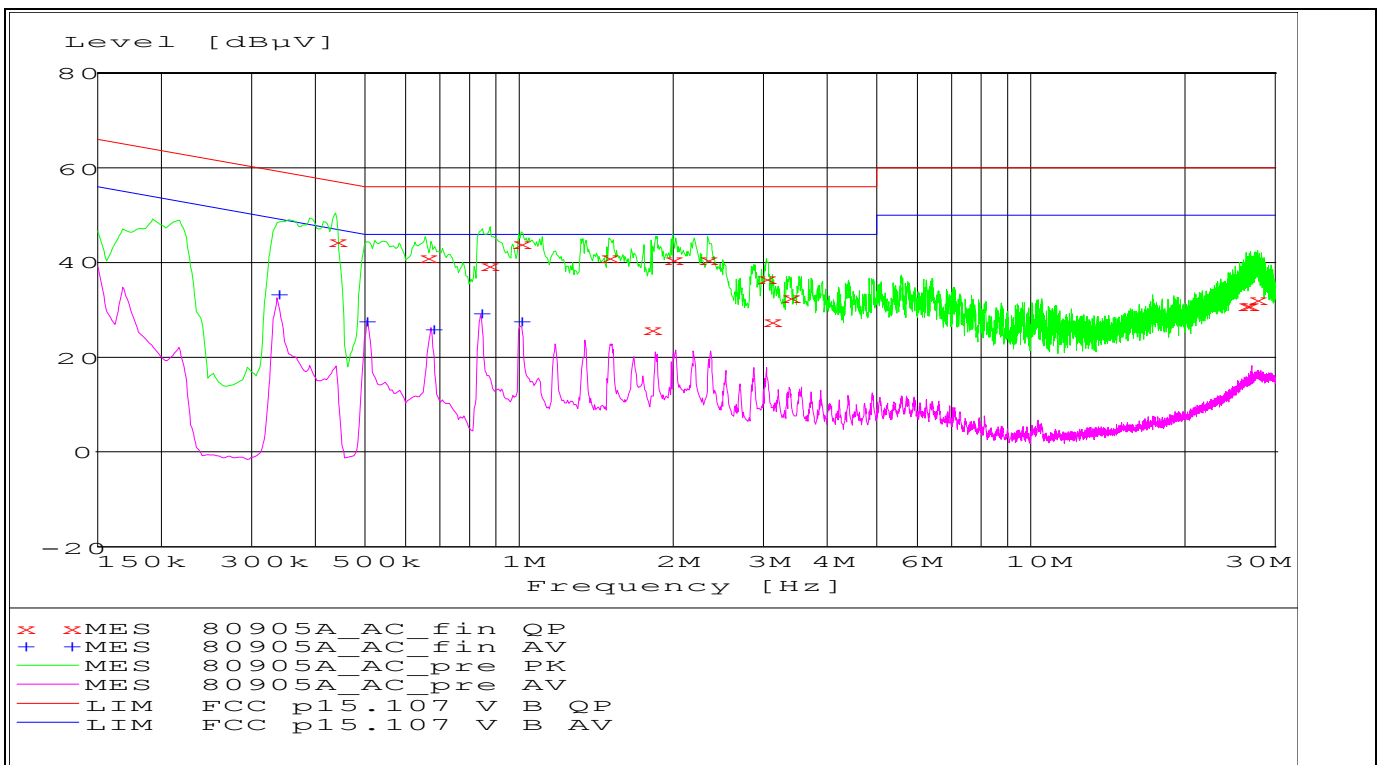

Data record name: 80660A_AC

TEST REPORT REFERENCE: R80660_A

Result measured with the quasipeak detector:

(These values are marked in the above diagram by x)

Frequency MHz	Level dBμV	Transducer dB	Limit dBμV	Margin dB	Line	PE
0.439260	44.70	0.9	57.1	12.4	L1	FLO
0.658050	41.50	0.8	56.0	14.5	L1	FLO
0.873420	39.50	0.7	56.0	16.5	L1	FLO
1.012290	44.00	0.7	56.0	12.0	L1	FLO
1.500090	41.30	0.7	56.0	14.7	L1	FLO
1.813380	26.40	0.7	56.0	29.6	N	FLO
1.996800	41.00	0.8	56.0	15.0	L1	FLO
2.331240	40.60	0.7	56.0	15.4	L1	FLO
3.043590	36.80	0.8	56.0	19.2	L1	FLO
3.122340	28.10	0.7	56.0	27.9	L1	FLO
3.375510	32.80	0.7	56.0	23.2	L1	FLO
26.349900	31.10	2.9	60.0	28.9	N	FLO
26.732670	31.30	3.0	60.0	28.7	N	FLO
27.704670	32.30	3.0	60.0	27.7	N	FLO

Data record name: 80660A_AC_fin QP

Result measured with the average detector:

(These values are marked in the above diagram by +)

Frequency MHz	Level dBμV	Transducer dB	Limit dBμV	Margin dB	Line	PE
0.338190	33.40	0.9	49.2	15.8	L1	FLO
0.505860	28.10	0.8	46.0	17.9	L1	FLO
0.675690	26.00	0.8	46.0	20.0	L1	FLO
0.843090	29.50	0.7	46.0	16.5	L1	FLO
1.010490	27.80	0.7	46.0	18.2	L1	FLO

Data record name: 80660A_AC_fin AV

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

1 – 3, 5, 6

TEST REPORT REFERENCE: R80660_A

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088	Weekly verification (system cal.)	
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026	02/26/2008 02/26/2008	02/2010 02/2010
3	LISN	NSLK8128	Schwarzbeck	8128155	480058	01/09/2008	01/2009
5	AC-filter	B84299-D87-E3	Siemens	930262292	480097	Weekly verification (system cal.)	
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111	not applicable	
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
15	Measuring receiver	ESCS30	Rohde & Schwarz	828985/014	480270	02/27/2008	02/2010
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 A	Chase	1643	480147	08/01/2007	08/2012
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	02/25/2008	02/2010
32	Controller	HD100	Deisel	100/670	480326	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2688	480328	10/11/2005	10/2010
36	Antenna	3115 A	EMCO	9609-4918	480183	08/04/2003	08/2008
37	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294	Six month verification (system cal.)	
39	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297	Six month verification (system cal.)	
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141	Weekly verification (system cal.)	
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142	Weekly verification (system cal.)	
46	RF-cable 1m	KPS-1533-400-KPS	Insulated Wire	-	480301	Six month verification (system cal.)	
49	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337	Six month verification (system cal.)	
50	Preamplifier	JS3-12001800-16-5A	Miteq	571667	480343	Six month verification (system cal.)	
51	Preamplifier	JS3-18002600-20-5A	Miteq	658697	480342	Six month verification (system cal.)	
54	Power supply	TOE 8852	Toellner	51712	480233	11/27/2006	11/2008

TEST REPORT REFERENCE: R80660_A

8 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	7 pages
	EUT, test set-up fully anechoic chamber	80660_1.jpg
	EUT, test set-up fully anechoic chamber	80660_2.jpg
	EUT, test set-up fully anechoic chamber	80660_3.jpg
	EUT, test set-up fully anechoic chamber	80660_4.jpg
	EUT, test set-up fully anechoic chamber	80660_5.jpg
	EUT, test set-open area test site	80660_6.jpg
	EUT, test set-up conducted emission measurement	80660_13.jpg
ANNEX B	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	6 pages
	cB-0905-02-01 sample "24", top view	80660_a.jpg
	cB-0905-02-01 sample "24", shielding removed, top view	80660_b.jpg
	cB-0905-02-01 bottom view	80660_c.jpg
	cB-0903-02-01 carrier board, top view	80660_d.jpg
	cB-0903-03 carrier board, bottom view	80660_e.jpg
	R380.500.139 antenna	80660_f.jpg
ANNEX C	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	- pages
	Because the EUT is a module, which is intended to be implemented inside a final application, no external photographs were available	
ANNEX D	ADDITIONAL RESULTS FOR INDUSTRY CANADA:	7 pages