


OutSide™ 2400

Antenna covering the 2.4 GHz ISM band for Bluetooth, WLAN, Zigbee. The antenna is mounted by screws on arbitrary materials. The antenna includes cable and U.FL or MMCX connector for connecting direct to modules or board including the radio circuits.

The antenna can be supplied with various cable length and connectors.

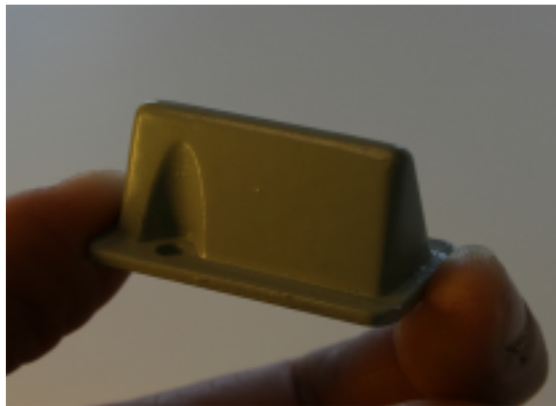

Specification

Frequency: 2400 - 2485 MHz
VSWR: < 3:1
Gain: Max: 3 dBi
Dimension: 36 x 18 mm, height 16 mm
Interface: U.FL IPEX or MMCX on 7 cm cable.
Mounting: 2 x 3 mm screws or adhesive tape.
Temperature: -30 to +85°C

RoHS compliant

Applications

M2M-communications
Telemetric
Automated Meter Reading
Alarms

Subject to change without notice
www.proant.se

