
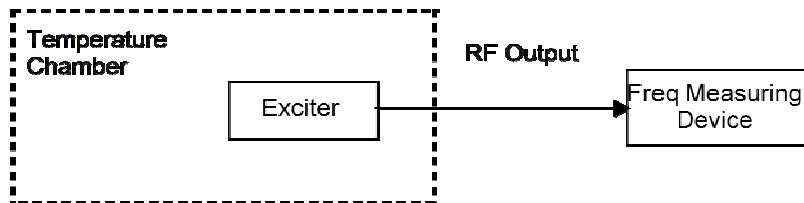


Equipment Model: DTXPRO-800VH

Frequency stability versus temperature and line voltage was measured in a controlled environment. For these tests, the exciter RF output was fed to a calibrated frequency measuring device that has better than a 1 ppm accuracy. The test equipment configuration is shown below:



The variac was adjusted for nominal voltage and the frequency was recorded. Then the variac was adjusted to 85% and 115% of the nominal voltage and the frequency was recorded at each voltage level. The results are tabulated below:

Line Voltage (Volts)	Pilot Frequency (MHz)
103 (85%)	536.309471
121 (Nominal)	536.309482
139(115%)	536.309475

For the temperature stability measurements, the exciter was placed inside a Cincinnati Sub-Zero temperature chamber -- Model Z-32-2-2H/WC equipped with a CSZ Dimension II temperature controller. The exciter was energized and the pilot frequency was measured on the Rohde and Schwarz test set. The temperature was then raised to +40°C, allowed to stabilize for 15 minutes and then cycled to each colder temperature where it was allowed to stabilize for 10 minutes before recording the measured frequency and moving on to the next lower temperature.

Set Pilot Freq=536.3094406


Temperature °C	Time	Pilot Freq *MHz)	Difference (Hz)
25	11:25	536.309515	74
40	11:46	536.309908	467
30	12:10	536.309688	247
20	12:30	536.309513	72
10	12:50	536.309574	133
0	13:10	536.309755	314

The recorded data indicates that the frequency stability requirements of FCC Rule 2.1055 were met.

This exciter is capable of operation from 54MHz to 216MHz and 470MHz to 806MHz with no changes in physical configuration.

CABINET RADIATION

The transmitter and test equipment were configured as shown below including the angles of measurement with respect to the transmitter cabinet. The photo on the subsequent page also shows the physical set-up of the test equipment and equipment under test. The transmitter was operating at 800W average power. The free space path loss, cable loss and antenna gain characteristics were obtained at the fundamental frequency and at each of the harmonics of the visual carrier frequency in order to accurately assess the level of the signal radiated from the cabinet. Radiation from the cabinet was measured at a distance of 30 feet in 4 different physical rotation angles: 0, 90, 180 and 270 degrees (0 degrees being the front of the cabinet). All spectral components above -85 dB power radiated from the cabinet were recorded. The values are tabulated in the table on the next page following the photo.

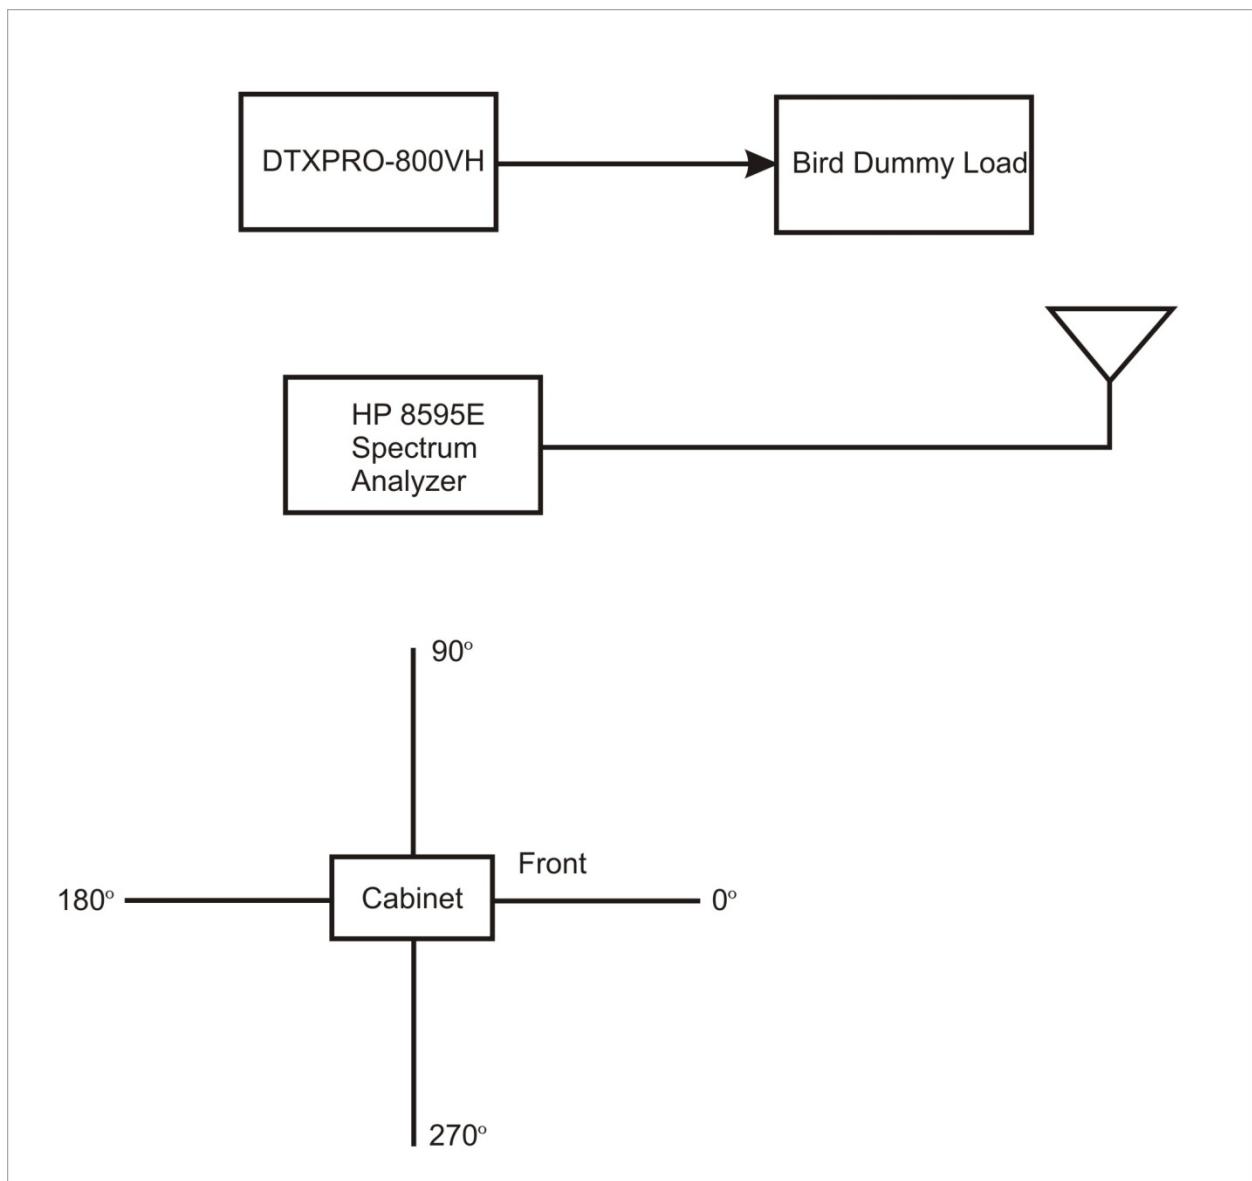

Physical Cabinet Radiation Test Configuration

This photograph shows the actual laboratory environment in which the cabinet radiation tests were conducted. The log periodic antenna, cable and spectrum analyzer are shown in the foreground and the DTXPRO-800VH is shown in the background. The transmitter was rotated 90 degrees for each of the measurement orientations.



As calculated from the spreadsheet data on the following page, the worst case measurement was -78.9 dBm at the second harmonic. (The photo above shows this particular measurement). The measurement tables for the remaining views of the transmitter are shown on the following pages.

PINEAPPLE TECHNOLOGY, INC. DTXPRO-800VH TEST RESULTS AND MEASUREMENTS

PINEAPPLE TECHNOLOGY, INC. DTXPRO-800VH TEST RESULTS AND MEASUREMENTS

CABINET RADIATION TEST										
<u>RIGHT VIEW</u>										
Harmonic	Center	SIGNAL	CABLE	ANTENNA	PATH	ADJ	MAXIMUM	STATUS	Lower	Upper
	Freq	LEVEL	LOSS dB	GAIN dB	LOSS dB	LEVEL	LEVEL		Freq	Freq
	GHz	dBm	dB	dB	dB	dBm	dBm		Edge	Edge
Fc*2	0.402	-79.800	0.3	5.8	44.58	-40.7254589	-1.0	P	0.396	0.408
Fc*3	0.603	-72.400	0.4	6.6	48.11	-30.5011238	-1.0	P	0.594	0.612
Fc*4	0.804	-78.000	0.5	5.5	50.61	-32.399839	-1.0	P	0.792	0.816
Fc*5	1.005	-67.900	0.6	6.5	52.54	-21.2591288	-1.0	P	0.990	1.020
Fc*6	1.206	-80.500	0.7	7.0	54.13	-32.6729938	-1.0	P	1.188	1.224
Fc*7	1.407	-80.400	0.8	6.8	55.47	-30.9315481	-1.0	P	1.386	1.428
Fc*8	1.608	-79.700	0.9	6.5	56.63	-28.6691991	-1.0	P	1.584	1.632
Fc*9	1.809	-80.700	1.0	6.4	57.65	-28.4436387	-1.0	P	1.782	1.836
Fc*10	2.010	-80.200	1.1	4.3	58.56	-24.8259789	-1.0	P	1.980	2.040
<u>REAR VIEW</u>										
Harmonic	Center	SIGNAL	CABLE	ANTENNA	PATH	ADJ	MAXIMUM	STATUS	Lower	Upper
	Freq	LEVEL	LOSS dB	GAIN dB	LOSS dB	LEVEL	LEVEL		Freq	Freq
	GHz	dBm	dB	dB	dB	dBm	dBm		Edge	Edge
Fc*2	0.402	-81.600	0.3	5.8	44.58	-42.5254589	-1.0	P	0.396	0.408
Fc*3	0.603	-70.500	0.4	6.6	48.11	-28.6011238	-1.0	P	0.594	0.612
Fc*4	0.804	-79.300	0.5	5.5	50.61	-33.699839	-1.0	P	0.792	0.816
Fc*5	1.005	-67.300	0.6	6.5	52.54	-20.6591288	-1.0	P	0.990	1.020
Fc*6	1.206	-80.200	0.7	7.0	54.13	-32.3729938	-1.0	P	1.188	1.224
Fc*7	1.407	-80.000	0.8	6.8	55.47	-30.5315481	-1.0	P	1.386	1.428
Fc*8	1.608	-80.100	0.9	6.5	56.63	-29.0691991	-1.0	P	1.584	1.632
Fc*9	1.809	-80.100	1.0	6.4	57.65	-27.8436387	-1.0	P	1.782	1.836
Fc*10	2.010	-80.400	1.1	4.3	58.56	-25.0259789	-1.0	P	1.980	2.040
<u>LEFT VIEW</u>										
Harmonic	Center	SIGNAL	CABLE	ANTENNA	PATH	ADJ	MAXIMUM	STATUS	Lower	Upper
	Freq	LEVEL	LOSS dB	GAIN dB	LOSS dB	LEVEL	LEVEL		Freq	Freq
	GHz	dBm	dB	dB	dB	dBm	dBm		Edge	Edge
Fc*2	0.402	-80.300	0.3	5.8	44.58	-41.2254589	-1.0	P	0.396	0.408
Fc*3	0.603	-76.100	0.4	6.6	48.11	-34.2011238	-1.0	P	0.594	0.612
Fc*4	0.804	-79.600	0.5	5.5	50.61	-33.999839	-1.0	P	0.792	0.816
Fc*5	1.005	-72.400	0.6	6.5	52.54	-25.7591288	-1.0	P	0.990	1.020
Fc*6	1.206	-79.400	0.7	7.0	54.13	-31.5729938	-1.0	P	1.188	1.224
Fc*7	1.407	-80.500	0.8	6.8	55.47	-31.0315481	-1.0	P	1.386	1.428
Fc*8	1.608	-80.200	0.9	6.5	56.63	-29.1691991	-1.0	P	1.584	1.632
Fc*9	1.809	-79.900	1.0	6.4	57.65	-27.6436387	-1.0	P	1.782	1.836
Fc*10	2.010	-80.200	1.1	4.3	58.56	-24.8259789	-1.0	P	1.980	2.040

Test Equipment List

The following test equipment was used in the various test equipment configurations or to create calibration of equipment at various frequencies. All equipment was known to be in working order.

VENDOR	MODEL NUMBER	DESCRIPTION	SERIAL NUMBER
Agilent	N1996A	CSA Spectrum Analyzer	MY45371110
Com-Tech	DC5KB-1	Directional Coupler UHF 5kw RMS	044863
Mini-Circuits	NHP-400	Hi Pass Filter	V7772700640
Microwave Filter Company	R16560-10	DTV Band Stop Filter	D/C 0906
Agilent	E4418B	EPM Series Power Meter	MY40330293
Agilent	8481A	Power Sensor	1550A03679
Bird	8890-300	2500 Watt Dummy Load	4778
Rohde & Schwarz	EFA-53	TV Test Receiver	100041
ETS	3147	Log Periodic Antenna	9112-1053
Hewlett Packard	8596E	Spectrum Analyzer	3807A01244
Agilent	8753D	Network Analyzer	3410A04800