

FCC PART 15 SUBPART C
EMI MEASUREMENT AND TEST REPORT

For
smartBridges Pte Ltd

10 Anson Road #22-14
International Plaza
Singapore 079903

FCC ID: PWGairNIC

September 17, 2001

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: USB LAN Adapter with CD & Cable
Test Engineer: Jeff Lee	
Test Date: September 17 , 2001	
Reviewed By: John Y. Chan – Engineering Manager	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street, Suite 2 Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This report may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION..... 4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

1.2 OBJECTIVE4

1.3 RELATED SUBMITTAL(S)/GRANT(S)4

1.4 TEST METHODOLOGY.....4

1.5 TEST FACILITY5

1.6 TEST EQUIPMENT LIST AND DETAILS.....5

1.7 EQUIPMENT UNDER TEST (EUT)6

1.8 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....6

1.9 EXTERNAL I/O CABLING LIST AND DETAILS.....6

2 - SYSTEM TEST CONFIGURATION..... 7

2.1 JUSTIFICATION.....7

2.2 EUT EXERCISE SOFTWARE.....7

2.3 SPECIAL ACCESSORIES.....7

2.4 SCHEMATICS / BLOCK DIAGRAM.....7

2.5 EQUIPMENT MODIFICATIONS.....7

2.6 CONFIGURATION OF TEST SYSTEM.....8

2.7 TEST SETUP BLOCK DIAGRAM.....9

3 - SUMMARY OF TEST RESULTS 10

4 - CONDUCTED OUTPUT POWER MEASUREMENT..... 11

4.1 STANDARD APPLICABLE.....11

4.2 MEASUREMENT PROCEDURE.....11

4.3 TEST EQUIPMENT.....11

4.4 MEASUREMENT RESULT11

5 – SPURIOUS EMISSION 12

5.1 STANDARD APPLICABLE.....12

5.2 MEASUREMENT PROCEDURE.....12

5.3 MEASUREMENT DATA.....12

6 – POWER DENSITY 19

6.1 STANDARD APPLICABLE.....19

6.2 MEASUREMENT PROCEDURE.....19

6.3 TEST RESULTS.....19

7 – 6 DB BANDWIDTH..... 23

7.1 STANDARD APPLICABLE.....23

7.2 MEASUREMENT PROCEDURE.....23

7.3 MEASUREMENT DATA.....23

8-100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT 27

8.1 STANDARD APPLICABLE.....27

8.2 MEASUREMENT PROCEDURE.....27

8.3 TEST RESULTS.....27

9 - ANTENNA REQUIREMENT..... 31

9.1 STANDARD APPLICABLE.....31

9.2 ANTENNA CONNECTED CONSTRUCTION31

10 – RF EXPOSURE..... 32

11 – SPURIOUS RADIATED EMISSION DATA 33

11.1 MEASUREMENT UNCERTAINTY.....33

11.2 EUT SETUP.....33

11.3 SPECTRUM ANALYZER SETUP.....	33
11.4 TEST PROCEDURE	34
11.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	34
11.6 SUMMARY OF TEST RESULTS.....	34
12 - CONDUCTED EMISSIONS TEST DATA	37
12.1 MEASUREMENT UNCERTAINTY.....	37
12.2 EUT SETUP.....	37
12.3 SPECTRUM ANALYZER SETUP.....	37
12.4 TEST PROCEDURE	38
12.5 SUMMARY OF TEST RESULTS.....	38
12.6 CONDUCTED EMISSIONS TEST DATA.....	38
12.7 PLOT OF CONDUCTED EMISSIONS TEST DATA.....	38
13 - PROCESSING GAIN	40

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *SmartBridges Pte Ltd*'s product, model no.: *airNIC* or the "EUT" as referred to in this report is a USB LAN Adapter with CD & Cable which measures 4.6"L x 1.75"W x 5.0"H. *airNIC* provides instant, high-speed wireless network connectivity. The Adapter delivers a complete solution to customers who require mobility and freedom in a Wireless Local Area Network (WLAN).

The external Plug-and-Play Adapter connects directly to the USB port of the PC. The State of the art hot Plug-and-Play USB technology eliminates IRQ conflicts and ensures easy installation. The Adapter draws its power from the USB port of the computer.

The airNIC allows you to:

- Connect your computer to other computers around you
- Connect your computer to a standalone wireless network
- Connect your computer to a wireless LAN connected to a wired LAN infrastructure

1.2 Objective

This type approval report is prepared on behalf of *SmartBridges Pte Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Spurious Radiated Emission, and processing gain.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 –1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 Meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Suite 2, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI).

The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2610A02165	12/6/01
HP	Spectrum Analyzer	8593B	2919A00242	12/20/01
HP	Amplifier	8349B	2644A02662	12/20/01
HP	Quasi-Peak Adapter	85650A	917059	12/6/01
HP	Amplifier	8447E	1937A01046	12/6/01
A.H. System	Horn Antenna	SAS0200/571	261	12/27/01
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/01
Com-Power	Biconical Antenna	AB-100	14012	11/2/01
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/01
Com-Power	LISN	LI-200	12208	12/20/01
Com-Power	LISN	LI-200	12005	12/20/01
BACL	Data Entry Software	DES1	0001	12/20/01

1.7 Equipment Under Test (EUT)

Manufacturer	Description	Model	Serial Number	FCC ID
smartBridges Pte Ltd	USB LAN Adapter with CD & Cable	airNIC	None	PWGairNIC

1.8 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Microsoft	KB	E06401COMB	X03-30785	NONE
Compaq	Mouse	M-S34	4862A011	DZL211029
AGD	Monitor	GD-500X	5N0008541	NONE
IBM	PC System	520	AM707AR	DOC
EVEREX	Modem	EV-945	None	E3E5UVEV-945
Citizen	Printer	LSP-10	5047999-82	DLK66TLSP-10

1.9 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Shielded KB Cable	1.6	KB Port/Host	Microsoft Keyboard
Shielded Mouse Cable	1.8	Mouse Port/Host	Compaq Mouse
Shielded Serial Cable	1.5	Serial Port/Host	EVEREX Modem
Shielded Printer Cable	2.0	Parallel Port/Host	Citizen Printer
Shielded Video Cable	1.8	VGA/Host	AGD Monitor
Shielded USB Cable	1.0	USB PORT/HOST	USB PORT/EUT

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The host system was configured for testing in a typical fashion (as a normally used by a typical user).

The EUT was tested in the normal (native) operating mode to represent *worst* case results during the final qualification test.

The power supply used in the host system is Fortron Source Power Supply, M/N: FSP145-50NI.

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The test software, terminal.exe, provided by the customer, is started the Windows 98 terminal program under the Windows 98 operating system. Once loaded, the program sequentially exercises each system component.

The sequence used is as follows:

1. Lines of Hs scroll across the notebook monitor.
2. The modem(s) receives Hs.
3. The printer output Hs.

This process is continuous throughout all tests.

2.3 Special Accessories

As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied by INMAC and their respective support equipment manufacturers. The printer, the modem and the VGA monitor featured shielded metal connectors.


2.4 Schematics / Block Diagram

Appendix A contains a copy of the EUT's schematics diagram as reference.

2.5 Equipment Modifications


No modifications were made by BAACL Corporation to ensure the EUT to comply with the applicable limits and requirements.

2.6 Configuration of Test System

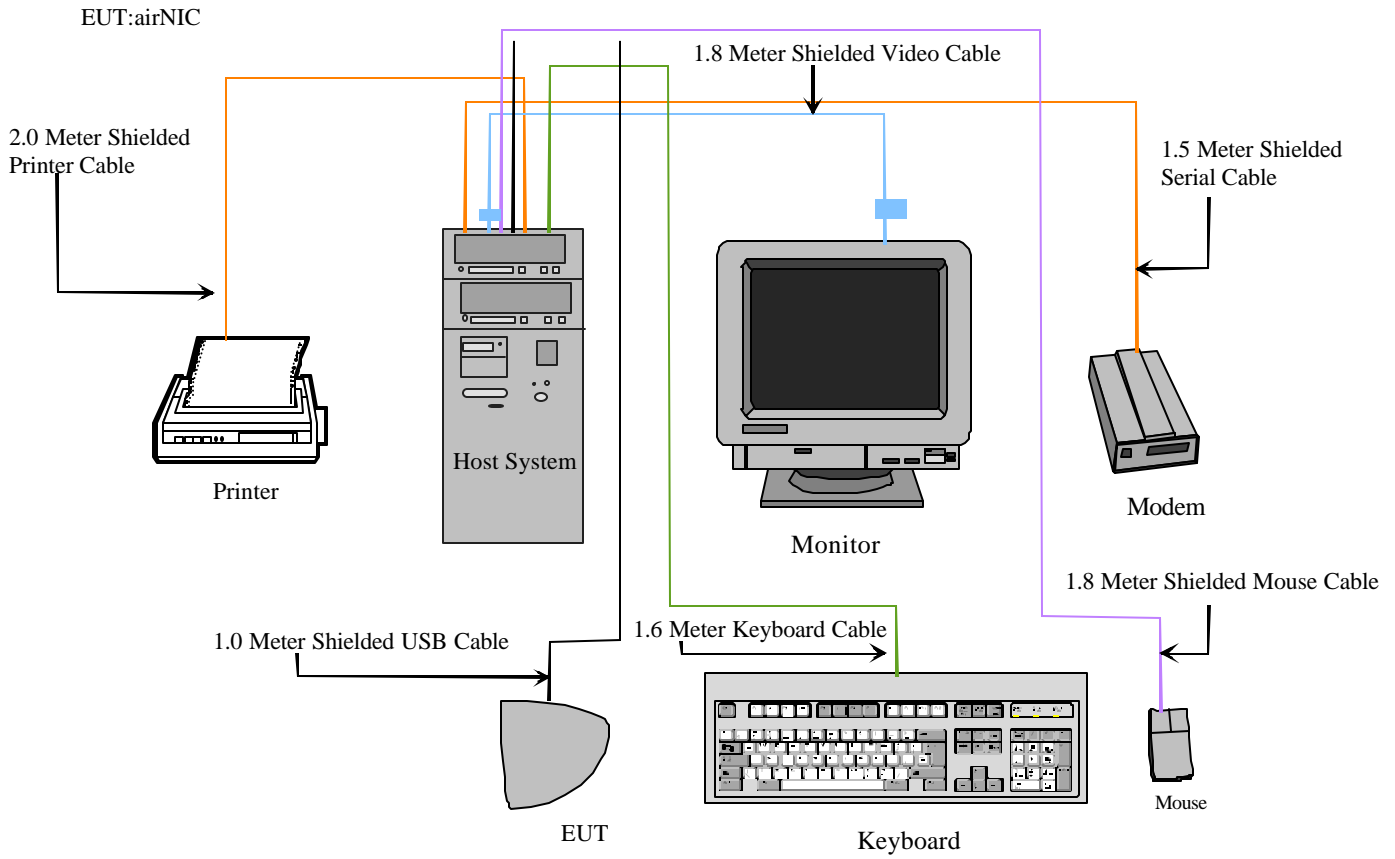

2.7 Test Setup Block Diagram

EUT: airNIC

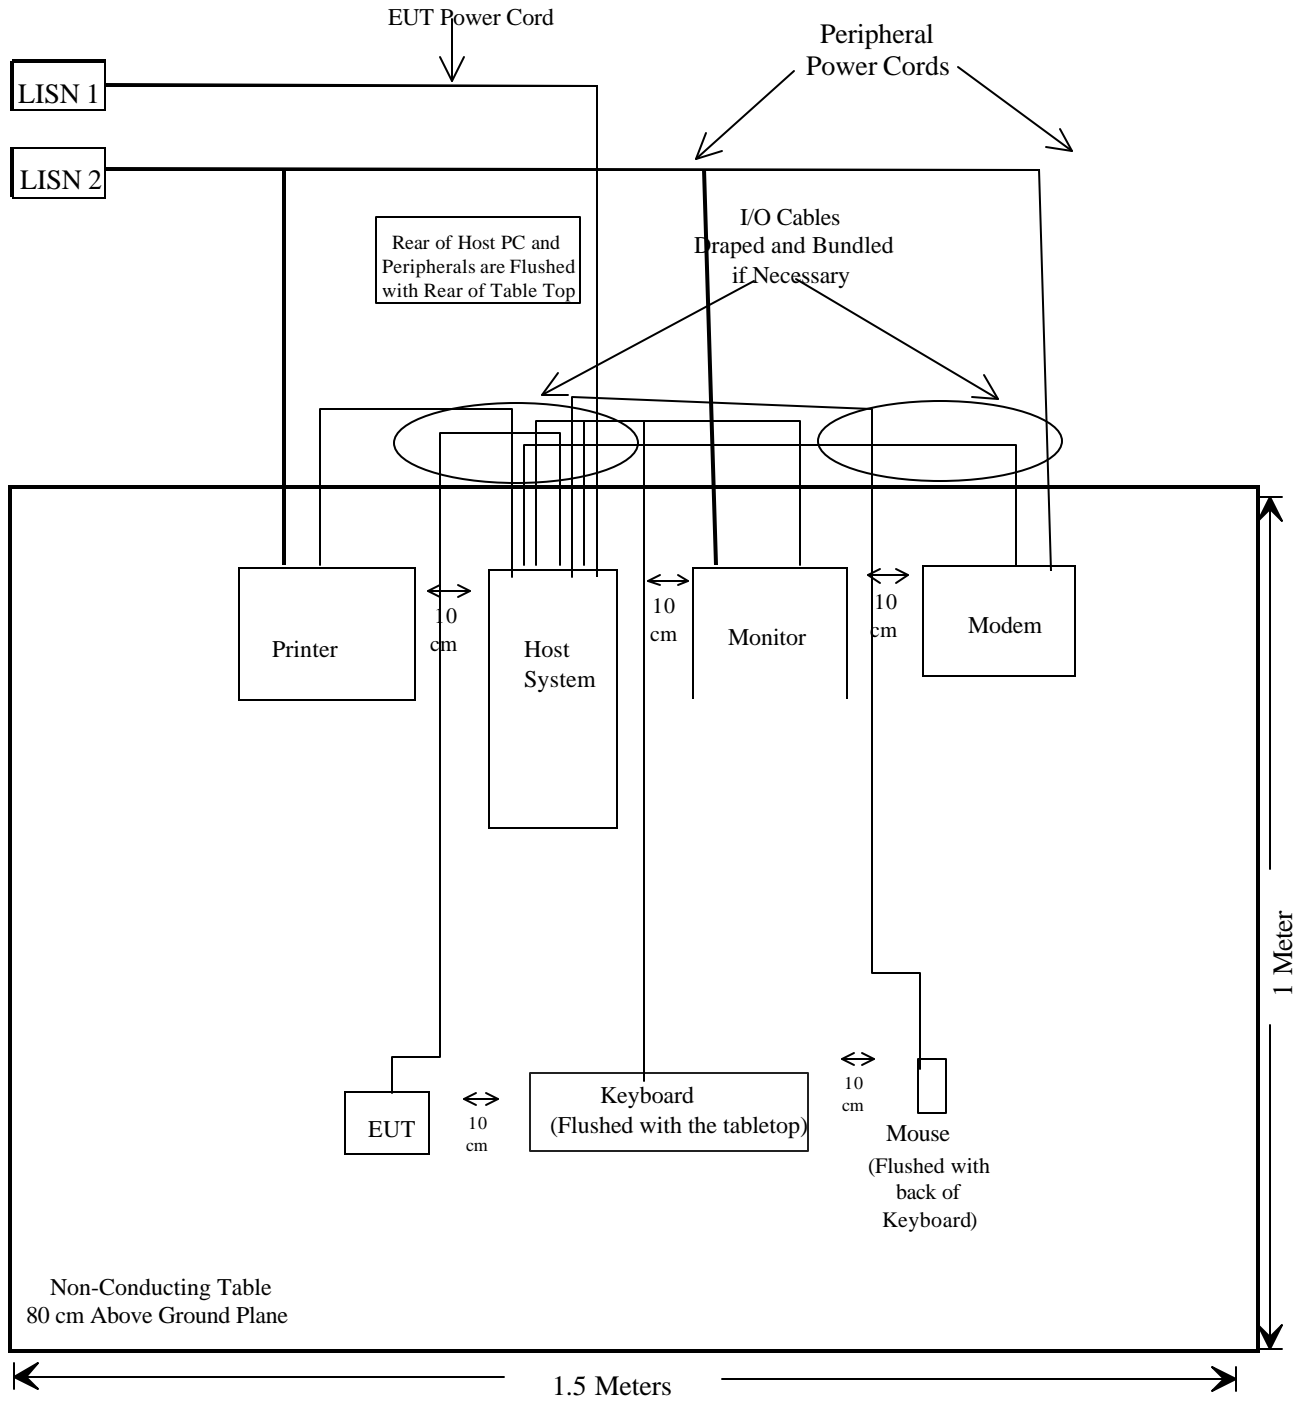

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.205	Restricted Bands	Passed
§ 2.1091	RF Safety Requirements	Passed
§15.203	Antenna Requirement	Passed
§15.207 (a)	Conducted Emission	Passed
§15.209 (a)	Radiated Emission	Passed
§15.209 (f)	Spurious Emission	Passed
§15.247 (a) (2)	6 dB Bandwidth	Passed
§15.247 (b) (2)	Output Power	Passed
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edges	Passed
§15.247 (d)	Peak Power Spectral Density	Passed
§15.247 (e)	Processing Gain	Passed

4 - Conducted Output Power Measurement

4.1 Standard Applicable

According to §15.247(b) (2), the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

4.2 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

4.3 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
Agilent	E4419B	GB40202891	4/8/02
Agilent	E4412A	US38486529	4/8/02

4.4 Measurement Result

Peak Output Power	Test Data	Test Result
High Channel	11.5	Passed
Middle Channel	11.6	Passed
Low Channel	11.4	Passed

5 – SPURIOUS EMISSION

5.1 Standard Applicable


According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.


5.2 Measurement Procedure


1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.


5.3 Measurement Data


Spurious Emission	Page Reference	Test Results
	16-21	Passed

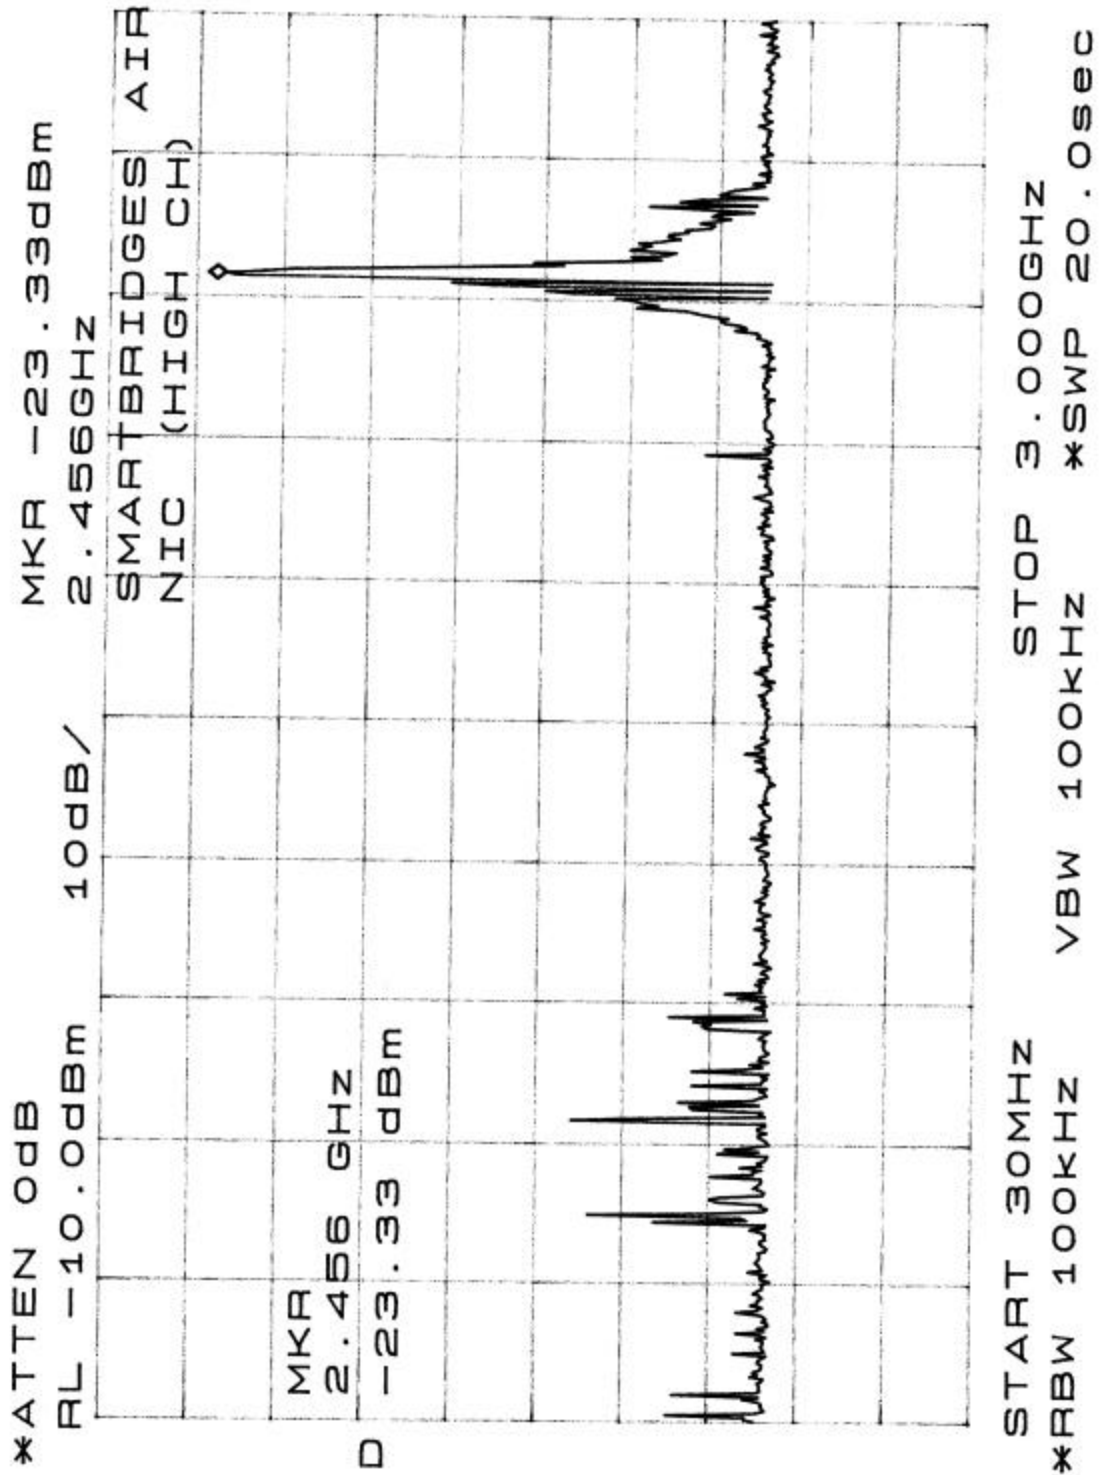


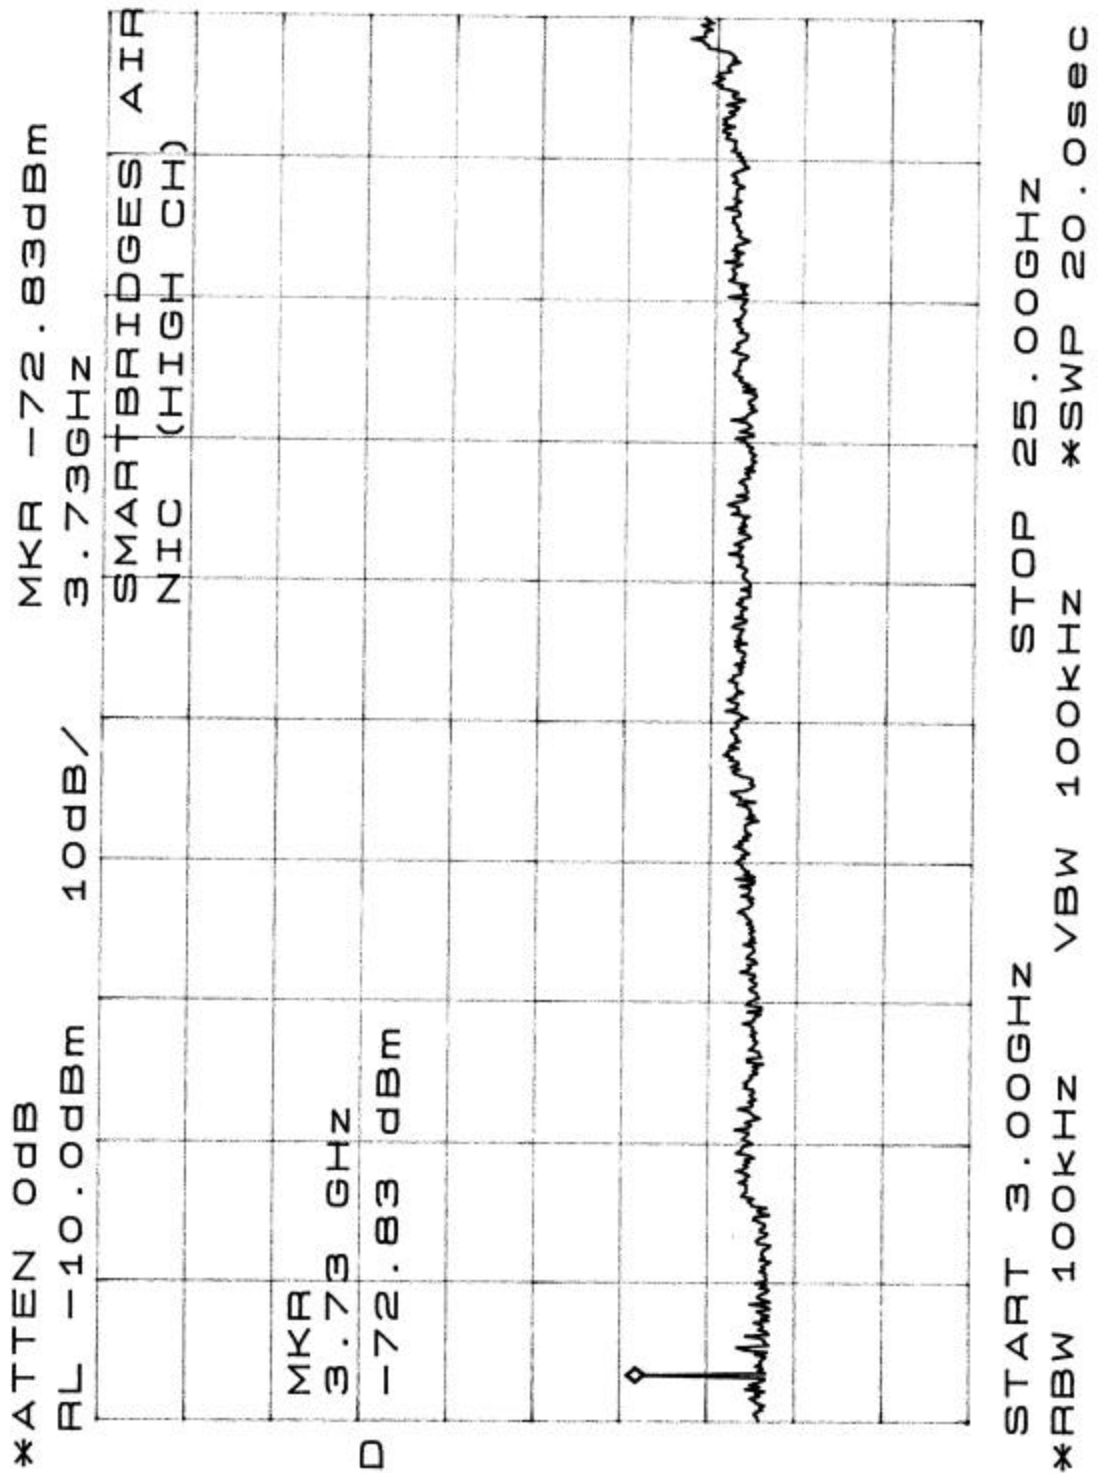

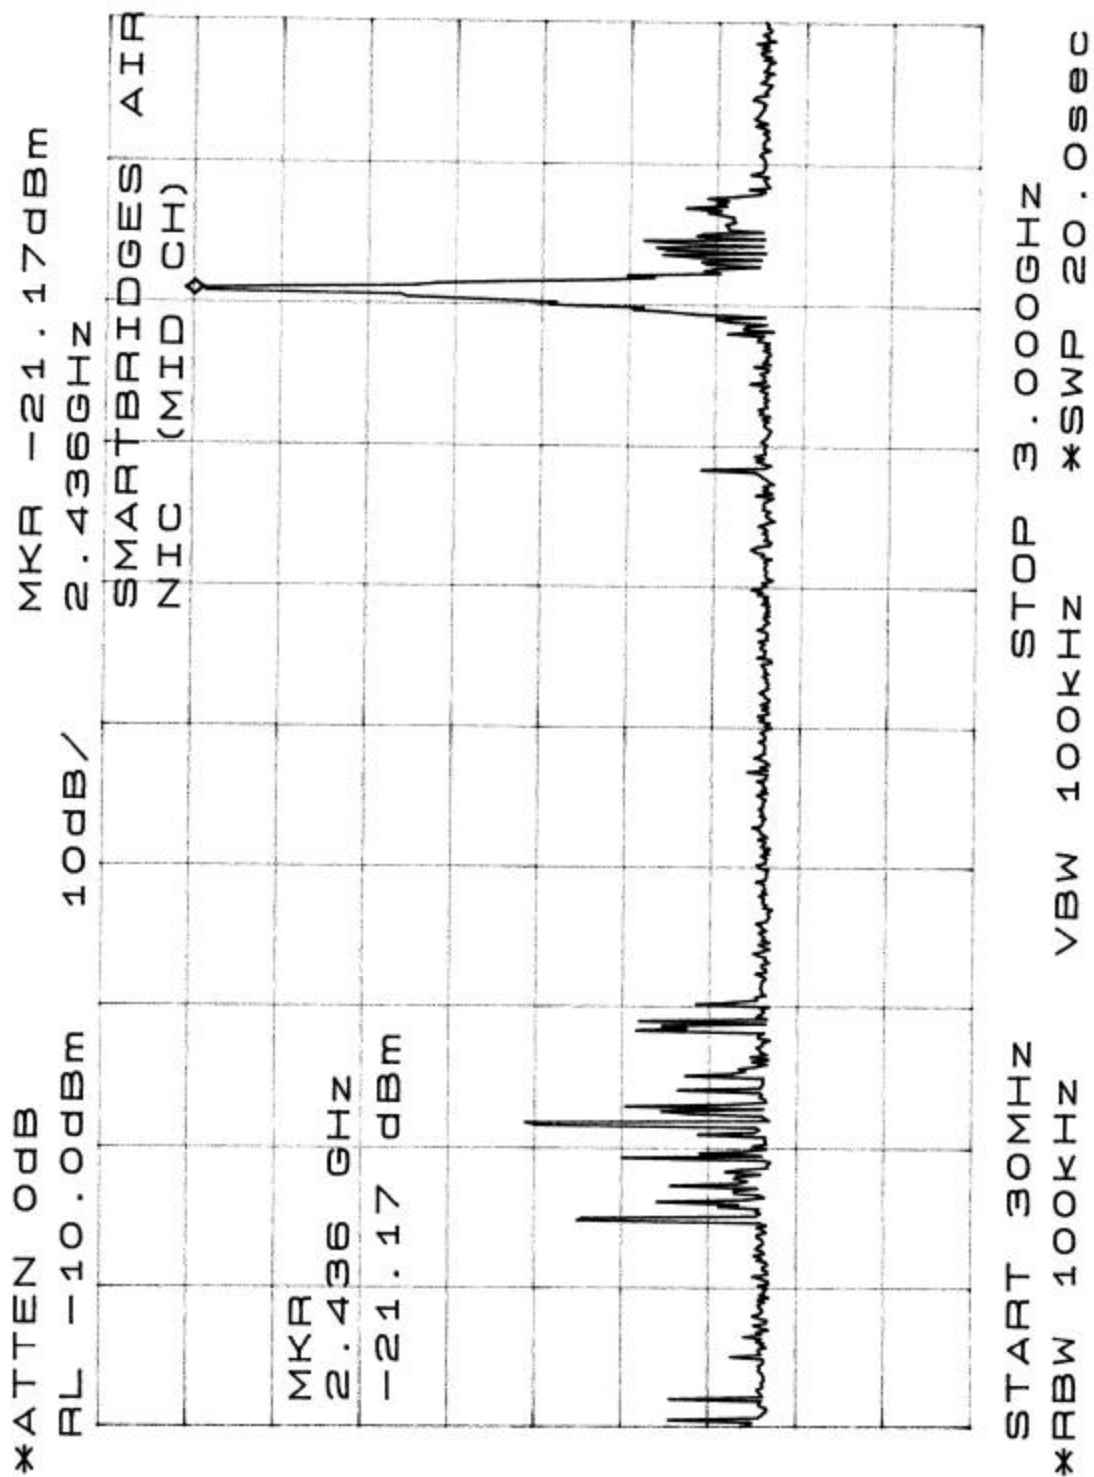

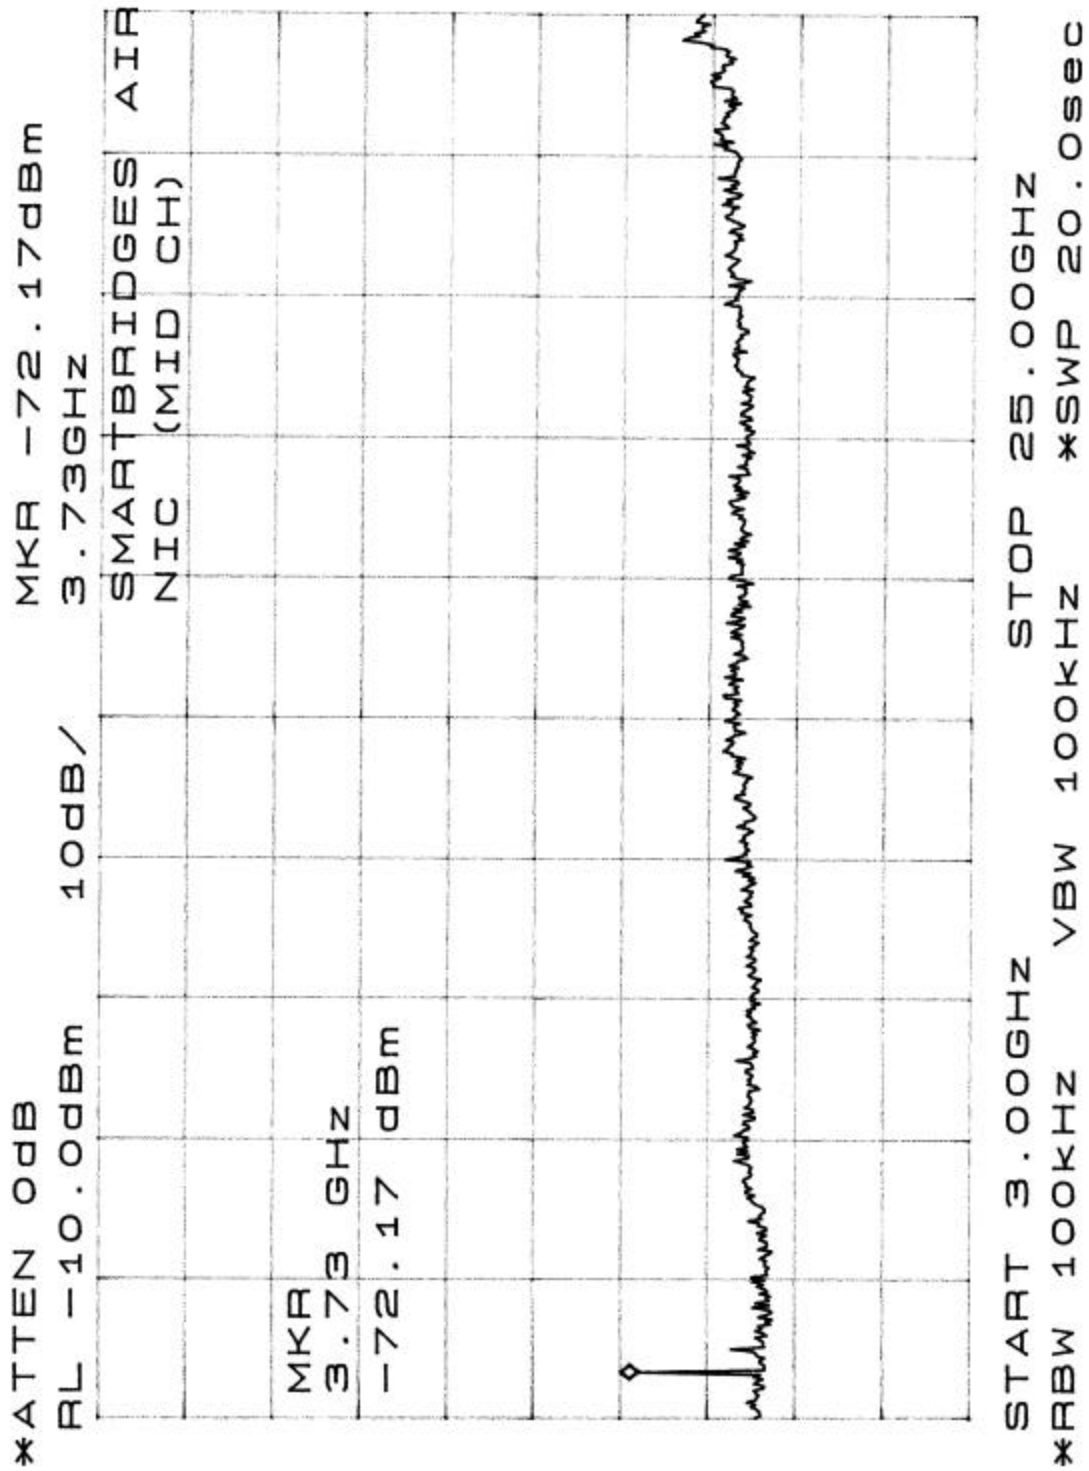

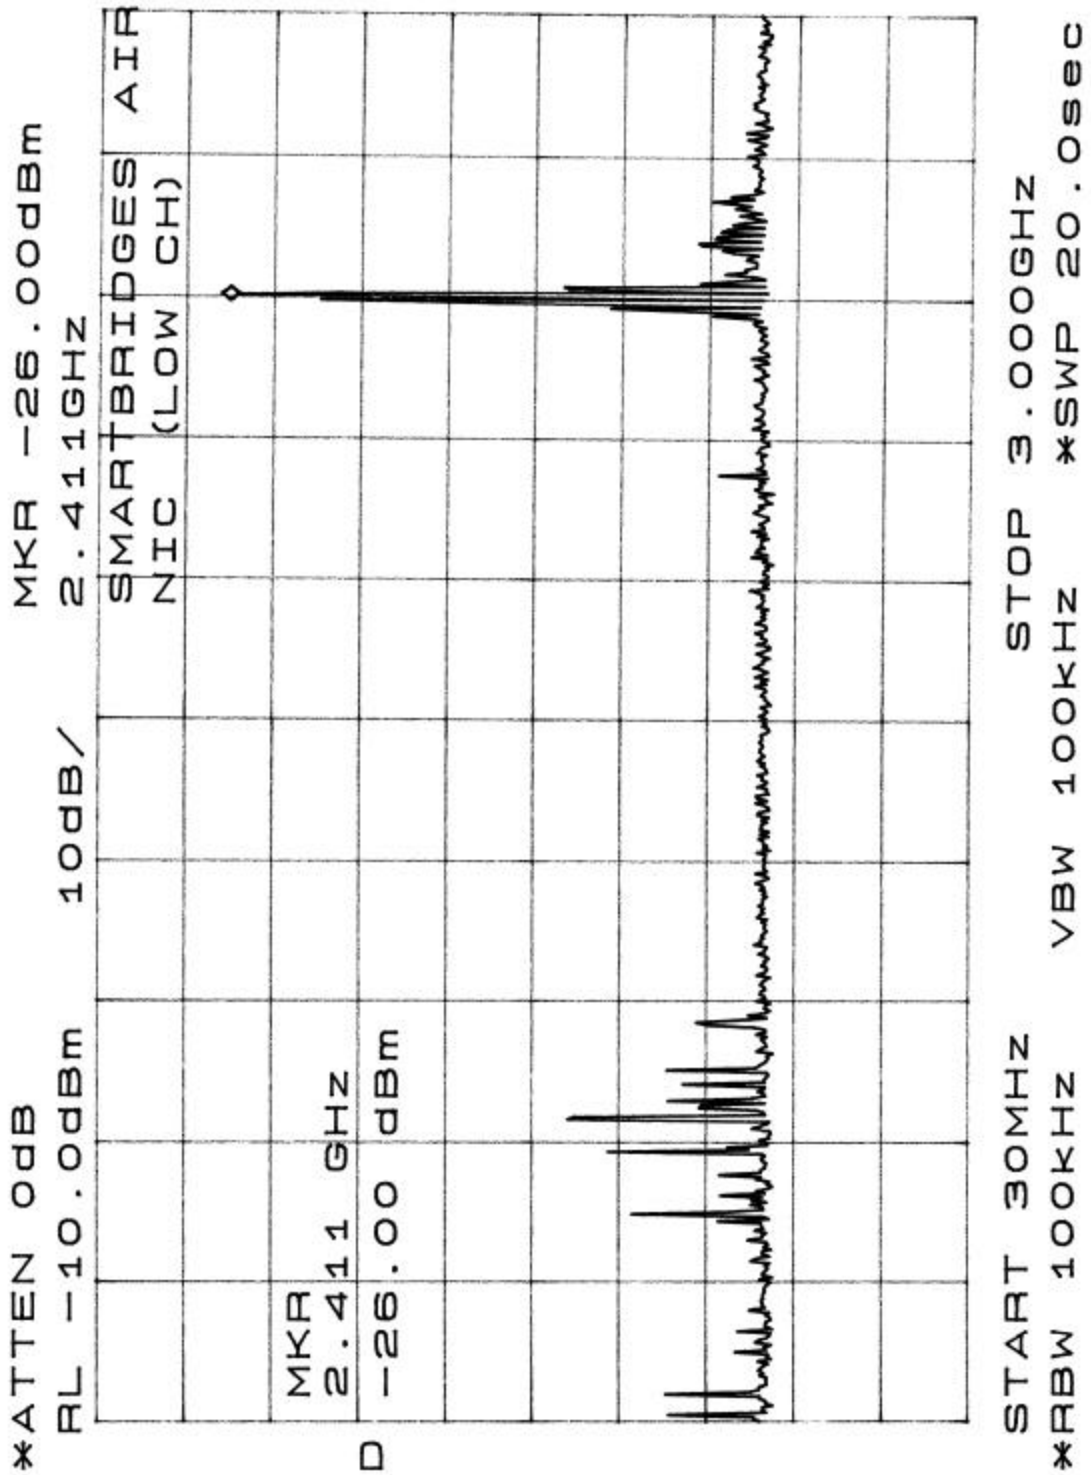

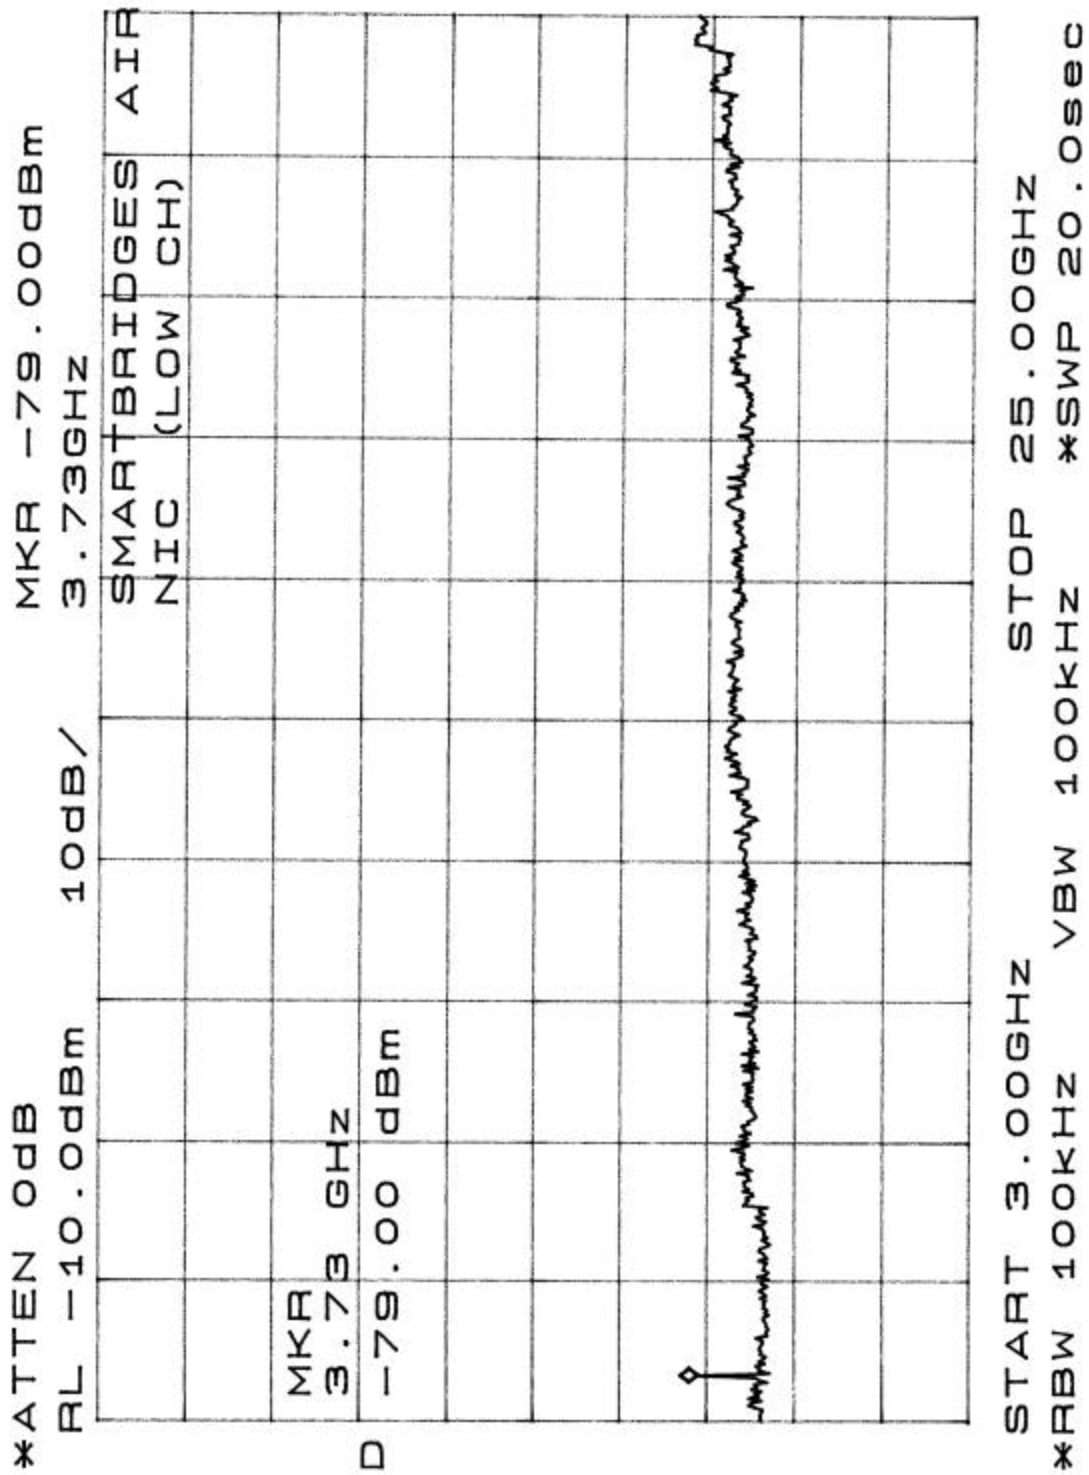

6 – POWER DENSITY

6.1 Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


6.2 Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.


6.3 Test Results

Please refer to the following plot(s).

Power Density	Page Reference	Test Result
High Channel	23	Passed
Middle Channel	24	Passed
Low Channel	25	Passed

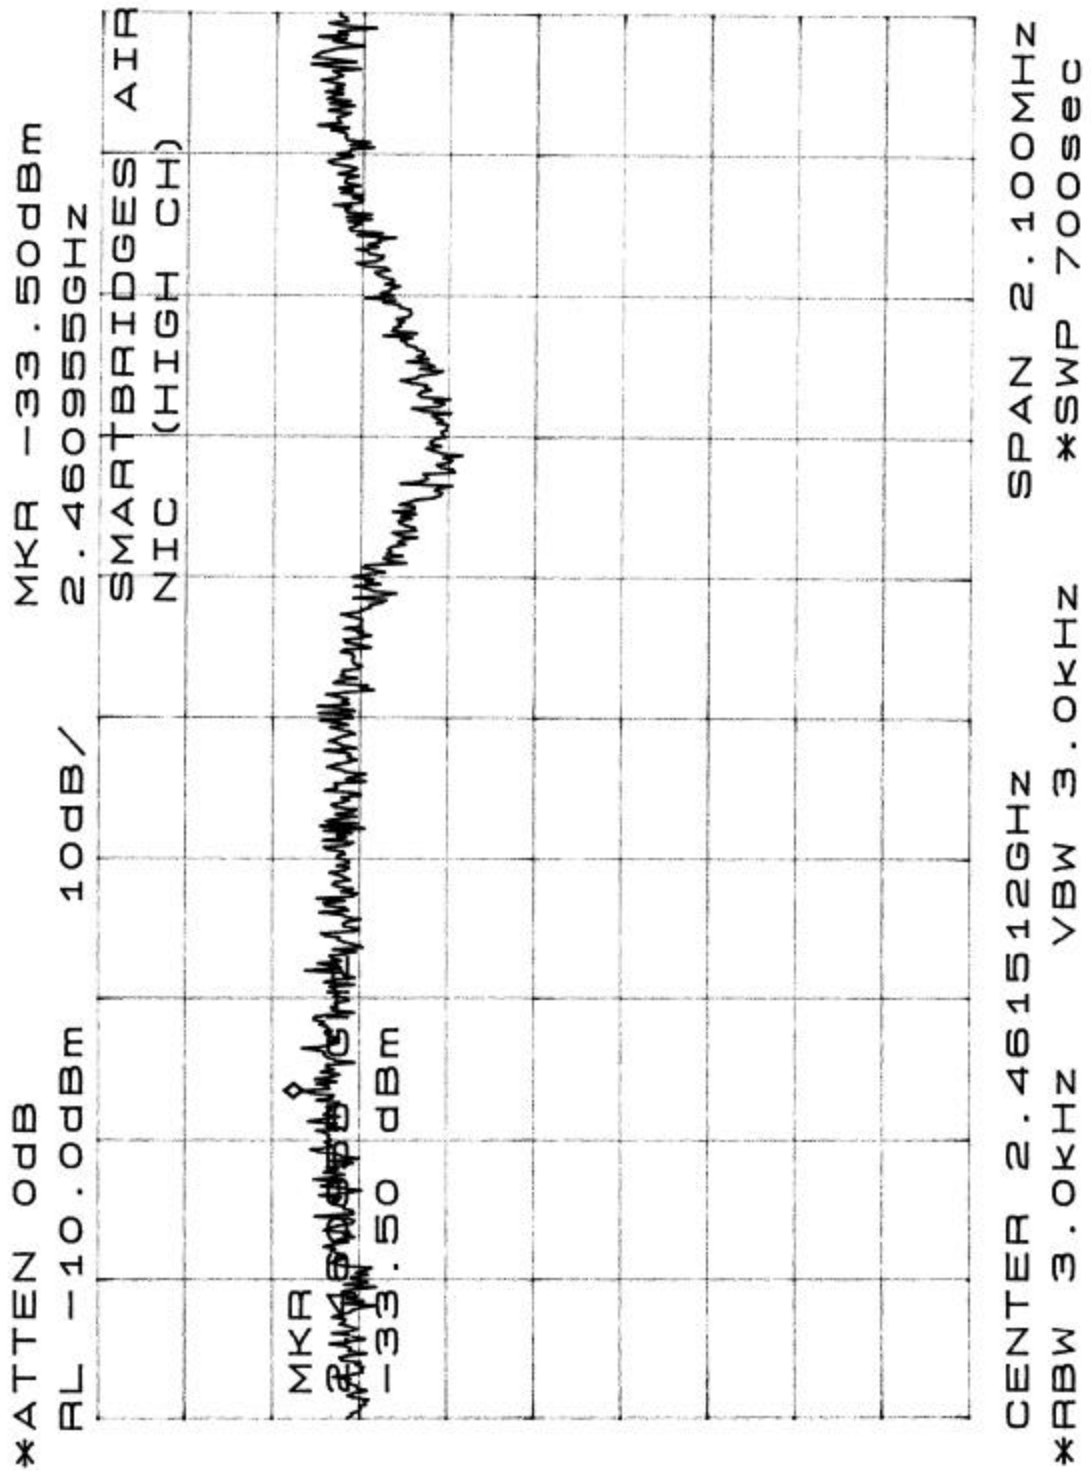

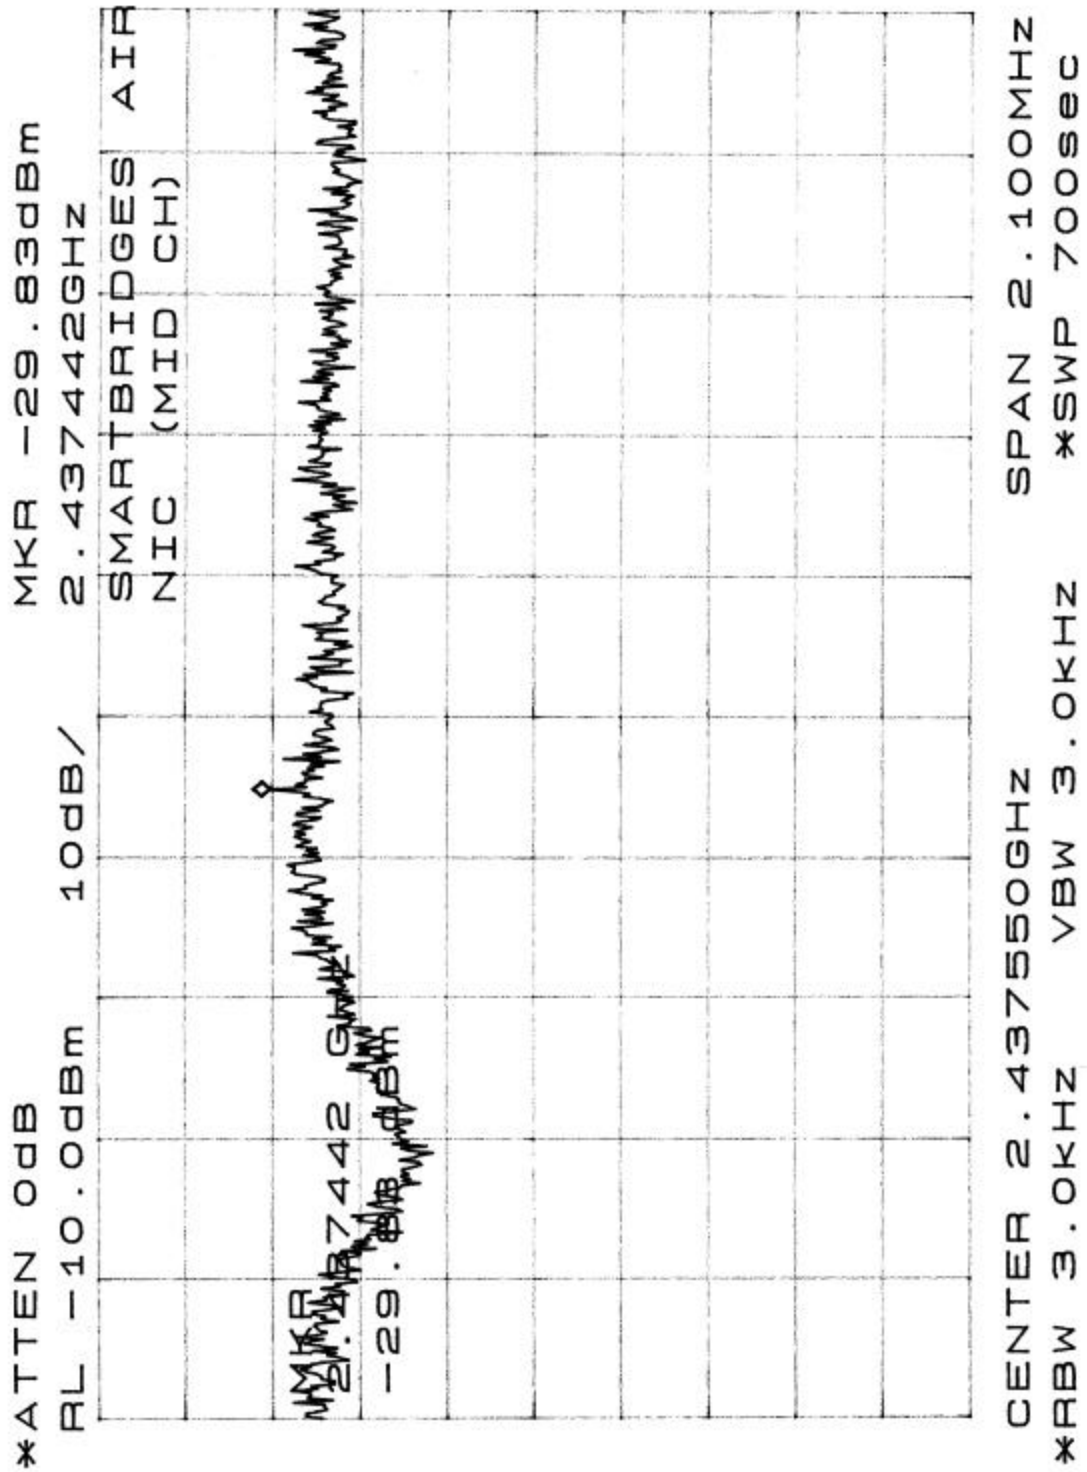

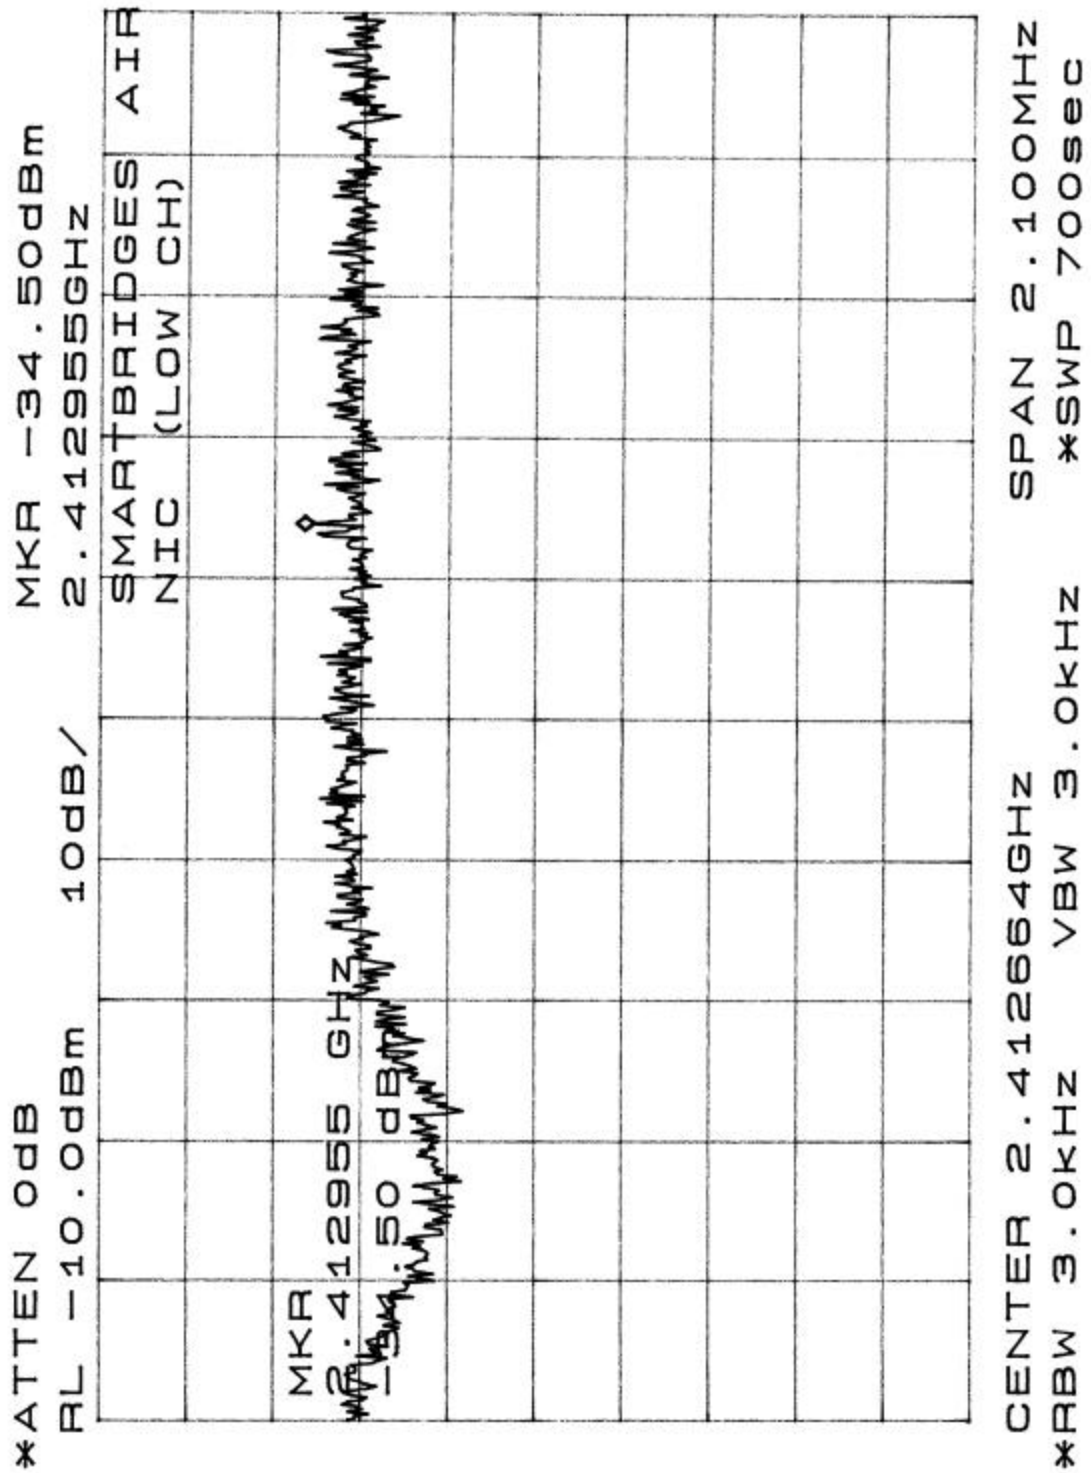

7 – 6 dB BANDWIDTH

7.1 Standard Applicable

According to §15.247(a)(2), for direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.


7.2 Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.


7.3 Measurement Data

The following are plots of Hopping Channel Bandwidth for low, middle and high channel.

6 dB Channel Bandwidth	Page Reference	Test Result
High Channel	27	Passed
Middle Channel	28	Passed
Low Channel	29	Passed

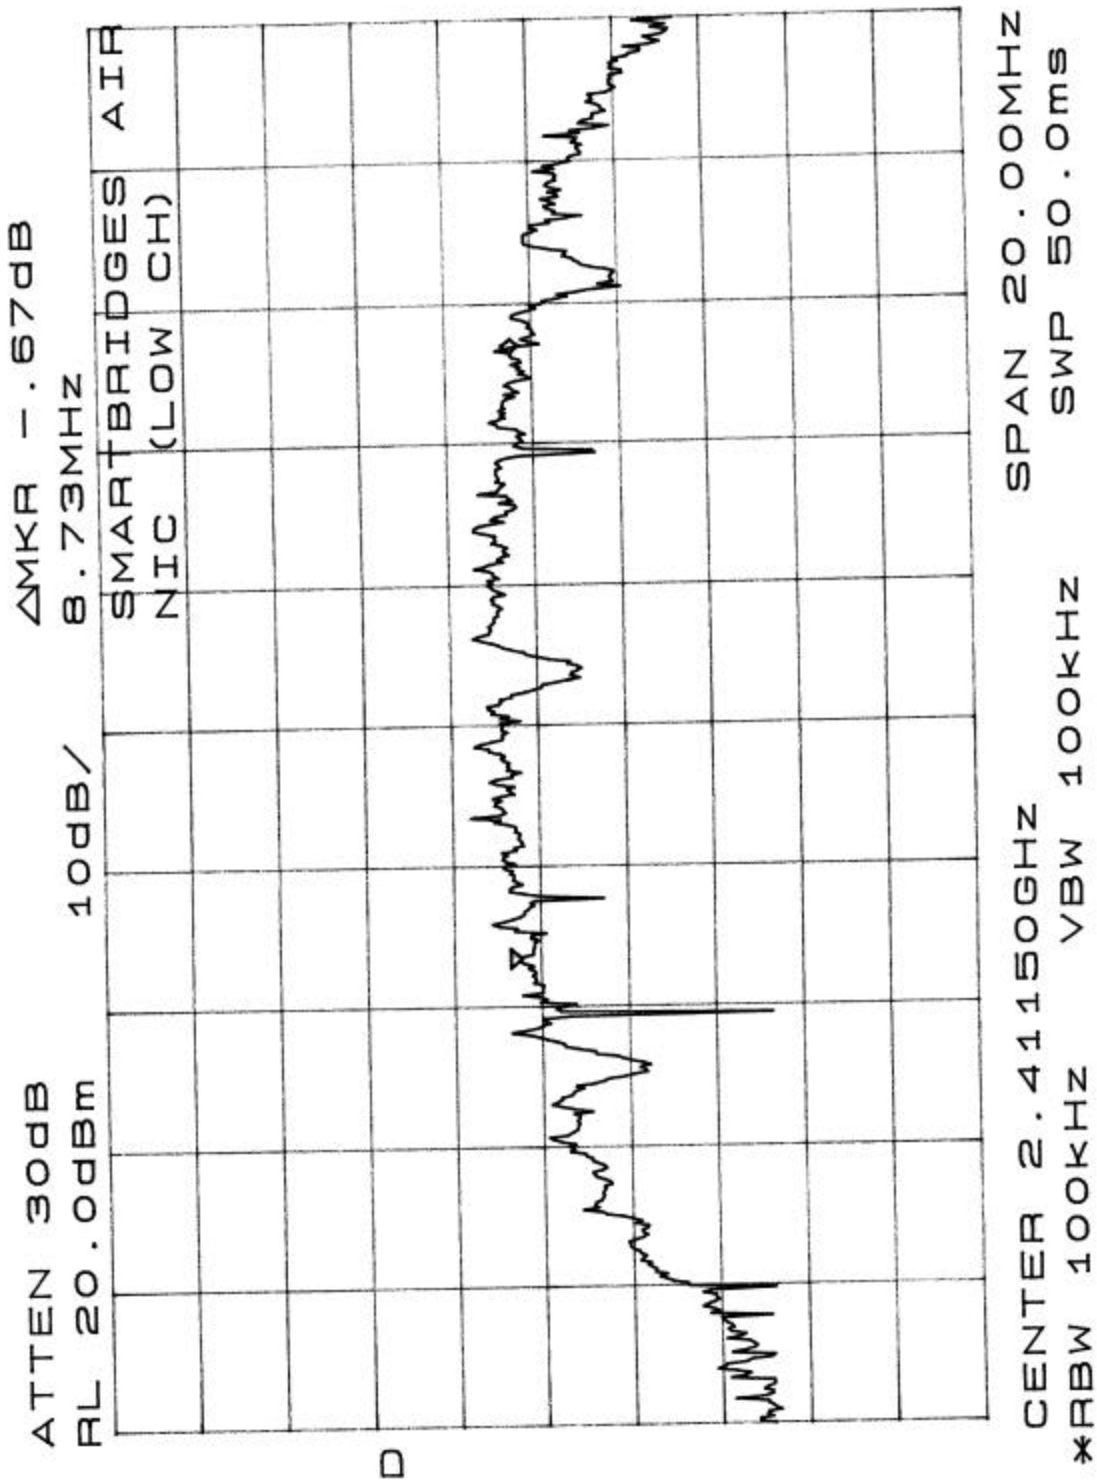

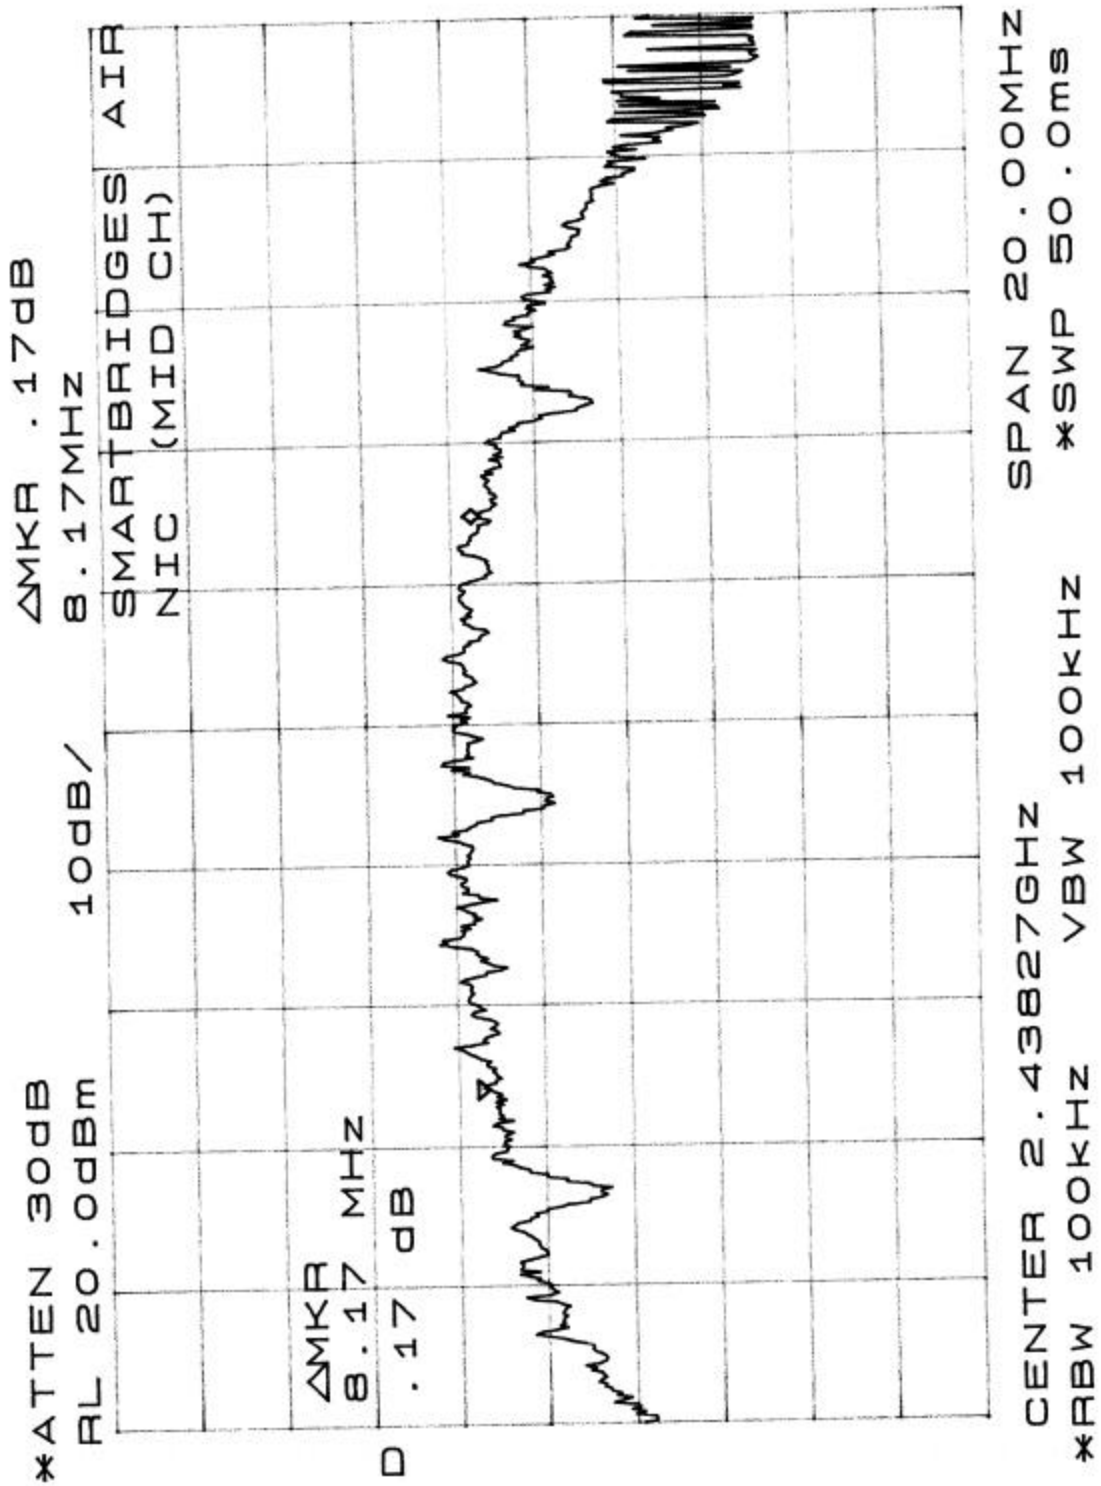

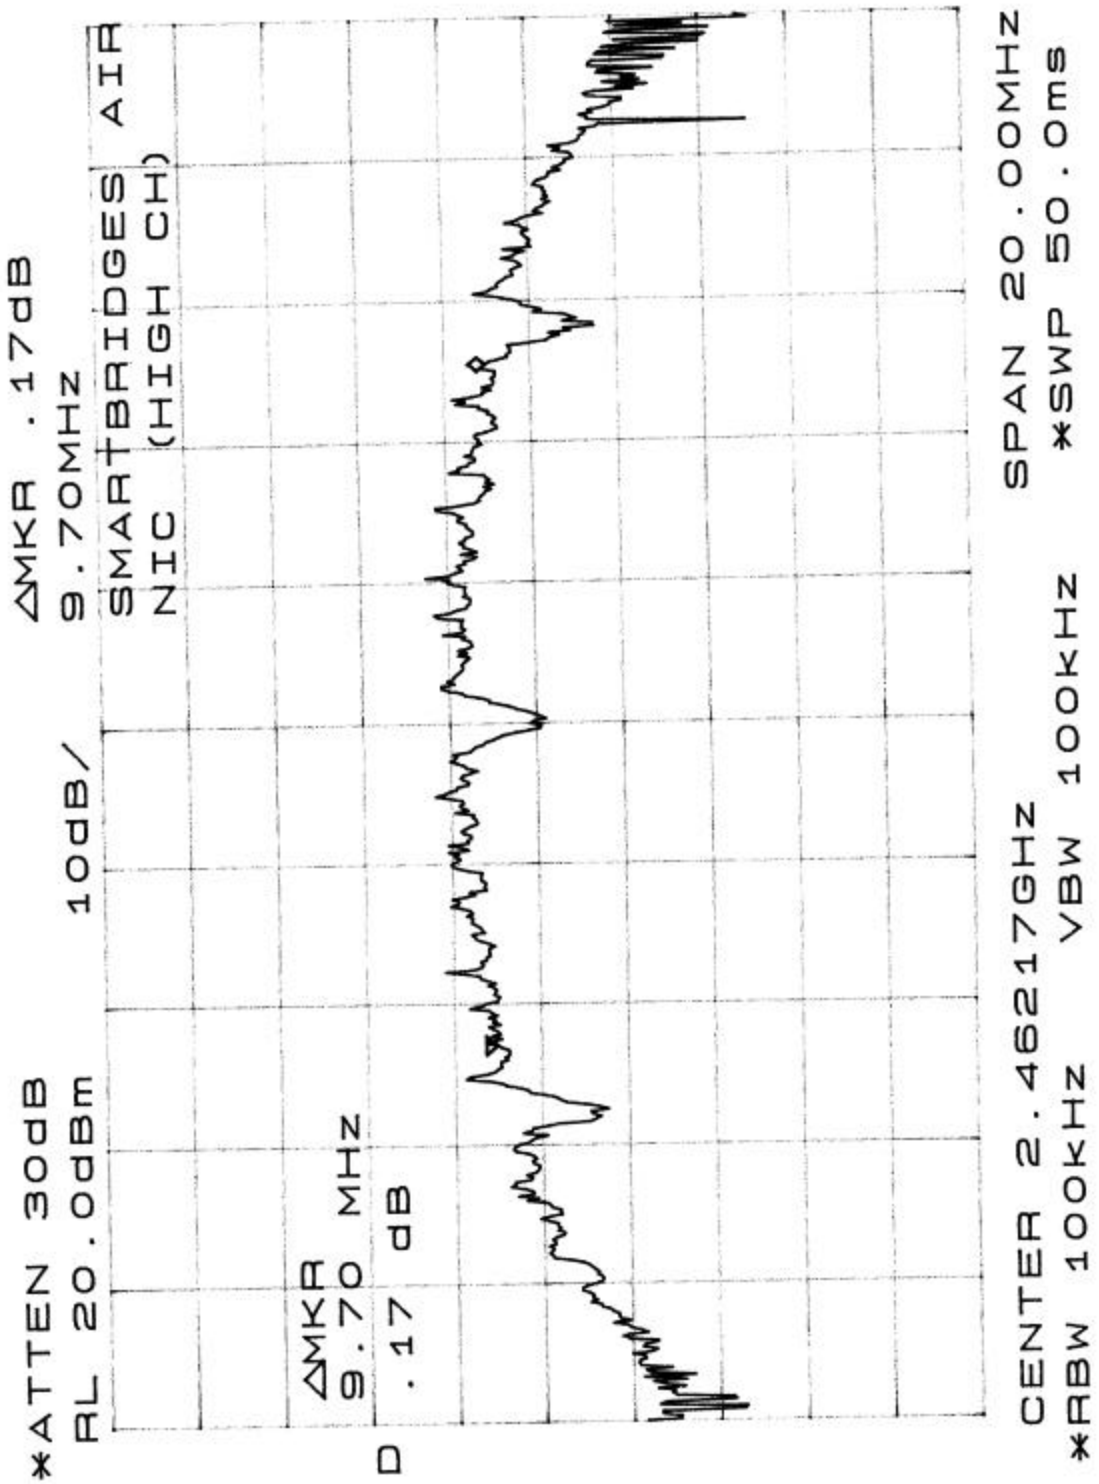

8-100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable


According to §15.247(c), if *any* 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.


8.2 Measurement Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 Test Results

100KHz dB Bandwidth Band Edge	Page Reference	Test Result
Low Channel	31	Passed
Middle Channel	32	Passed
High Channel	33	Passed

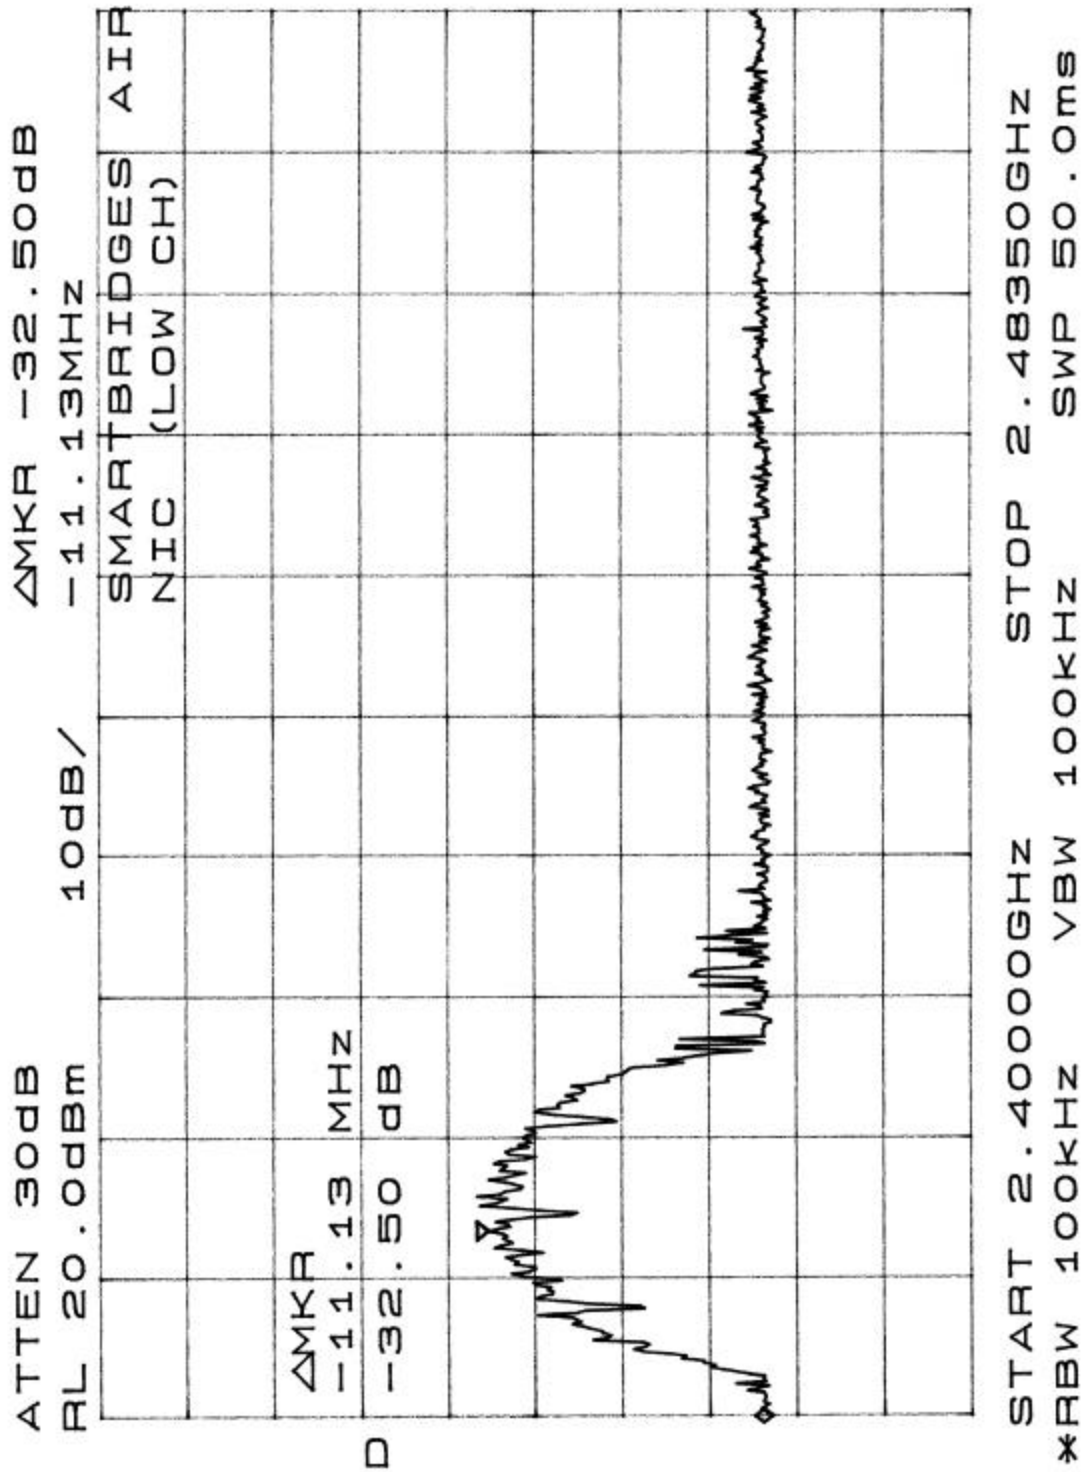

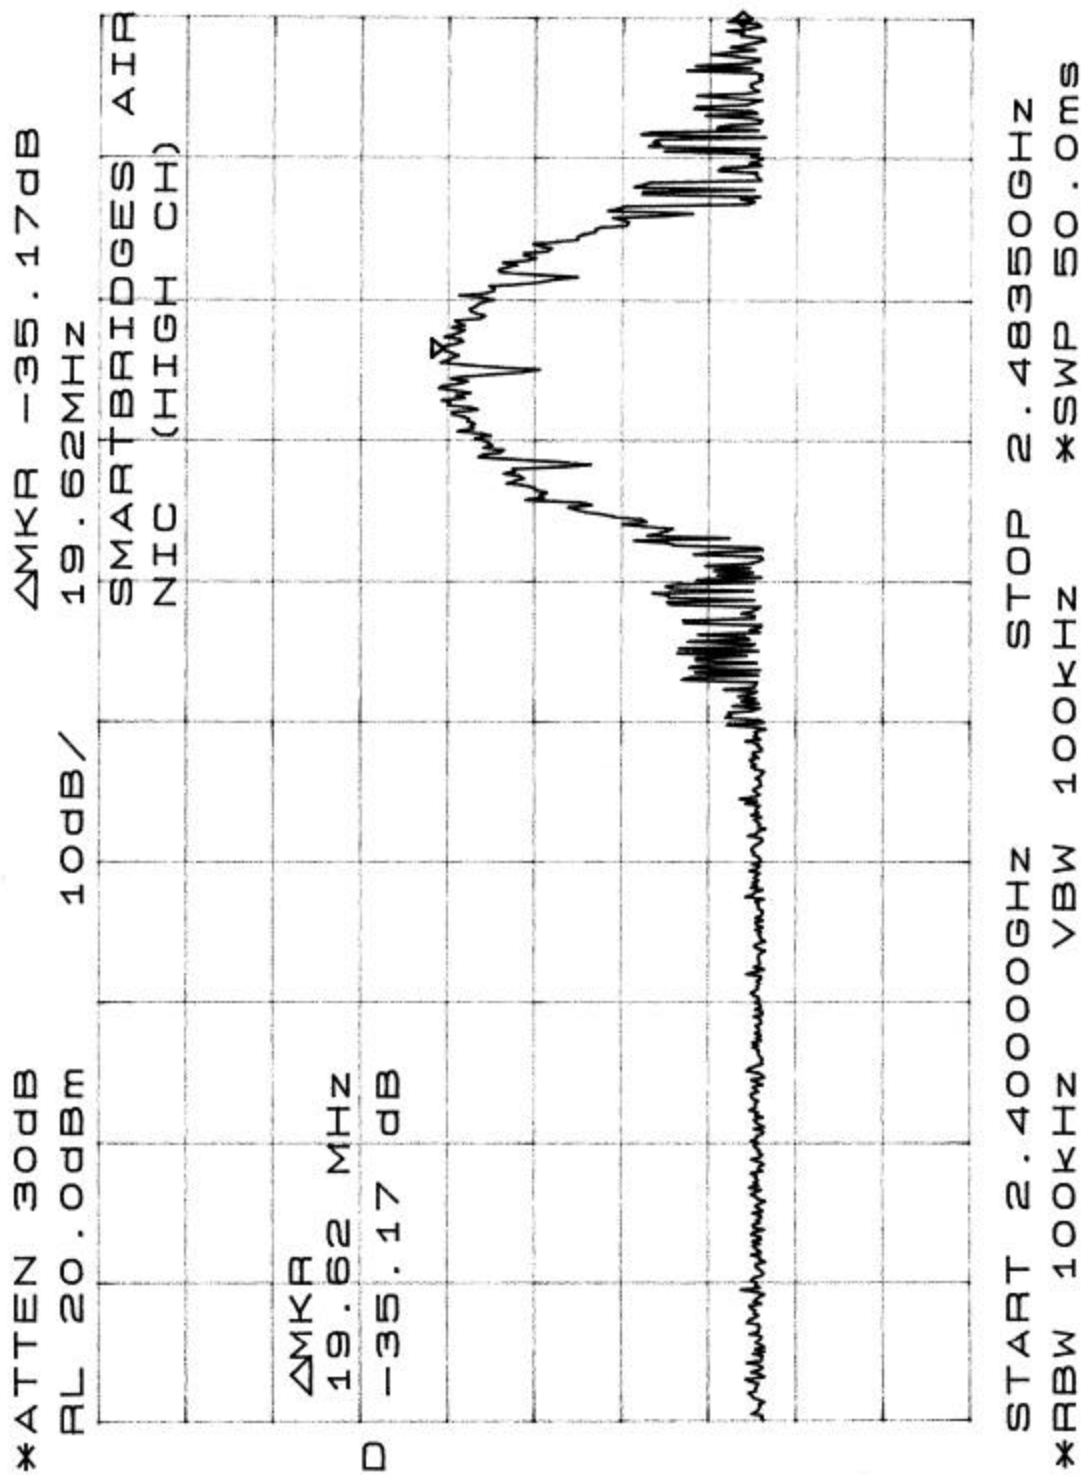

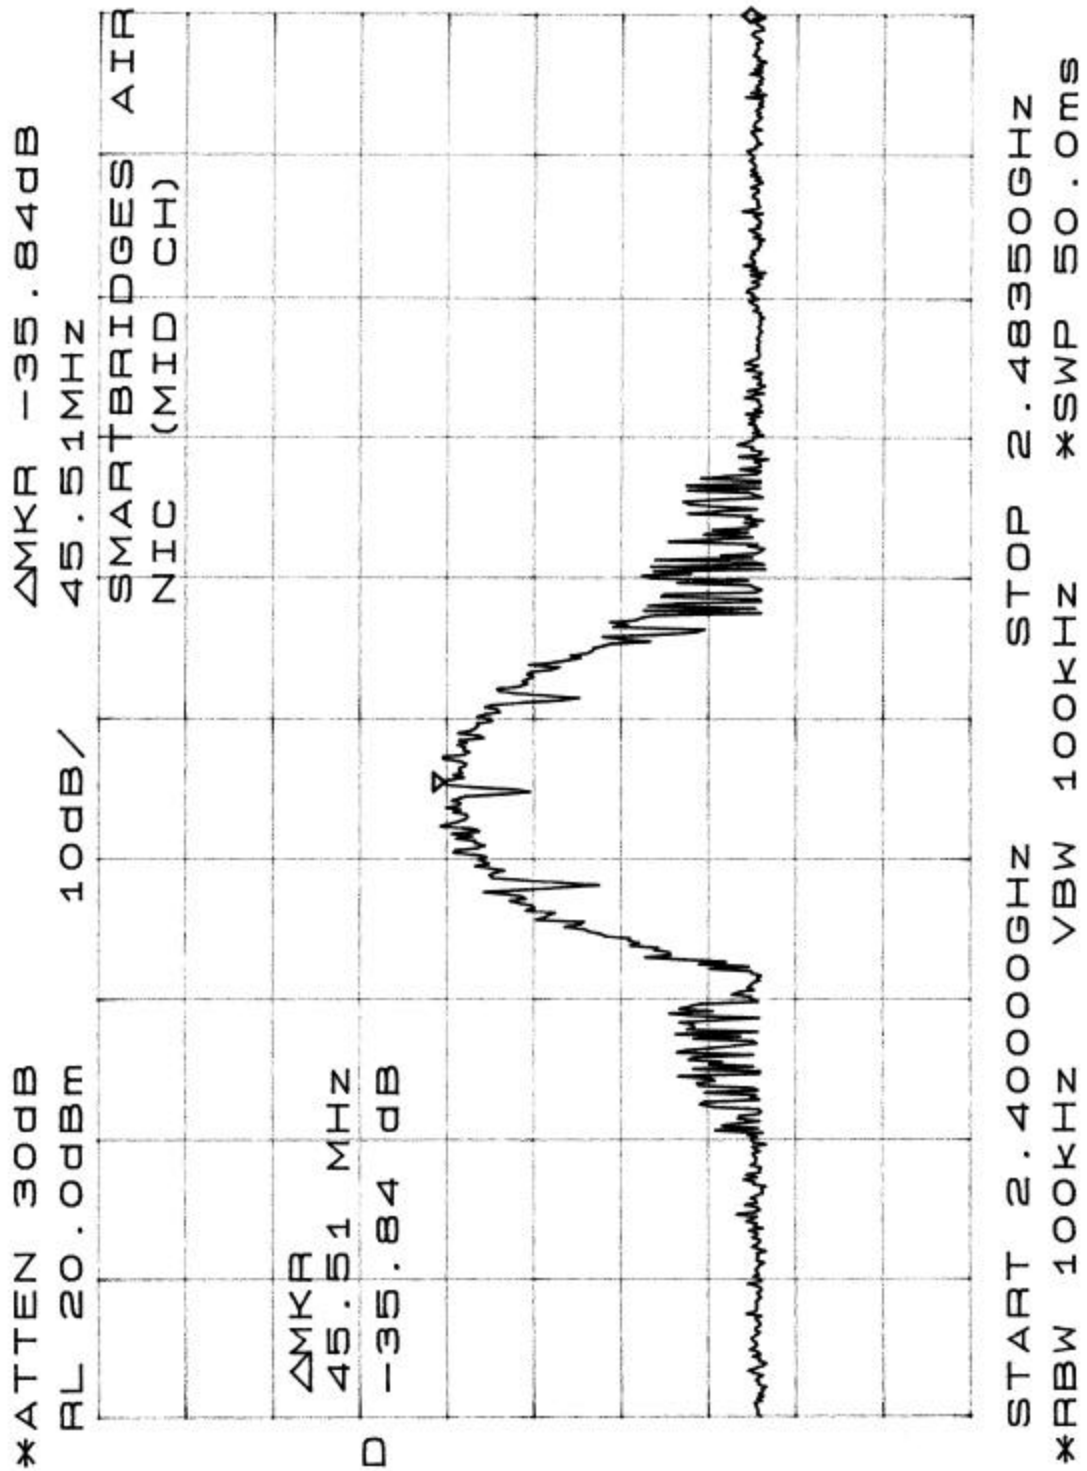

9 - ANTENNA REQUIREMENT

9.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Antenna Connected Construction

The directional gain of antenna used for transmitting is 2.2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

10 – RF EXPOSURE

According to 15.247(b)(4), RF exposure is calculated.

MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 12 (dBm)

Maximum peak output power at antenna input terminal: 15.84 (mW)

Antenna Gain (typical): 2.2 (dBi)

Maximum antenna gain: 1.66 (numeric)

Prediction distance: 3 (cm)

Predication frequency: 2400(MHz)

MPE limit for uncontrolled exposure at prediction frequency: 1.0(mW/cm²)

Power density at predication frequency: 0.23(mW/cm²)

Maximum allowable antenna gain: 8.5 (dBi)

Test Result

The predicted power density level at 3 cm is 0.23mW/cm². This is below the uncontrolled exposure limit of 1mW/cm² at 2400 MHz.

11 – SPURIOUS RADIATED EMISSION DATA

11.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BAACL is ± 4.0 dB.

11.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4 - 1992. The specification used was the FCC 15 Subpart C limits.

The EUT was connected with the host PC system. The host PC system was placed on the center of the back edge on the test table. The modem and the monitor were placed on the right side of the host PC system, and the printer was placed on the left side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The keyboard was placed directly in front of the monitor, flushed with the front of tabletop. The mouse was placed next to the keyboard, flushed with the back of keyboard.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 110 Vac/60Hz power source.

11.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency	30 MHz
Stop Frequency	25GHz
Sweep Speed.....	Auto
IF Bandwidth.....	1 MHz
Video Bandwidth.....	1 MHz
Quasi-Peak Adapter Bandwidth.....	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth.....	1MHz

11.4 Test Procedure

For the radiated emissions test, the Host PC system and all support equipment power cords were connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specific ation limits), and are distinguished with a "Qp" in the data table.

11.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

11.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.247, and had the worst margin of:

For Low Channel:

- 3.5 dBmV at 88.09 MHz in the Vertical polarization, 30 MHz to 25GHz, 3 meters

For Middle Channel:

-1.6 dBmV at 748.00 MHz in the Horizontal polarization, 30 MHz to 25GHz, 3 meters

For High Channel:

-1.1 dBmV at 748.00 MHz in the Horizontal polarization, 30 MHz to 25GHz, 3 meters

11.7.a. Final Test Data, Low Channel, 30MHz to 25GHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dBmV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBmV/m	Cable dB	Amp. dB	Corr. Ampl. dBmV/m	Limit dBmV/m	Margin dB
88.09	48.8	Peak	180	1.0	V	9.7	2.2	20.7	40.00	43.5	-3.5
324.00	46.0	Peak	270	1.7	H	15.5	2.8	22.1	42.20	46.0	-3.8
120.00	44.2	Peak	90	1.0	V	12.1	2.2	19.5	39.00	43.5	-4.5
240.00	46.5	Peak	180	1.8	H	12.6	2.3	22.5	38.90	46.0	-7.1
264.02	43.2	Peak	225	1.6	H	13.3	4.9	22.8	38.60	46.0	-7.4
216.00	40.8	Peak	90	1.0	H	12.5	4.7	22.4	35.60	43.5	-7.9
300.00	39.2	Peak	270	1.7	H	15.1	4.6	22.9	36.00	46.0	-10.0
4824.26	34.4	Ave	180	1.0	H	32.5	4.9	30.0	41.80	54.0	-12.2
4824.26	34.3	Ave	90	1.5	V	32.5	4.9	30.0	41.70	54.0	-12.3
228.00	35.7	Peak	135	1.0	H	12.1	3.9	22.7	29.00	46.0	-17.0
2413.50	126.6		0	1.0	V	28.1	3.4	30.0	128.13		
2413.50	125.5		180	1.4	H	28.1	3.4	30.0	127.00		

11.7.b Final Test Data, Middle Channel, 30MHz to 25GHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dBmV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBmV/m	Cable dB	Amp. dB	Corr. Ampl. dBmV/m	Limit dBmV/m	Margin dB
748.00	41.2	Peak	180	1.0	H	22.4	2.9	22.1	44.4	46.0	-1.6
120.00	44.7	Peak	270	1.0	V	12.1	2.2	19.5	39.5	43.5	-4.0
352.03	42.7	Peak	180	1.5	H	15.5	4.3	21.8	40.7	46.0	-5.3
240.00	46.3	Peak	270	1.5	H	12.6	2.3	22.5	38.7	46.0	-7.3
4877.79	39.2	Ave	270	1.2	H	32.5	4.9	30.0	46.6	54.0	-7.4
264.02	41.8	Peak	225	1.0	H	13.3	4.9	22.8	37.2	46.0	-8.8
4877.79	37.5	Peak	45	1.0	V	32.5	4.9	30.0	44.9	54.0	-9.1
144.00	39.8	Ave	270	1.0	V	13.2	1.0	21.2	32.8	43.5	-10.7
132.00	37.5	Peak	135	1.5	V	12.6	2.0	21.5	30.6	43.5	-12.9
2435.35	126.1		180	1.0	V	28.1	3.4	30.0	127.6		
2435.35	125.9		315	1.2	H	28.1	3.4	30.0	127.4		

11.7.c Final Test Data, High Channel, 30MHz to 25GHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB μ V/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dB μ V/m	Cable dB	Amp. dB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
748.00	41.7	Peak	225	1.2	H	22.4	2.9	22.1	44.9	46.0	-1.1
4925.95	45.0	Ave	0	1.0	H	32.5	4.9	30.0	52.4	54.0	-1.6
4925.95	43.7	Ave	180	1.3	V	32.5	4.9	30.0	51.1	54.0	-2.9
88.08	48.8	Peak	45	1.0	V	9.7	2.2	20.7	40.0	43.5	-3.5
120.00	45.0	Peak	270	1.0	V	12.1	2.2	19.5	39.8	43.5	-3.7
132.07	43.5	Peak	360	1.8	V	12.6	2.0	21.5	36.6	43.5	-6.9
264.02	43.3	Peak	90	1.0	H	13.3	4.9	22.8	38.7	46.0	-7.3
144.02	41.7	Peak	315	1.5	V	13.2	1.0	21.2	34.7	43.5	-8.8
192.02	37.0	Peak	0	1.0	V	14.4	2.7	22.5	31.6	43.5	-11.9
2463.46	126.4		225	1.0	V	28.1	3.4	30.0	127.9		
2463.46	125.9		0	1.2	H	28.1	3.4	30.0	127.4		

12 - CONDUCTED EMISSIONS TEST DATA

12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BAEL is ± 2.4 dB.

12.2 EUT Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4 - 1992 measurement procedure. The specification used was FCC 15 Subpart C limits.

The EUT was connected with the host PC system. The host PC system was placed on the center of the back edge on the test table. The modem and the monitor were placed on the right side of the host PC system, and the printer was placed on the left side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The keyboard was placed directly in front of the monitor, flushed with the front of tabletop. The mouse was placed next to the keyboard, flushed with the back of keyboard.

The spacing between the peripherals was 10 centimeters.

Input / Output cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 110 Vac/60Hz power source.

12.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency	450 kHz
Stop Frequency	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	100 kHz
Video Bandwidth	100 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode	Normal

12.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

12.5 Summary of Test Results

According to the data in section 12.6, the EUT complied with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:

--2.8 dB mV at 0.700 MHz in the Line mode, 450KHz – 30 MHz.


12.6 Conducted Emissions Test Data

12.6.1 Test Data, 0.45 - 30 MHz.

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	Qp/Ave/Peak	Line/Neutral	dB μ V	dB
0.700	45.2	Peak	Line	48	-2.8
0.700	45.0	Peak	Neutral	48	-3.0
19.260	39.0	Peak	Line	48	-9.0
18.180	37.3	Peak	Neutral	48	-10.7
11.000	36.8	Peak	Neutral	48	-11.2
4.440	35.8	Peak	Line	48	-12.2

12.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented hereinafter as reference.

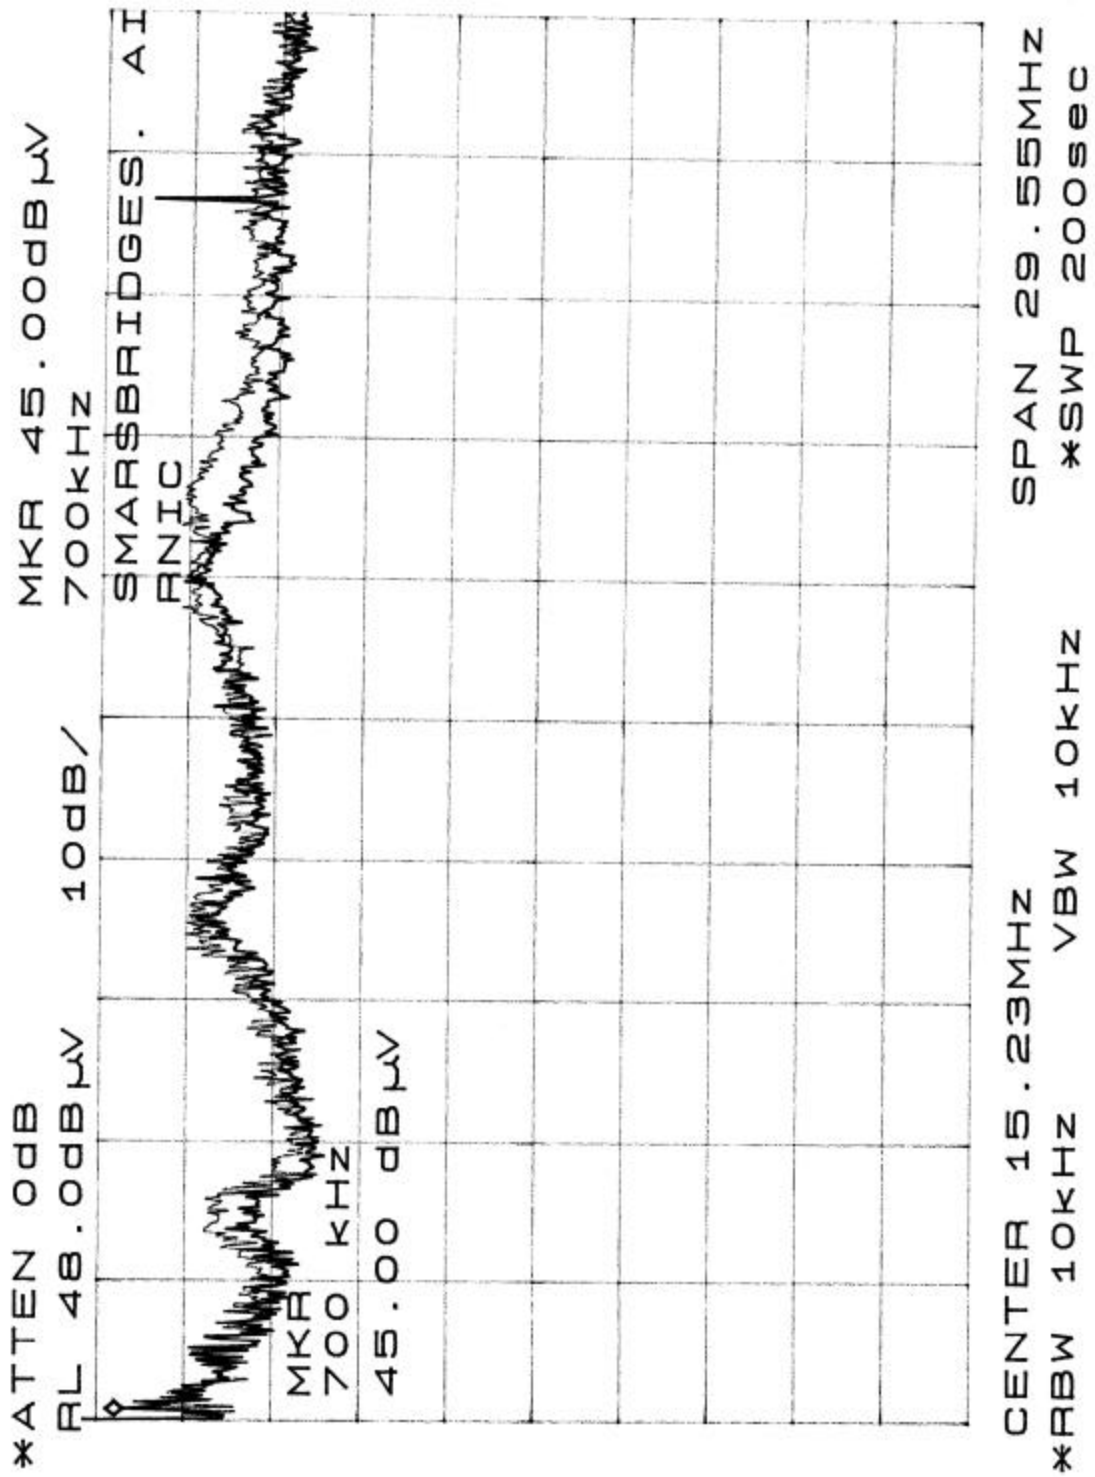

13 - PROCESSING GAIN

Please see attached information