

FCC Radio TEST Report

FCC ID: PWGCLIENT

This report concerns (check one) : Original Grant Class I Change

Issued Date : Jun. 11, 2007

Project No. : 0704139

Equipment : airClient TOTAL 241

Model Name : SB3415;SB3415-01,SB3415-02,SB3415-03

Applicant : smartBridges Pte Ltd

Address : 745 Toa Payoh Lorong 5, #04-01, Singapore
319455

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Test:


May. 10, 2007 ~ May. 21, 2007

Testing Engineer :




(Jeff Yang)

Technical Manager :



(Steven Lu)

Authorized Signatory :



(Andy Chiu)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd.,
Shijr City, Taipei, Taiwan
TEL : (02) 2646-5426 FAX : (02) 2646-6815



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	10
3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 MEASUREMENT INSTRUMENTS LIST	18
4.2.3 TEST PROCEDURE	19
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	20
4.2.7 TEST RESULTS (BETWEEN 30 – 1000 MHz)	21
4.2.8 TEST RESULTS (ABOVE 1000 MHz)	25
4.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	73
5 . BANDWIDTH TEST	89
5.1 APPLIED PROCEDURES / LIMIT	89
5.1.1 MEASUREMENT INSTRUMENTS LIST	89
5.1.2 TEST PROCEDURE	89
5.1.3 DEVIATION FROM STANDARD	89
5.1.4 TEST SETUP	89
5.1.5 EUT OPERATION CONDITIONS	89
5.1.6 TEST RESULTS	90
6 . PEAK OUTPUT POWER TEST	98

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	98
6.1.1 MEASUREMENT INSTRUMENTS LIST	98
6.1.2 TEST PROCEDURE	98
6.1.3 DEVIATION FROM STANDARD	98
6.1.4 TEST SETUP	98
6.1.5 EUT OPERATION CONDITIONS	98
6.1.6 TEST RESULTS	99
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	101
7.1 APPLIED PROCEDURES / LIMIT	101
7.1.1 MEASUREMENT INSTRUMENTS LIST	101
7.1.2 TEST PROCEDURE	101
7.1.3 DEVIATION FROM STANDARD	101
7.1.4 TEST SETUP	101
7.1.5 EUT OPERATION CONDITIONS	102
7.1.6 TEST RESULTS	103
8 . POWER SPECTRAL DENSITY TEST	111
8.1 APPLIED PROCEDURES / LIMIT	111
8.1.1 MEASUREMENT INSTRUMENTS LIST	111
8.1.2 TEST PROCEDURE	111
8.1.3 DEVIATION FROM STANDARD	111
8.1.4 TEST SETUP	111
8.1.5 EUT OPERATION CONDITIONS	111
8.1.6 TEST RESULTS	112
9 . RF EXPOSURE TEST	120
9.1 APPLIED PROCEDURESC /LIMIT	120
9.1.1 MEASUREMENT INSTRUMENTS LIST	120
9.1.2 MPE CALCULATION METHOD	120
9.1.3 DEVIATION FROM STANDARD	121
9.1.4 TEST SETUP	121
9.1.5 EUT OPERATION CONDITIONS	121
9.1.6 TEST RESULTS	122
10. EUT TEST PHOTO	124

1. CERTIFICATION

Equipment : airClient TOTAL 241
Trade Name : smartBridges
Model No. : SB3415; SB3415-01;SB3415-02;SB3415-03
Applicant : smartBridges Pte Ltd (Certificate and Report Holder)
Data of Test : May. 10, 2007 ~ May. 21, 2007
Test Item : ENGINEERING SAMPLE
Standards : FCC Part15, Subpart C(15.247)/ ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-0704139) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and CNLA according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (c)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01/OS02** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

In that section on the test facility that Neutron's test firm number is 95335

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	airClient TOTAL 241																		
Trade Name	smartBridges																		
Model No.	SB3415; SB3415-01;SB3415-02;SB3415-03																		
OEM Brand/Model No.	N/A																		
Model Difference	Difference by firmware only for BW of 512kbps,1Mbps and 3Mbps respectively.SB3415-01(512 kbps) SB3415-02(1Mbps), SB3415-03(3Mbps),																		
Product Description	<p>The EUT is a airClient TOTAL 241.</p> <table border="1"> <tr> <td>Operation Frequency:</td> <td>2412~2462 MHz</td> </tr> <tr> <td>Product Class:</td> <td>Class 1</td> </tr> <tr> <td>Receiver Class:</td> <td>Class 3</td> </tr> <tr> <td>Modulation Type:</td> <td>DSSS & OFDM</td> </tr> <tr> <td>Bit Rate of Transmitter</td> <td>802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps</td> </tr> <tr> <td>Number Of Channel</td> <td>11 CH, Please see Note 2. (please see page 9)</td> </tr> <tr> <td>Antenna Designation:</td> <td>Please see Note 3.</td> </tr> <tr> <td>Antenna Gain(Peak)</td> <td>(please see page 9)</td> </tr> <tr> <td>Output Power:</td> <td>EXT antenna 11B:22.31dBm,11G:25.30dBm INT antenna 11B:15.23dBm,11G:20.22dBm</td> </tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical</p>	Operation Frequency:	2412~2462 MHz	Product Class:	Class 1	Receiver Class:	Class 3	Modulation Type:	DSSS & OFDM	Bit Rate of Transmitter	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps	Number Of Channel	11 CH, Please see Note 2. (please see page 9)	Antenna Designation:	Please see Note 3.	Antenna Gain(Peak)	(please see page 9)	Output Power:	EXT antenna 11B:22.31dBm,11G:25.30dBm INT antenna 11B:15.23dBm,11G:20.22dBm
Operation Frequency:	2412~2462 MHz																		
Product Class:	Class 1																		
Receiver Class:	Class 3																		
Modulation Type:	DSSS & OFDM																		
Bit Rate of Transmitter	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps																		
Number Of Channel	11 CH, Please see Note 2. (please see page 9)																		
Antenna Designation:	Please see Note 3.																		
Antenna Gain(Peak)	(please see page 9)																		
Output Power:	EXT antenna 11B:22.31dBm,11G:25.30dBm INT antenna 11B:15.23dBm,11G:20.22dBm																		
Channel List	Please refer to the Note 2. (please see page 9)																		
Power Source	AC Mains. From POE																		
Power Rating	AC I/P 100-250V 50~60Hz DC O/P 48V 0.4 A																		
Connecting I/O Port(s)	Please refer to the User's Manual																		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Long cheng	F1B-003501-52	Dipole Antenna	R-SMA	1.52
2	-	-	Patch Antenna	NA	15

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	11 Mbps	6	1/2
Maximum Peak Conducted Output Power	11b/BPSK	1 Mbps	1/6/11	1/2
Power Spectral Density	11g/BPSK	6 Mbps	1/6/11	1/2
6dB Spectrum Bandwidth				
Radiated Emissions 9kHz~1GHz	11g/BPSK	6 Mbps	6	1/2
Radiated Emissions 1GHz~10 th Harmonic	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2
Band Edge Emissions	11b/BPSK	1 Mbps	1/6/11	1/2
	11g/BPSK	6 Mbps	1/6/11	1/2

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
The measurements are performed different antenna- External & Internal antenna
- (2) The worsts case is SB3415-03 (firmware only for BW 3Mbps)


3.3 Table of Parameters of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of External & Internal antenna

Test Software Version	ART(EXT antenna)		
Frequency (MHz)	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b DSSS	18	18	18
IEEE 802.11g OFDM	16	16	15

Test Software Version	ART(INT antenna)		
Frequency (MHz)	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b DSSS	9	11	11
IEEE 802.11g OFDM	5	10	8

3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

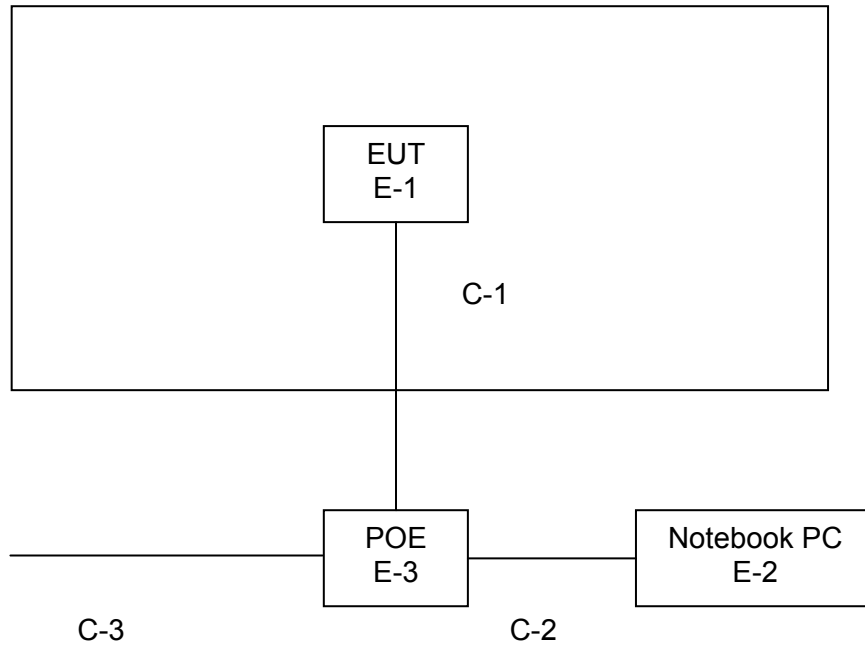

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	airClient TOTAL 241	smartBridges	SB3415; SB3415-01; SB3415-02; SB3415-03;	PWGCLIENT	N/A	EUT
E-2	Notebook PC	DELL	D600	DOC	7T390 A03	
E-3	POE	smart Bridges	JPOE130C 4800FK01	DOC	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10M	RJ-45
C-2	NO	NO	1M	RJ-45
C-3	NO	NO	1.8M	AC POWER LINE

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	Rolf Heine	NNB-2/16Z	98053	Dec. 18, 2007
2	4L-V-LISN	Rolf Heine	NNB-4/63TL	02/10040	Mar. 05, 2008
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Nov. 28, 2007
4	50Ω Terminator	N/A	N/A	N/A	Apr.10, 2008
5	Test Cable	N/A	C01	N/A	Nov. 28, 2007
6	EMI Test Receiver	R&S	ESCI	100082	Jan. 31, 2008

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

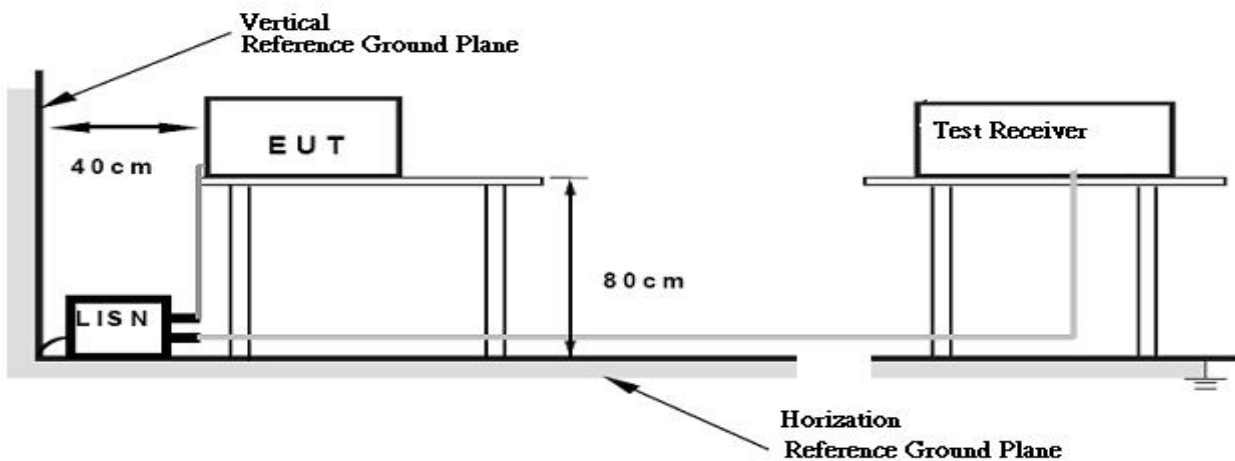

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


4.1.7 TEST RESULTS

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	57 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Normal Link 11B mode CH 06		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.20	Line	43.25	*	63.51	53.51	-20.26	(QP)
0.66	Line	40.27	*	56.00	46.00	-15.73	(QP)
1.45	Line	43.22	*	56.00	46.00	-12.78	(QP)
3.69	Line	45.95	*	56.00	46.00	-10.05	(QP)
3.70	Line	*	39.75	56.00	46.00	-6.25	(AV)
4.44	Line	45.92	*	56.00	46.00	-10.08	(QP)
4.45	Line	*	41.62	56.00	46.00	-4.38	(AV)
14.39	Line	42.73	*	60.00	50.00	-17.27	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

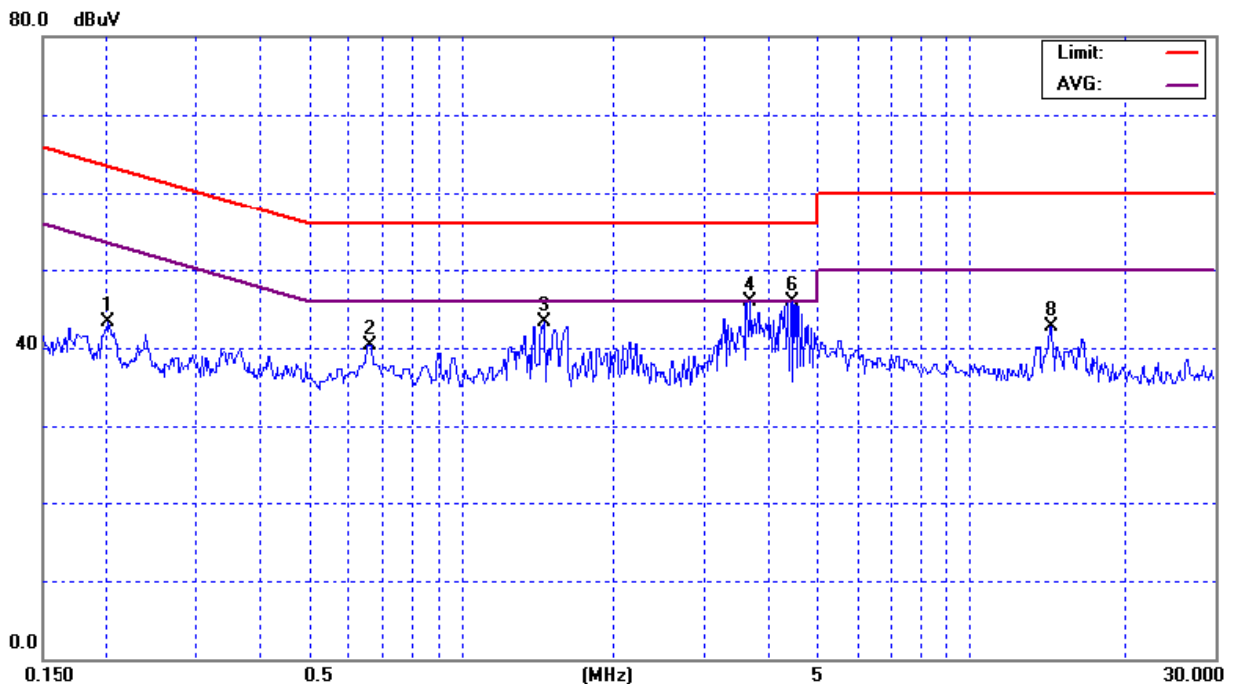


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	57 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Normal Link 11B mode CH 06		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.24	Neutral	41.93	*	62.27	52.27	-20.34	(QP)
0.65	Neutral	41.78	*	56.00	46.00	-14.22	(QP)
1.48	Neutral	43.12	*	56.00	46.00	-12.88	(QP)
3.69	Neutral	46.65	*	56.00	46.00	-9.35	(QP)
3.70	Neutral	*	39.95	56.00	46.00	-6.05	(AV)
4.37	Neutral	46.23	*	56.00	46.00	-9.77	(QP)
4.38	Neutral	*	41.10	56.00	46.00	-4.90	(AV)
14.21	Neutral	42.55	*	60.00	50.00	-17.45	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of "Note". If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

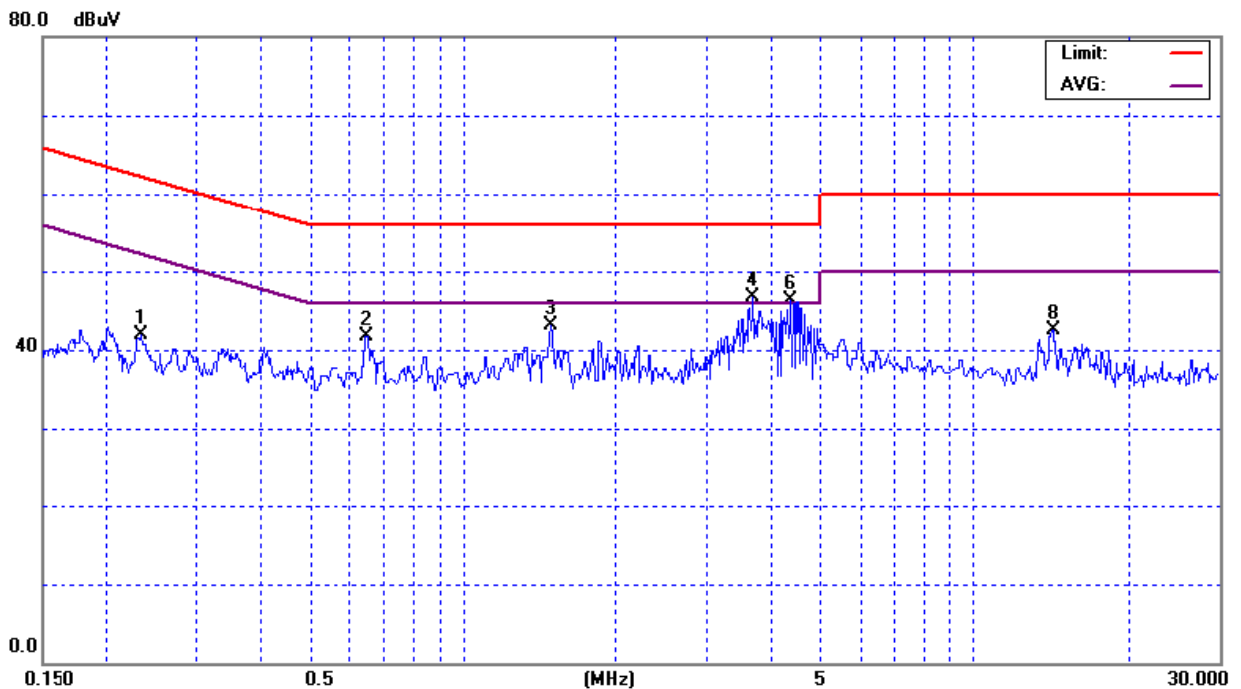

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3058	Nov. 28, 2007
2	Test Cable	N/A	10M_OS02	N/A	Nov. 28, 2007
3	Test Cable	N/A	OS02-1/-2/-3	N/A	Nov. 28, 2007
4	Pre-Amplifier	Anritsu	MH648A	M09961	Nov. 28, 2007
5	EMI Test Receiver	R&S	ESCI	100082	Jan. 31, 2008
6	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A
7	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
8	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 08, 2008
9	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-325	Oct. 25, 2007
10	Horn Antenna	Schwarzbeck	BBHA9170	9170187	Oct. 25, 2007
11	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Mar. 10, 2008
12	Microflex Cable	United Microwave	57793	1m	Mar. 10, 2008
13	Microflex Cable	United Microwave	A30A30-5006	10M	Jul. 08, 2007

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

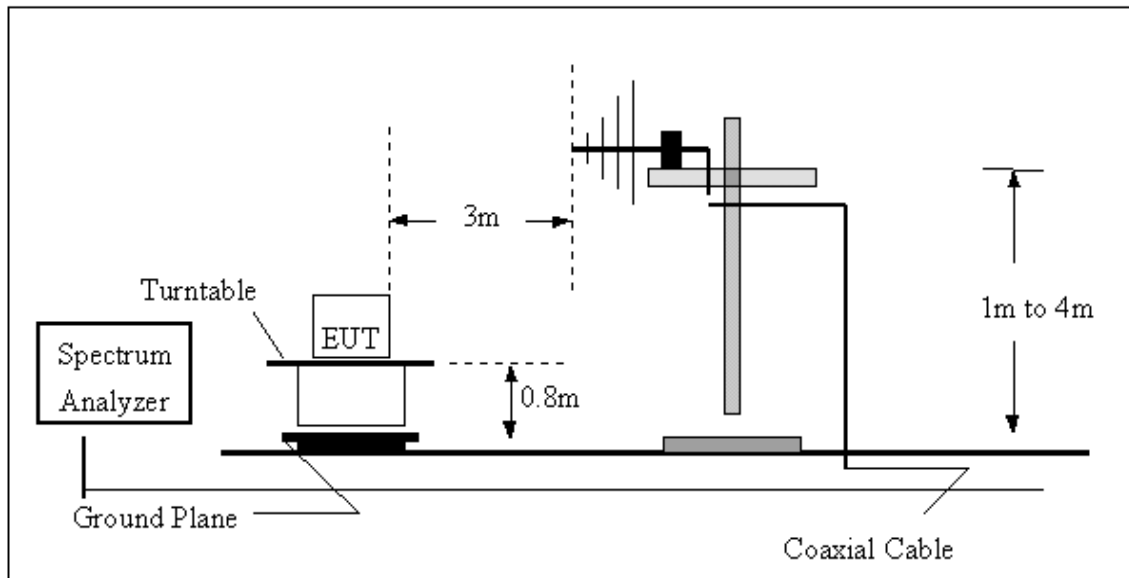

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

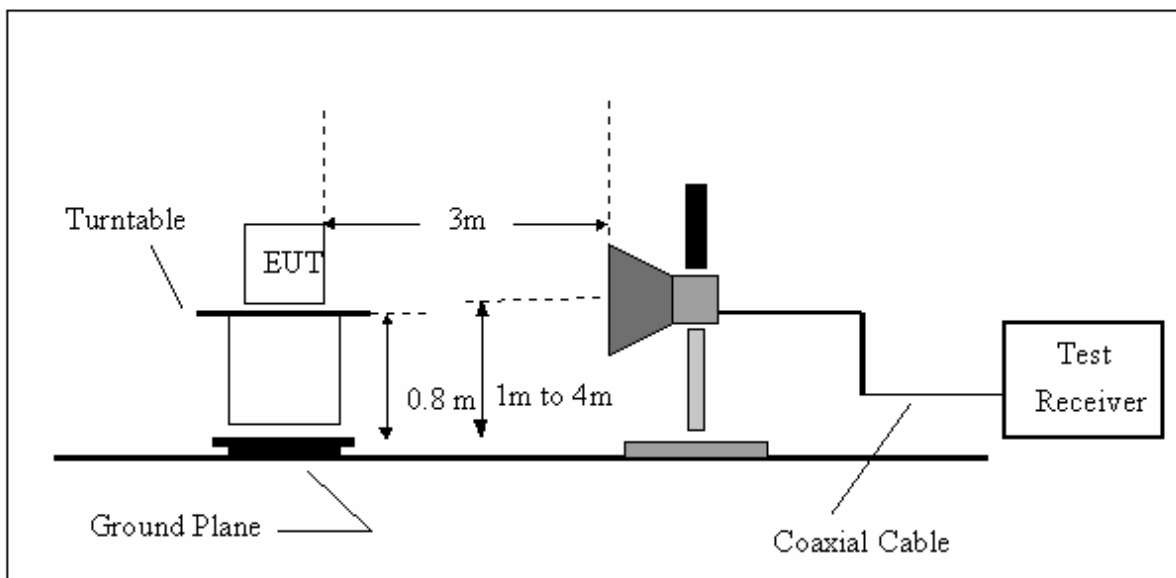

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.7 TEST RESULTS (Between 30 – 1000 MHz)

EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1008 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Normal Link CH06 (EXT antenna)		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
30.00	V	59.60	-22.96	36.64	40.00	-3.36	(QP)
62.98	V	53.17	-18.98	34.19	40.00	-5.81	(QP)
406.36	V	47.22	-17.56	29.66	46.00	-16.34	(QP)
449.04	V	49.32	-18.94	30.38	46.00	-15.62	(QP)
720.64	V	43.43	-14.33	29.10	46.00	-16.90	(QP)
901.06	V	42.01	-12.07	29.94	46.00	-16.06	(QP)
990.30	V	40.91	-12.35	28.56	54.00	-25.44	(QP)

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table .

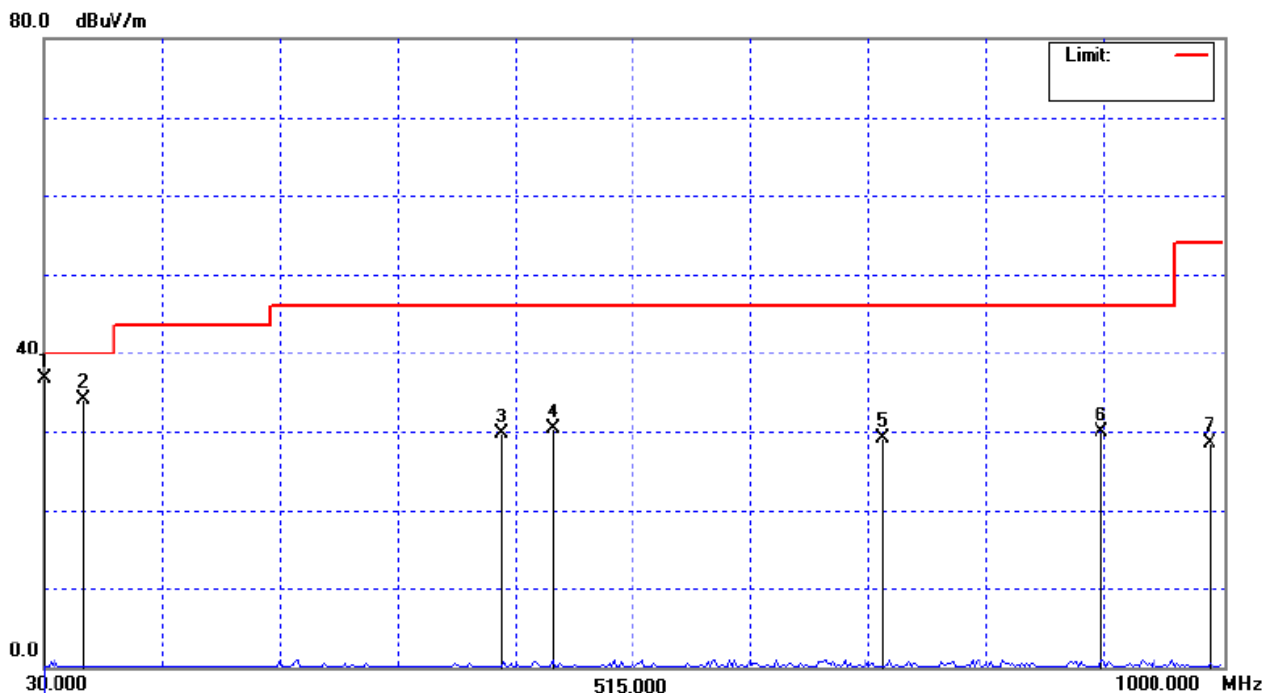


EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Normal Link CH06 (EXT antenna)		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
64.92	H	44.32	-15.24	29.08	40.00	- 10.92	(QP)
268.62	H	49.50	-20.02	29.48	43.50	- 14.02	(QP)
324.88	H	51.67	-20.11	31.56	46.00	- 14.44	(QP)
449.04	H	49.42	-19.49	29.93	46.00	- 16.07	(QP)
720.64	H	43.70	-10.96	32.74	46.00	- 13.26	(QP)
809.88	H	42.21	-15.61	26.60	46.00	- 19.40	(QP)

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table .

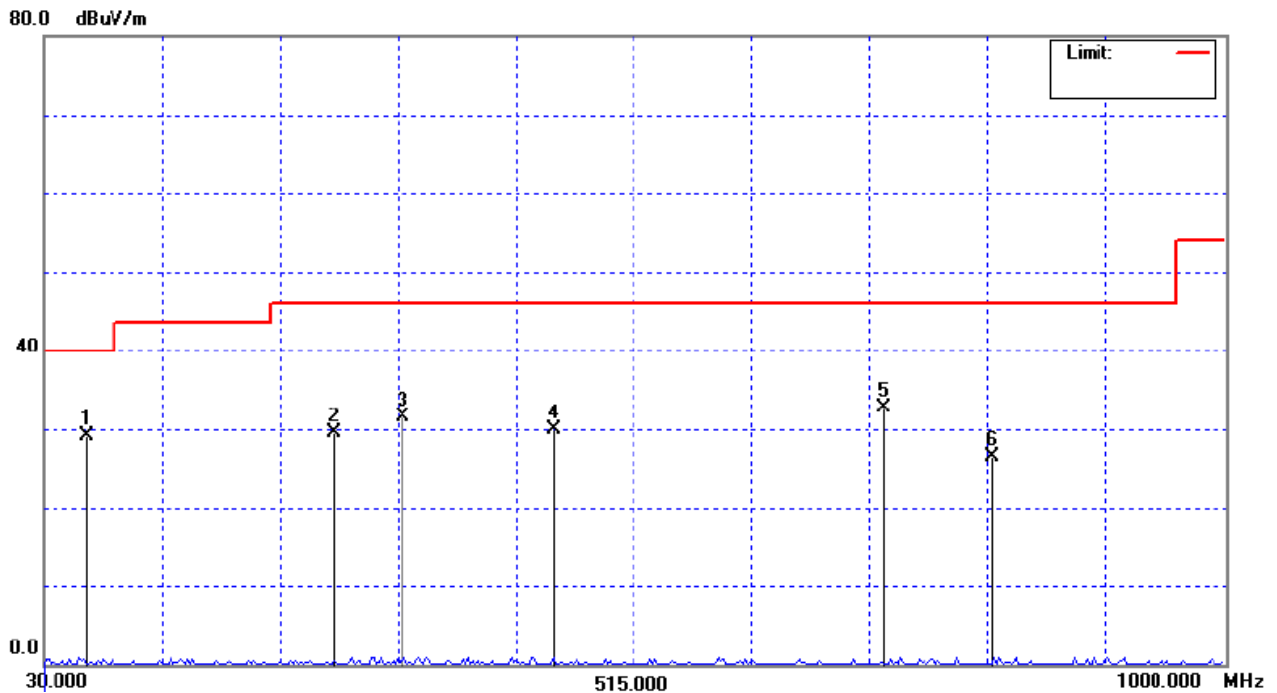


EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1008 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Normal Link CH06 (INT antenna)		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
68.80	V	58.44	-26.14	32.30	40.00	- 7.70	(QP)
107.60	V	57.73	-26.46	31.27	43.50	- 12.23	(QP)
324.88	V	49.87	-21.96	27.91	46.00	- 18.09	(QP)
450.98	V	48.73	-18.17	30.56	46.00	- 15.44	(QP)
499.48	V	46.53	-17.38	29.15	46.00	- 16.85	(QP)
809.88	V	41.15	-7.90	33.25	46.00	- 12.75	(QP)

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz ◦
- (2) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦

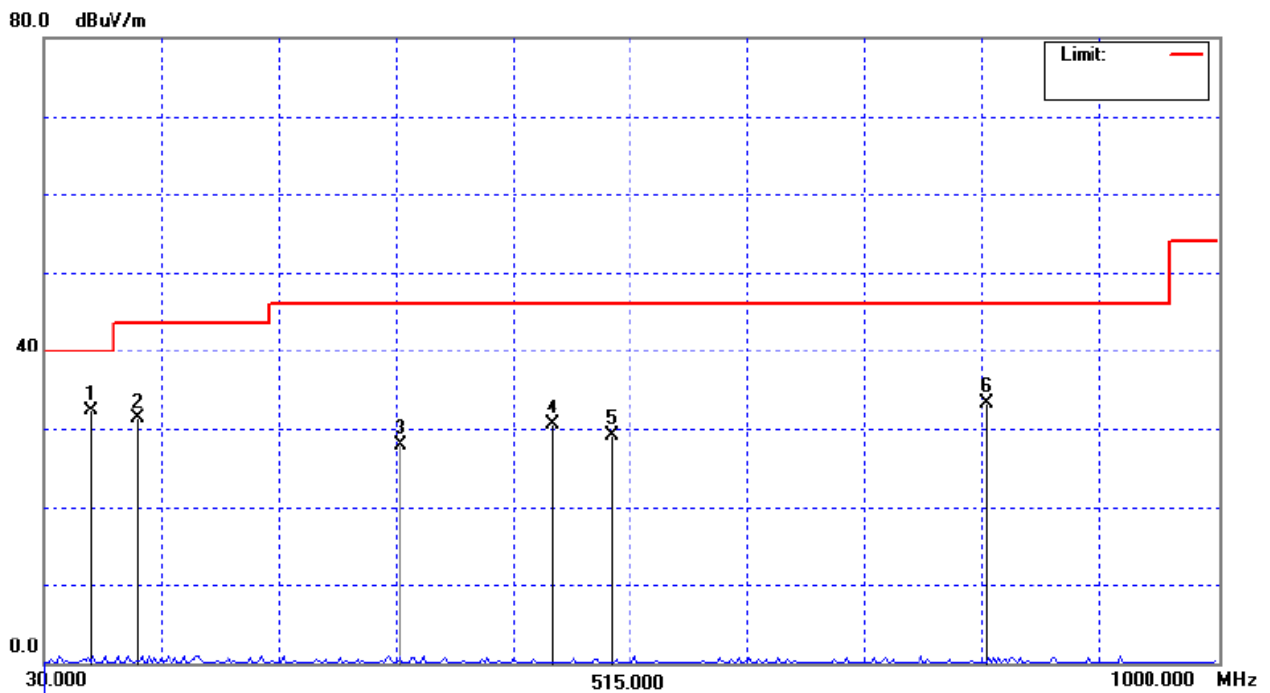


EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Normal Link CH06 (INT antenna)		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
150.28	H	47.66	-22.81	24.85	43.50	- 18.65	(QP)
179.38	H	52.29	-24.08	28.21	43.50	- 15.29	(QP)
359.80	H	45.51	-21.14	24.37	46.00	- 21.63	(QP)
449.04	H	47.36	-18.21	29.15	46.00	- 16.85	(QP)
809.88	H	38.66	-7.90	30.76	46.00	- 15.24	(QP)
901.06	H	38.79	-6.16	32.63	46.00	- 13.37	(QP)

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table .

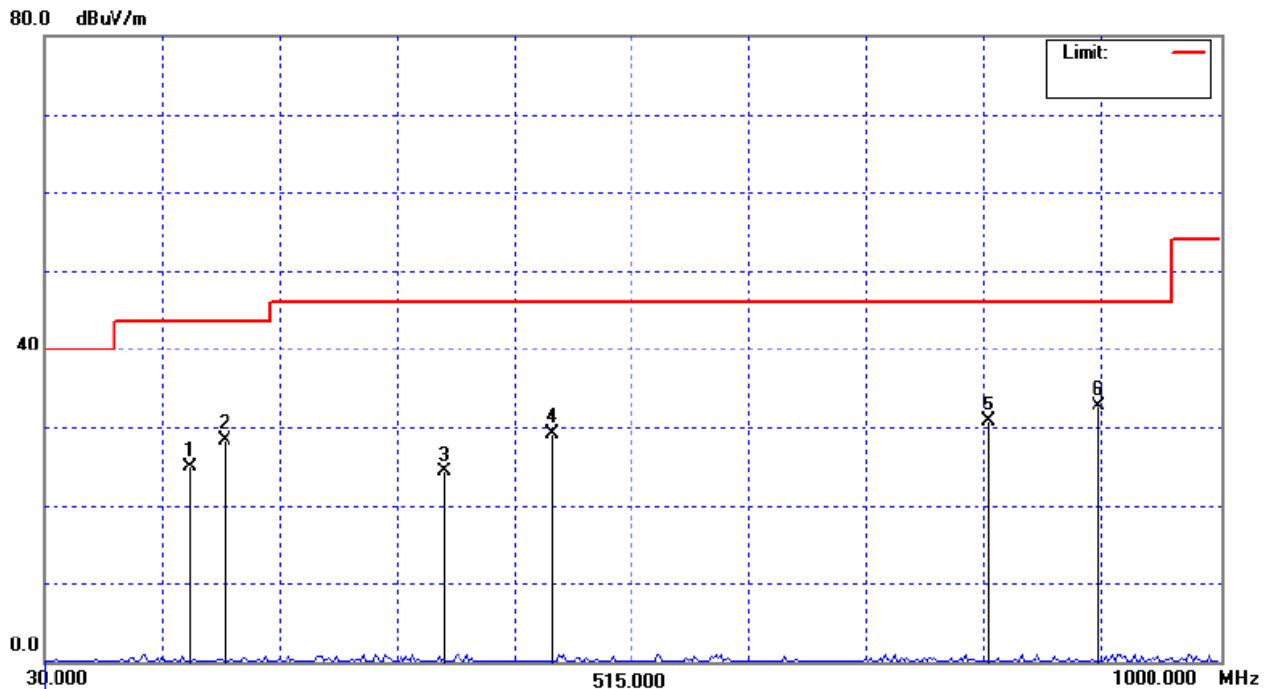

4.2.8 TEST RESULTS (Above 1000 MHz)



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH01 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	28.82	20.52	32.61	61.43	53.13	74.00	54.00	Y/E
2419.80	V	77.31	73.89	32.69	110.00	106.58			Y/F
1080.07	V	55.48	48.25	-7.67	47.81	40.58	74.00	54.00	
1440.00	V	49.87	45.40	-6.04	43.83	39.36	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01 (Above 1000 MHz, Vertical)

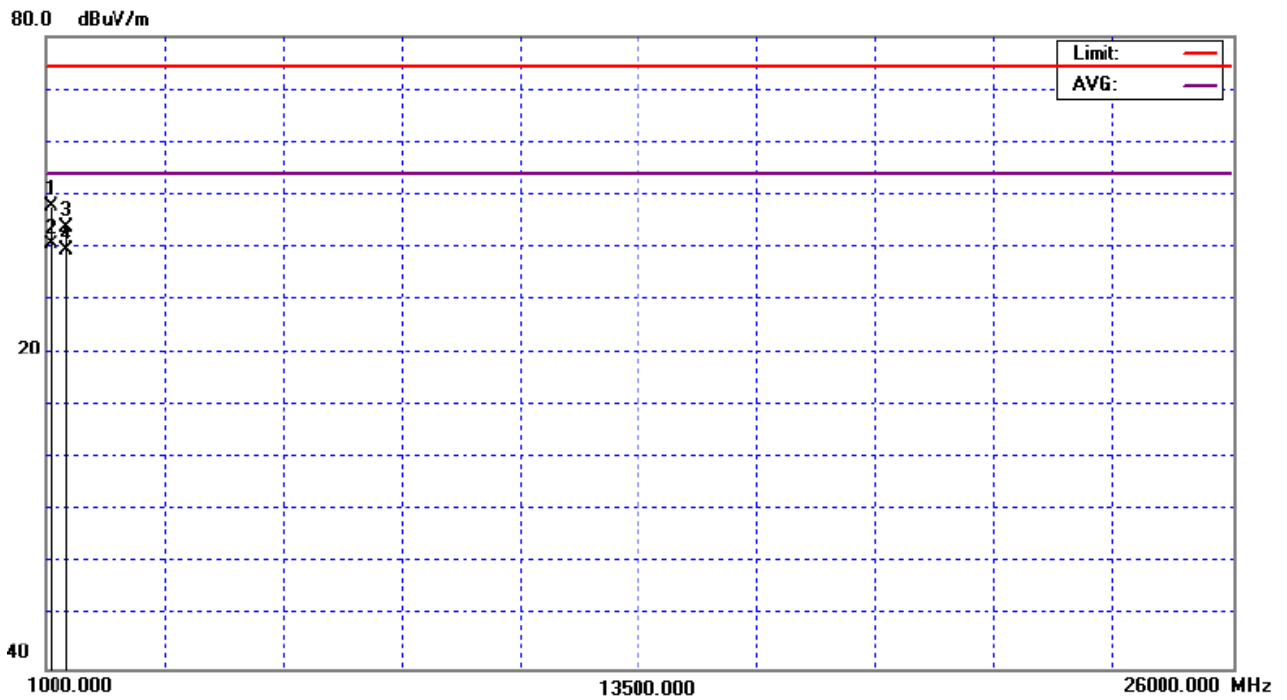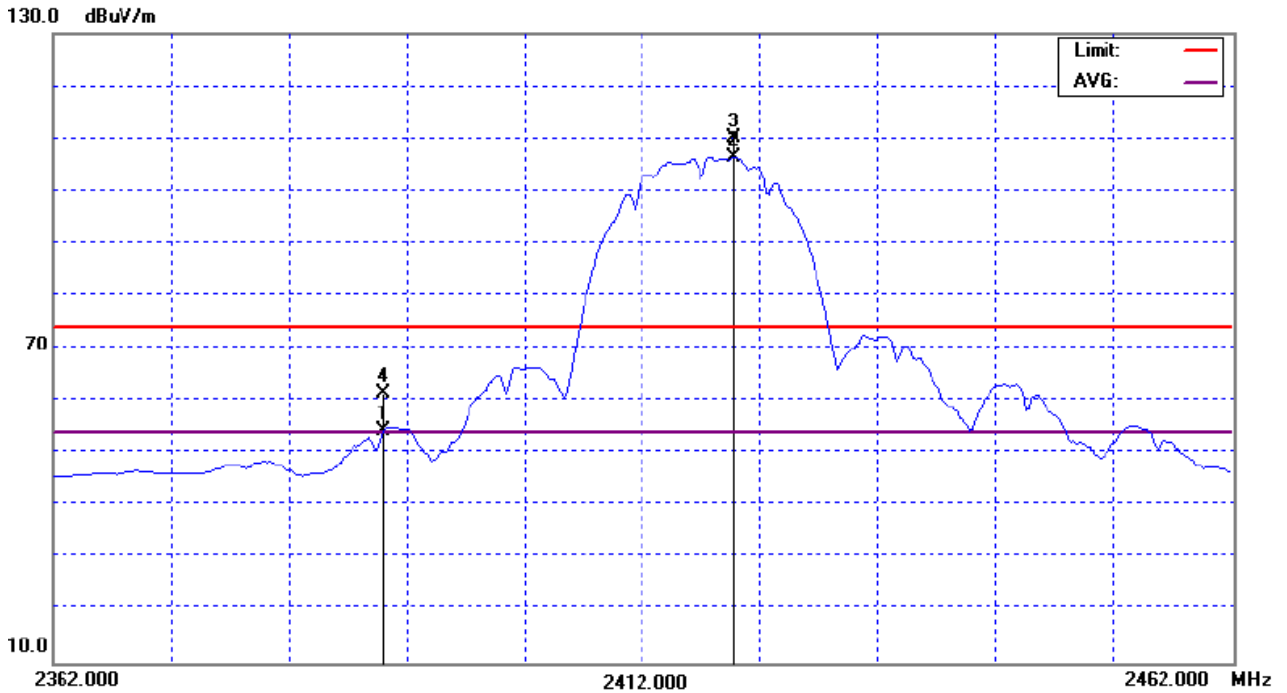



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH01 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2416.00	H	71.79	67.92	32.68	104.47	100.60			Y/F
2390.00	H	25.75	18.76	32.61	58.36	51.37	74.00	54.00	Y/E
1260.04	H	52.19	47.88	-6.85	45.34	41.03	74.00	54.00	
1980.16	H	52.64	46.95	-3.09	49.55	43.86	74.00	54.00	
4824.06	H	47.95	42.93	4.12	52.07	47.05	74.00	54.00	Y/H

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01 (Above 1000 MHz, Horizontal)

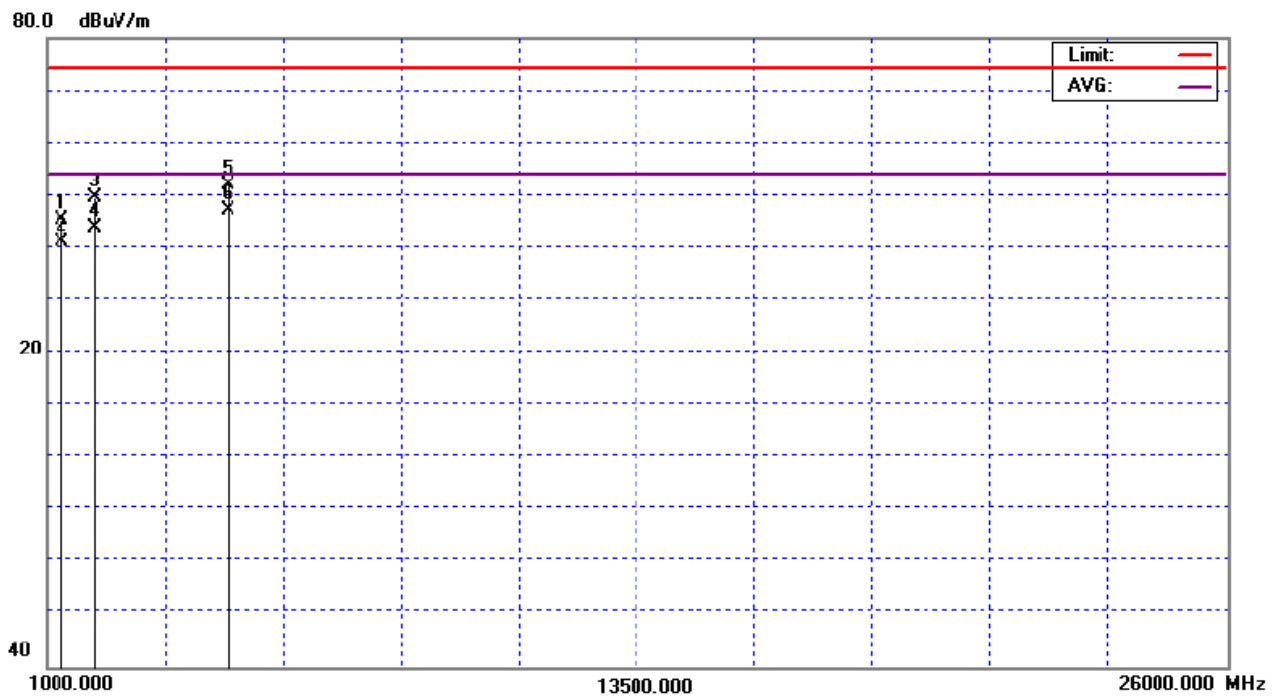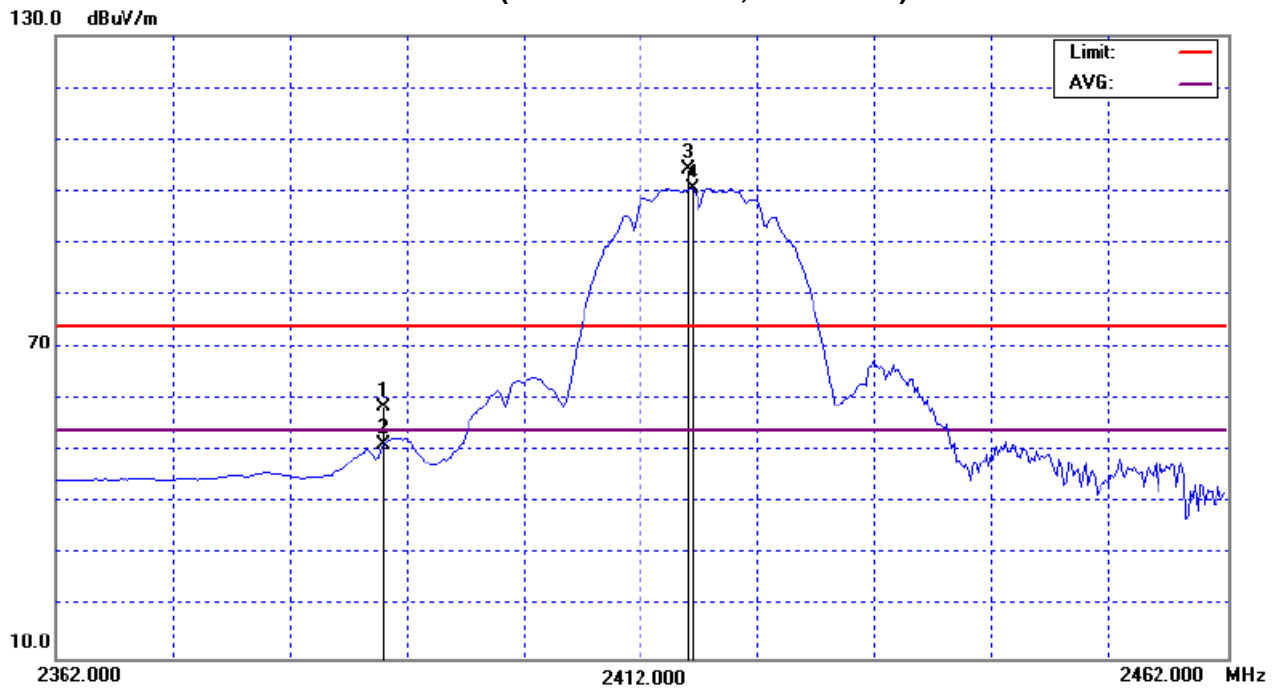



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH01 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2379.60	V	38.69		31.72	70.41		74.00	54.00	Y/E
2375.00	V		21.77	31.70		53.47	74.00	54.00	Y/E
2413.20	V	82.19	78.37	31.88	114.07	110.26			Y/F
1440.00	V	47.27	41.62	-6.04	41.23	35.58	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01(Above 1000 MHz, Vertical)

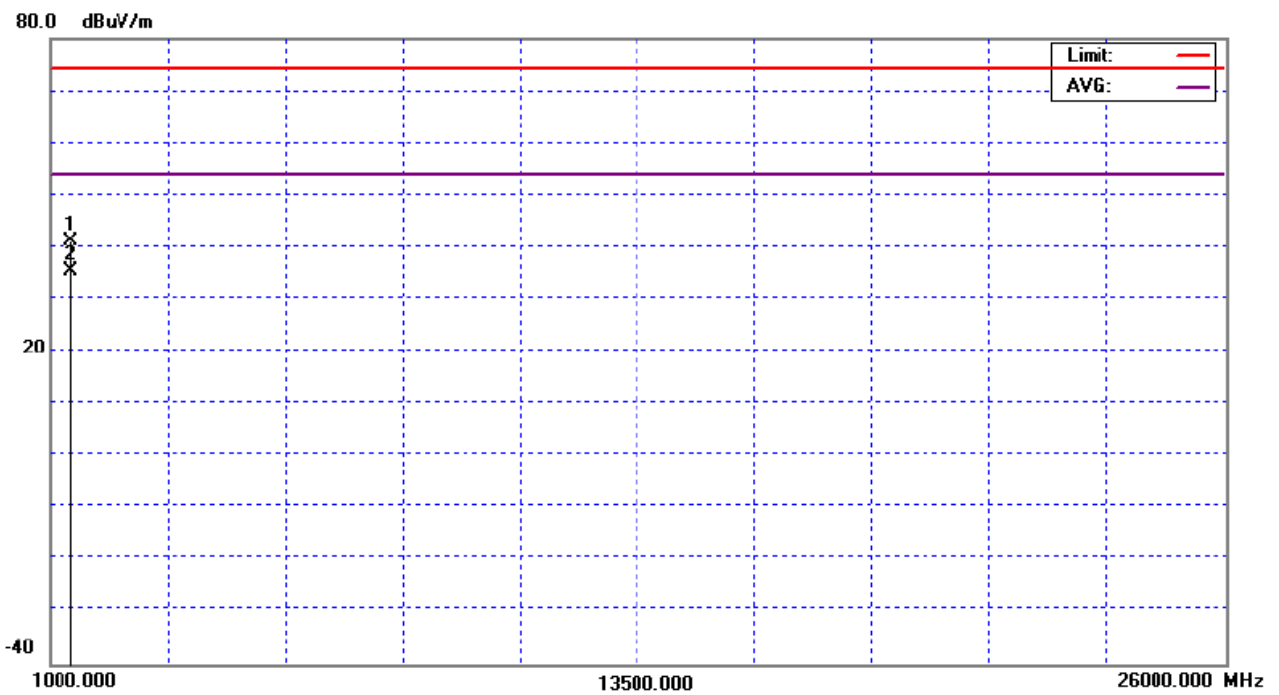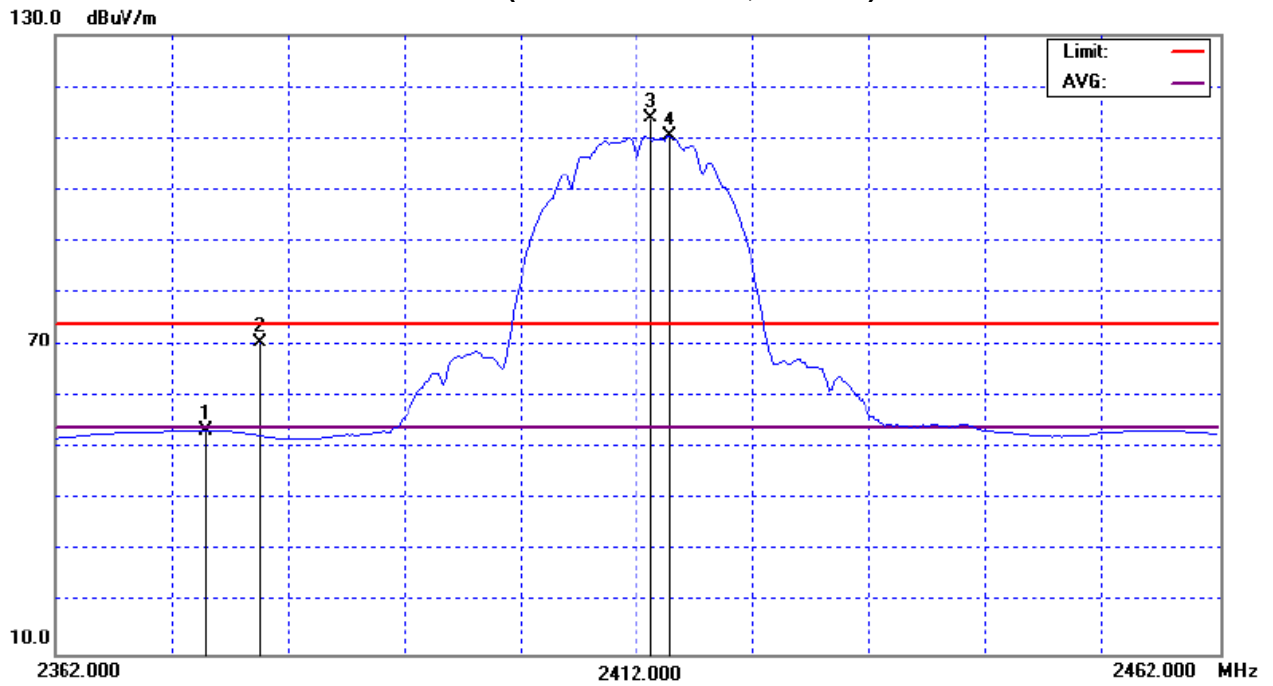



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH01 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2414.80	H	62.97	59.32	31.88	94.85	91.21			Y/F
2390.00	H	21.49	11.52	31.77	53.26	43.29	74.00	54.00	Y/E
1440.07	H	47.06	51.36	-6.04	41.02	45.32	74.00	54.00	
1980.11	H	49.66	54.39	-3.09	46.57	51.30	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01(Above 1000 MHz, Horizontal)

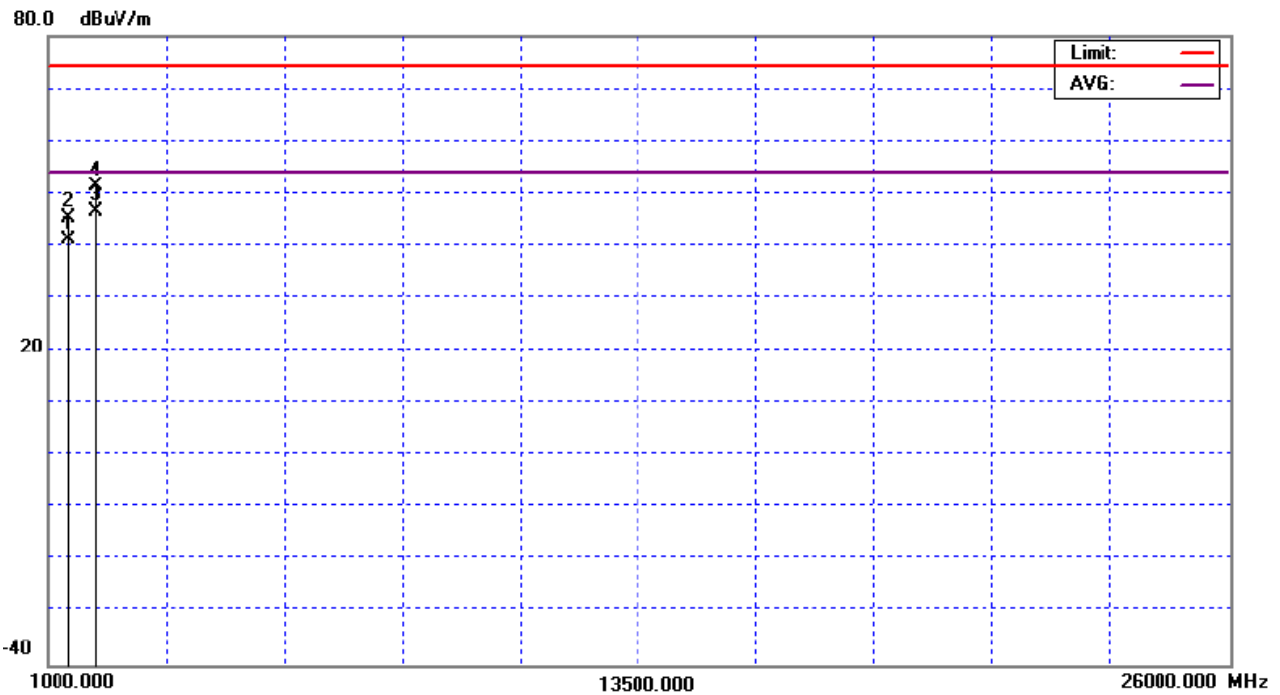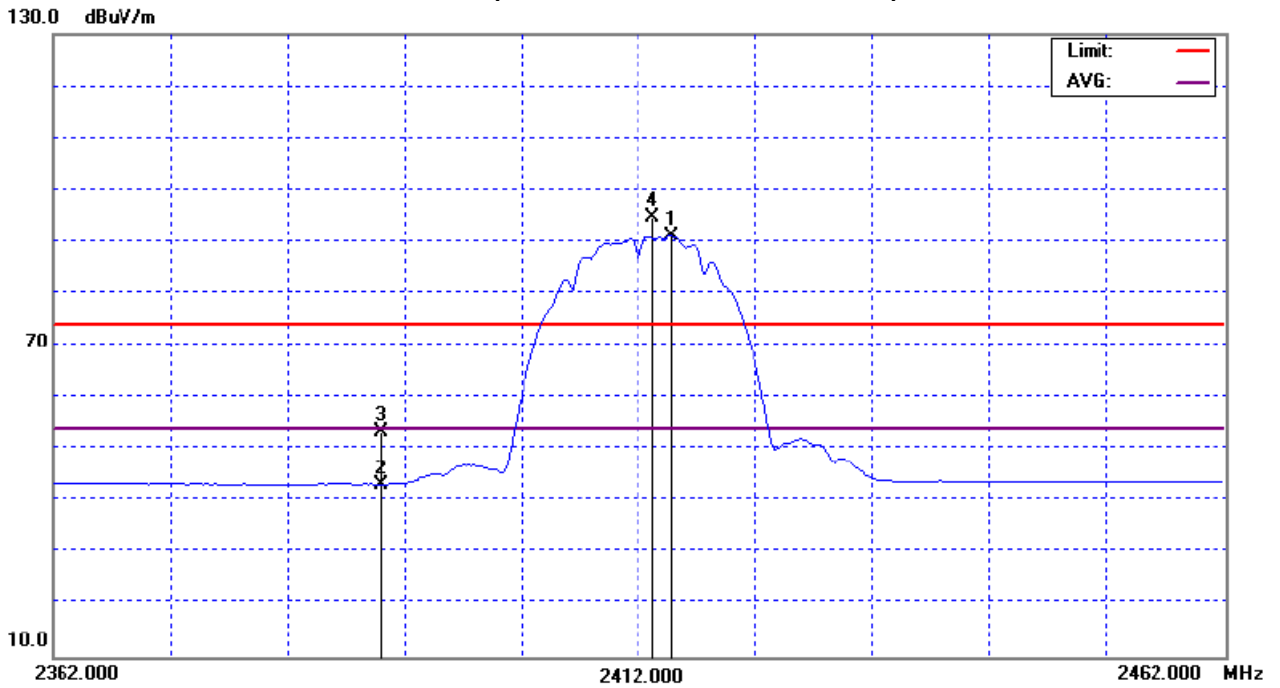



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH06 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2438.20	V	79.69	75.81	32.74	112.43	108.55			Y/F
1079.84	V	52.26	46.11	-7.67	44.59	38.44	74.00	54.00	
1440.04	V	48.94	44.28	-6.04	42.90	38.24	74.00	54.00	
4874.00	V	45.00	39.21	4.25	49.25	43.46	74.00	54.00	Y/H

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

TX CH06 (Above 1000 MHz, Vertical)

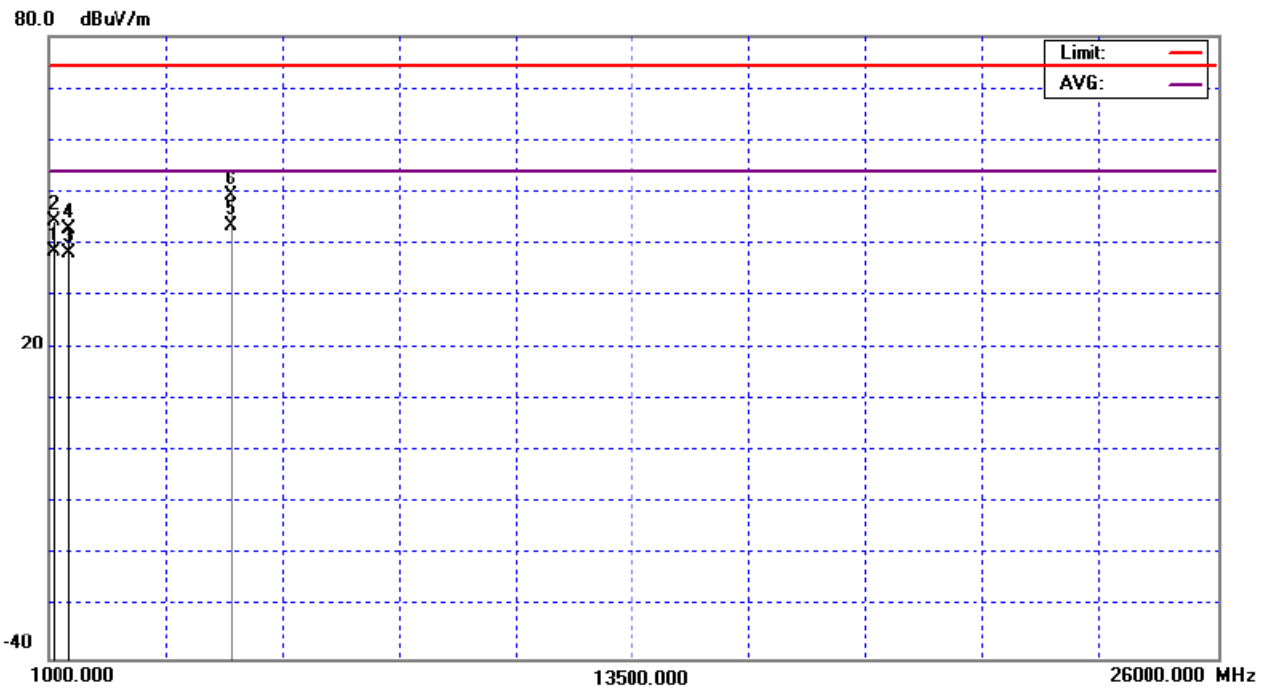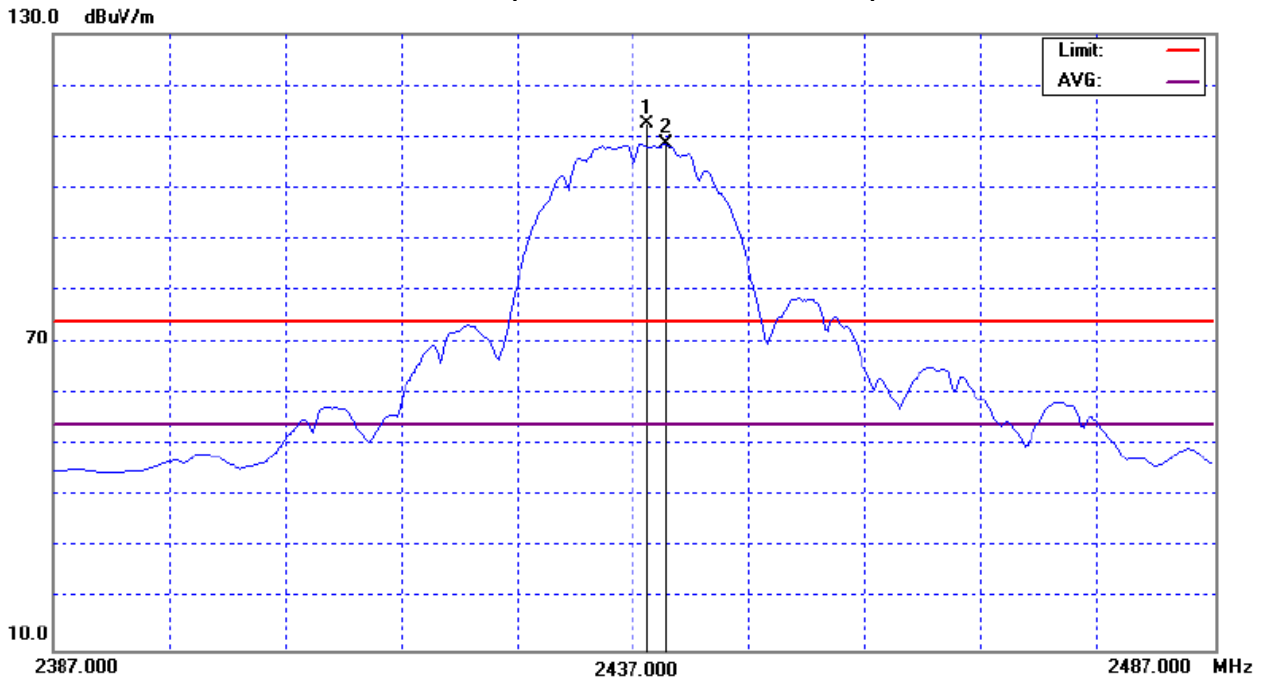



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH06 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2435.80	H	75.15	71.14	32.73	107.88	103.87			Y/F
1259.96	H	51.59	47.81	-6.85	44.74	40.96	74.00	54.00	
4873.98	H	50.71	46.00	4.25	54.96	50.25	74.00	54.00	Y/H

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH06 (Above 1000 MHz, Horizontal)

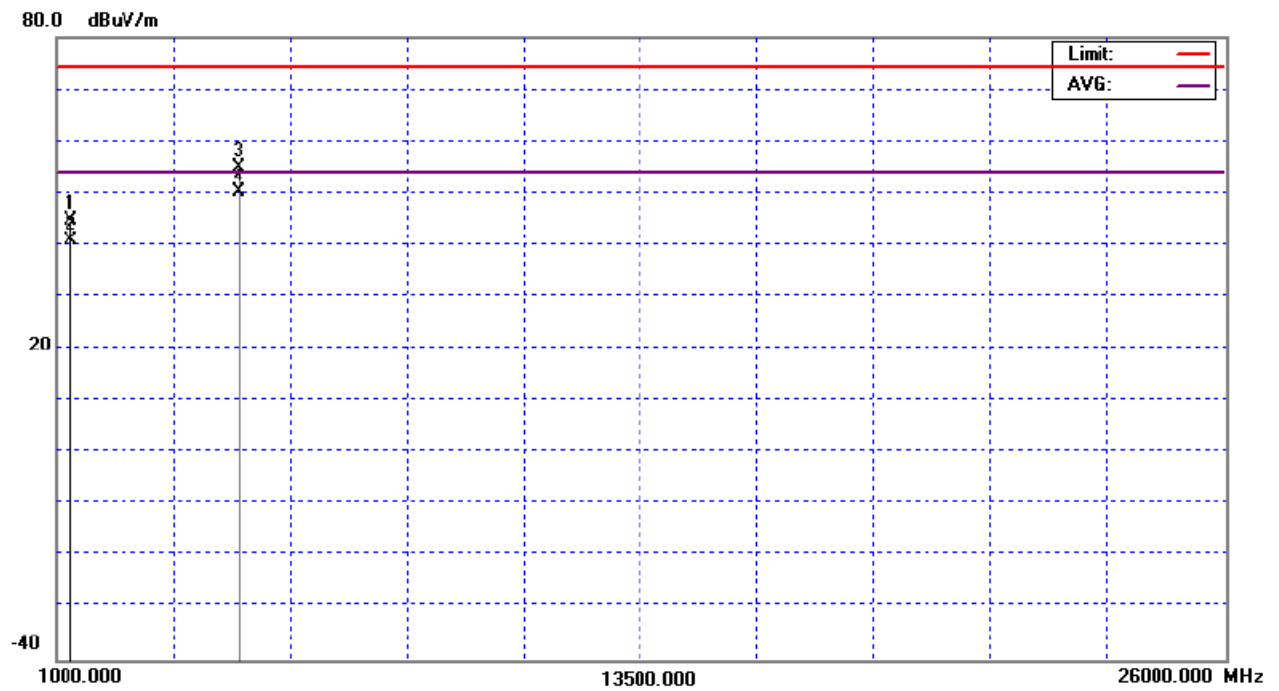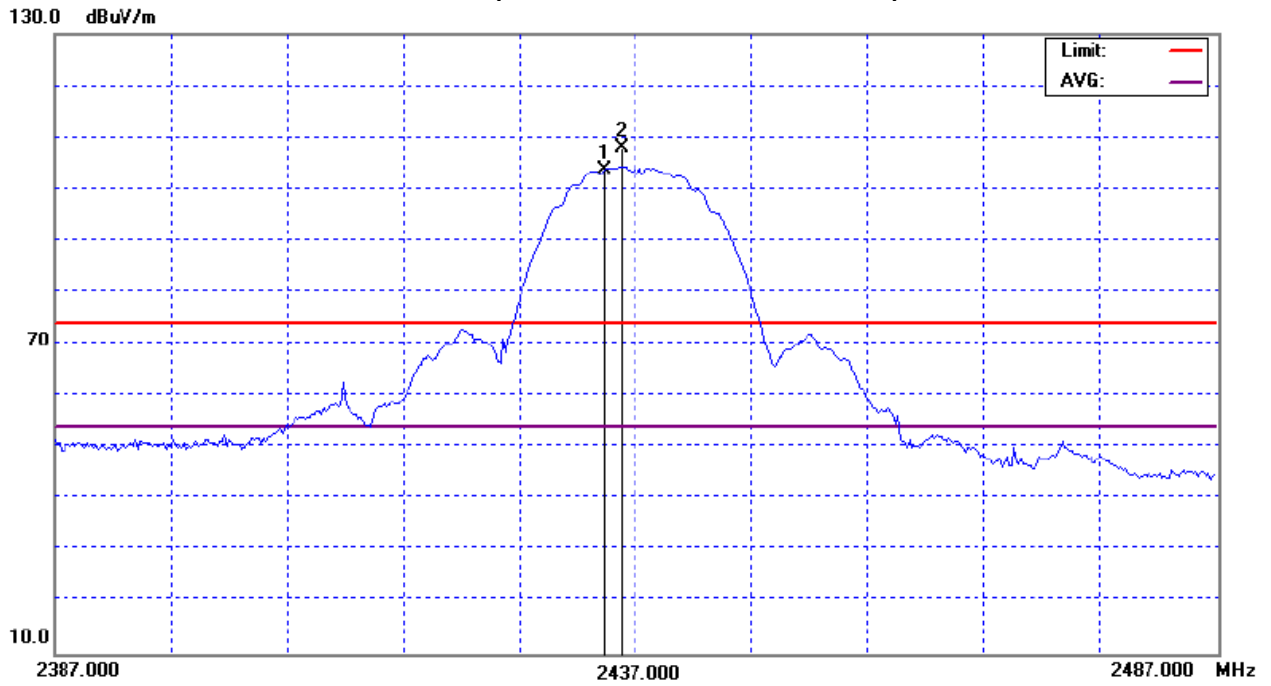



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH06 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2436.20	V	84.05	80.25	31.99	116.04	112.24			Y/F
1260.03	V	52.57	42.54	-6.85	45.72	35.69	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH06 (Above 1000 MHz, Vertical)

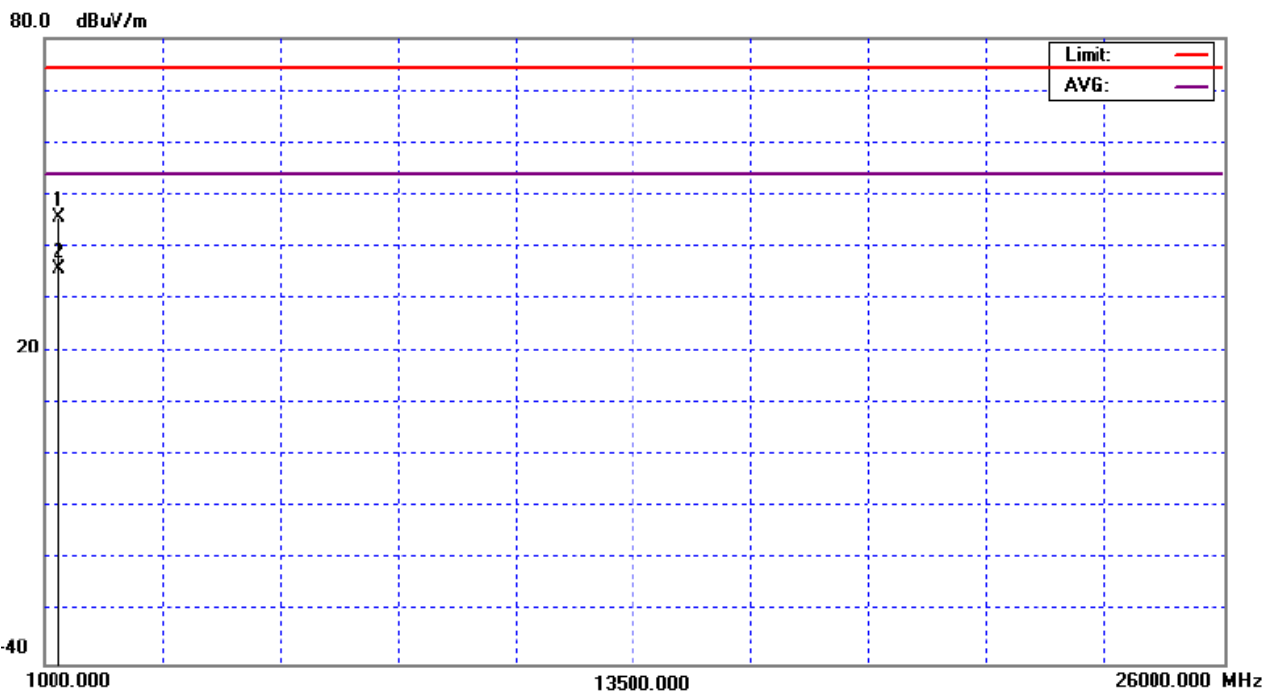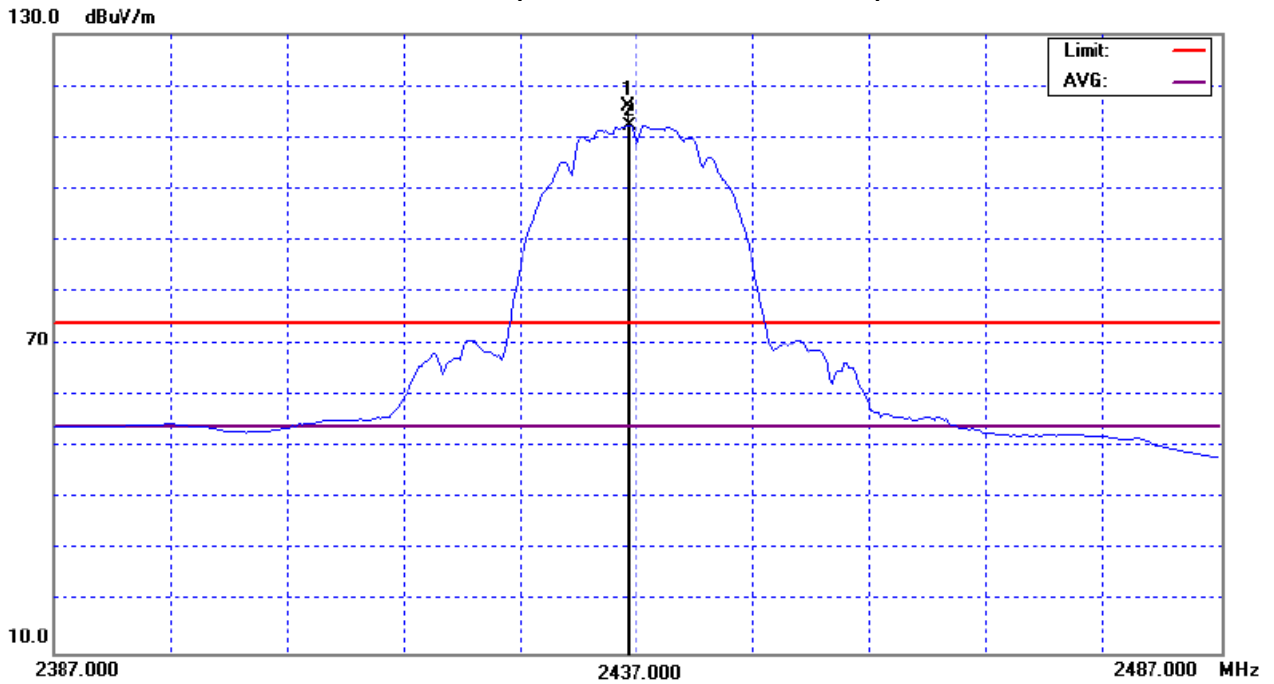



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH06 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2437.80	H	62.84	58.96	32.00	94.84	90.96			Y/F
1979.86	H	57.68	46.27	-3.09	54.59	43.18	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH06 (Above 1000 MHz, Horizontal)

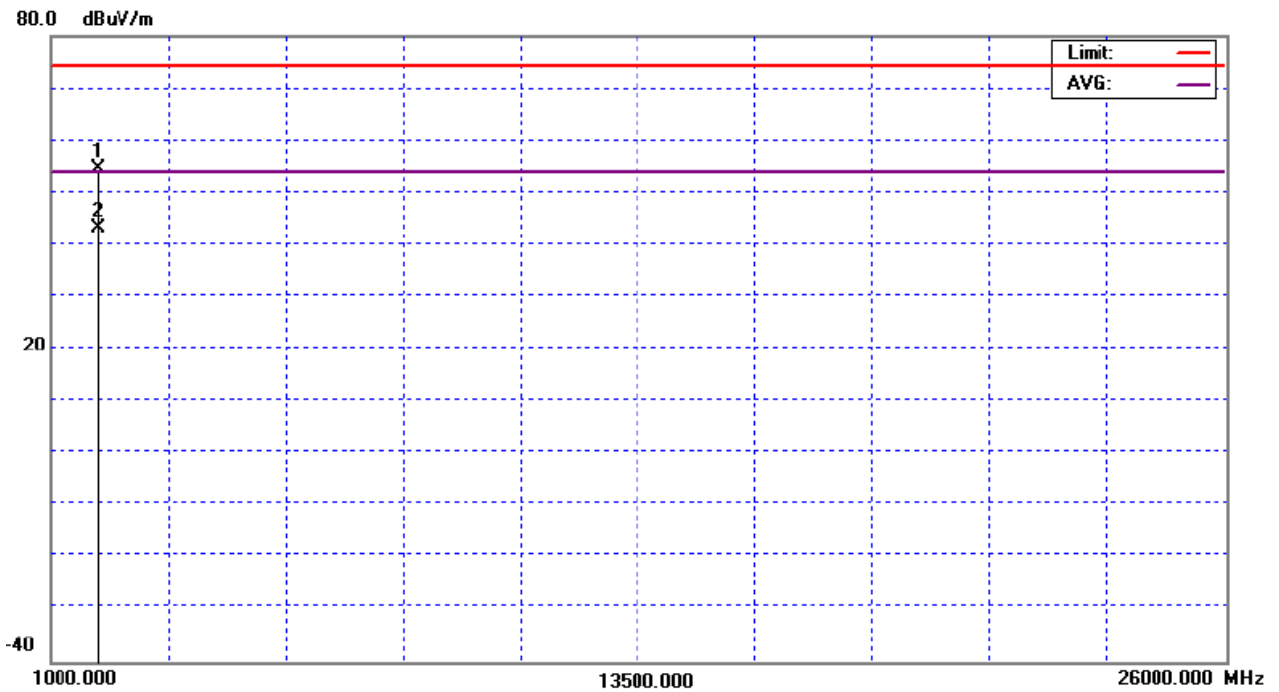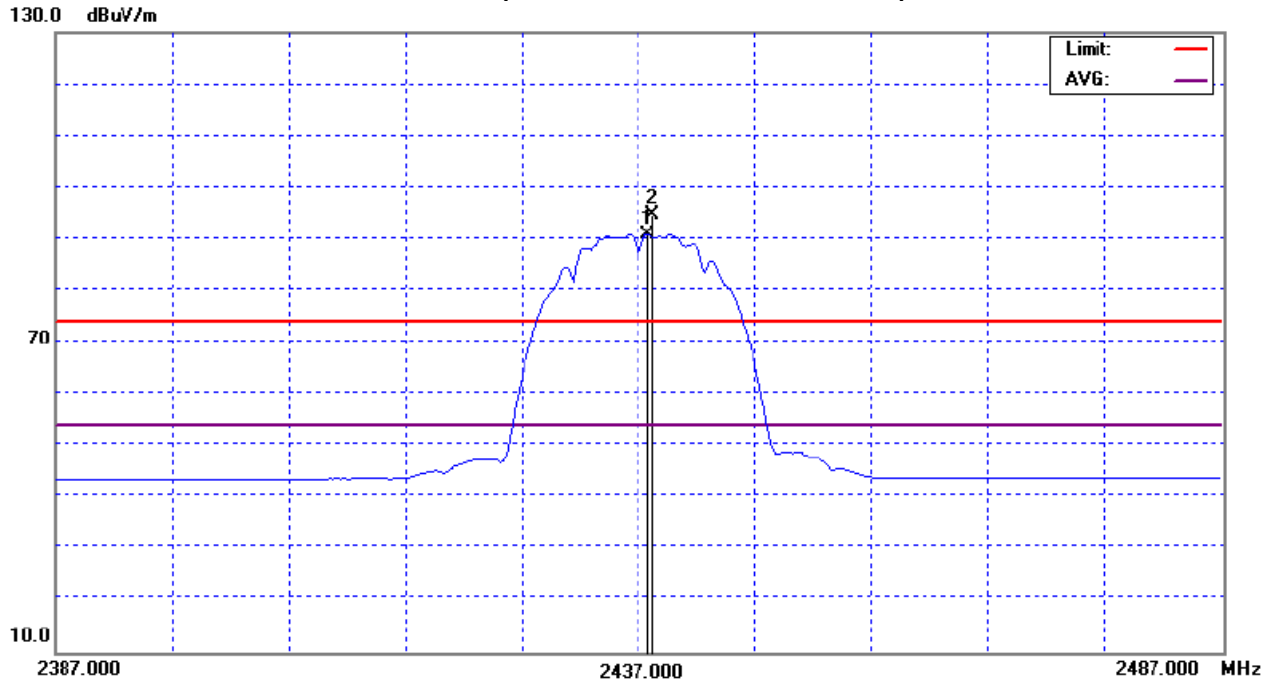



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH11 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2461.20	V	77.59	73.54	32.80	110.39	106.34			Y/F
2483.50	V	26.94	19.08	32.86	59.80	51.94	74.00	54.00	Y/E
1440.13	V	49.53	44.42	-6.04	43.49	38.38	74.00	54.00	
1079.74	V	54.58	49.23	-7.67	46.91	41.56	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Vertical)

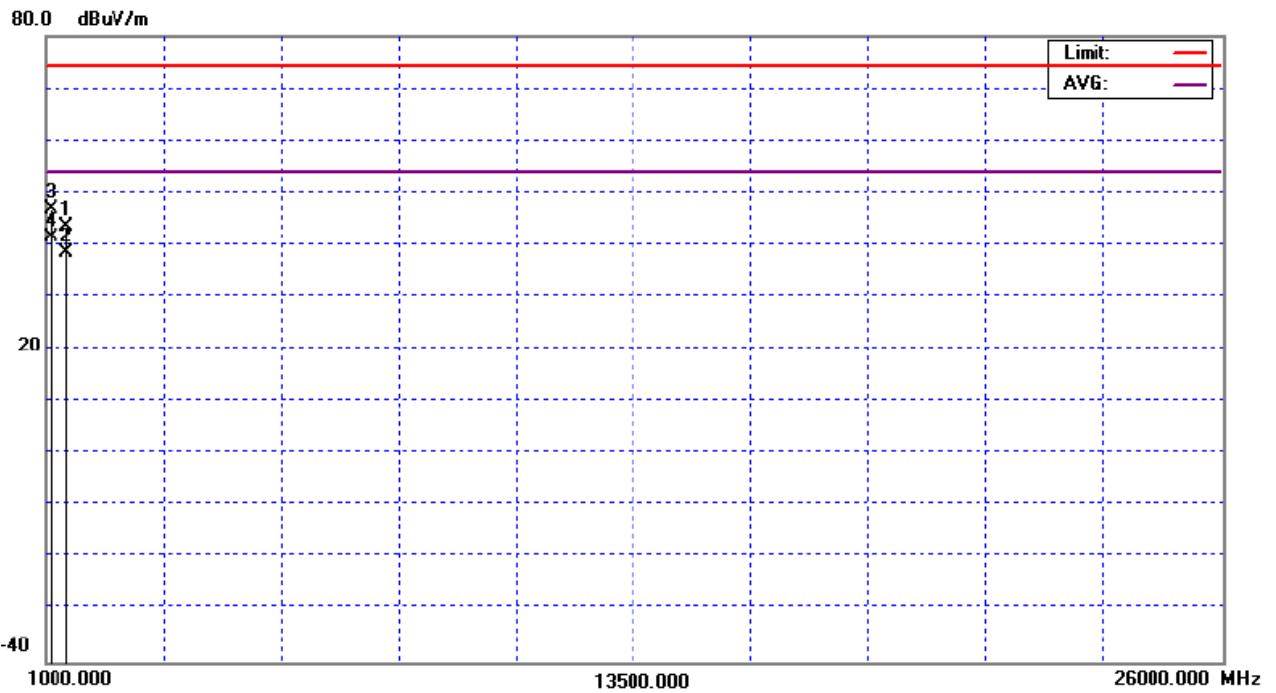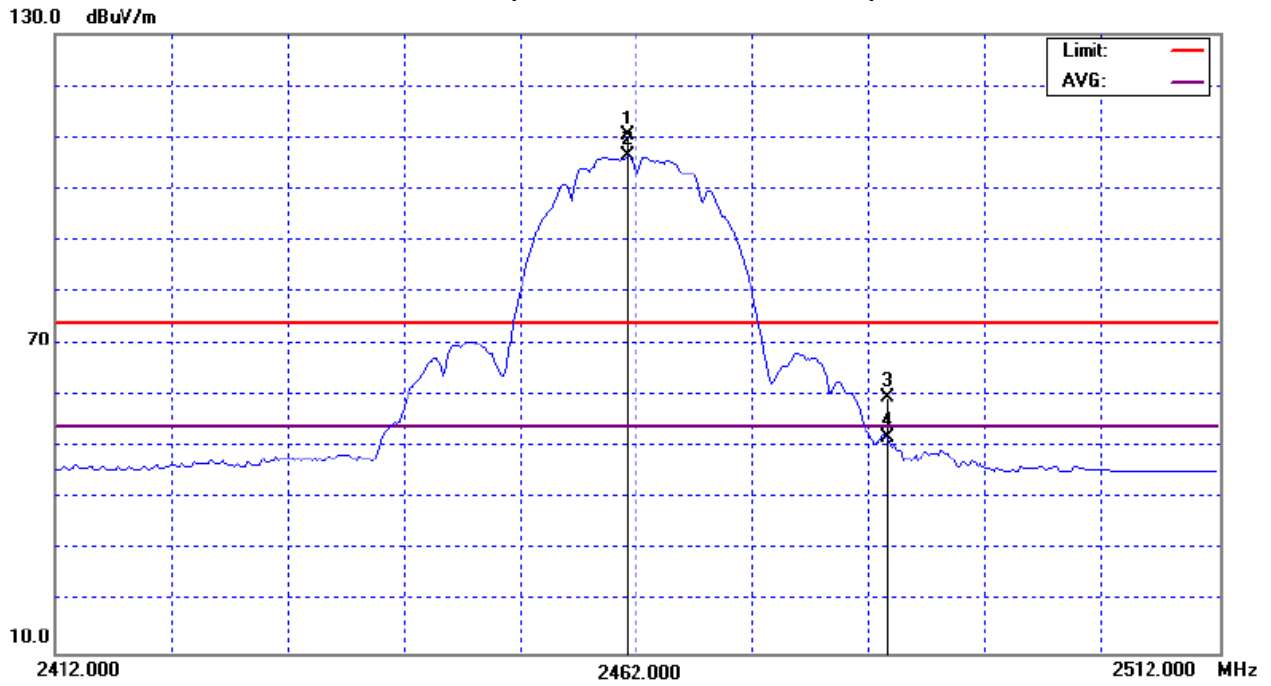



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH11 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2461.00	H	72.55	68.74	32.80	105.35	101.53			Y/F
2483.50	H	26.66	16.69	32.86	59.52	49.55	74.00	54.00	Y/E
1260.00	H	51.74	46.24	-6.85	44.89	39.39	74.00	54.00	
4924.10	H	47.38	42.29	4.37	51.75	46.66	74.00	54.00	Y/H

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Horizontal)

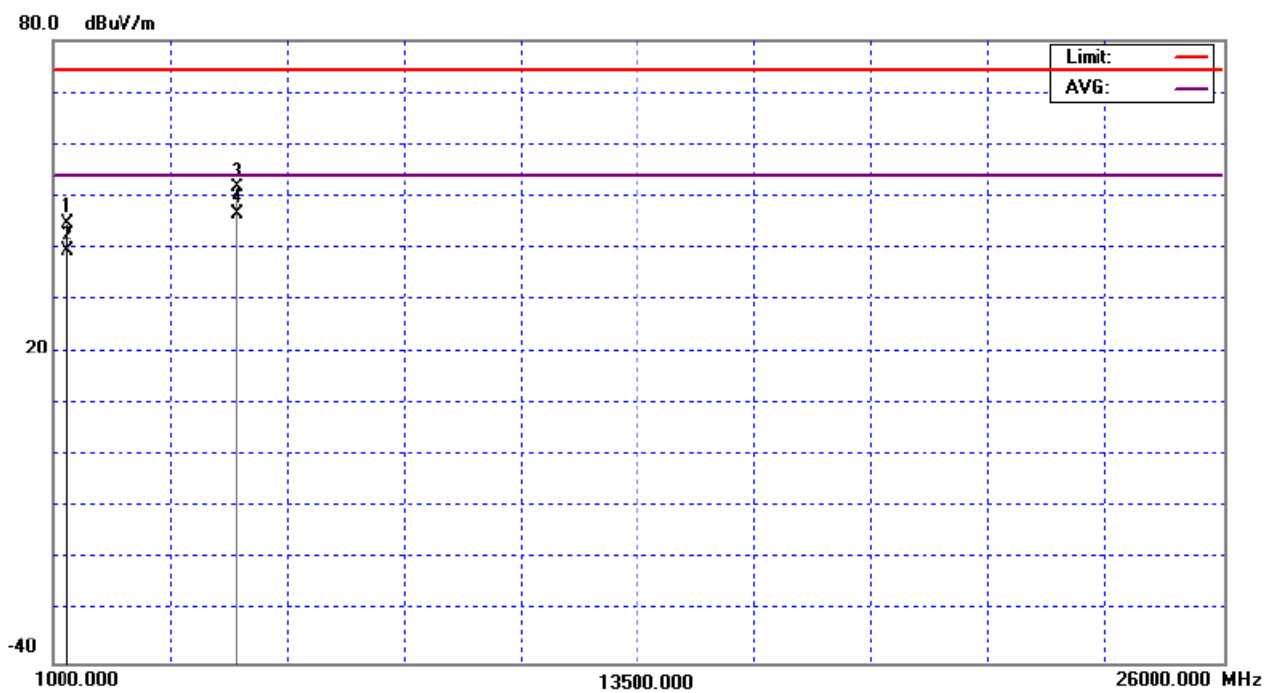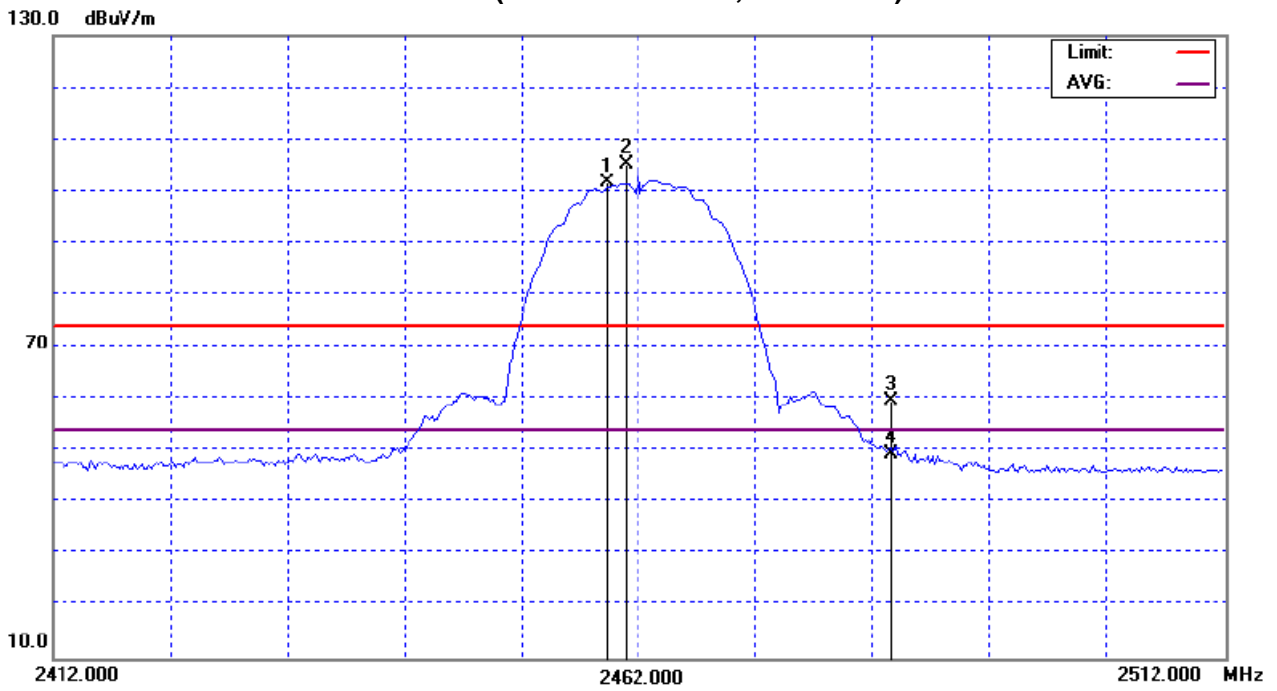



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH11 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2461.20	V	83.66	79.82	32.12	115.78	111.94			Y/F
2483.50	V	28.23	18.81	32.22	60.45	51.03	74.00	54.00	Y/E
1979.90	V	59.98	54.80	-3.09	56.89	51.71	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Vertical)

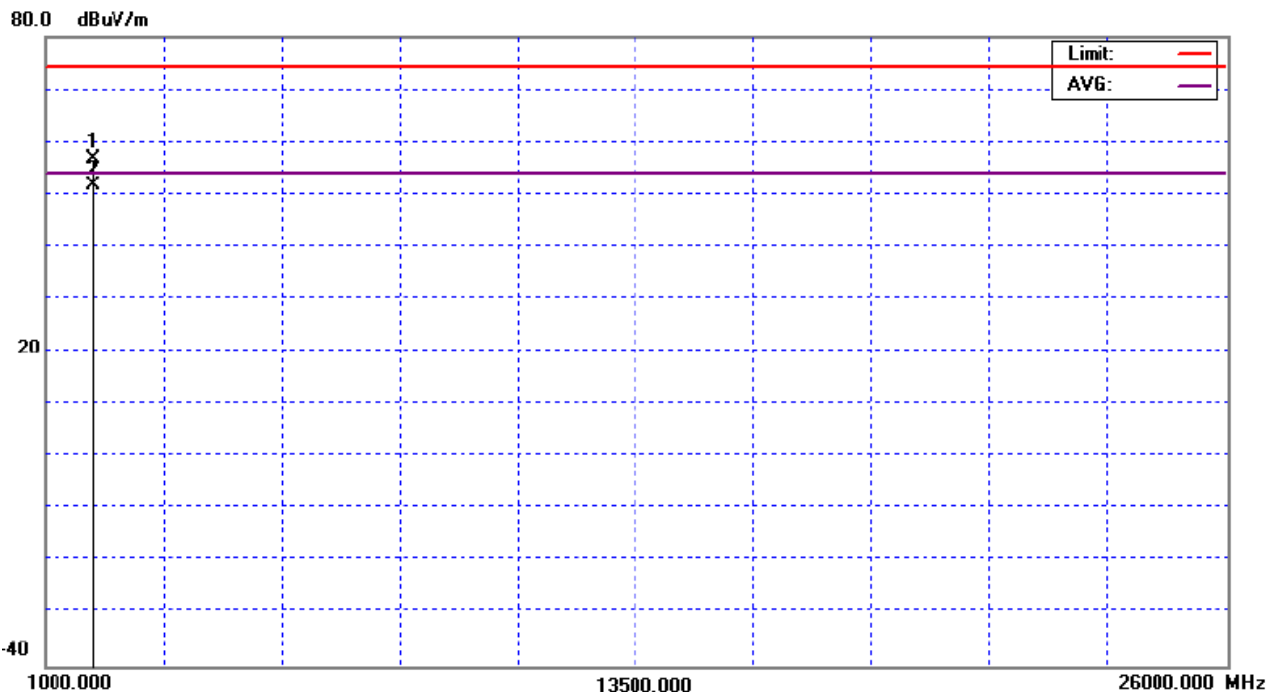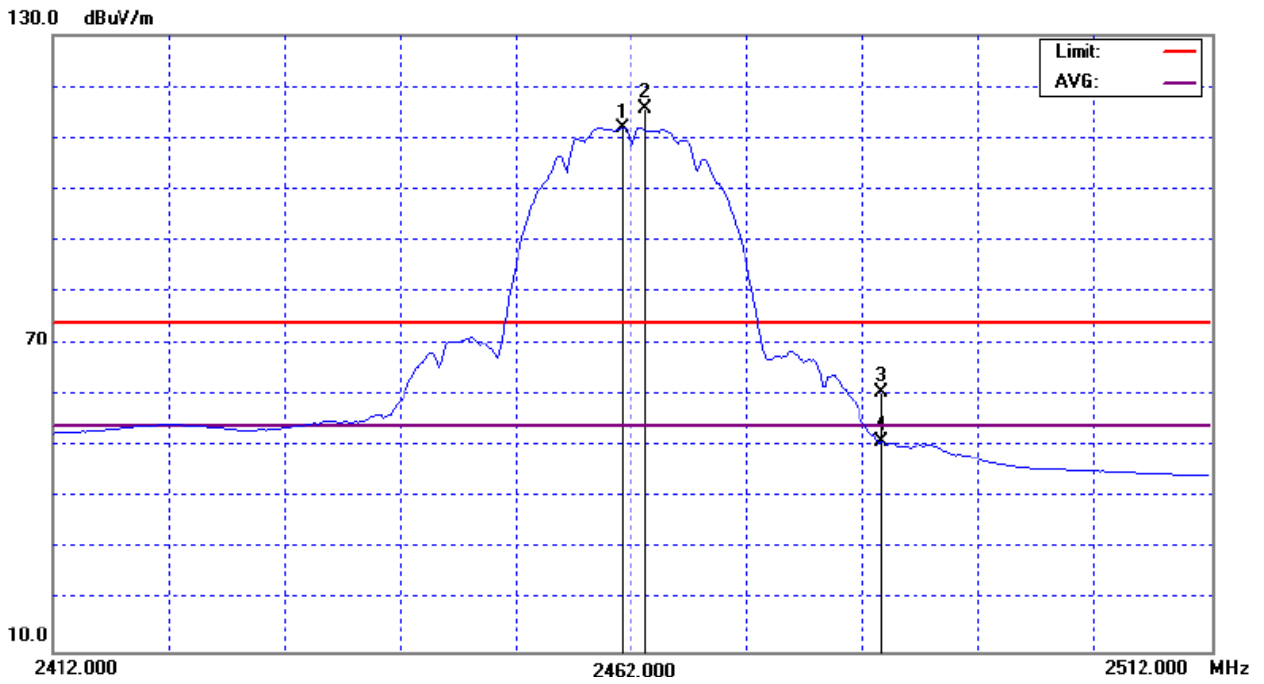



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11B mode CH11 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2459.20	H	60.75	57.33	32.10	92.86	89.43			Y/F
2483.50	H	22.52	11.54	32.22	54.74	43.76	74.00	54.00	Y/E
1260.01	H	49.97	47.13	-6.85	43.12	40.28	74.00	54.00	
1979.83	H	48.46	42.55	-3.09	45.37	39.46	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Horizontal)

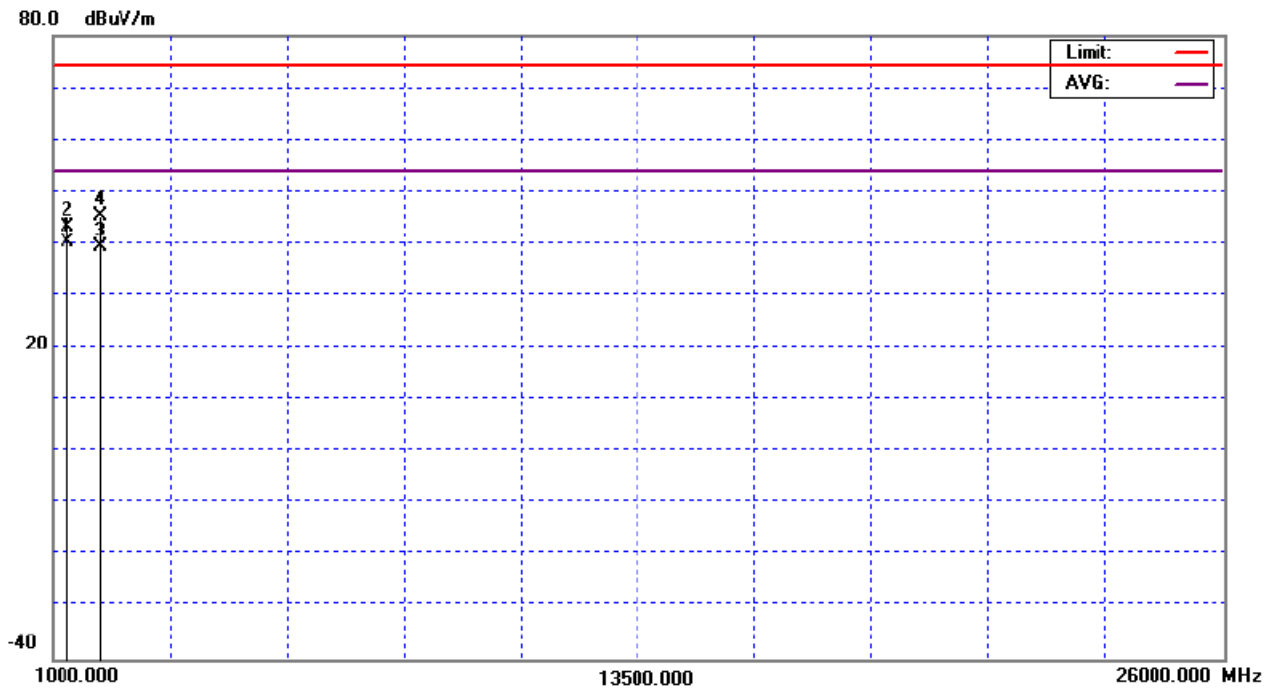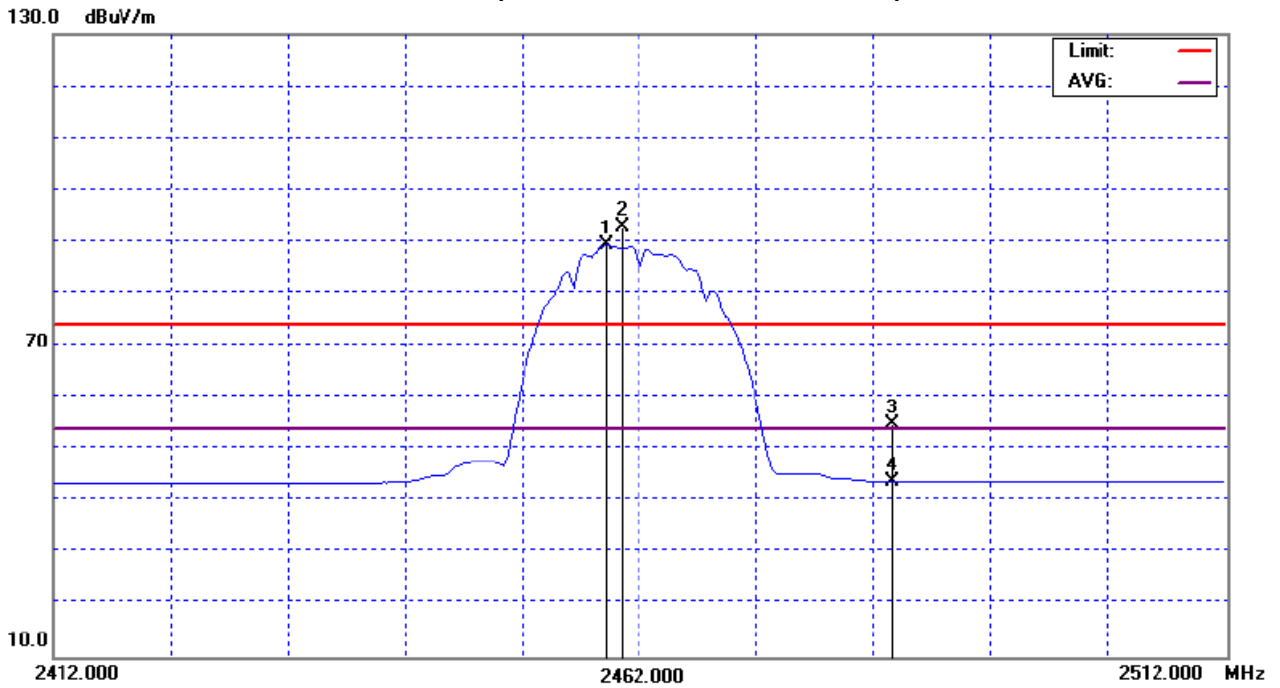



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH01 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	36.47	20.26	32.61	69.08	52.87	74.00	54.00	Y/E
2418.71	V	75.64	66.26	32.69	108.33	98.95			Y/F
1080.07	V	55.82	49.04	-7.67	48.15	41.37	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01(Above 1000 MHz, Vertical)

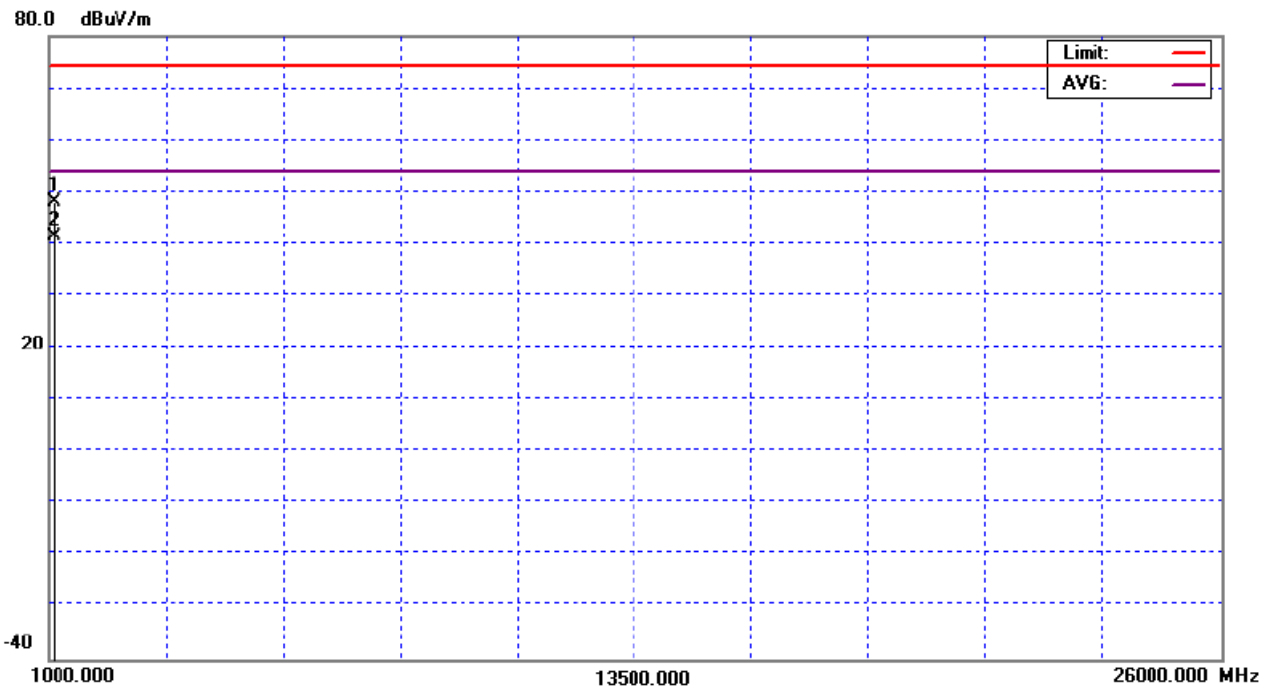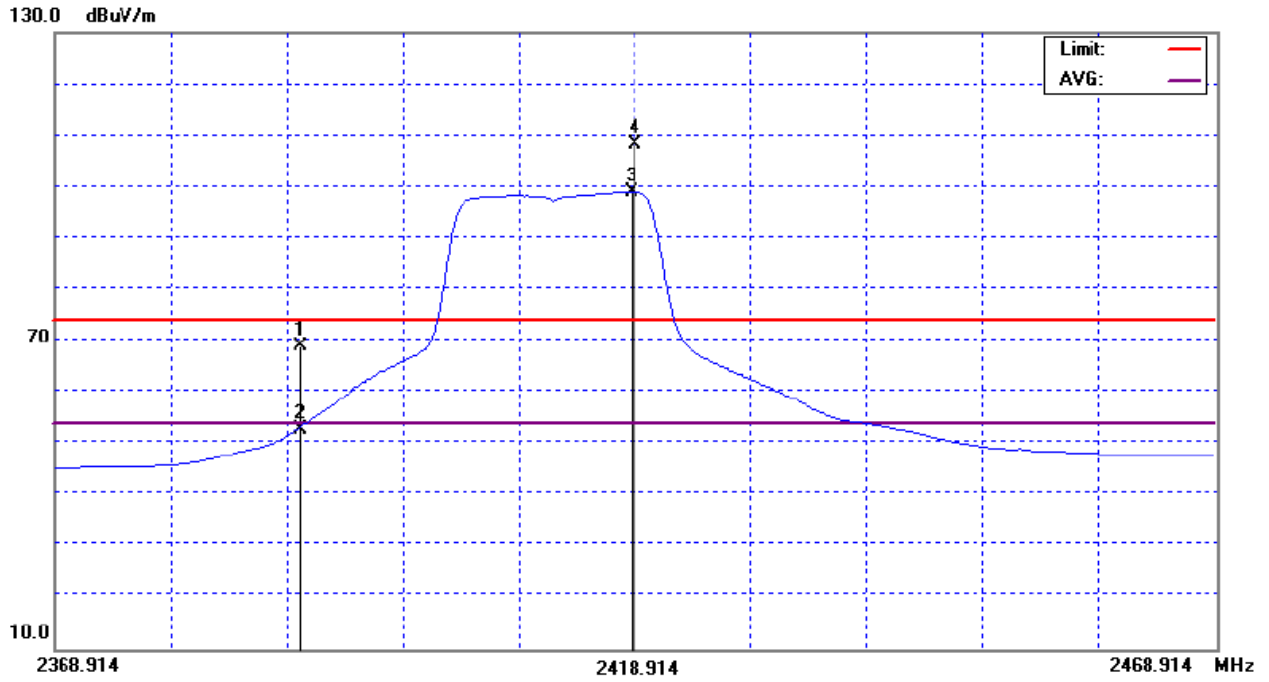



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH01 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2414.80	H	73.68	63.66	32.68	106.36	96.33			Y/F
2390.00	H	33.00	16.61	32.61	65.61	49.22	74.00	54.00	Y/E
1979.88	H	52.85	41.99	-3.09	49.76	38.90	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01(Above 1000 MHz, Horizontal)

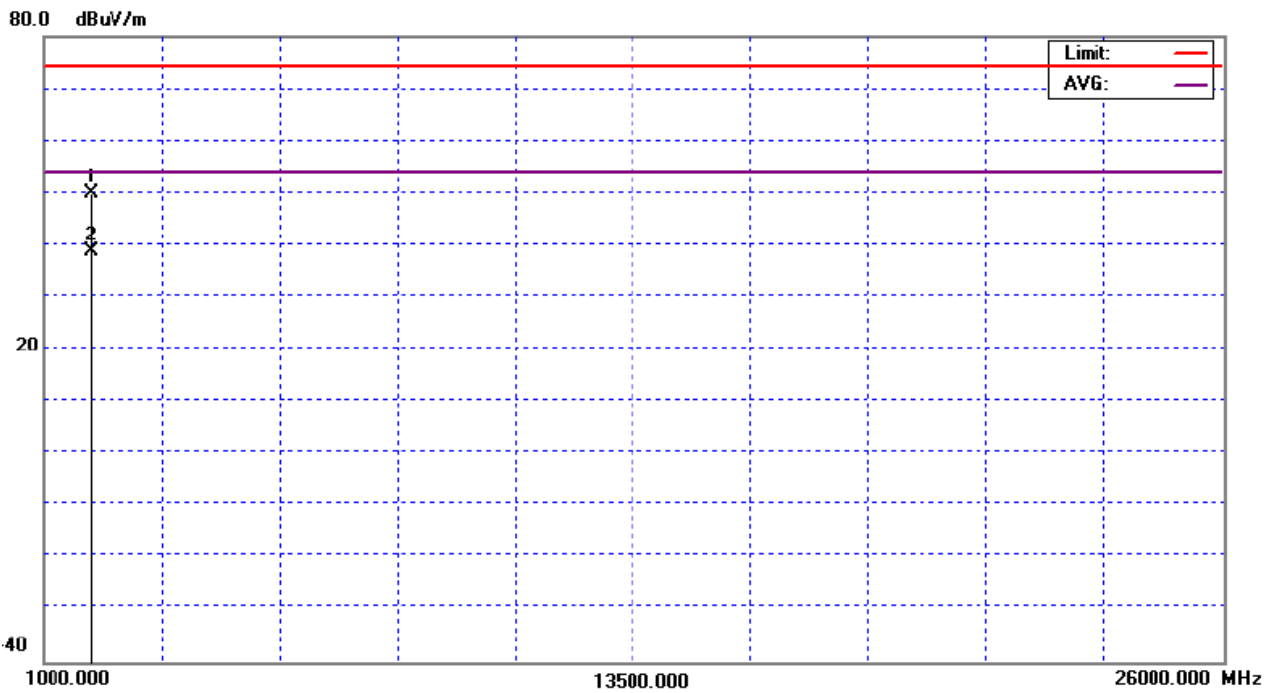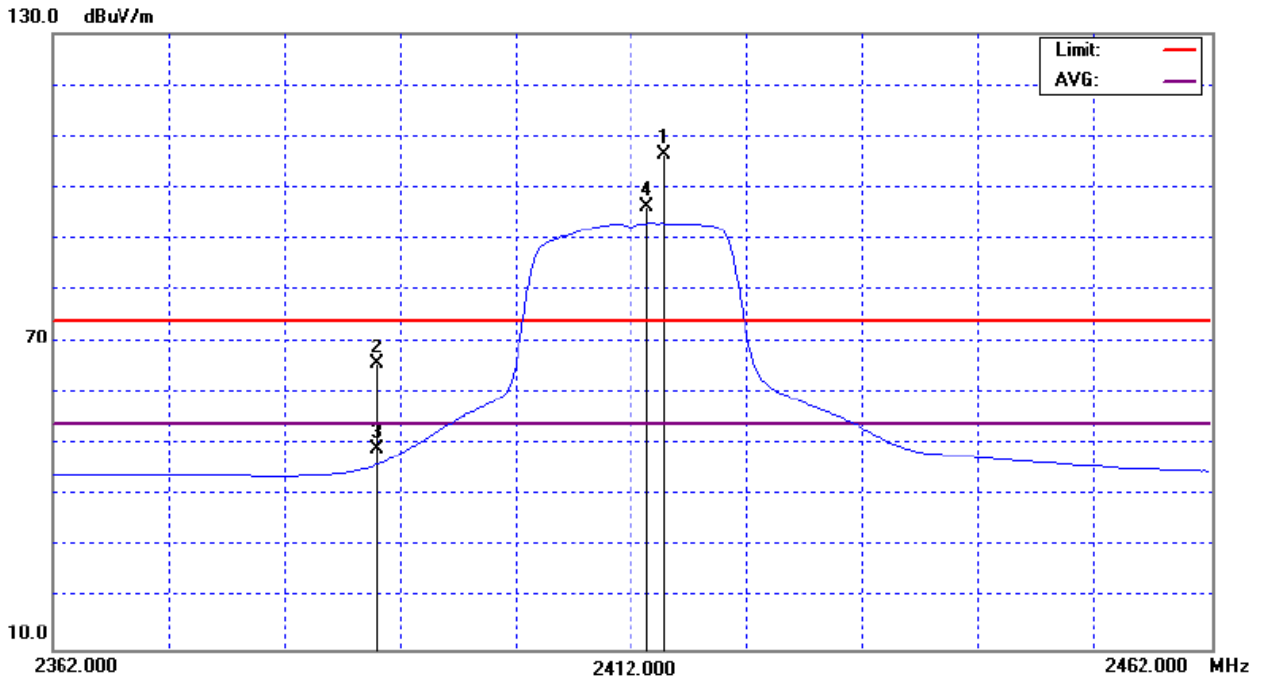



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH01 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	28.78	19.59	31.77	60.55	51.36	74.00	54.00	Y/E
2413.20	V	72.12	82.88	31.88	104.00	114.77			Y/F
2407.40	V	58.63	48.84	32.66	91.29	81.50	74.00	54.00	
2390.00	V	22.87	11.17	32.61	55.48	43.78	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH01(Above 1000 MHz, Vertical)

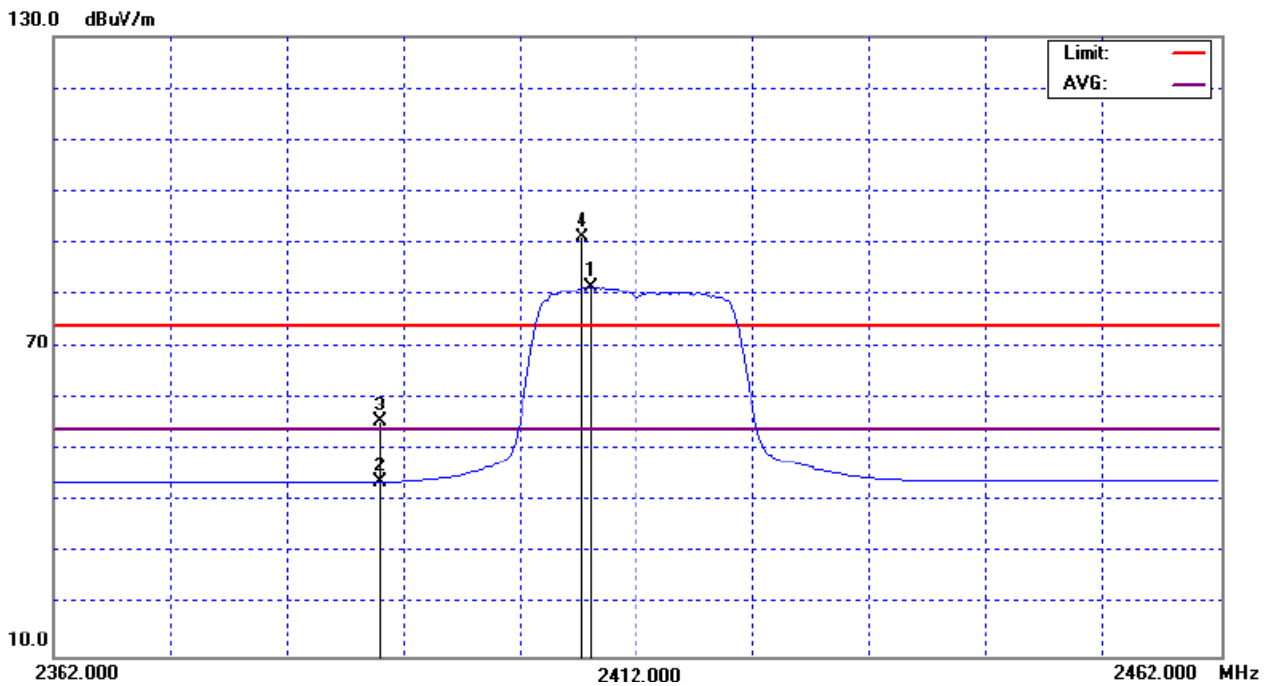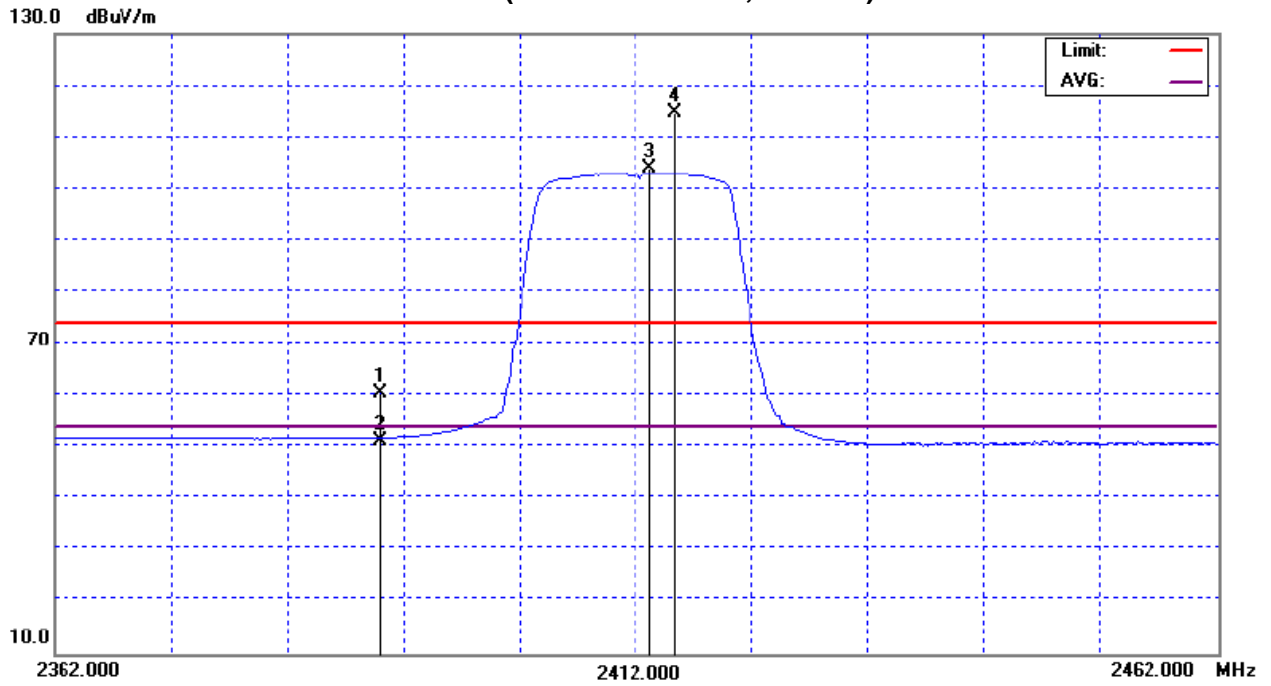



EUT :	airClient TOTAL 241	Model Name :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH01 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2408.20	H	58.63	48.84	32.66	91.29	81.50			Y/F
2390.00	H	22.87	11.17	32.61	55.48	43.78	74.00	54.00	Y/E
1080.00	H	46.39	44.05	-7.67	38.72	36.38	74.00	54.00	
1260.02	H	51.26	48.60	-6.85	44.41	41.75	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency .“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

TX CH01(Above 1000 MHz, Horizontal)

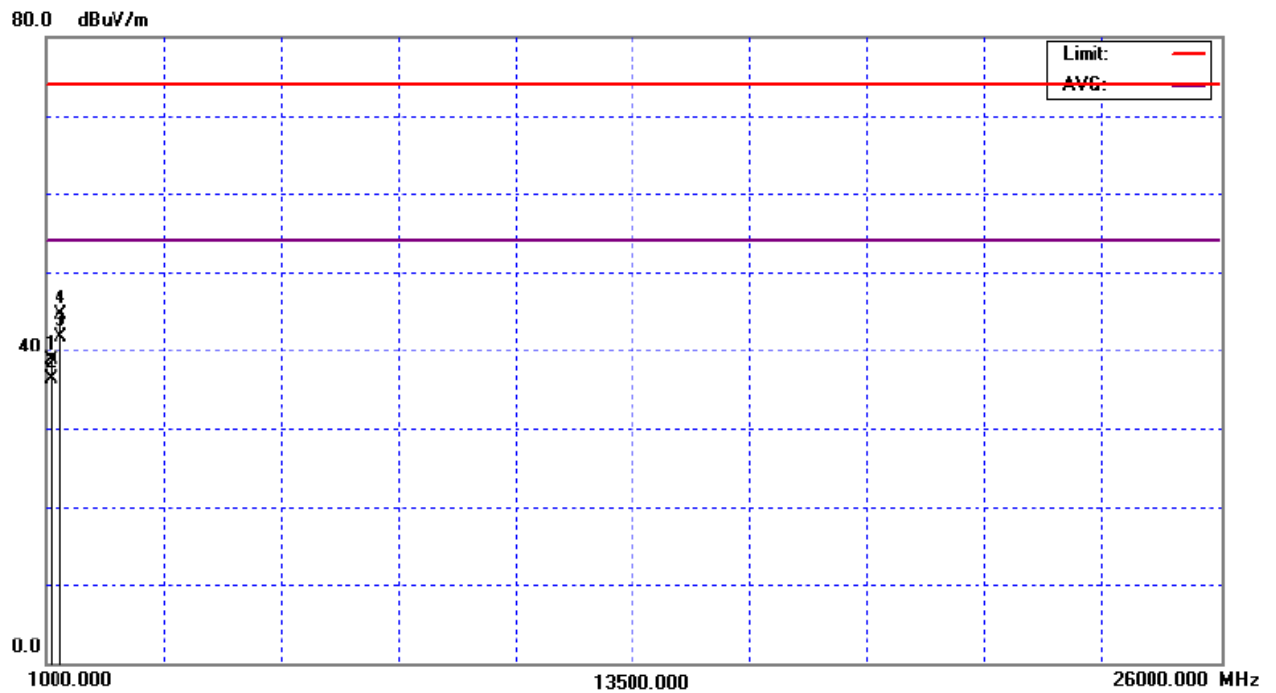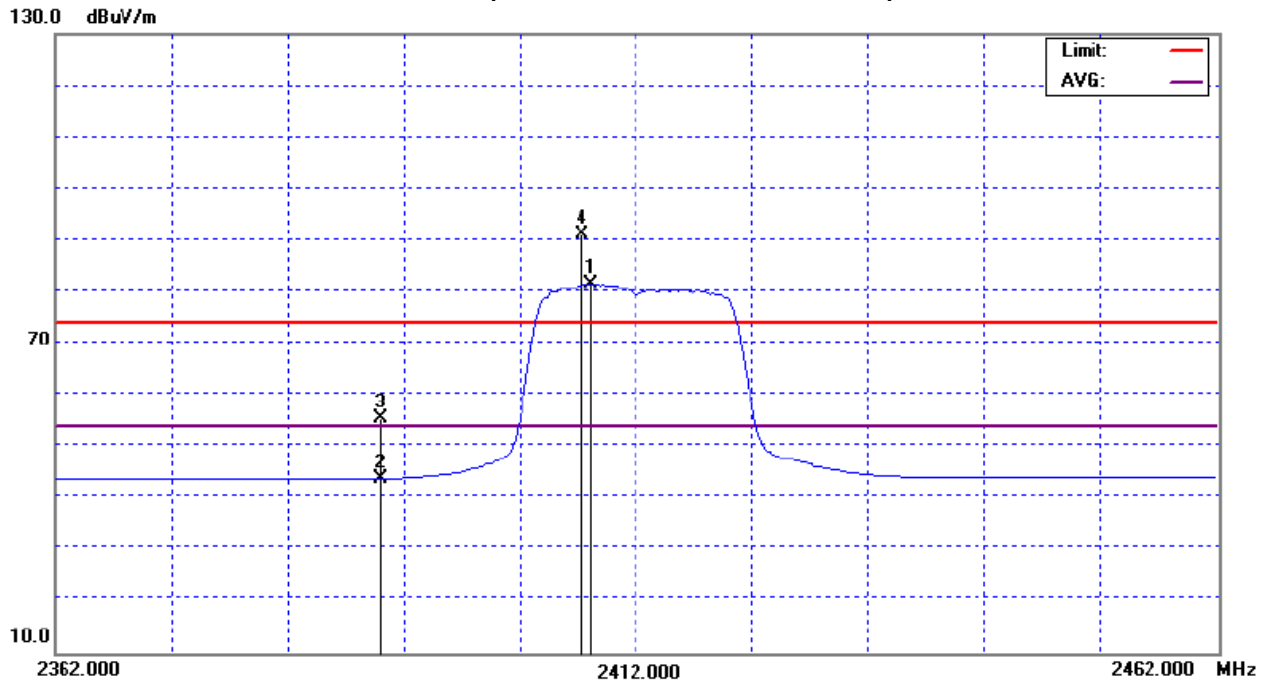



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH06 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2441.80	V	74.97	65.28	32.75	107.72	98.03			Y/F
1080.15	V	54.41	47.52	-7.67	46.74	39.85	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH06 (Above 1000 MHz, Vertical)

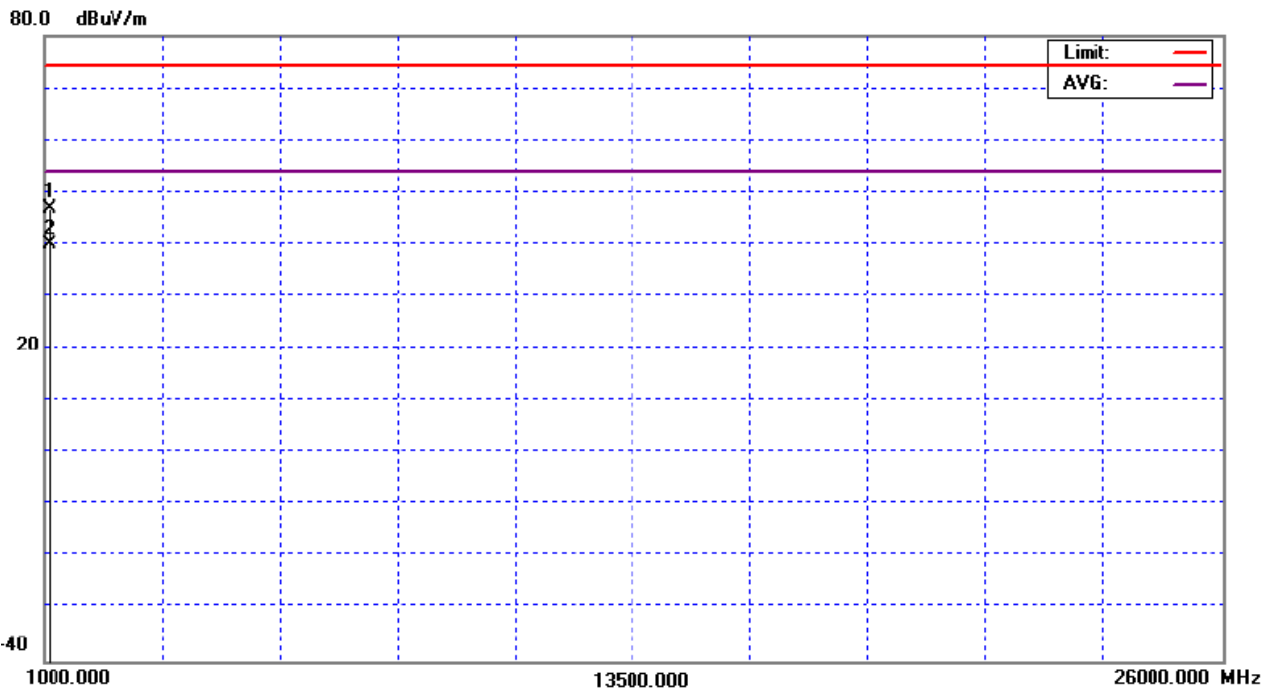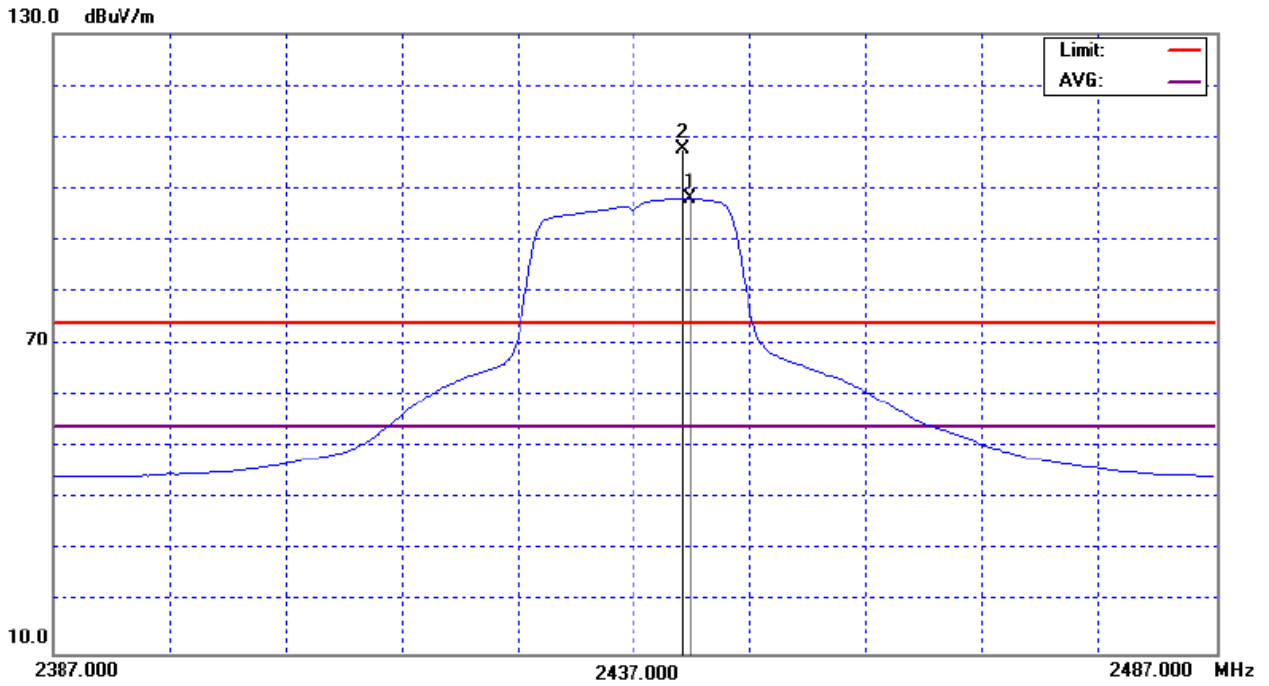



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH06 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2441.80	H	74.97	65.28	32.75	107.88	98.03			Y/F
4817.10	H	46.74	31.26	4.24	50.98	35.50	74.00	54.00	
1980.28	H	54.85	47.35	-3.09	51.76	44.26	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH06 (Above 1000 MHz, Horizontal)

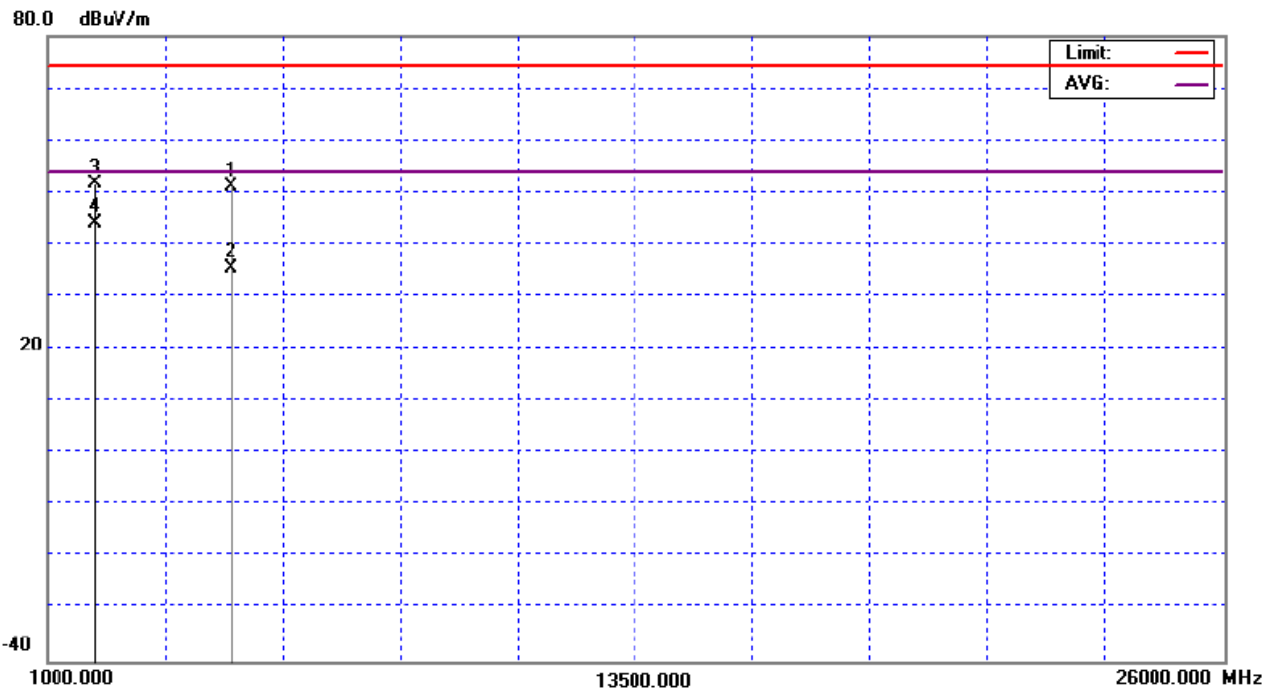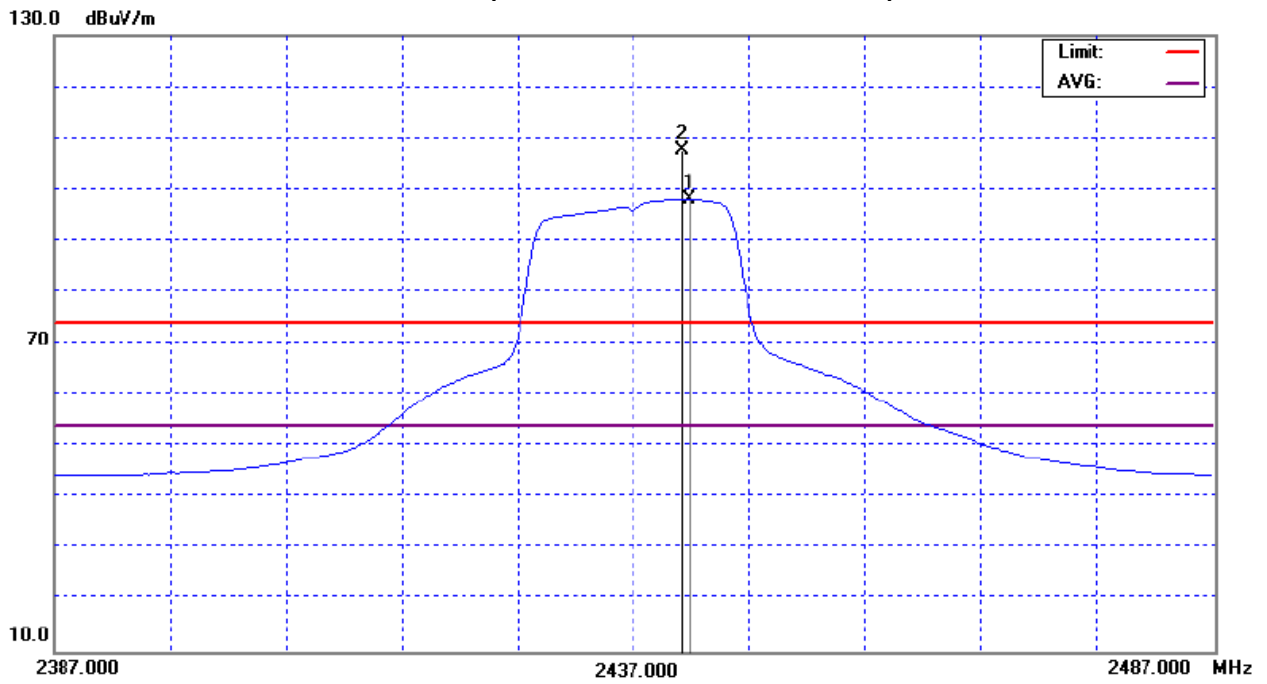



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH06 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2440.20	V	84.44	74.15	32.01	116.46	106.16			Y/F
1079.84	V	50.43	43.80	-7.67	42.76	36.13	74.00	54.00	
1260.10	V	47.68	43.28	-6.85	40.83	36.43	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency .“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 “X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

TX CH06 (Above 1000 MHz, Vertical)

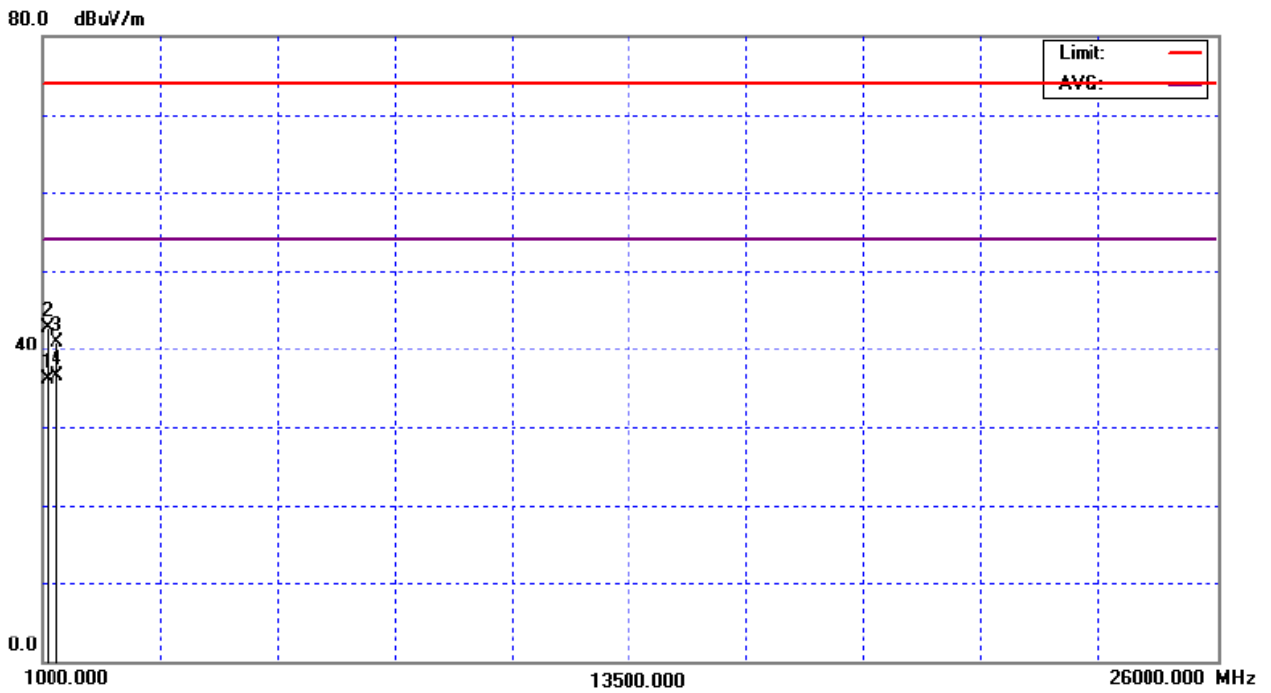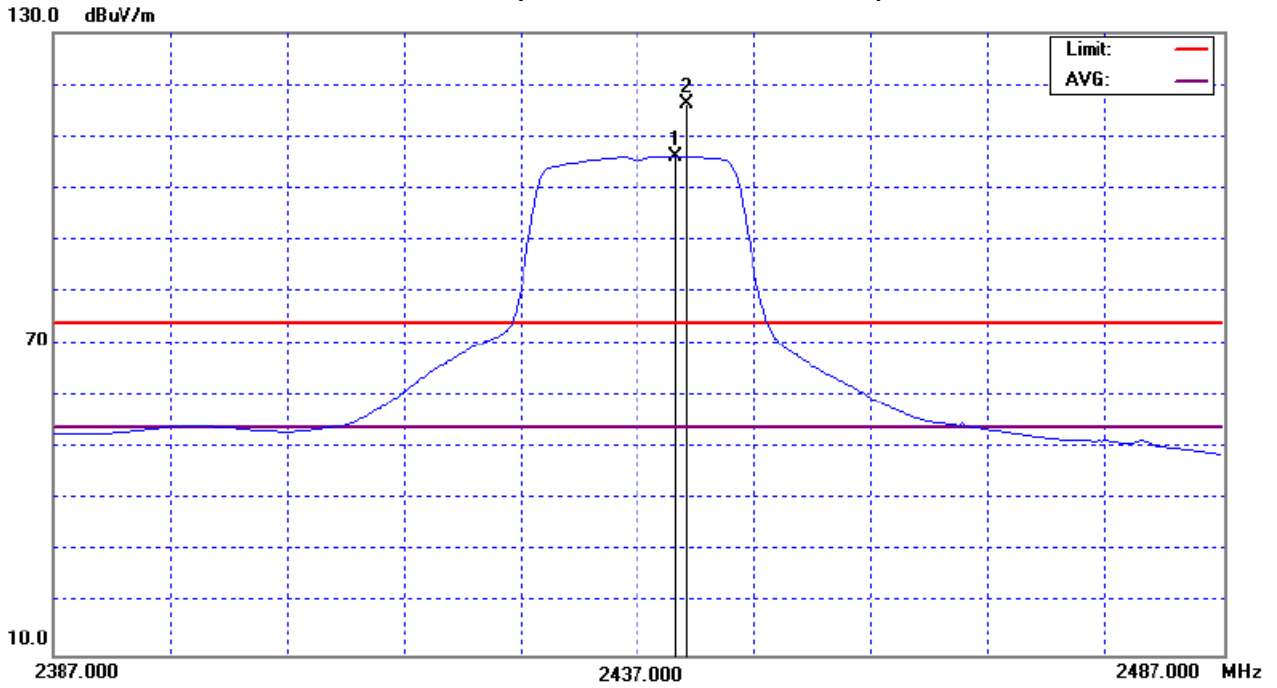



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH06 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2444.00	H	62.85	53.14	32.02	94.87	85.17			Y/F
1056.06	H	52.20	50.39	-7.78	44.42	42.63	74.00	54.00	
1080.09	H	51.59	46.15	-7.67	43.92	38.48	74.00	54.00	
1979.67	H	50.02	41.48	-3.09	46.93	38.39	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『 Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH06 (Above 1000 MHz, Horizontal)

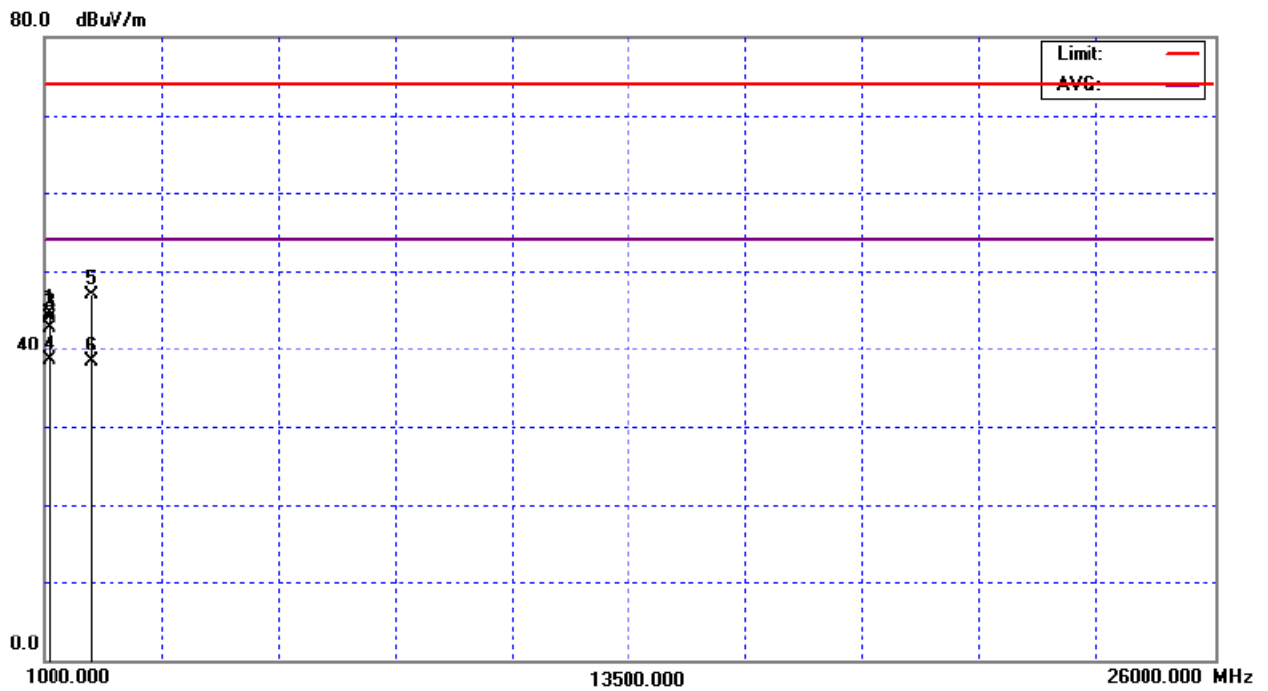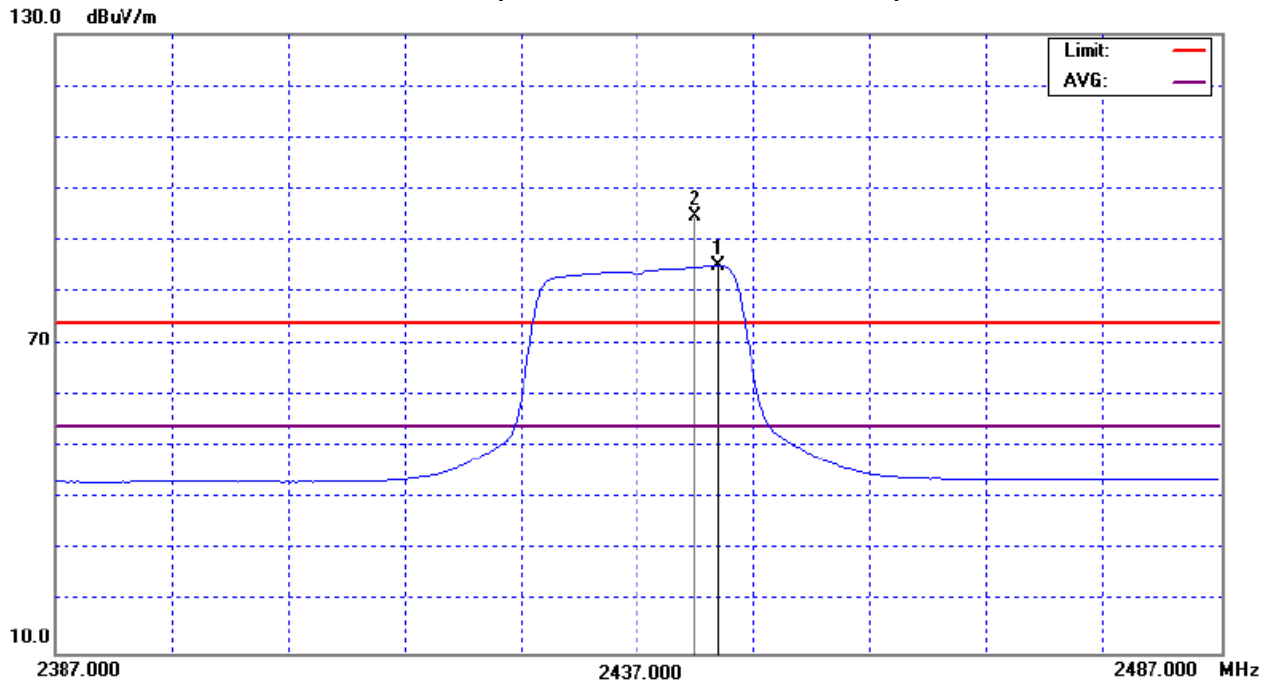



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH11 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2460.80	V	77.17	67.06	32.80	109.97	99.86			Y/F
2483.50	V	34.60	18.82	32.86	67.46	51.68	74.00	54.00	Y/E
1080.23	V	55.32	48.29	-7.67	47.65	40.62	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Vertical)

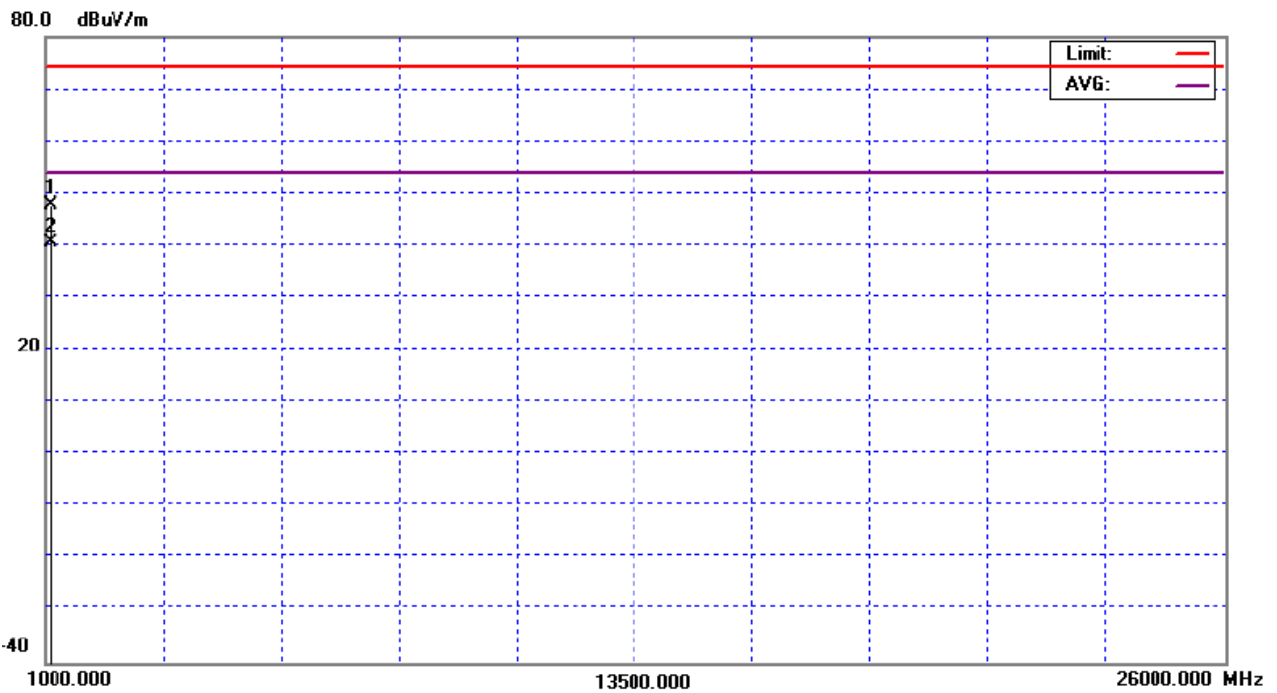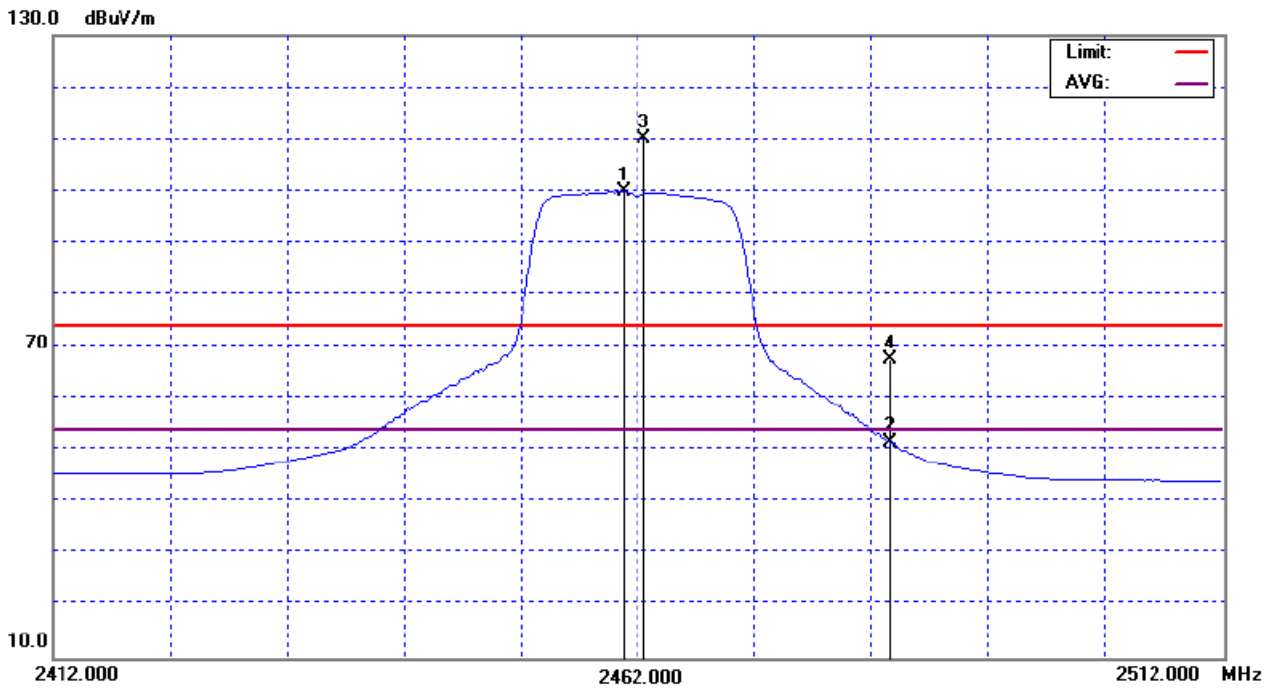



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH11 (EXT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2458.80	H	73.50	63.05	32.79	106.29	95.84			Y/F
2483.50	H	30.79	16.59	32.86	63.65	49.45	74.00	54.00	Y/E
1080.31	H	50.61	45.54	-7.67	42.94	37.87	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Horizontal)

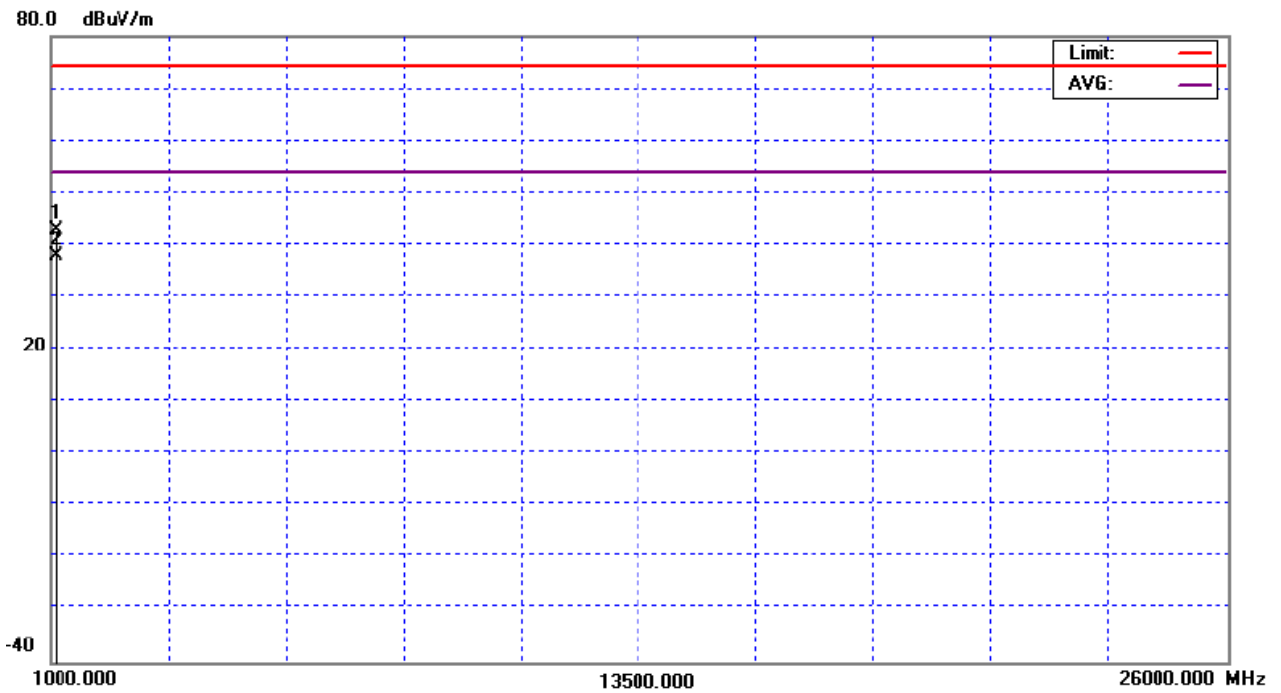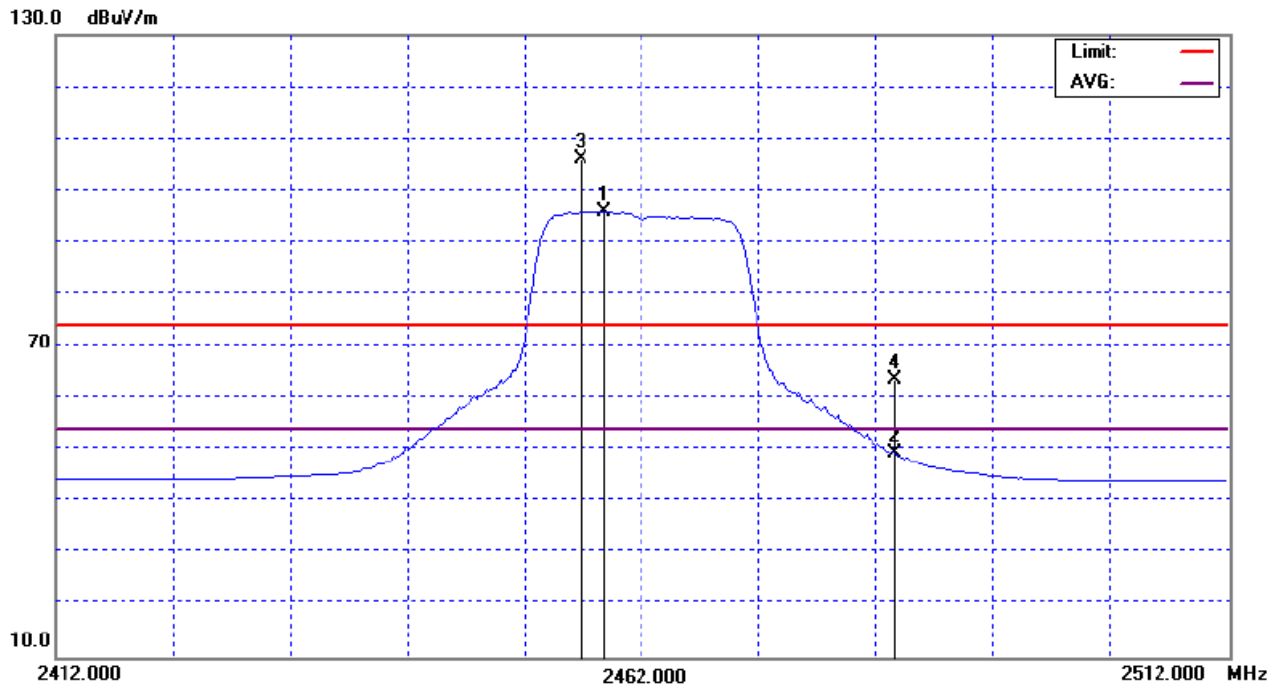



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH11 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2460.40	V	84.24	73.72	32.10	116.34	105.82			Y/F
2483.50	V	36.74	20.98	32.22	68.96	53.20	74.00	54.00	Y/E
1056.02	V	52.53	48.85	-7.78	44.75	41.07	74.00	54.00	
1080.00	V	50.02	42.23	-7.67	42.35	34.56	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Vertical)

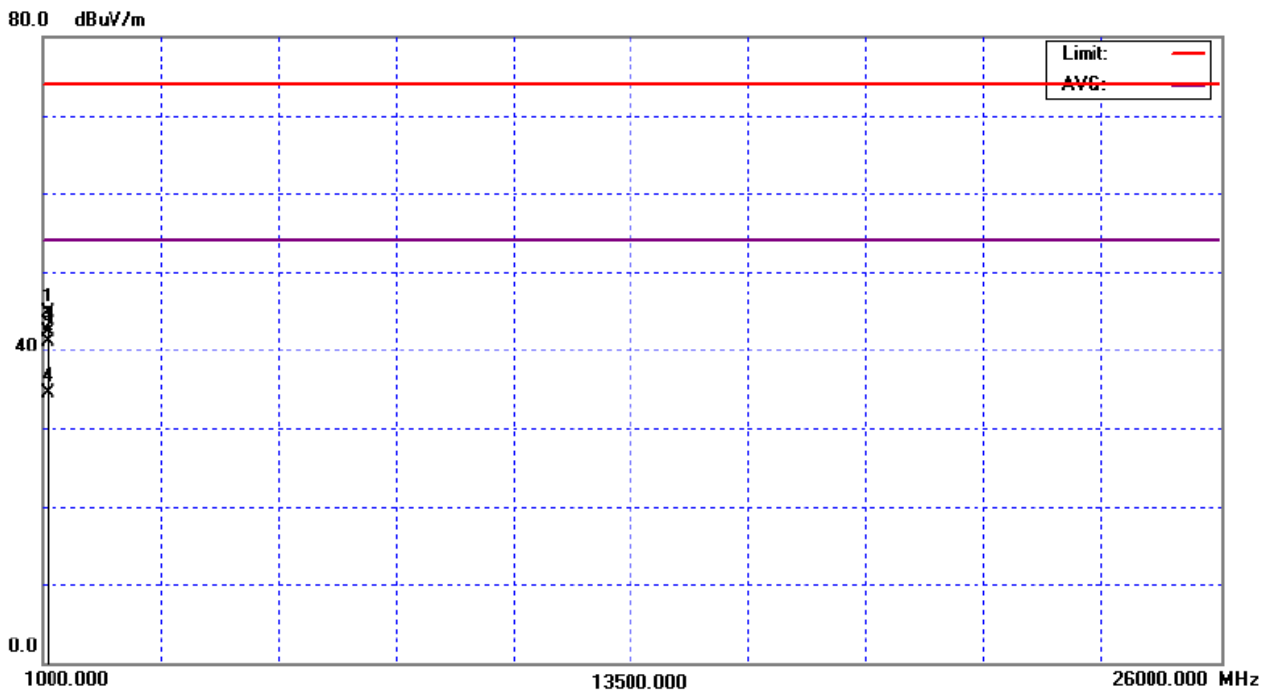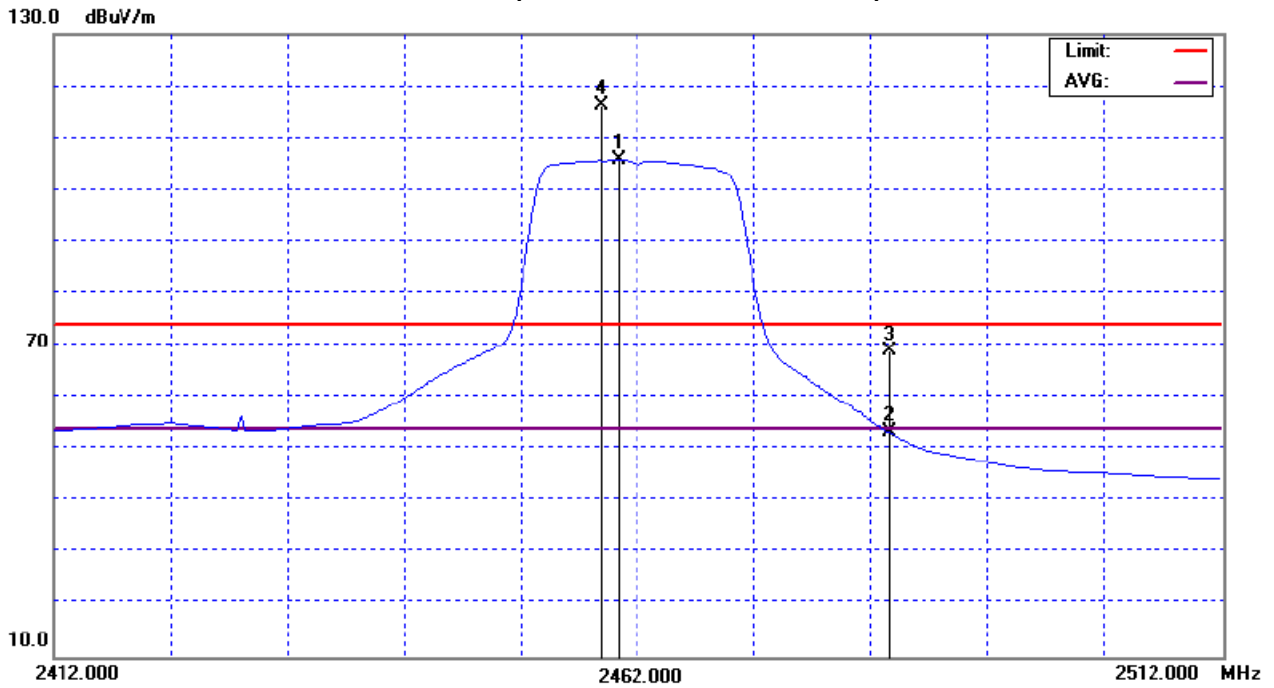



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	983 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 11G mode CH11 (INT antenna)		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2460.60	H	62.20	52.52	32.10	94.30	84.63			Y/F
2483.50	H	21.90	11.56	32.22	54.12	43.78	74.00	54.00	Y/E
1059.73	H	52.04	48.85	-7.77	45.19	41.08	74.00	54.00	
1080.00	H	50.04	42.23	-7.67	42.37	34.56	74.00	54.00	

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

TX CH11 (Above 1000 MHz, Horizontal)

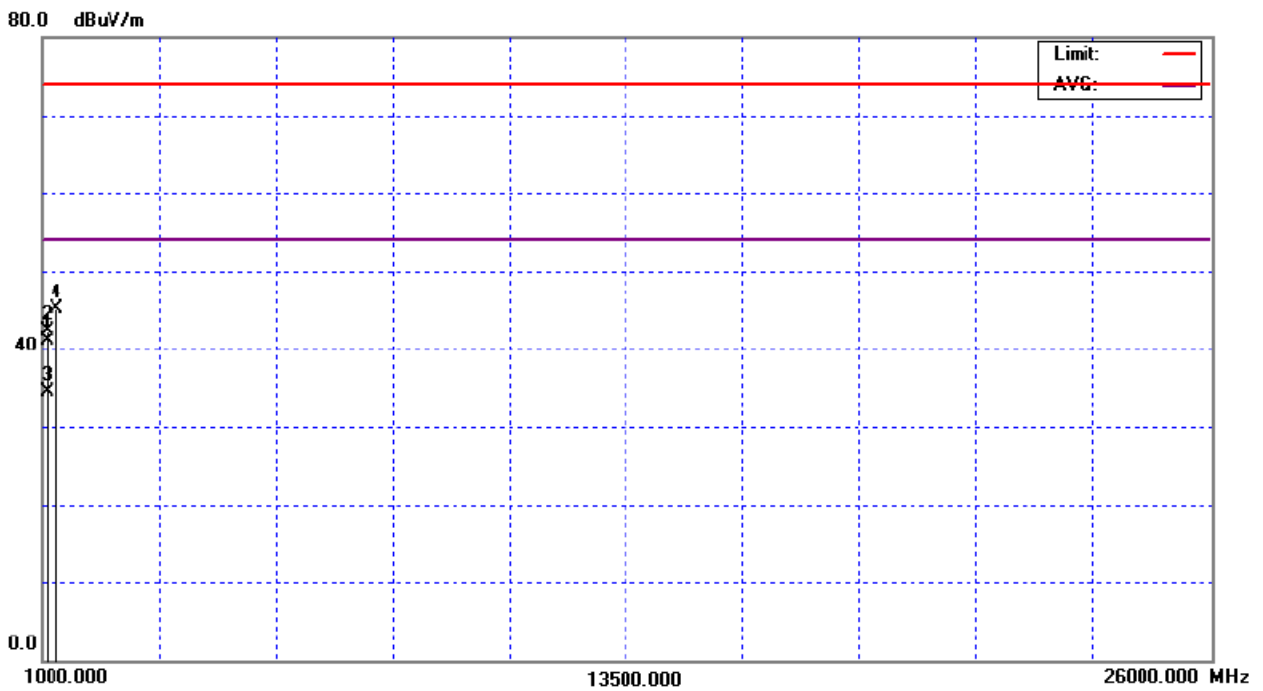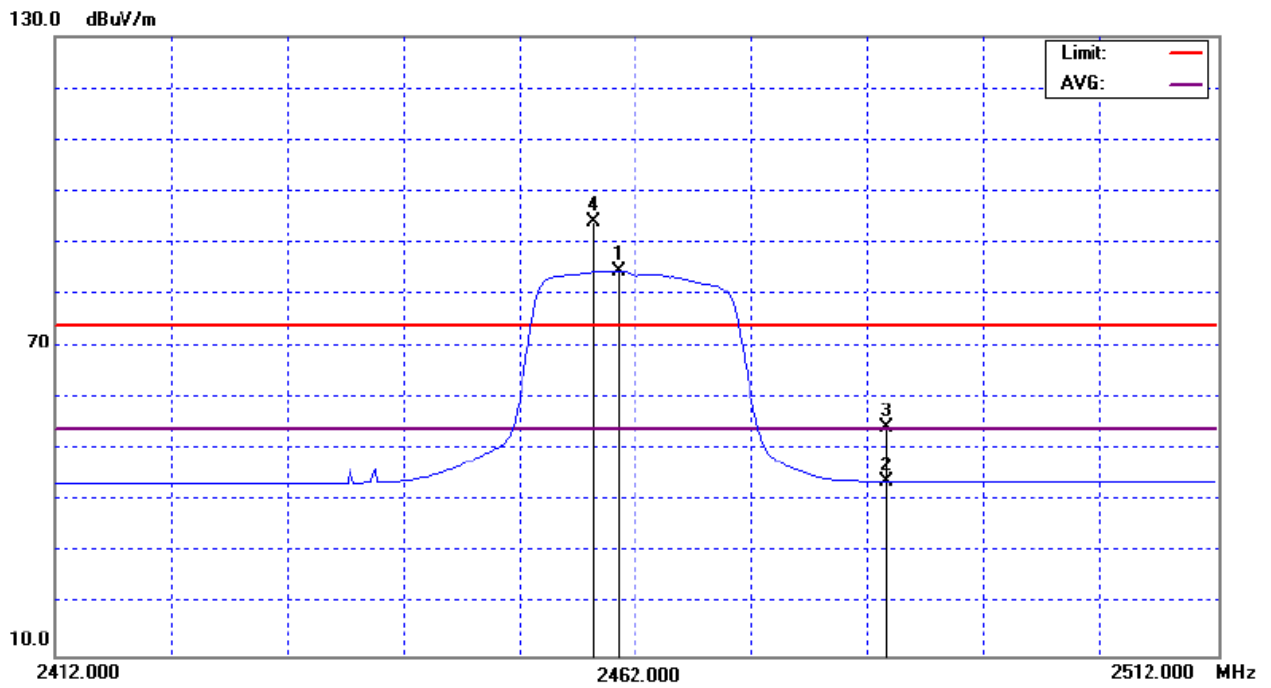

4.2.9 TEST RESULTS (Restricted Bands Requirements)


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH 01/11(Vertical EXT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11b (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	28.82	20.52	32.61	61.43	53.13	74.00	54.00	CH01
2483.50	V	26.94	19.08	32.86	59.80	51.94	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11B mode CH01 (Restricted Bands Requirements, Vertical)-EXT antenna

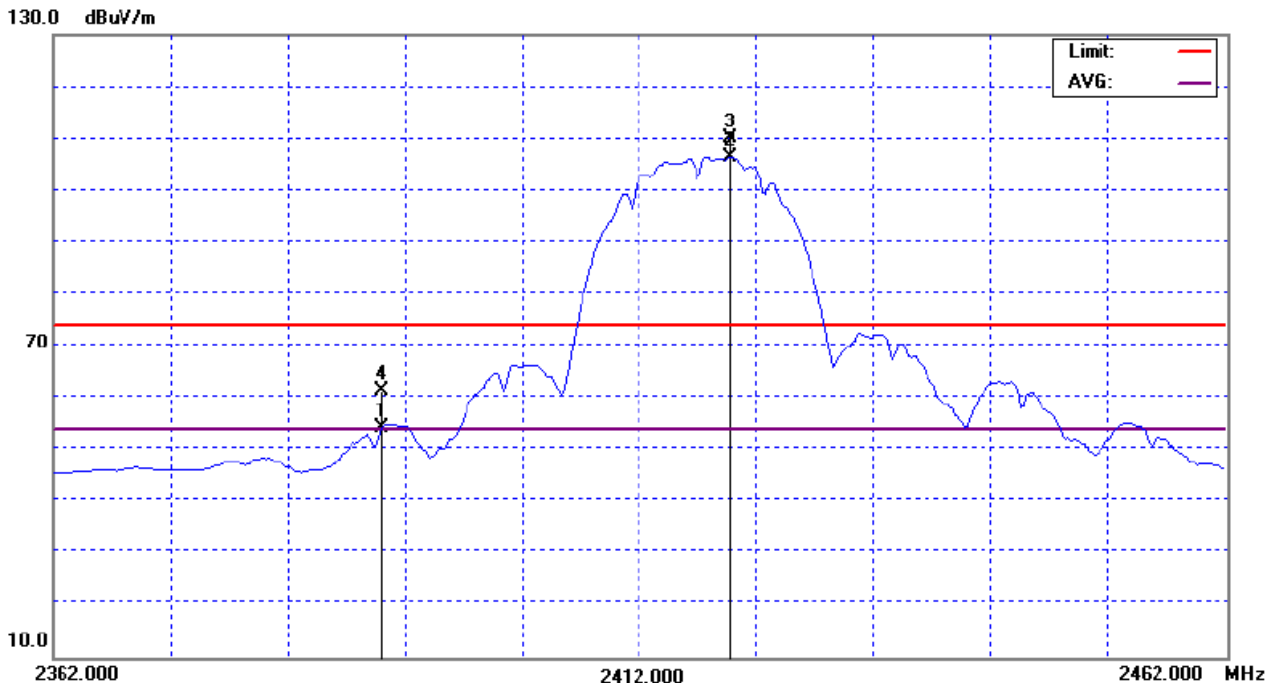

11B mode CH11 (Restricted Bands Requirements, Vertical)-EXT antenna

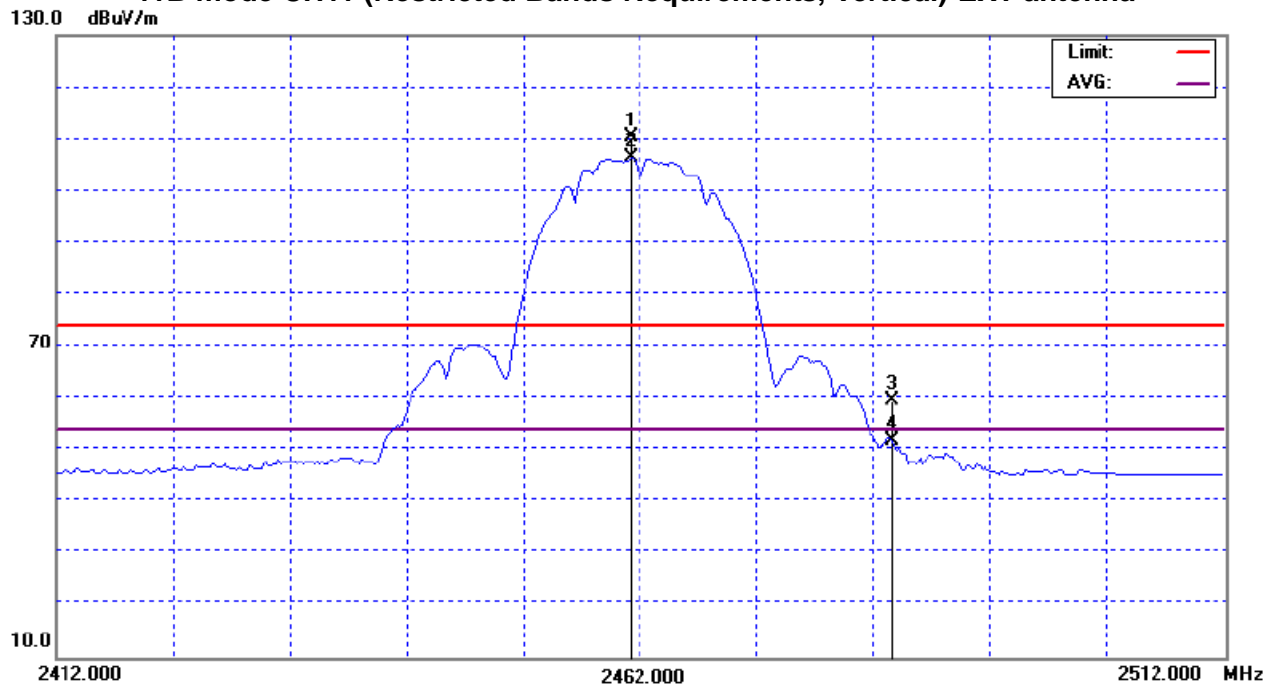


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH 01/11 (Horizontal EXT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11b (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	25.75	18.76	32.61	58.36	51.37	74.00	54.00	CH01
2483.50	H	26.66	16.69	32.86	59.52	49.55	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11B mode CH01 (Restricted Bands Requirements, Horizontal)-EXT antenna

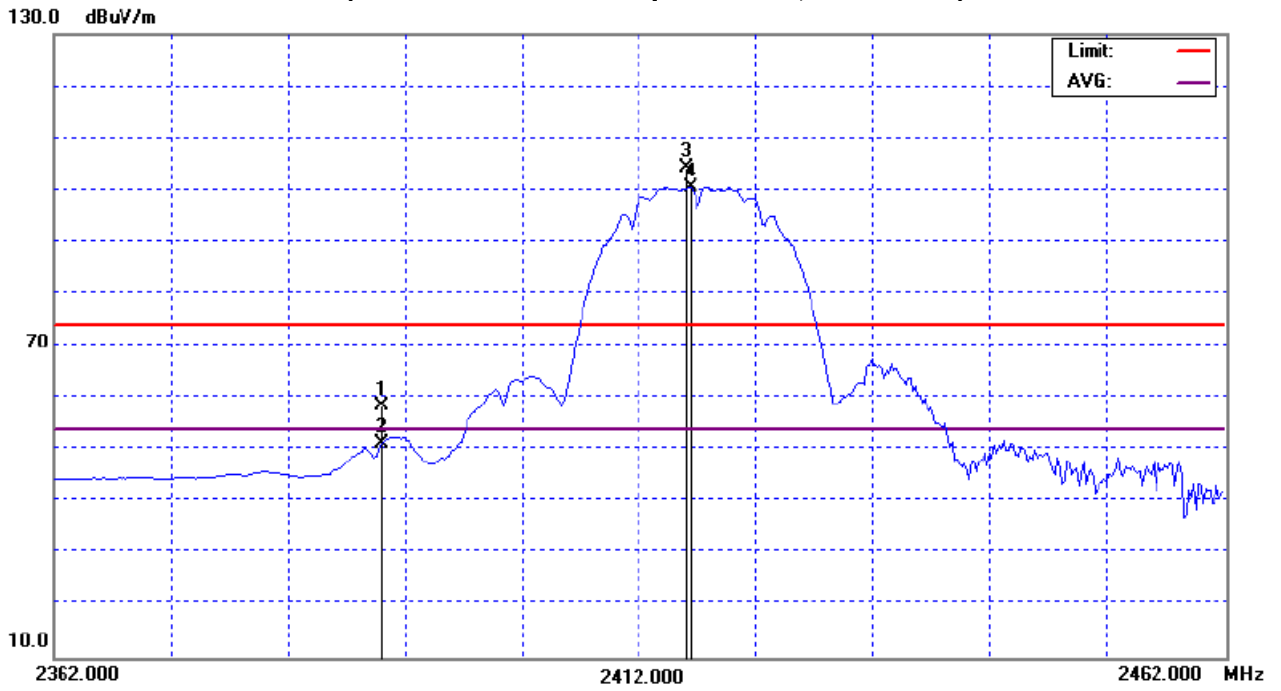

11B mode CH11 (Restricted Bands Requirements, Horizontal)-EXT antenna

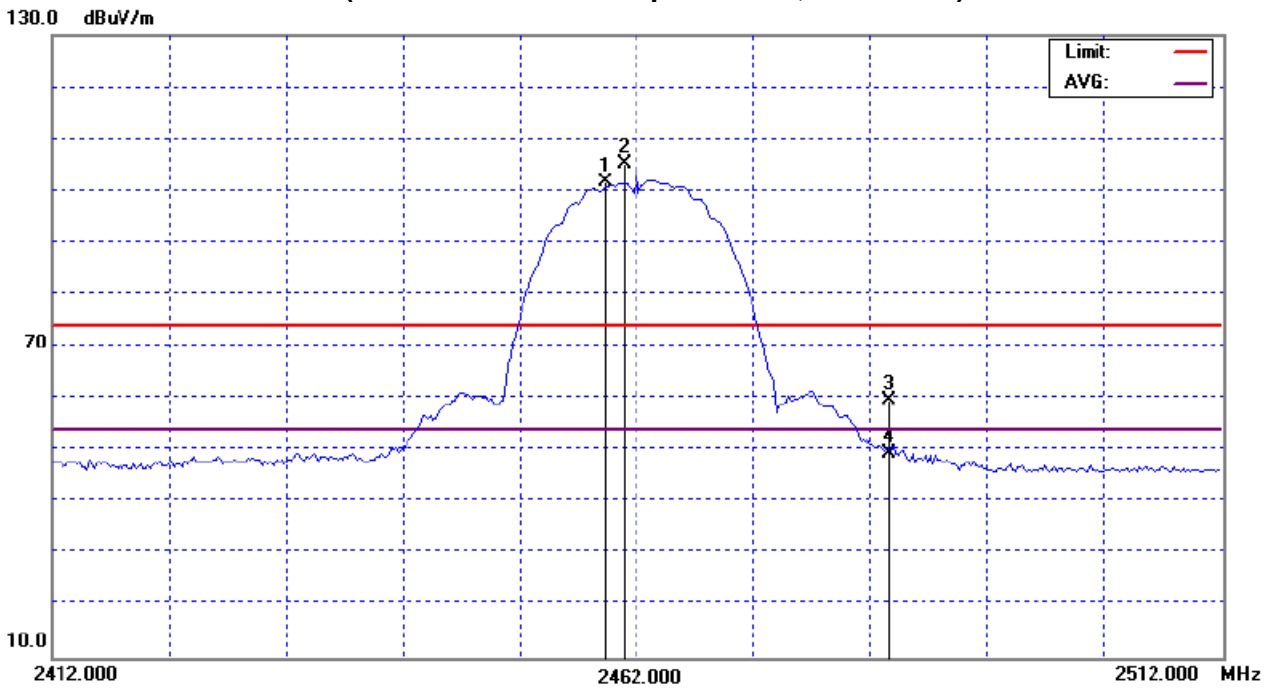


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH 01/11 (Vertical EXT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11g (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	36.47	20.26	32.61	69.08	52.87	74.00	54.00	CH01
2483.50	V	34.60	18.82	32.86	67.46	51.68	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11G mode CH 01 (Restricted Bands Requirements, Vertical)-EXT antenna

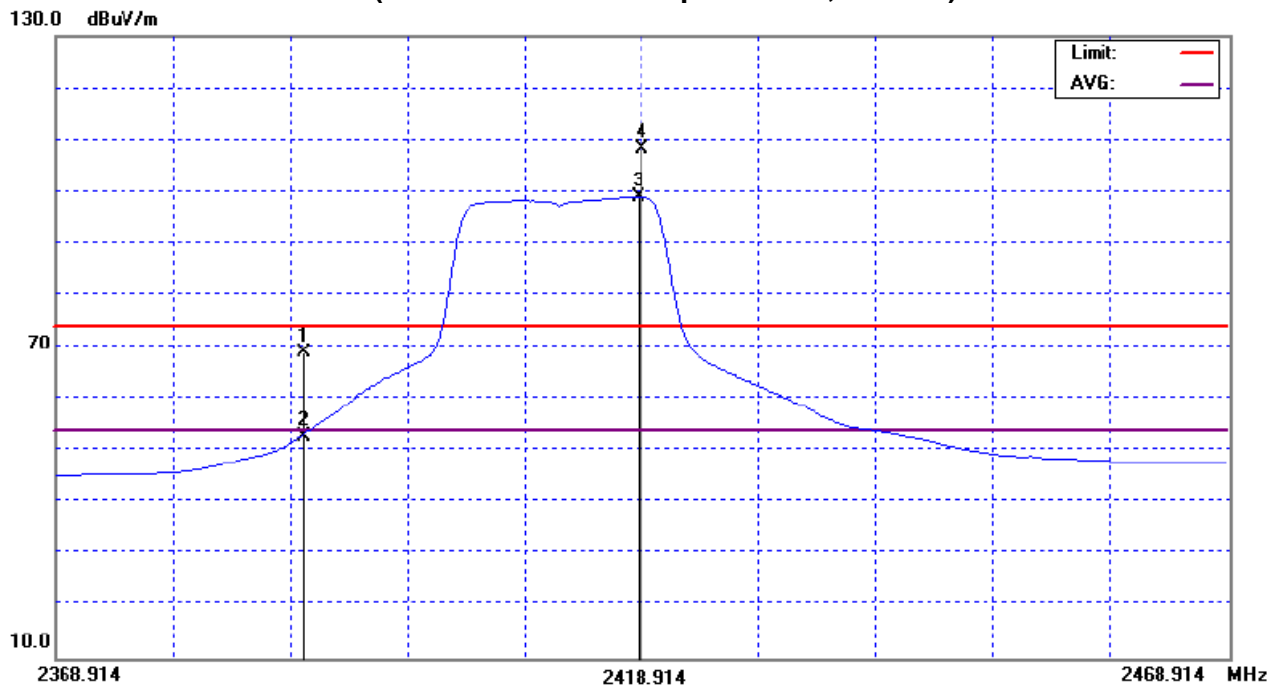

11G mode CH 11 (Restricted Bands Requirements, Vertical)-EXT antenna

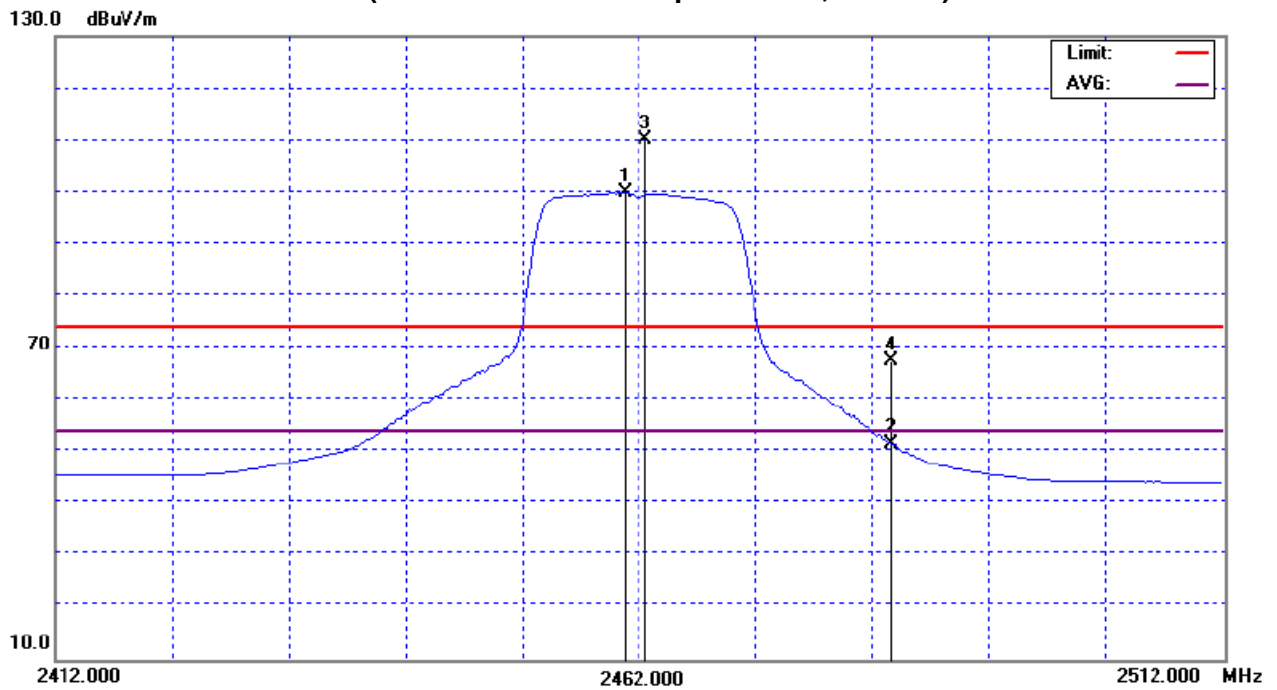


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH 01/11(Horizontal EXT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11g (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	33.00	16.61	32.61	65.61	49.22	74.00	54.00	CH01
2483.50	H	30.79	16.59	32.86	63.65	49.45	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11G mode CH 01 (Restricted Bands Requirements, Horizontal)-EXT antenna

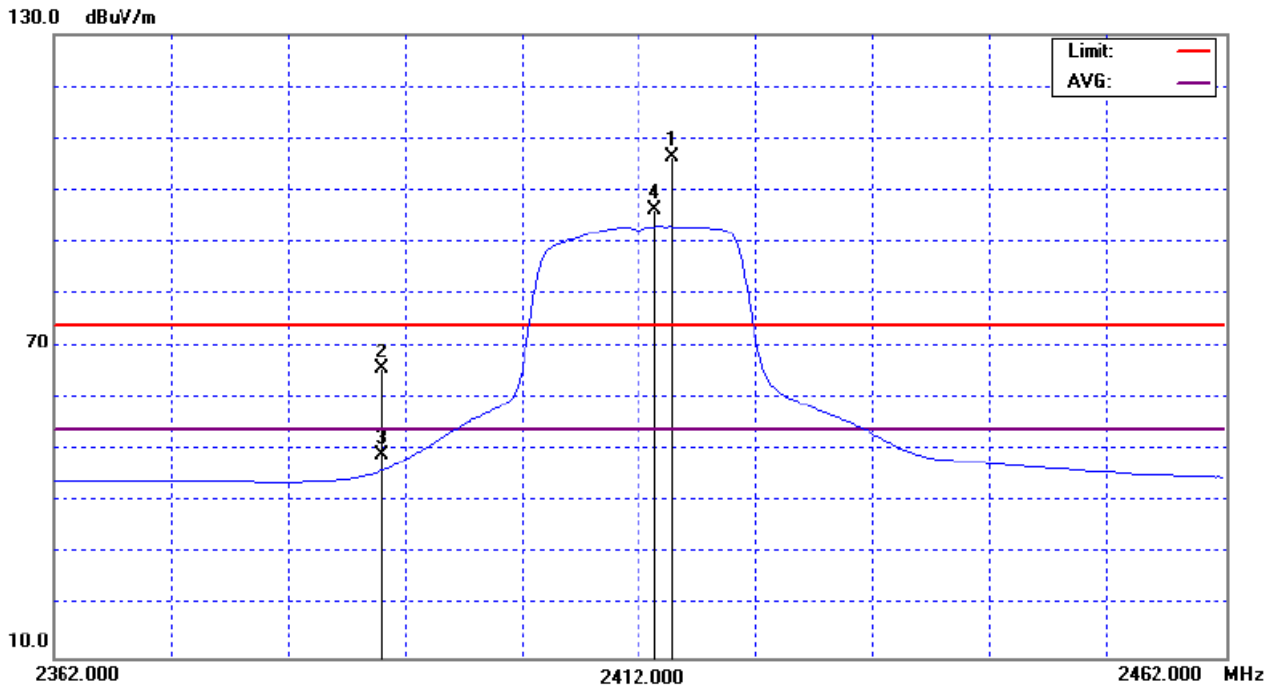

11G mode CH 11 (Restricted Bands Requirements, Horizontal)-EXT antenna

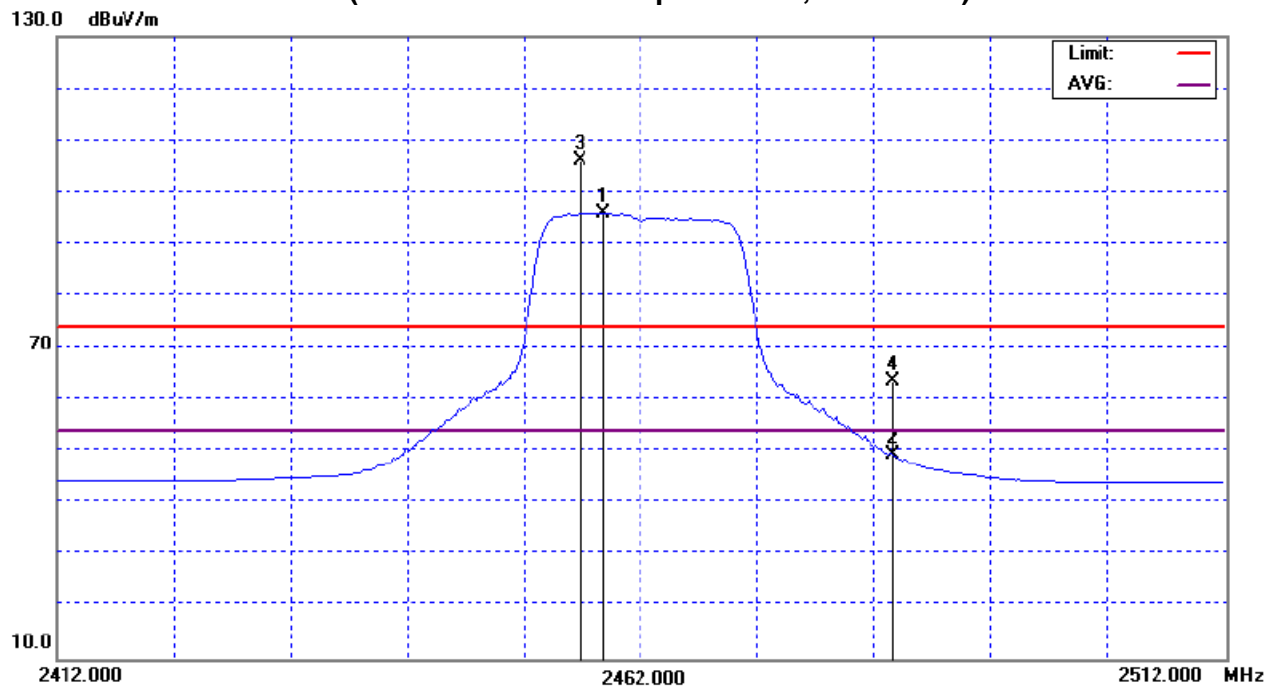


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH 01/11(Vertical INT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11b (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2379.60	V	38.69		31.72	70.41		74.00	54.00	CH01
2375.00	V		21.77	31.70		53.47	74.00	54.00	CH01
2483.50	V	28.23	18.81	32.22	60.45	51.03	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11B mode CH 01 (Restricted Bands Requirements, Vertical)-INT antenna

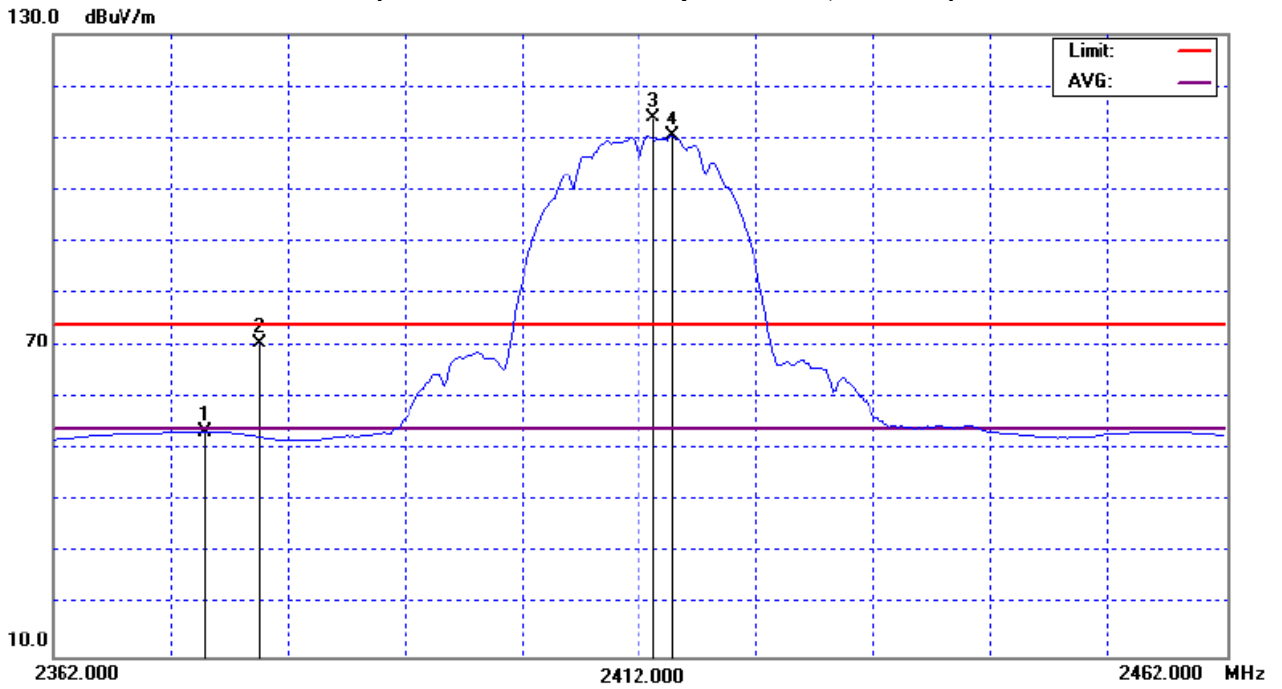

11B mode CH 01 (Restricted Bands Requirements, Vertical)-INT antenna

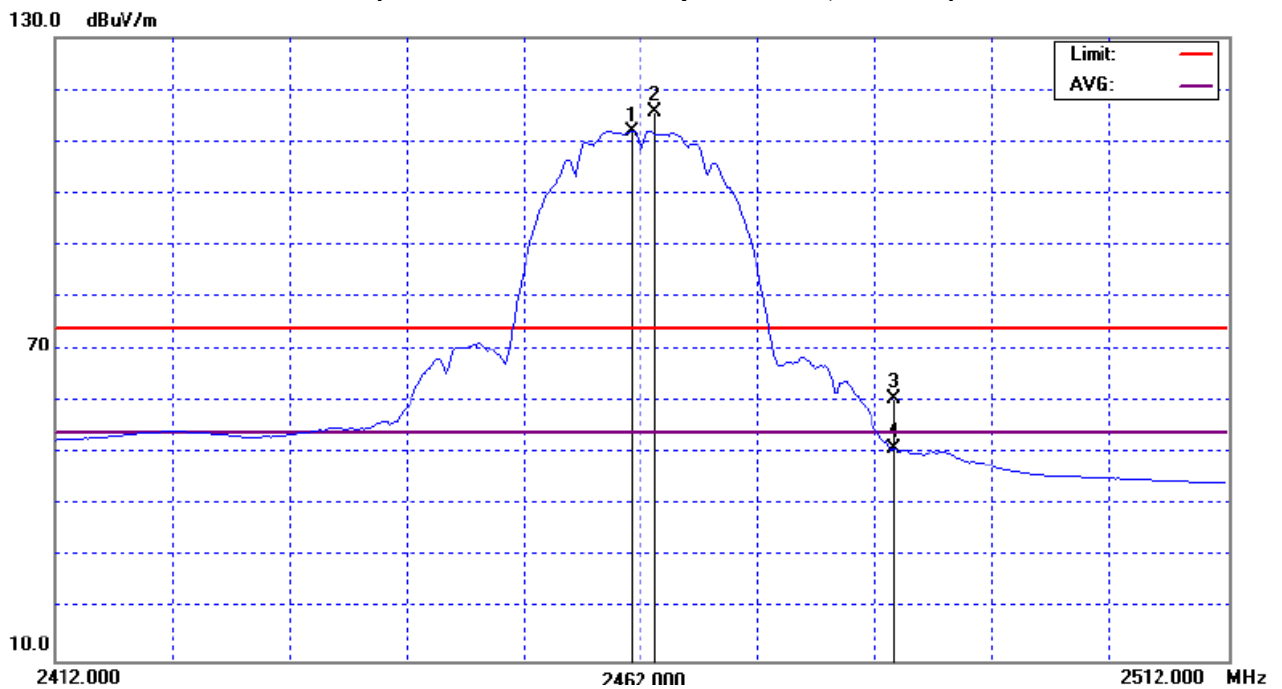


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH 01/11(Horizontal INT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11b (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	21.49	11.52	31.77	53.26	43.29	74.00	54.00	CH01
2483.50	H	22.52	11.54	32.22	54.74	43.76	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11B mode CH01 (Restricted Bands Requirements, Horizontal)-INT antenna

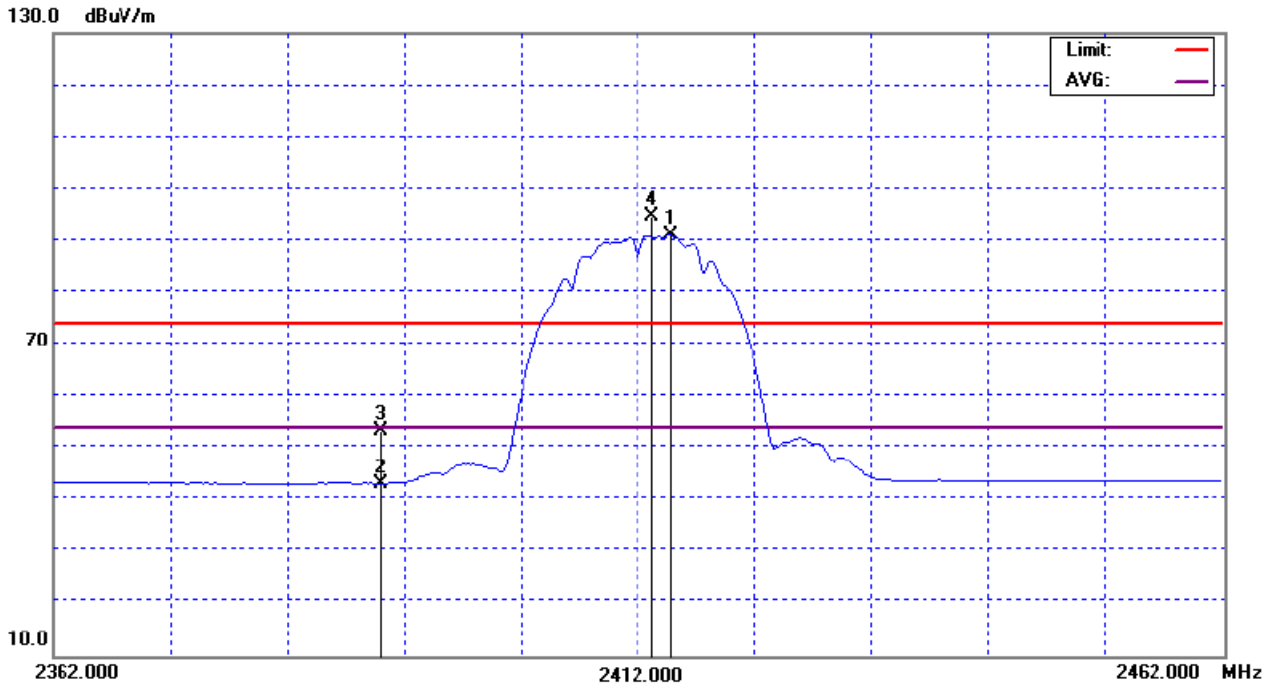

11B mode CH11 (Restricted Bands Requirements, Horizontal)-INT antenna

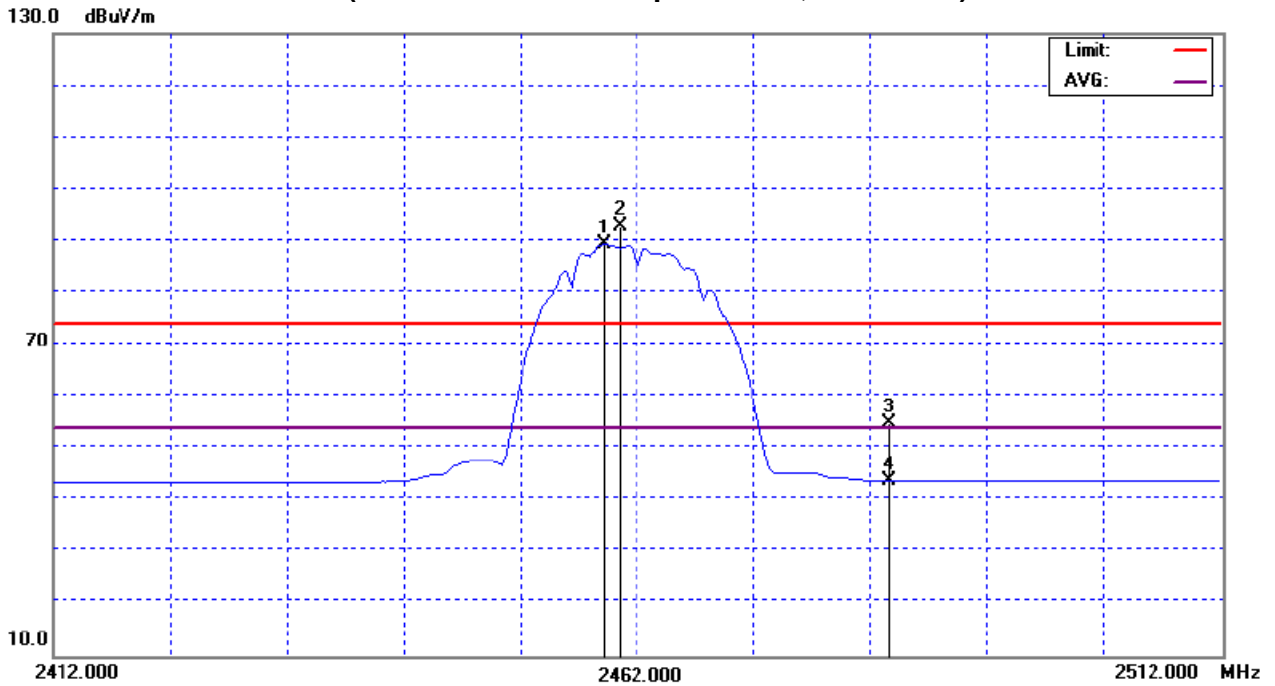


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	26 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH01/11 (Vertical INT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11g (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	28.78	19.59	31.77	60.55	51.36	74.00	54.00	CH01
2483.50	V	36.74	20.98	32.22	68.96	53.20	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11G mode CH 01 (Restricted Bands Requirements, Vertical)-INT antenna

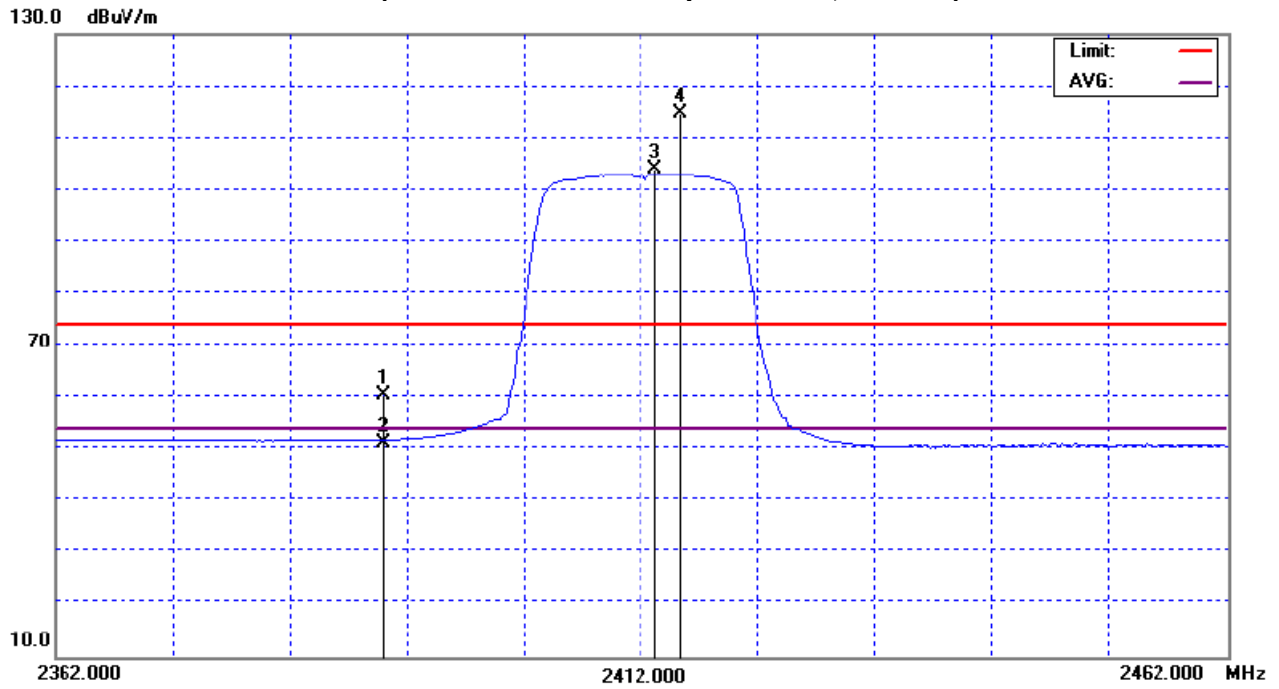

11G mode CH 11 (Restricted Bands Requirements, Vertical)-INT antenna

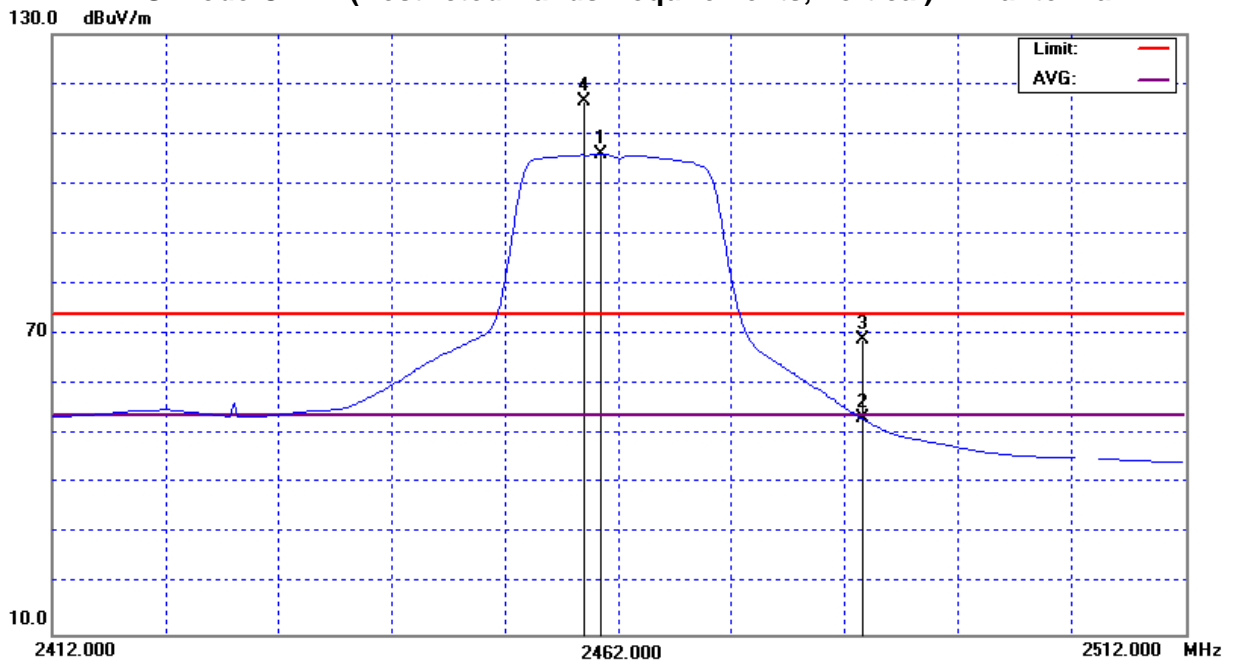


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH 01/11(Horizontal INT antenna)		
Note :	<p>The emission of the carrier radiated field strength is measured for 802.11g (Peak and AV) as following:</p> <ol style="list-style-type: none"> 1. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	22.87	11.17	32.61	55.48	43.78	74.00	54.00	CH01
2483.50	H	21.90	11.56	32.22	54.12	43.78	74.00	54.00	CH11


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

11G mode CH01 (Restricted Bands Requirements, Horizontal)-INT antenna

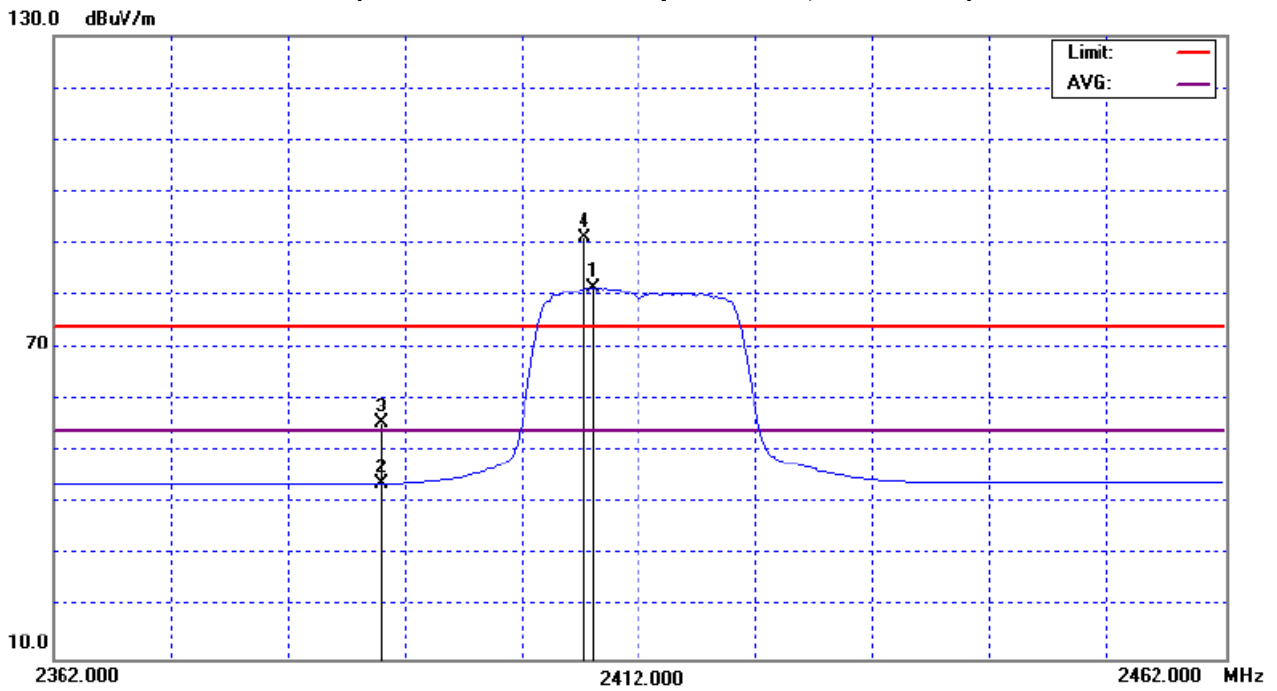

11G mode CH11 (Restricted Bands Requirements, Horizontal)-INT antenna

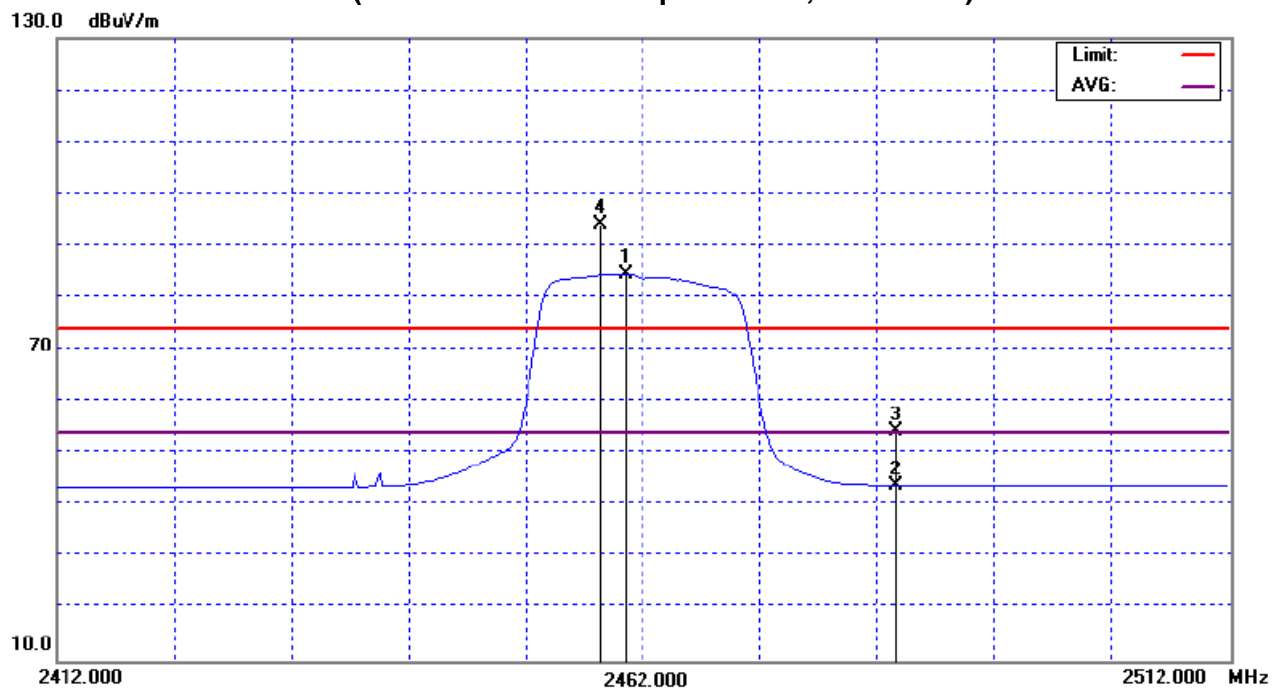

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 08, 2008

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 20 ms.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

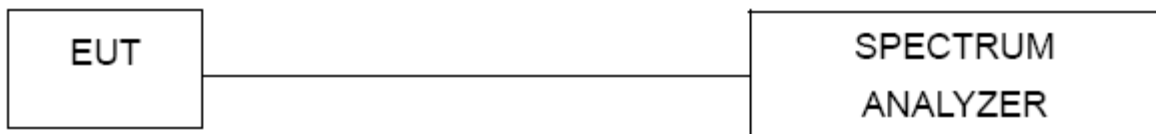


5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.6 TEST RESULTS

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH01, CH06, CH11 (EXT antenna)		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	12.59	>=500KHz
CH06	2437	12.57	>=500KHz
CH11	2462	12.25	>=500KHz

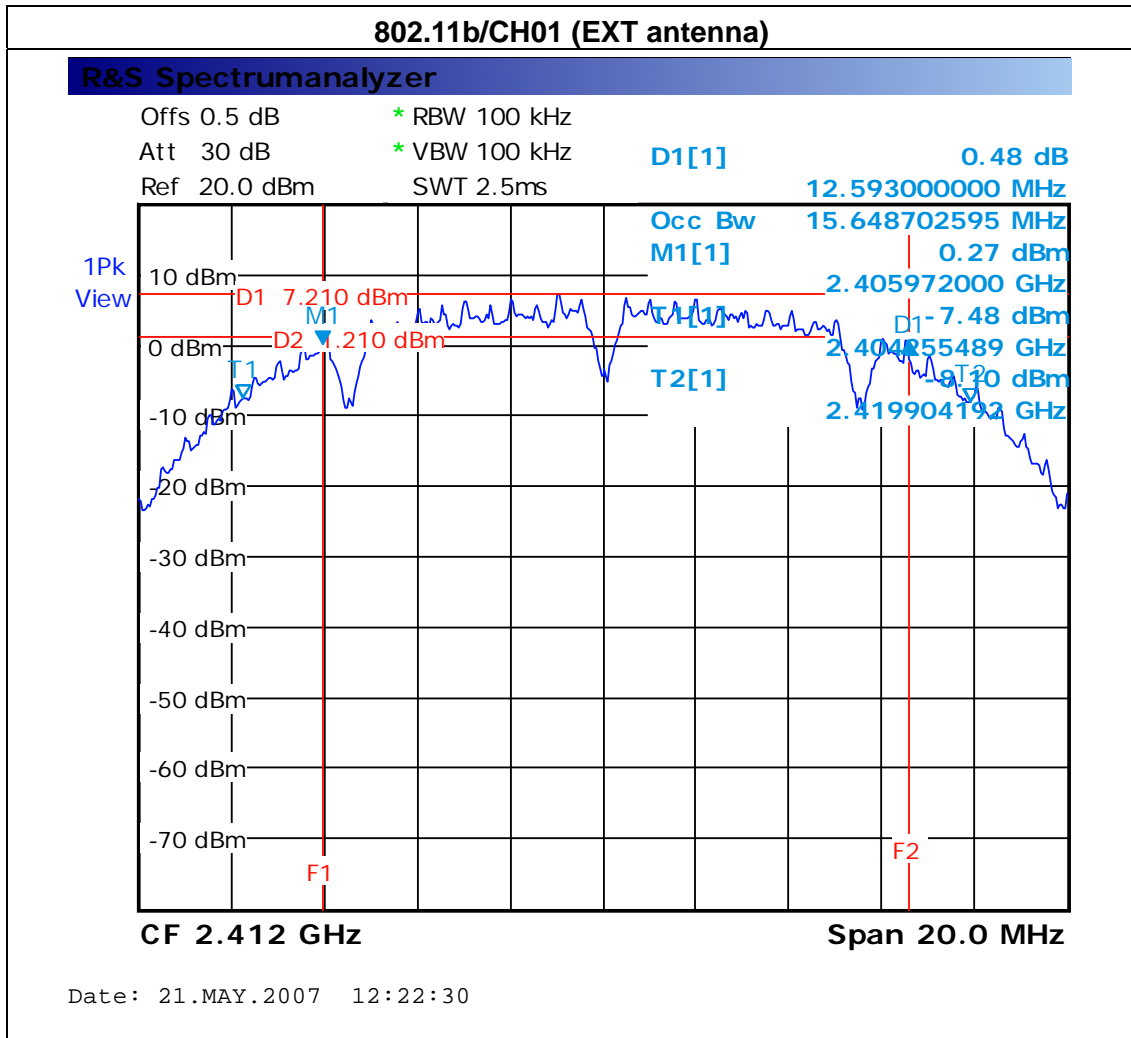


802.11b/CH06 (EXT antenna)

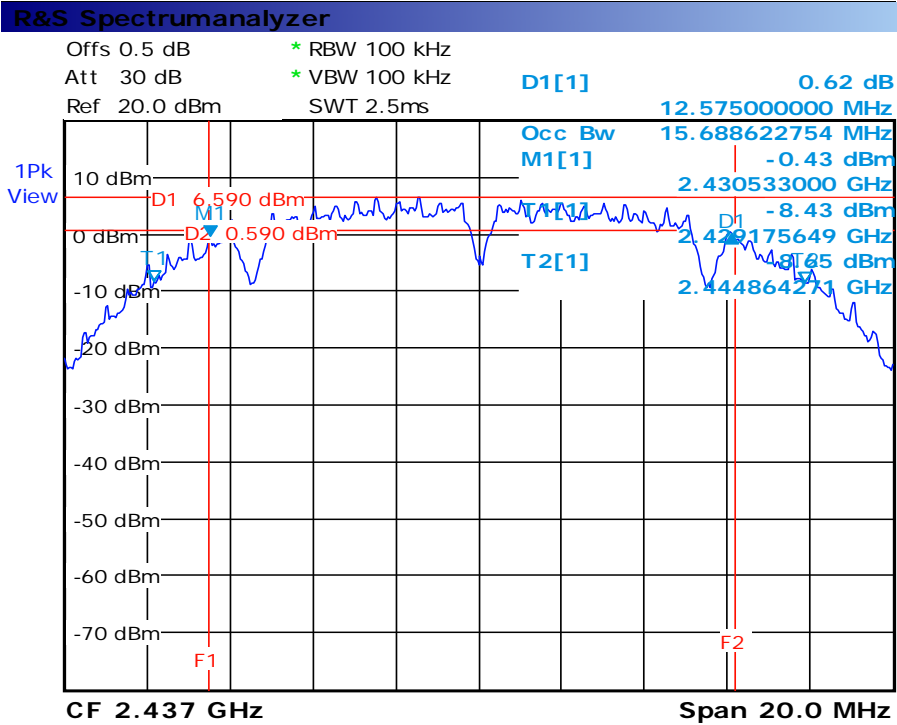

Date: 21.MAY.2007 12:23:51


802.11b/CH11 (EXT antenna)

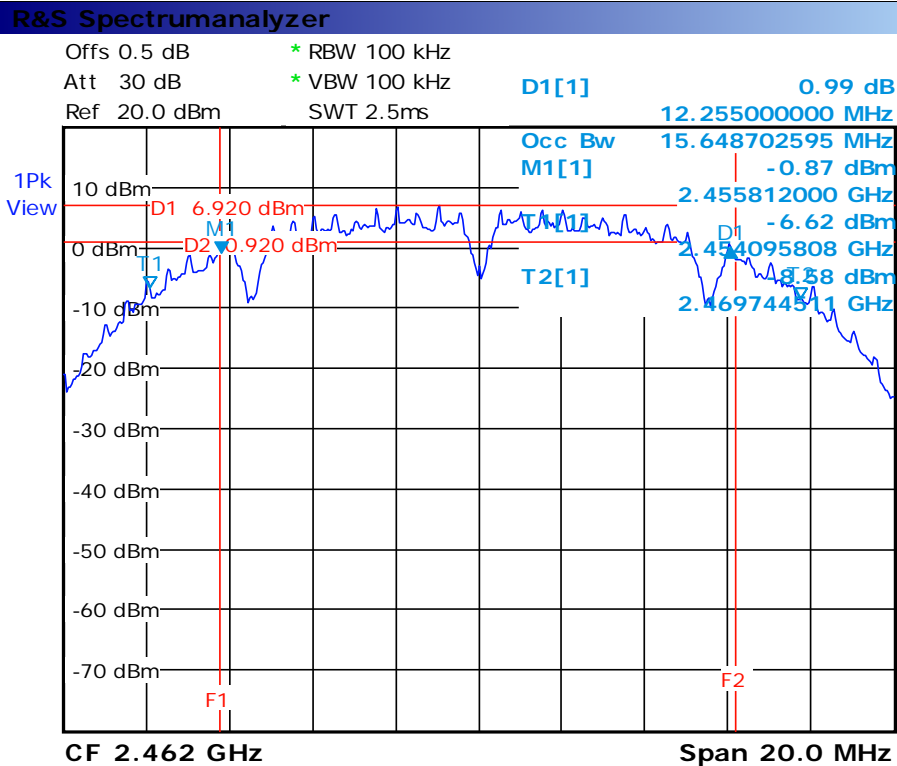

Date: 21.MAY.2007 12:25:24

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01, CH06, CH11 (EXT antenna)		

Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	16.40	>=500KHz
CH06	2437	16.28	>=500KHz
CH11	2462	16.40	>=500KHz

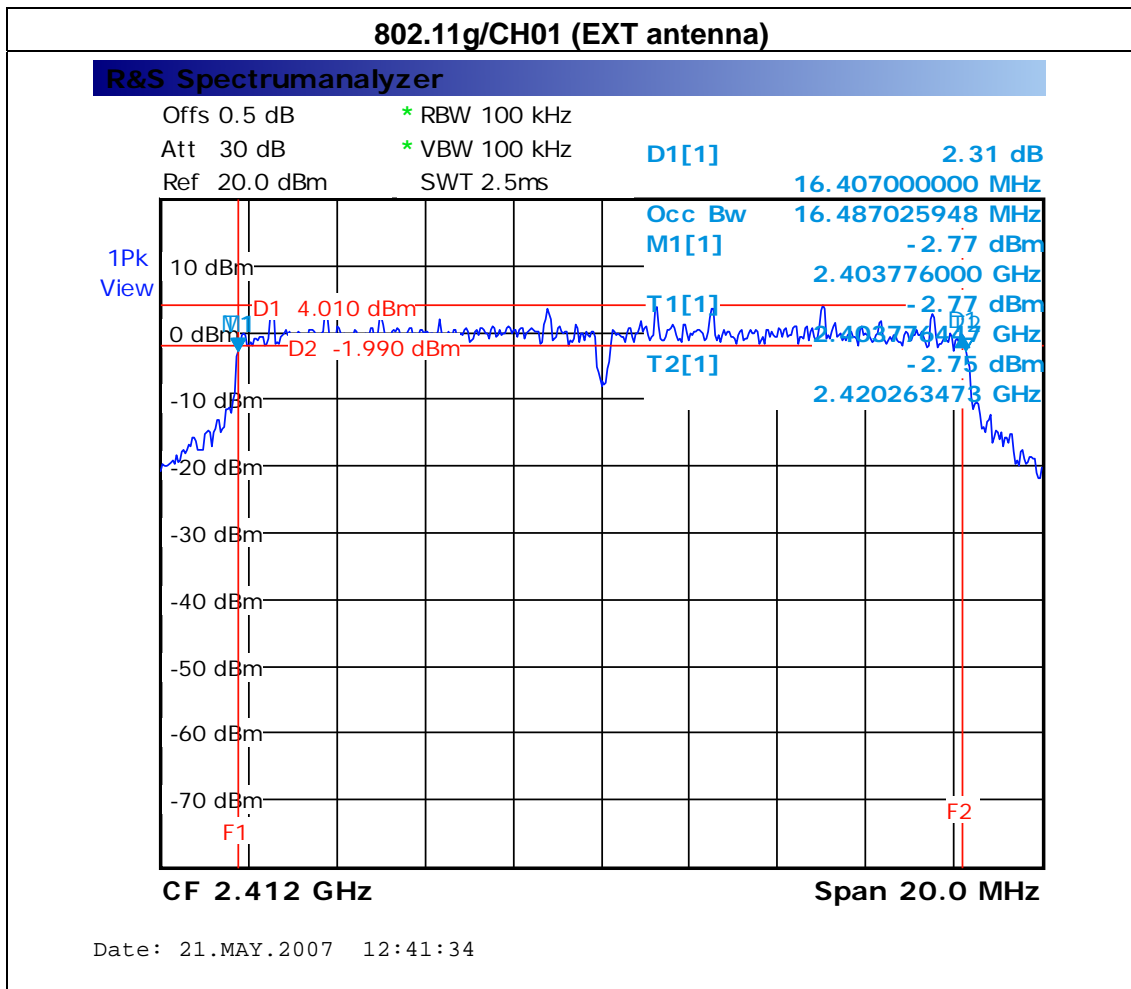


802.11g/CH06 (EXT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 100 kHz
 Att 30 dB * VBW 100 kHz
 Ref 20.0 dBm SWT 2.5ms

D1[1] 2.14 dB
 16.287000000 MHz
 Occ Bw 16.487025948 MHz
 M1[1] -3.33 dBm
 2.428856000 GHz
 T1[1] -4.81 dBm
 2.438776449 GHz
 T2[1] -3.91 dBm
 2.445263478 GHz

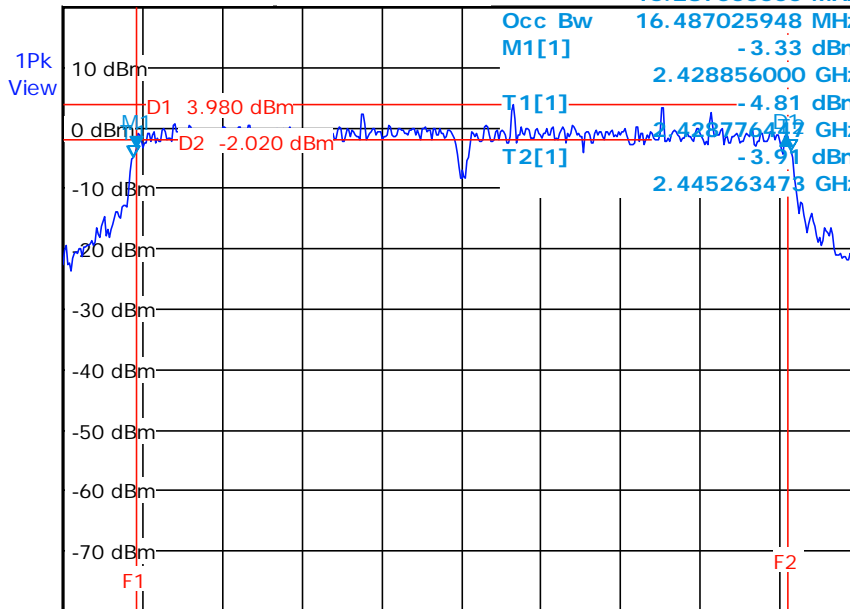

CF 2.437 GHz

Span 20.0 MHz


Date: 21.MAY.2007 12:42:59

802.11g/CH11 (EXT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 100 kHz
 Att 30 dB * VBW 100 kHz
 Ref 20.0 dBm SWT 2.5ms

D1[1] 2.19 dB
 16.407000000 MHz
 Occ Bw 16.447105788 MHz
 M1[1] -5.05 dBm
 2.453776000 GHz
 T1[1] -5.05 dBm
 2.453776449 GHz
 T2[1] -3.88 dBm
 2.470223558 GHz

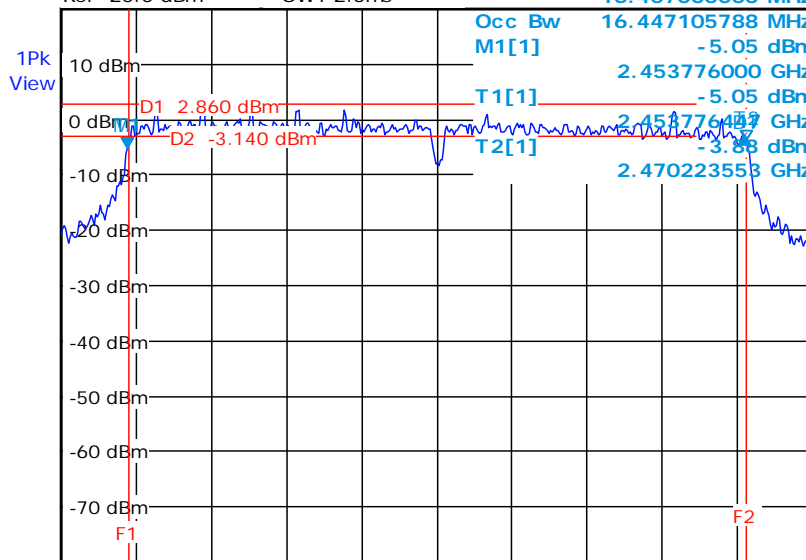


CF 2.462 GHz

Span 20.0 MHz

Date: 21.MAY.2007 12:44:11

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01, CH06, CH11 (INT antenna)		


Test Channel	Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
CH01	2412	16.48	>=500KHz
CH06	2437	16.32	>=500KHz
CH11	2462	16.36	>=500KHz

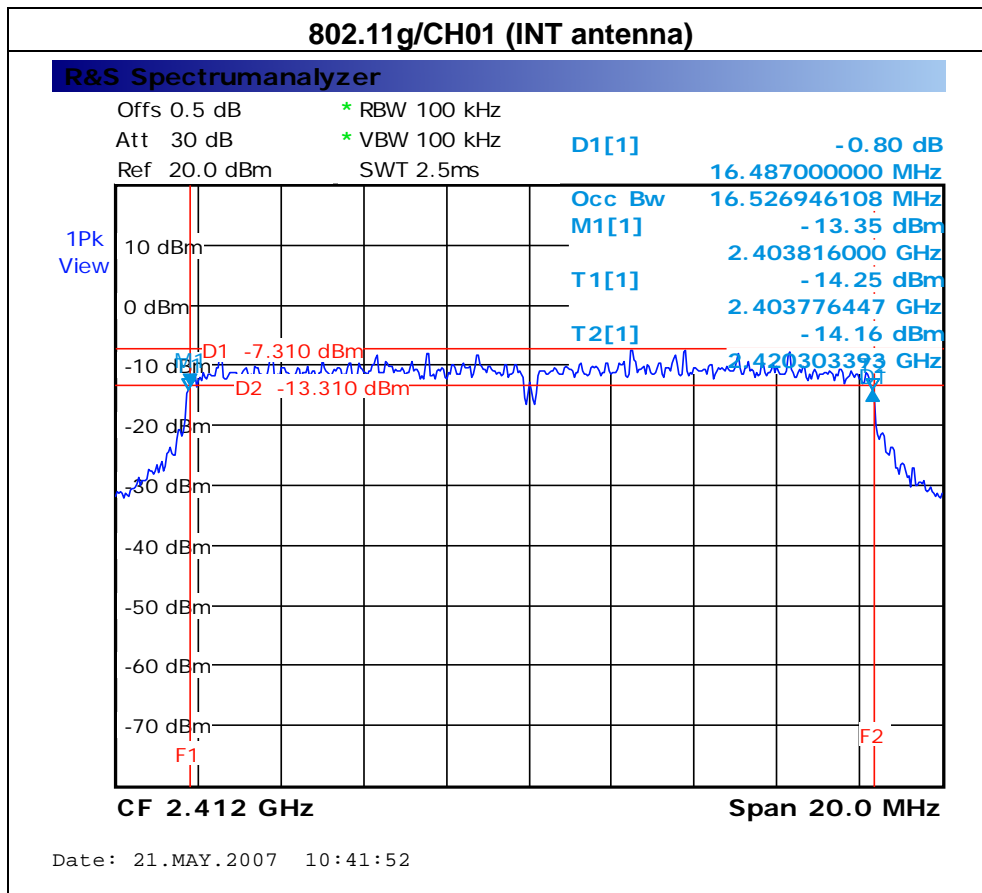

802.11g/CH06 (INT antenna)

R&S Spectrumanalyzer

Offs 0.5 dB * RBW 100 kHz
 Att 30 dB * VBW 100 kHz
 Ref 20.0 dBm SWT 2.5ms

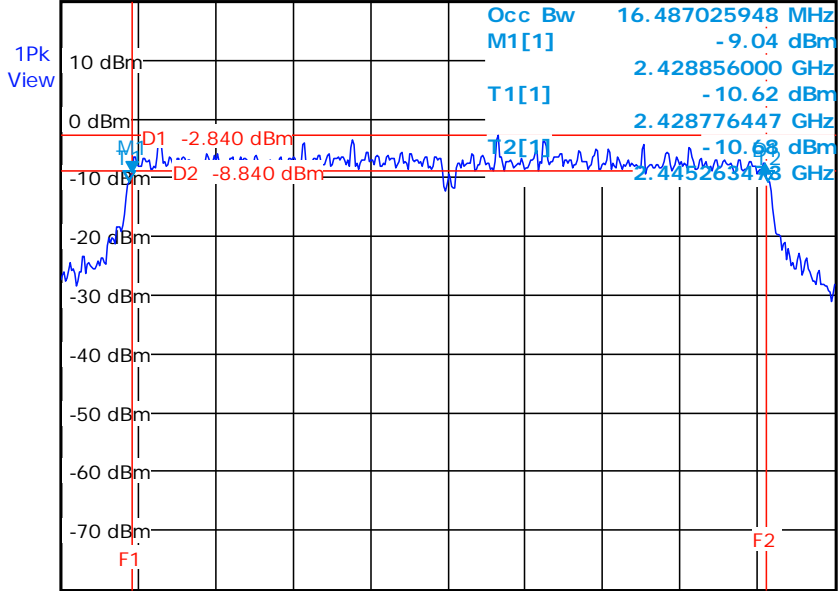


CF 2.437 GHz Span 20.0 MHz

Date: 21.MAY.2007 10:43:35

802.11g/CH11 (INT antenna)

R&S Spectrumanalyzer

Offs 0.5 dB * RBW 100 kHz
 Att 30 dB * VBW 100 kHz
 Ref 20.0 dBm SWT 2.5ms

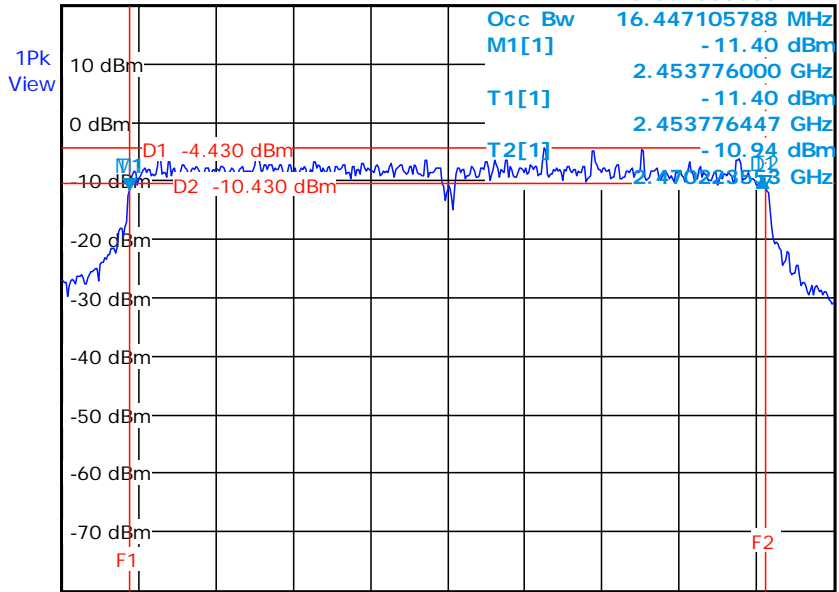

CF 2.462 GHz Span 20.0 MHz

Date: 21.MAY.2007 10:45:08

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(1)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00001568	Oct. 28, 2007
2	Power Meter Sensor	Anritsu	MA2491A	030989	Feb. 11, 2008

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


6.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 3MHz, VBW= 3MHz, Sweep time = 20 ms.

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP

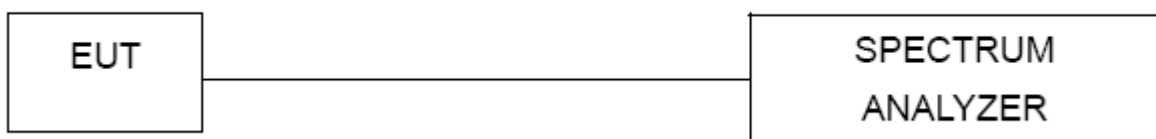

6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.6 TEST RESULTS

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH01, CH06, CH11(EXT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	22.24	30	1
CH06	2437	22.31	30	1
CH11	2462	22.07	30	1

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01, CH06, CH11 (EXT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	25.30	30	1
CH06	2437	25.12	30	1
CH11	2462	24.11	30	1

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH01, CH06, CH11(INT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	13.20	27(Note)	1
CH06	2437	15.23	27(Note)	1
CH11	2462	14.80	27(Note)	1

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01, CH06, CH11 (INT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412	17.04	27(Note)	1
CH06	2437	20.22	27(Note)	1
CH11	2462	19.60	27(Note)	1

Note:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 08, 2008

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz /100 KHz for Peak

7.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP





7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.6 TEST RESULTS

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH01, CH11 (EXT antenna)		

Channel of Worst Data: CH11			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2386.37	-44.59	2487.63	-42.71
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			

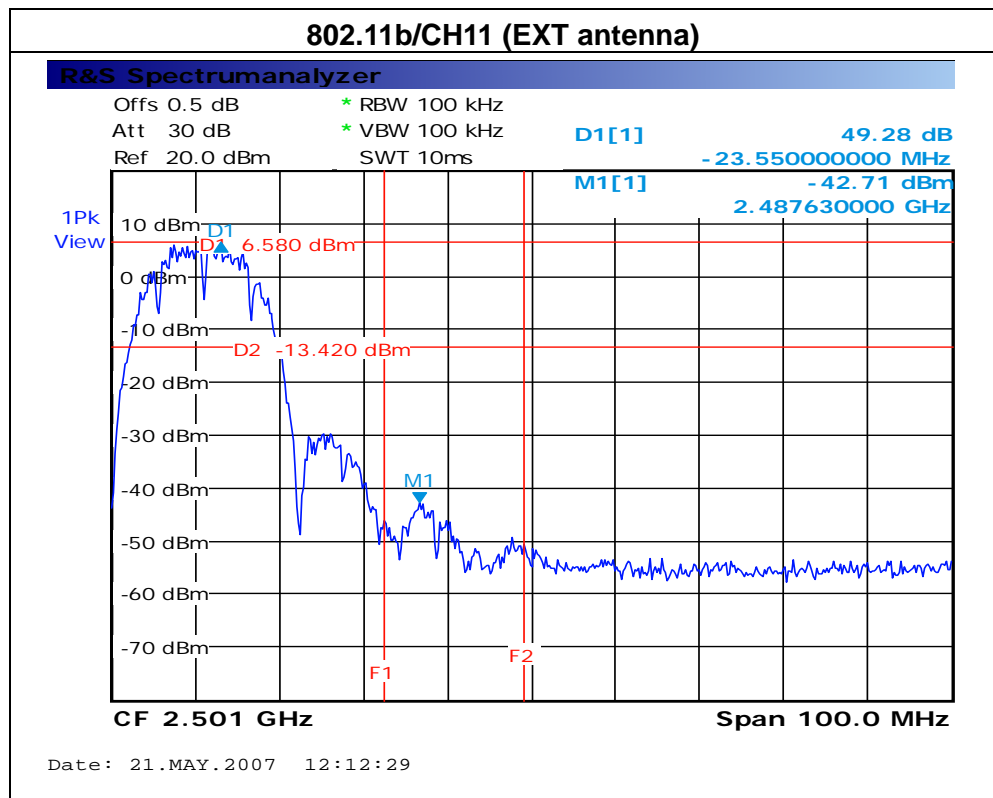
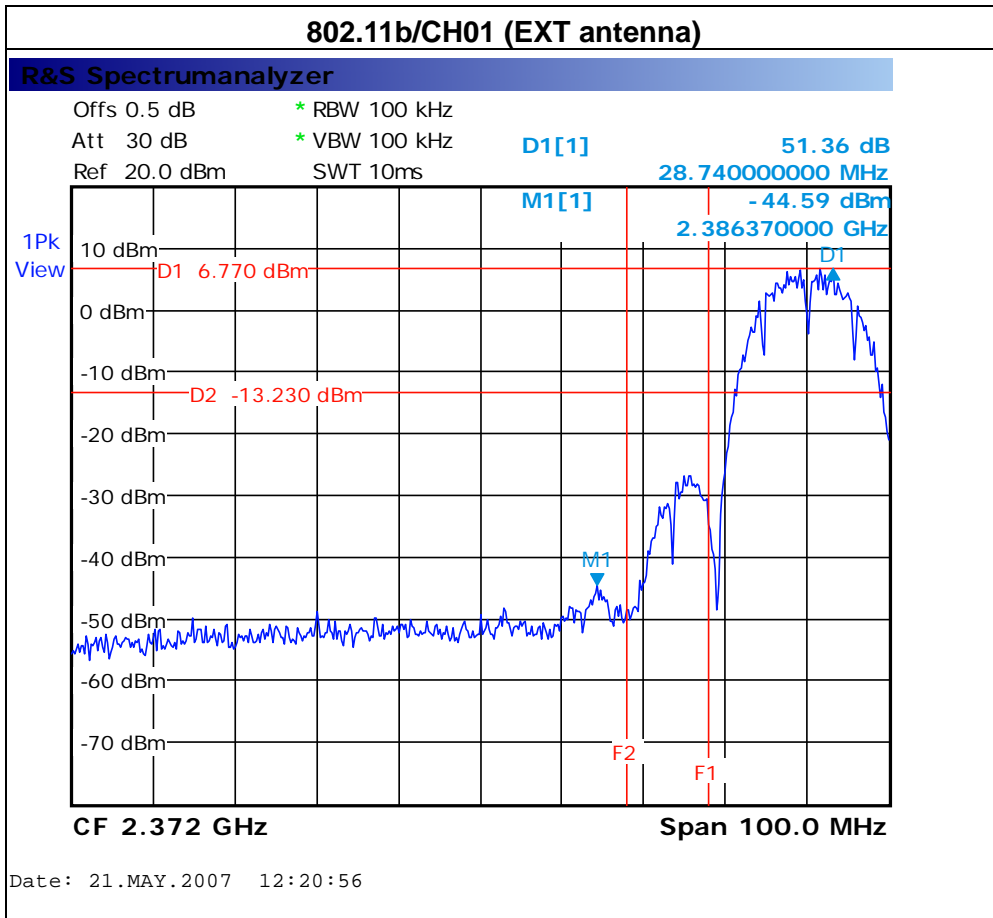


EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH01, CH11 (EXT antenna)		

Channel of Worst Data: CH01			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2389.96	-38.69	2483.732	-42.52



Result

In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

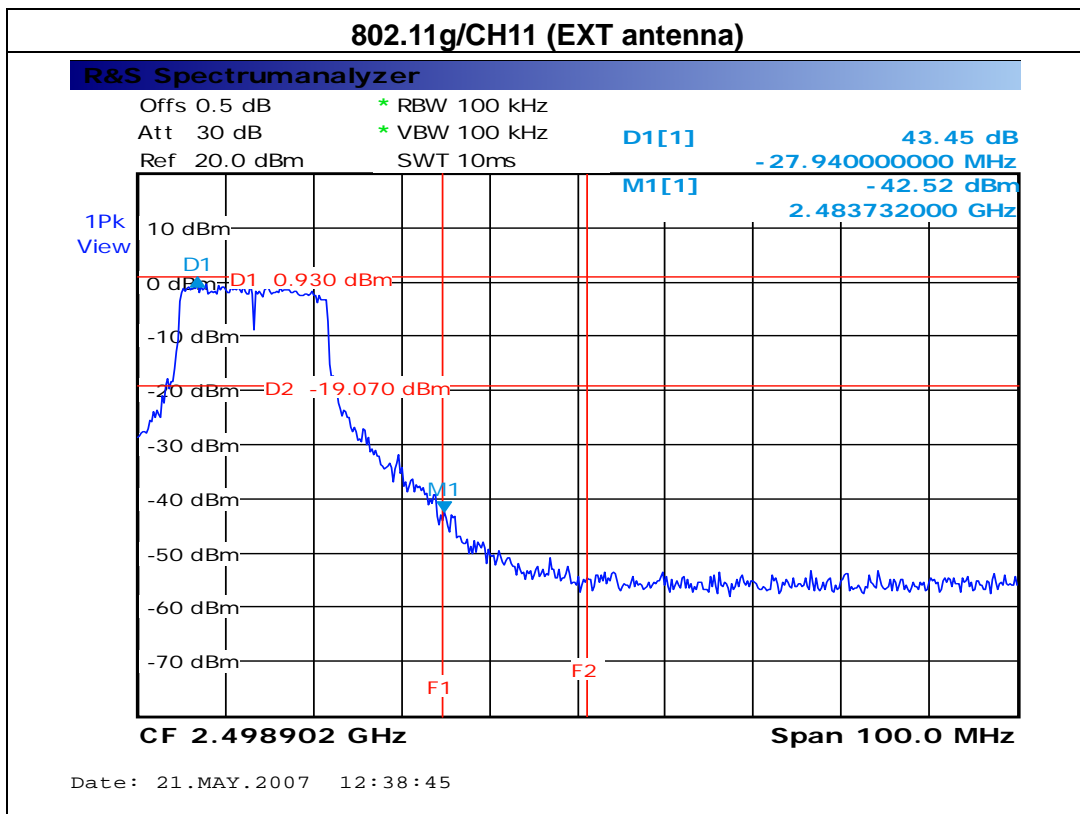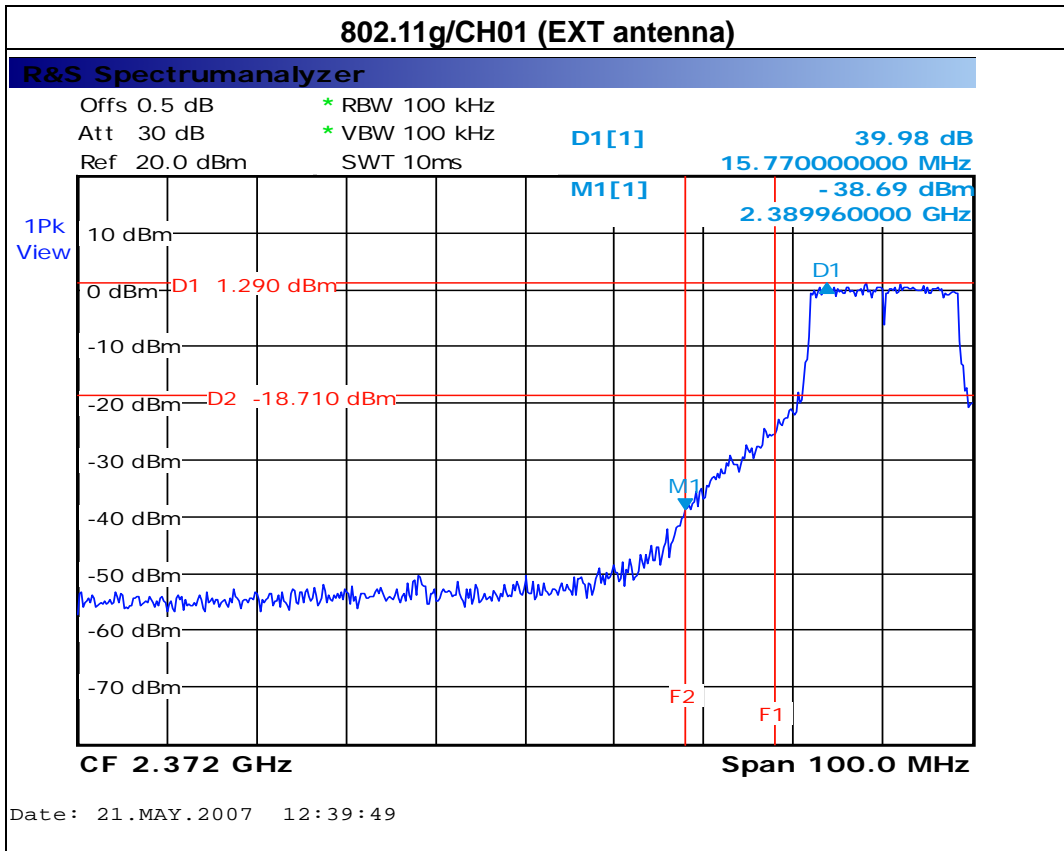



EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH01, CH11 (INT antenna)		

Channel of Worst Data: CH01			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2362.62	-50.22	2499.80	-53.39
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			

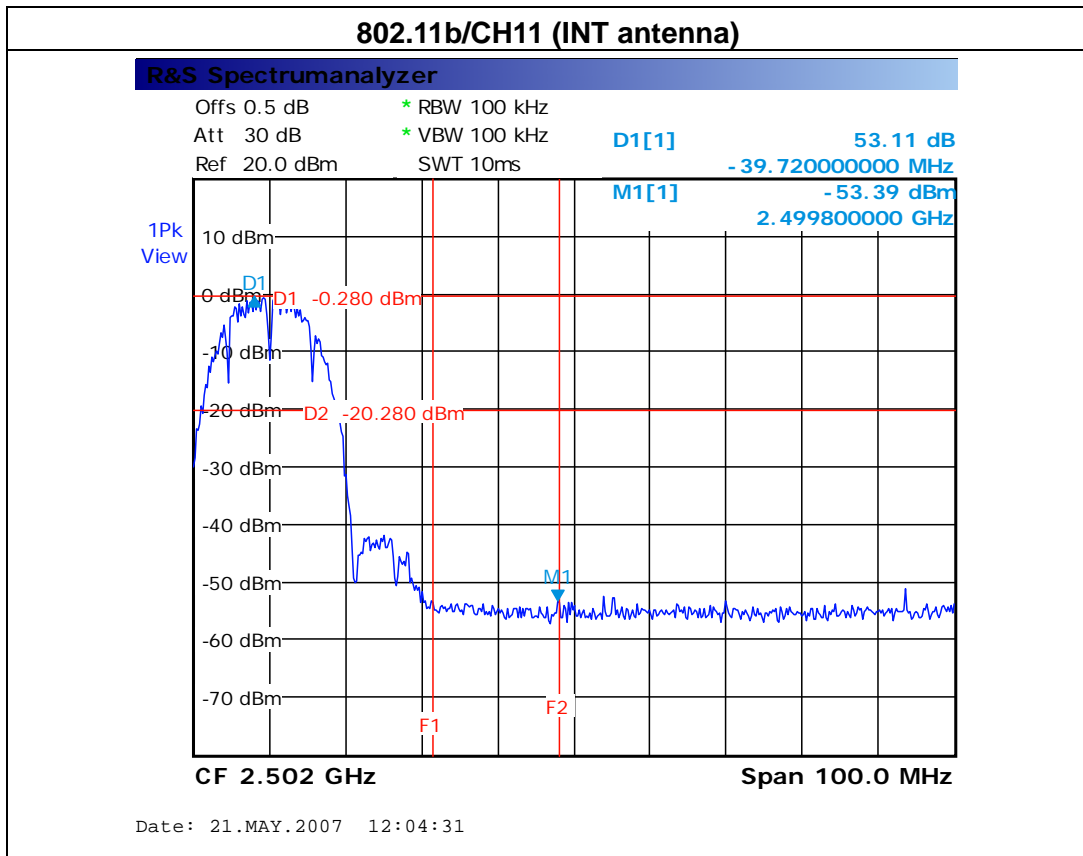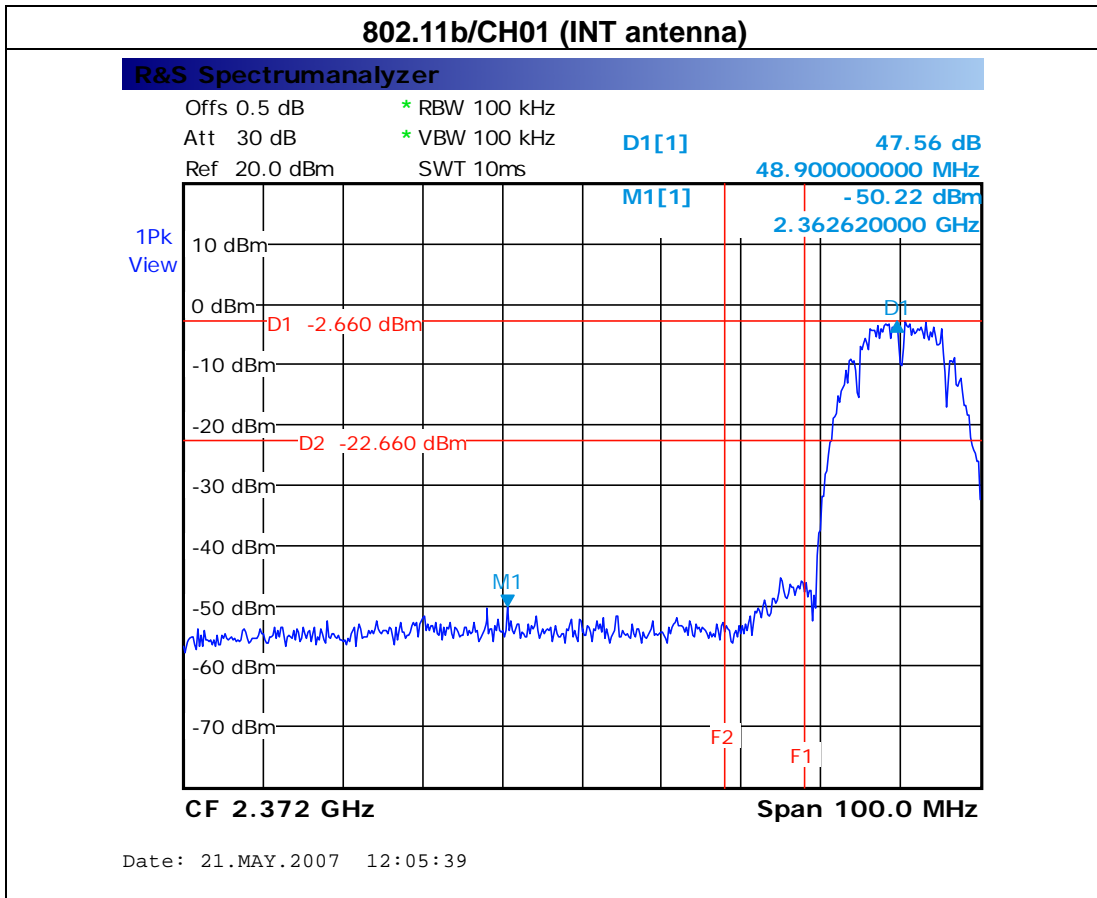

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH01, CH11 (INT antenna)		

Channel of Worst Data: CH01			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2360.002	-51.46	2484.63	-51.48
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			

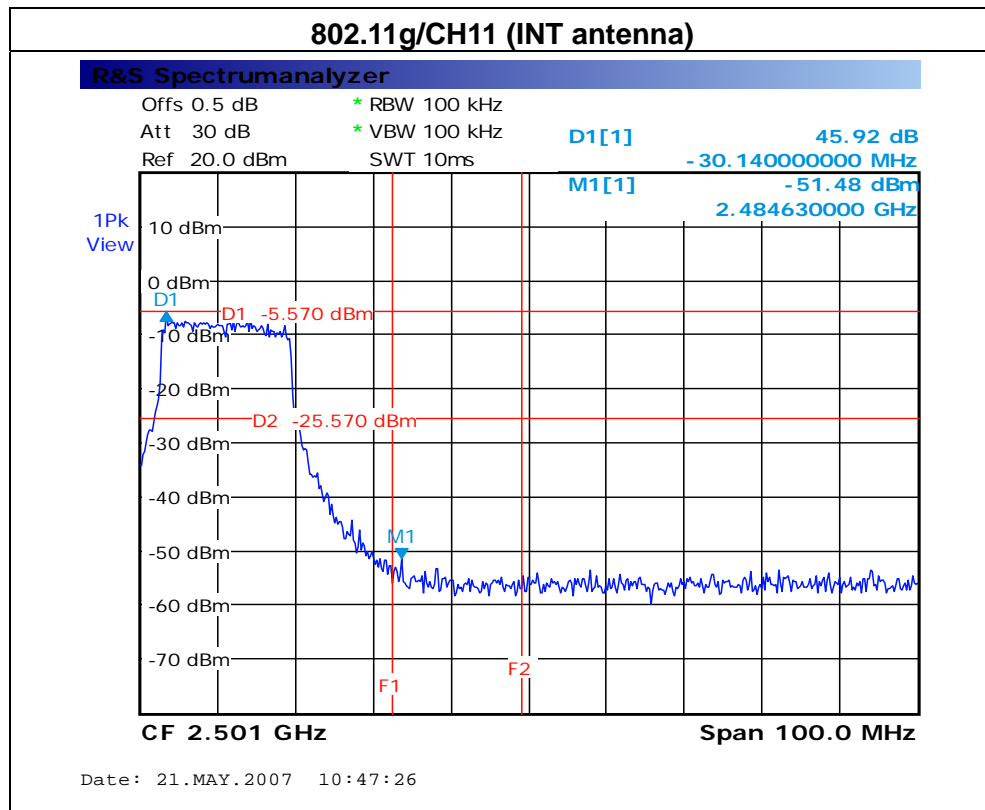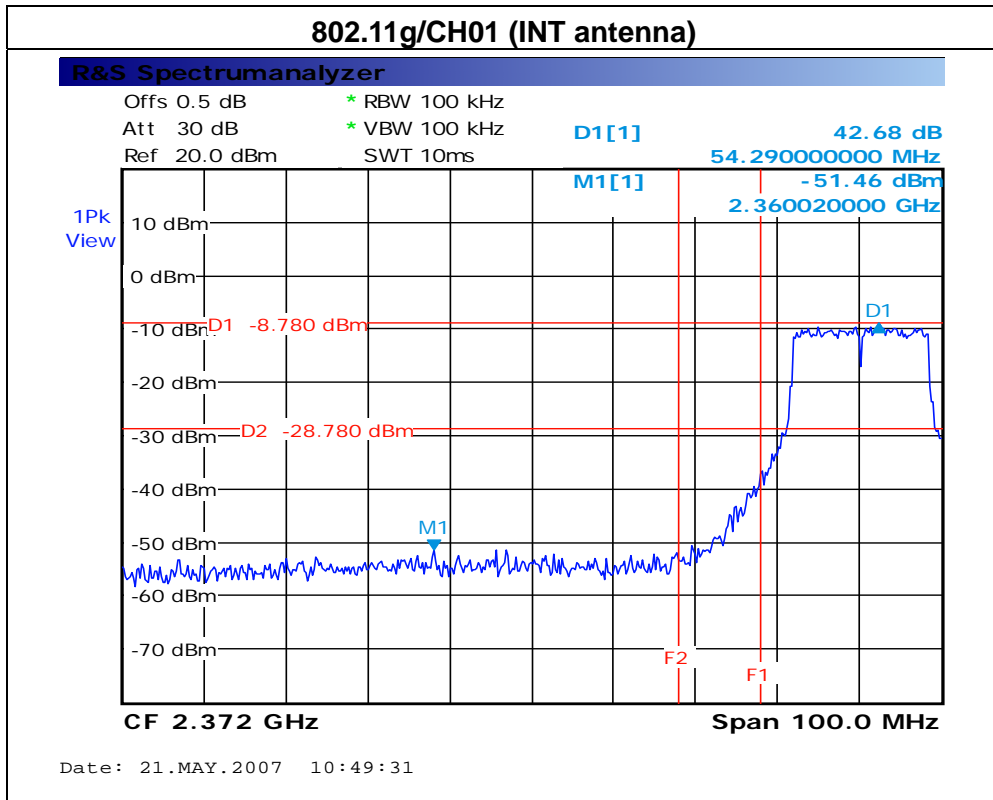

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (d)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 08, 2008

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW=3KHz, VBW=30 KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP

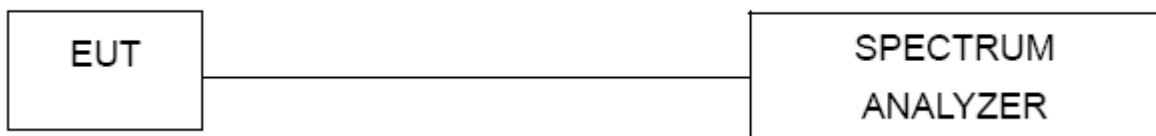


8.1.5 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.6 TEST RESULTS

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH01, CH06, CH11 (EXT antenna)		


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH01	2412	-5.78	8
CH06	2437	-6.97	8
CH11	2462	-5.77	8

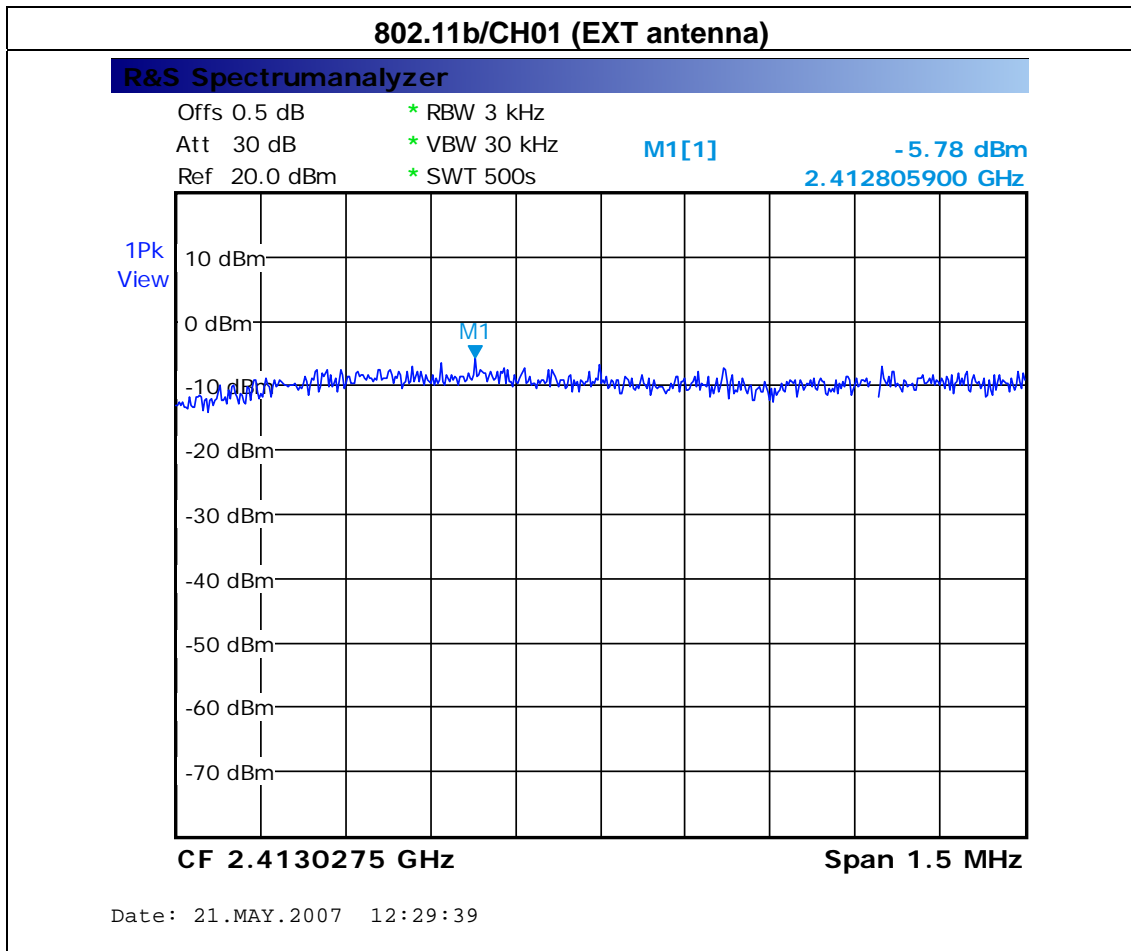

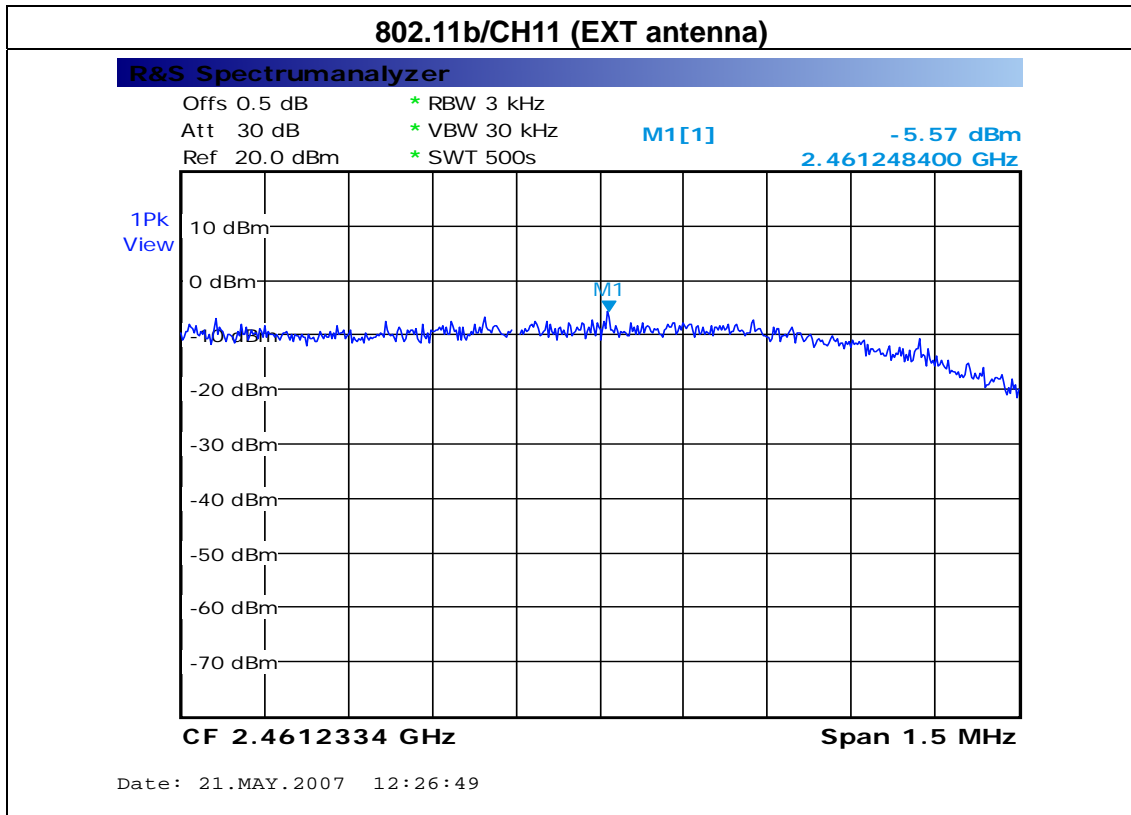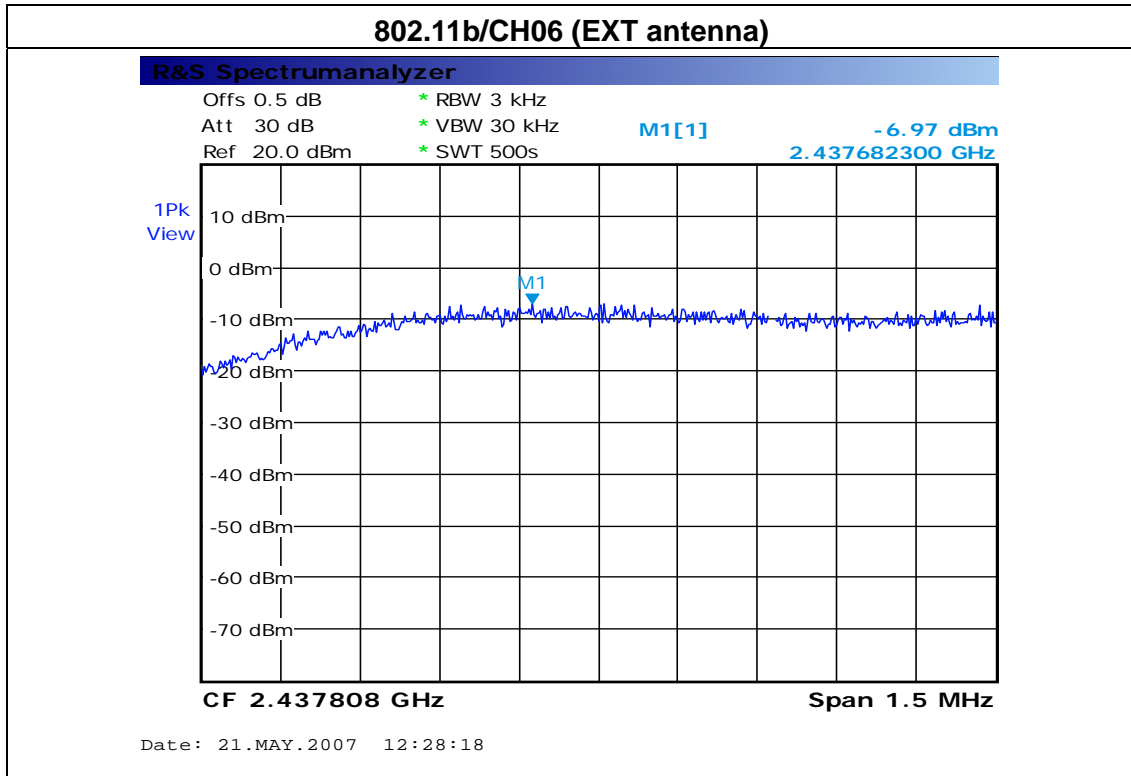

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH01, CH06, CH11 (EXT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH01	2412	-9.51	8
CH06	2437	-9.61	8
CH11	2462	-11.55	8

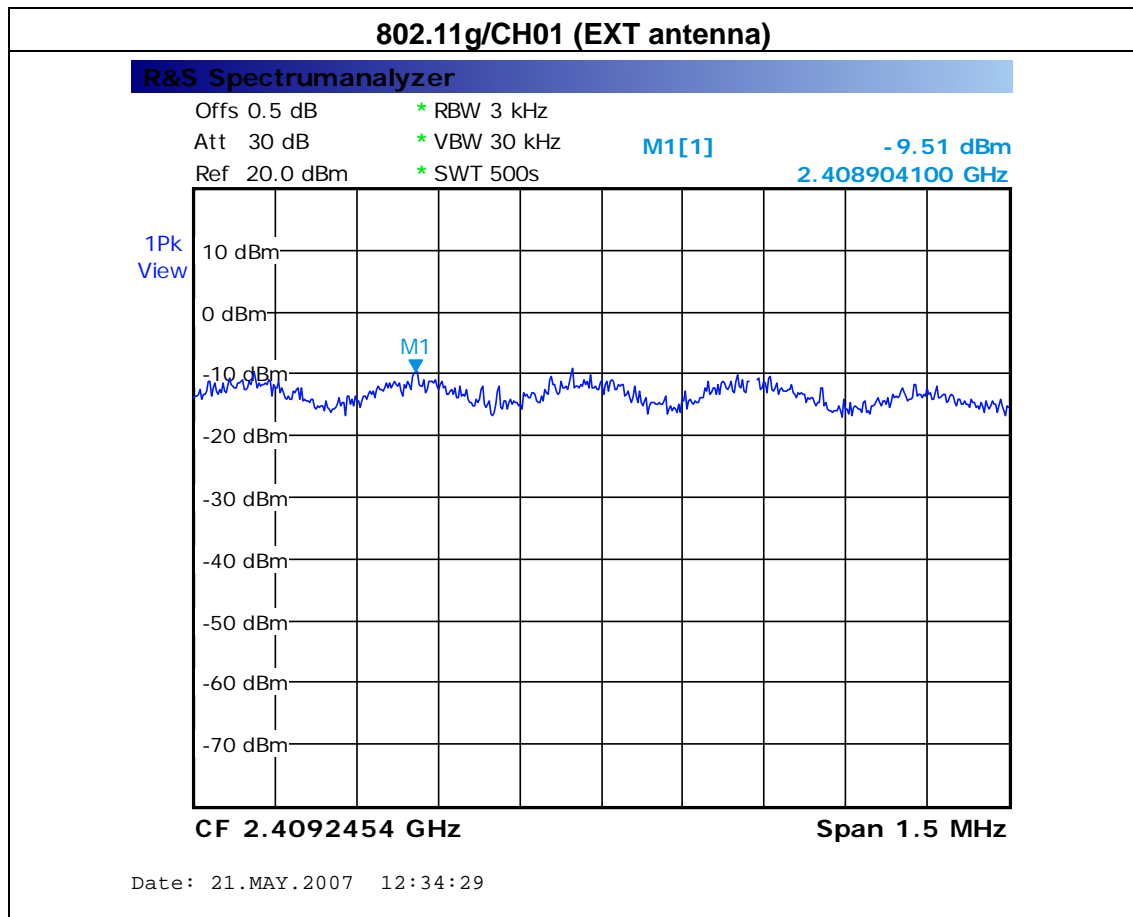


802.11g/CH06 (EXT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 3 kHz
Att 30 dB * VBW 30 kHz M1[1] -9.61 dBm
Ref 20.0 dBm * SWT 500s 2.432025200 GHz

1Pk View

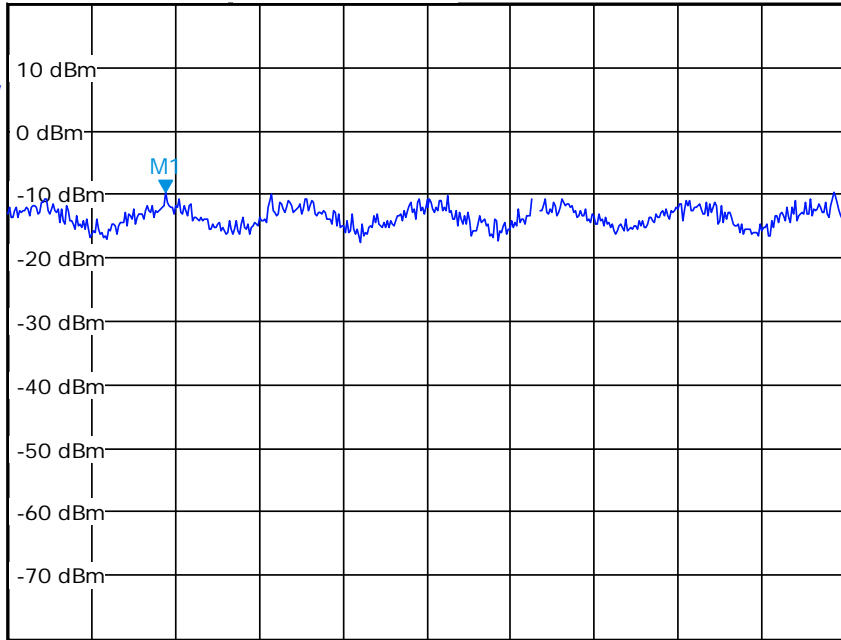

CF 2.432648 GHz

Span 2.0 MHz


Date: 21.MAY.2007 12:36:06

802.11g/CH11 (EXT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 3 kHz
Att 30 dB * VBW 30 kHz M1[1] -11.55 dBm
Ref 20.0 dBm * SWT 500s 2.469222400 GHz

1Pk View

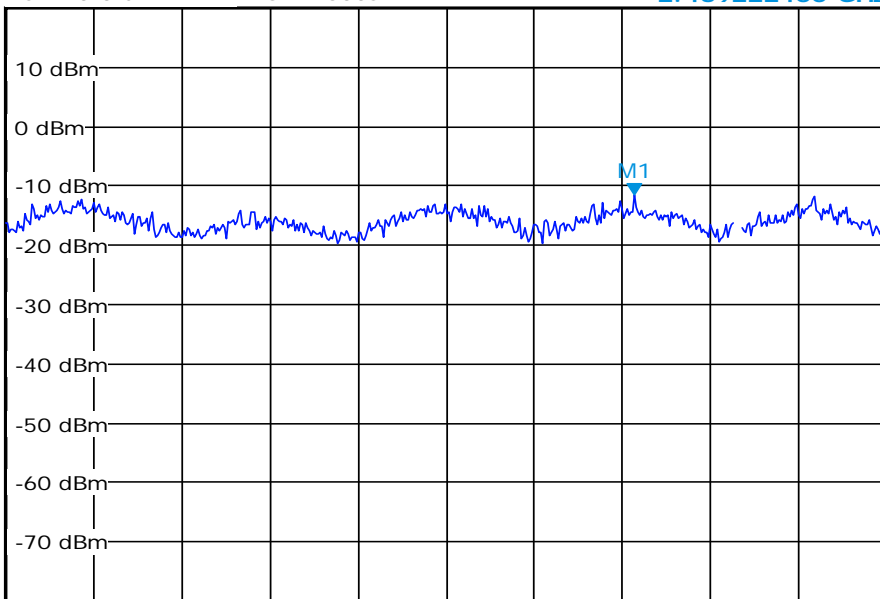


CF 2.468902 GHz

Span 1.5 MHz

Date: 21.MAY.2007 12:37:32

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11B mode CH01, CH06, CH11 (INT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH01	2412	-14.64	8
CH06	2437	-12.88	8
CH11	2462	-12.75	8

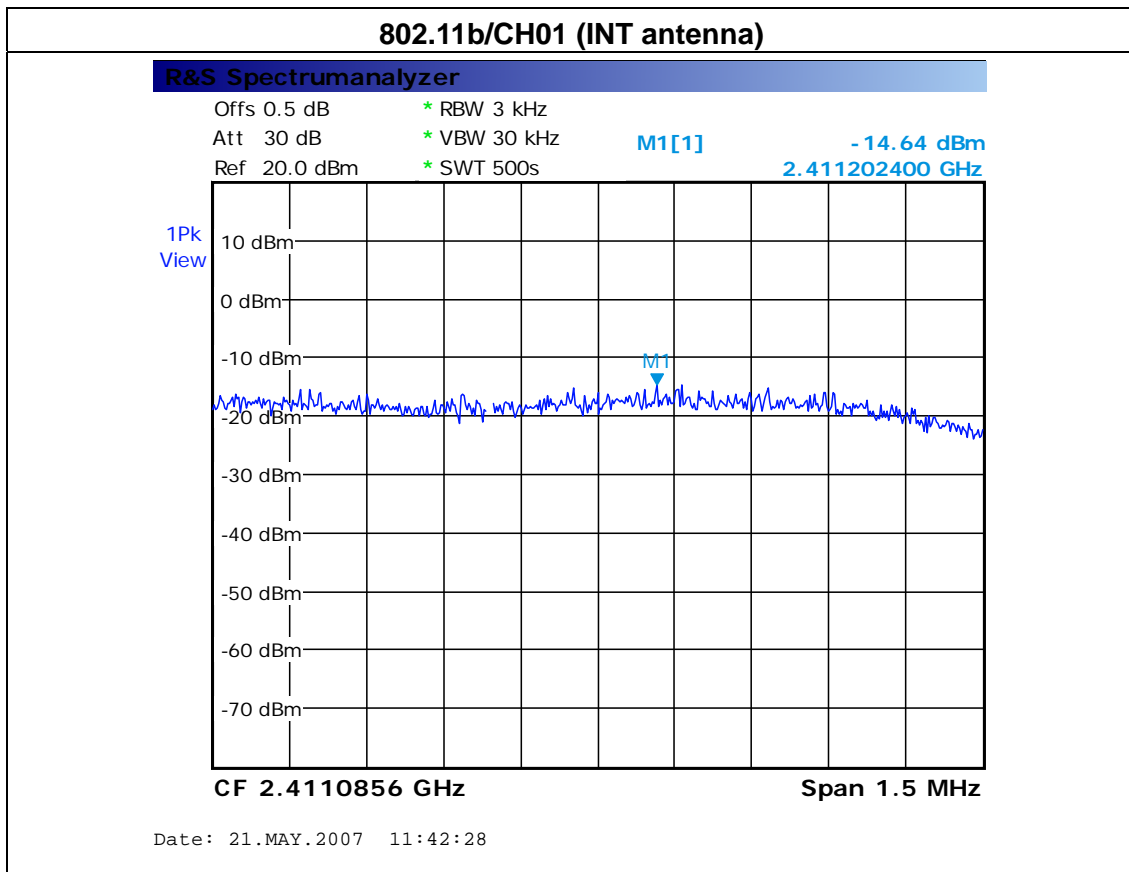


802.11b/CH06 (INT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 3 kHz
Att 30 dB * VBW 30 kHz M1[1] - 12.88 dBm
Ref 20.0 dBm * SWT 500s 2.437851100 GHz

1Pk
View

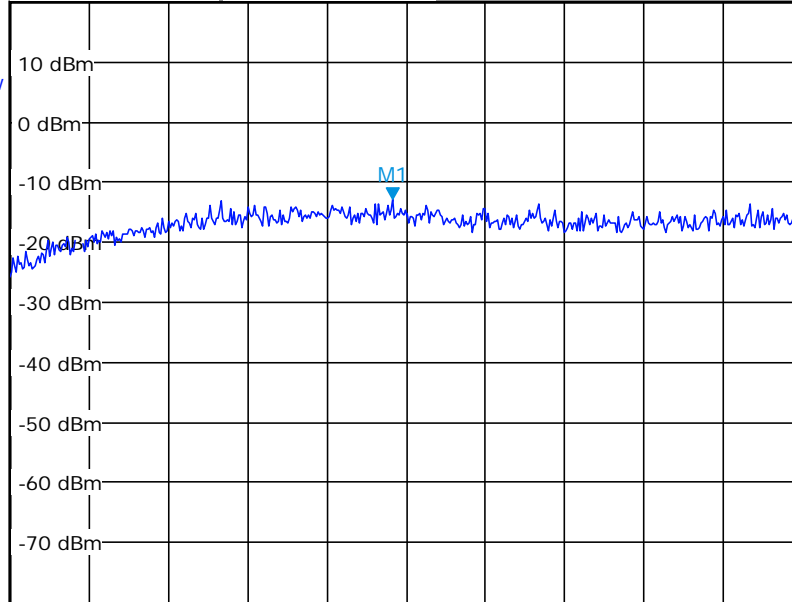

CF 2.437878 GHz

Span 1.5 MHz


Date: 21.MAY.2007 11:43:51

802.11b/CH11 (INT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 3 kHz
Att 30 dB * VBW 30 kHz M1[1] - 12.75 dBm
Ref 20.0 dBm * SWT 500s 2.460526000 GHz

1Pk
View

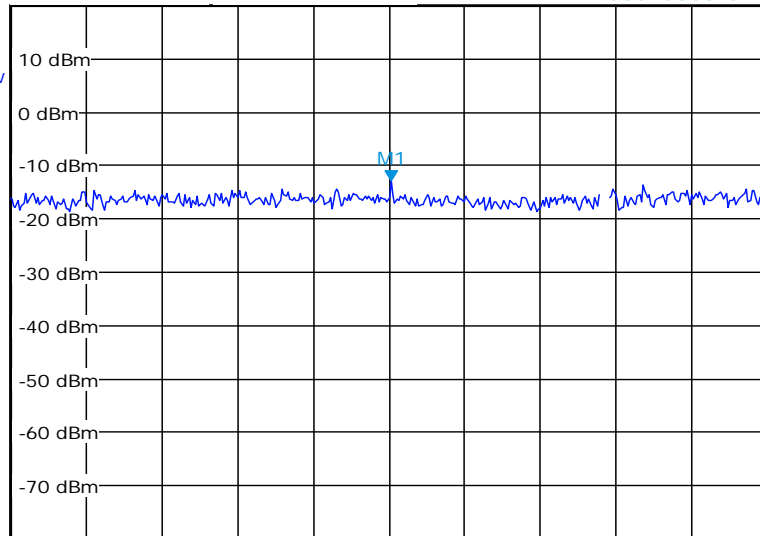


CF 2.460522 GHz

Span 1.5 MHz

Date: 21.MAY.2007 11:45:25

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27 °C	Relative Humidity :	58 %
Pressure :	1004 hPa	Test Power :	AC 120V/60Hz
Test Mode :	11G mode CH01, CH06, CH11 (INT antenna)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH01	2412	-19.21	8
CH06	2437	-16.54	8
CH11	2462	-18.45	8

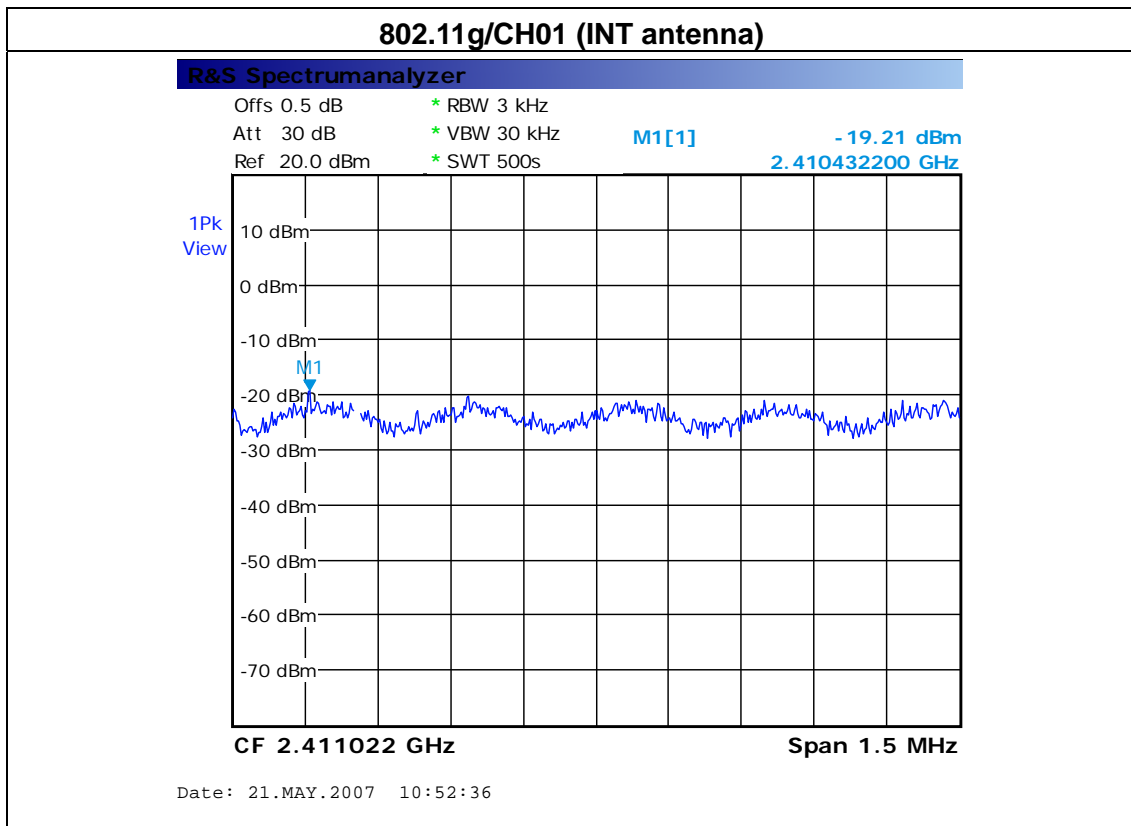


802.11g/CH06 (INT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 3 kHz
Att 30 dB * VBW 30 kHz M1[1] -16.54 dBm
Ref 20.0 dBm * SWT 500s 2.435468100 GHz

1Pk
View

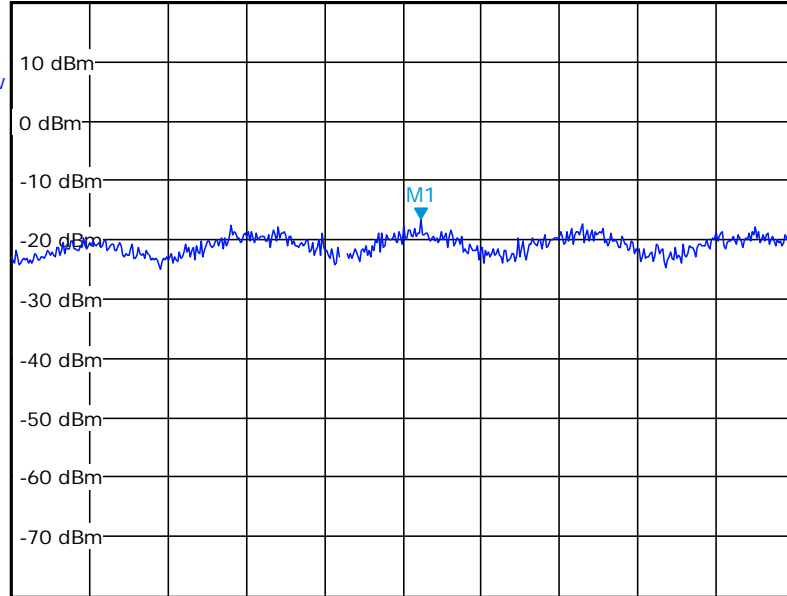

CF 2.4354322 GHz

Span 1.5 MHz


Date: 21.MAY.2007 13:42:15

802.11g/CH11 (INT antenna)

R&S Spectrumalyzer

Offs 0.5 dB * RBW 3 kHz
Att 30 dB * VBW 30 kHz M1[1] -18.45 dBm
Ref 20.0 dBm * SWT 500s 2.454801500 GHz

1Pk
View

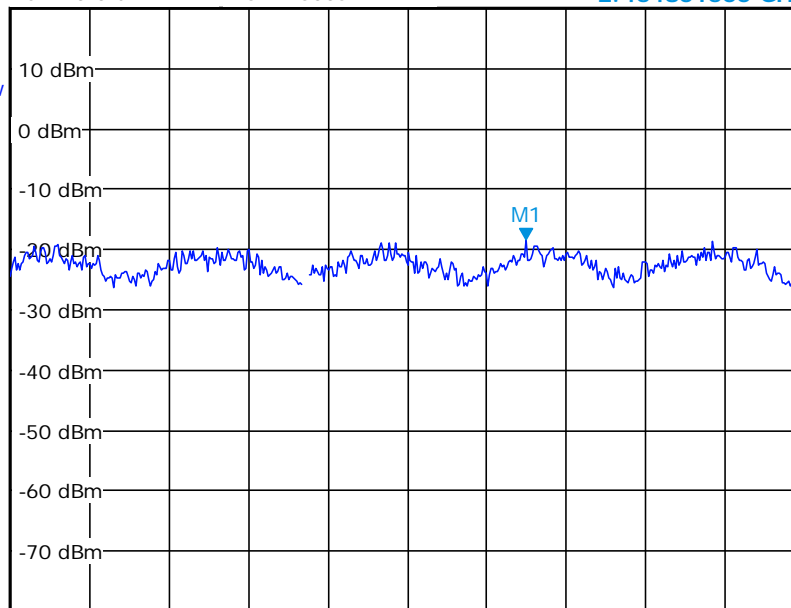

CF 2.4545769 GHz

Span 1.5 MHz

Date: 21.MAY.2007 13:40:11

9. RF EXPOSURE TEST

9.1 Applied procedures / limit

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

9.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 08, 2008

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

9.1.2 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to


$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP

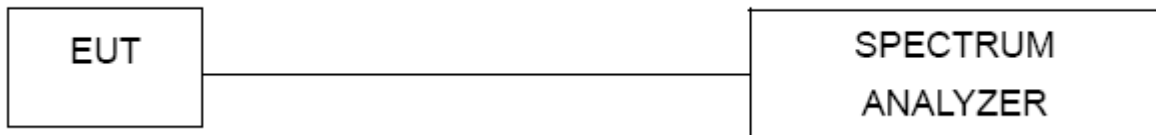

9.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.6 TEST RESULTS

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27°C	Relative Humidity :	58 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	11B mode CH01, CH06 , CH11 (EXT antenna)		

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm2)	Limit of Power Density (S) (mW/cm2)	Test Result
1.52	1.4191	22.24	167.4943	0.047310	1	Complies
1.52	1.4191	22.31	170.2159	0.048708	1	Complies
1.52	1.4191	22.07	161.0646	0.045494	1	Complies

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27°C	Relative Humidity :	58 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	11B mode CH01, CH06 , CH11 (INT antenna)		

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm2)	Limit of Power Density (S) (mW/cm2)	Test Result
15	31.6228	13.20	20.8930	0.131507	1	Complies
15	31.6228	15.23	33.3426	0.209870	1	Complies
15	31.6228	14.80	30.1995	0.190086	1	Complies

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27°C	Relative Humidity :	58 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	11G mode CH01, CH06, CH11 (EXT antenna)		

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm2)	Limit of Power Density (S) (mW/cm2)	Test Result
1.52	1.4191	25.30	338.8442	0.095708	1	Complies
1.52	1.4191	25.12	325.0873	0.091823	1	Complies
1.52	1.4191	24.11	257.6321	0.072770	1	Complies

EUT :	airClient TOTAL 241	Model No. :	SB3415
Temperature :	27°C	Relative Humidity :	58 %
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	11G mode CH01, CH06, CH11 (INT antenna)		

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm2)	Limit of Power Density (S) (mW/cm2)	Test Result
15	31.6228	17.04	50.5825	0.318383	1	Complies
15	31.6228	20.22	105.1962	0.662141	1	Complies
15	31.6228	19.60	91.2011	0.574051	1	Complies

10. EUT TEST PHOTO

Conducted Measurement Photos



**Radiated Measurement Photos
X axis**



文件名: NEI-FCCP-1-0704139(修改过的)
目录: \\192.168.1.88\dgkaianqu\2007-Report\RF 报告
 \0704XXX\0704139\文件部\WORD 檔
模板: D:\Documents and Settings\nicole\Application
 Data\Microsoft\Templates\Normal.dot
标题: Measurement Report
主题:
作者: Kent
关键词:
备注:
创建日期: 2006-11-29 15:01:00
修订号: 278
上次保存日期: 2007-7-19 15:37:00
上次保存者: steven
编辑时间总计: 3,278 分钟
上次打印时间: 2007-7-19 15:45:00
打印最终结果
 页数: 125
 字数: 13,346 (约)
 字符数: 76,074 (约)