

# Test report

**377118-2TRFWL**

Date of issue: July 3, 2019

Applicant:

**Radiomotive Srl**

**Via Tevere, 63 – 22073 Fino Mornasco (CO) – Italy**

Product:

**SRD International Radiators**

Model:

**TRANS2018-RC**

FCC ID:

**PWJS10T**

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.231**

Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

This test report may not be partially reproduced, except with the prior written permission of Nemko Spa

The test report merely corresponds to the tested sample.

The phase of sampling / collection of equipment under test is carried out by the customer.

#### Test location

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Toll free	<a href="http://www.nemko.com">www.nemko.com</a>
Website	FCC test site registration number: 682159 (10 m semi anechoic chamber)
Site number	

Tested by (name, function and signature)	G. Tepelena	(project handler)	
Reviewed by (name, function and signature)	P. Barbieri	(verifier)	
Date	July 3, 2019		

#### Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Spa's ISO/IEC 17025 accreditation.

#### Copyright notification

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

# Table of contents

<b>Table of contents</b>	<b>3</b>
<b>Section 1. Report summary</b>	<b>4</b>
1.1 Applicant and manufacturer info	4
1.2 Test specifications	4
1.3 Test methods	4
1.4 Statement of compliance	4
1.5 Exclusions	4
1.6 Test report revision history	4
<b>Section 2. Summary of test results</b>	<b>5</b>
2.1 FCC Part 15 Subpart C test results	5
<b>Section 3. Equipment under test (EUT) details</b>	<b>6</b>
3.1 Sample information	6
3.2 EUT information	6
3.3 Technical information	6
3.4 Product description and theory of operation	6
3.5 EUT exercise details	6
3.6 EUT setup diagram	6
3.7 EUT sub assemblies	6
<b>Section 4. Engineering considerations</b>	<b>7</b>
4.1 Modifications incorporated in the EUT	7
4.2 Technical judgment	7
4.3 Deviations from laboratory tests procedures	7
<b>Section 5. Test conditions</b>	<b>8</b>
5.1 Atmospheric conditions	8
5.2 Power supply range	8
<b>Section 6. Measurement uncertainty</b>	<b>9</b>
6.1 Uncertainty of measurement	9
<b>Section 7. Test equipment</b>	<b>10</b>
7.1 Test equipment list	10
<b>Section 8. Testing data</b>	<b>11</b>
8.1 FCC 15.31(m) Number of frequencies	11
8.2 FCC 15.203 and RSS-Gen, section 6.8 Antenna requirement	12
8.3 FCC 15.231(a) Conditions for intentional radiators to comply with periodic operation	13
8.4 FCC 15.231(b) Field strength of emissions	16
8.5 FCC 15.231(c) Emission bandwidth of momentary signals	30
<b>Section 9. Block diagrams of test set-ups</b>	<b>32</b>
9.1 Radiated emissions set-up for frequencies below 1 GHz	32
9.2 Radiated emissions set-up for frequencies above 1 GHz	33
<b>Section 10. Photos</b>	<b>34</b>
10.1 Photos of the test set-up	34
10.2 Photos of the EUT	36

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer info

---

	Manufacturer:
Company name	CDVI WIRELESS SPA
Address	Via Piave, 23
City	San Pietro di Feletto
Province/State	Treviso
Postal/Zip code	31020
Country	Italy

### 1.2 Test specifications

---

FCC 47 CFR Part 15, Subpart C, Clause 15.231	Periodic operation in the band 40.66–40.70 MHz and above 70 MHz
--	---

### 1.3 Test methods

---

ANSI C63.10 v 2013	American National Standard for Procedures for Compliance Testing of Unsilenced Wireless Devices
--------------------	---

### 1.4 Statement of compliance

---

Testing was performed against all relevant requirements of the test standard. Results obtained indicate that the product under test does not comply in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
369734-2TRFWLFAIL	Original report issued
377118-2TRFWL	Repetition of test fail

## Section 2. Summary of test results

---

### 2.1 FCC Part 15 Subpart C test results

---

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not applicable <sup>1</sup>
§15.203	Antenna requirement	Pass <sup>2</sup>
§15.231(a)	Conditions for intentional radiators to comply with periodic operation	Pass
§15.231(b)	Field strength of emissions	Pass
§15.231(c)	Emission bandwidth	Pass
§15.231(d)	Requirements for devices operating within 40.66–40.70 MHz band	Not applicable
§15.231(e)	Conditions for intentional radiators to comply with periodic operation	Not applicable

Notes: <sup>1</sup> The EUT is powered by internal battery

<sup>2</sup> The Antennas are located within the enclosure of EUT and not user accessible.

## Section 3. Equipment under test (EUT) details

### 3.1 Sample information

Receipt date	July 3, 2019
Nemko sample ID number	377118-2/2

### 3.2 EUT information

Product name	SRD International Radiators
Model	TRANS2018-RC
Serial number	377118-2/2 (Number assigned by Nemko Spa)

### 3.3 Technical information

Operating band	Above 70 MHz
Operating frequency	433.92 MHz
Modulation type	OOK
Field strength (dBμV/m @ 3 m)	78.8
Measured BW (kHz) (99 %)	25.2
Emission classification (F1D, G1D, D1D)	--
Transmitter spurious, (dBμV/m @ 3 m)	58.4 @ 4.7 GHz
Power requirements	2 x AAA type batteries
Antenna information	The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

### 3.4 Product description and theory of operation

The EUT is a manually operated four-button radio remote control powered by internal batteries.

### 3.5 EUT exercise details

The EUT is in continuous transmission mode keeping a button pressed.

### 3.6 EUT setup diagram

EUT powered by internal batteries without I/O lines

### 3.7 EUT sub assemblies

The EUT is composed by a single unit

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	18–33 °C
Relative humidity	30–60 %
Air pressure	980–1060 mbar

Test equipment used for the monitoring of the environmental conditions

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Thermohygrometer data loggers	Testo	175-H2	20012380/305	2019-01	2021-01
Thermohygrometer data loggers	Testo	175-H2	38203337/703	2019-01	2021-01
Barometer	MSR	MSR145B	330080	2019-04	2020-04

### 5.2 Power supply range

---

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.



## Section 6. Measurement uncertainty

### 6.1 Uncertainty of measurement

EUT	Type	Test	Range and Setup features	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	10 kHz ÷ 30 MHz	1.0 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.6 dB	(1)
		Conducted spurious emissions	10 kHz ÷ 26 GHz	3.0 dB	(1)
			26 GHz ÷ 40 GHz	4.5 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter – Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
	Radiated	Radiated spurious emissions	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 40 GHz	8.0 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26,5 GHz ÷ 40 GHz	8.0 dB	(1)
Receiver	Radiated	Radiated spurious emissions	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 40 GHz	8.0 dB	(1)
		Sensitivity measurement	1 MHz ÷ 18 GHz	6.0 dB	(1)
	Conducted	Conducted spurious emissions	10 kHz ÷ 26 GHz	3.0 dB	(1)
			26 GHz ÷ 40 GHz	4.5 dB	(1)

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$  which has been derived from the assumed normal probability distribution with infinite degrees of freedom and for a coverage probability of 95 %

## Section 7. Test equipment

### 7.1 Test equipment list

**Table 7.1-1: Equipment list**

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI receiver (20 Hz ÷ 8 GHz)	R&S	ESU8	100202	2019-01	2020-01
EMI receiver (20 Hz ÷ 8 GHz)	R&S	ESW44	101620	2019-05	2020-05
Trilog Broadband Antenna	Schwarzbeck	VULB 9162	9162-025	2018-07	2021-07
Bilog antenna (1 ÷ 18 GHz)	Schwarzbeck	STLP 9148	9148-123	2018-07	2021-07
Antenna mast	R&S	HCM	836 529/05	NCR	NCR
Controller	R&S	HCC	836 620/7	NCR	NCR
Turning-table	R&S	HCT	835 803/03	NCR	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	2018-09	2021-09
Shielded room	Siemens	10m control room	1947	NCR	NCR

Note: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

### 8.1 FCC 15.31(m) Number of frequencies

#### 8.1.1 Definitions and limits

Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

**Table 8.1-1: Frequency Range of Operation**

Frequency range over which the device operates (in each band)	Number of test frequencies required	Location of measurement frequency inside the operating frequency range
1 MHz or less	1	Center (middle of the band)
1–10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near center and 1 near low end

Note: “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

#### 8.1.2 Test summary

Test date	February 19, 2019	Temperature	21 °C
Test engineer	P. Barbieri	Air pressure	1025 mbar
Verdict	Pass	Relative humidity	36 %

#### 8.1.3 Observations, settings and special notes

None

#### 8.1.4 Test data

**Table 8.1-2: Test channels selection**

Start of Frequency range, MHz	End of Frequency range, MHz	Frequency range bandwidth, MHz	Low channel, MHz	Mid channel, MHz	High channel, MHz
--	--	--	--	433.92	--

The EUT use only one channel

## 8.2 FCC 15.203 and RSS-Gen, section 6.8 Antenna requirement

### 8.2.1 Definitions and limits

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 8.2.2 Test summary


Test date	February 19, 2019	Temperature	21 °C
Test engineer	P. Barbieri	Air pressure	1025 mbar
Verdict	Pass	Relative humidity	36 %

### 8.2.3 Observations, settings and special notes

None

### 8.2.4 Test data

Must the EUT be professionally installed? ☐ YES ☒ NO  
 Does the EUT have detachable antenna(s)? ☐ YES ☒ NO  
 If detachable, is the antenna connector(s) non-standard? ☐ YES ☐ NO ☒ N/A

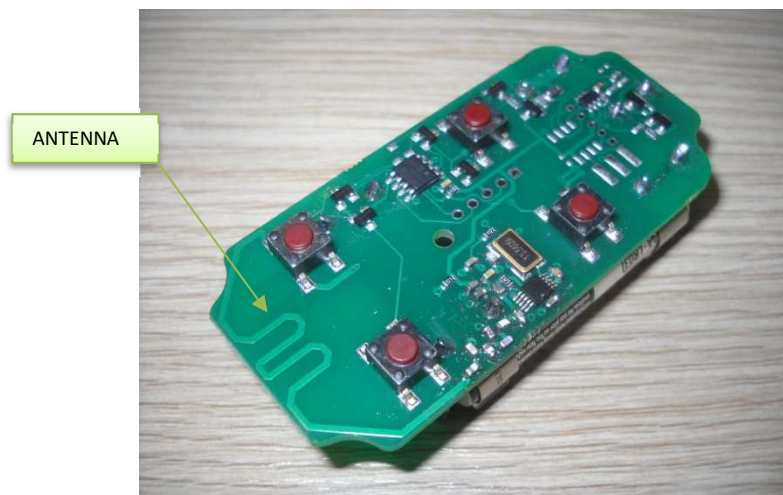

## 8.3 FCC 15.231(a) Conditions for intentional radiators to comply with periodic operation

---

### 8.3.1 Definitions and limits

---

- (a) The provisions of this section are restricted to periodic operation within the band 40.66–40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:
- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
  - (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
  - (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
  - (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
  - (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

### 8.3.2 Test summary

---

Test date	February 19, 2019	Temperature	21 °C
Test engineer	P. Barbieri	Air pressure	1025 mbar
Verdict	Pass	Relative humidity	36 %

### 8.3.3 Observations, settings and special notes


---

None

### 8.3.4 Test data

- |    |   |   |  |
|----|---|---|--|
| 1) | The EUT is manually triggered?                                    | <input checked="" type="checkbox"/> YES | <input type="checkbox"/> NO            |
| 2) | The EUT is activated automatically?                               | <input type="checkbox"/> YES            | <input checked="" type="checkbox"/> NO |
| 3) | The EUT is a periodic transmitter?                                | <input type="checkbox"/> YES            | <input checked="" type="checkbox"/> NO |
| 4) | The EUT's usage is for radio control purposes during emergencies? | <input type="checkbox"/> YES            | <input checked="" type="checkbox"/> NO |
| 5) | The EUT transmits set-up information?                             | <input type="checkbox"/> YES            | <input checked="" type="checkbox"/> NO |

Once manually triggered the EUT stop to transmit after the release of the button.

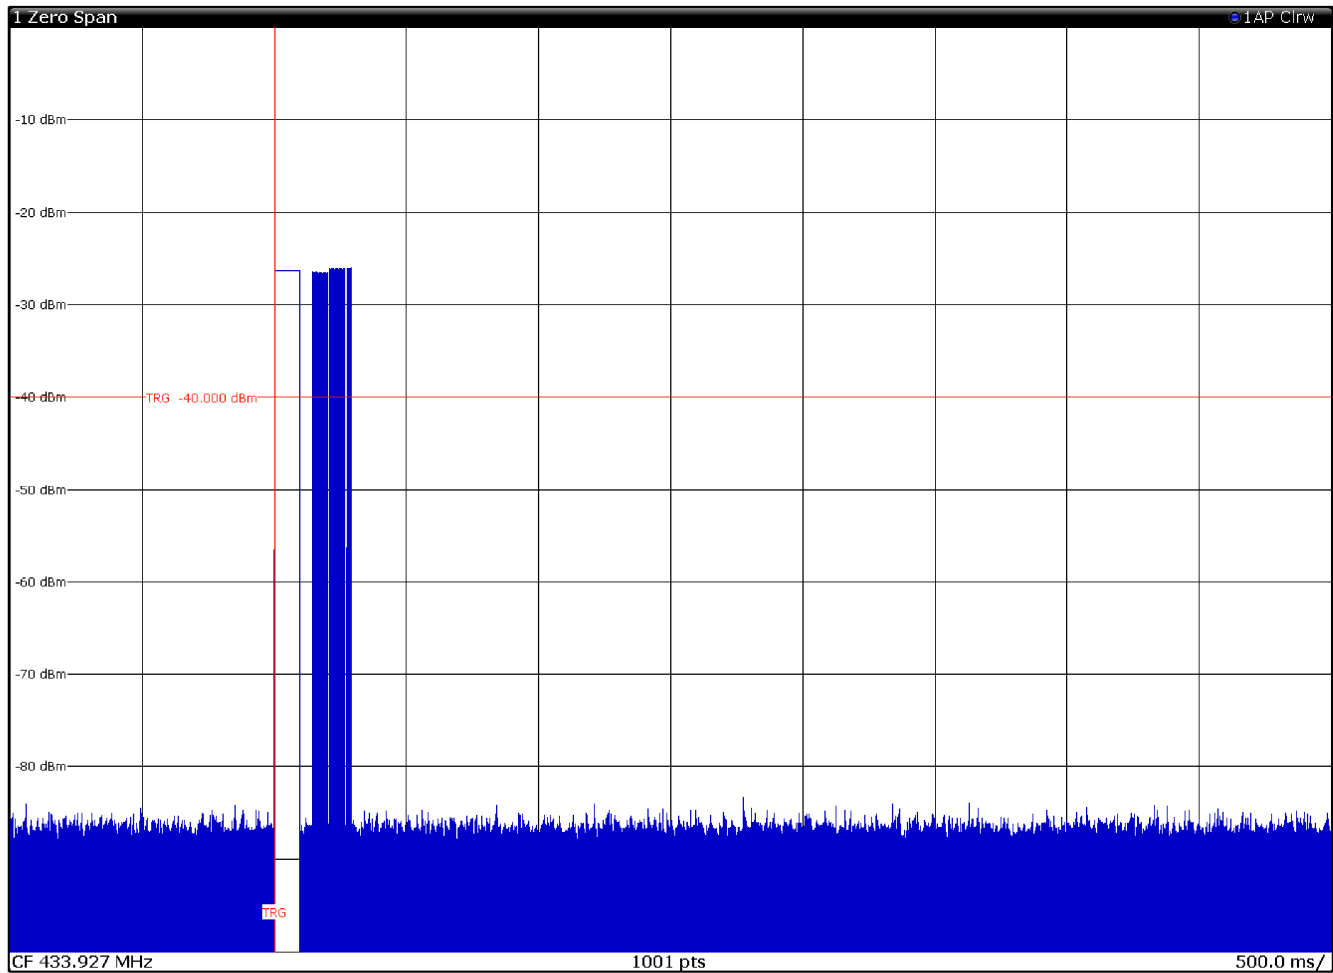


Section 8	Testing data
Test name	FCC 15.231(a) Conditions for intentional radiators to comply with periodic operation
Specification	FCC Part 15 Subpart C

Detailed timing information:

The EUT repeat the following pattern:

1 pulse of 6 ms followed by a 36 pulse of 0.6 ms followed by a pause of 12.6 ms

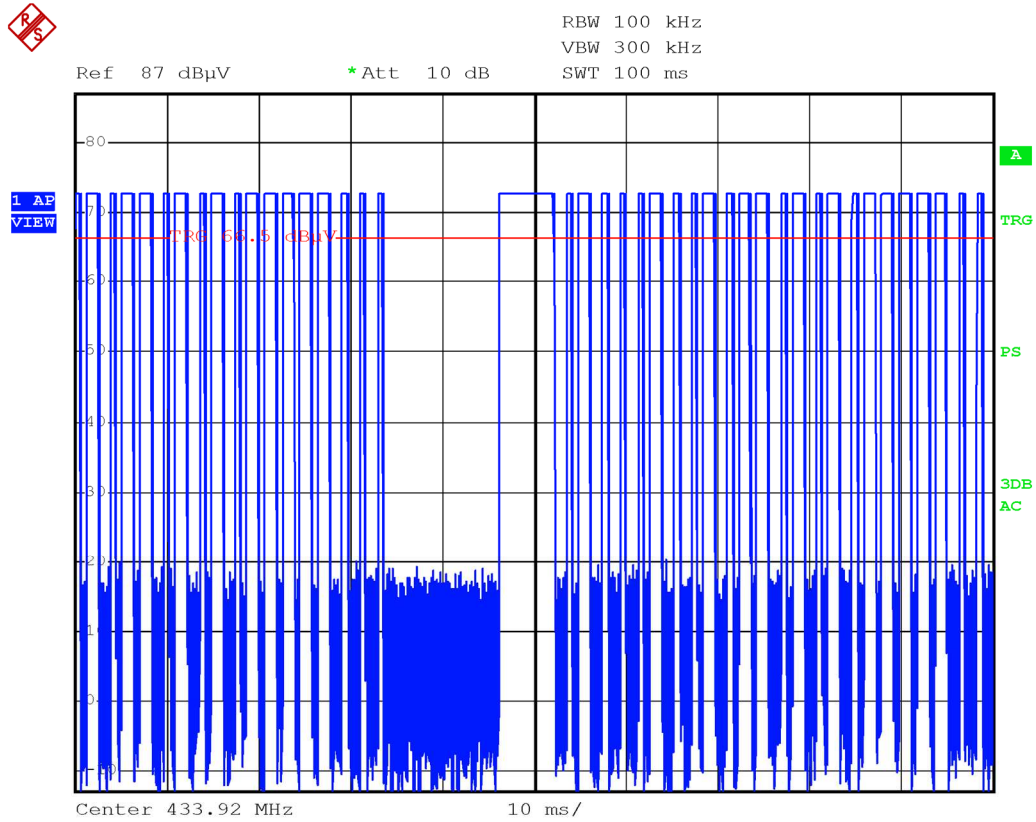

The duty cycle calculated, with the following equation, is 39.0 %.

$$\delta(\text{dB}) = 20 \log \left[ \frac{\sum (nt_1 + mt_2 + \dots + \xi t_x)}{T} \right]$$

## 8.4 FCC 15.231(b) Field strength of emissions

### 8.4.1 Definitions and limits

- (b) In addition to the provisions of §15.205 the field strength of emissions from intentional radiators operated under this section shall not exceed the following table.
- 1) The field strength limits in the table are specified at a distance of 3 meters. The tighter limits apply at the band edges.
  - 2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.
  - 3) The limits on the field strength of the spurious emissions in the table below are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

**Table 8.4-1: Field strength limits**

Fundamental frequency (MHz)	Field strength of fundamental		Field strength of spurious emissions	
	( $\mu\text{V}/\text{m}$ )	(dB $\mu\text{V}/\text{m}$ )	( $\mu\text{V}/\text{m}$ )	(dB $\mu\text{V}/\text{m}$ )
40.66–40.70	2,250	67	225	47
70–130	1,250	61.9	125	41.9
130–174	1,250 to 3,750*	61.9 to 71.5*	125 to 375*	41.9 to 51.5*
174–260	3,750	71.5	375	51.5
260–470	3,750 to 12,500*	71.5 to 81.9*	375 to 1,250*	51.5 to 61.9*
Above 470	12,500	81.9	1,250	61.9

\* Linear interpolations

Note:

\* Linear interpolation with frequency F in MHz

**Table 8.4-2: FCC §15.209– Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	$\mu\text{V}/\text{m}$	dB $\mu\text{V}/\text{m}$	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test



**Table 8.4-3: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

#### 8.4.2 Test summary

Test date	July 3, 2019	Temperature	25 °C
Test engineer	G. Tepelena	Air pressure	1025 mbar
Verdict	Pass	Relative humidity	38 %

#### 8.4.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 5 GHz.  
Radiated measurements were performed at a distance of 3 m.  
EUTs that can be operated in multiple orientations (such as handheld, portable, or modular devices) shall be tested in three orientations.  
Average radiated emissions were obtained by subtracting duty cycle / correction factor from the peak measurement results.

Spectrum analyser settings for radiated measurements below 1 GHz:

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold

Spectrum analyser settings for radiated measurements above 1 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak
Trace mode	Max Hold


#### 8.4.4 Test data

##### Duty cycle/average factor calculations

§15.35(c) When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed; the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

$$\text{Duty cycle or average factor} = 20 \times \log_{10} \left( \frac{T_{x100ms}}{100ms} \right)$$


$$\text{Duty cycle correction factor for 46.4 ms pulse duration} = 20 \times \log_{10} (46.4 / 100) = -8.2 \text{ dB}$$

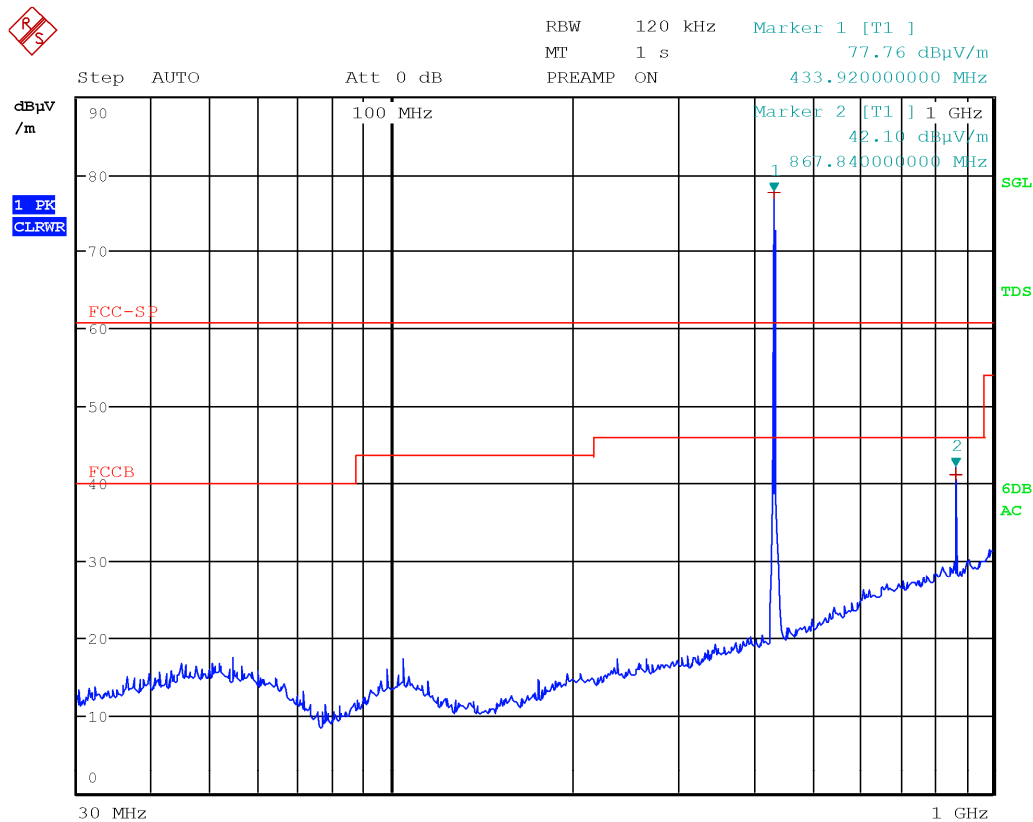

Date: 3.JUL.2019 09:11:23

Radiated emission in the frequency range 30 to 1000 MHz with EUT in horizontal position and the antenna in horizontal polarization


Frequency, MHz	Peak field strength, dBμV/m	Peak limit, dBμV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBμV/m	Average limit, dBμV/m	Margin, dB
433.92	77.76	--	--	-8.2	69.56	80.8	-11.24
867.84	42.10	--	--	-8.2	41.18	60.8	-19.62

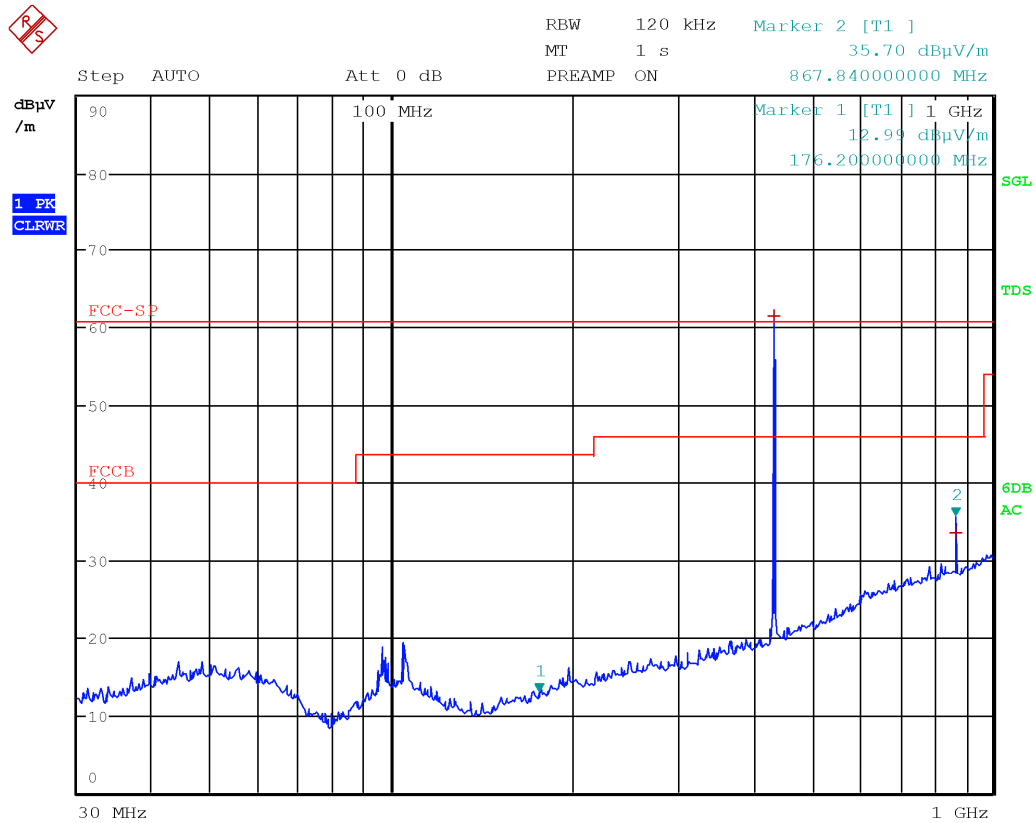

Date: 3.JUL.2019 09:03:56

Radiated emission in the frequency range 30 to 1000 MHz with EUT in horizontal position and the antenna in vertical polarization


Frequency, MHz	Peak field strength, dBμV/m	Peak limit, dBμV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBμV/m	Average limit, dBμV/m	Margin, dB
433.92	61.68	--	--	-8.2	53.48	80.8	-27.32
867.84	35.70	--	--	-8.2	27.5	60.8	-33.3

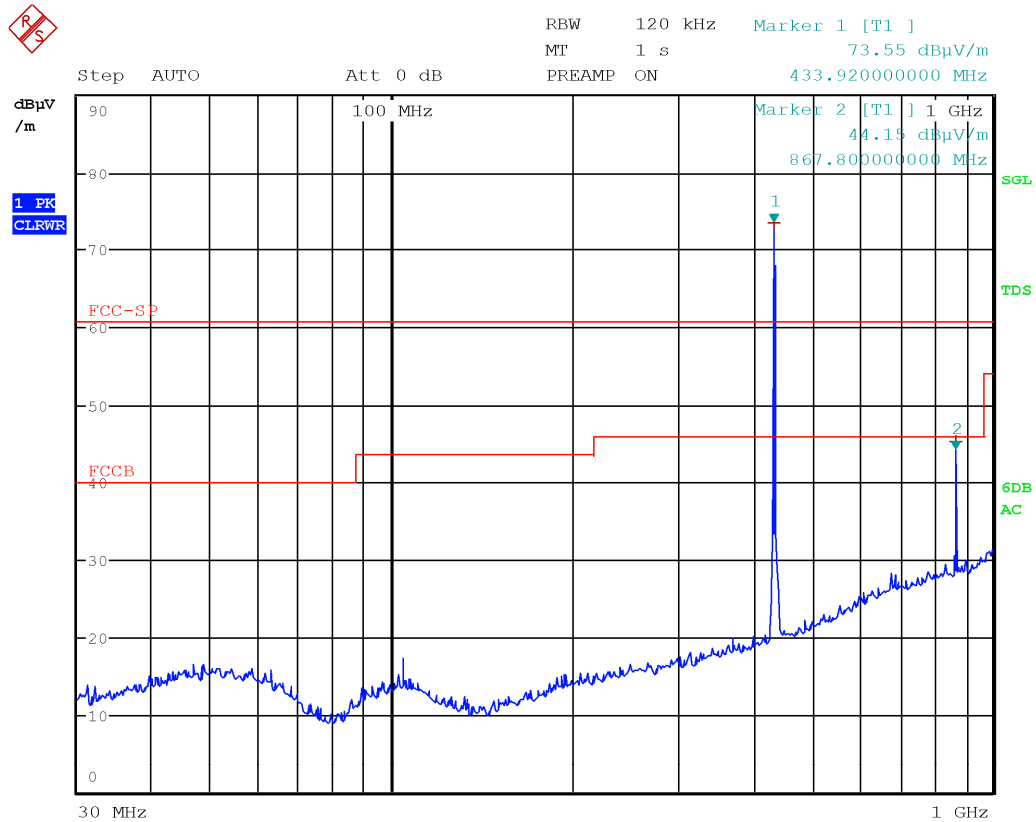

Date: 3.JUL.2019 09:25:40

Radiated emission in the frequency range 30 to 1000 MHz with EUT in lateral position and the antenna in horizontal polarization


Frequency, MHz	Peak field strength, dBμV/m	Peak limit, dBμV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBμV/m	Average limit, dBμV/m	Margin, dB
433.92	73.55	--	--	-8.2	65.35	80.8	-15.45
867.84	44.15	--	--	-8.2	35.95	60.8	-24.85

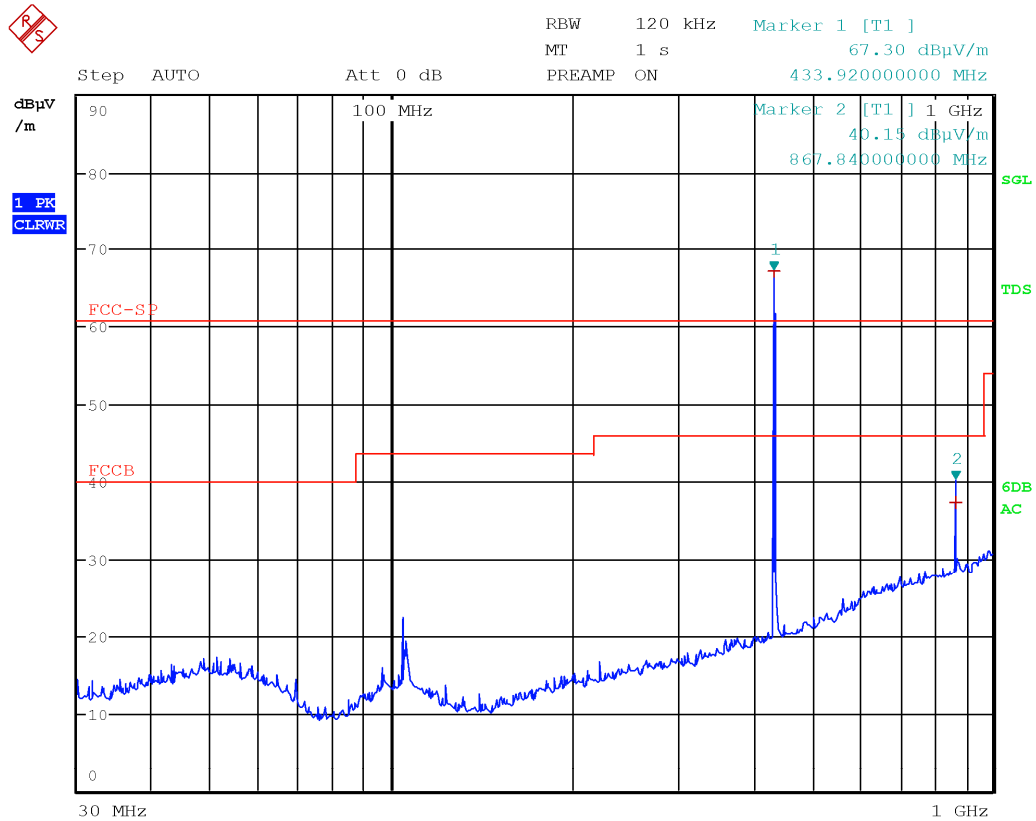

Date: 3.JUL.2019 09:29:19

Radiated emission in the frequency range 30 to 1000 MHz with EUT in lateral position and the antenna in vertical polarization


Frequency, MHz	Peak field strength, dBμV/m	Peak limit, dBμV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBμV/m	Average limit, dBμV/m	Margin, dB
433.92	67.30	--	--	-8.2	59.1	80.8	-21.7
867.84	40.15	--	--	-8.2	31.95	60.8	-28.85

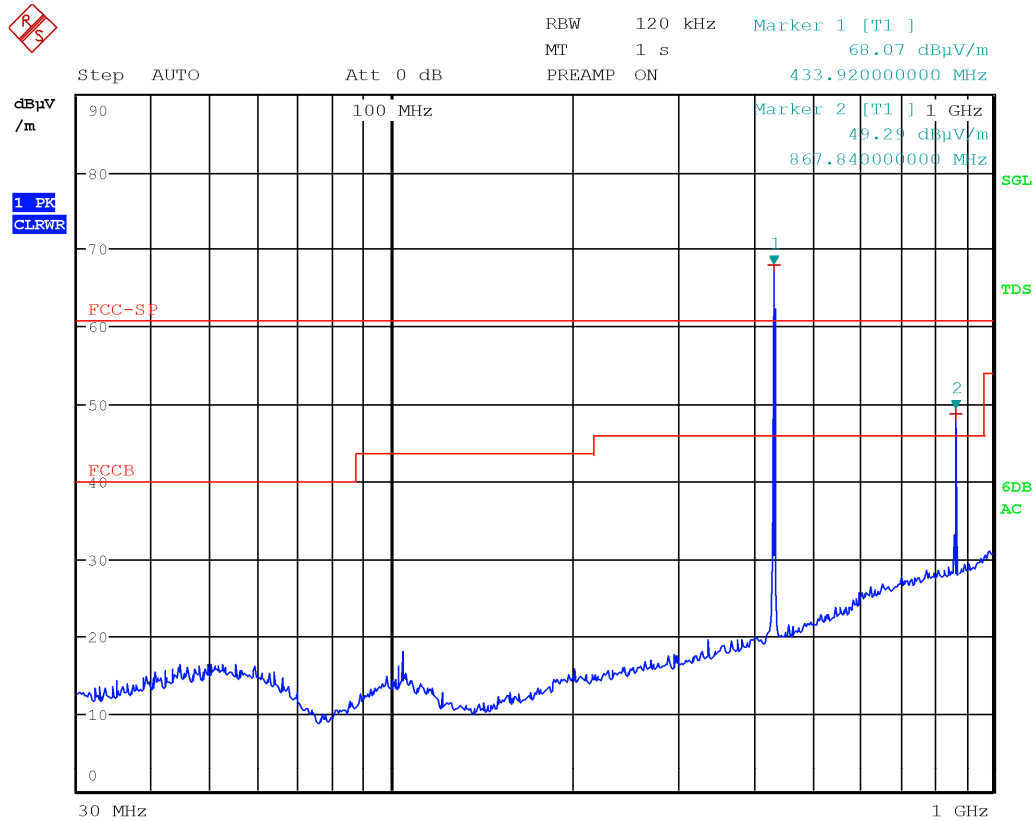

Date: 3.JUL.2019 10:06:08

Radiated emission in the frequency range 30 to 1000 MHz with EUT in vertical position and the antenna in horizontal polarization


Frequency, MHz	Peak field strength, dBμV/m	Peak limit, dBμV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBμV/m	Average limit, dBμV/m	Margin, dB
433.92	68.07	--	--	-8.2	59.87	80.8	-20.93
867.84	49.29	--	--	-8.2	41.09	60.8	-19.71

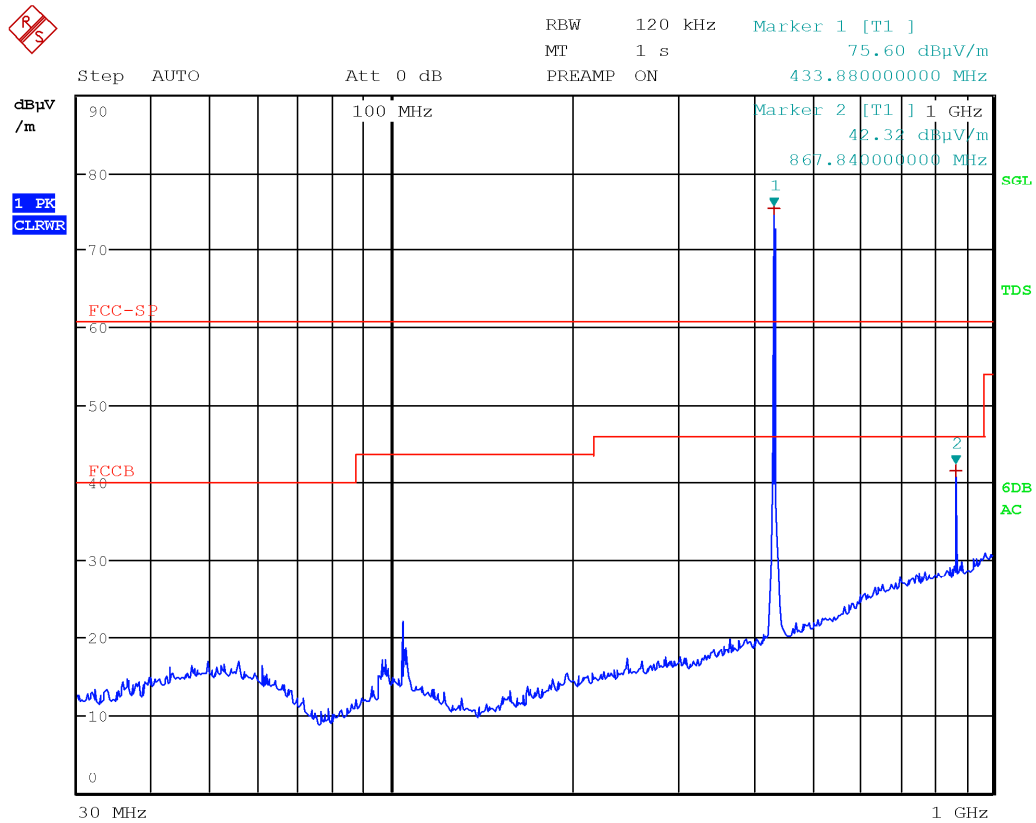

Date: 3.JUL.2019 09:55:21

Radiated emission in the frequency range 30 to 1000 MHz with EUT in vertical position and the antenna in vertical polarization

Frequency, MHz	Peak field strength, dBμV/m	Peak limit, dBμV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBμV/m	Average limit, dBμV/m	Margin, dB
433.92	75.60	--	--	-8.2	67.4	80.8	-13.4
867.84	42.32	--	--	-8.2	34.12	60.8	-26.68

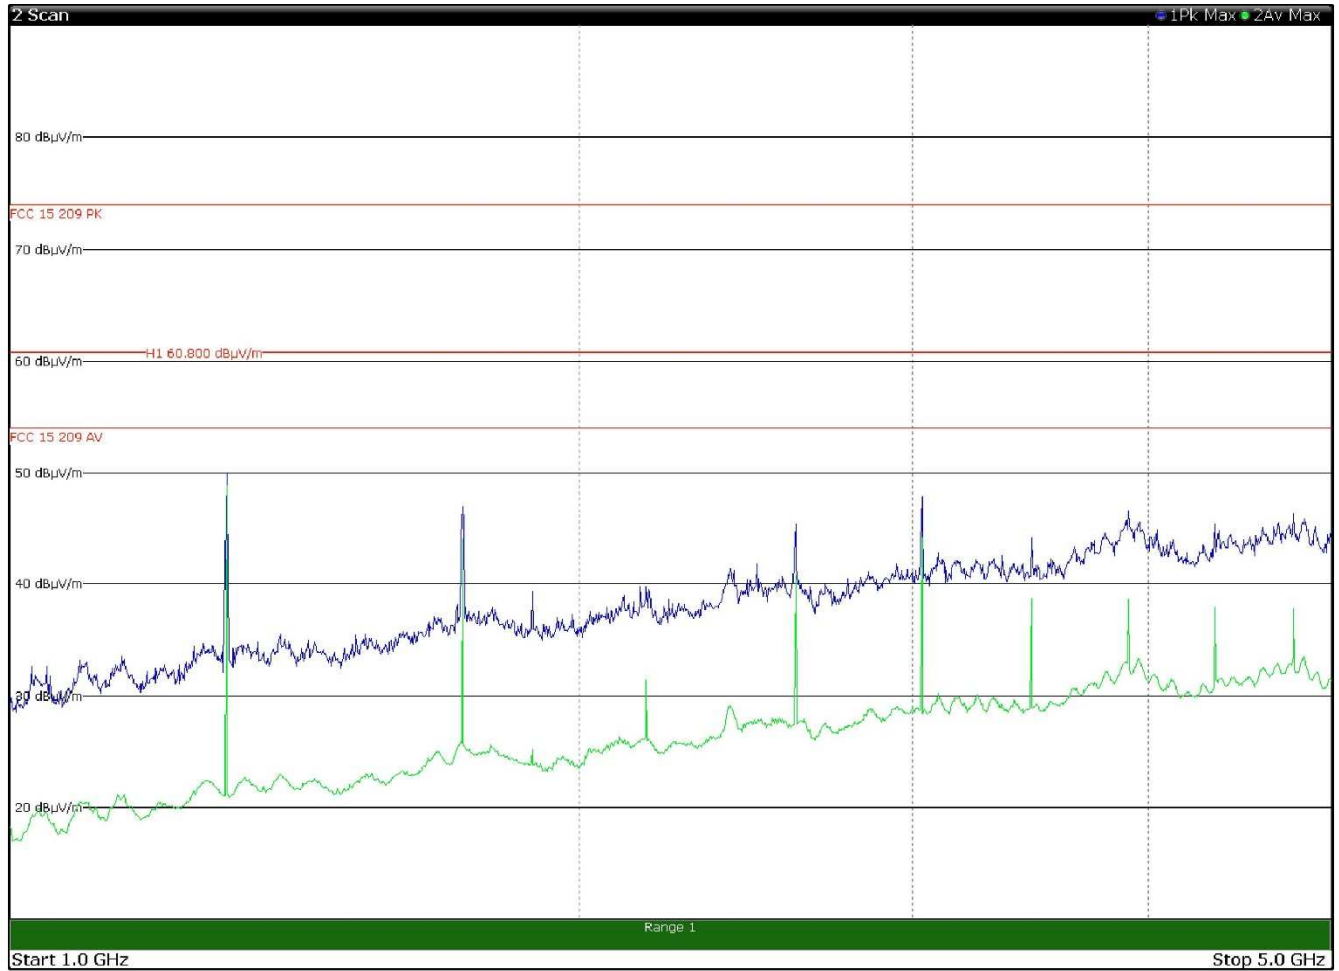


11:28:43 03.07.2019

Page 1/1

Radiated emission in the frequency range 1 to 5 GHz with EUT in horizontal position and the antenna in horizontal polarization


Frequency, MHz	Peak field strength, dBµV/m	Peak limit, dBµV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBµV/m	Average limit, dBµV/m	Margin, dB
1301.75	50	74	-24	-6.6	43.4	54	-10.6
1735.75	47.2	74	-26.8	-6.6	40.6	60.8	-20.2
2169.5	39.8	74	-34.2	-6.6	33.2	60.8	-27.6
2603.5	45.8	74	-28.2	-6.6	39.2	60.8	-21.6
3037.5	48.3	74	-25.7	-6.6	41.7	60.8	-19.1
3471.5	43.1	74	-30.9	-6.6	36.5	60.8	-24.3
3905.25	47.6	74	-26.4	-6.6	41	54	-13
4773.25	47.9	74	-26.1	-6.6	41.3	54	-12.7



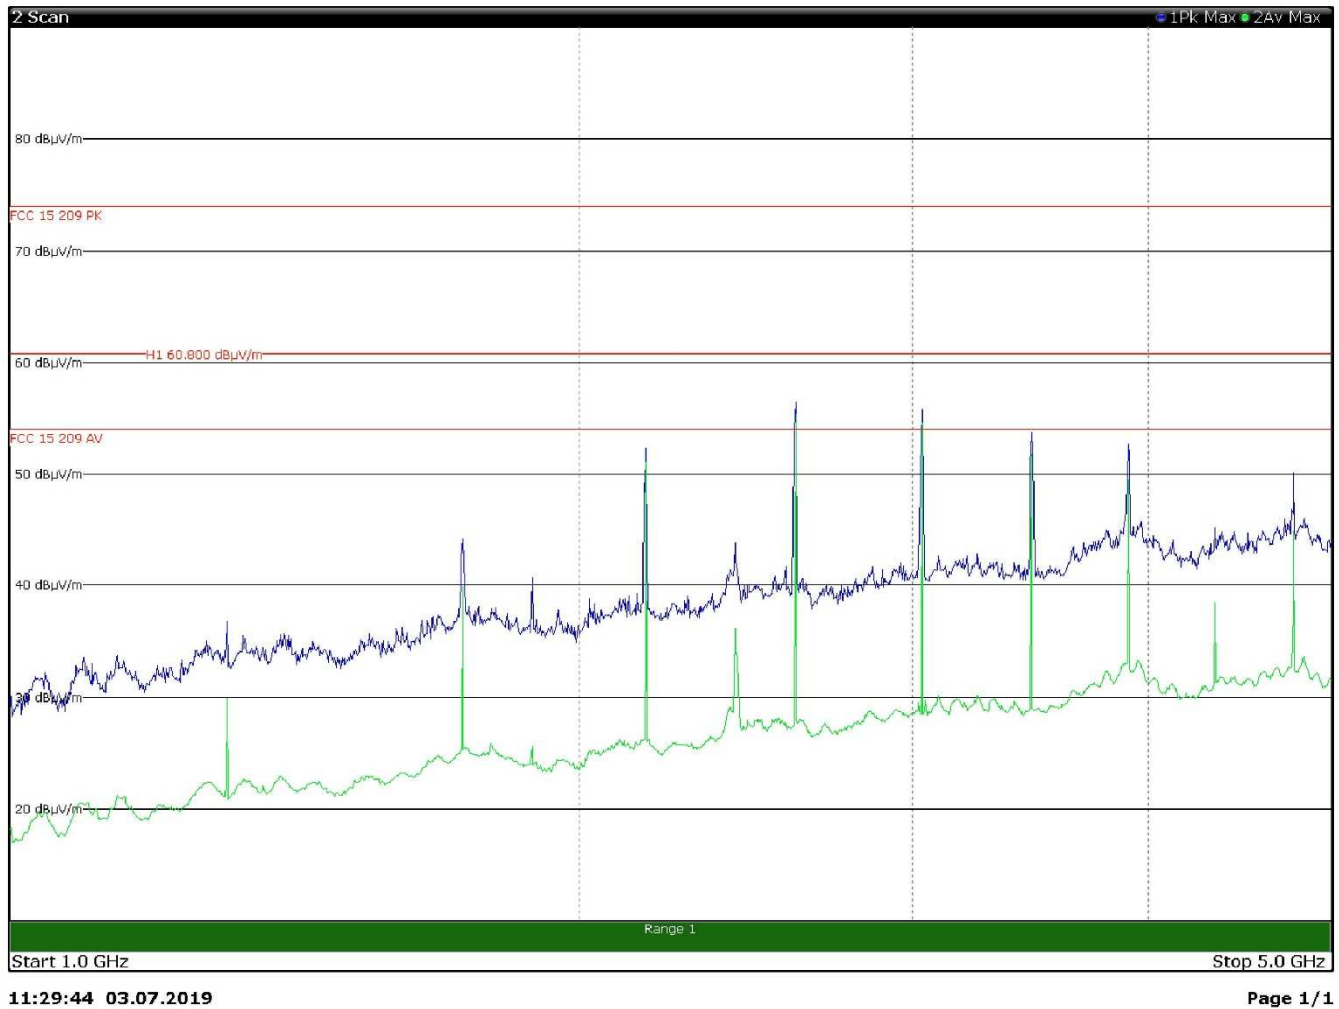

Radiated emission in the frequency range 1 to 5 GHz with EUT in horizontal position and the antenna in vertical polarization

Frequency, MHz	Peak field strength, dBµV/m	Peak limit, dBµV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBµV/m	Average limit, dBµV/m	Margin, dB
1301.75	37.2	74	-36.8	-6.6	30.6	54	-23.4
1735.75	43.4	74	-30.6	-6.6	36.8	60.8	-24
2169.5	43.7	74	-30.3	-6.6	37.1	60.8	-23.7
2603.5	57.6	74	-16.4	-6.6	51	60.8	-9.8
3037.5	54.7	74	-19.3	-6.6	48.1	60.8	-12.7
3471.5	53.7	74	-20.3	-6.6	47.1	60.8	-13.7
3905.25	52.3	74	-21.7	-6.6	45.7	54	-8.3

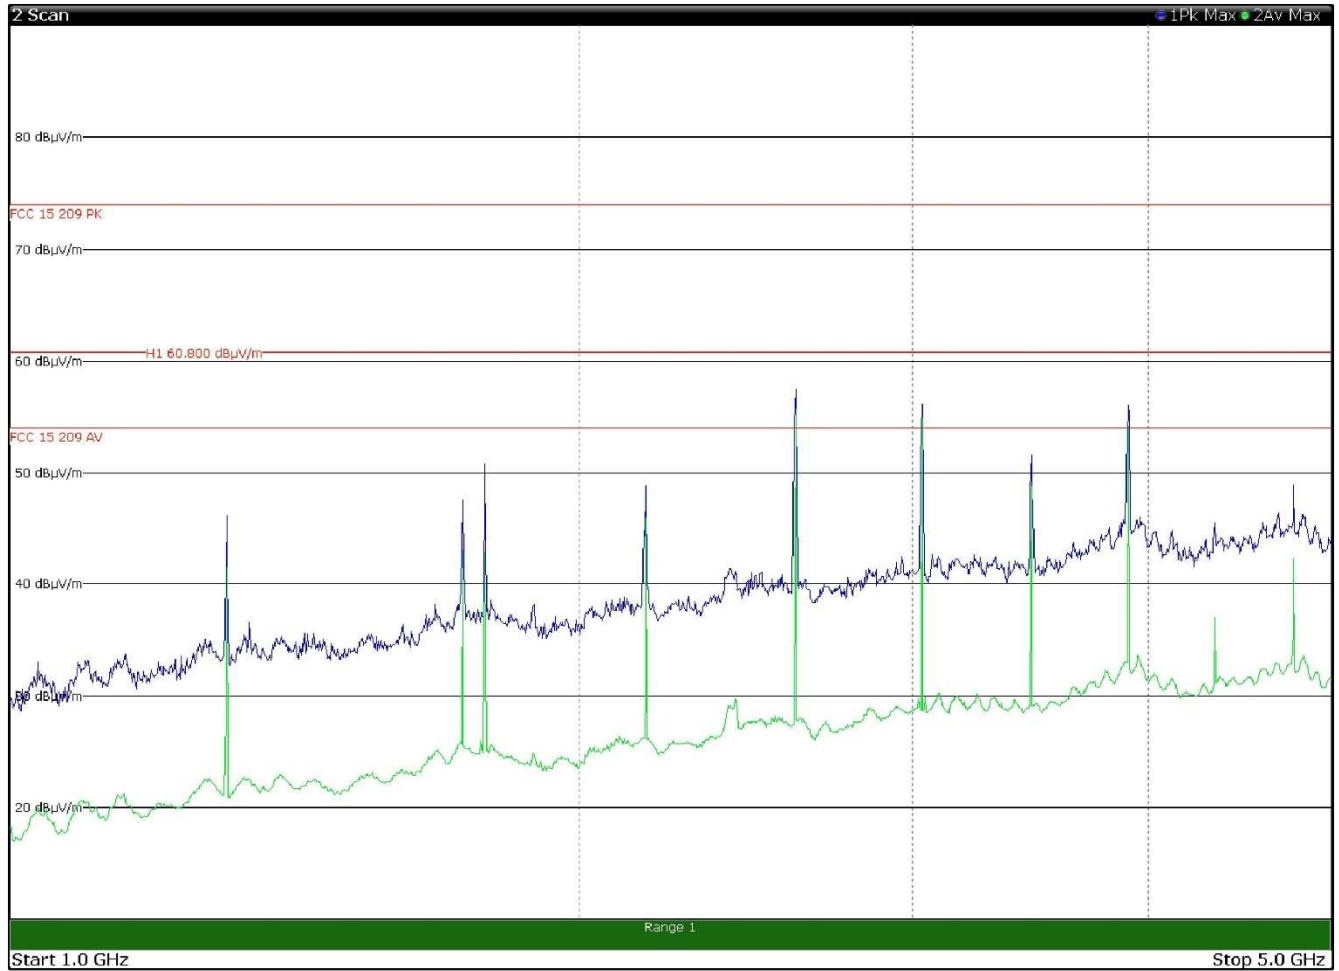


11:10:56 03.07.2019

Page 1/1

Radiated emission in the frequency range 1 to 5 GHz with EUT in lateral position and the antenna in horizontal polarization

Frequency, MHz	Peak field strength, dBµV/m	Peak limit, dBµV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBµV/m	Average limit, dBµV/m	Margin, dB
1301.75	46.5	74	-27.5	-6.6	39.9	54	-14.1
1735.75	50.1	74	-23.9	-6.6	43.5	60.8	-17.3
2169.5	49.4	74	-24.6	-6.6	42.8	60.8	-18
2603.5	57.6	74	-16.4	-6.6	51	60.8	-9.8
3037.5	52.9	74	-21.1	-6.6	46.3	60.8	-14.5
3471.5	51.5	74	-22.5	-6.6	44.9	60.8	-15.9
3905.25	52.8	74	-21.2	-6.6	46.2	54	-7.8
4773.25	49.1	74	-24.9	-6.6	42.5	54	-11.5

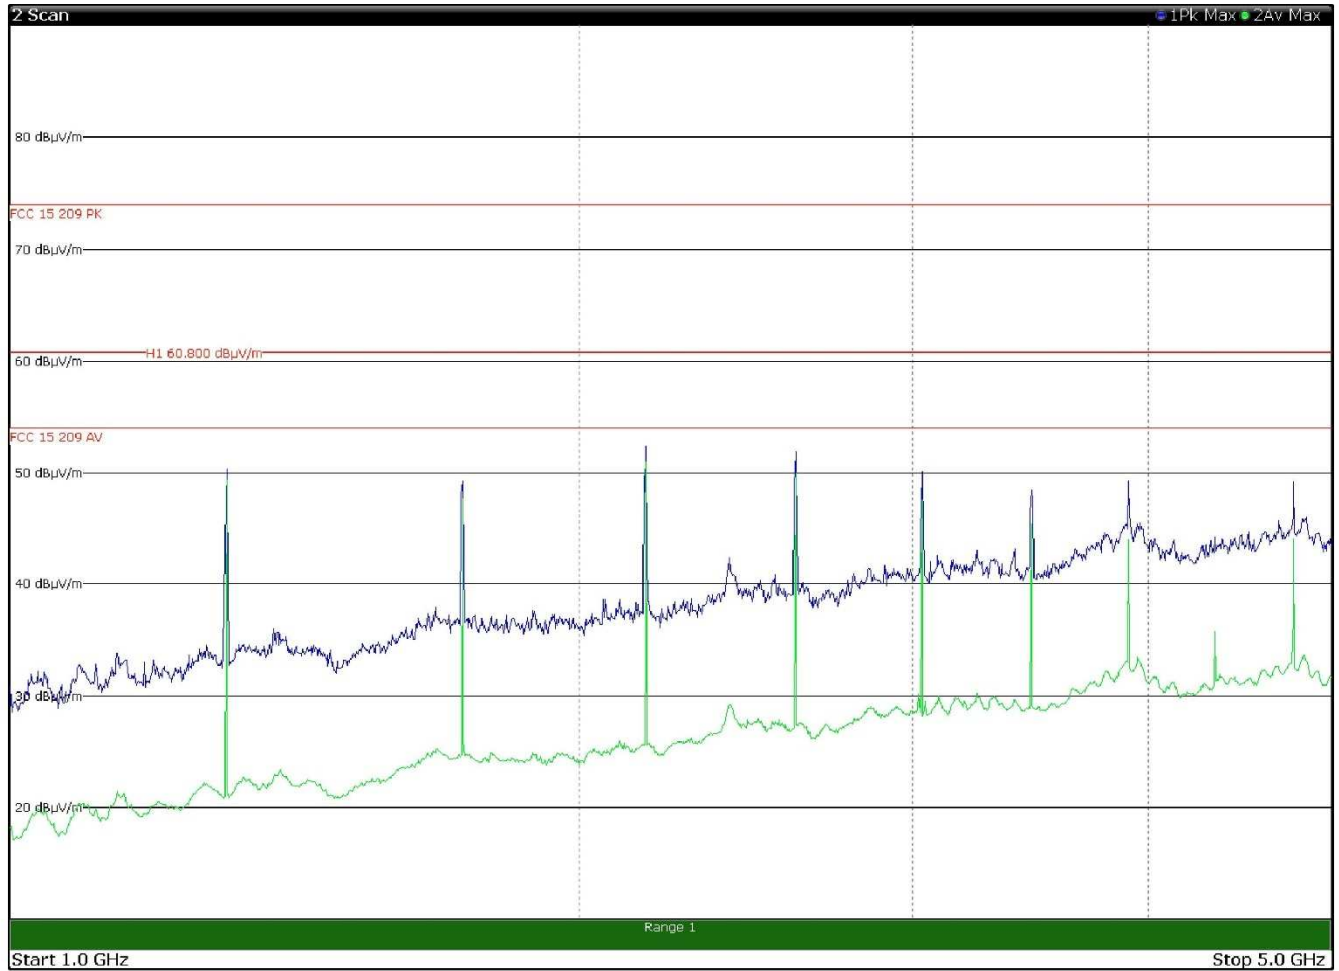


11:09:54 03.07.2019

Page 1/1

Radiated emission in the frequency range 1 to 5 GHz with EUT in lateral position and the antenna in vertical polarization

Frequency, MHz	Peak field strength, dBµV/m	Peak limit, dBµV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBµV/m	Average limit, dBµV/m	Margin, dB
1301.75	50.1	74	-23.9	-6.6	43.5	54	-10.5
1735.75	49.3	74	-24.7	-6.6	42.7	60.8	-18.1
2169.5	52.6	74	-21.4	-6.6	46	60.8	-14.8
2603.5	52.1	74	-21.9	-6.6	45.5	60.8	-15.3
3037.5	50.1	74	-23.9	-6.6	43.5	60.8	-17.3
3471.5	48.7	74	-25.3	-6.6	42.1	60.8	-18.7
3905.25	49.4	74	-24.6	-6.6	42.8	54	-11.2
4773.25	47.6	74	-26.4	-6.6	41	54	-13

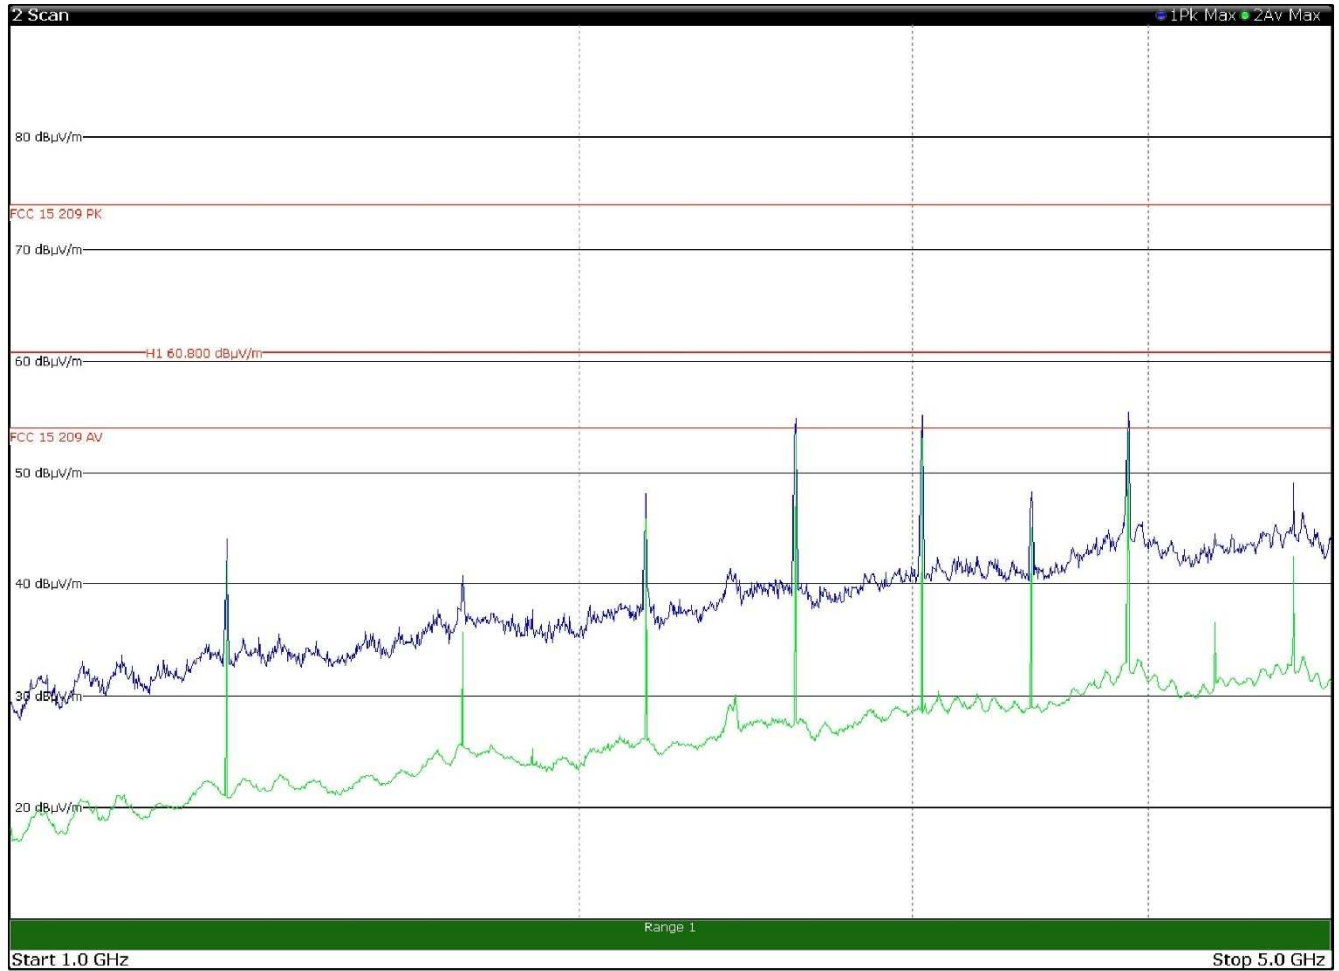


11:39:34 03.07.2019

Page 1/1

Radiated emission in the frequency range 1 to 5 GHz with EUT in vertical position and the antenna in horizontal polarization

Frequency, MHz	Peak field strength, dBµV/m	Peak limit, dBµV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBµV/m	Average limit, dBµV/m	Margin, dB
1301.75	43.2	74	-30.8	-6.6	36.6	54	-17.4
1735.75	40.4	74	-33.6	-6.6	33.8	60.8	-27
2169.5	48.2	74	-25.8	-6.6	41.6	60.8	-19.2
2603.5	48.3	74	-25.7	-6.6	41.7	60.8	-19.1
3037.5	55.1	74	-18.9	-6.6	48.5	60.8	-12.3
3471.5	48.6	74	-25.4	-6.6	42	60.8	-18.8
3905.25	55.5	74	-18.5	-6.6	48.9	54	-5.1
4773.25	49.1	74	-24.9	-6.6	42.5	54	-11.5

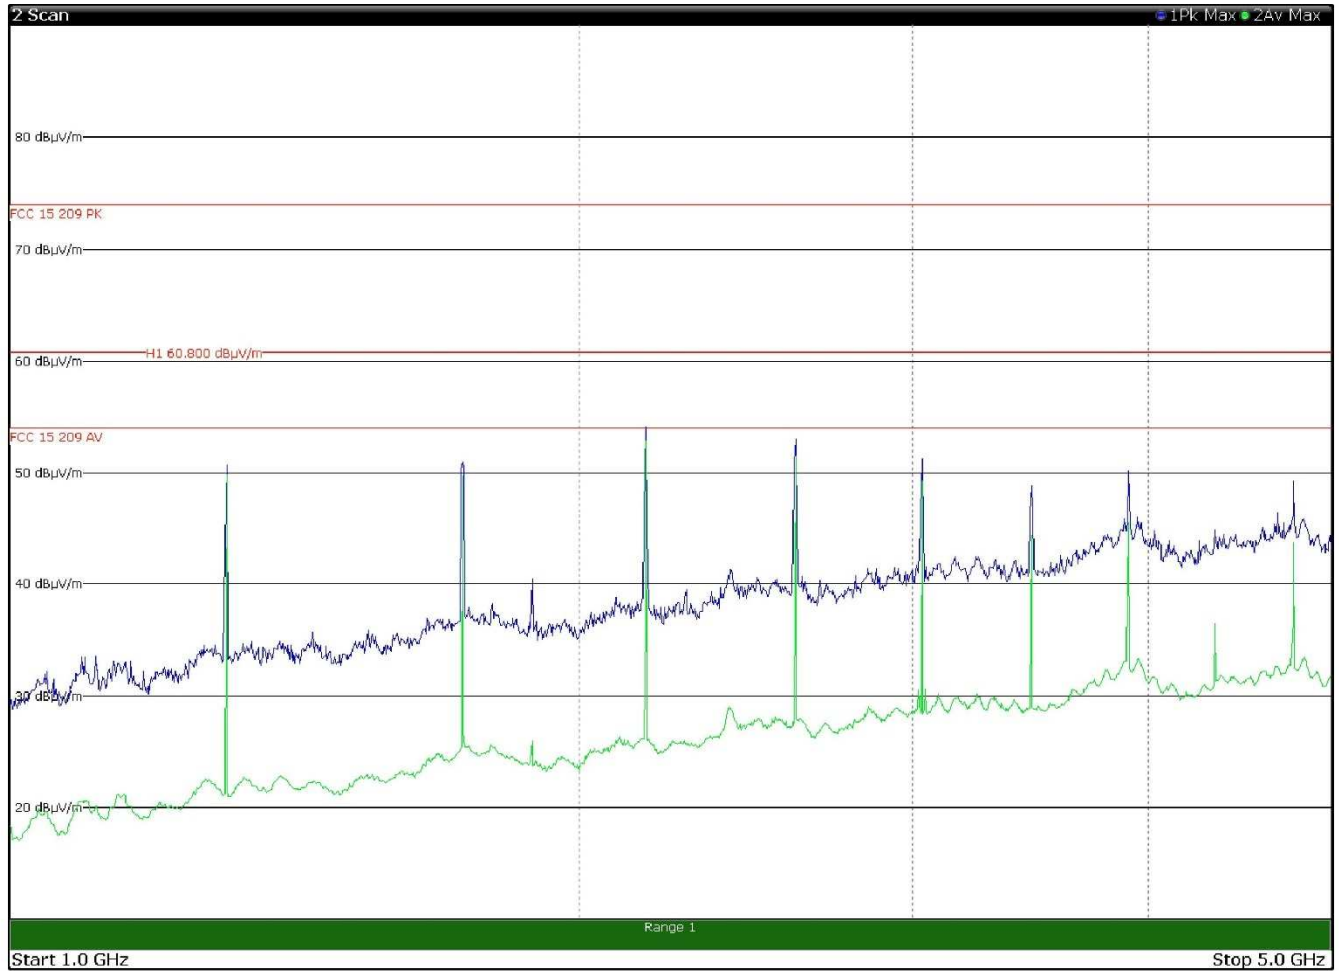

11:37:51 03.07.2019

Page 1/1

Radiated emission in the frequency range 1 to 5 GHz with EUT in vertical position and the antenna in vertical polarization

Frequency, MHz	Peak field strength, dBµV/m	Peak limit, dBµV/m	Margin, dB	Duty cycle factor, dB	Average field strength, dBµV/m	Average limit, dBµV/m	Margin, dB
1301.75	50.3	74	-23.7	-6.6	43.7	54	-10.3
1735.75	50.6	74	-23.4	-6.6	44	60.8	-16.8
2169.5	53.4	74	-20.6	-6.6	46.8	60.8	-14
2603.5	52.8	74	-21.2	-6.6	46.2	60.8	-14.6
3037.5	51.1	74	-22.9	-6.6	44.5	60.8	-16.3
3471.5	49.2	74	-24.8	-6.6	42.6	60.8	-18.2
4339.3	43.1	74	-30.9	-6.6	36.5	54	-17.5

## 8.5 FCC 15.231(c) Emission bandwidth of momentary signals

### 8.5.1 Definitions and limits

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 8.5.2 Test summary

Test date	February 21, 2019	Temperature	21 °C
Test engineer	P. Barbieri	Air pressure	1025 mbar
Verdict	Pass	Relative humidity	36 %

### 8.5.3 Observations, settings and special notes

Limit: 0.25 % of 433.92 MHz is 1.08 MHz

Spectrum analyser settings:

Resolution bandwidth	≥ 1 % of emission bandwidth
Video bandwidth	≥ 3 × RBW
Frequency span	Wider than emission bandwidth
Detector mode	Peak

### 8.5.4 Test data

**Table 8.5-1:** Occupied bandwidth measurement result

Occupied bandwidth per frequency, KHz	Limit, MHz	Margin, MHz
25.3	1.08	-1.05


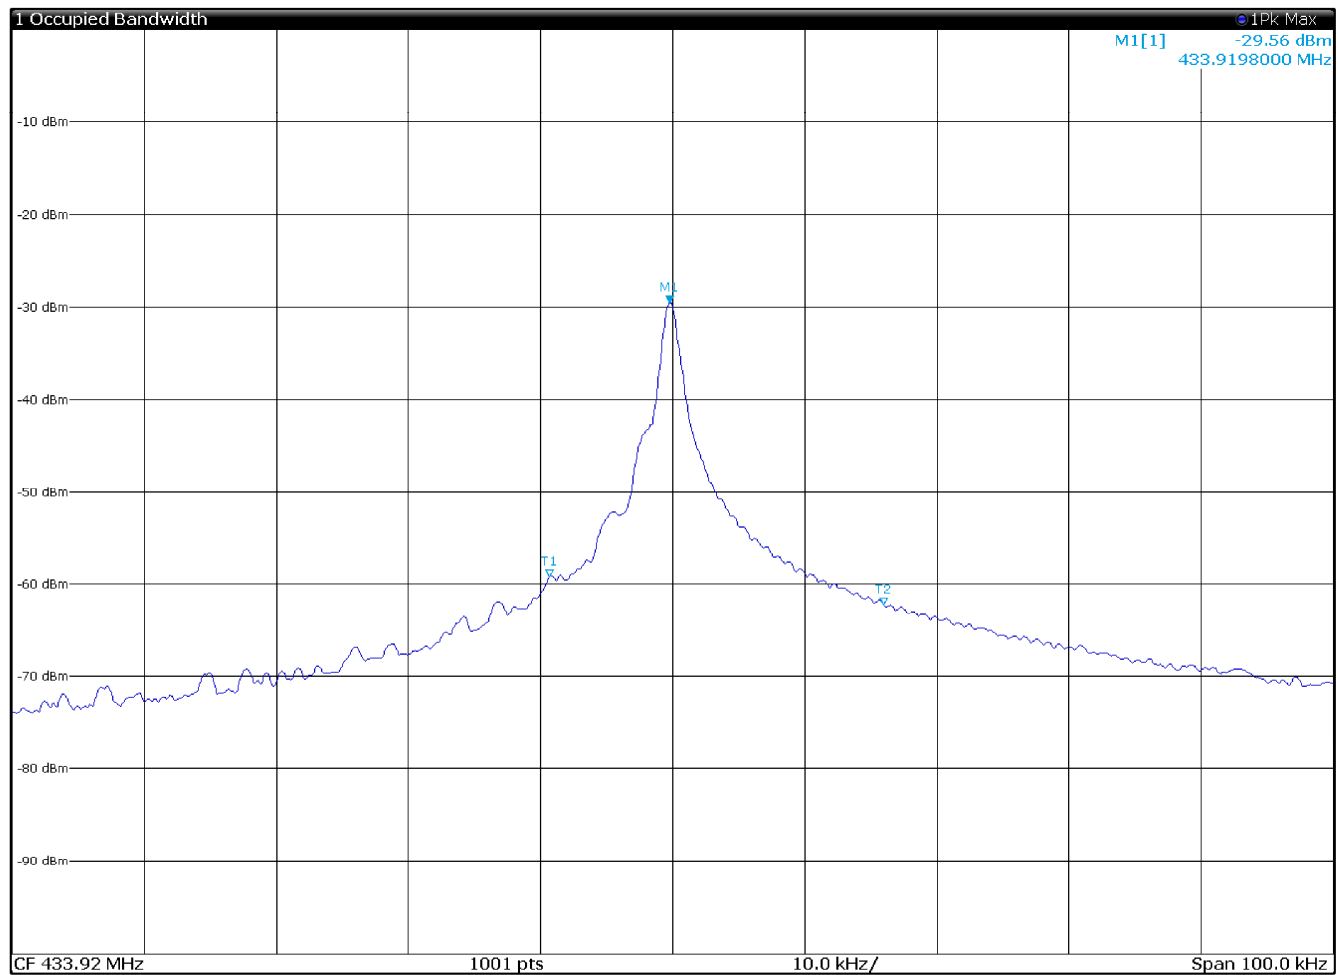


Figure 8.5-1: Occupied bandwidth measurement

2 Marker Table						
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		433.9198 MHz	-29.56 dBm		
T1	1		433.9107093 MHz	-59.15 dBm	Occ Bw	25.274725275 kHz
T2	1		433.935984 MHz	-62.23 dBm		


## Section 9. Block diagrams of test set-ups

### 9.1 Radiated emissions set-up for frequencies below 1 GHz

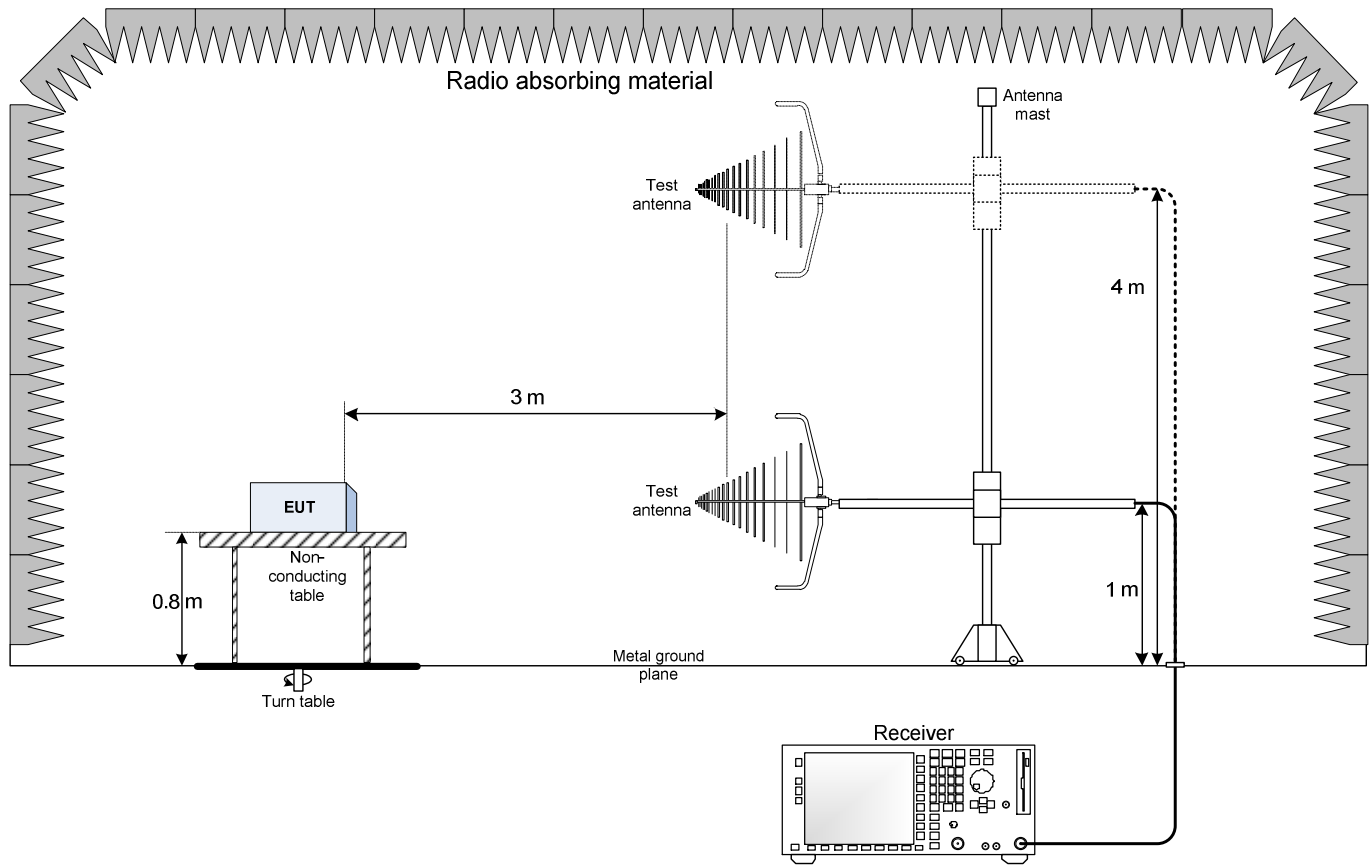



## 9.2 Radiated emissions set-up for frequencies above 1 GHz

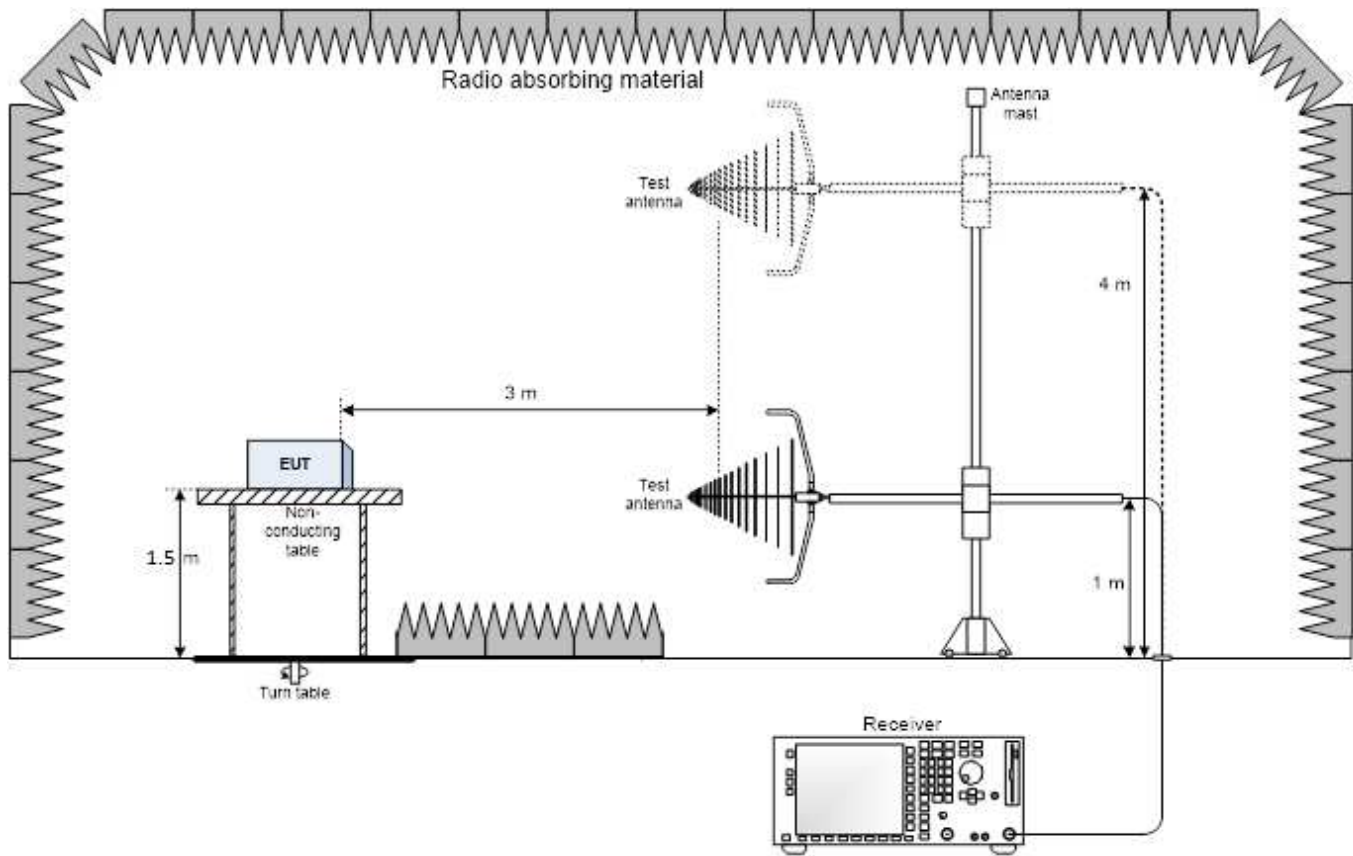



## Section 10. Photos

---

### 10.1 Photos of the test set-up

---

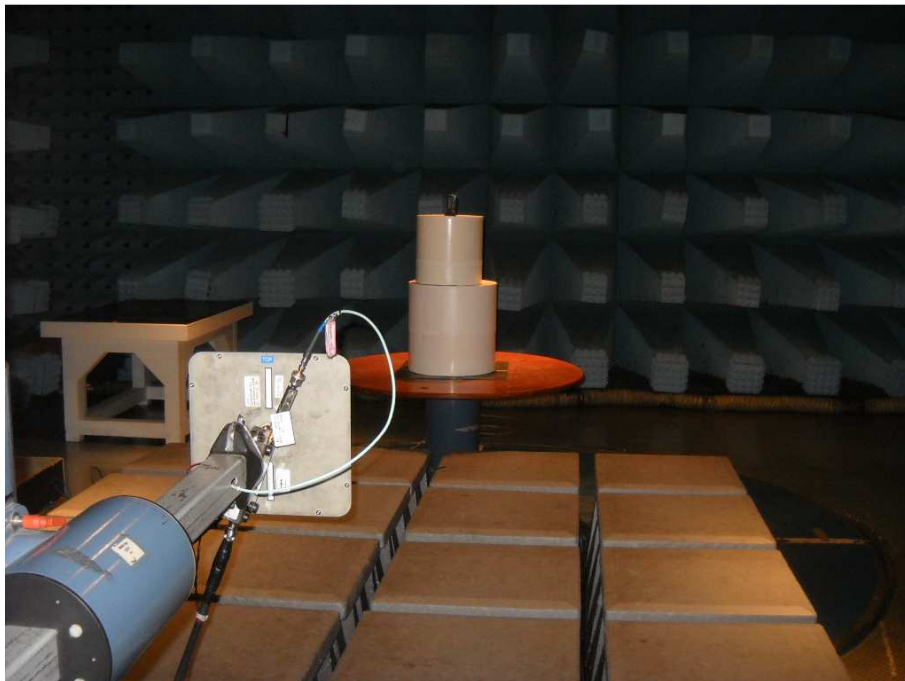

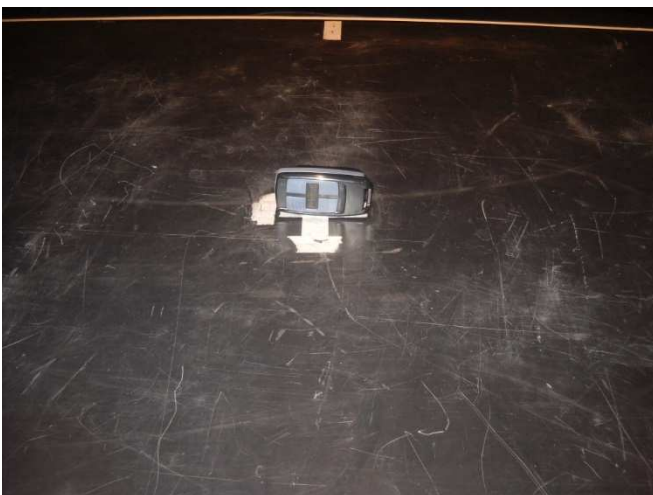


## 10.2 Photos of the EUT

---





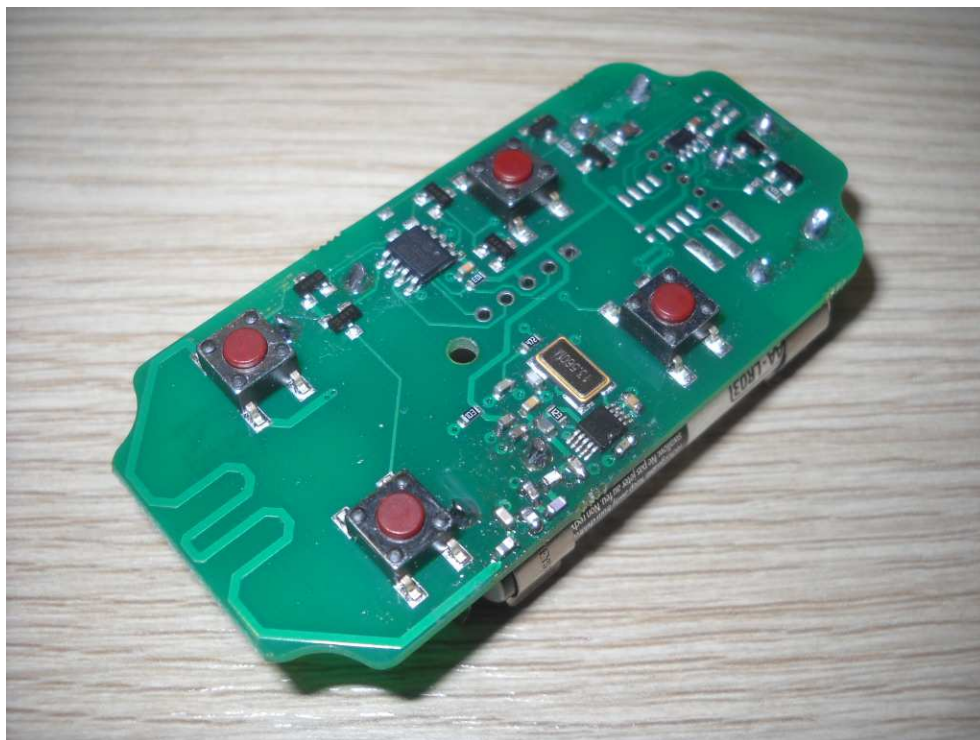

End of report