




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1852	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 8/55/31
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

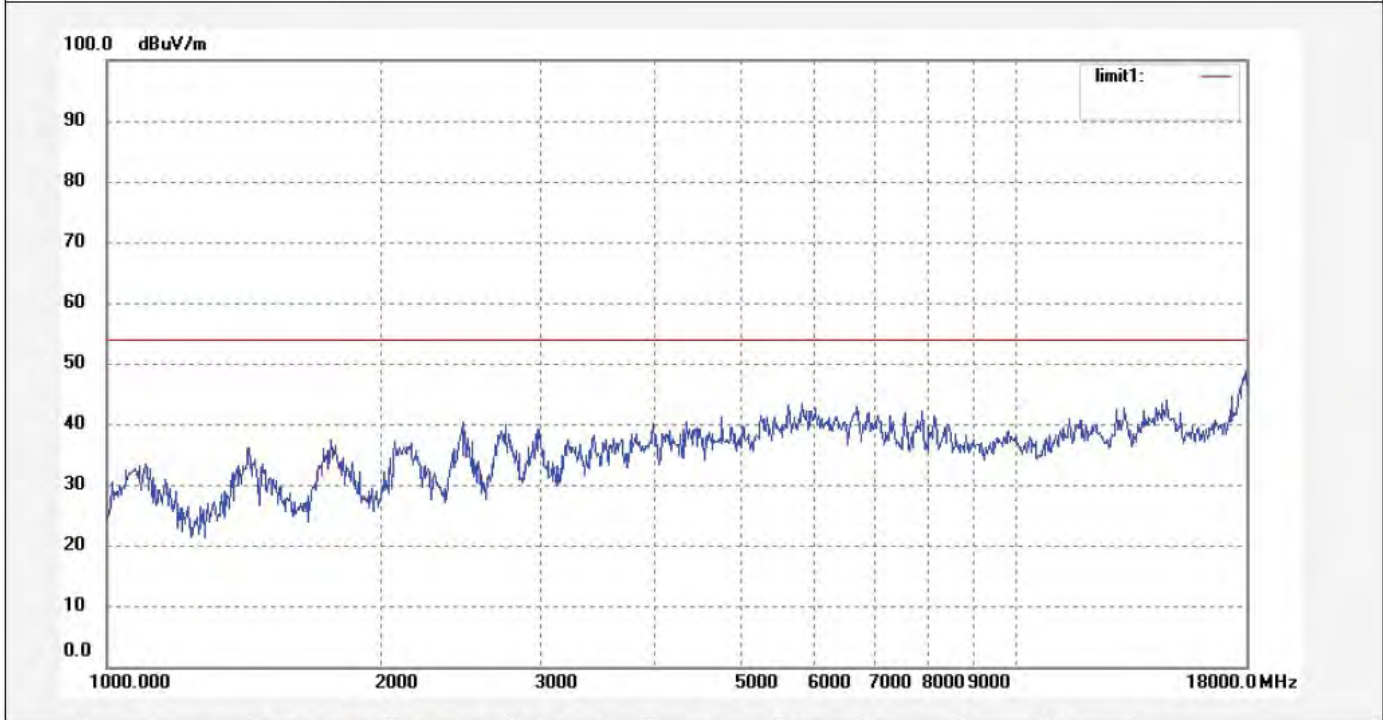

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1853	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 8/58/18
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

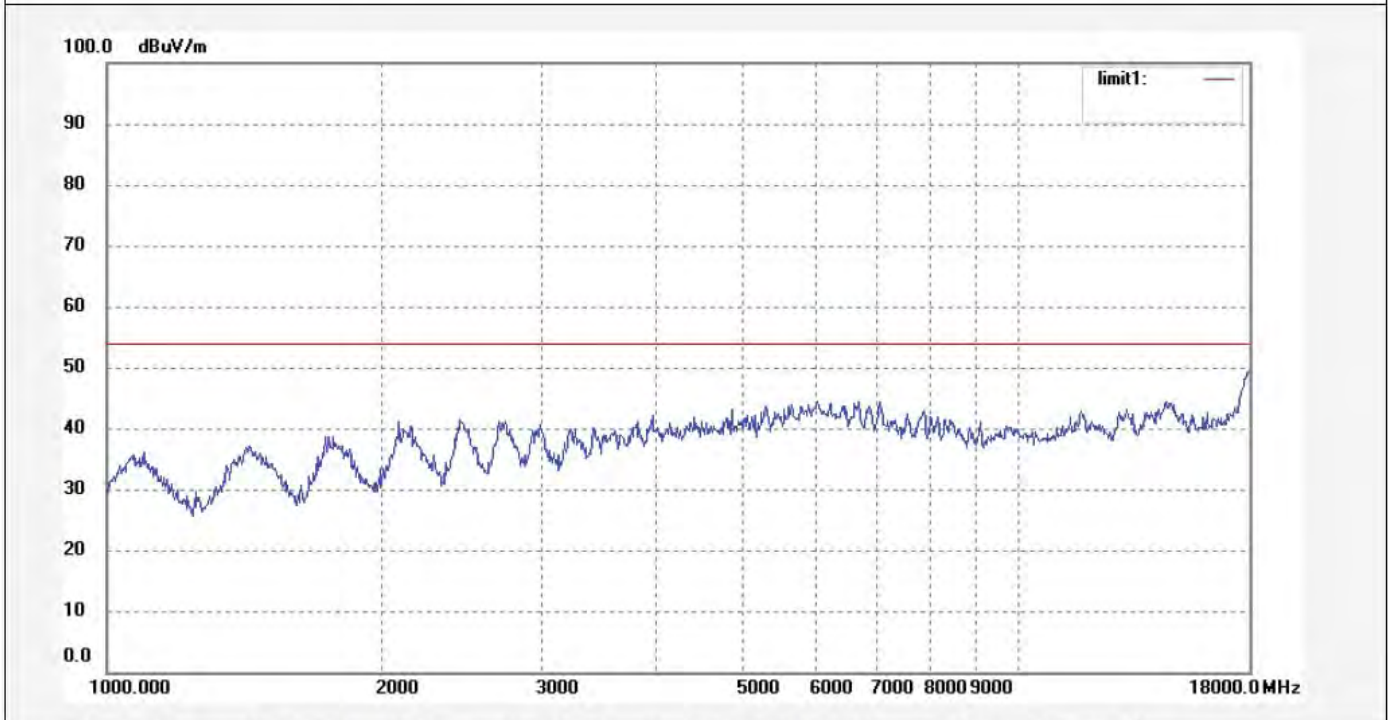

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1854  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 51 %  
EUT: MID  
Mode: TX Channel 1(802.11g)  
Model: PC7011  
Manufacturer: Natural Sound

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 12/09/07/  
Time: 9/02/30  
Engineer Signature: Bob  
Distance: 3m

Note: Report NO.:ATE20121899

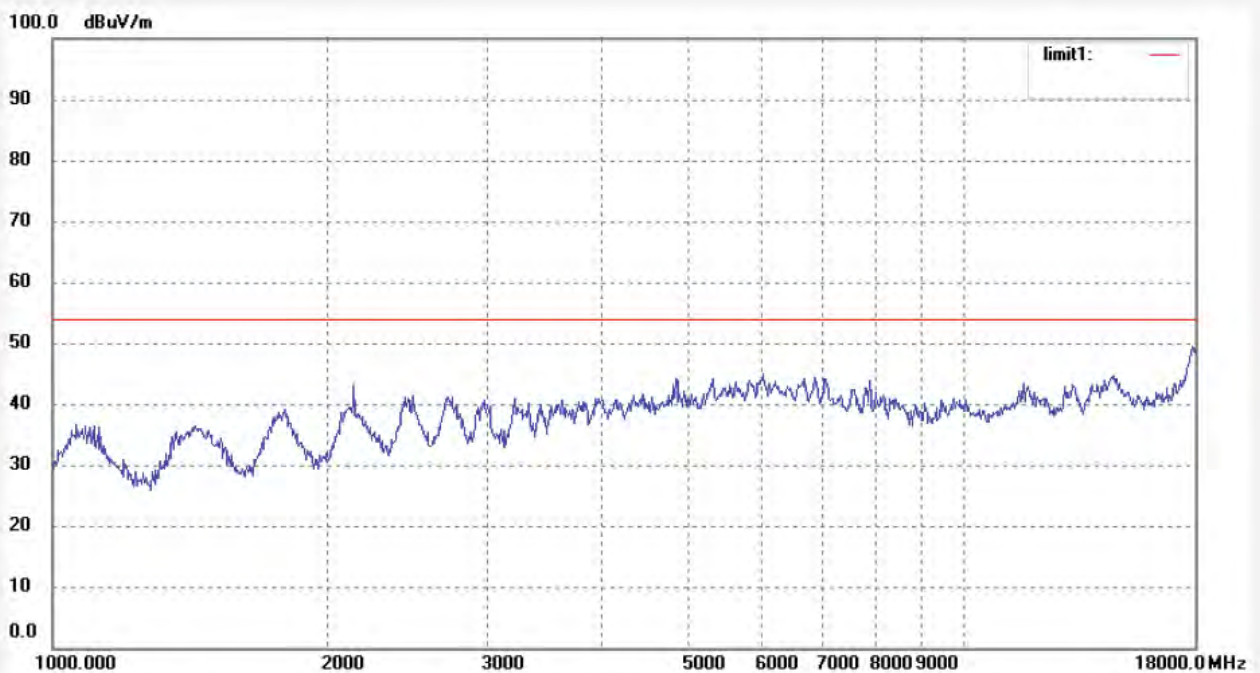

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1855	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/05/37
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

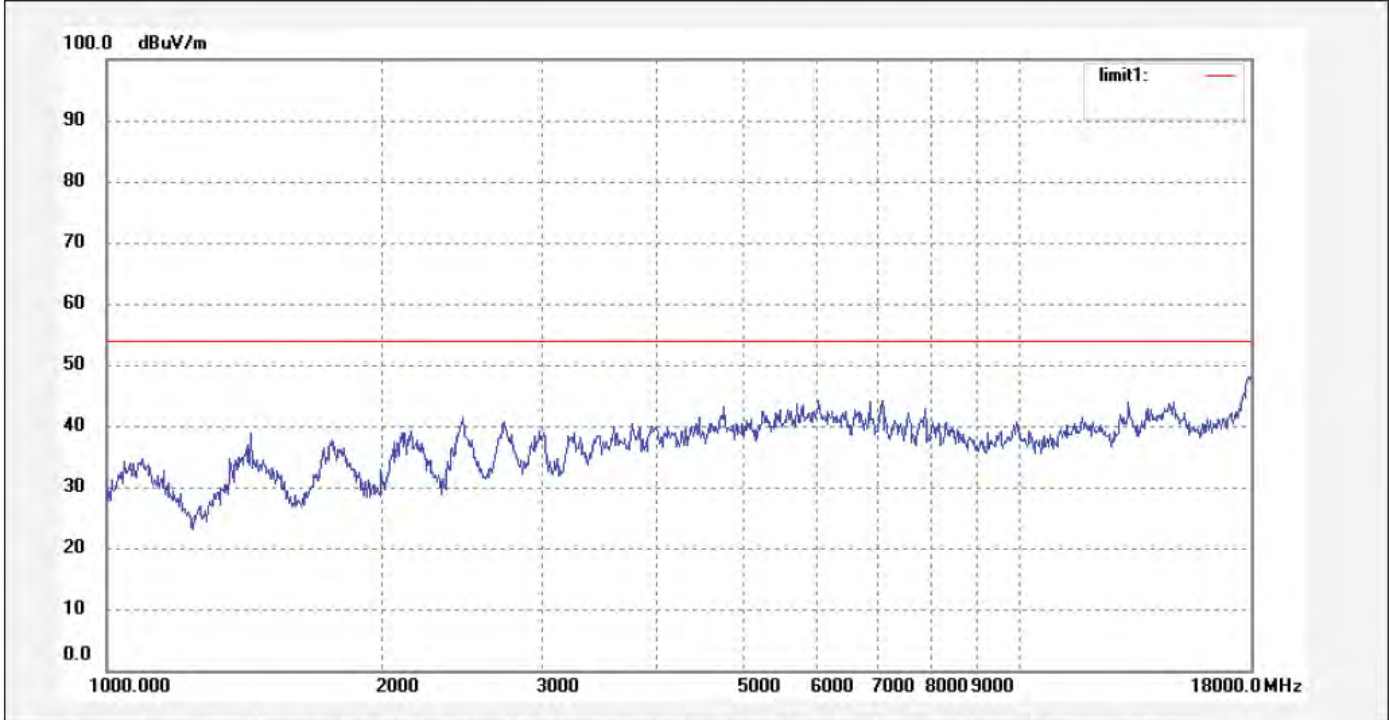

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1856	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/09/29
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

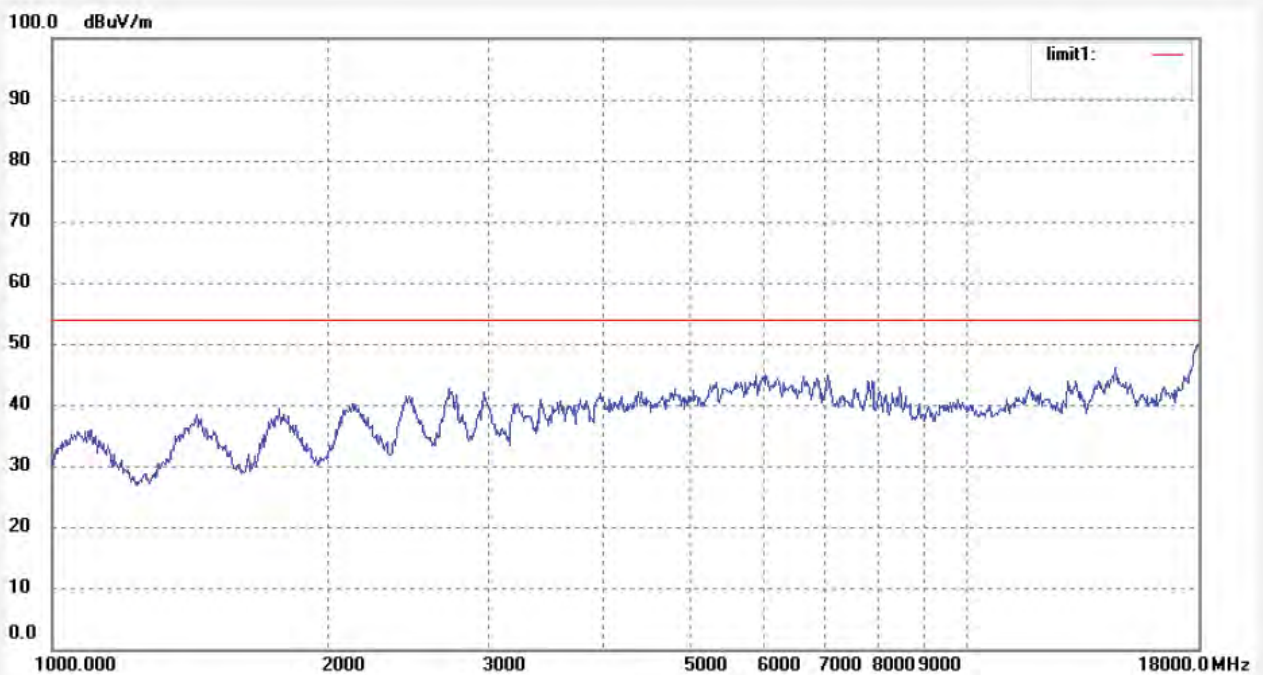

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1857  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 51 %  
EUT: MID  
Mode: TX Channel 1(802.11n)  
Model: PC7011  
Manufacturer: Natural Sound

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 12/09/07/  
Time: 9/12/15  
Engineer Signature: Bob  
Distance: 3m

Note: Report NO.:ATE20121899

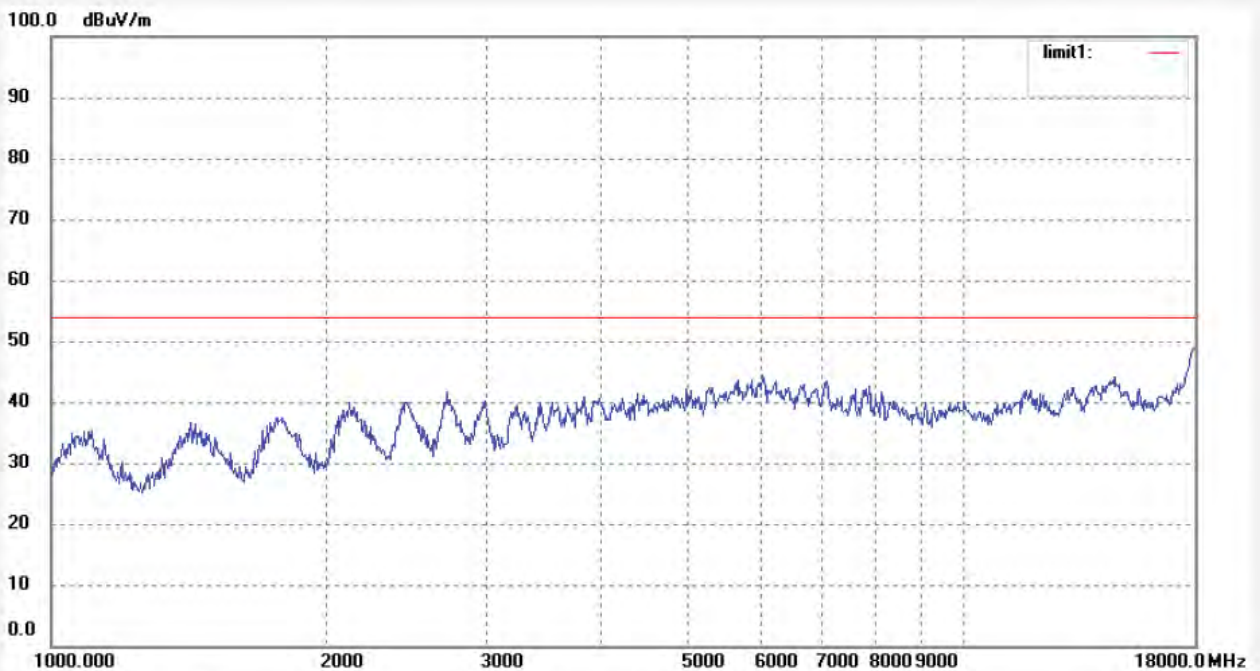

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1858	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/15/37
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

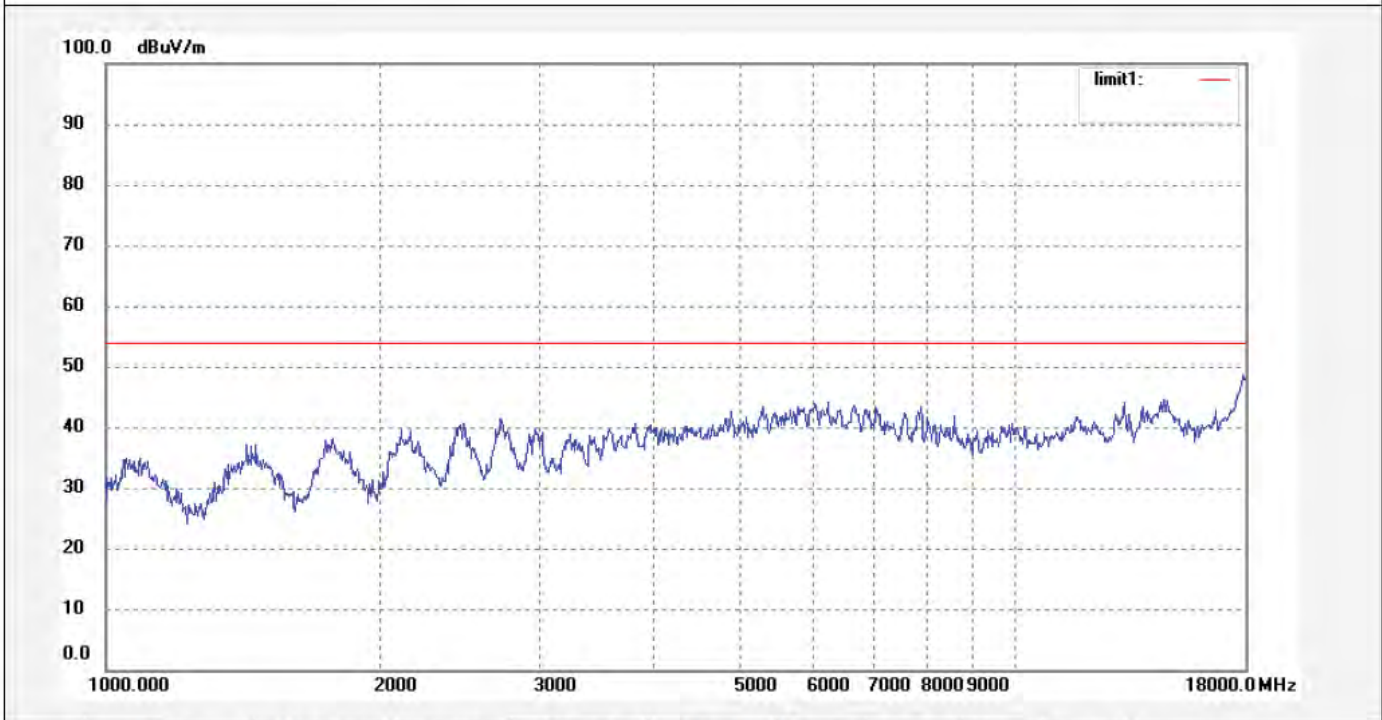

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1859	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/18/19
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

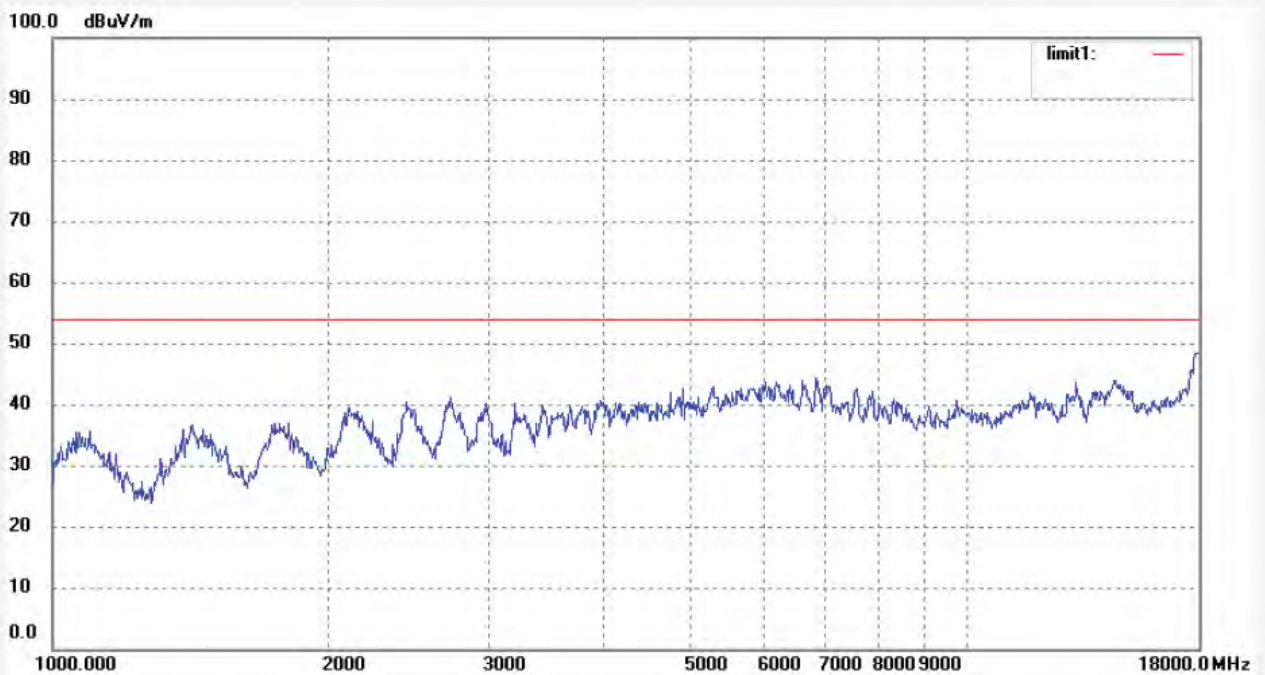

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1860	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/22/38
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

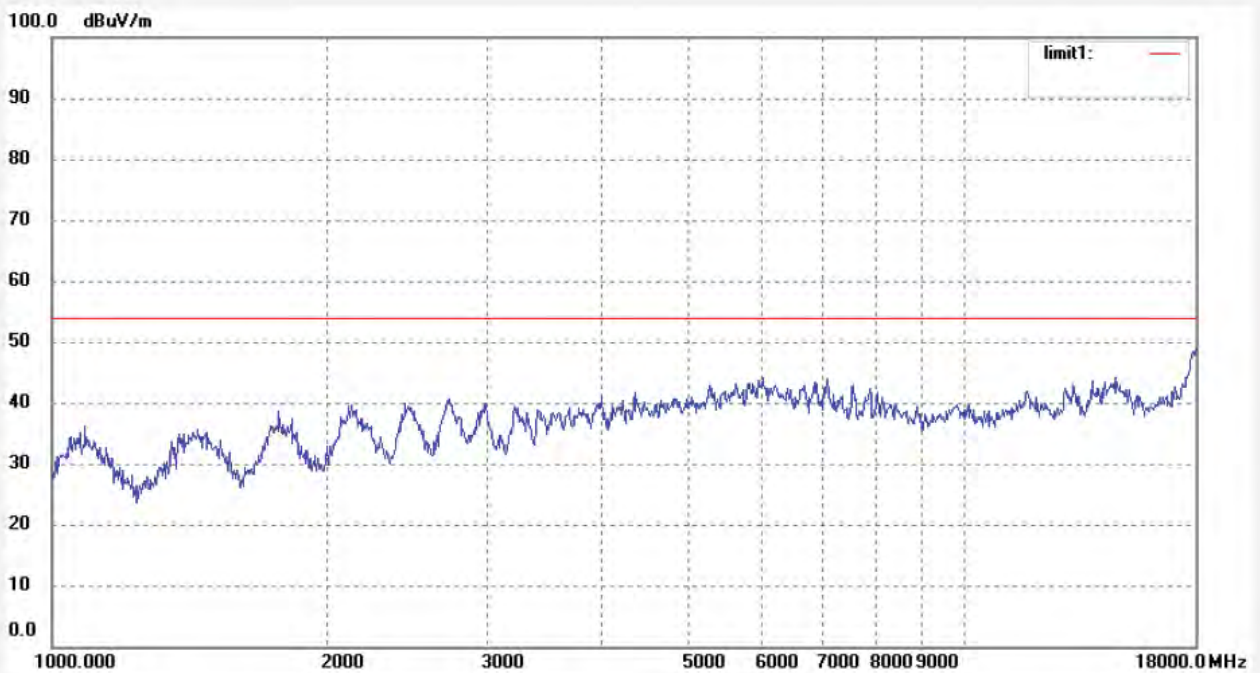

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1861	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/25/22
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

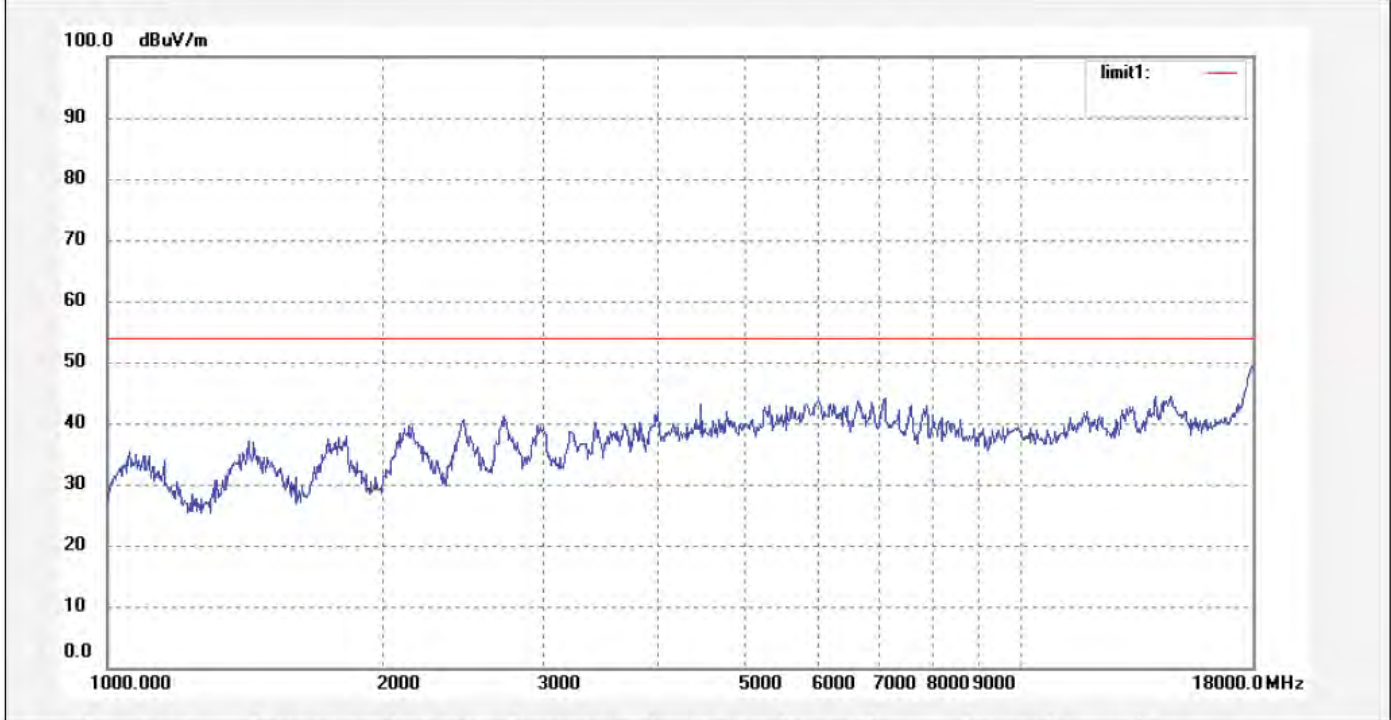

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1862	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/28/51
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

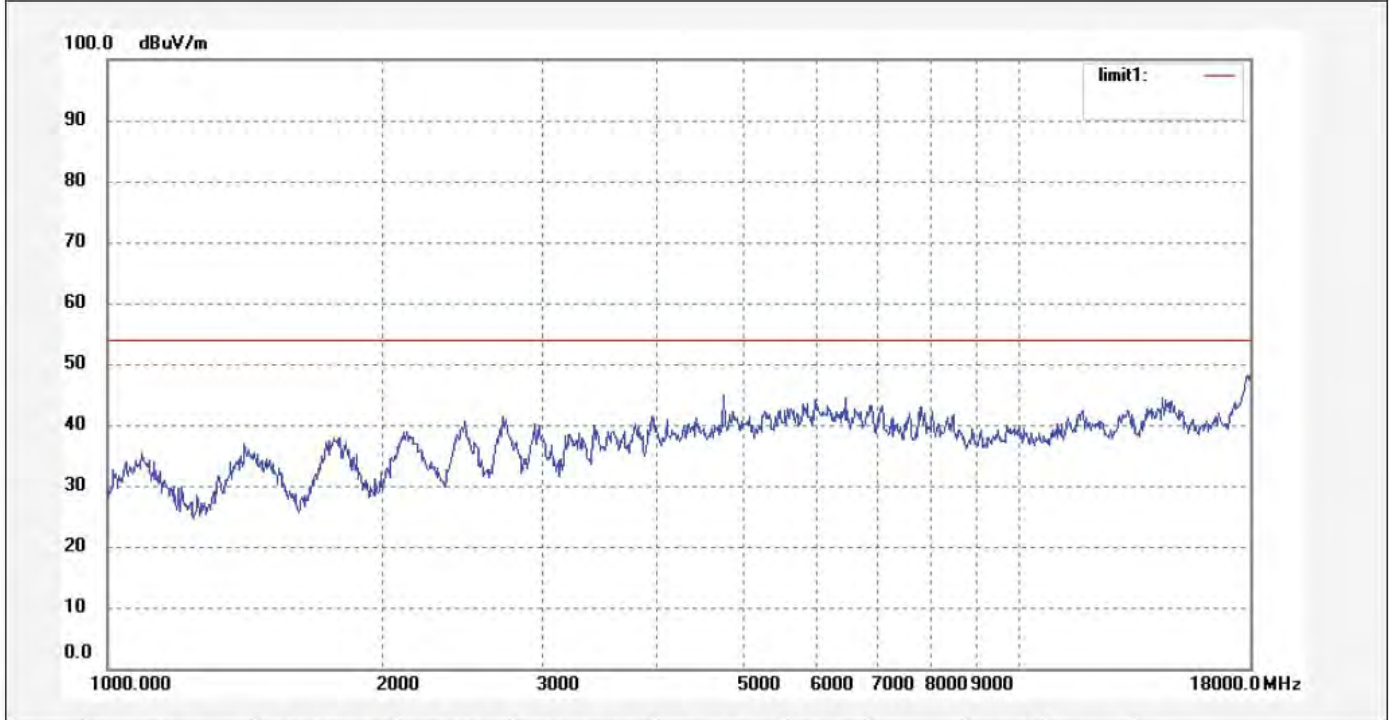

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1863	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/32/54
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

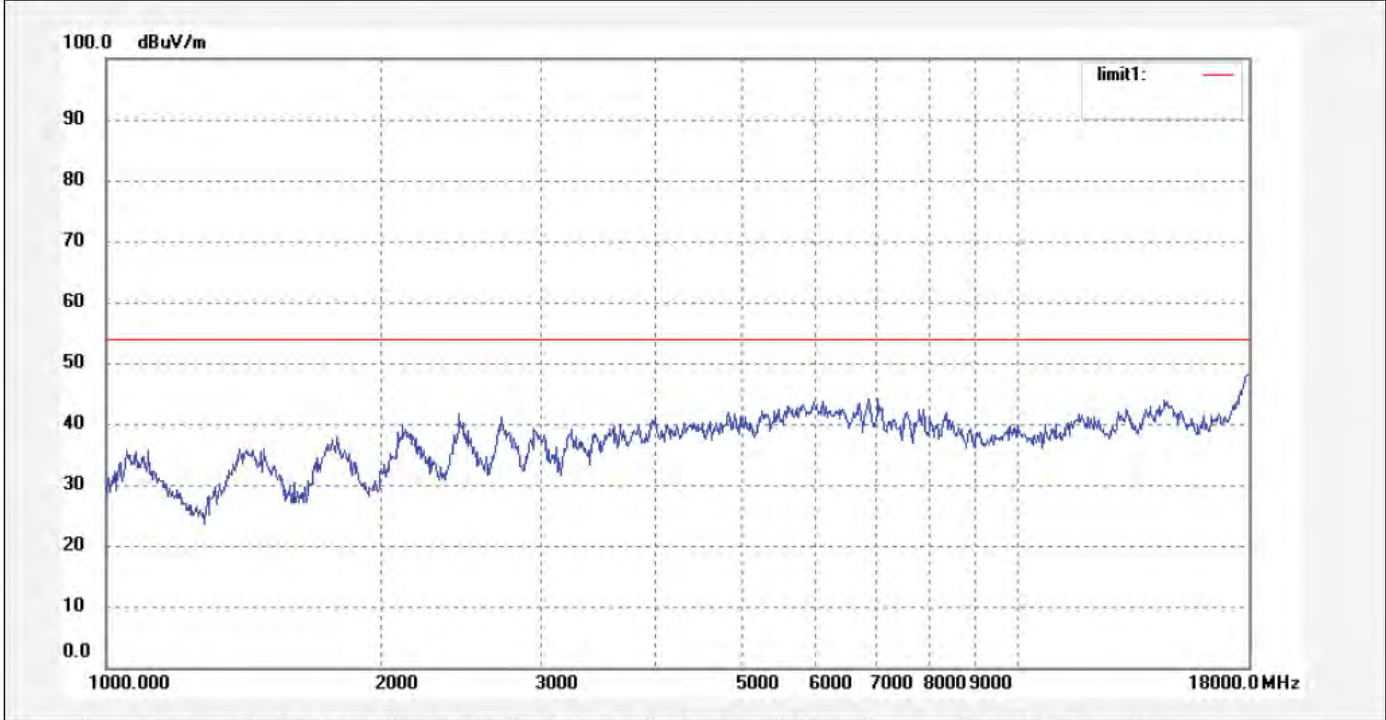

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1864	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/35/16
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

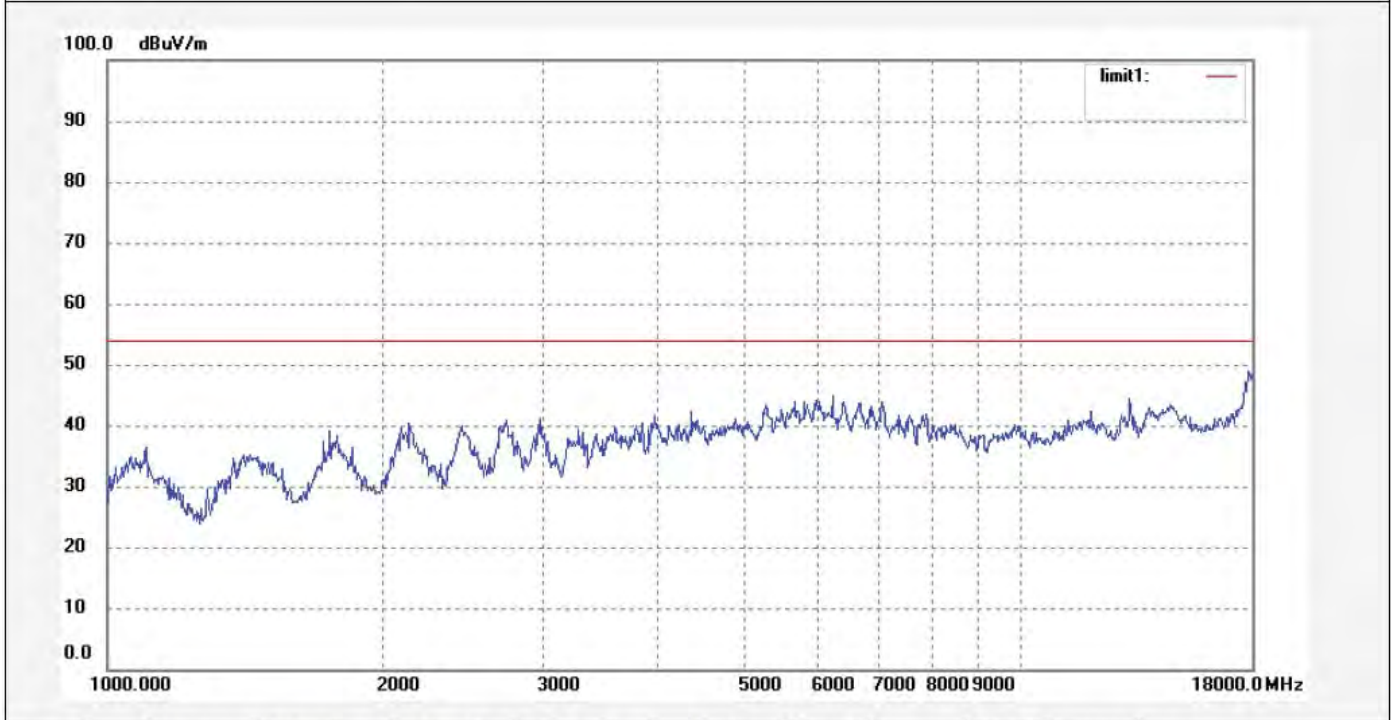

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1865	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/38/57
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

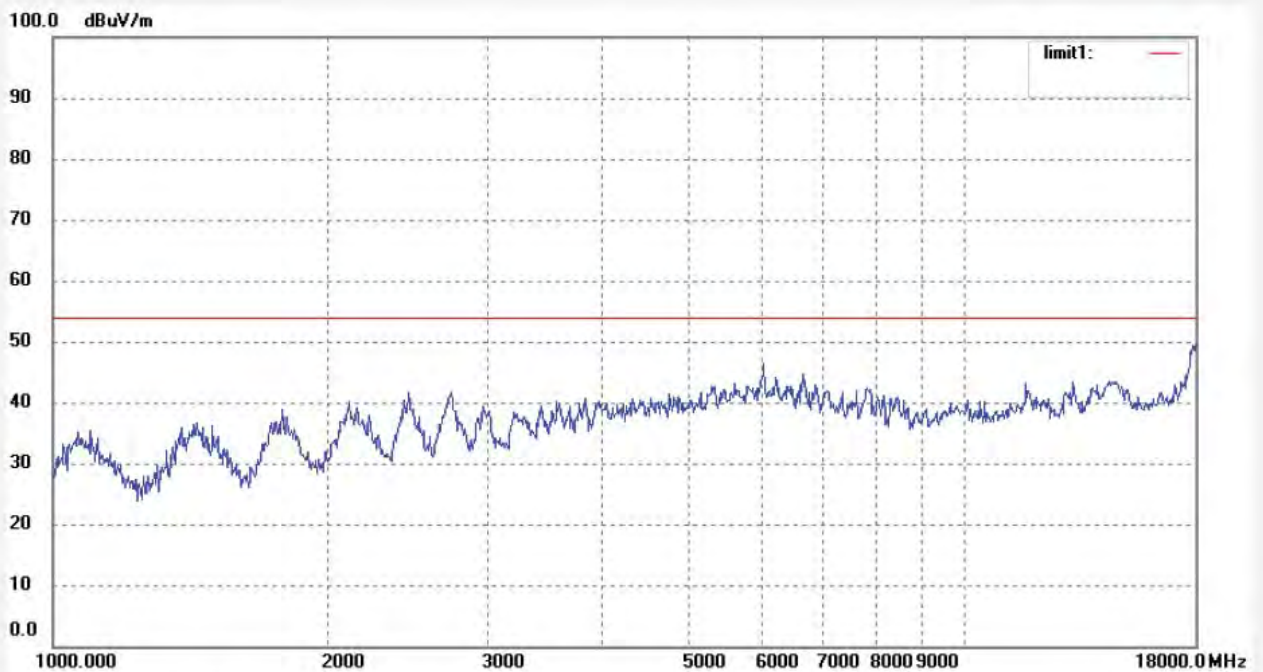

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1866	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/41/20
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

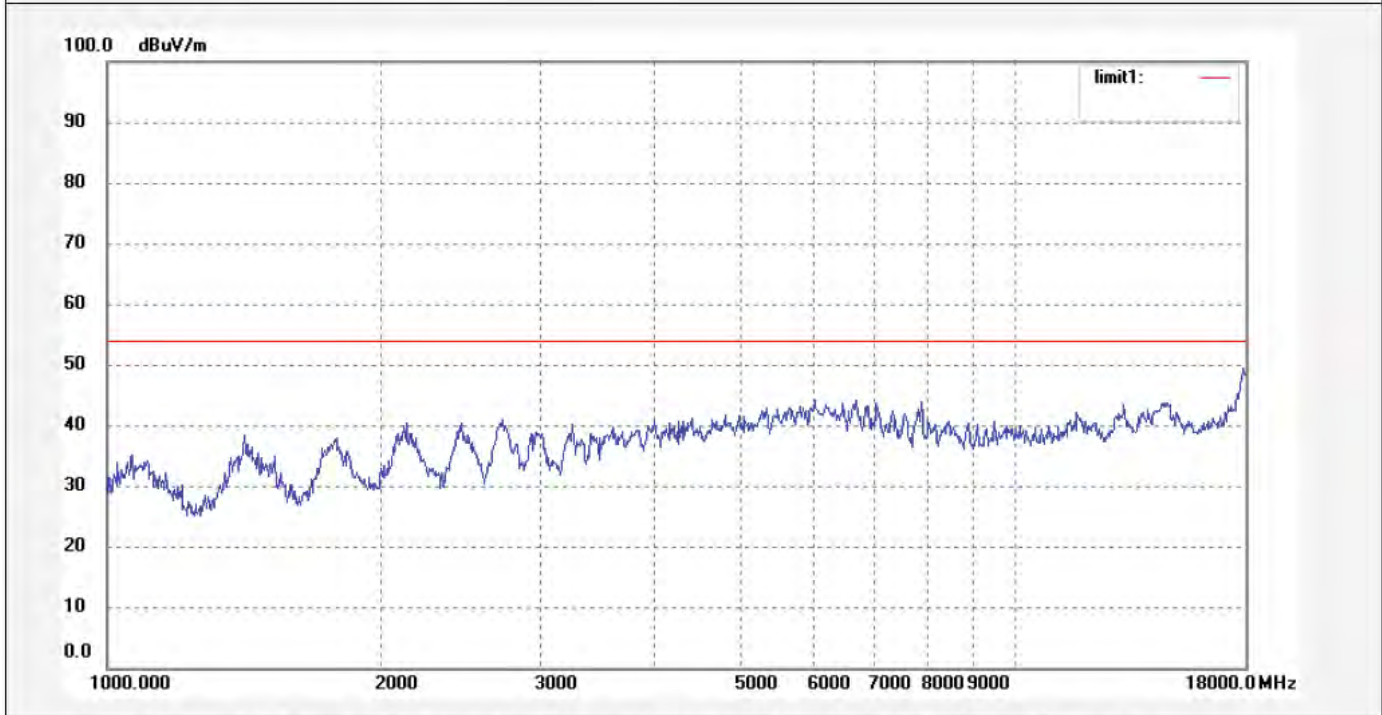

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1867	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/44/11
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

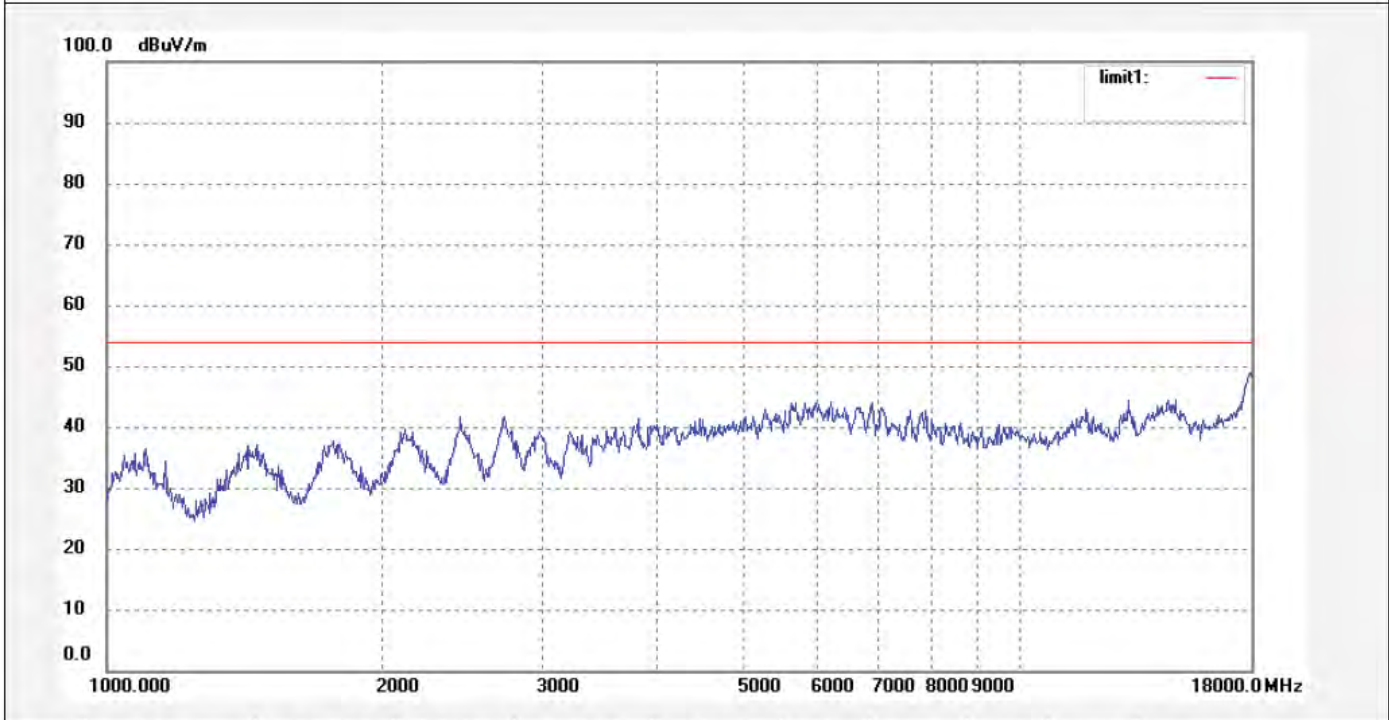

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1868	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/47/34
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

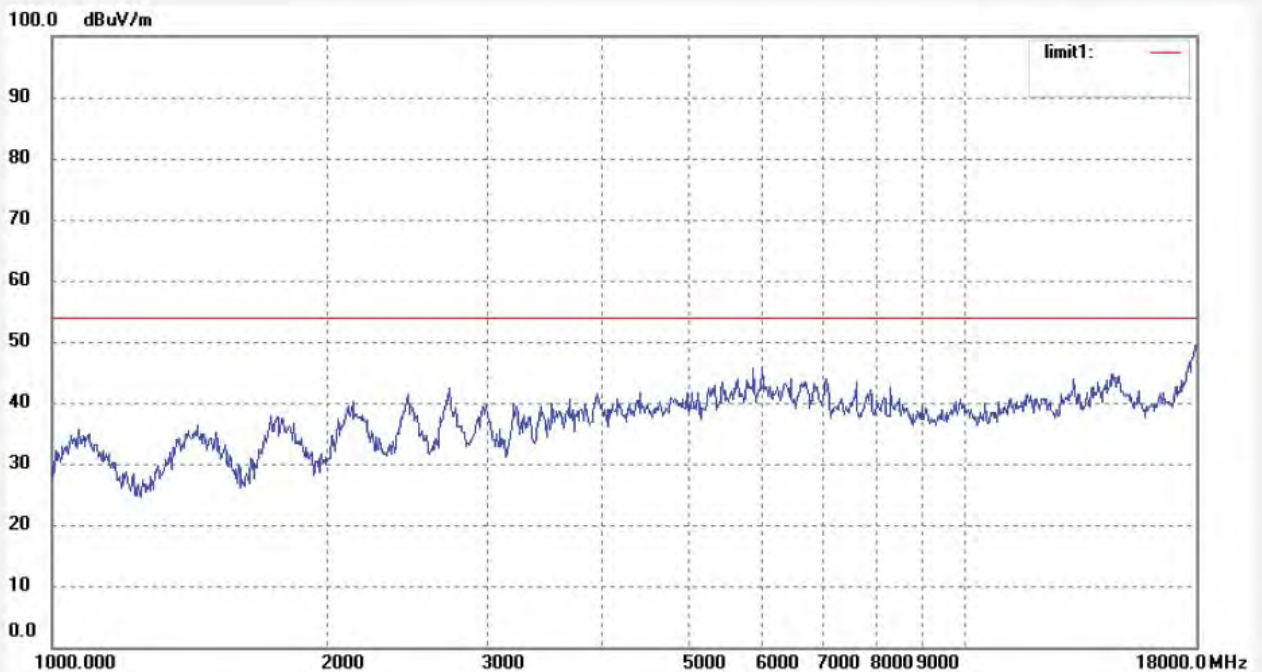

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1869	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/50/48
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

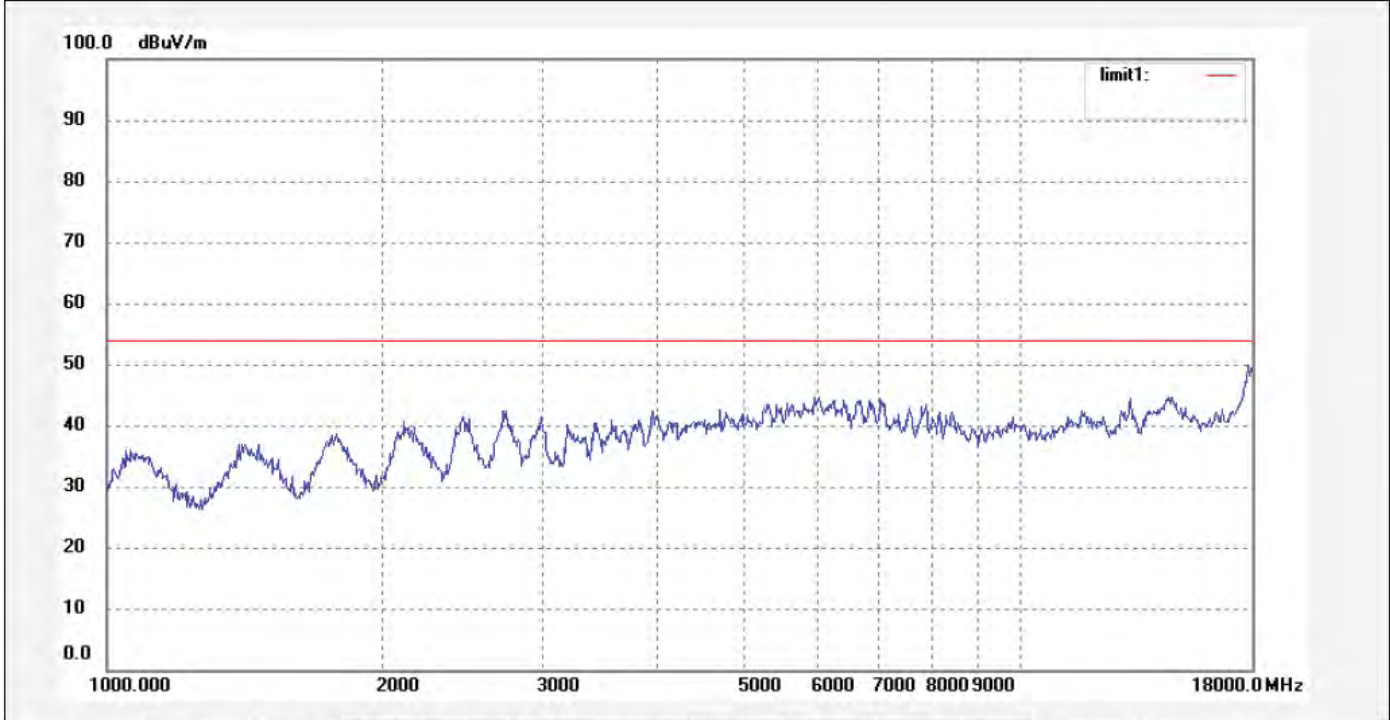

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1870	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/53/21
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 3(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

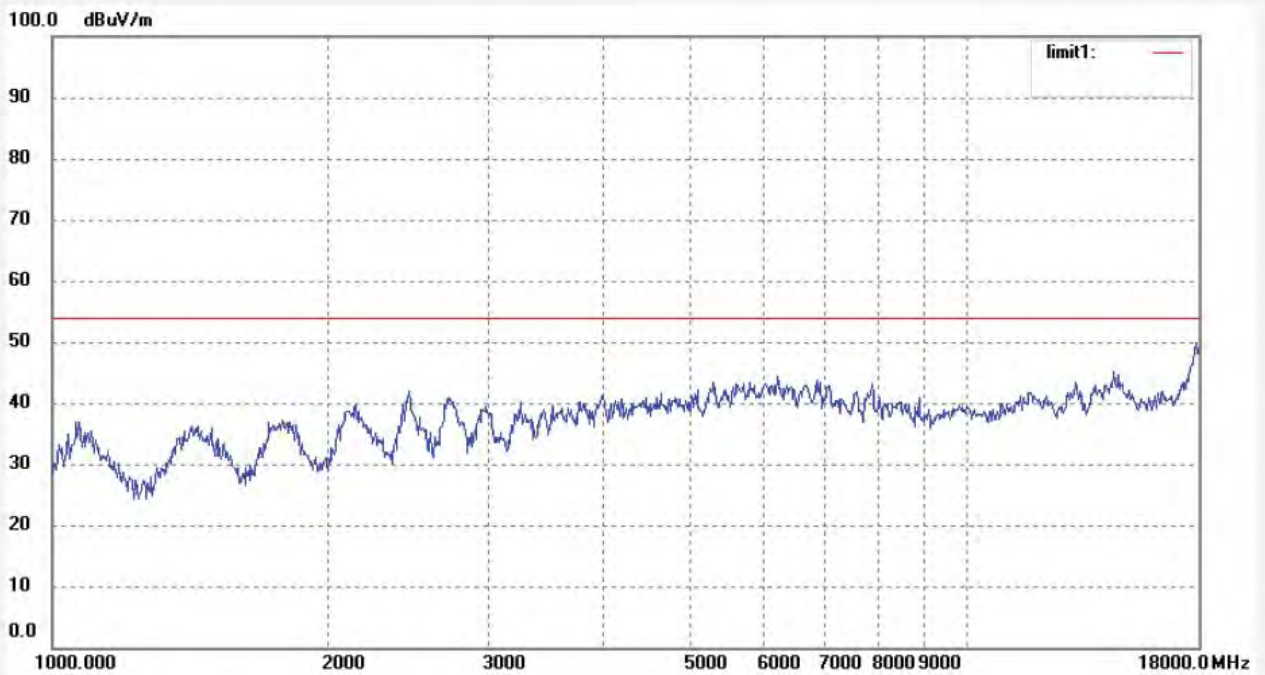

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1871	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 9/56/18
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 3(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

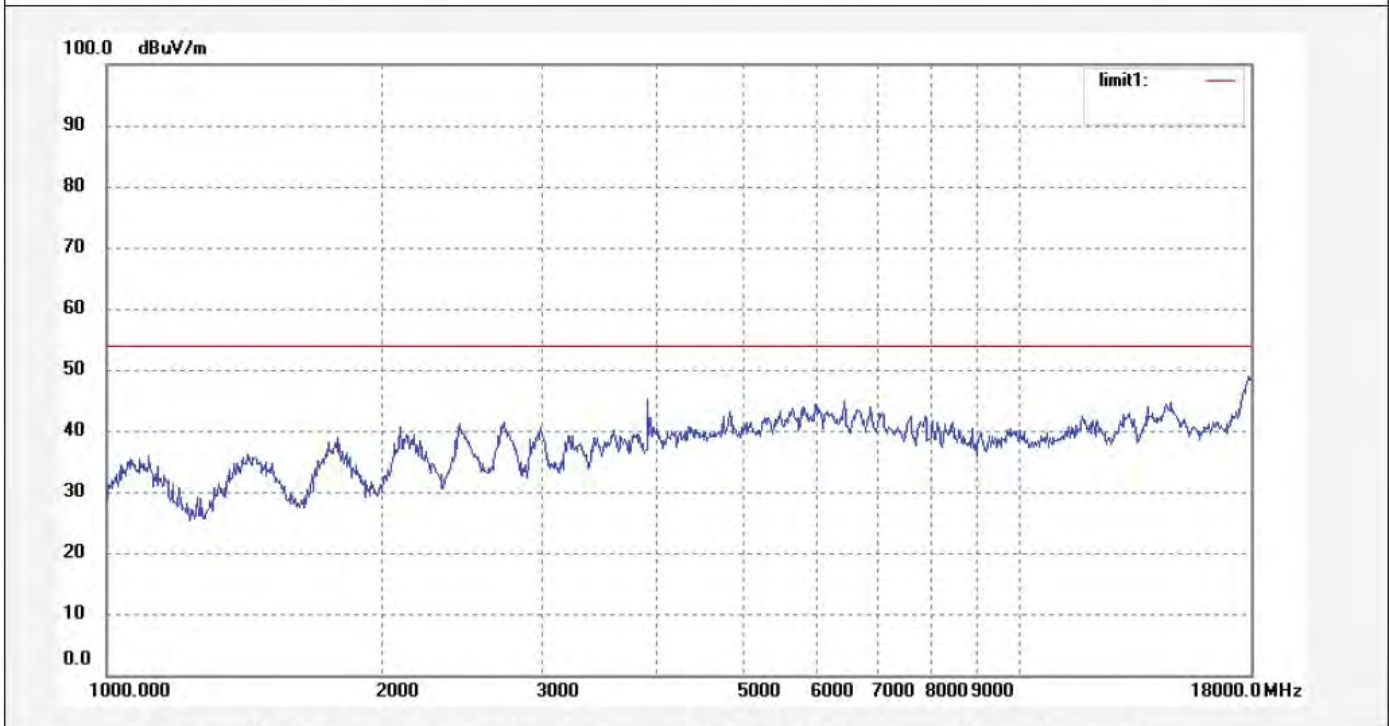

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1872	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 10/00/41
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

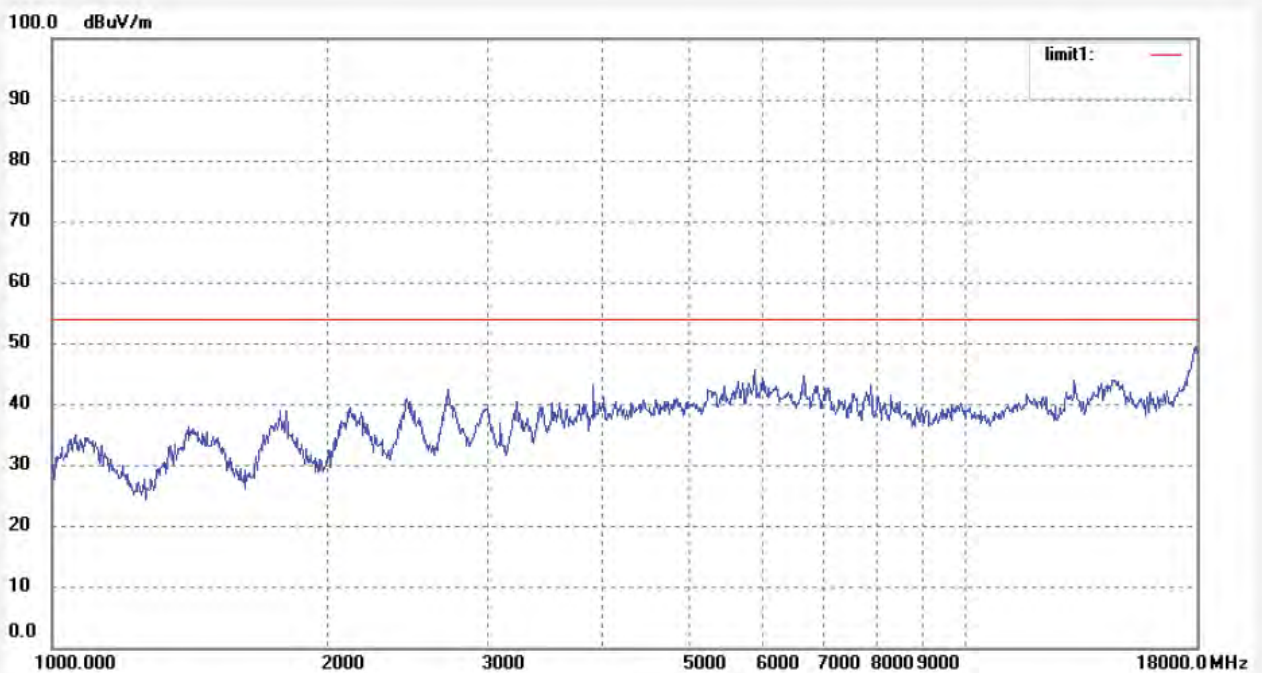

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1873	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 10/03/50
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

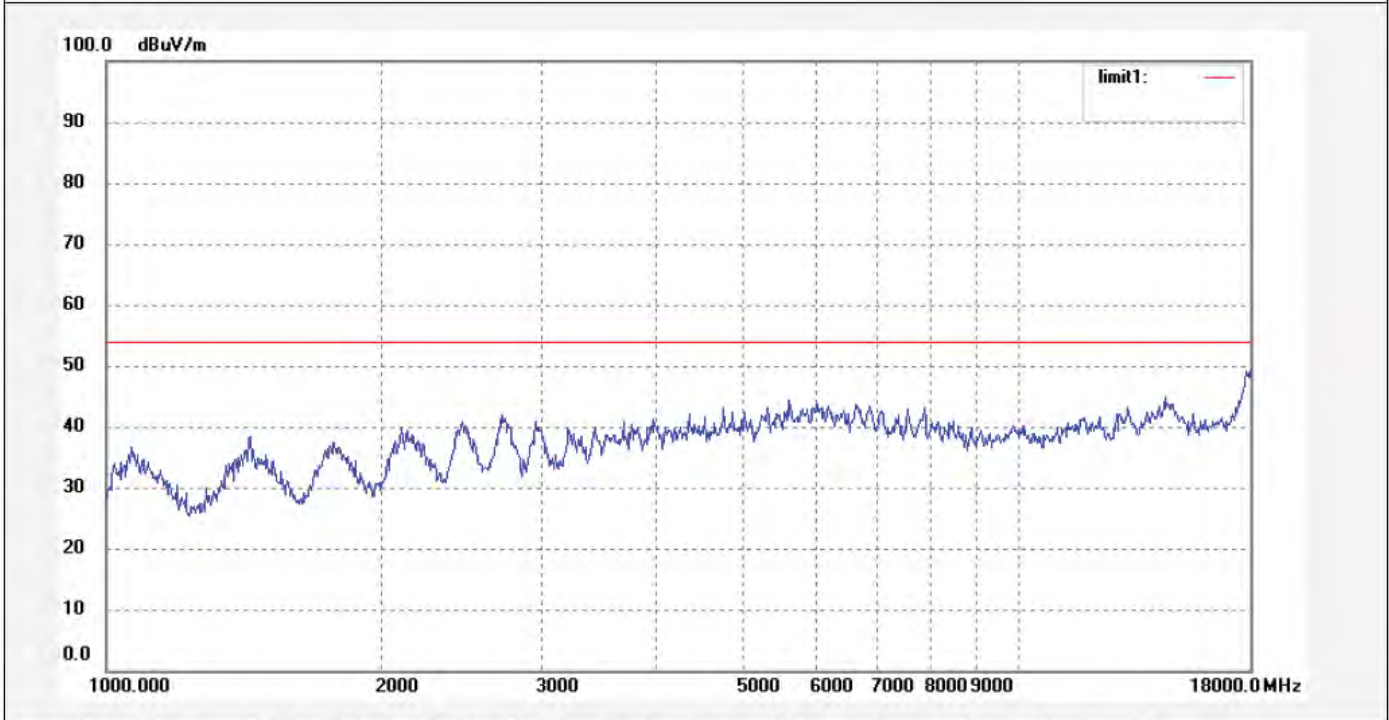

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1874	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 10/06/21
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 9(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

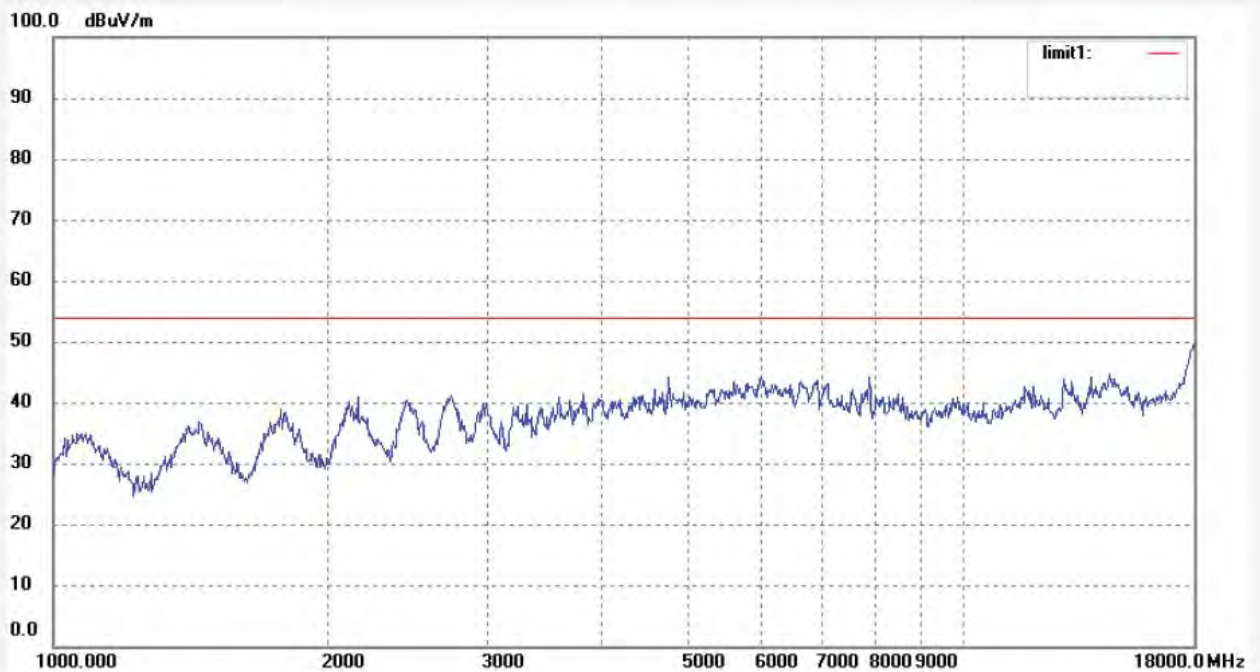

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1875	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/07/
Temp.( C)/Hum.(%) 25 C / 51 %	Time: 10/09/22
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 9(802.11n)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report NO.:ATE20121899

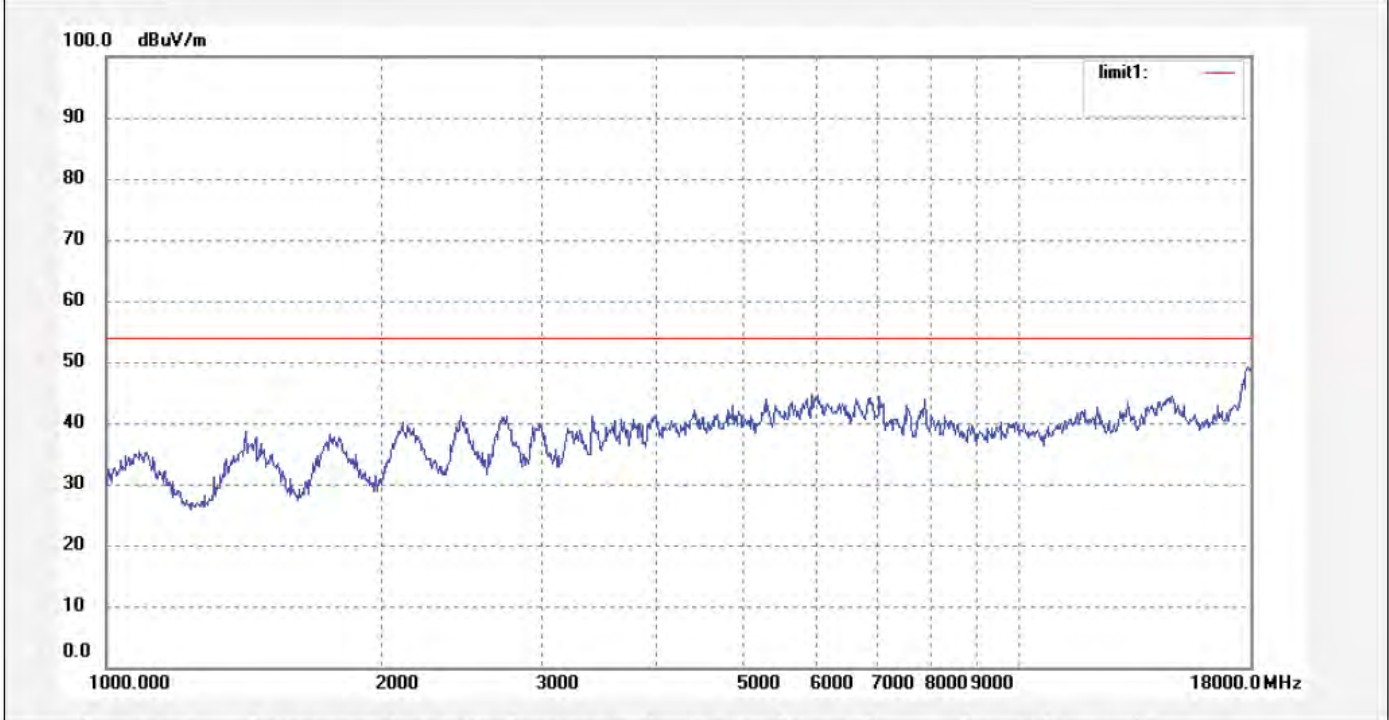

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1601	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:05:15
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

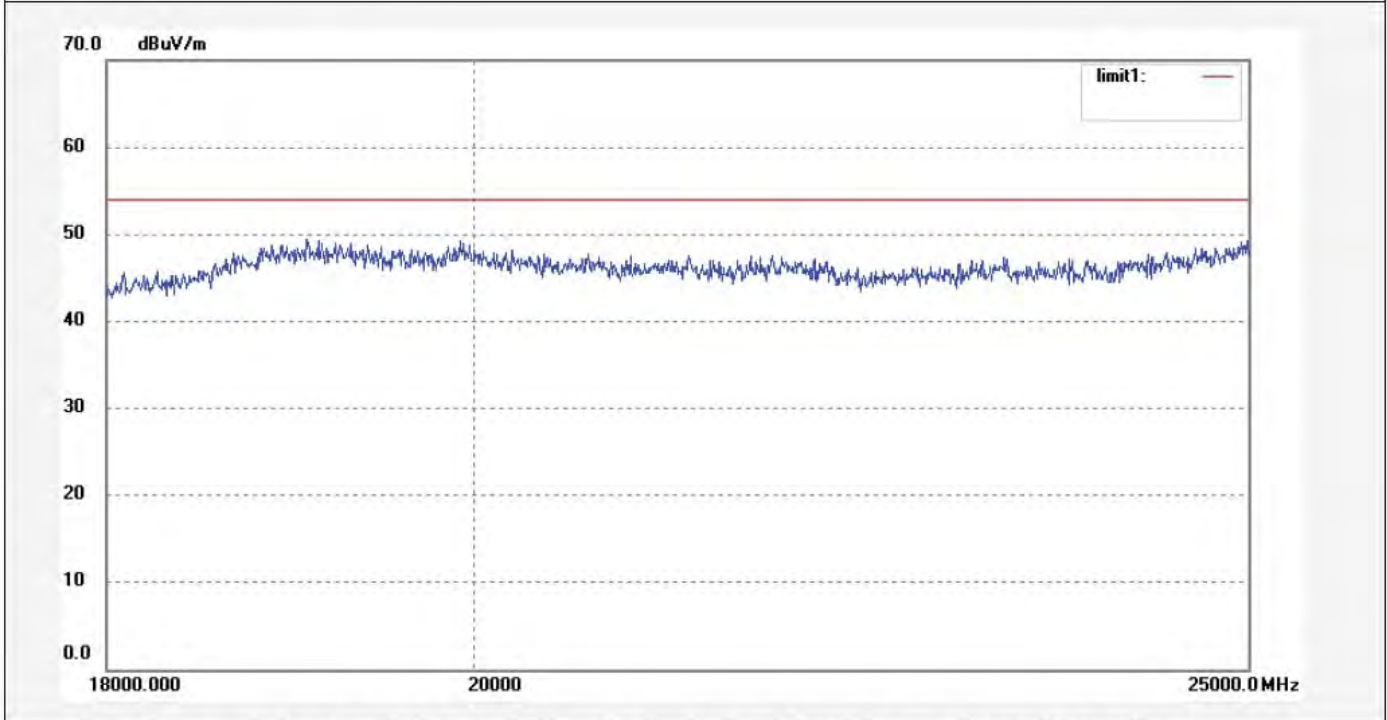

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1602	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:09:22
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

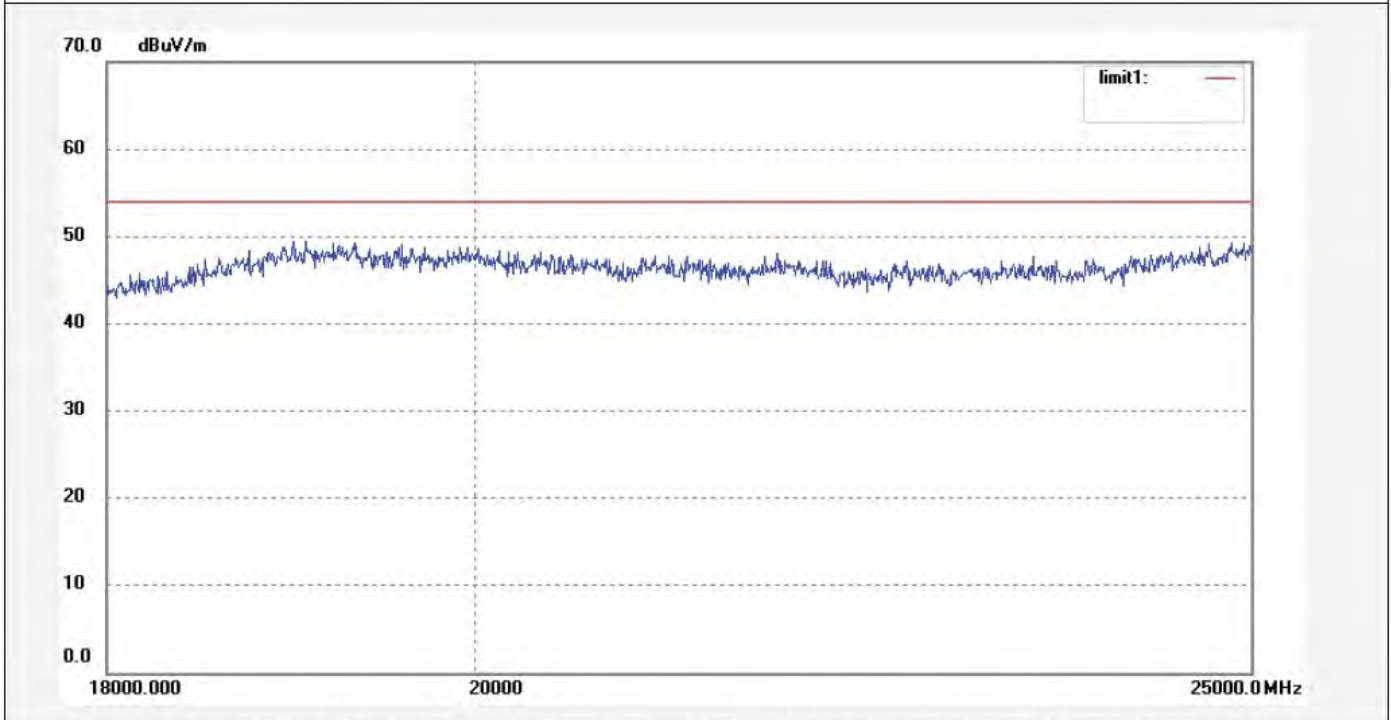

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1603	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:14:45
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

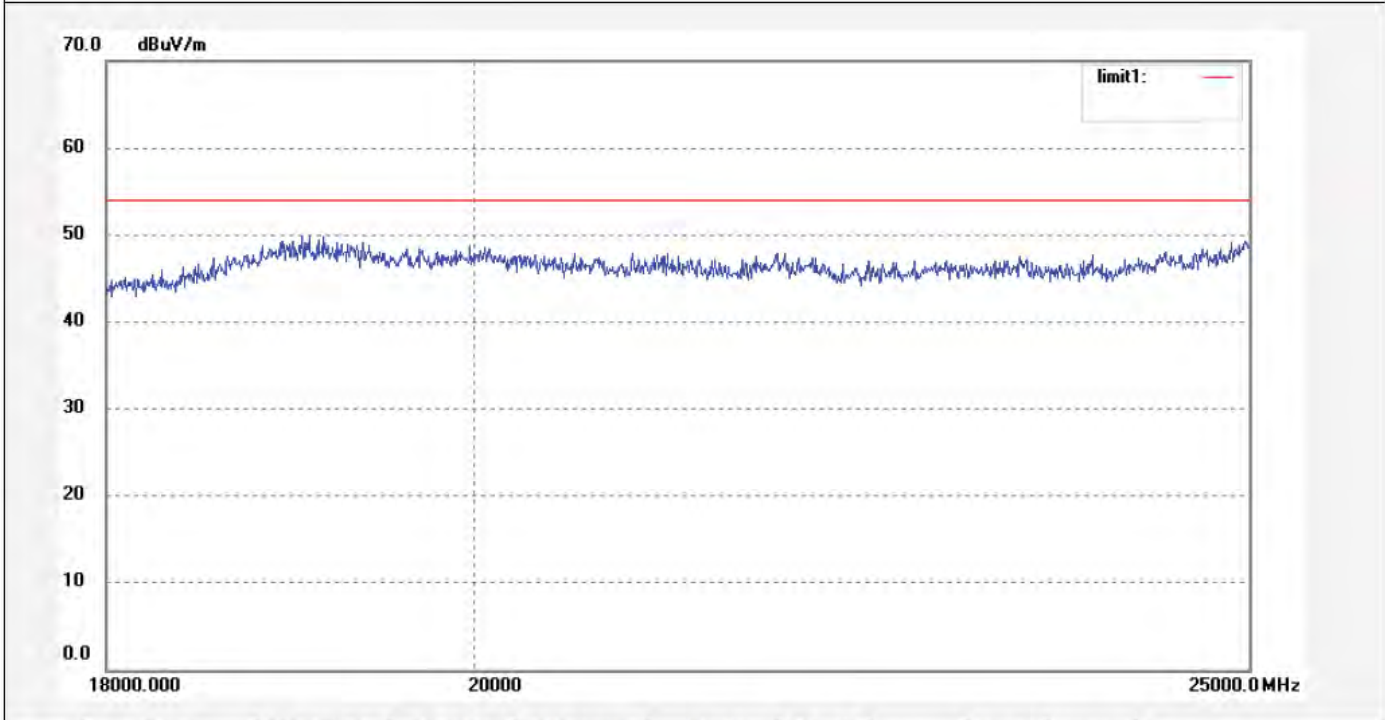

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1604	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:18:36
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

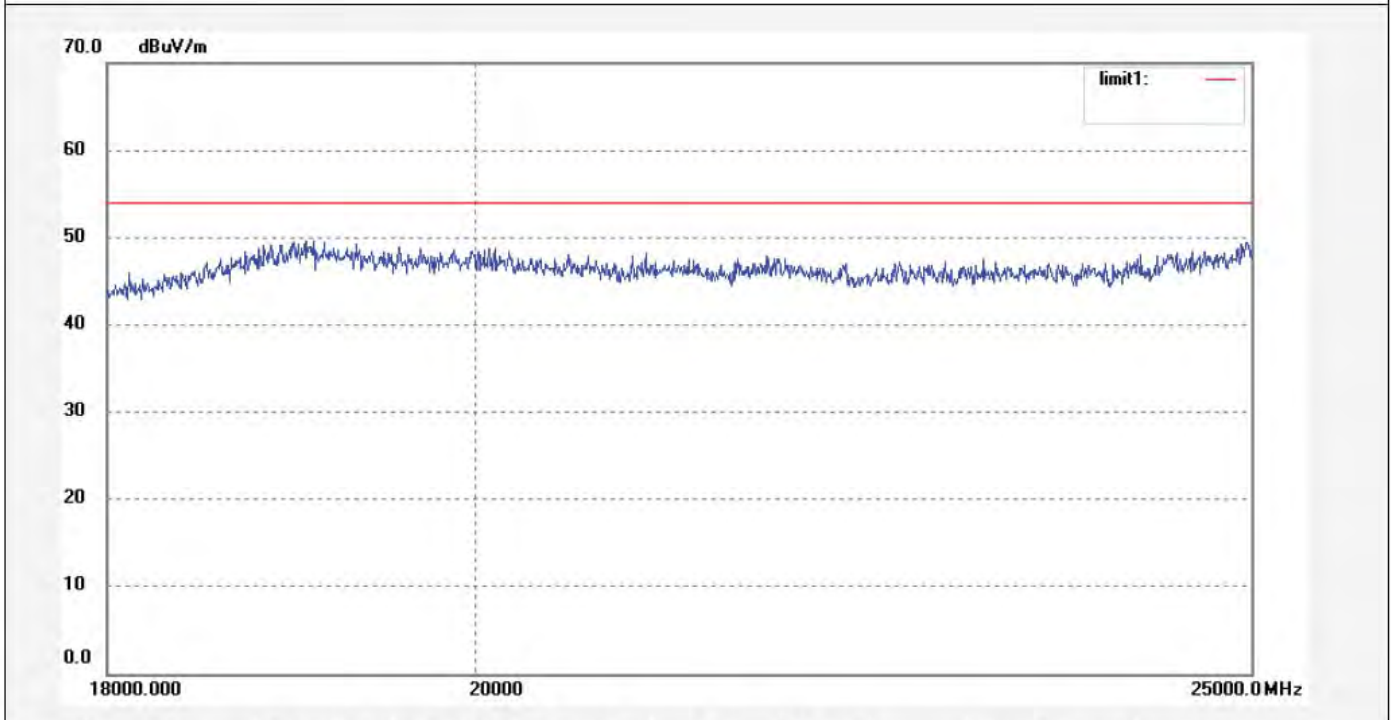

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1605	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:23:55
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

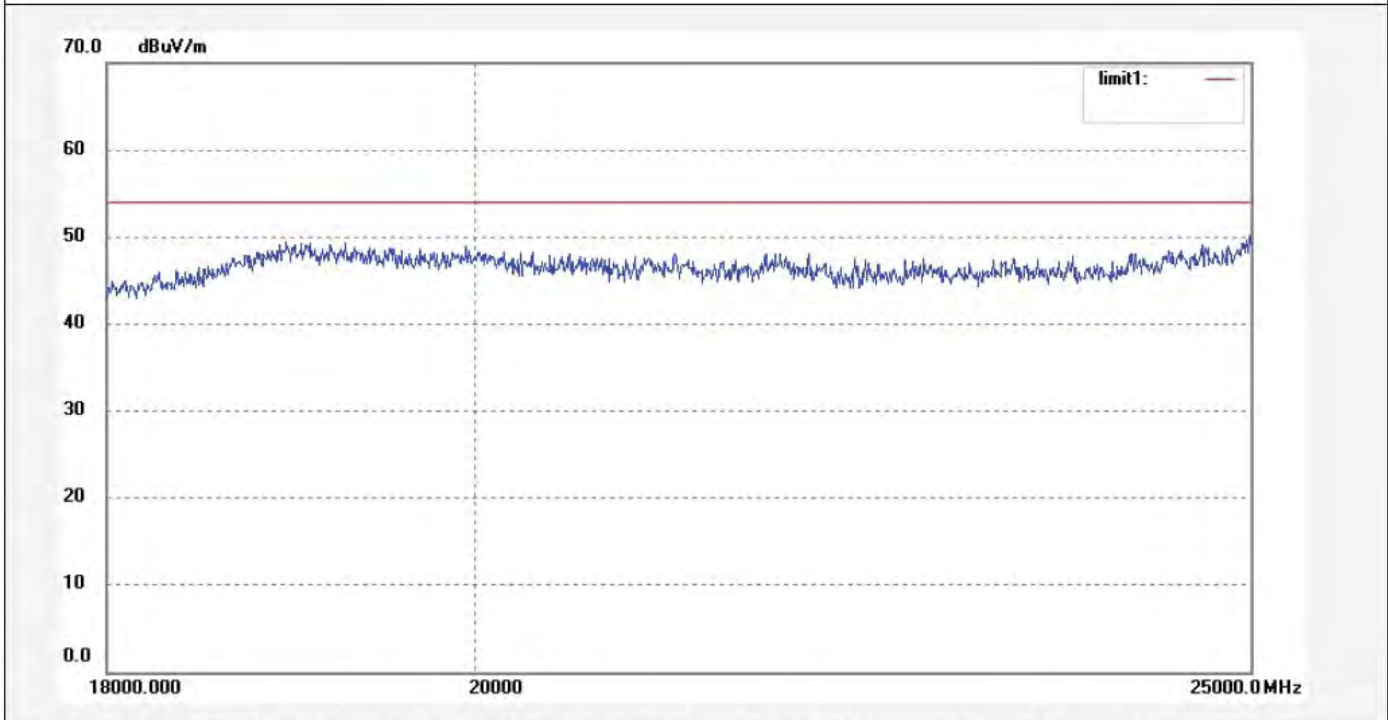

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1606	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:27:11
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

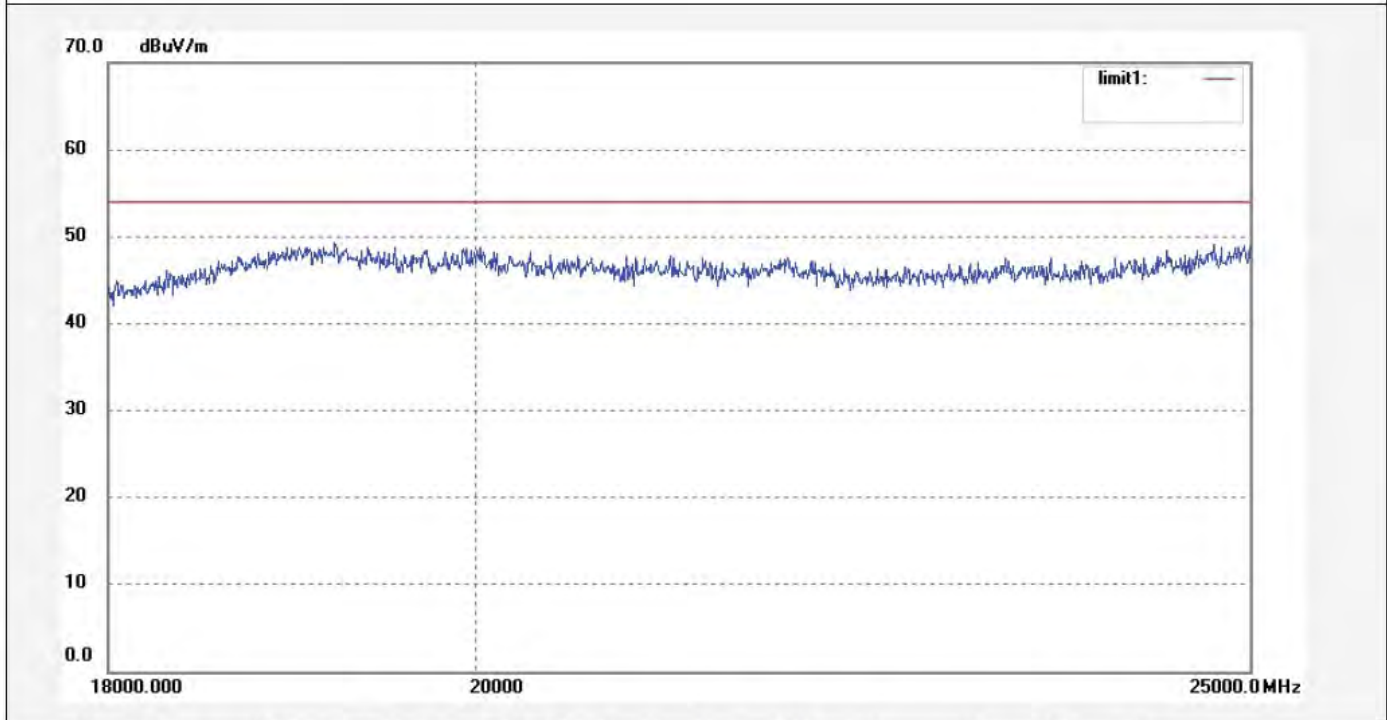

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1607	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:32:05
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

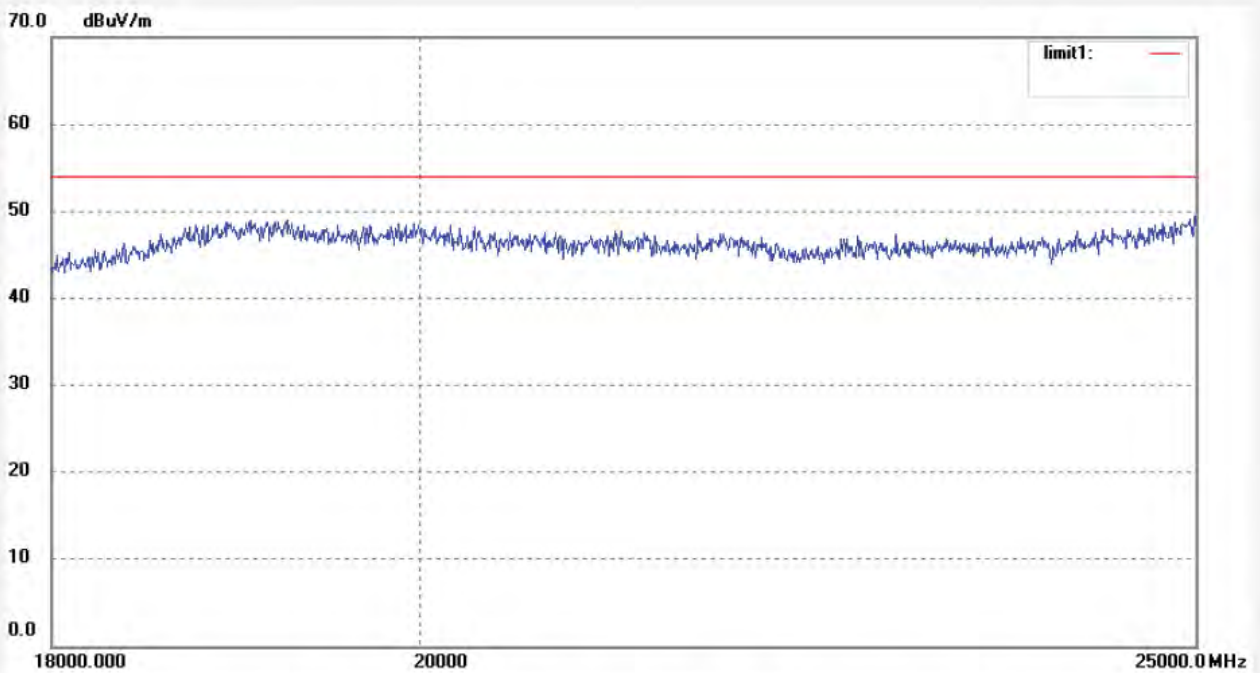

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1608	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:35:56
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

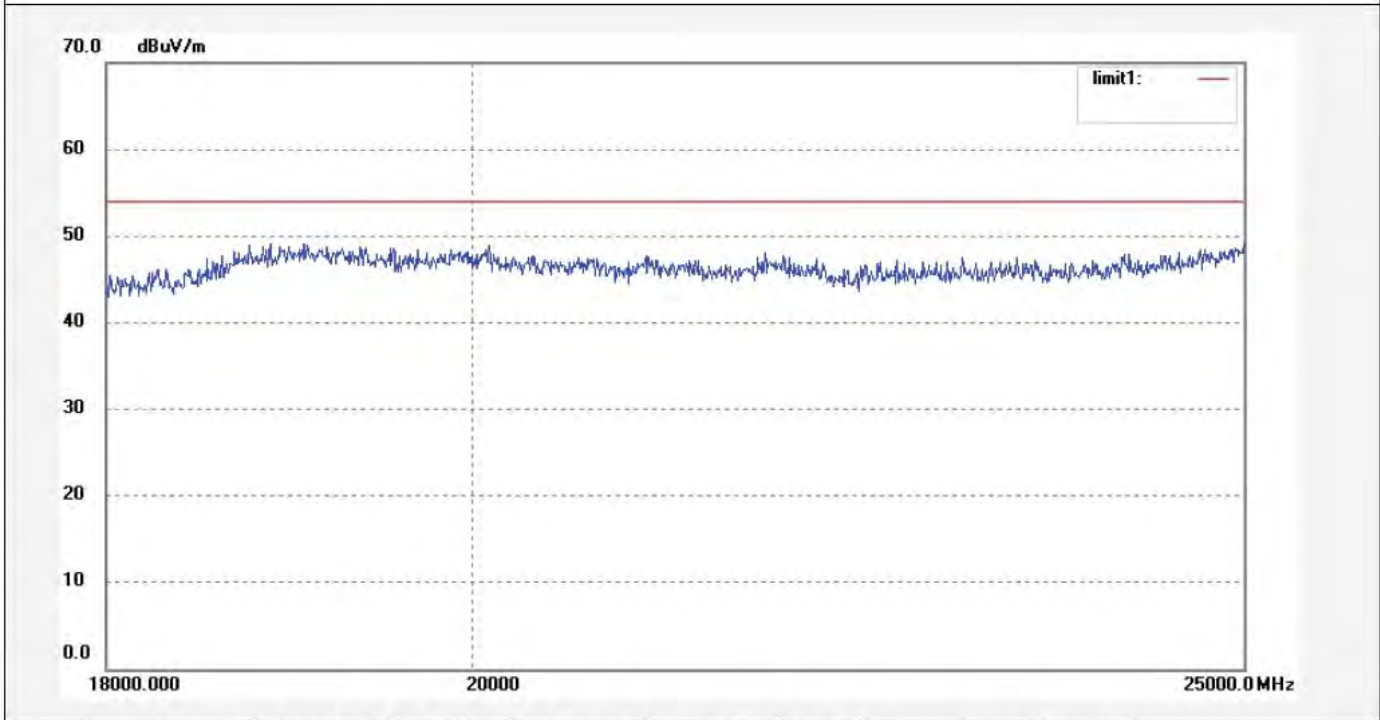

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1609	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:38:38
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

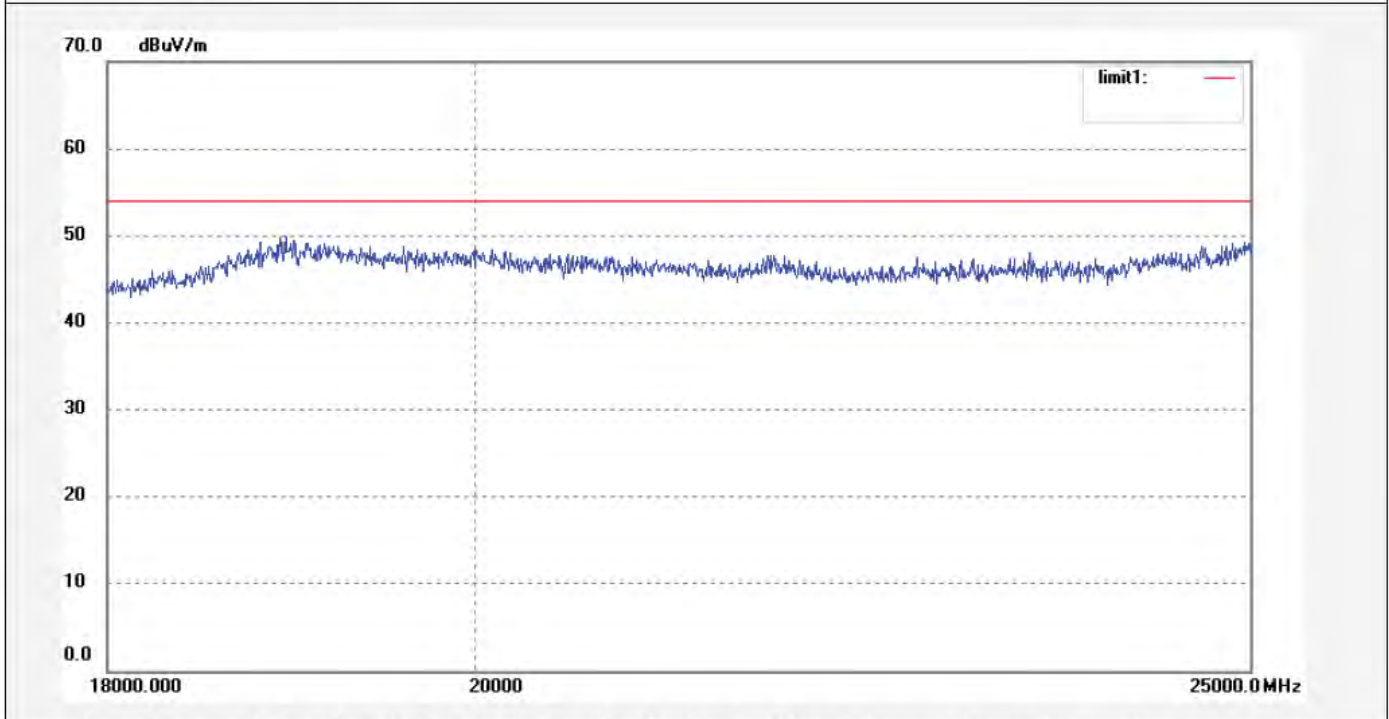

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1610	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:43:17
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

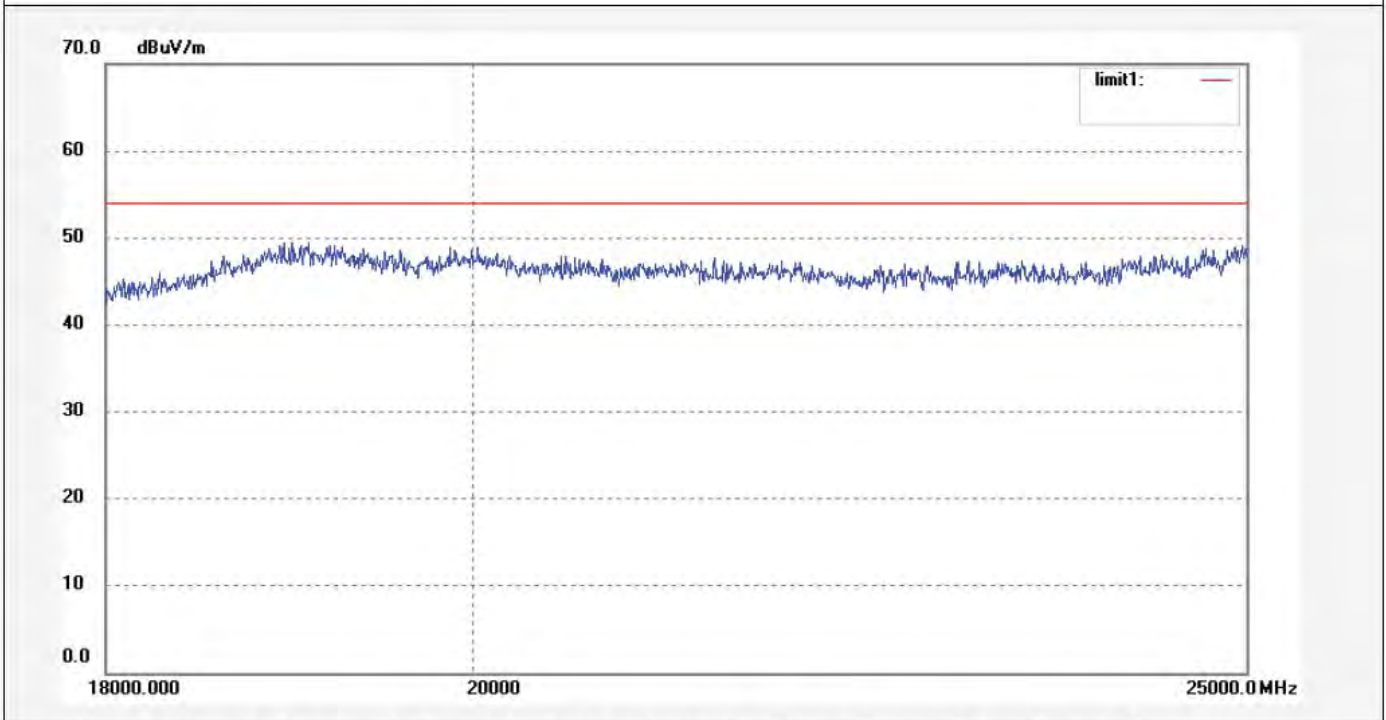

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1611	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:47:55
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

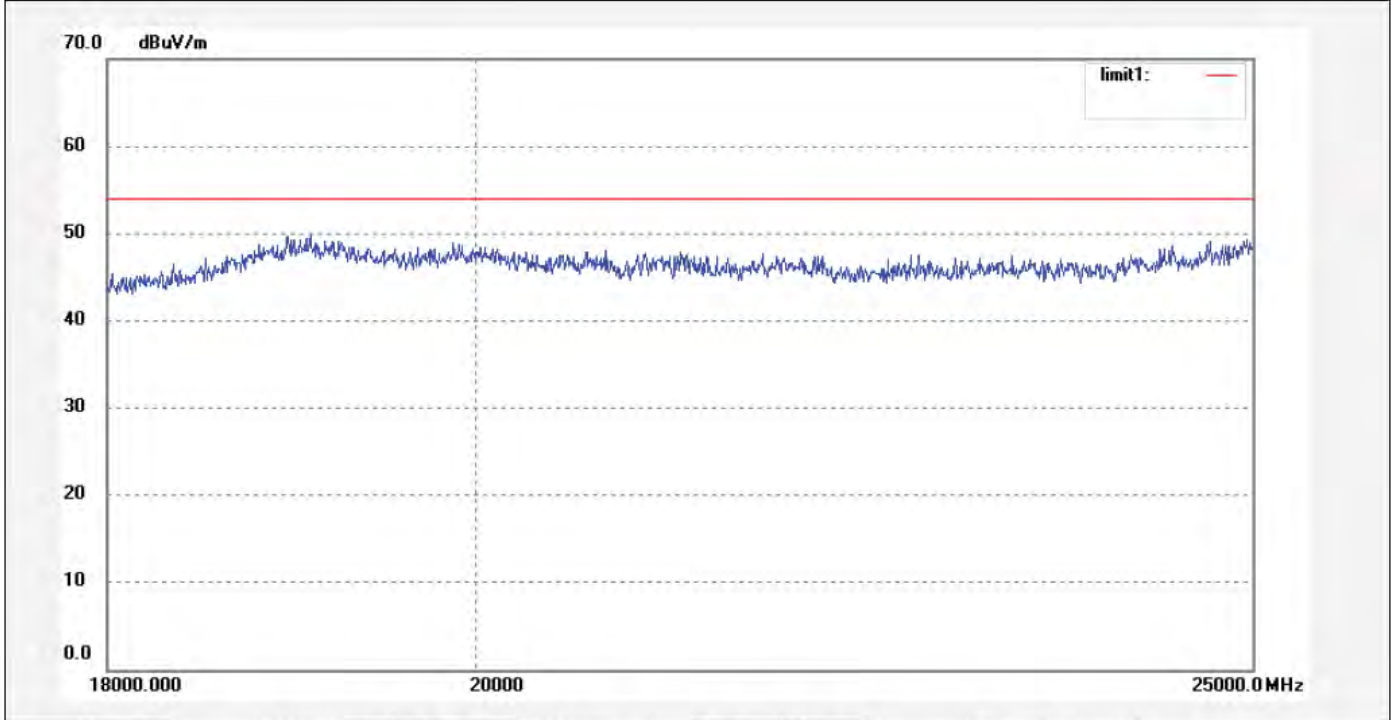

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1612	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 10:50:47
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

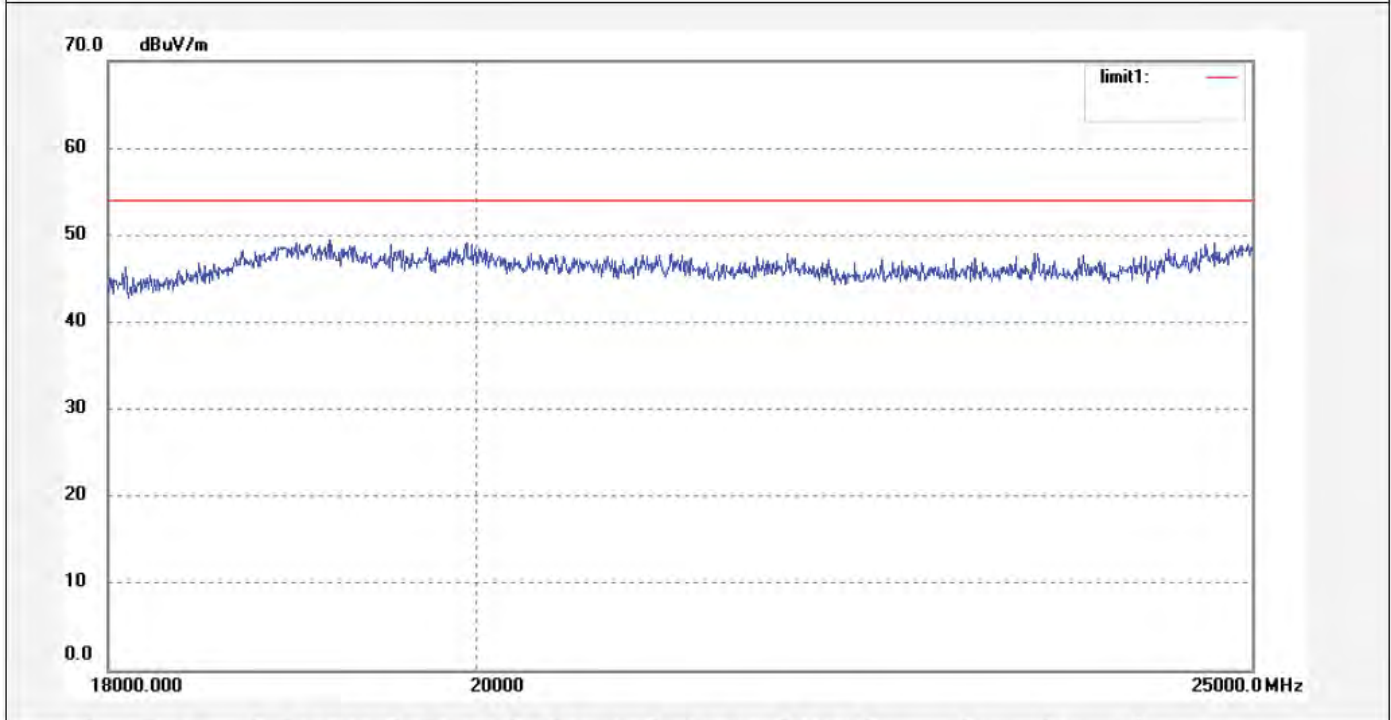

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1613	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 10:53:17
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

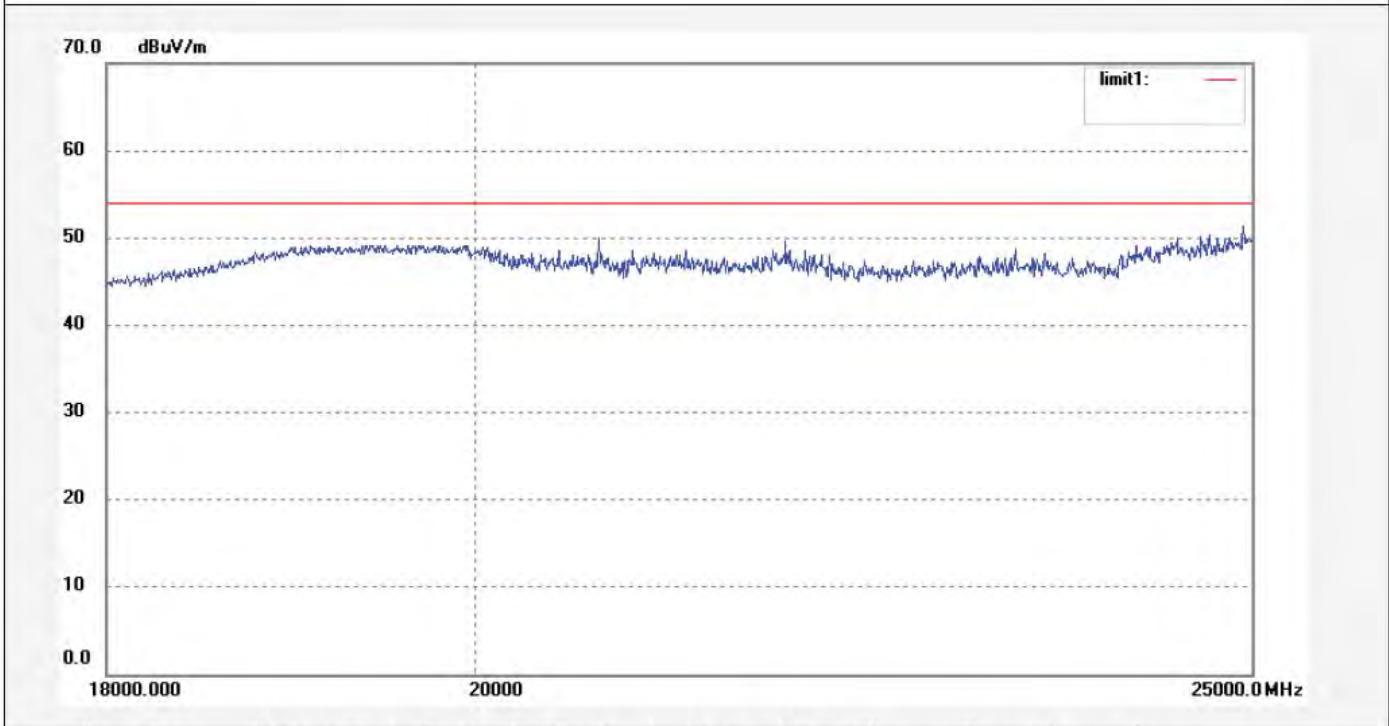

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1614	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 10:57:05
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

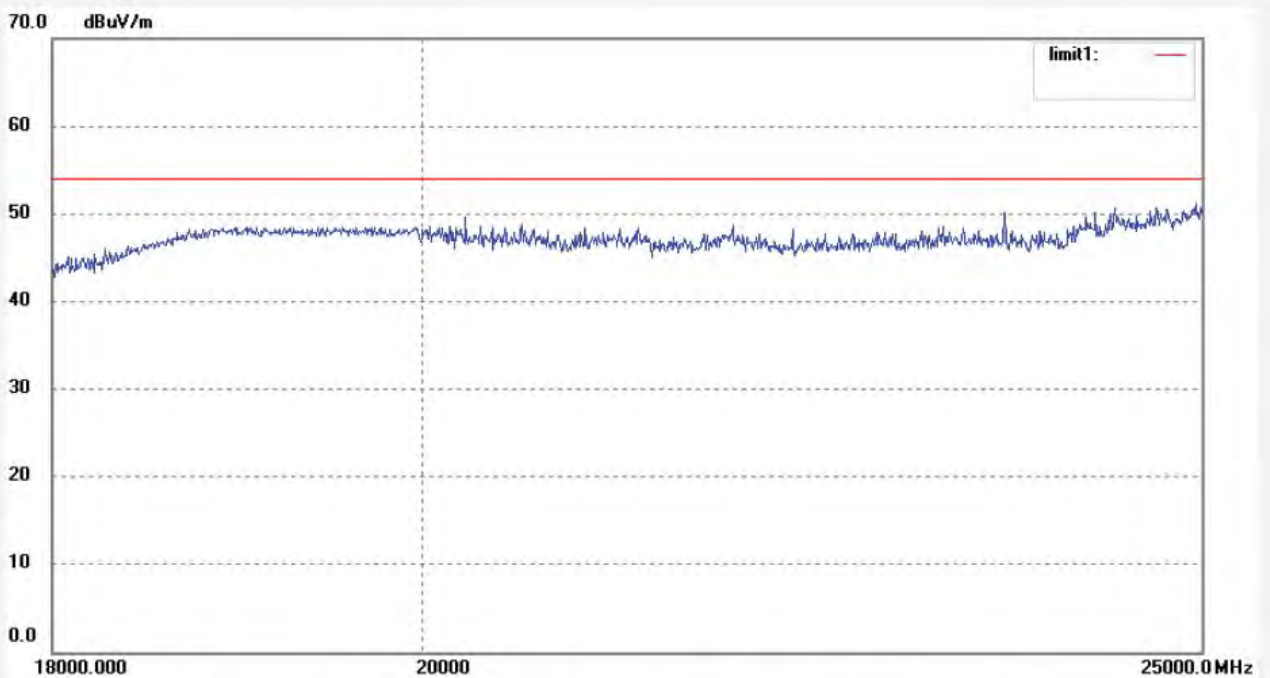

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1615	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:02:36
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

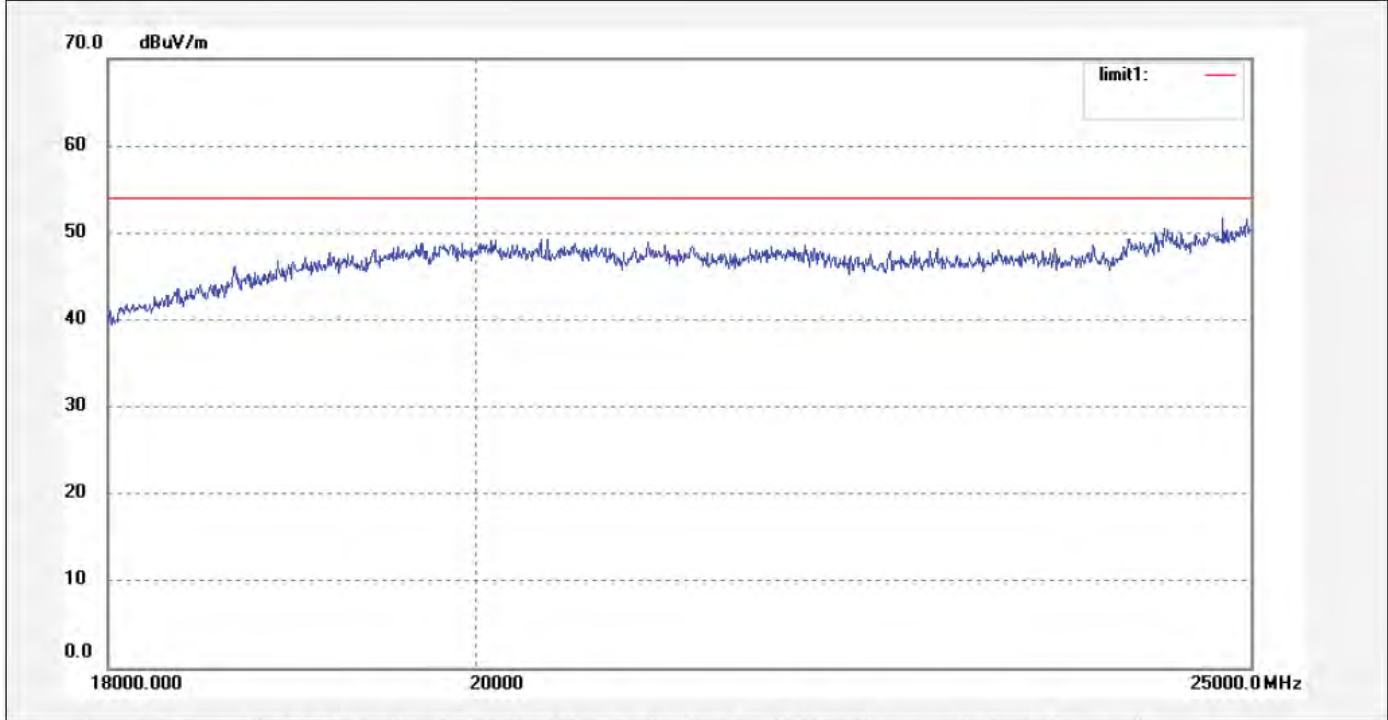

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1616	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:05:58
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

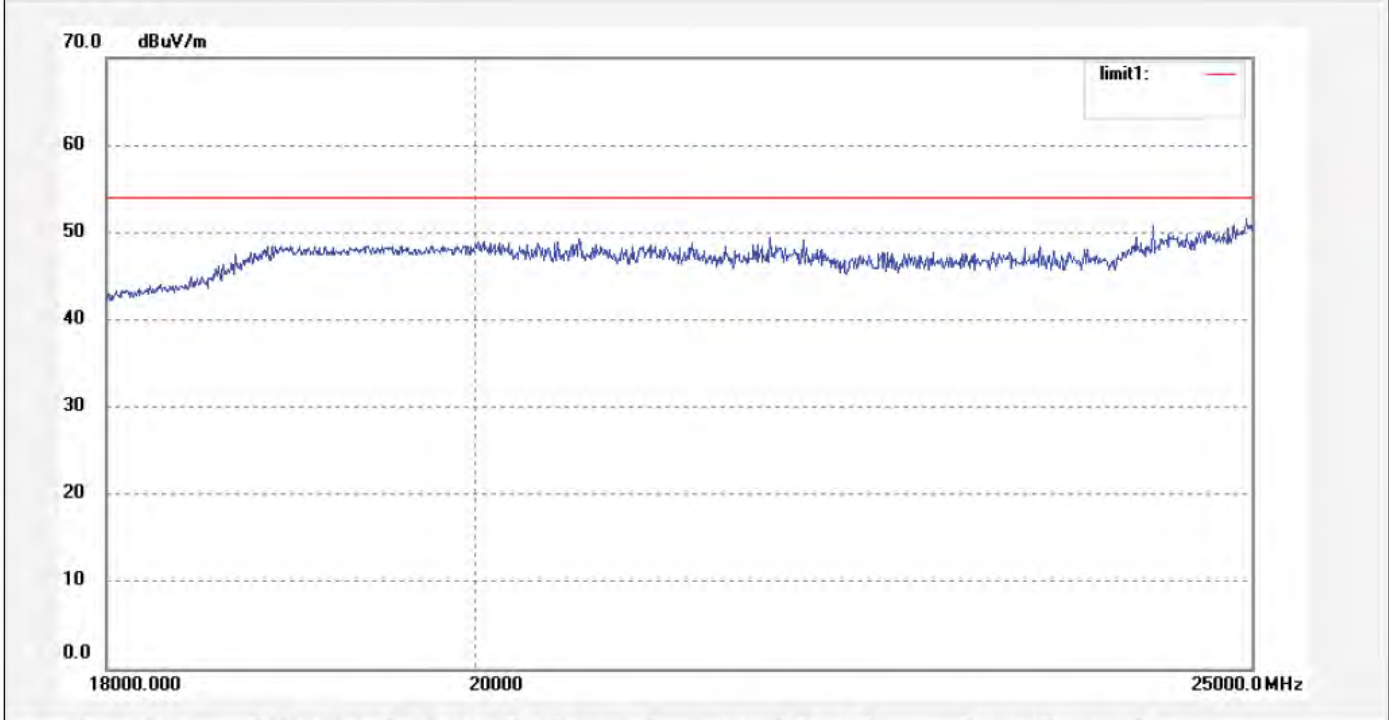

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1617	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:09:37
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

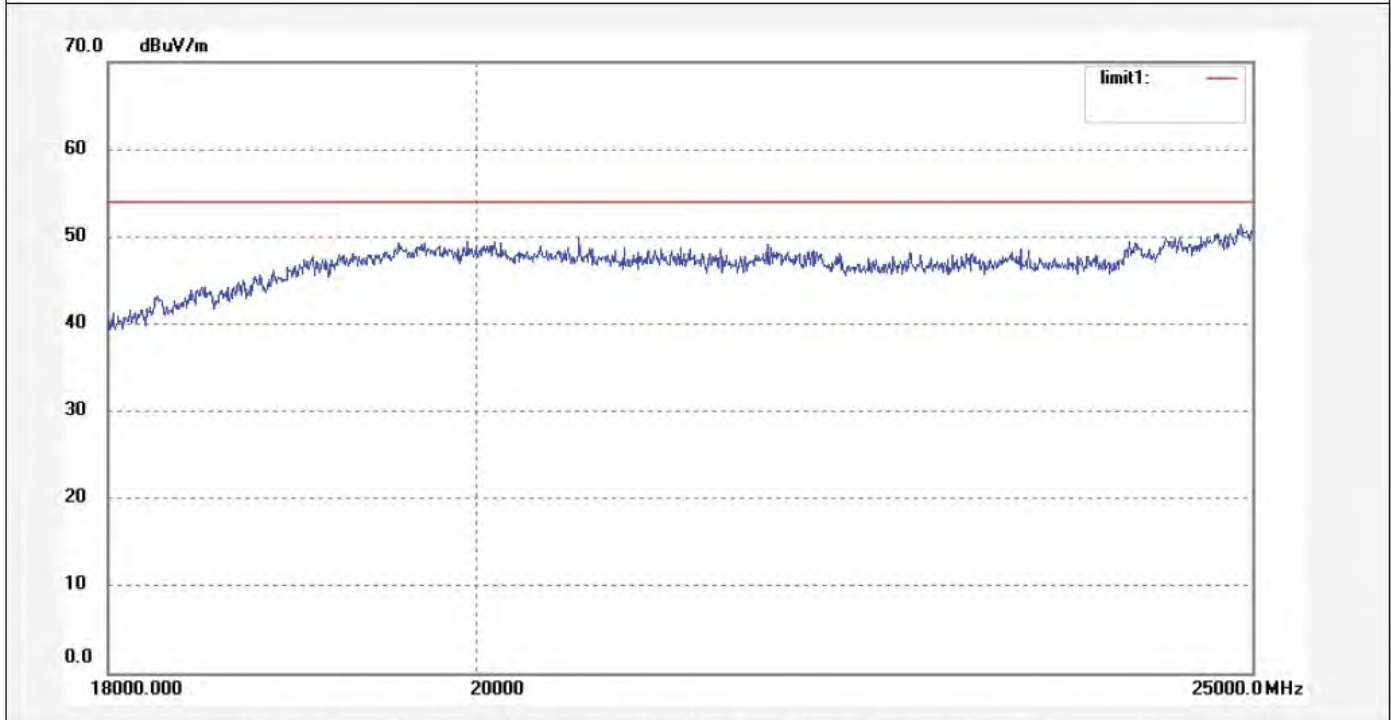

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #1618	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 11:14:41
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

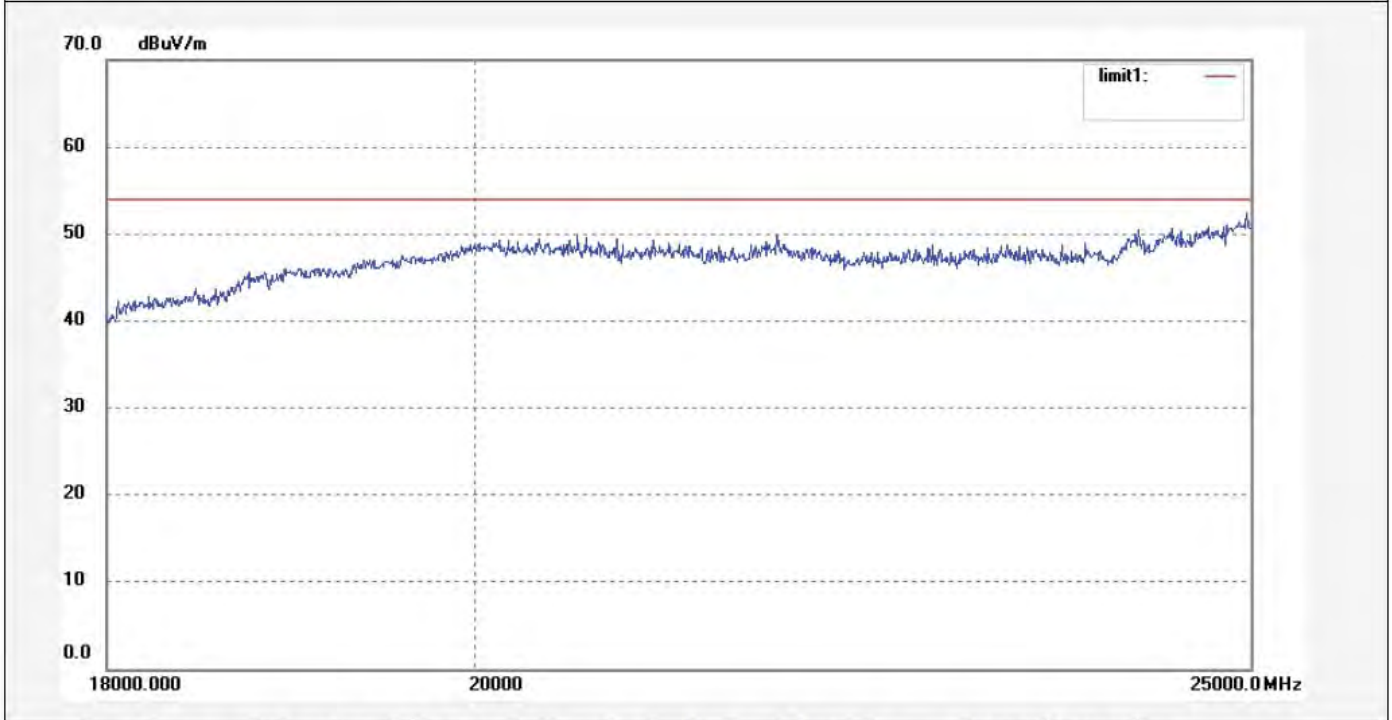

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5916	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11:52:09
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 3 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

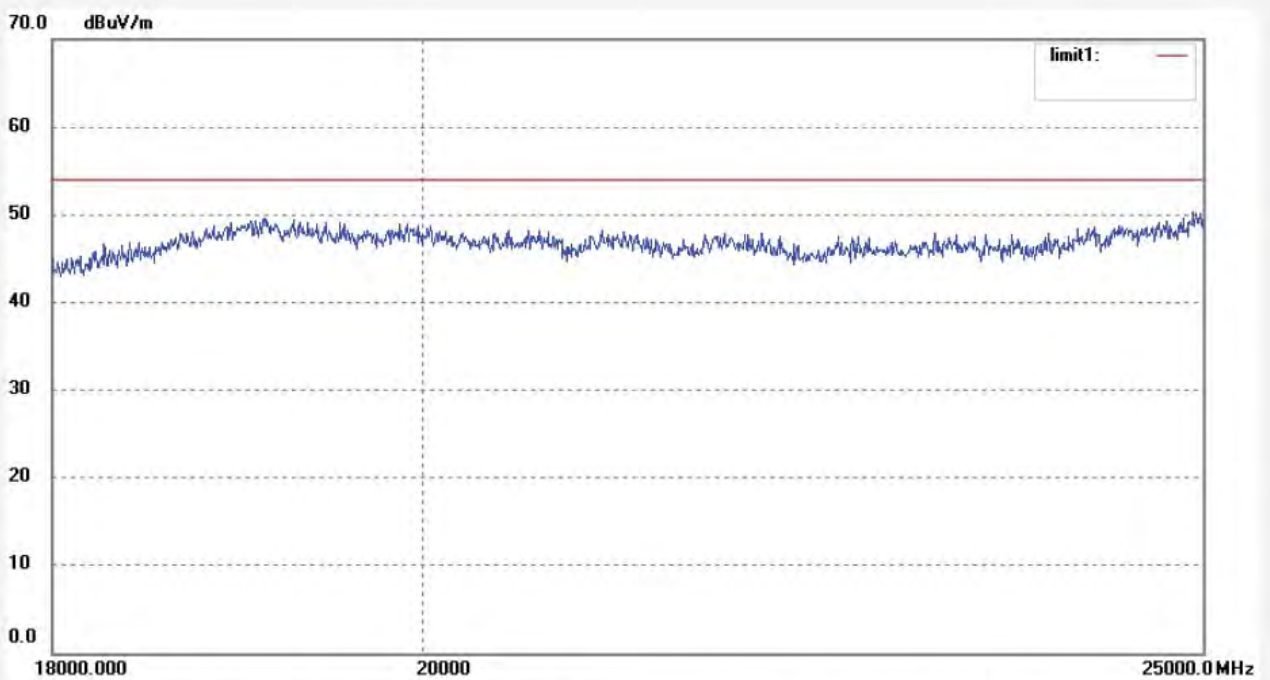

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5917	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11:56:43
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 3 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

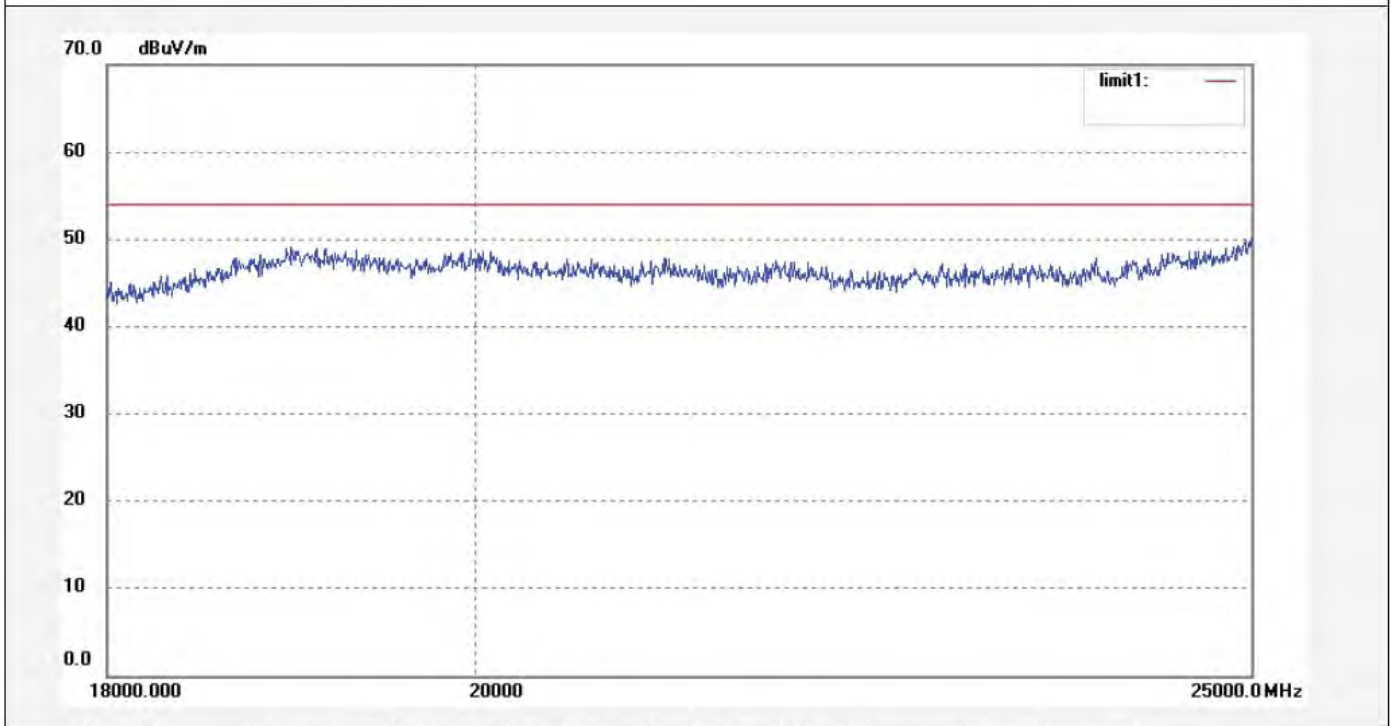

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5918	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:01:19
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

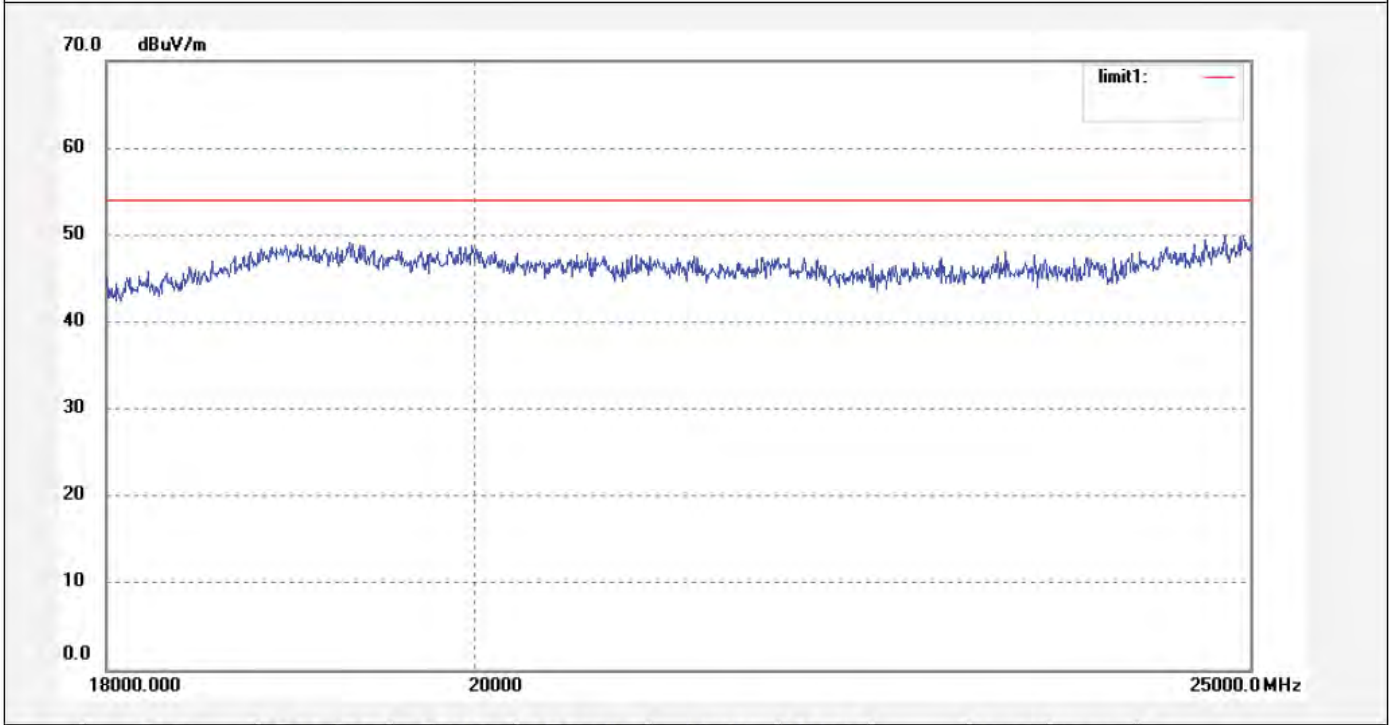

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5919	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:05:30
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

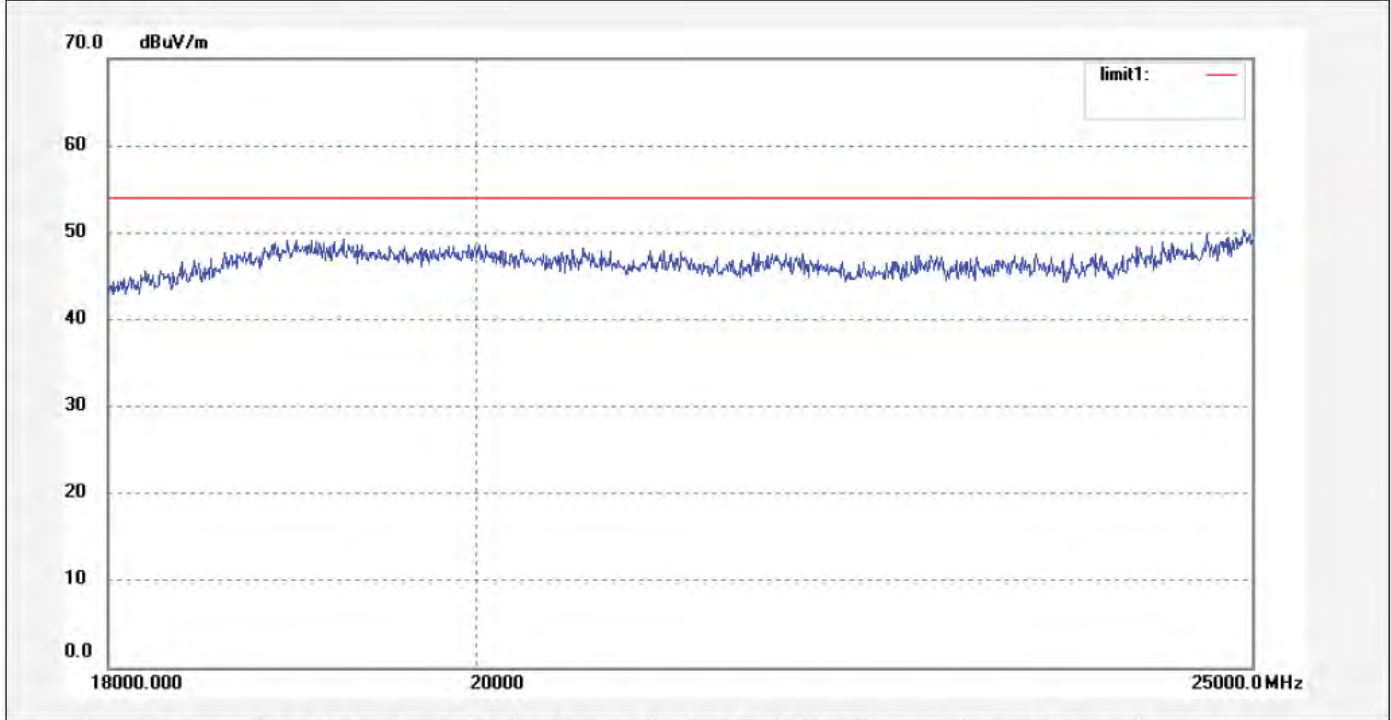

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5920	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:10:41
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 9 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	

Note: Report No.:ATE20121899

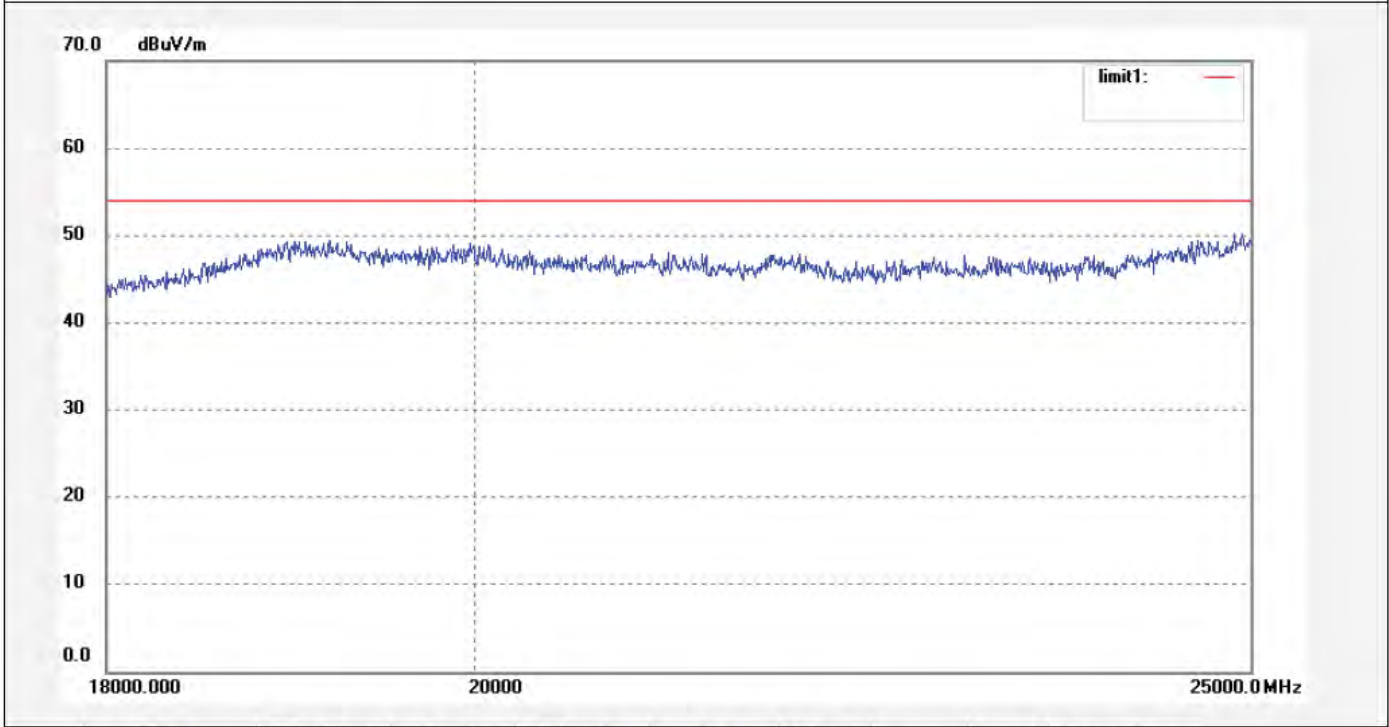

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: Bob #5921	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/09/06/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 12:15:08
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 9 (802.11n)	Distance:
Model: PC7011	
Manufacturer: Natural Sound	


Note: Report No.:ATE20121899

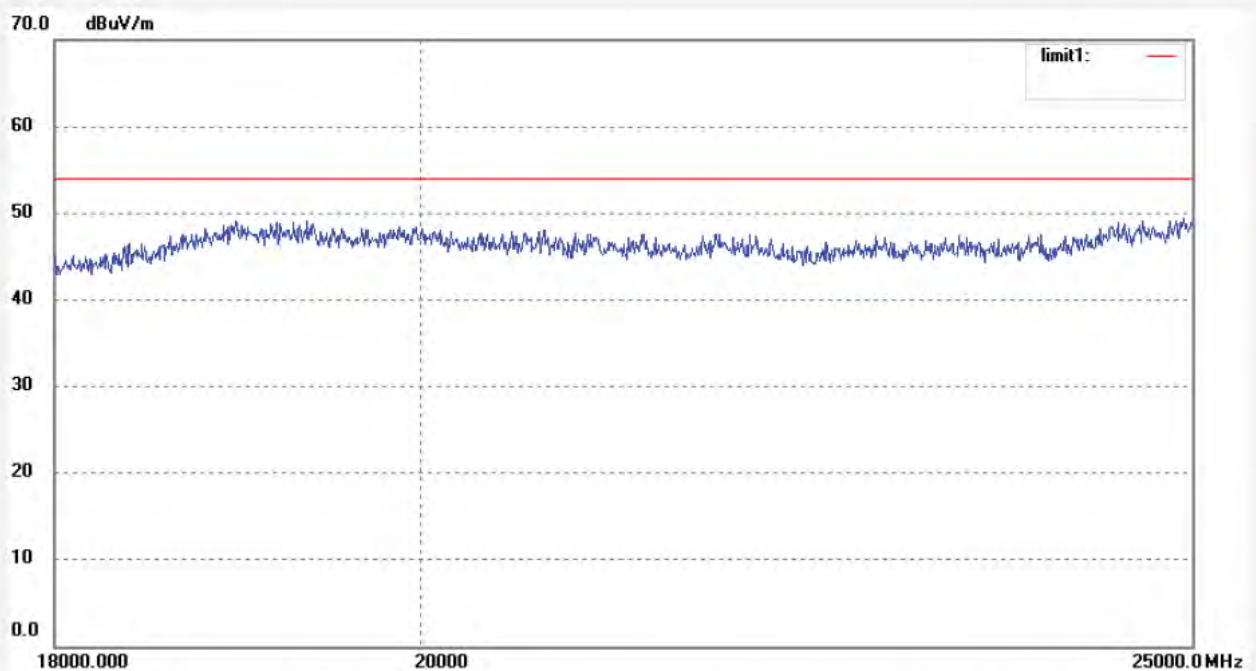

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

## 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

### 10.1. Block Diagram of Test Setup



(EUT: MID)

### 10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 10.3.1. MID (EUT)

Model Number	:	PC7011
Serial Number	:	N/A
Manufacturer	:	ShenZhen Natural Sound Electronics Co., Ltd

## 10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 10.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

## 10.5. Test Procedure

10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

10.5.3. The Conducted Spurious Emission was measured and recorded.



## 10.6. Test Result

**Pass.**



The spectrum analyzer plots are attached as below.





TX 802.11b Channel Low 2412MHz

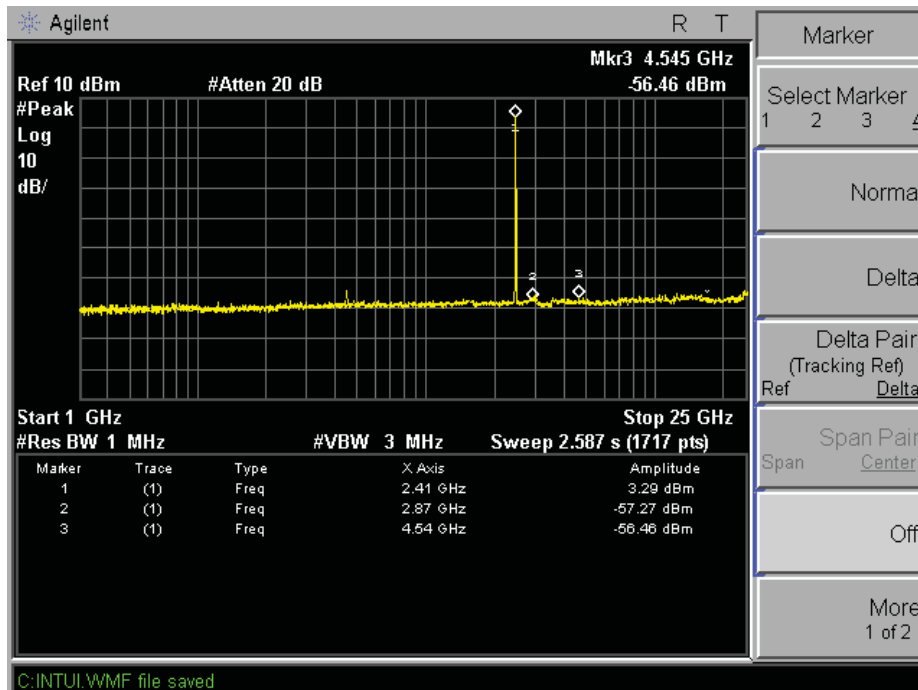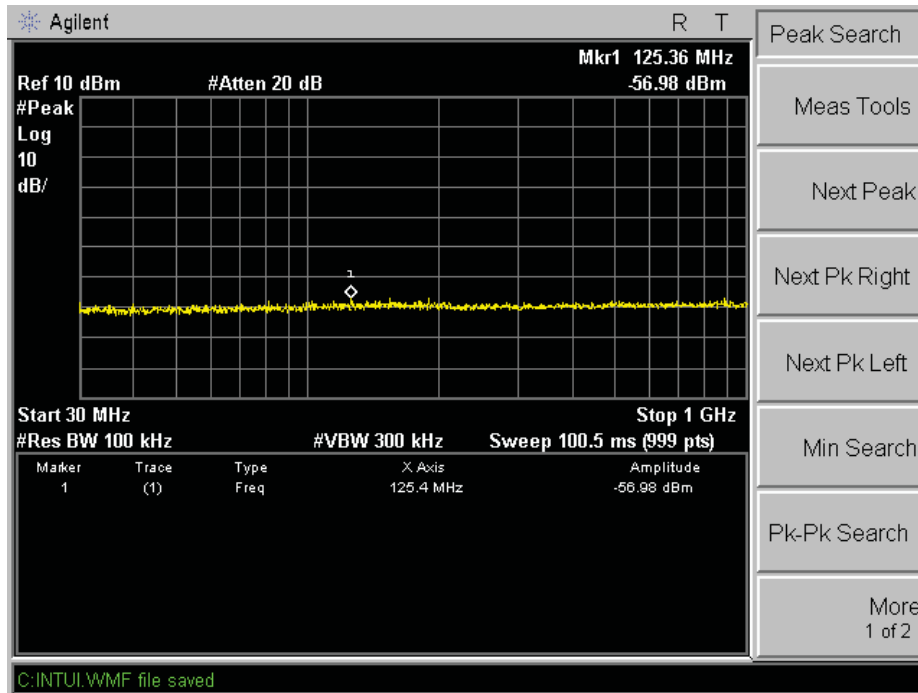

TX 802.11b Channel Middle 2437MHz

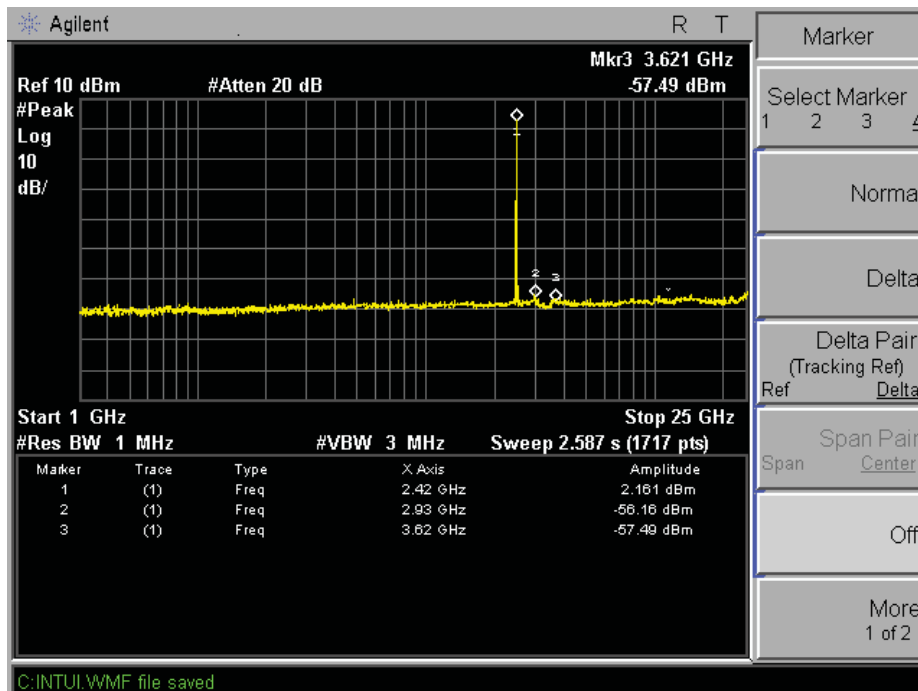
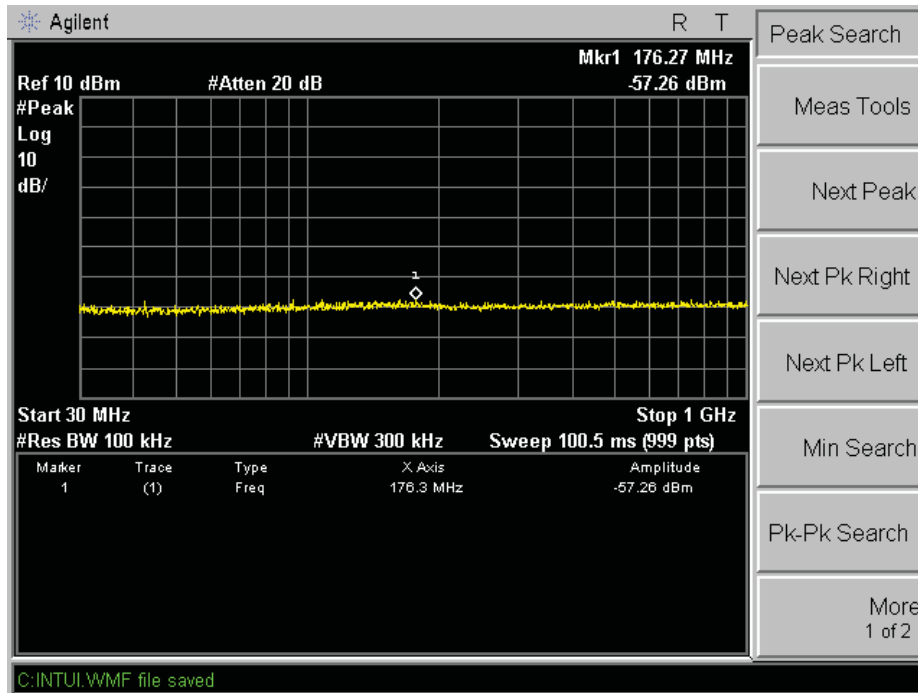


TX 802.11b Channel High 2462MHz

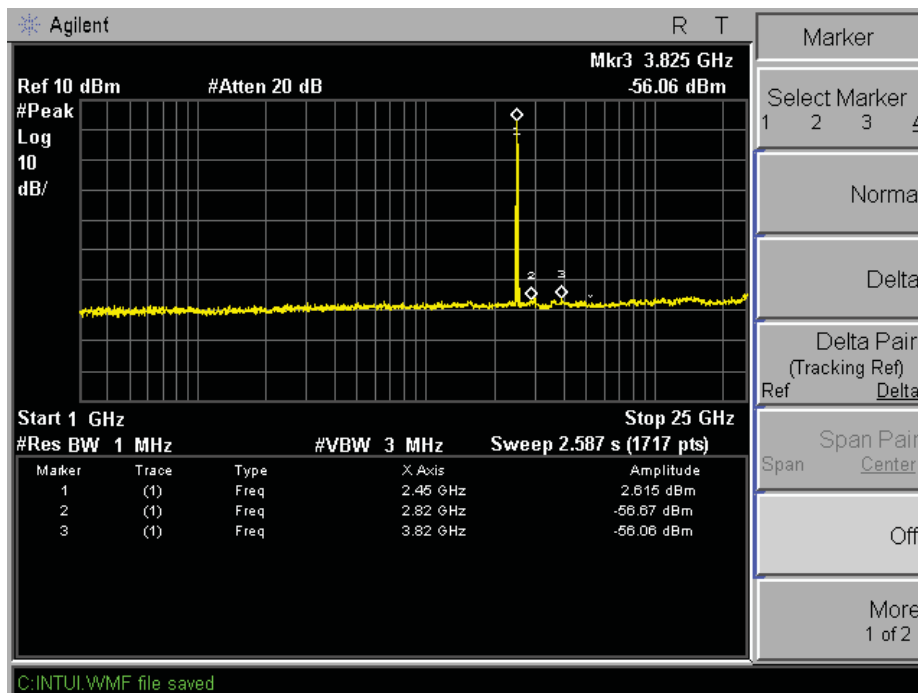
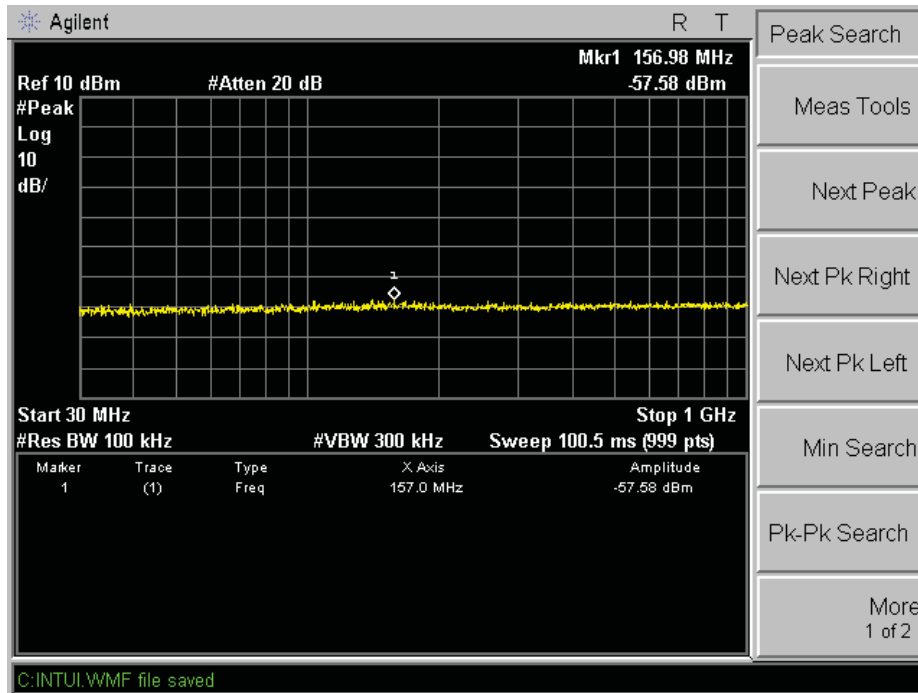






TX 802.11g Channel Low 2412MHz

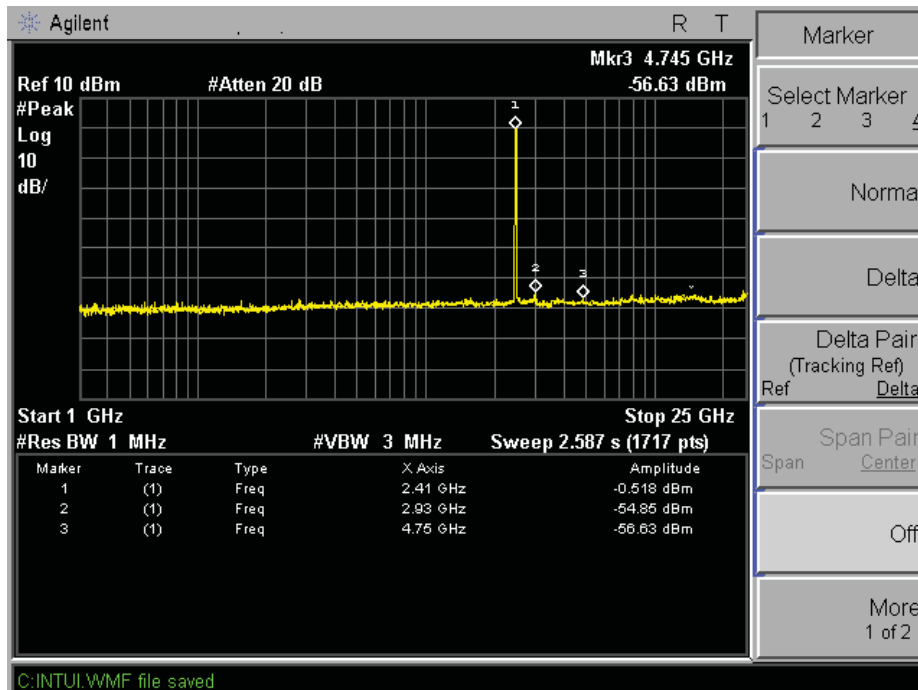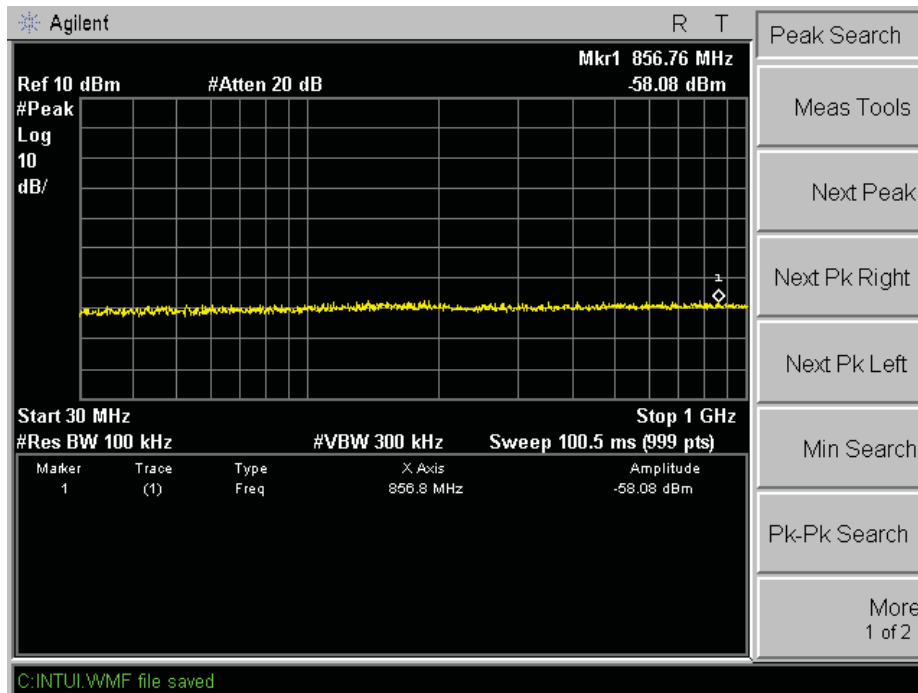

**TX 802.11g Channel Middle 2437MHz**

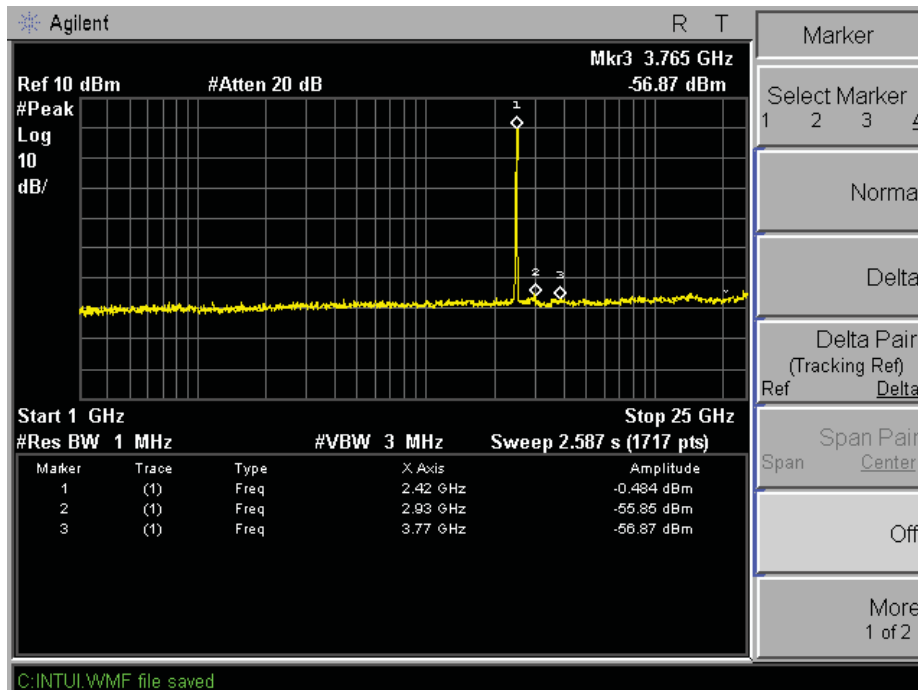
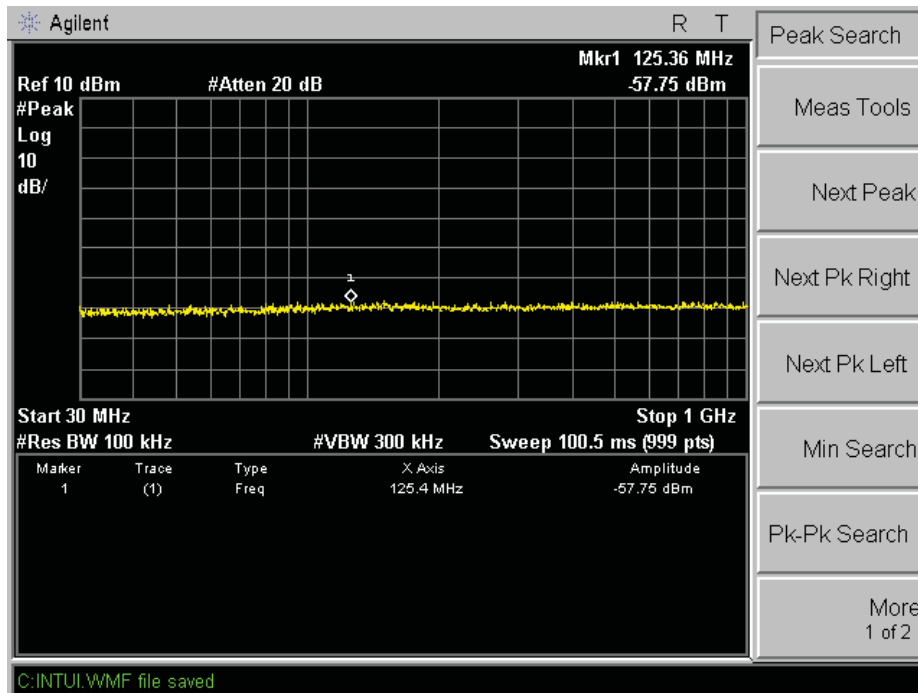


### TX 802.11g Channel High 2462MHz

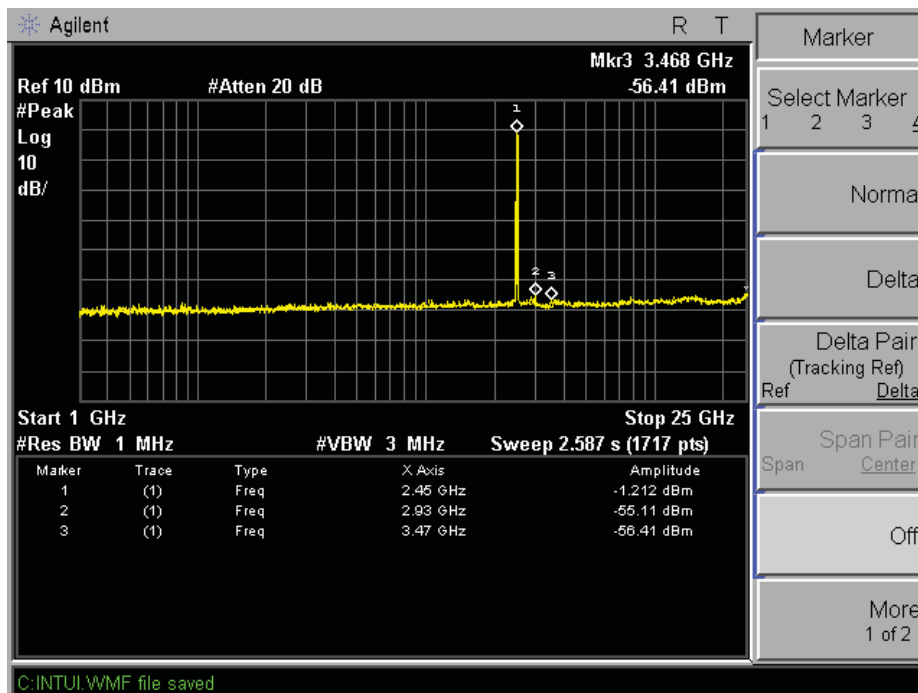
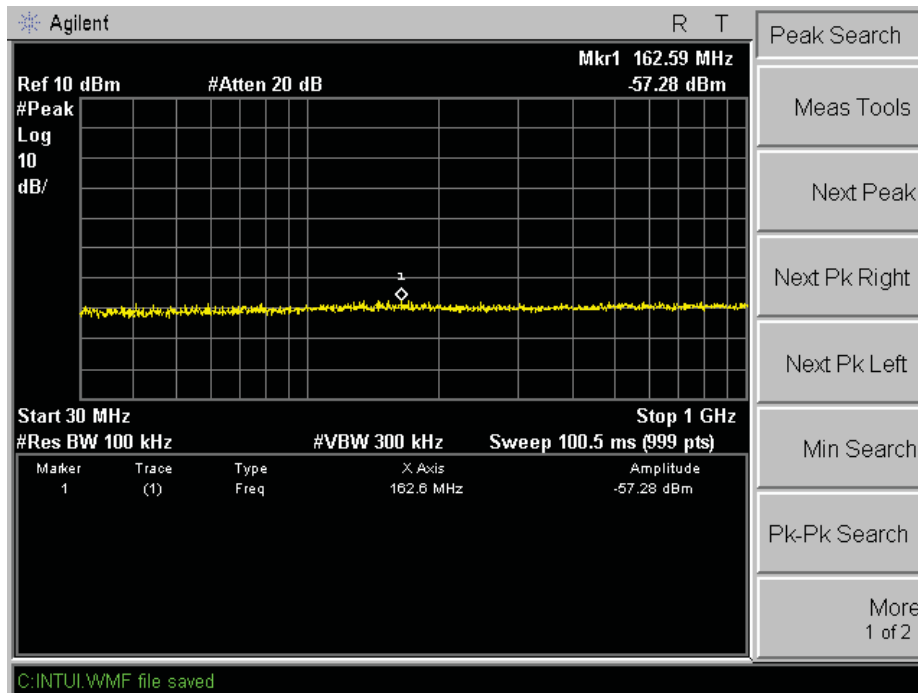






**TX 802.11n Channel Low 2412MHz (20MHz)**

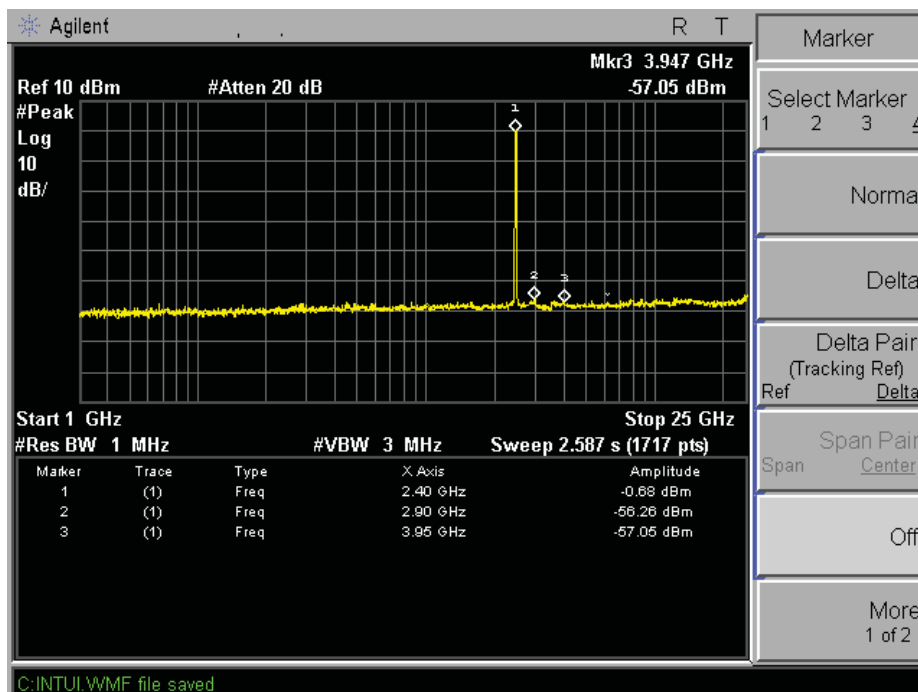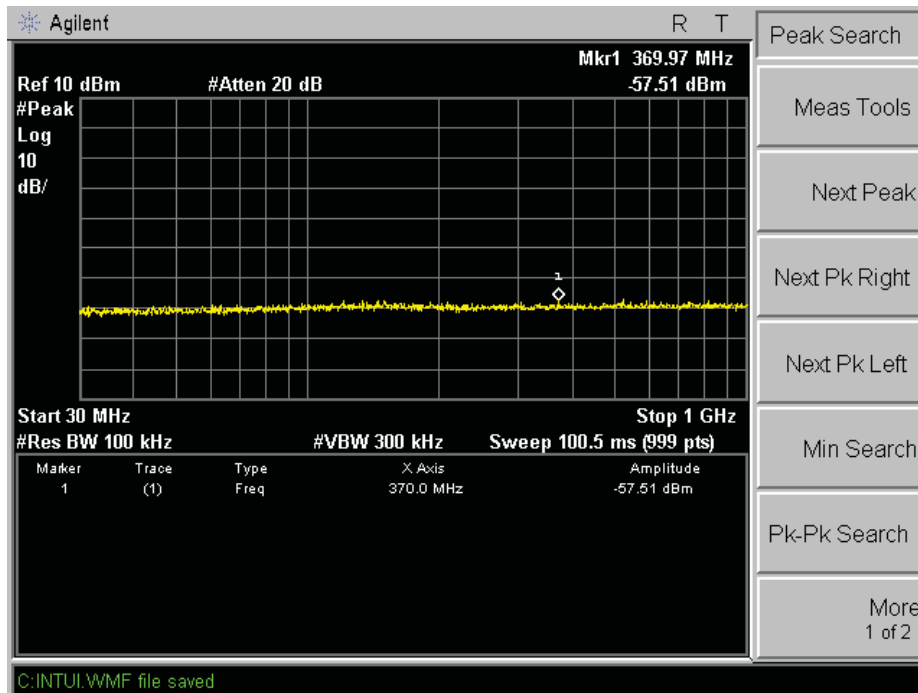

**TX 802.11n Channel Middle 2437MHz (20MHz)**

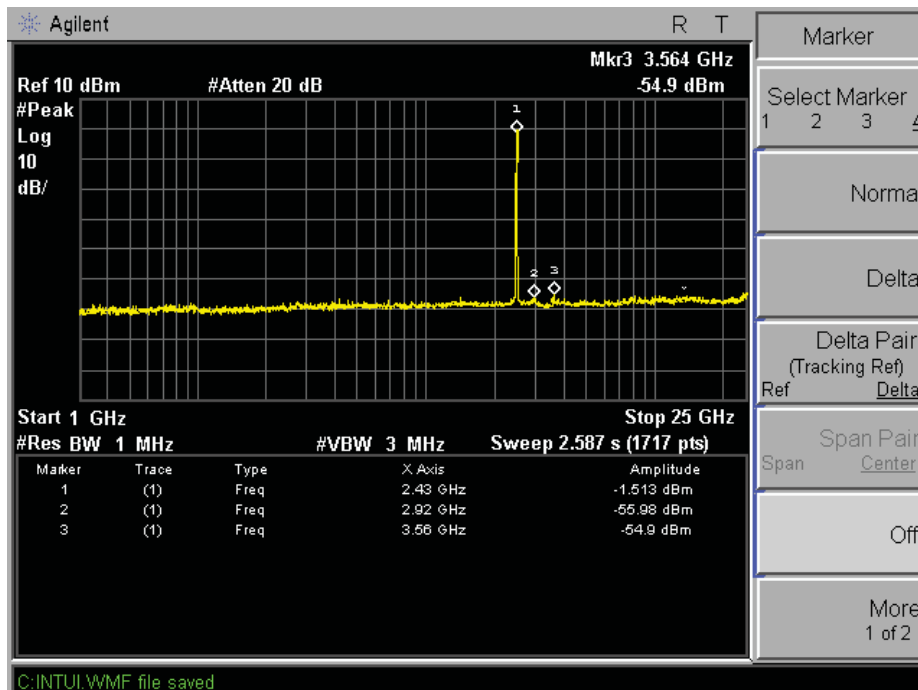
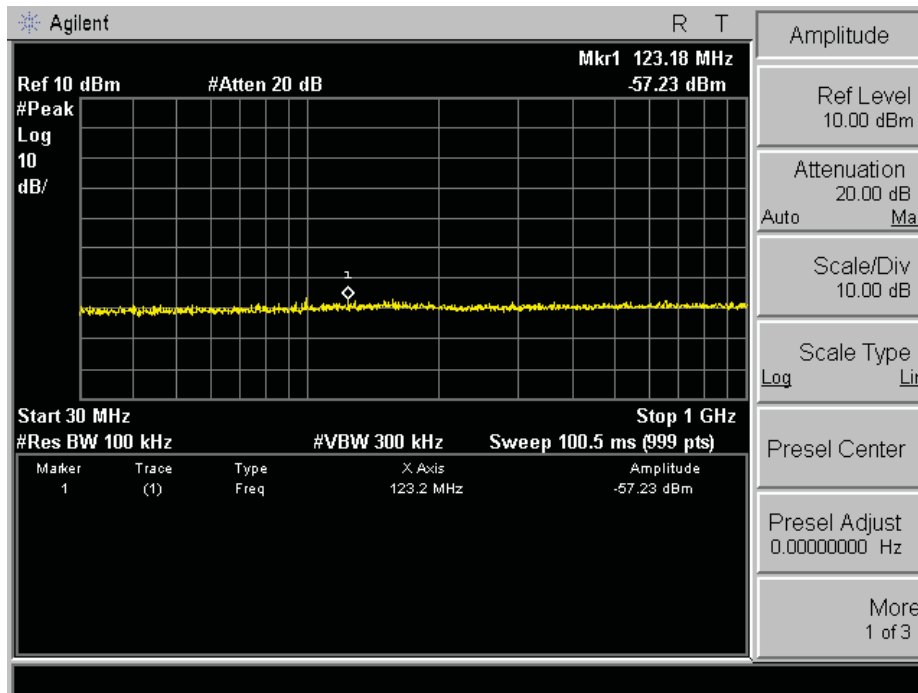


TX 802.11n Channel High 2462MHz (20MHz)

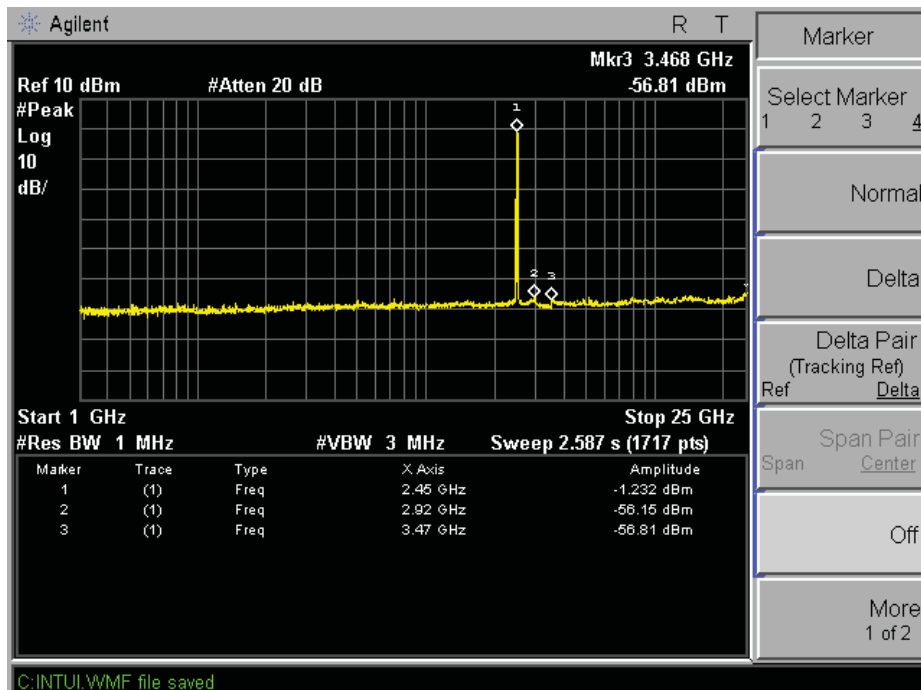
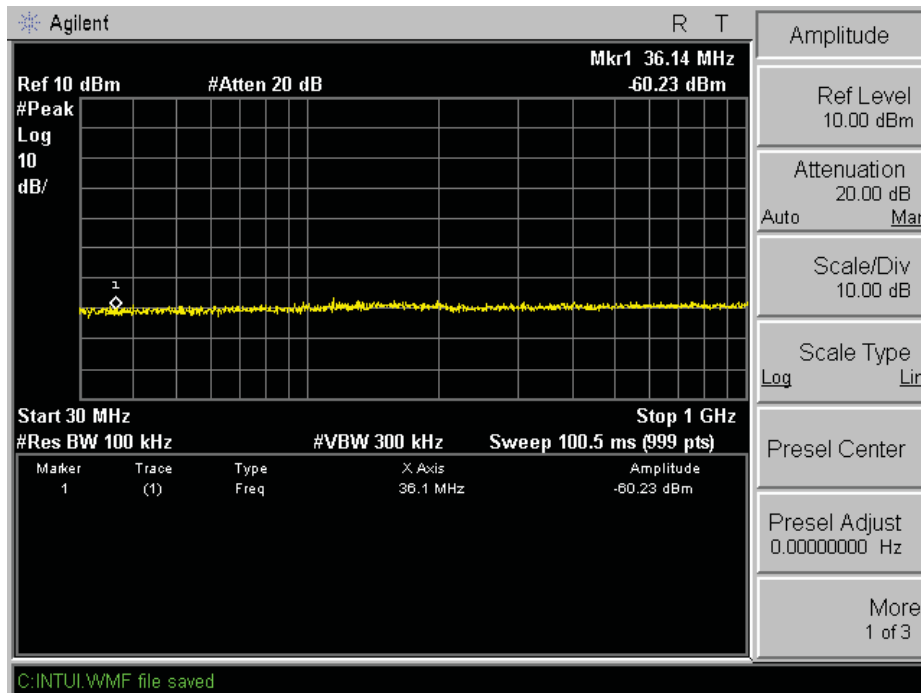






**TX 802.11n Channel Low 2422MHz (40MHz)**

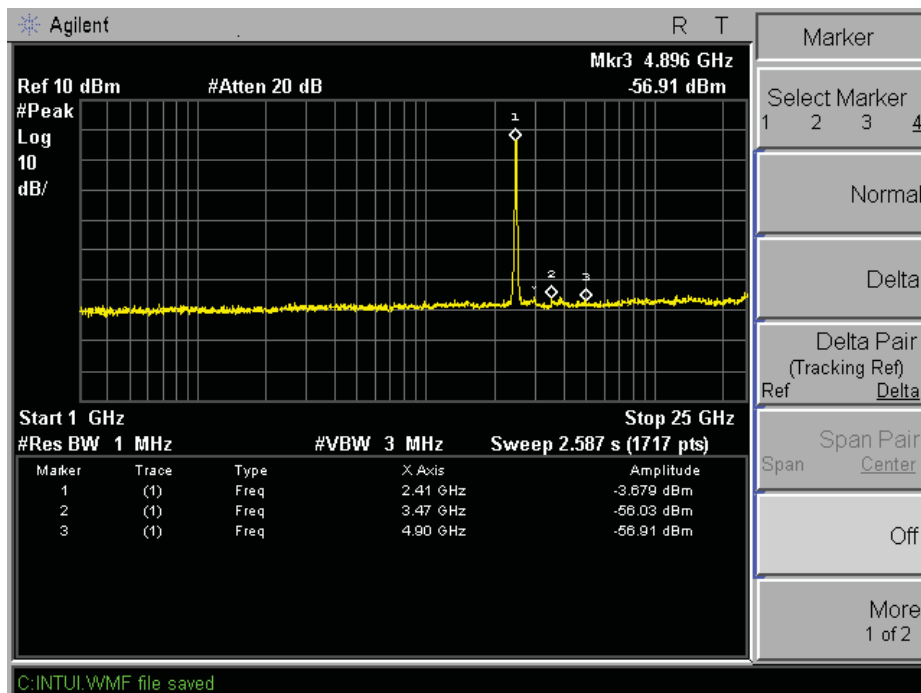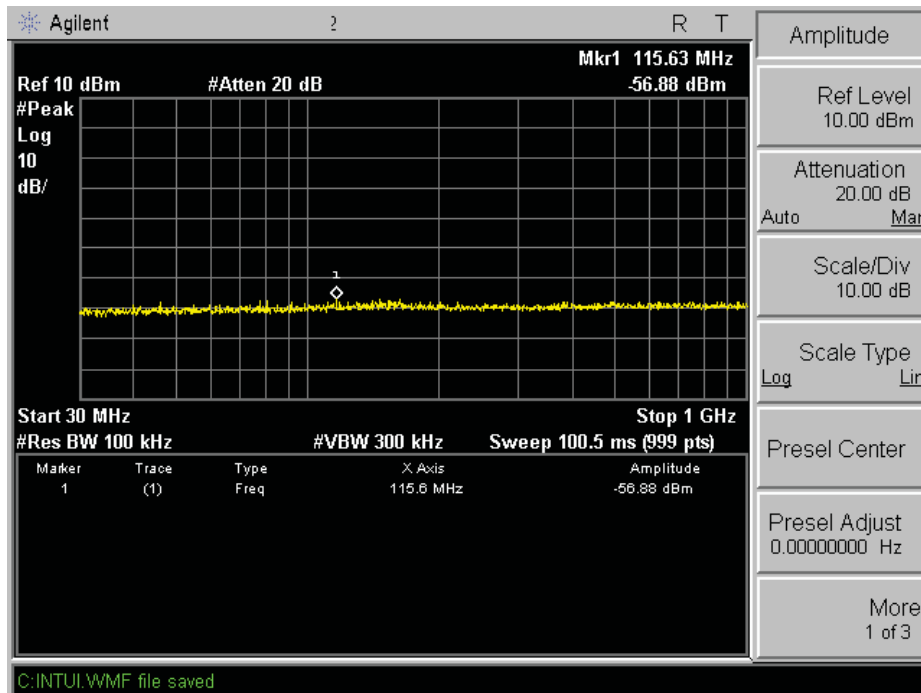

**TX 802.11n Channel Middle 2437MHz (40MHz)**

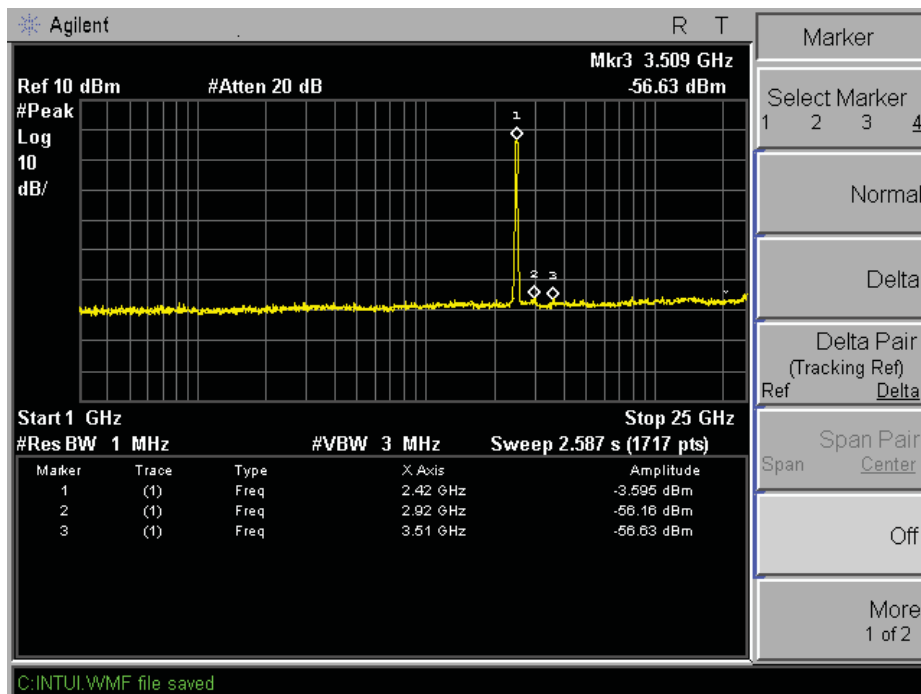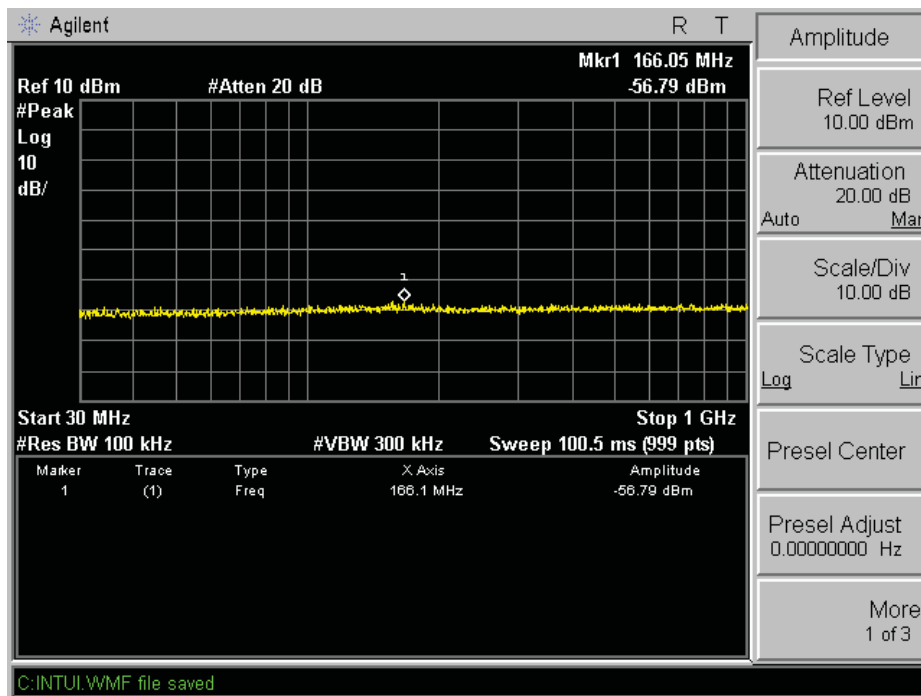

**TX 802.11n Channel High 2452MHz (40MHz)**

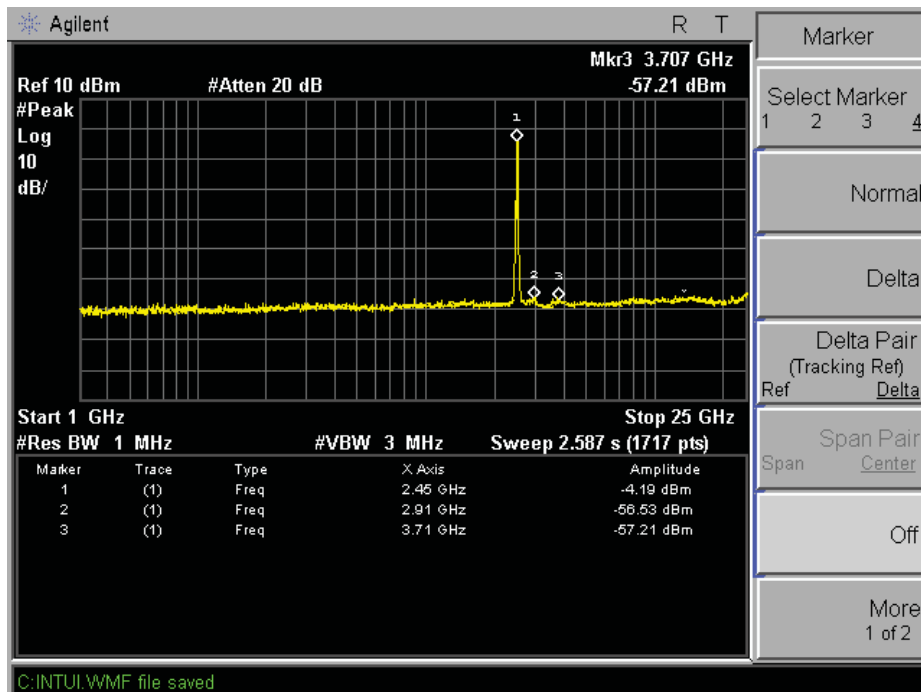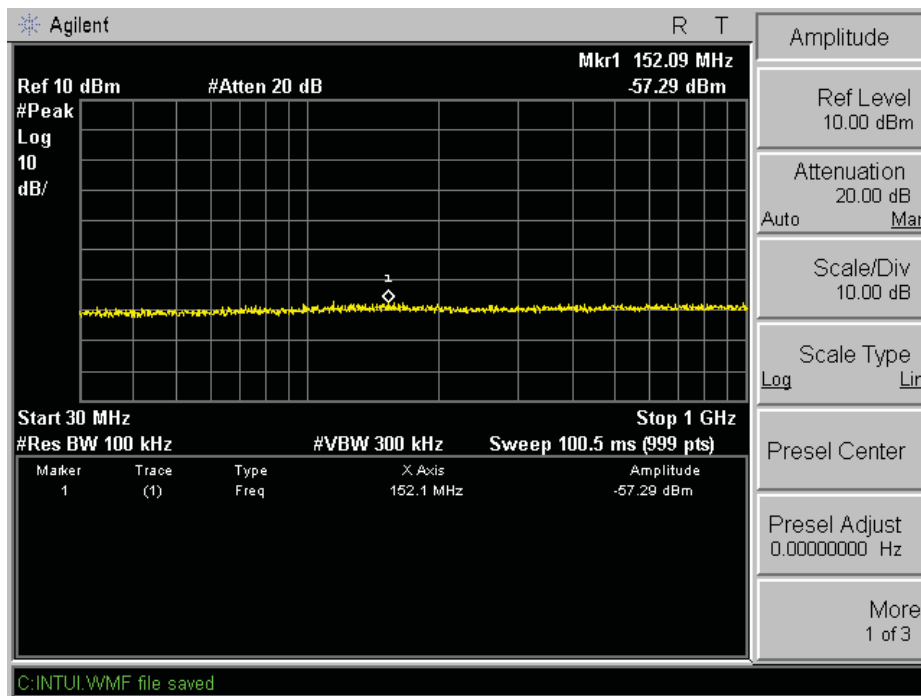




# 11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

## 15 SECTION 15.207(A)


### 11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators



(EUT: MID)

11.1.2.Shielding Room Test Setup Diagram

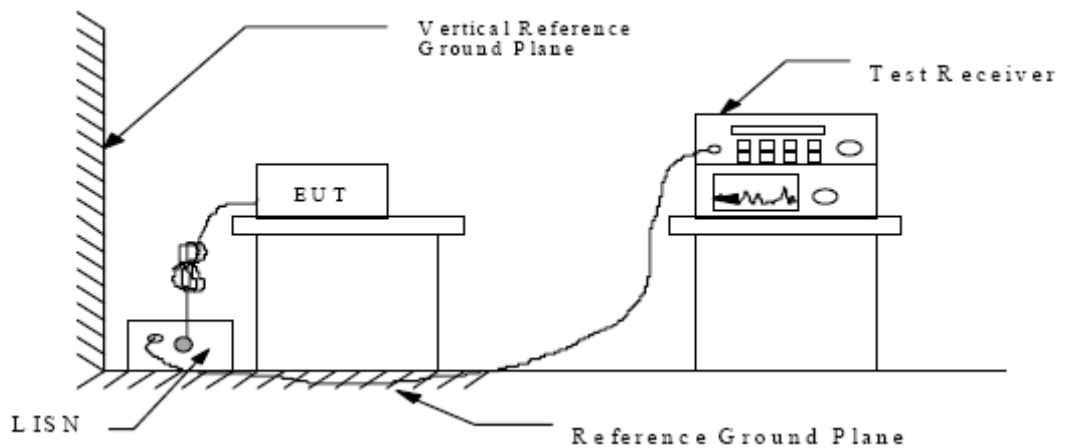

(EUT: 10 inch Tablet PC)

### 11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

\* Decreases with the logarithm of the frequency.

### 11.3. Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 11.3.1. MID (EUT)

Model Number : PC7011  
Serial Number : N/A  
Manufacturer : ShenZhen Natural Sound Electronics Co., Ltd

### 11.4. Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 11.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in TX (Charging) mode measure it.

### 11.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

## 11.6. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150 kHz to 30MHz is checked.

Date of Test:	<u>Sep 7, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC7011</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>operation</u>	Test Engineer:	<u>Bob</u>

Frequency (MHz)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Line
0.310189	49.50	60	10.5	QP	Neutral
0.361001	49.30	59	9.4	QP	
0.519130	46.30	56	9.7	QP	
0.318980	37.30	50	12.4	AV	
0.355282	38.30	49	10.5	AV	
4.913107	34.00	46	12.0	AV	
0.359562	50.50	59	8.2	QP	Live
0.527486	46.80	56	9.2	QP	
0.638894	48.80	56	7.2	QP	
0.359562	40.60	49	8.1	AV	
0.475482	37.10	46	9.3	AV	
4.972301	38.50	46	7.5	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.  
The spectral diagrams are attached as below.




**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART15B**

EUT: MID M/N:PC7011  
 Manufacturer: Natural Sound  
 Operating Condition: Operation  
 Test Site: 1#Shielding Room  
 Operator: Bob  
 Test Specification: N AC120V/60Hz  
 Comment: Report NO.:ATE20121899  
 Start of Test: 9/07/2012 / 2:07:34PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

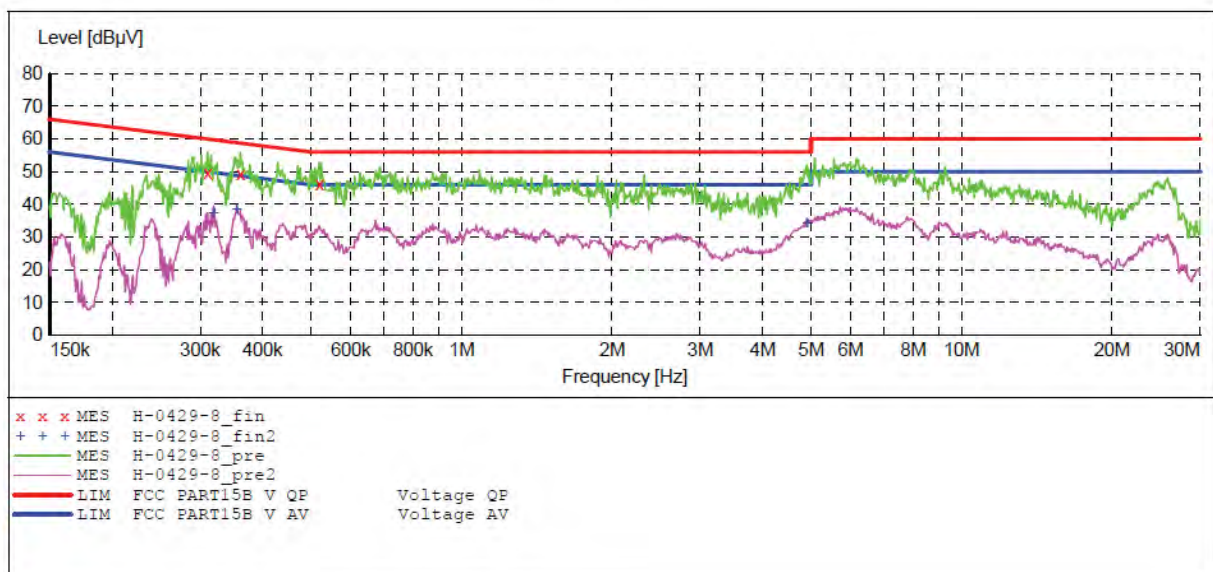

**MEASUREMENT RESULT: "H-0429-8\_fin"**

9/07/2012 2:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.310189	49.50	11.6	60	10.5	QP	N	GND
0.361001	49.30	11.7	59	9.4	QP	N	GND
0.519130	46.30	12.0	56	9.7	QP	N	GND

**MEASUREMENT RESULT: "H-0429-8\_fin2"**

9/07/2012 2:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.318980	37.30	11.6	50	12.4	AV	N	GND
0.355282	38.30	11.7	49	10.5	AV	N	GND
4.913107	34.00	11.4	46	12.0	AV	N	GND


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART15B**

EUT: MID M/N:PC7011  
 Manufacturer: Natural Sound  
 Operating Condition: TOperation  
 Test Site: 1#Shielding Room  
 Operator: Bob  
 Test Specification: L AC120V/60Hz  
 Comment: Report NO.:ATE20121899  
 Start of Test: 9/07/2012 / 2:10:16PM

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

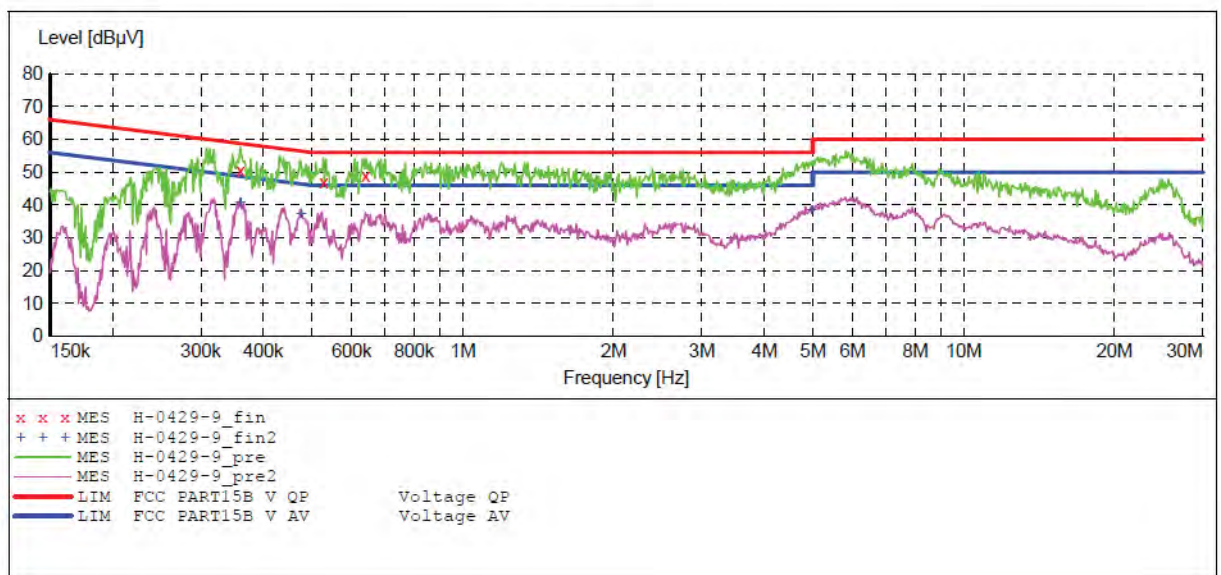

**MEASUREMENT RESULT: "H-0429-9\_fin"**

9/07/2012 2:12PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.359562	50.50	11.7	59	8.2	QP	L1	GND
0.527486	46.80	12.0	56	9.2	QP	L1	GND
0.638894	48.80	11.9	56	7.2	QP	L1	GND

**MEASUREMENT RESULT: "H-0429-9\_fin2"**

9/07/2012 2:12PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.359562	40.60	11.7	49	8.1	AV	L1	GND
0.475482	37.10	12.0	46	9.3	AV	L1	GND
4.972301	38.50	11.4	46	7.5	AV	L1	GND

## 12. ANTENNA REQUIREMENT

### 12.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 12.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.



Antenna