




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #972	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 14:59:45
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

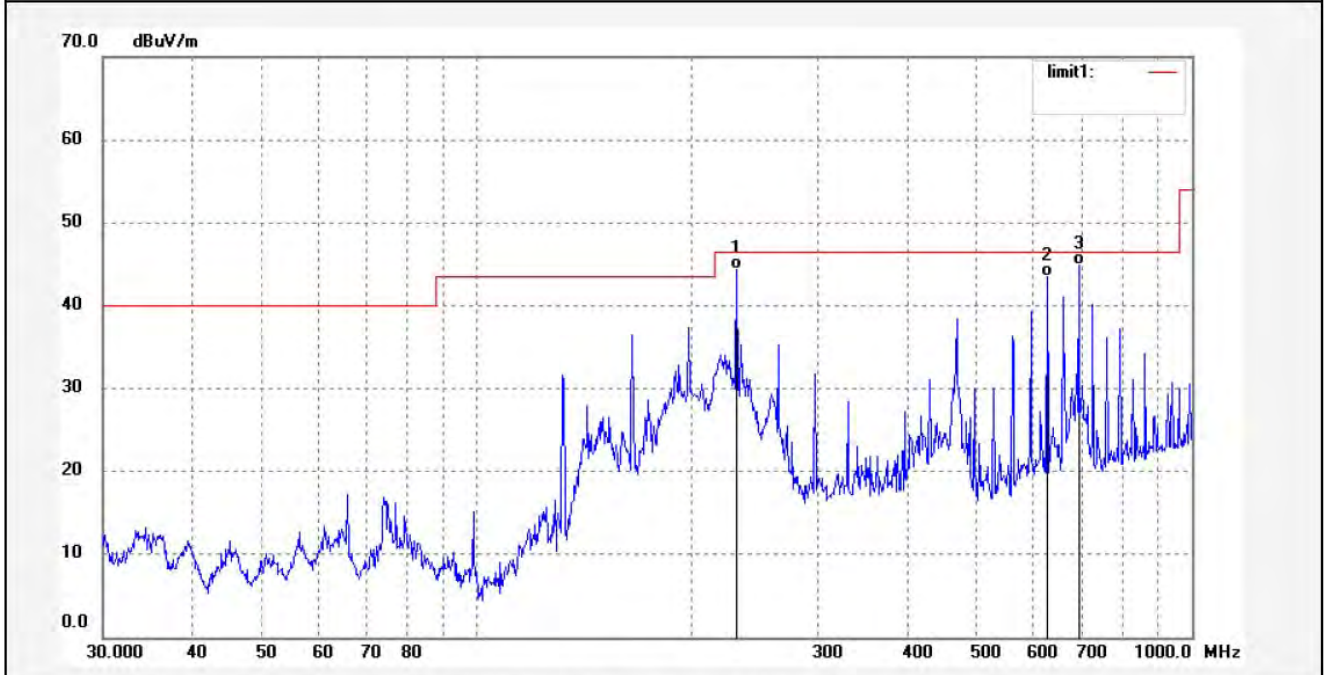

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.14	-19.86	44.28	46.50	-2.22	QP			
2	627.2738	54.55	-11.10	43.45	46.50	-3.05	QP			
3	694.4174	54.79	-9.90	44.89	46.50	-1.61	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #973	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:02:31
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

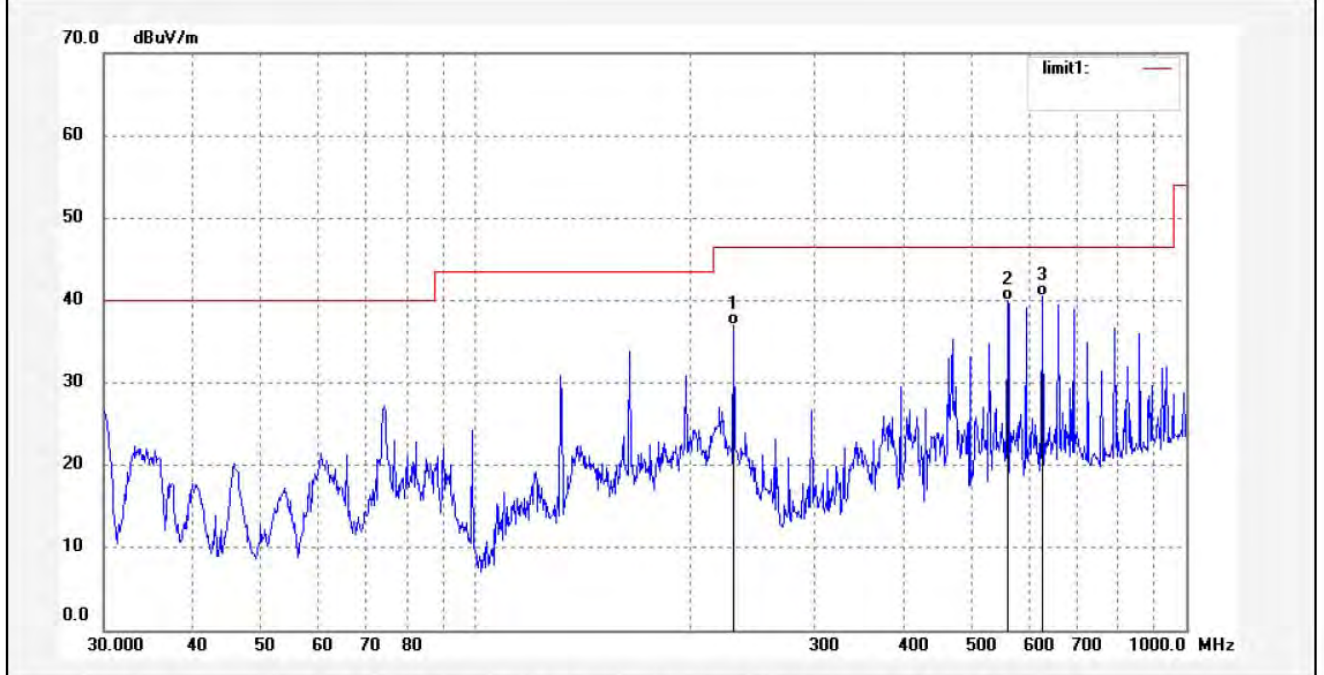

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	56.91	-19.86	37.05	46.50	-9.45	QP			
2	560.6928	52.53	-12.59	39.94	46.50	-6.56	QP			
3	627.2738	51.57	-11.10	40.47	46.50	-6.03	QP			




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #2517	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/31/37
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

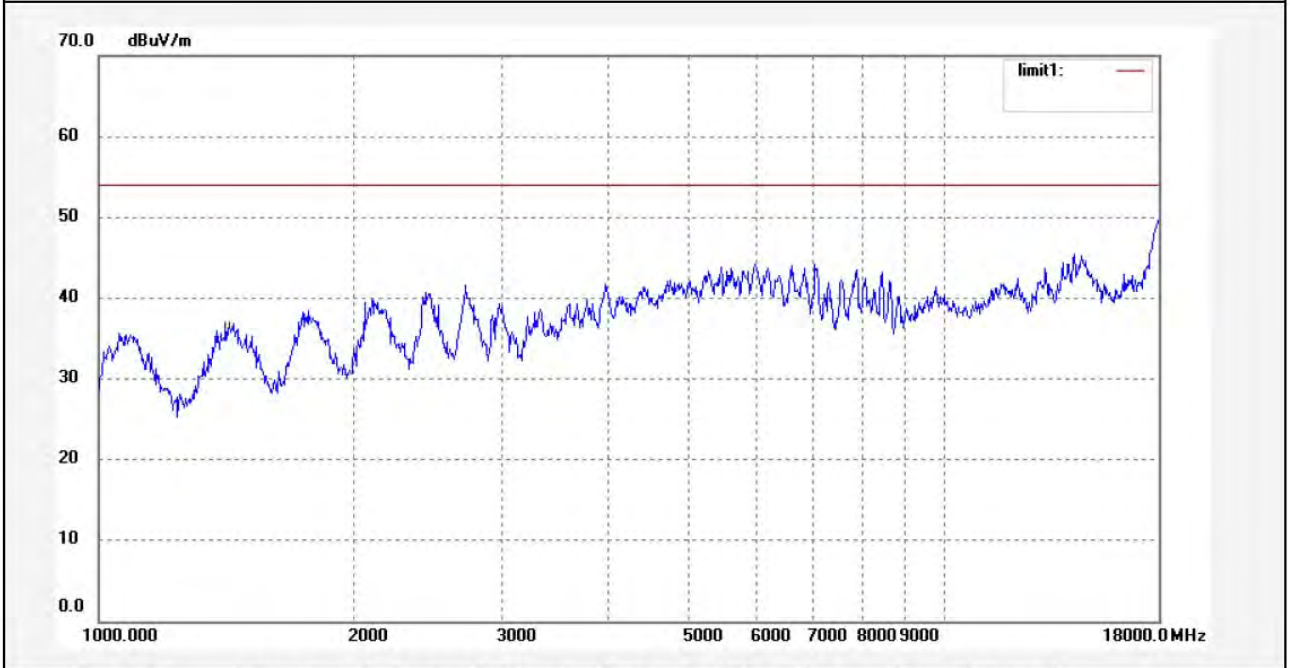

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2518	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/35/22
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

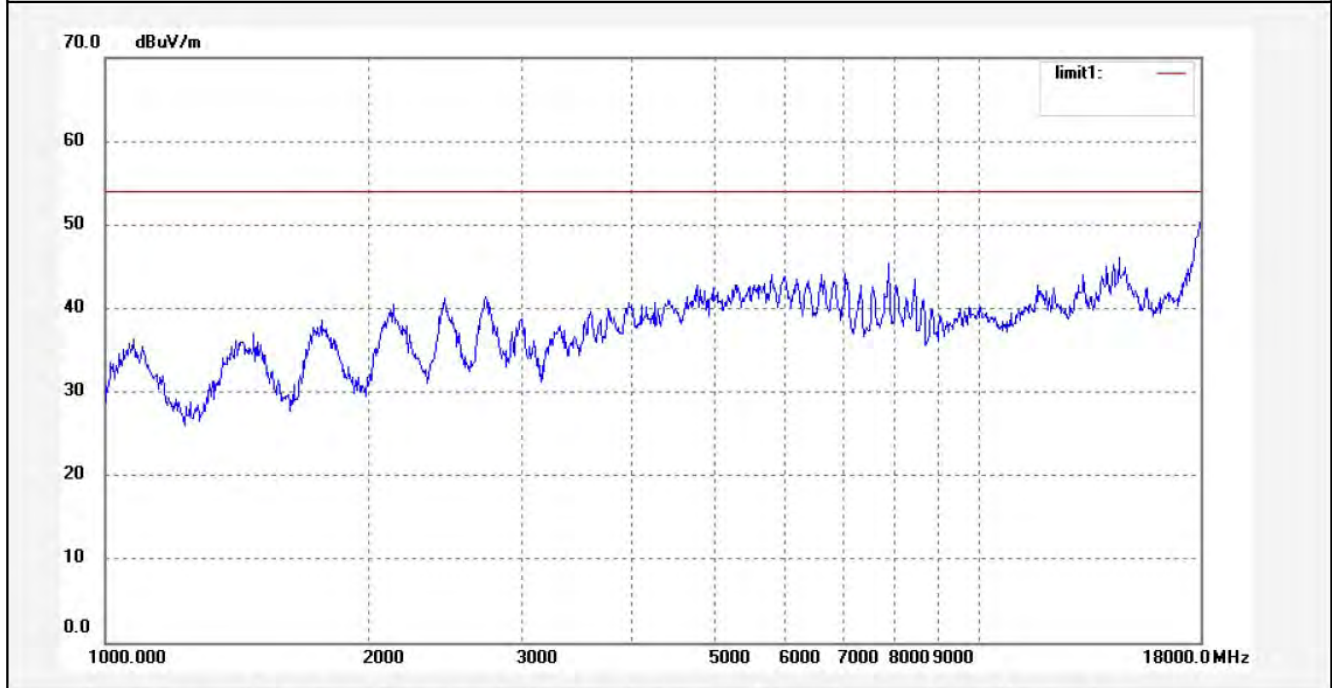

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #2541	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/09/07
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

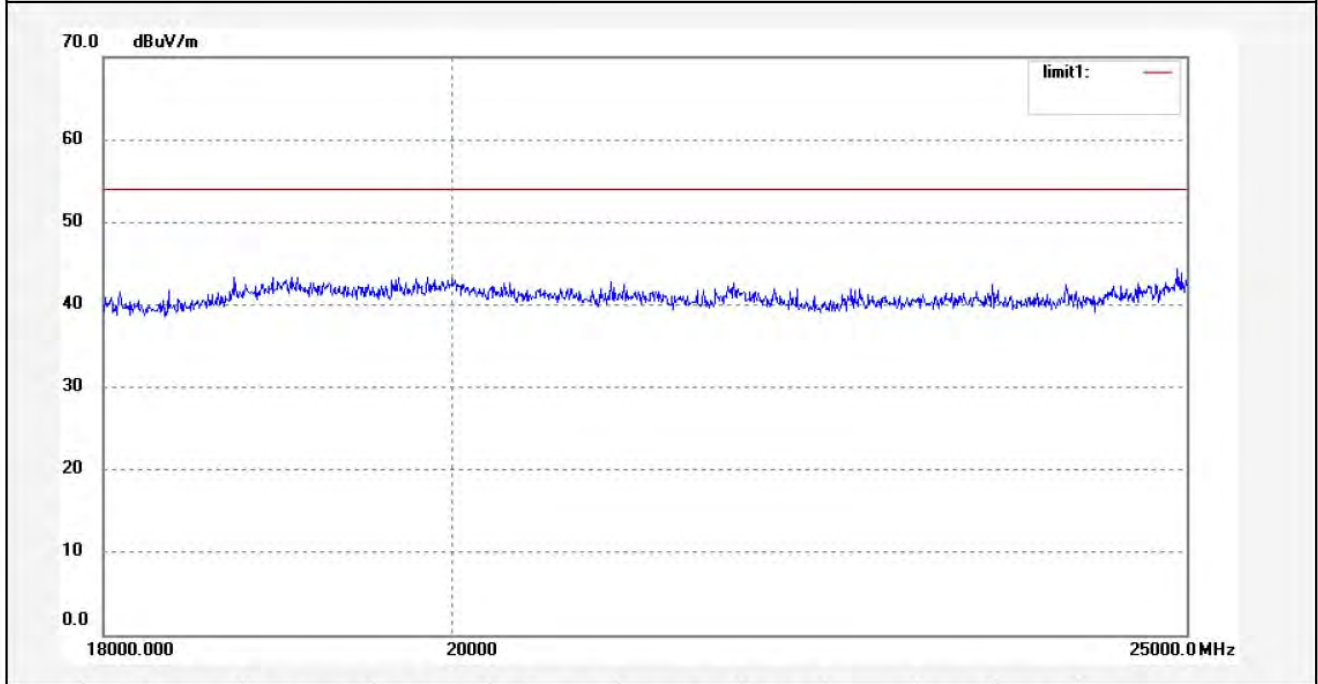

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2542	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/12/12
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

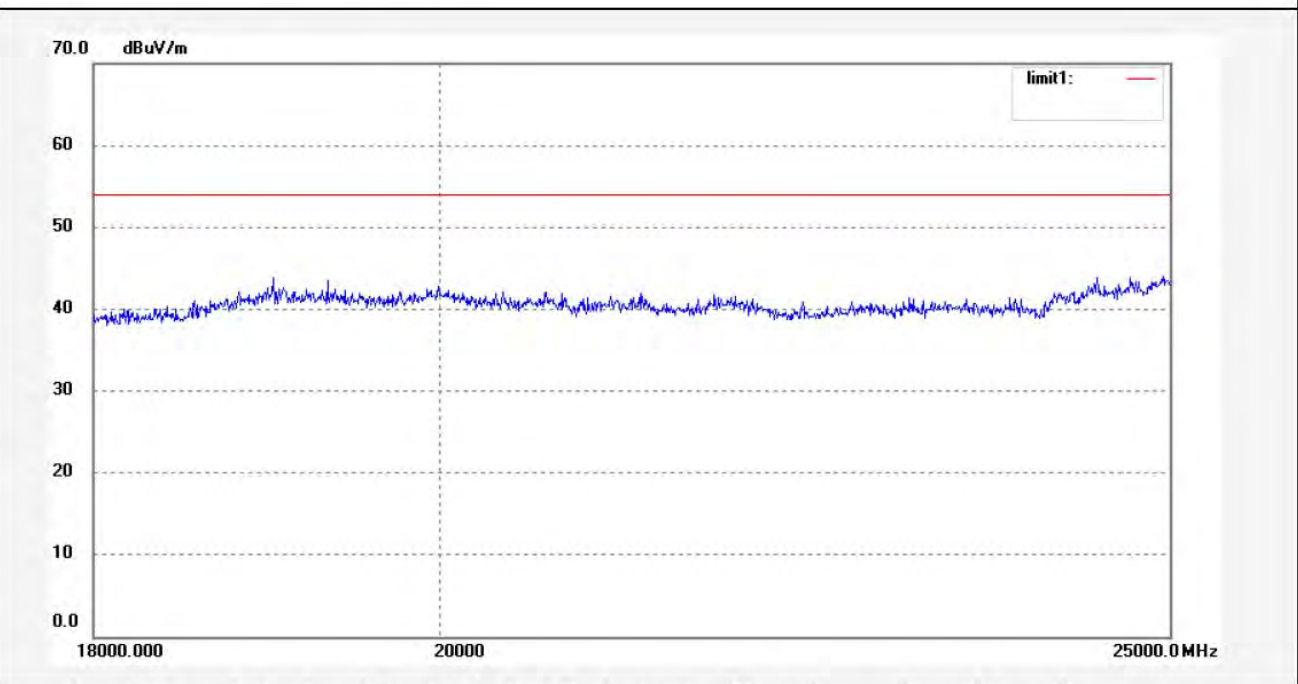

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #974	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:05:35
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

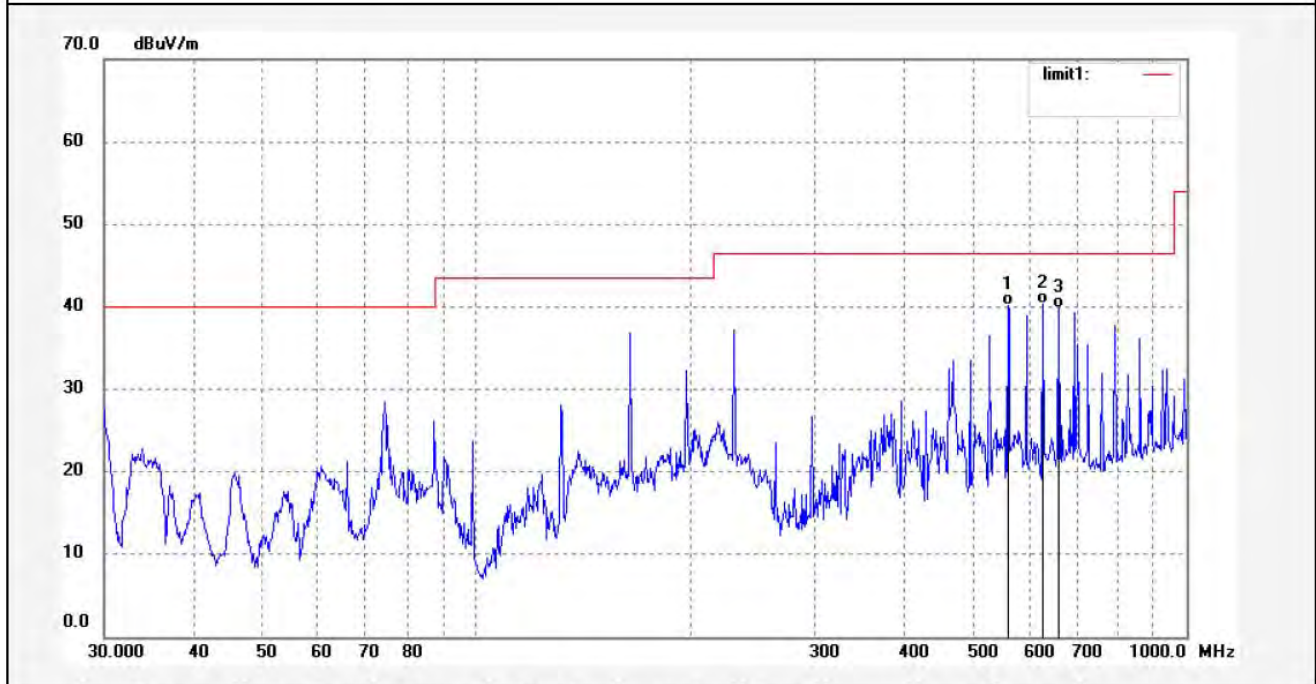

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	560.6928	52.79	-12.59	40.20	46.50	-6.30	QP			
2	627.2738	51.38	-11.10	40.28	46.50	-6.22	QP			
3	661.1504	50.32	-10.43	39.89	46.50	-6.61	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #975	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:09:29
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	63.97	-19.86	44.11	46.50	-2.39	QP			
2	694.4174	53.98	-9.90	44.08	46.50	-2.42	QP			
3	755.3872	53.24	-8.50	44.74	46.50	-1.76	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2519	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/38/11
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

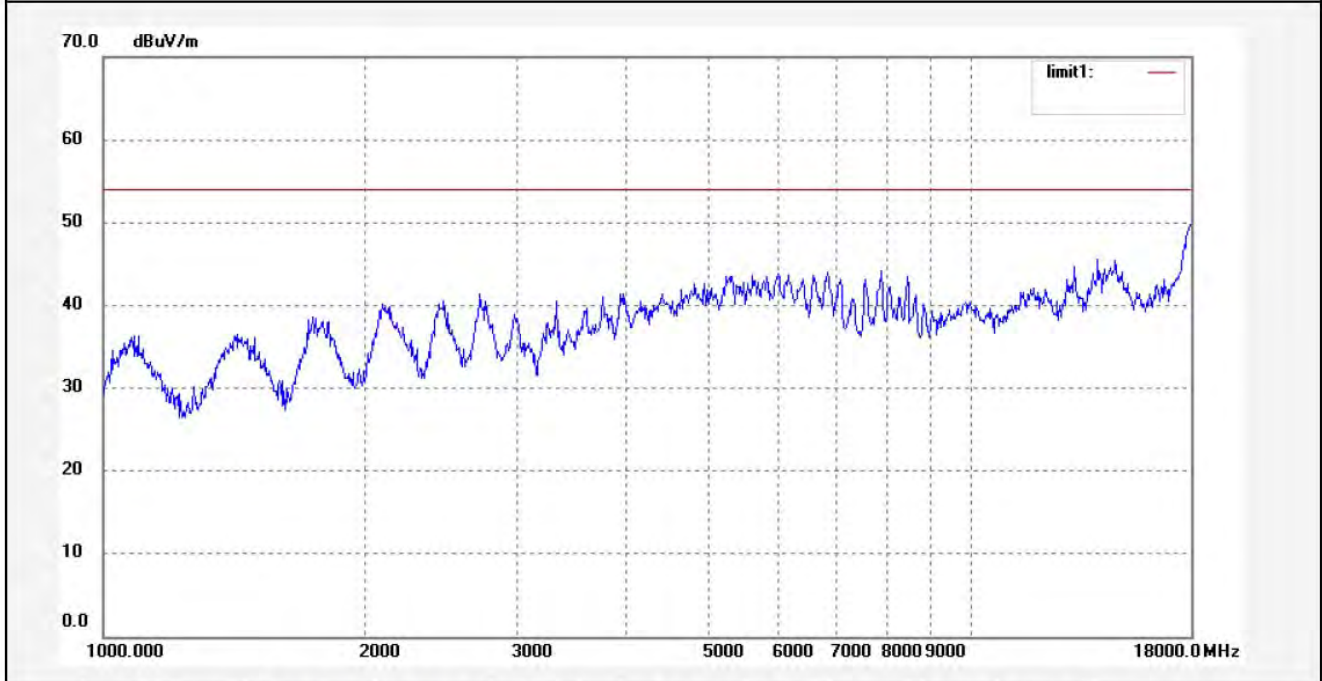

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2520	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/41/31
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

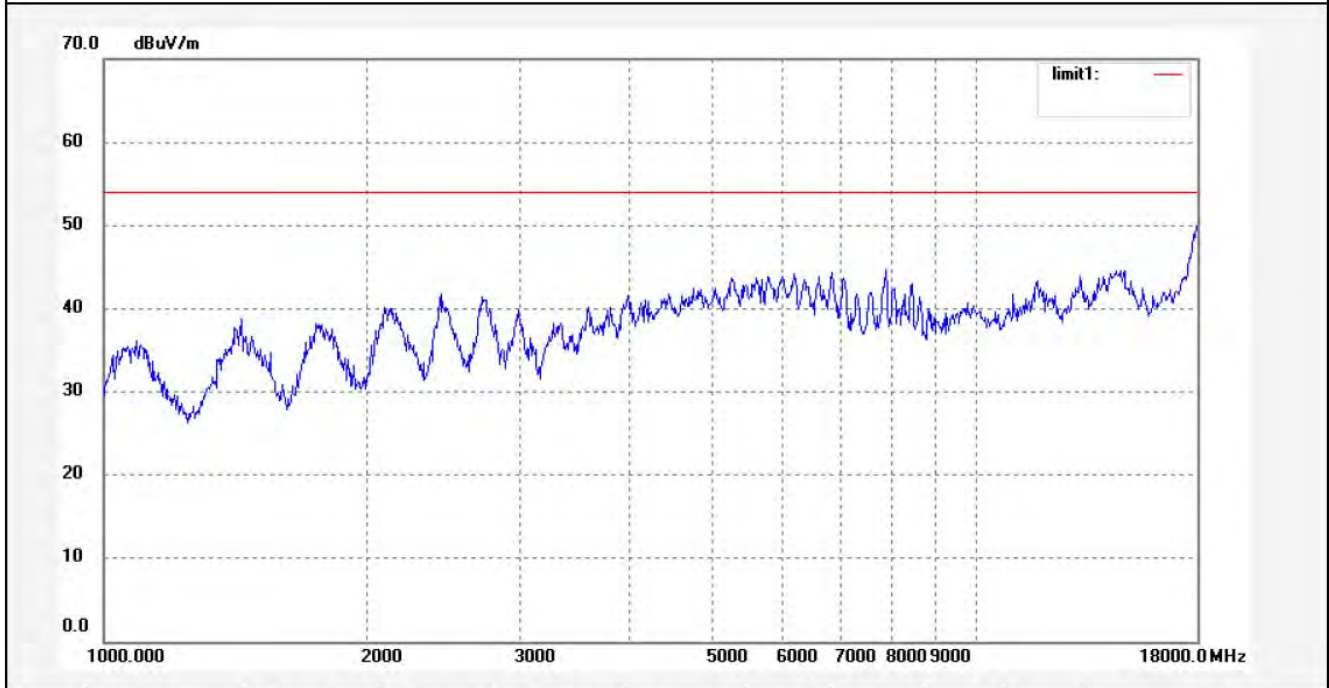

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2543	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/18/56
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

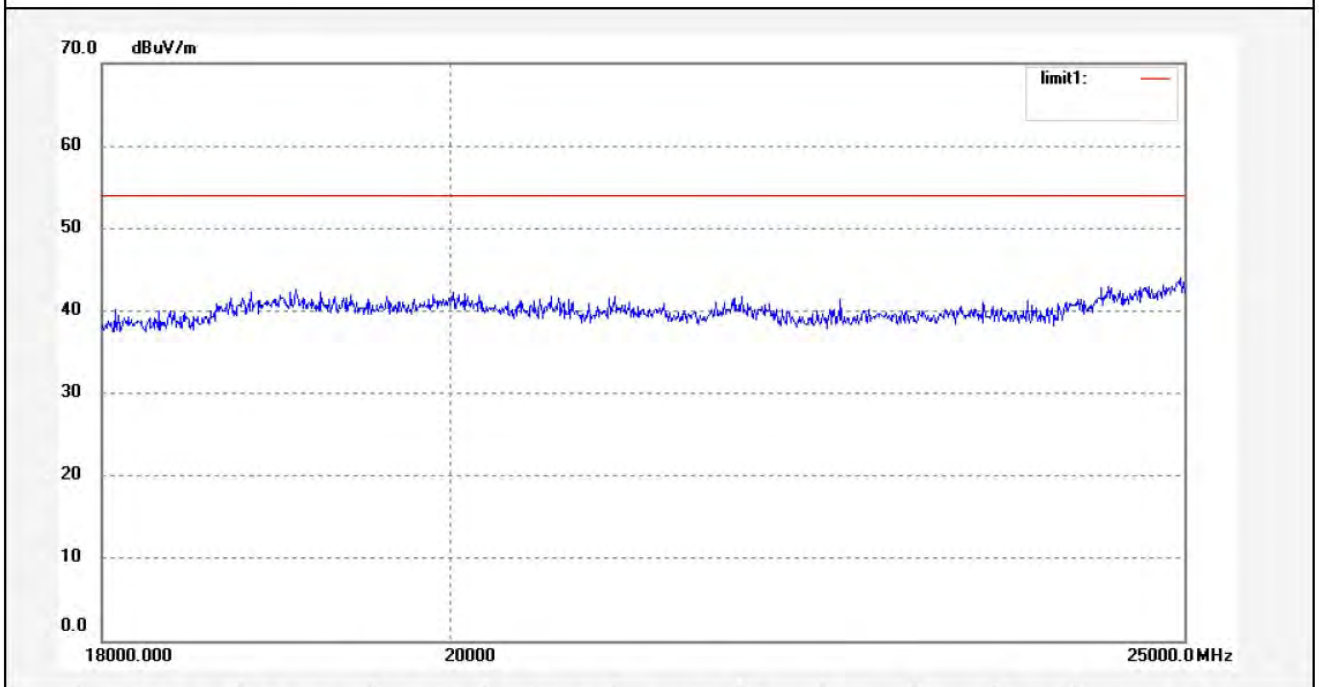

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2544	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/21/48
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

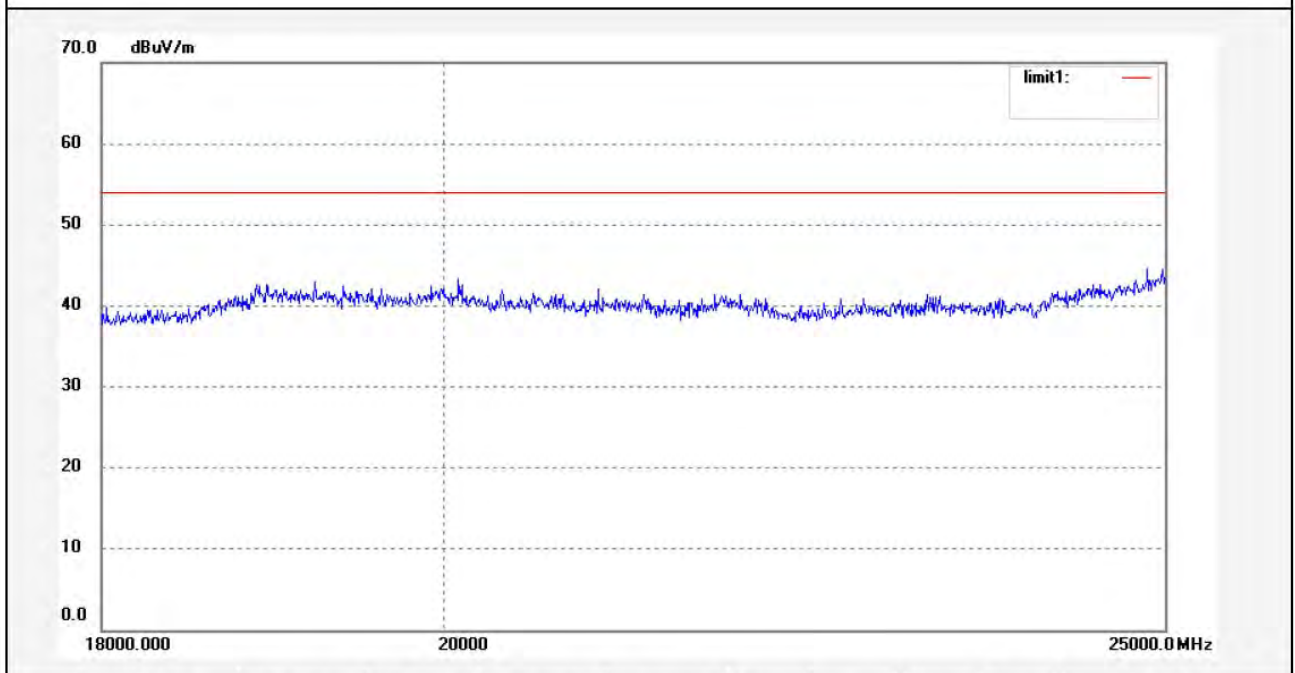

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #976	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:13:56
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.73	-19.86	44.87	46.50	-1.63	QP			
2	627.2738	54.04	-11.10	42.94	46.50	-3.56	QP			
3	694.4174	54.21	-9.90	44.31	46.50	-2.19	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A.Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #977
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: TX Channel 1(802.11n)20MHz
Model: PC748
Manufacturer: Natural Sound

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2013/06/04
Time: 15:17:59
Engineer Signature: STAR
Distance: 3m

Note: Report No.:ATE20131112

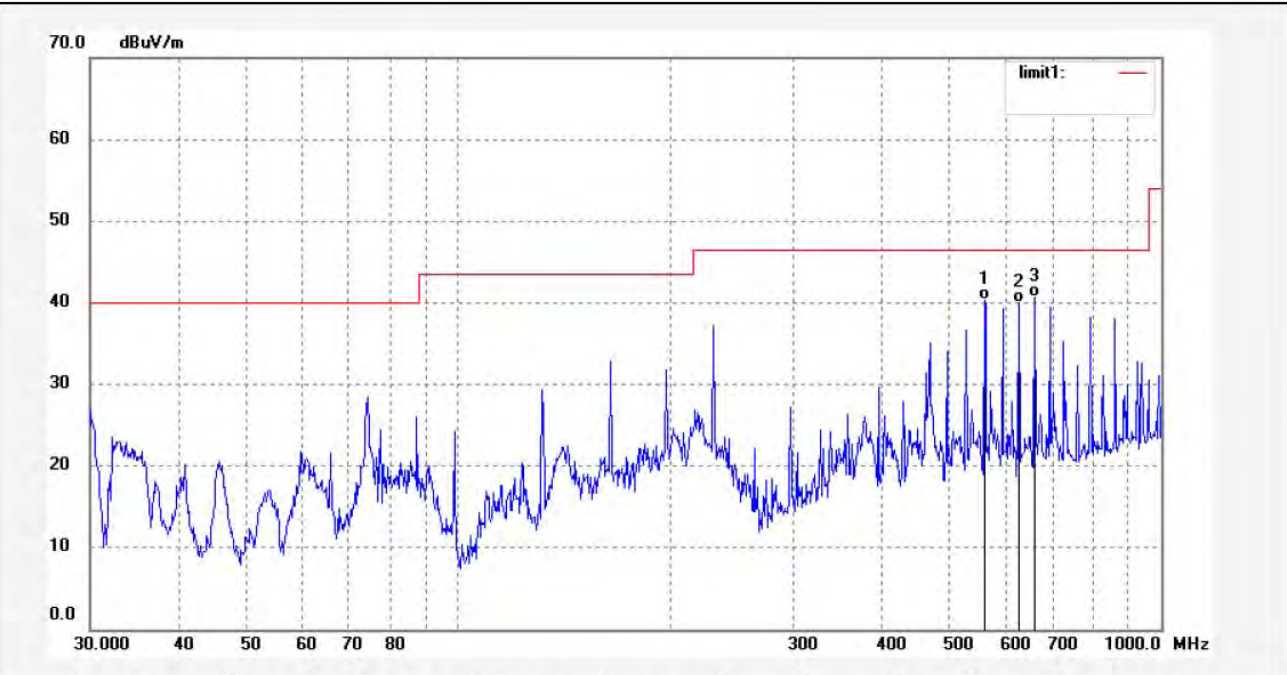

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	560.6928	52.97	-12.59	40.38	46.50	-6.12	QP			
2	627.2738	51.07	-11.10	39.97	46.50	-6.53	QP			
3	661.1504	51.07	-10.43	40.64	46.50	-5.86	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2521	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/45/24
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

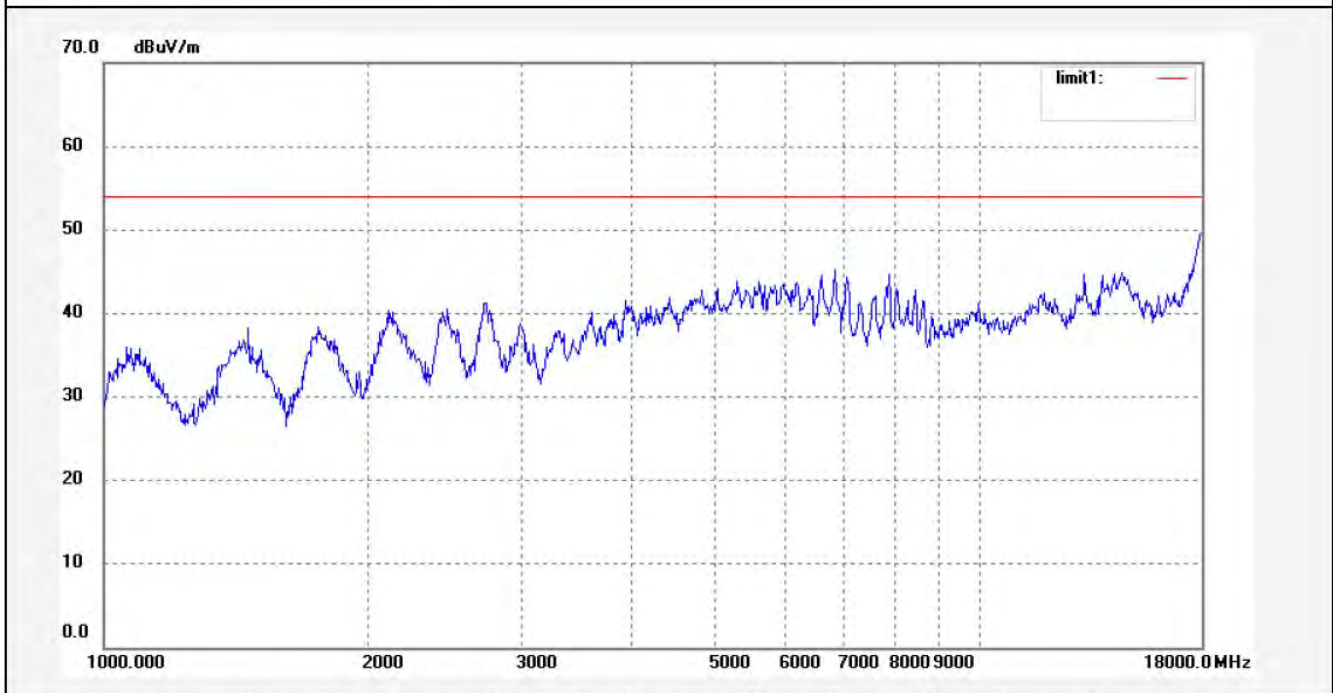

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2522	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/48/28
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

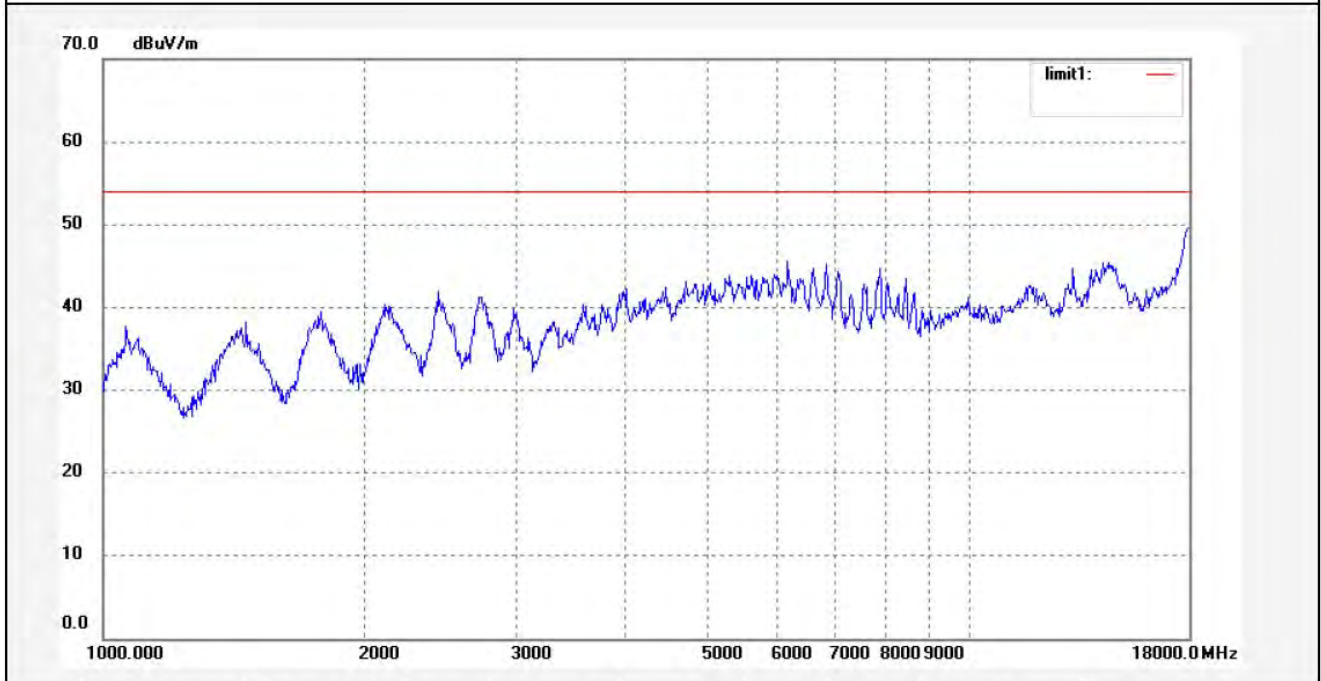

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2545	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/24/29
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

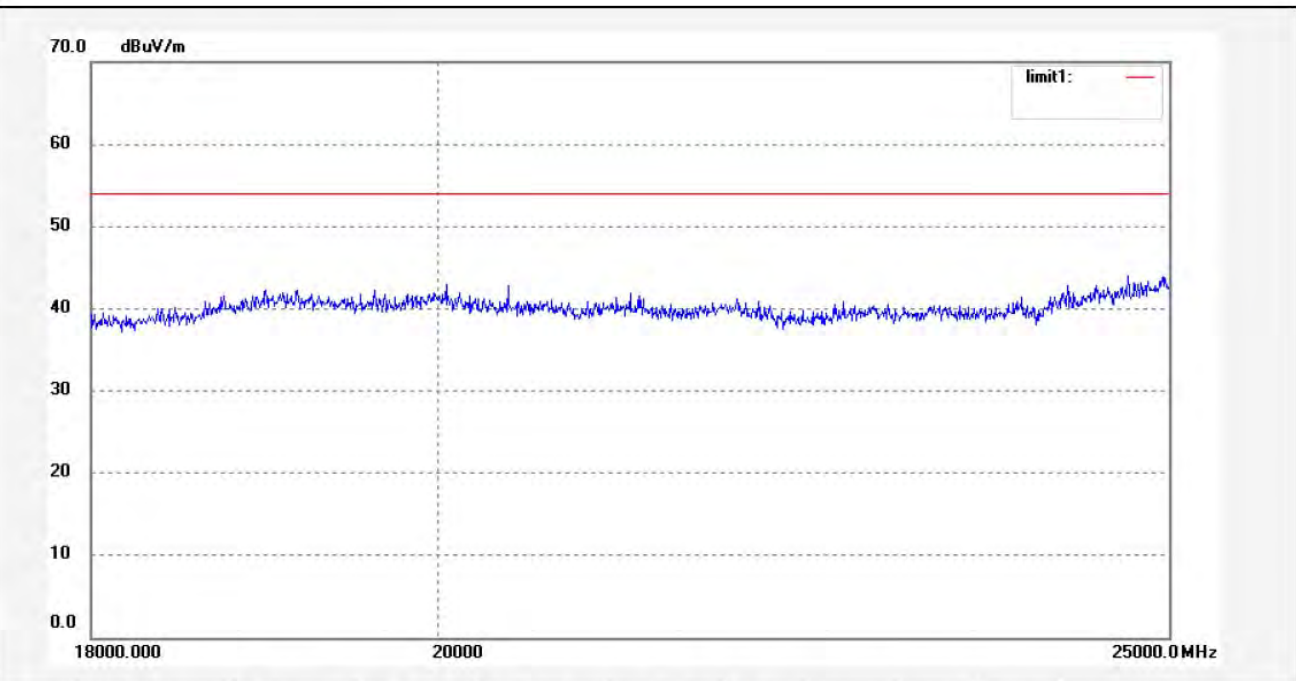

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2546	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/26/14
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

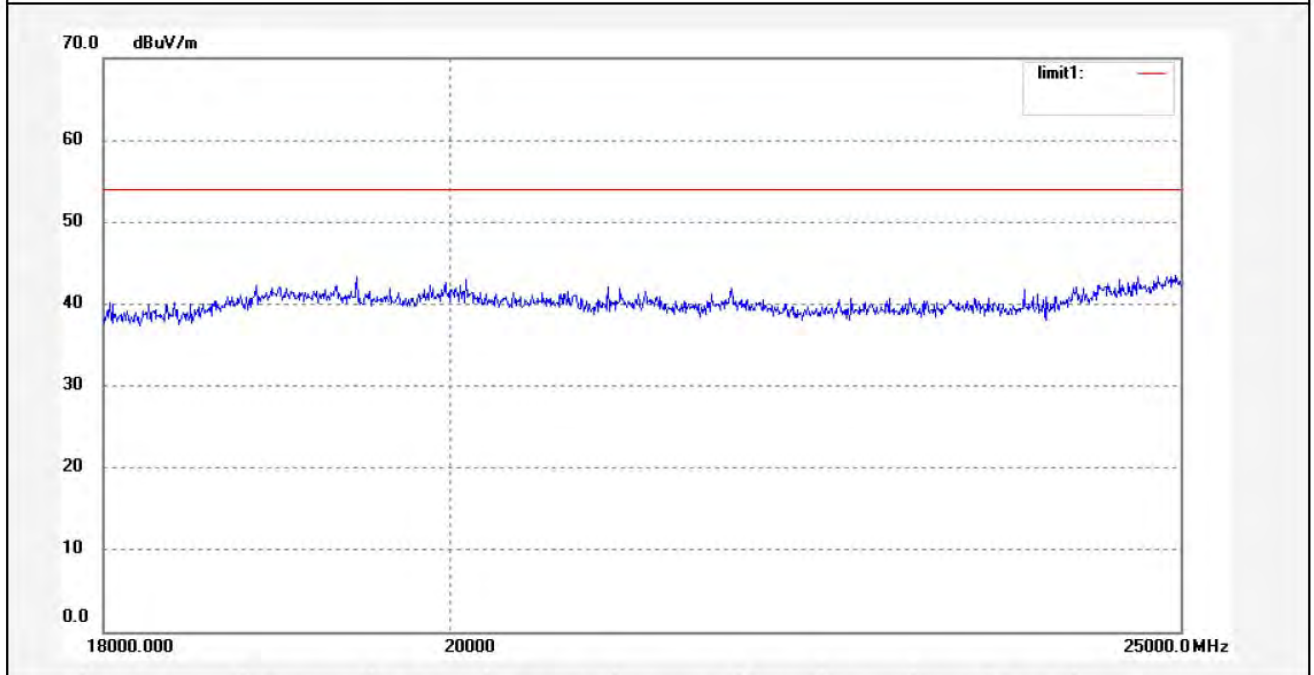

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #978	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:21:12
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 6(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

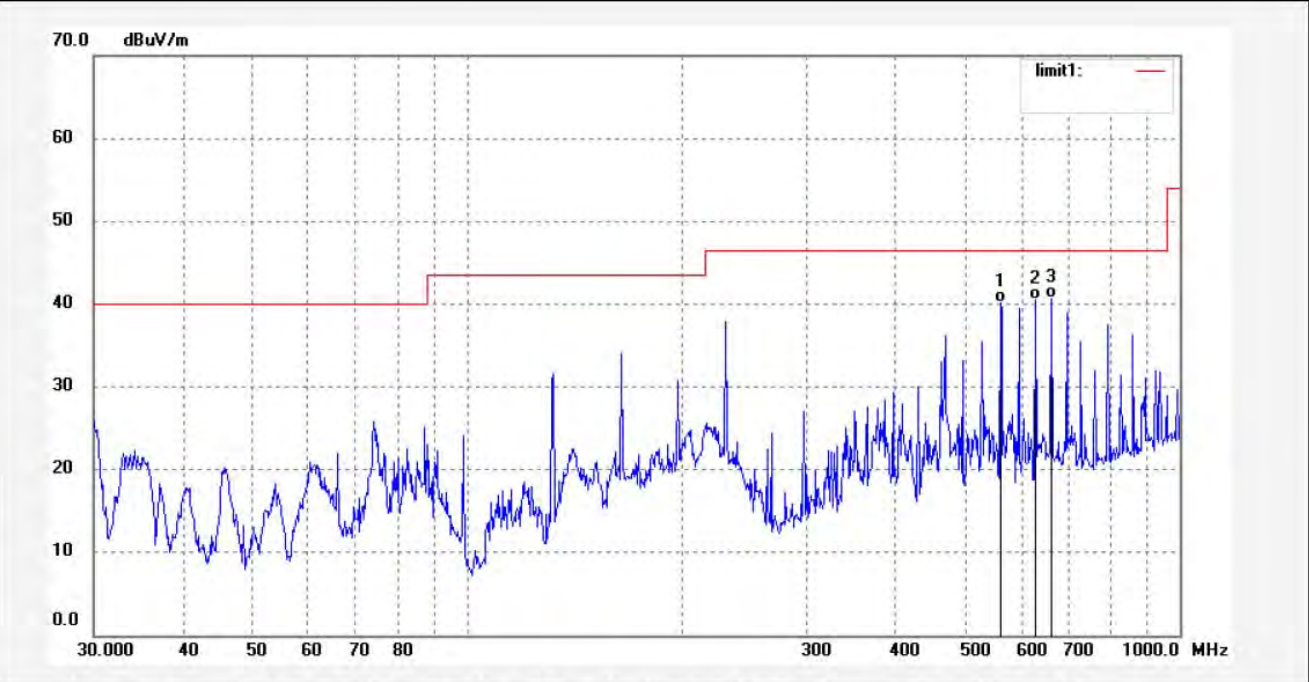

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	560.6928	52.74	-12.59	40.15	46.50	-6.35	QP			
2	627.2738	51.63	-11.10	40.53	46.50	-5.97	QP			
3	661.1504	51.12	-10.43	40.69	46.50	-5.81	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #979 Standard: FCC Class B 3M Radiated Test item: Radiation Test Temp.(C)/Hum.(%) 26 C / 55 % EUT: MID Mode: TX Channel 6(802.11n)20MHz Model: PC748 Manufacturer: Natural Sound	Polarization: Horizontal Power Source: AC 120V/60Hz Date: 2013/06/04 Time: 15:24:06 Engineer Signature: STAR Distance: 3m
--	--

Note: Report No.:ATE20131112

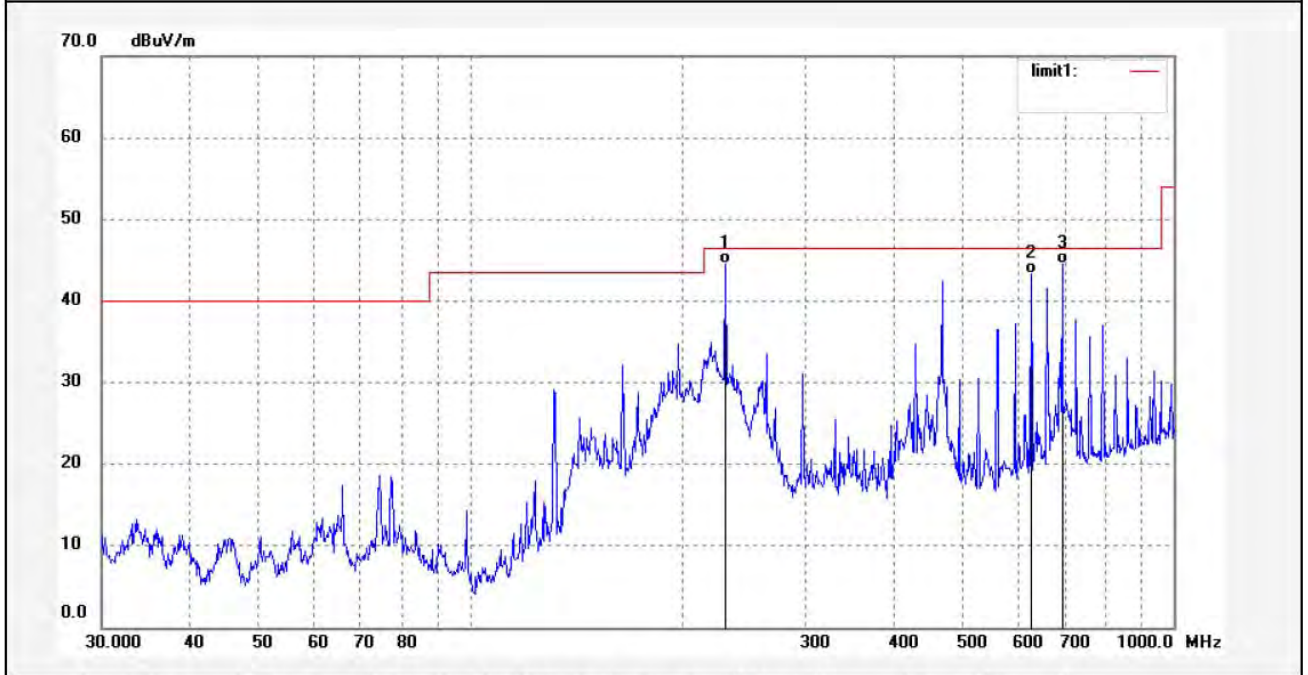

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.47	-19.86	44.61	46.50	-1.89	QP			
2	627.2738	54.45	-11.10	43.35	46.50	-3.15	QP			
3	694.4174	54.41	-9.90	44.51	46.50	-1.99	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2523	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/51/47
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

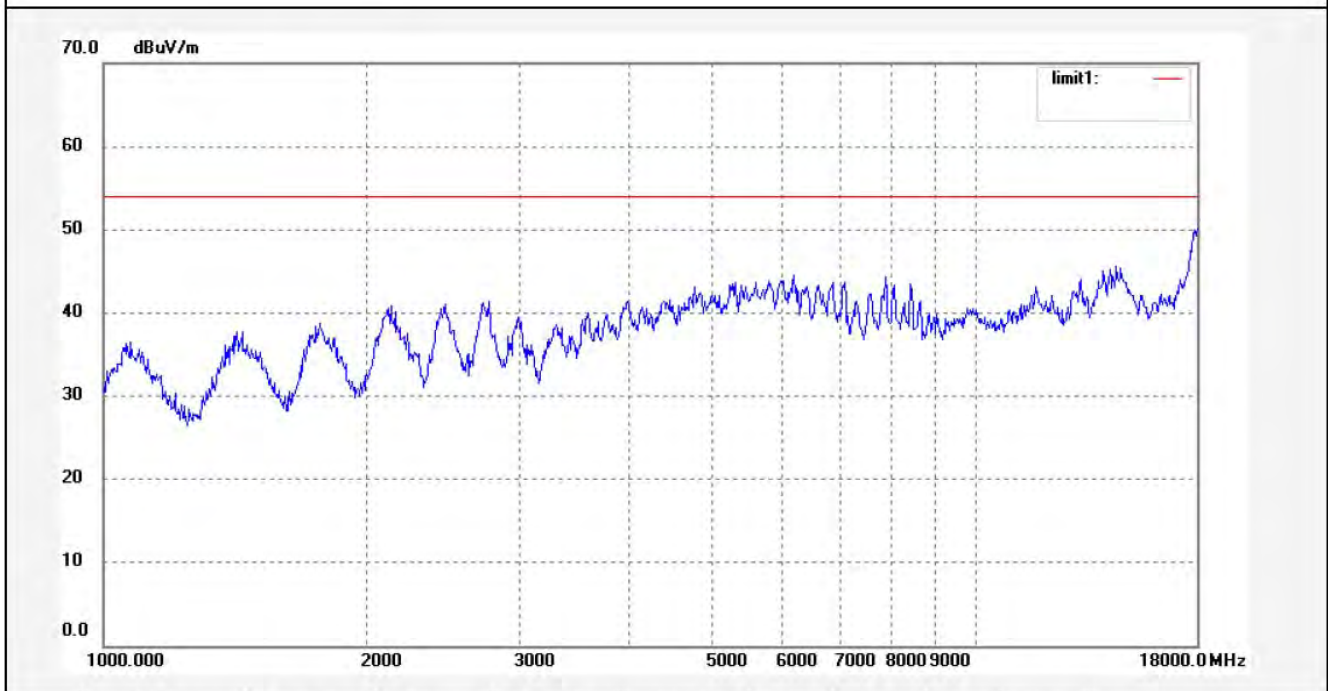

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2524	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 10/58/44
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

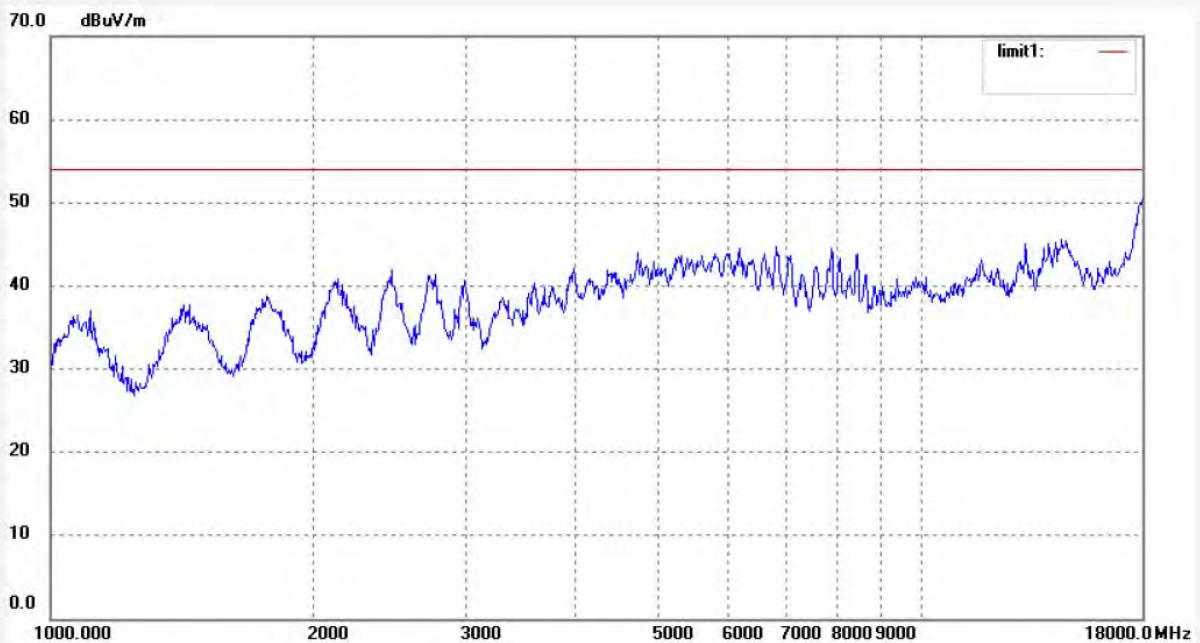

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2547	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/30/57
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

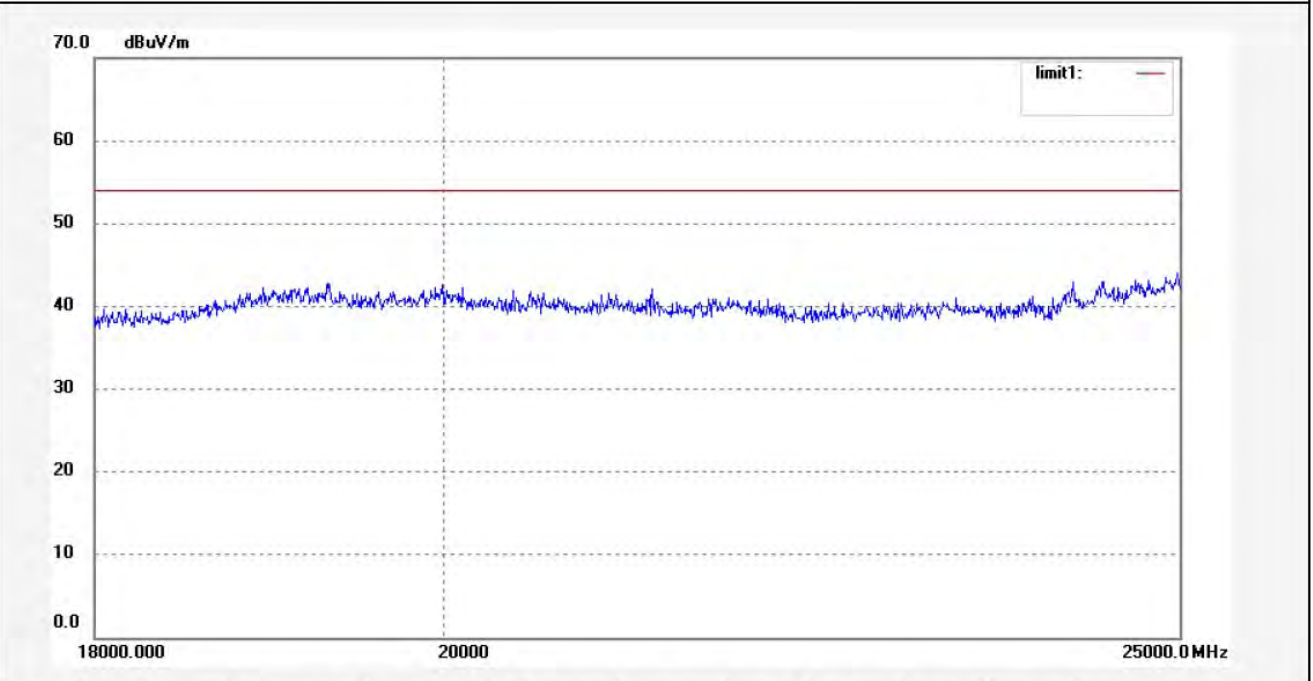

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2548	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/34/06
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

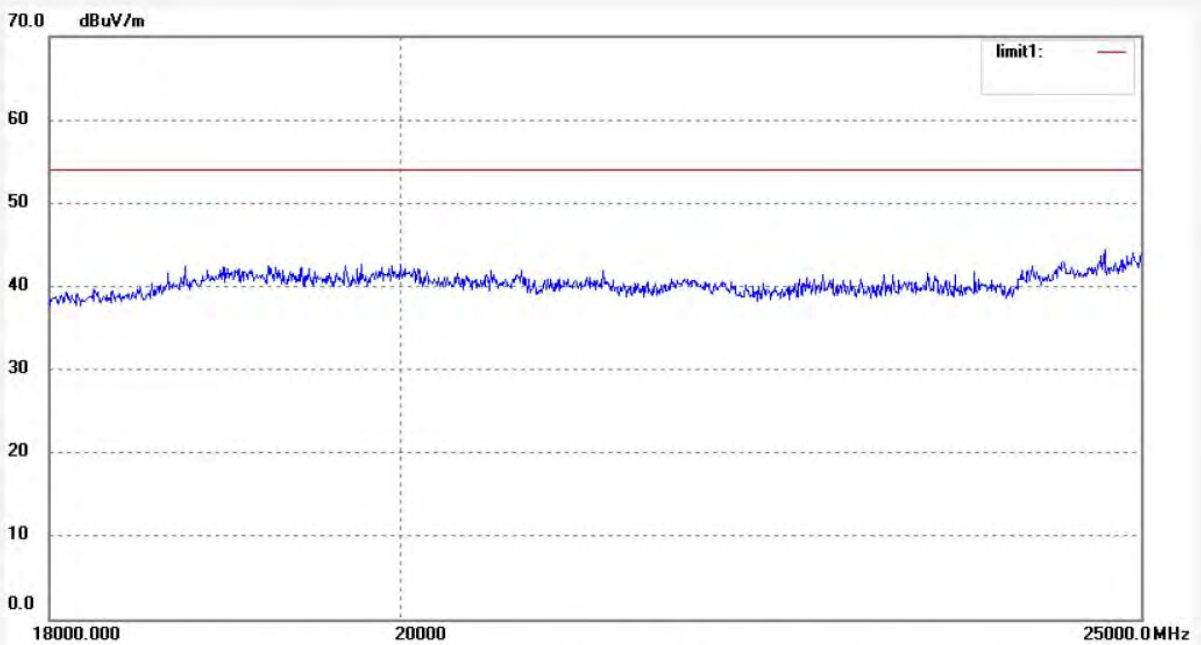

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #980	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:28:46
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.00	-19.86	44.14	46.50	-2.36	QP			
2	468.8762	58.02	-14.28	43.74	46.50	-2.76	QP			
3	694.4174	54.69	-9.90	44.79	46.50	-1.71	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #981	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:32:47
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

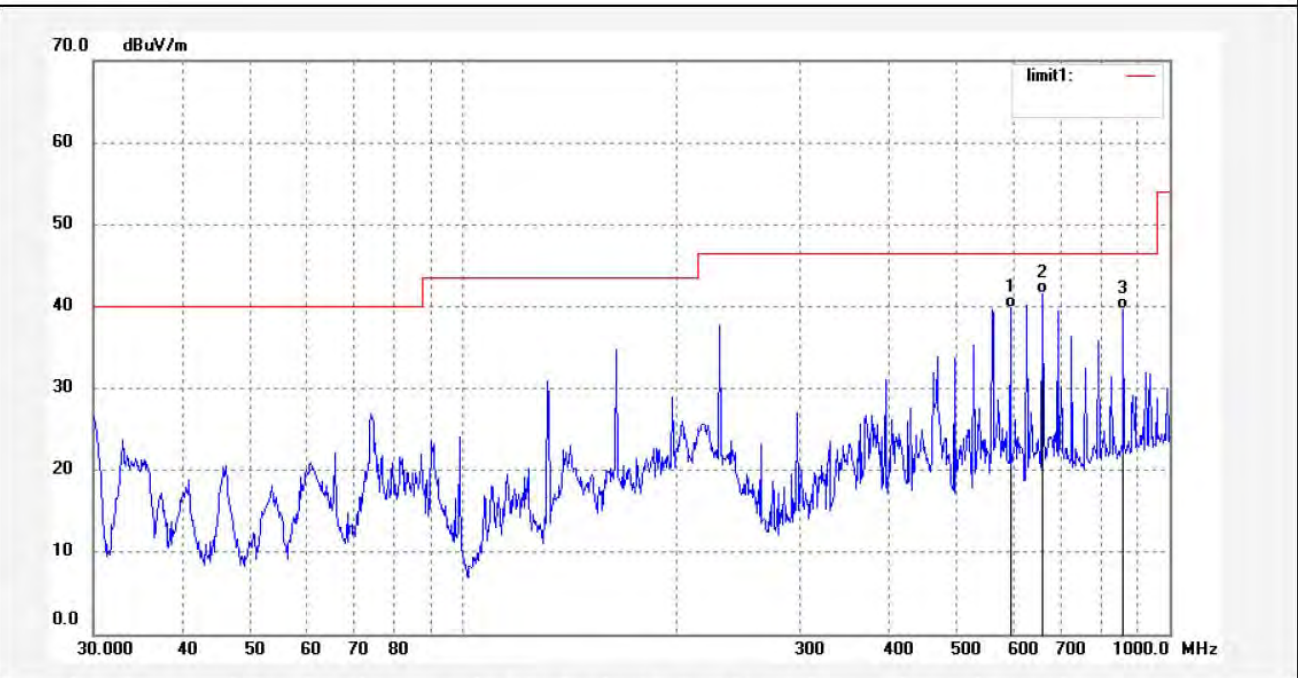

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	595.1329	51.62	-11.79	39.83	46.50	-6.67	QP			
2	661.1505	51.96	-10.43	41.53	46.50	-4.97	QP			
3	860.0352	46.38	-6.80	39.58	46.50	-6.92	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2525	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/02/35
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

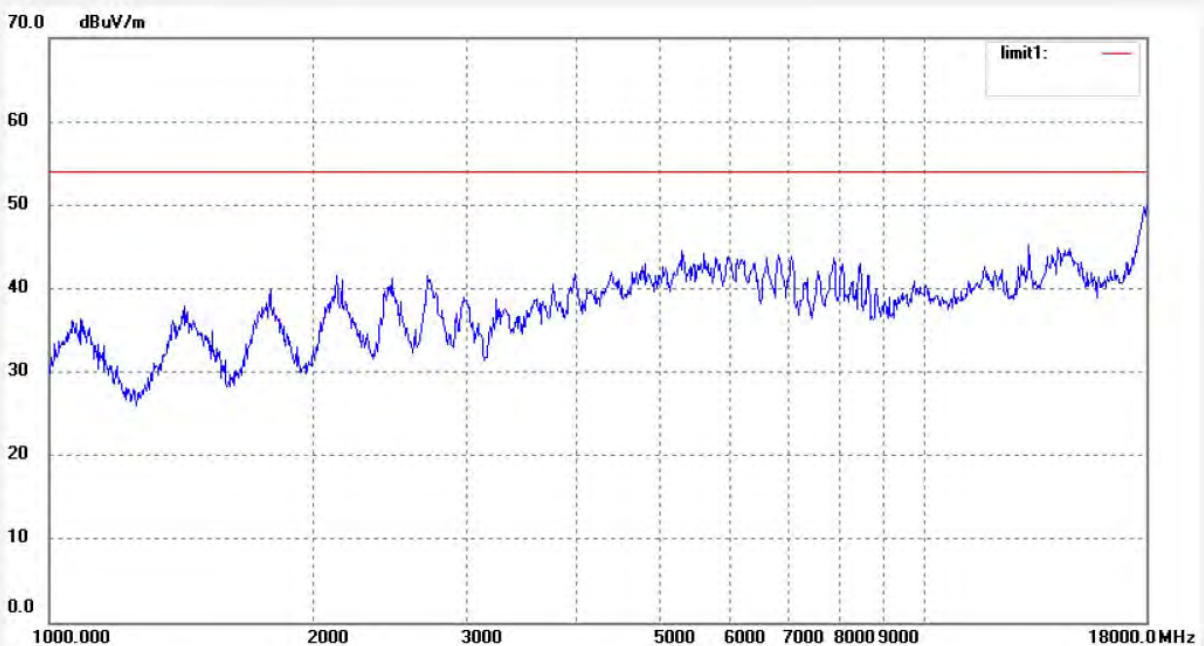

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2526
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: MID
Mode: TX Channel 11(802.11n)20MHz
Model: PC748
Manufacturer: Natural Sound

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/06/08/
Time: 11/08/05
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20131112

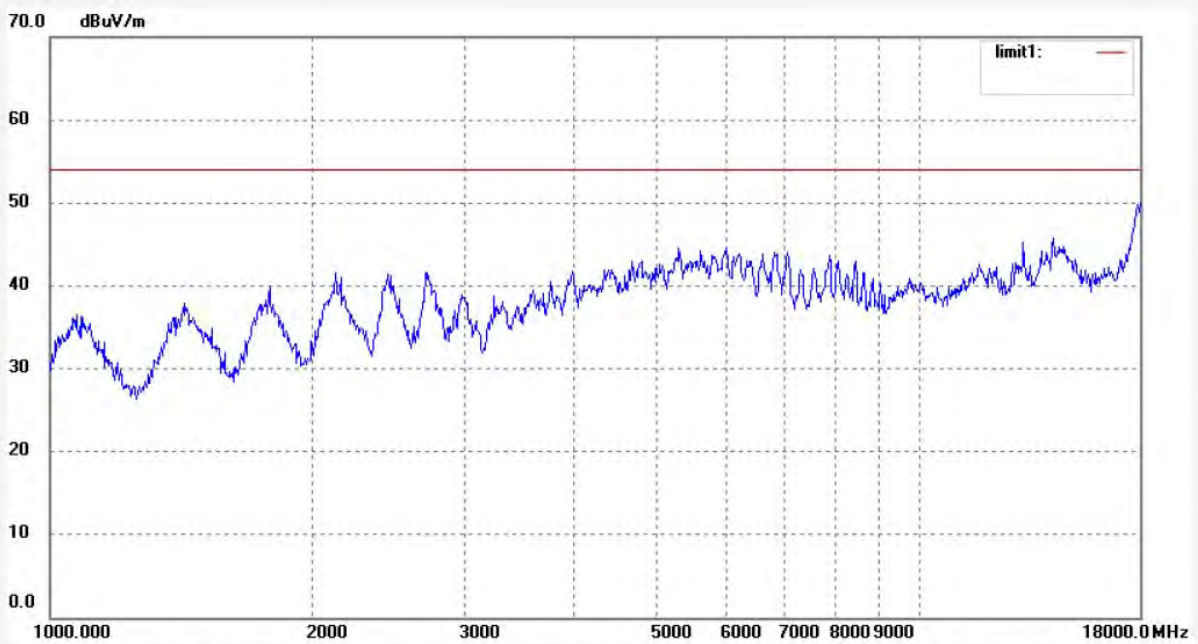

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2549	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/39/01
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

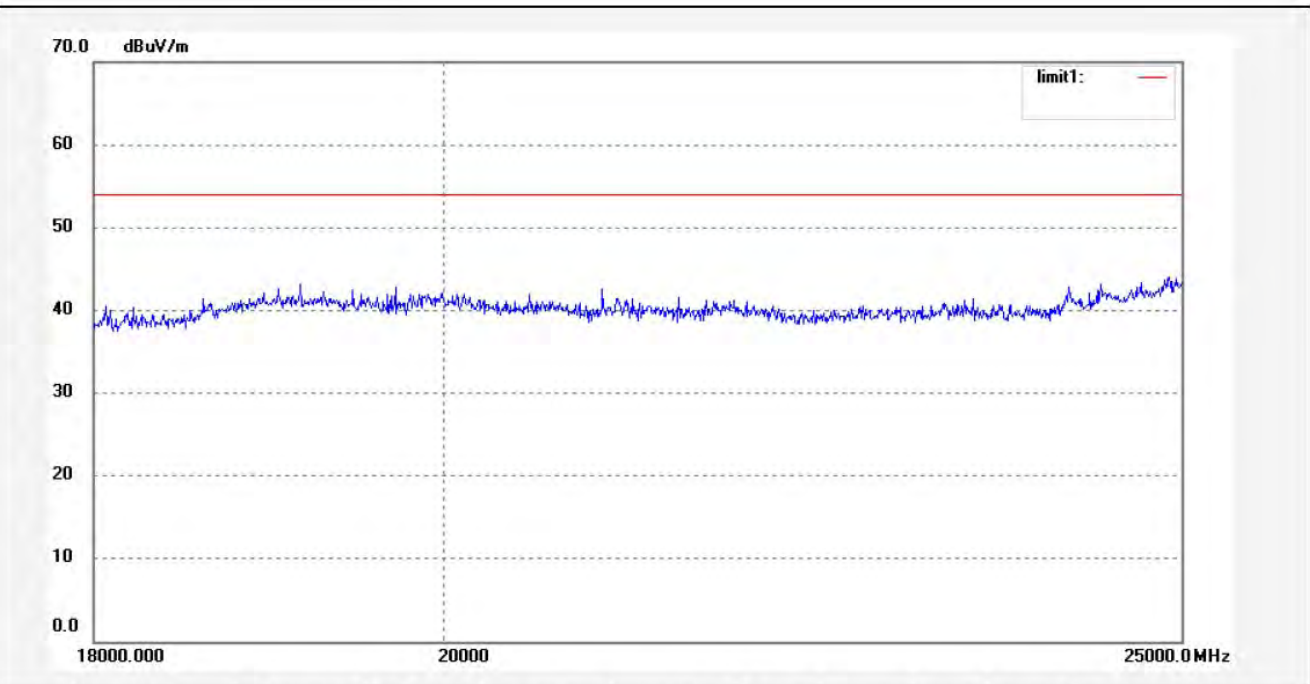

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2550	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/41/36
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11n)20MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

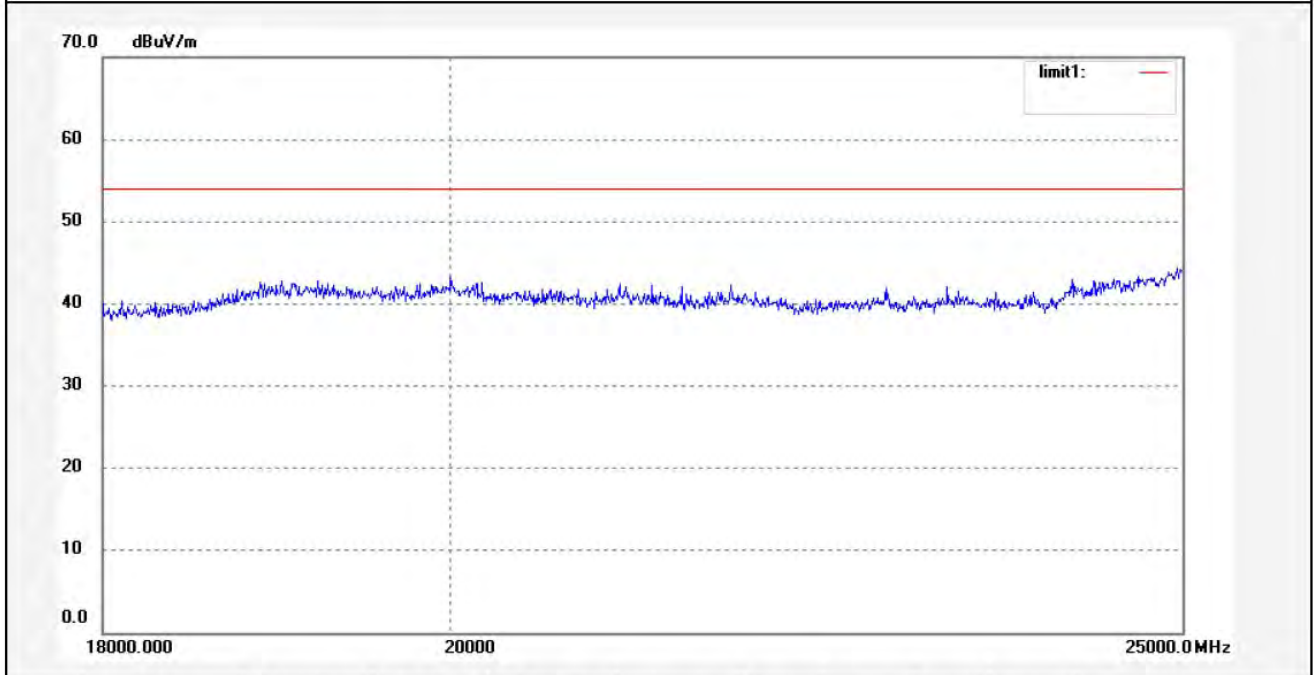

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #984	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:36:16
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.03	-19.86	44.17	46.50	-2.33	QP			
2	627.2738	54.58	-11.10	43.48	46.50	-3.02	QP			
3	694.4174	54.82	-9.90	44.92	46.50	-1.58	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #985	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:40:16
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

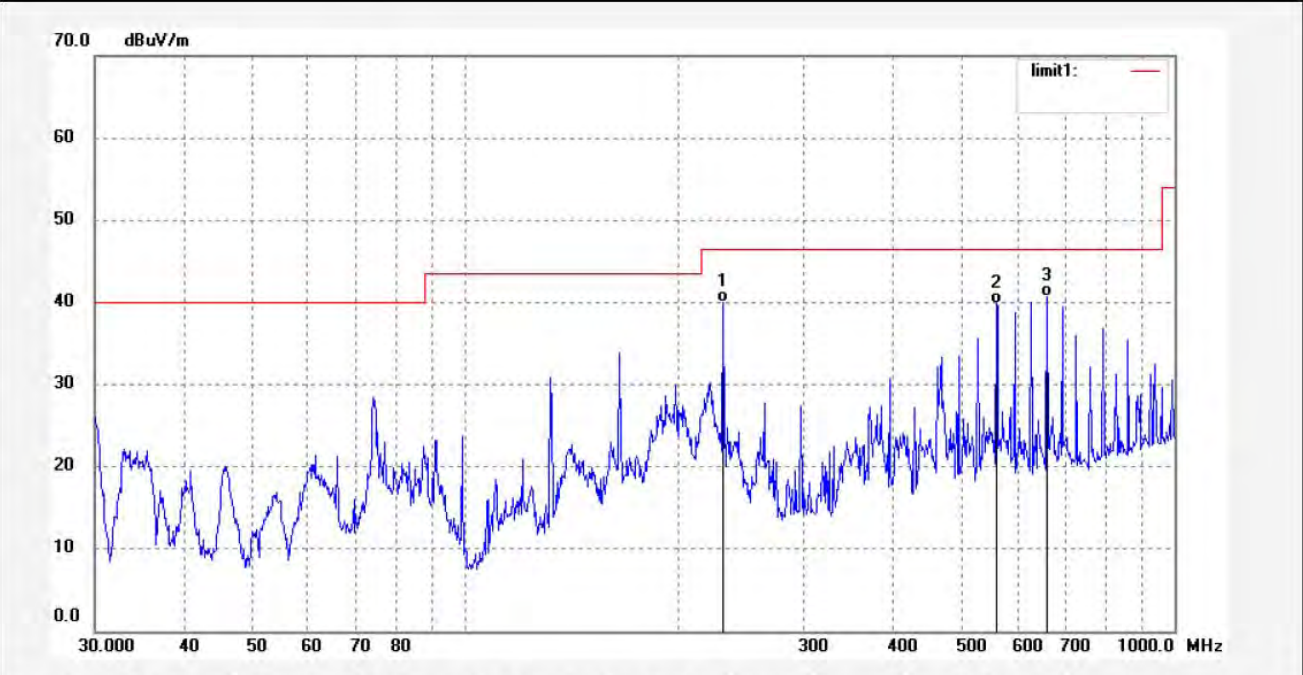

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	59.78	-19.86	39.92	46.50	-6.58	QP			
2	560.6928	52.32	-12.59	39.73	46.50	-6.77	QP			
3	661.1505	51.11	-10.43	40.68	46.50	-5.82	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2527	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/12/26
EUT: MID	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

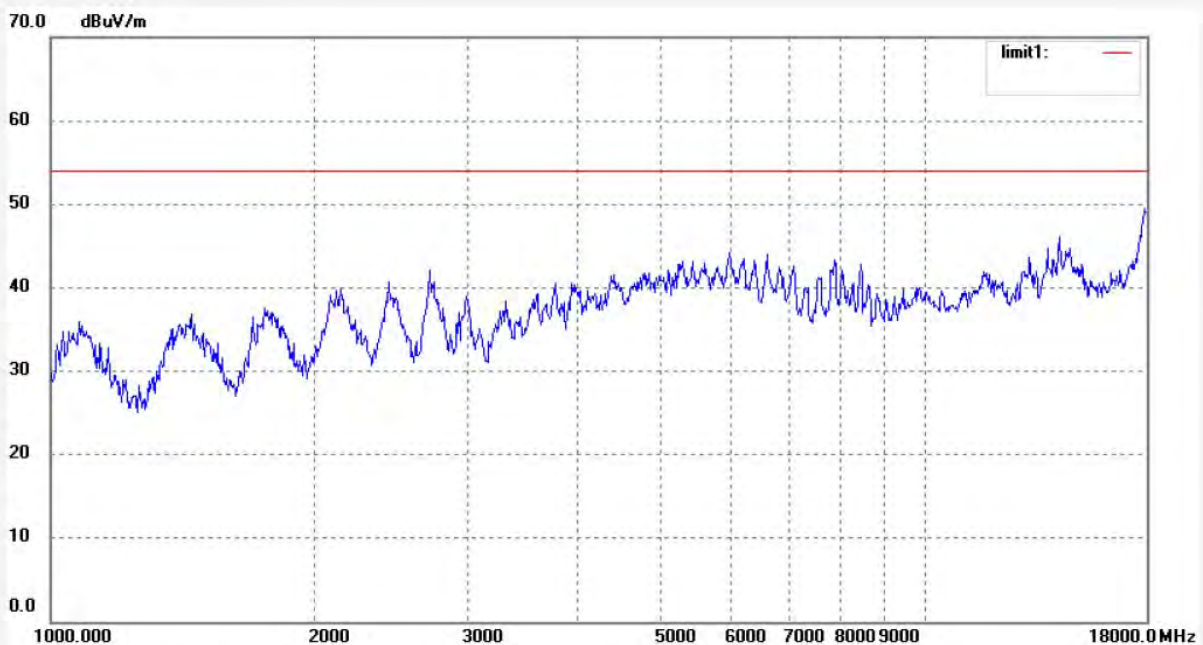

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2528	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/14/22
EUT: MID	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

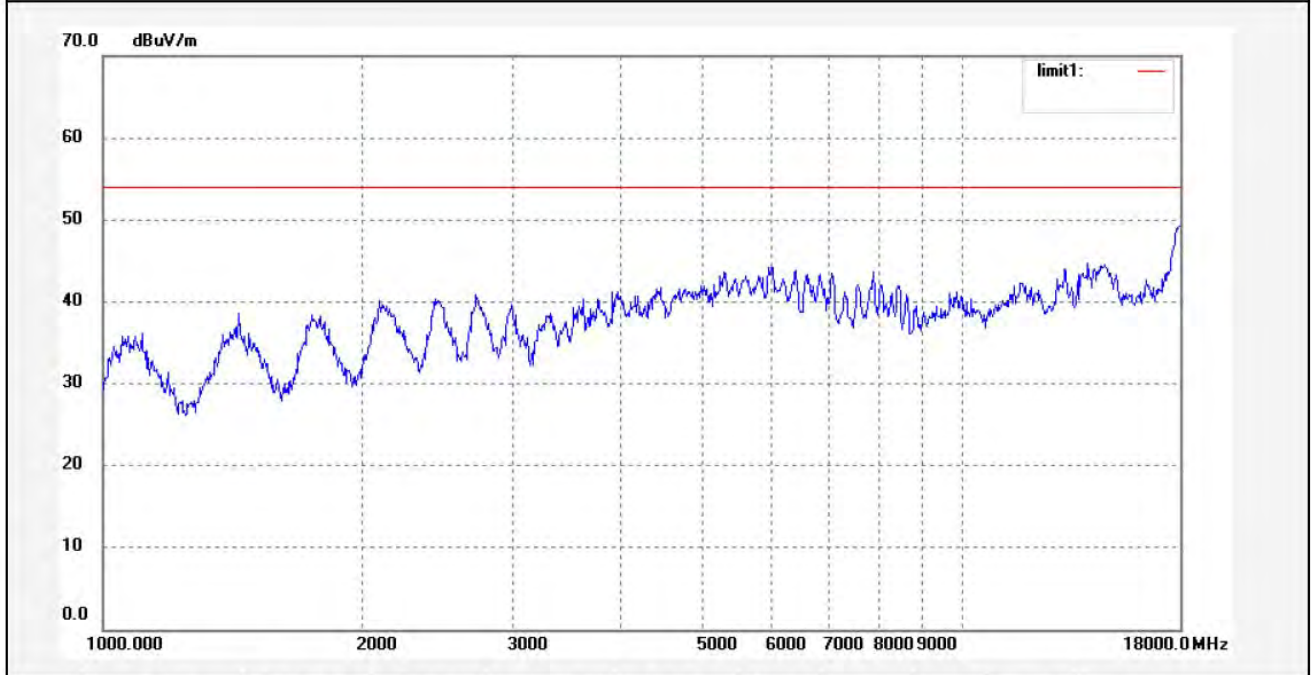

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2551	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/45/37
EUT: MID	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

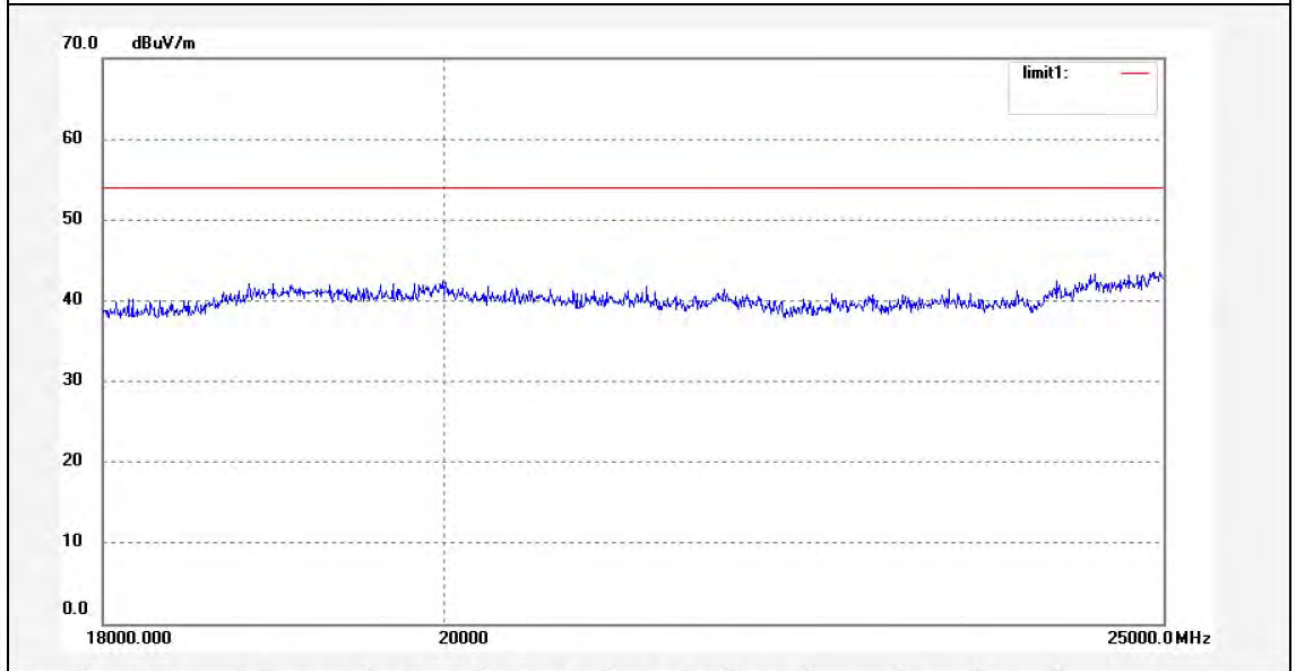

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2552	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/48/28
EUT: MID	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

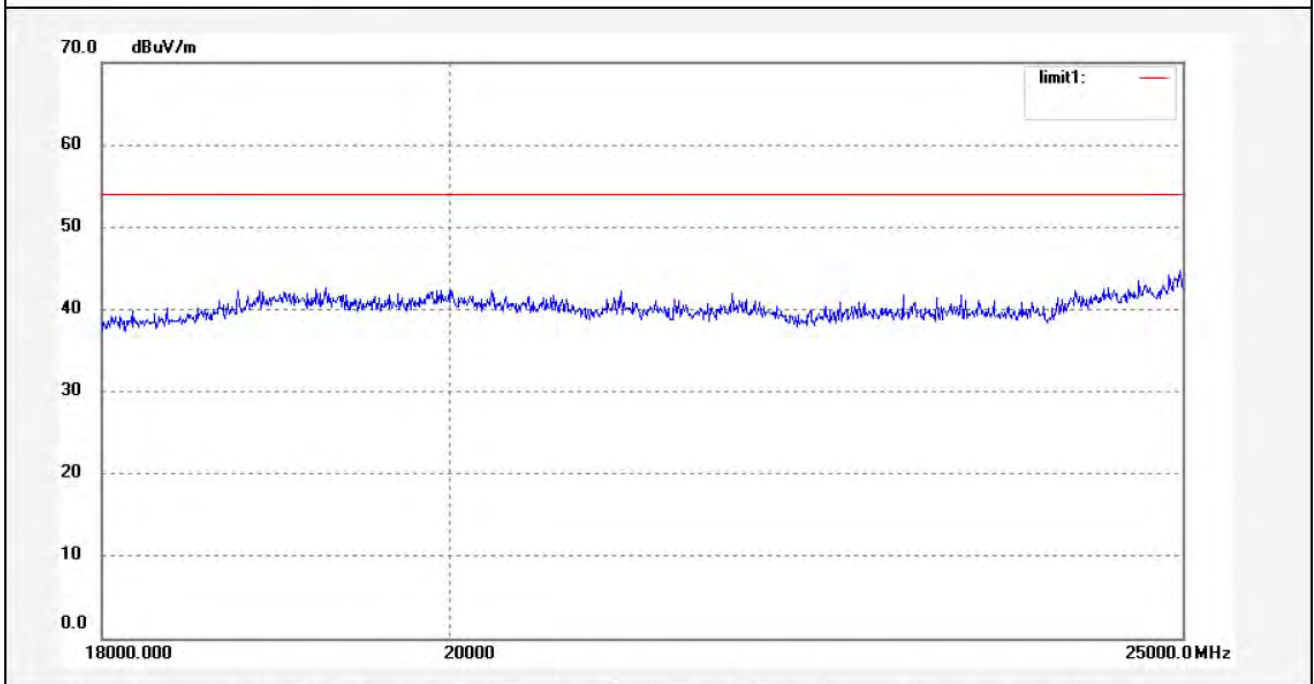

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #986	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:44:09
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

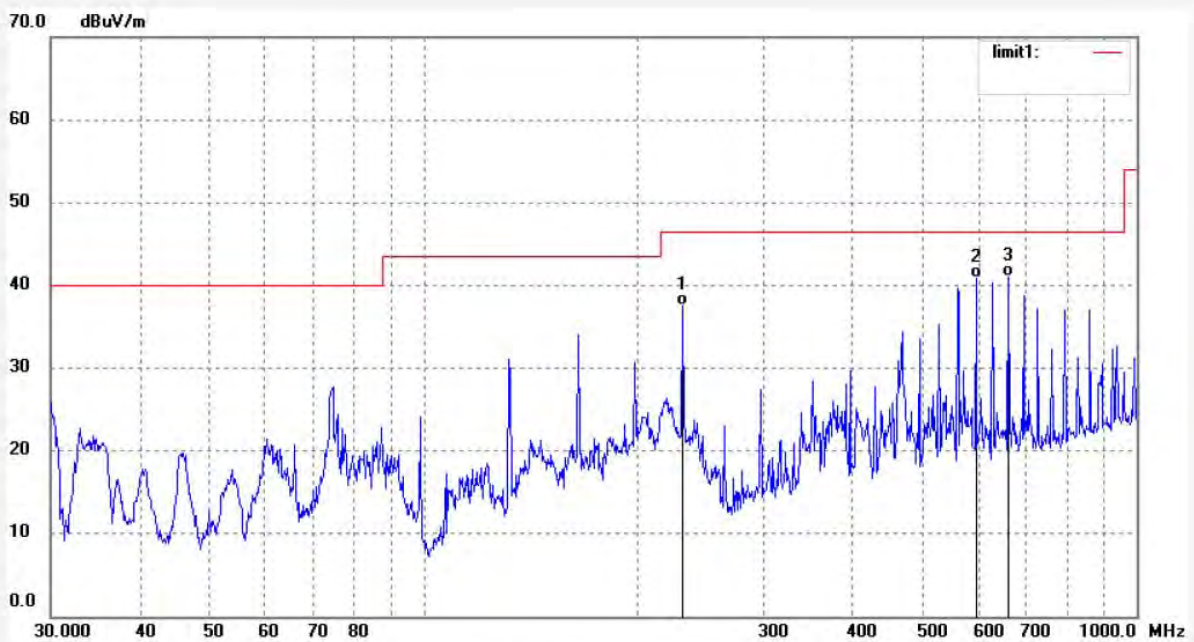

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	57.43	-19.86	37.57	46.50	-8.93	QP			
2	595.1329	52.59	-11.79	40.80	46.50	-5.70	QP			
3	661.1505	51.40	-10.43	40.97	46.50	-5.53	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #987	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:48:59
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

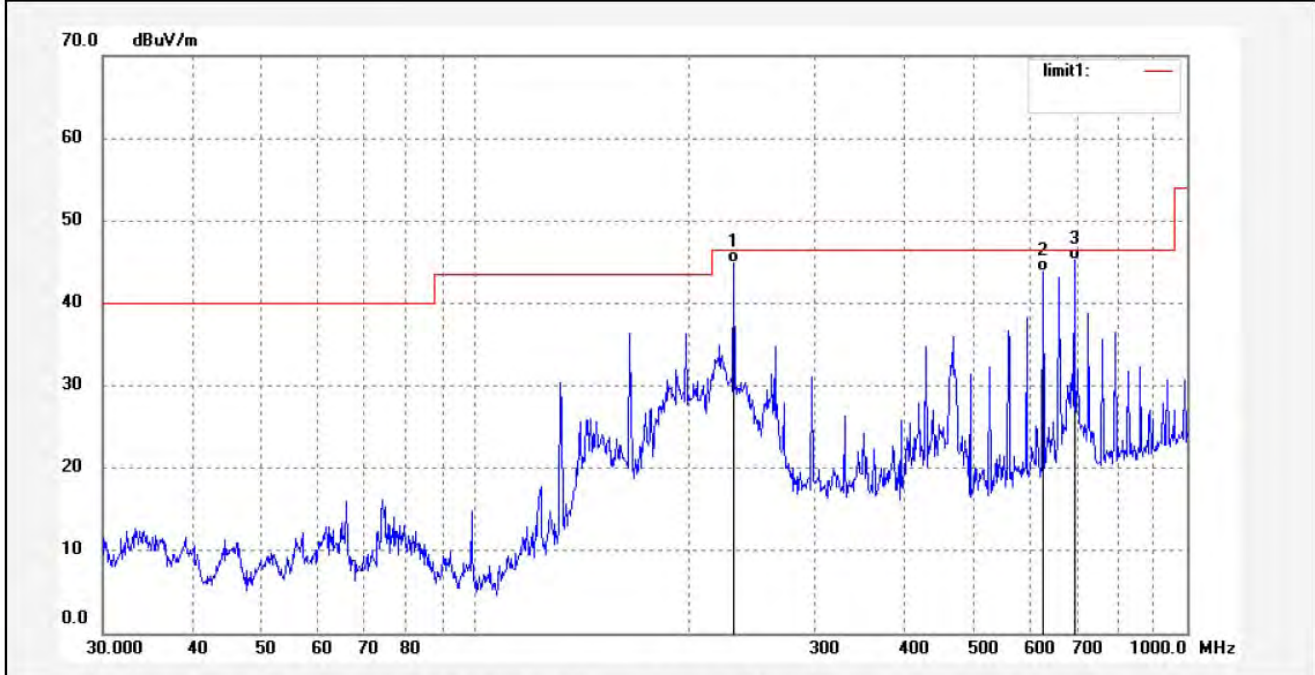

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.80	-19.86	44.94	46.50	-1.56	QP			
2	627.2738	54.87	-11.10	43.77	46.50	-2.73	QP			
3	694.4174	55.19	-9.90	45.29	46.50	-1.21	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2529	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/17/10
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

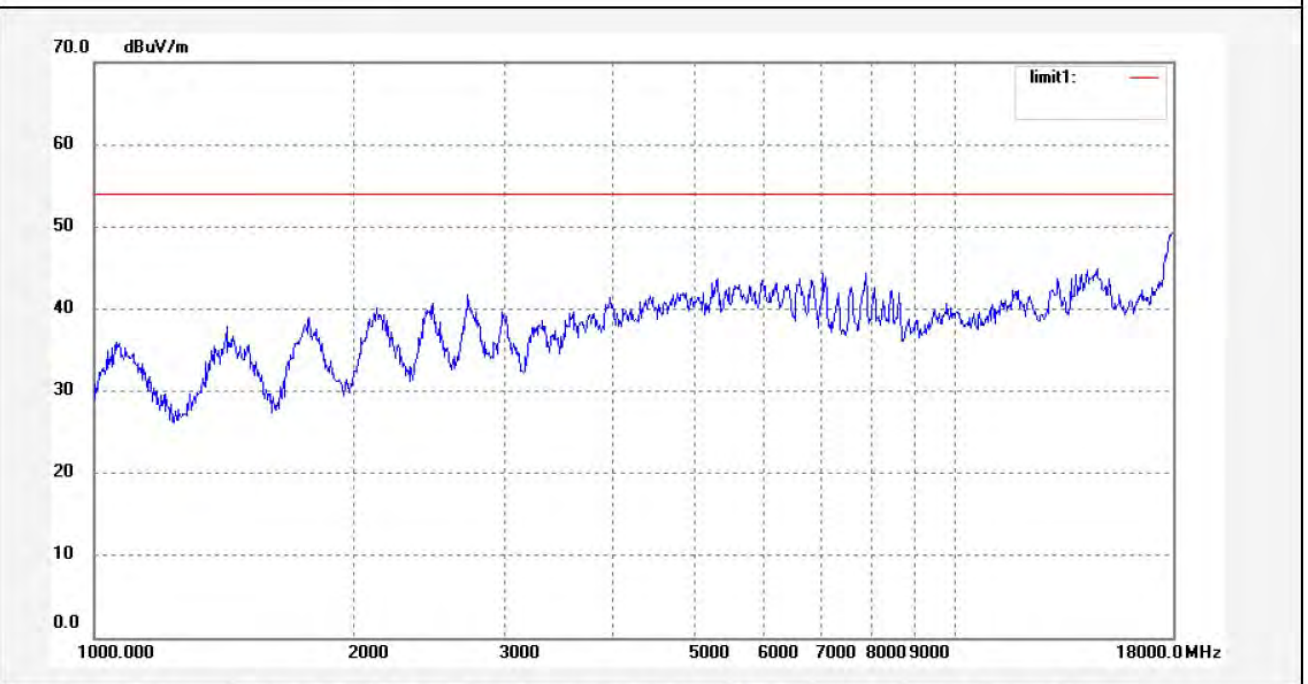

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2530	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/20/04
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

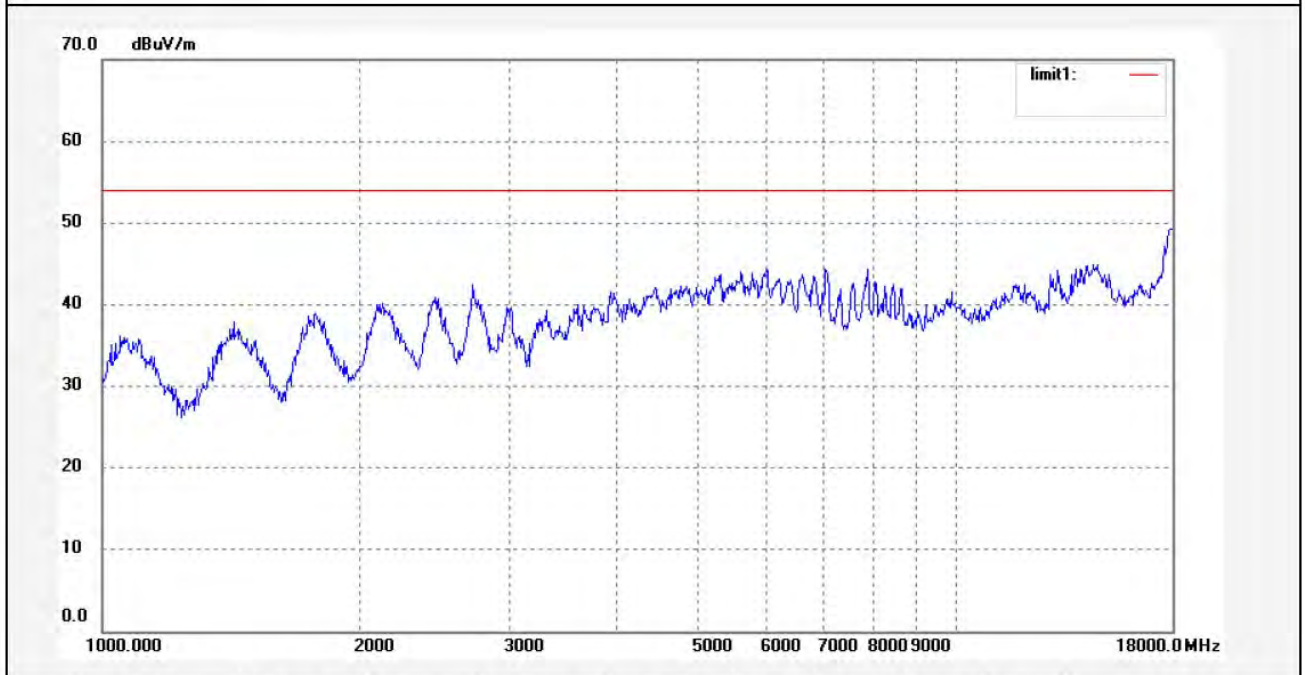

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2553	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/51/34
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

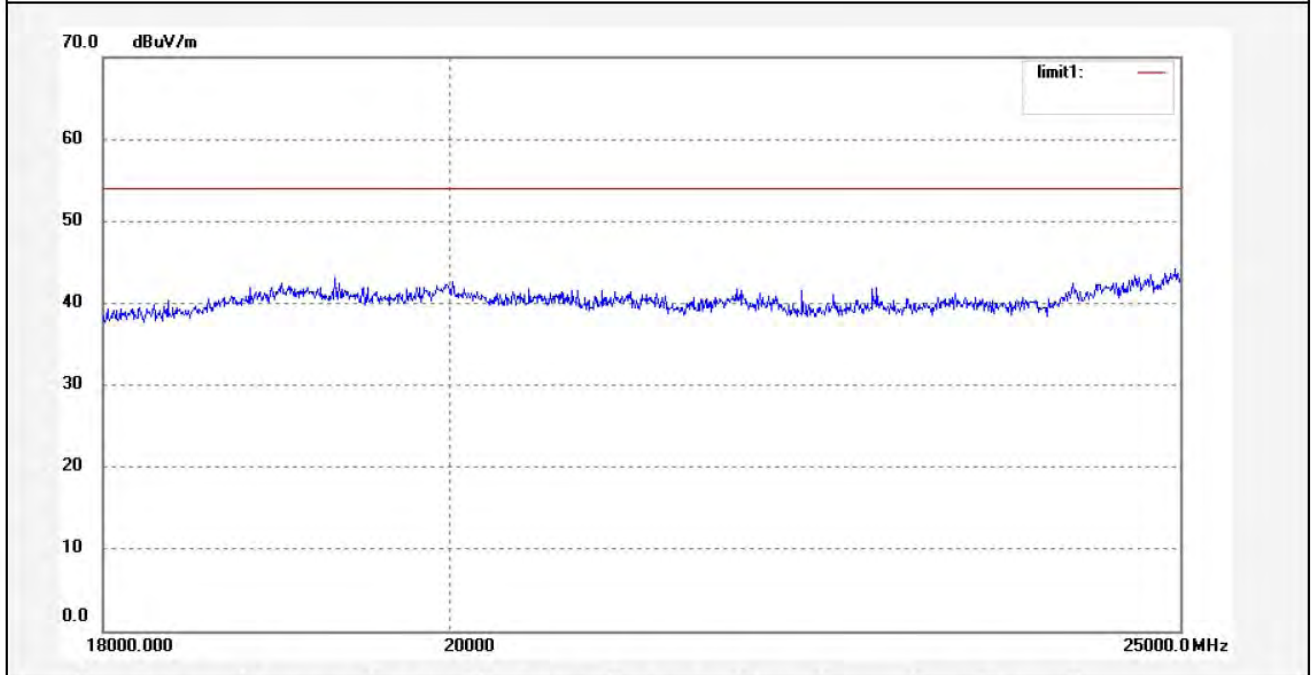

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2554	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/55/36
EUT: MID	Engineer Signature:
Mode: TX Channel 6(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

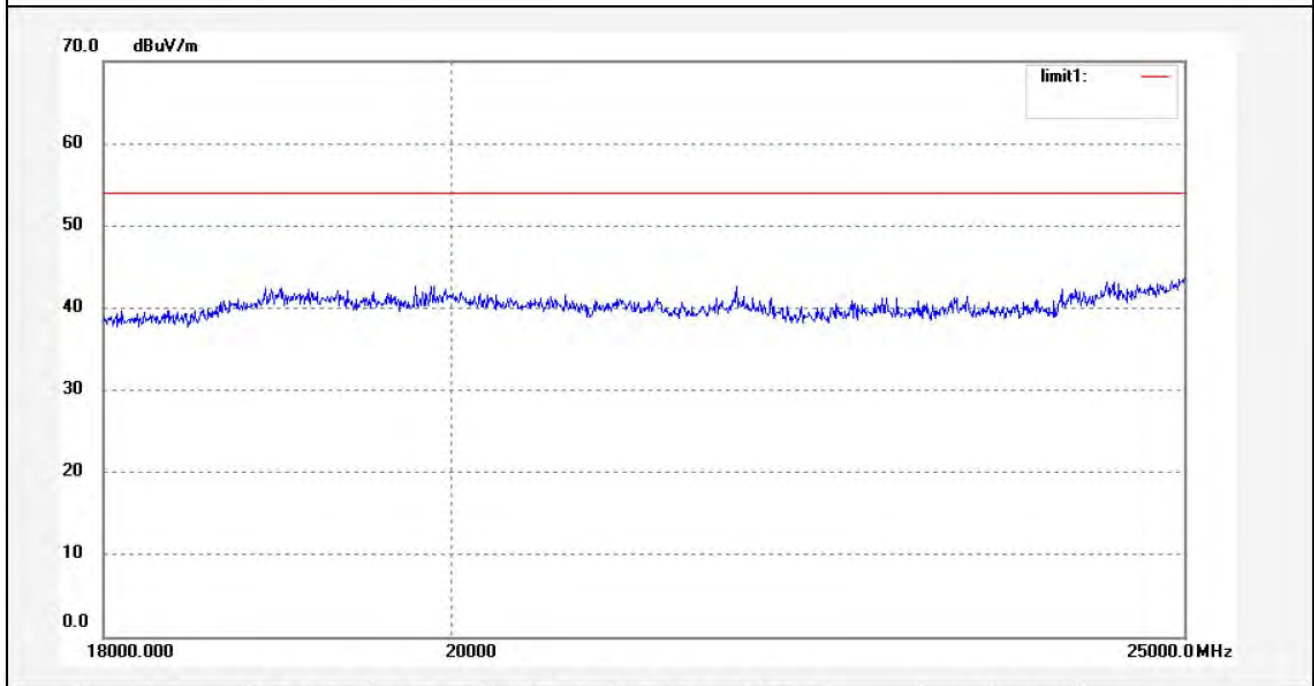

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #988	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:51:33
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

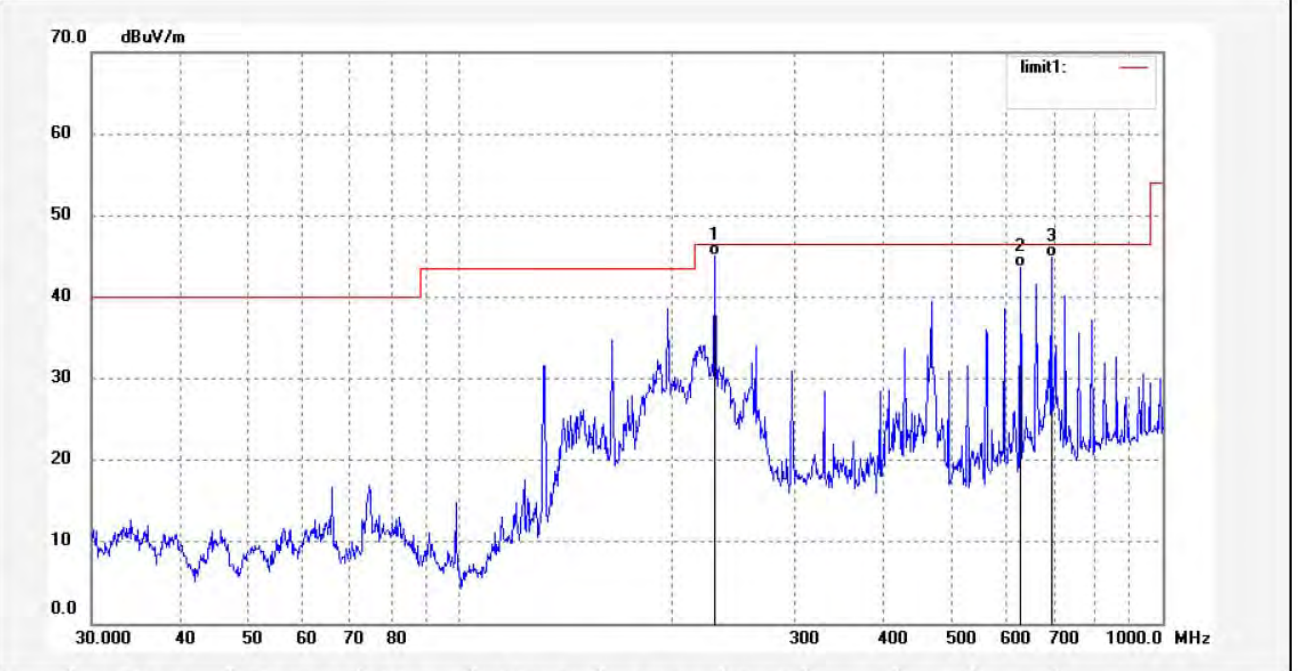

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	230.9068	64.93	-19.86	45.07	46.50	-1.43	QP			
2	627.2738	54.80	-11.10	43.70	46.50	-2.80	QP			
3	694.4174	54.85	-9.90	44.95	46.50	-1.55	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #989	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/06/04
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 15:55:20
EUT: MID	Engineer Signature: STAR
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

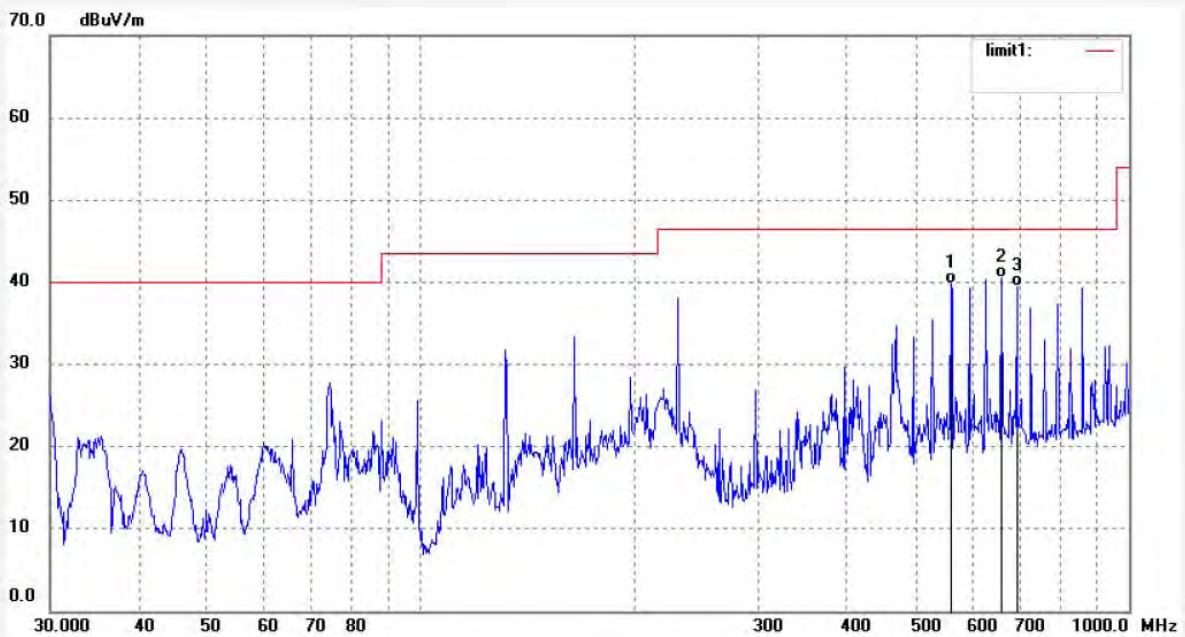

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	560.6928	52.32	-12.59	39.73	46.50	-6.77	QP			
2	661.1505	50.92	-10.43	40.49	46.50	-6.01	QP			
3	694.4174	49.33	-9.90	39.43	46.50	-7.07	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2531	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/23/53
EUT: MID	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

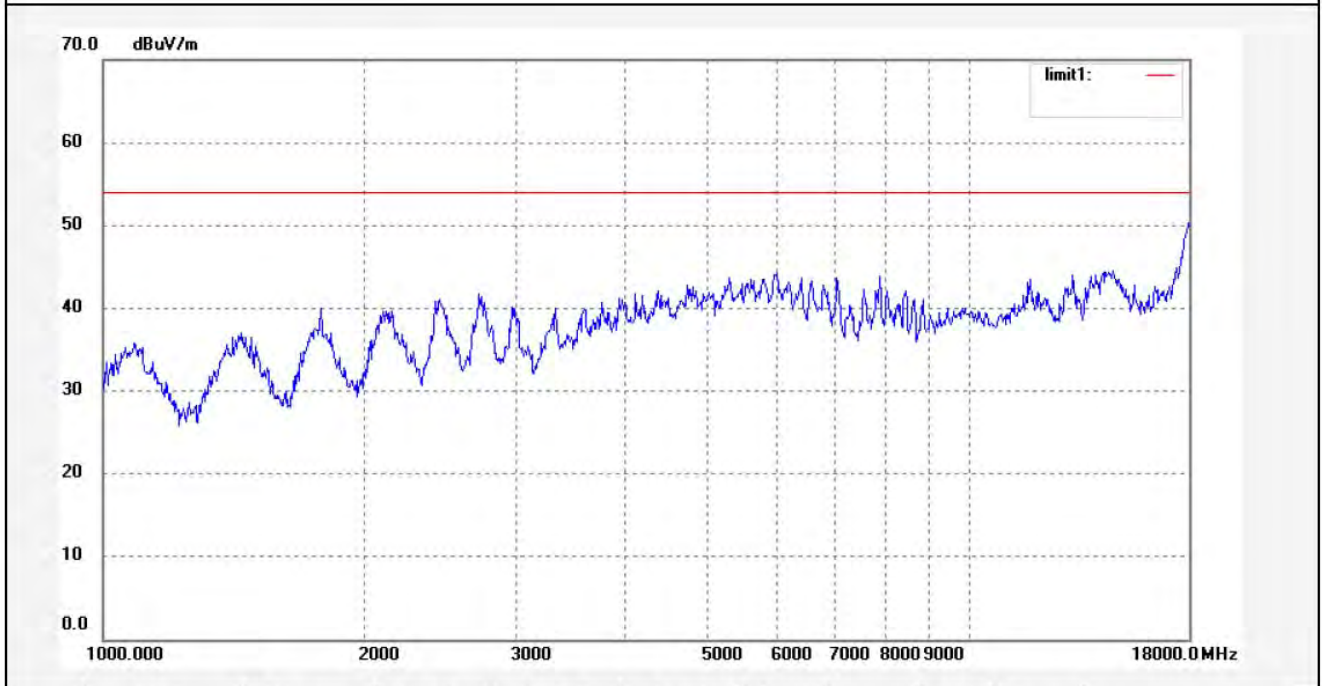

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2532	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/08/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 11/28/11
EUT: MID	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

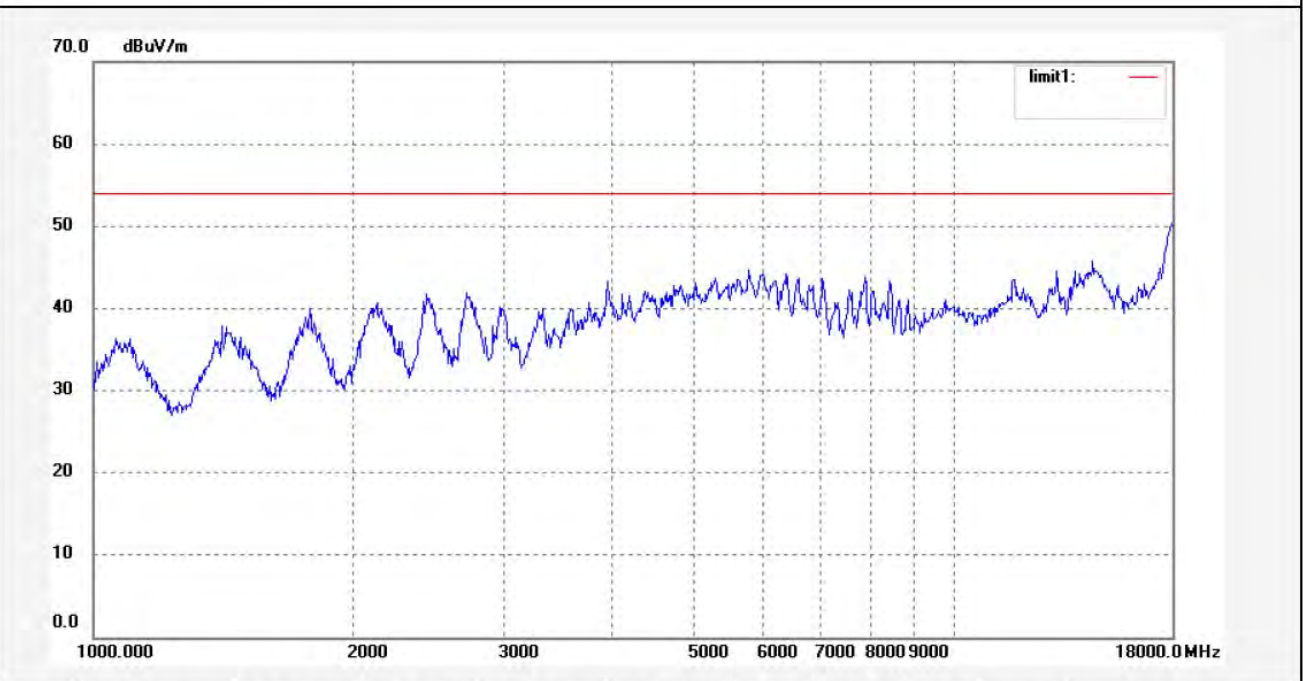

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2555	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/58/19
EUT: MID	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	

Note: Report No.:ATE20131112

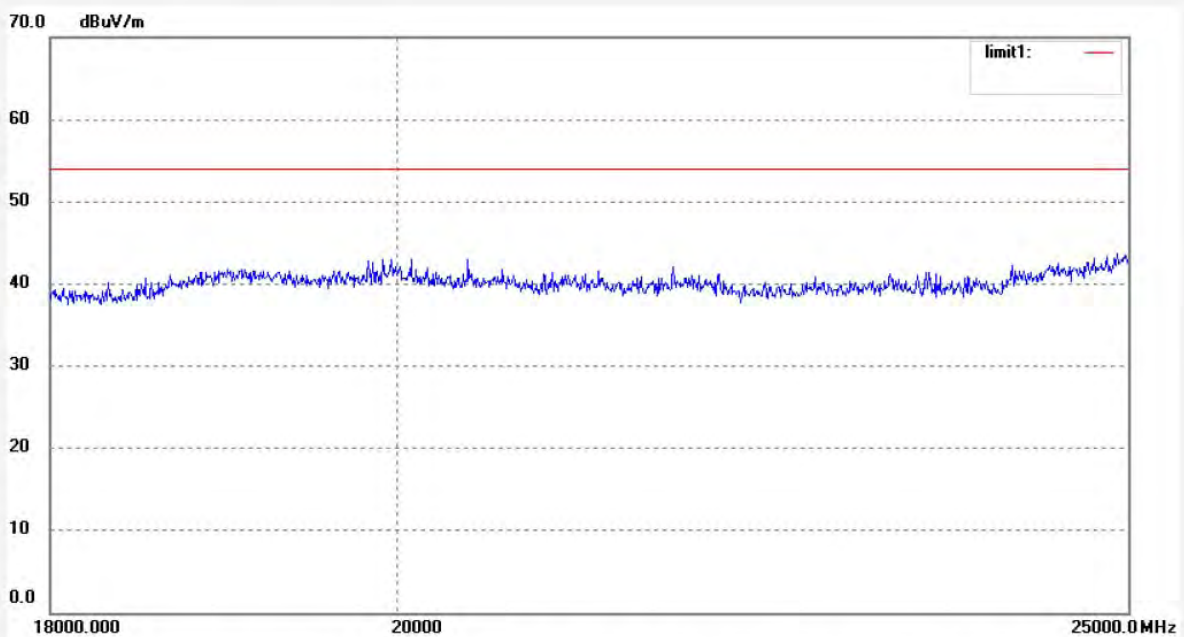

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2556	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/06/09/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 13/02/20
EUT: MID	Engineer Signature:
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: PC748	
Manufacturer: Natural Sound	


Note: Report No.:ATE20131112

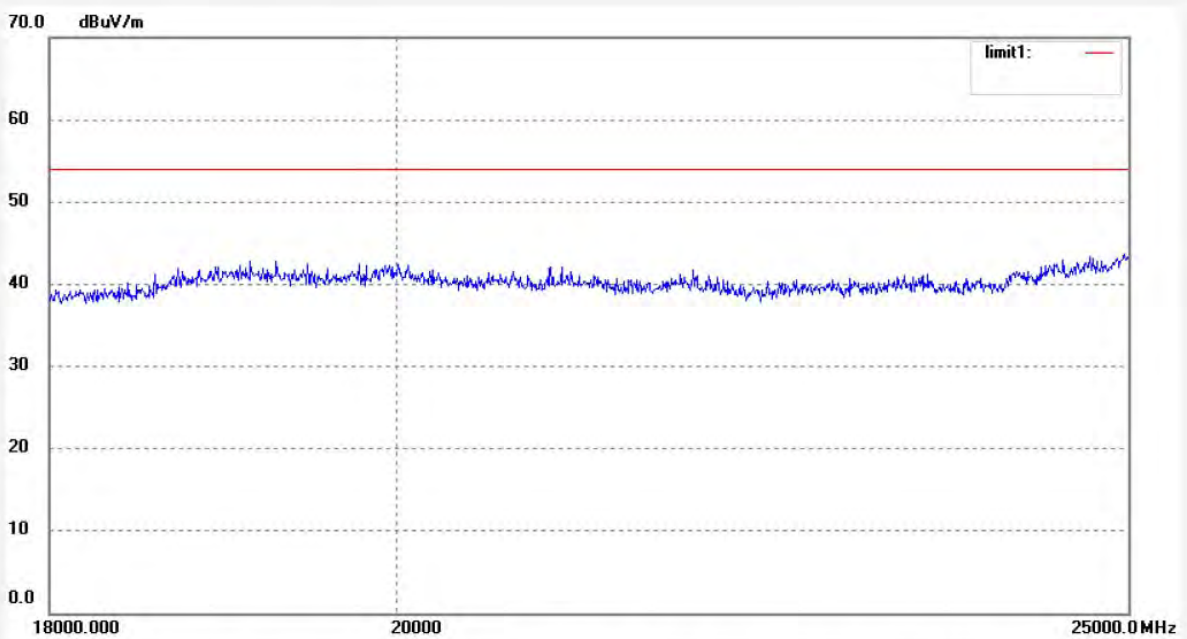

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1. Block Diagram of Test Setup

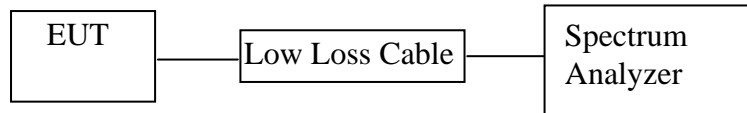

(EUT: MID)

10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1. MID (EUT)

Model Number	:	PC748
Serial Number	:	N/A
Manufacturer	:	Natural Sound Electronics (Shenzhen) Co., Ltd.

10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 10.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5. Test Procedure

10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

10.5.3. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


10.5.4. The Conducted Spurious Emission was measured and recorded.

10.6. Test Result


Pass.

The spectrum analyzer plots are attached as below.


TX 802.11b Channel Low 2412MHz (30MHz-1GHz)

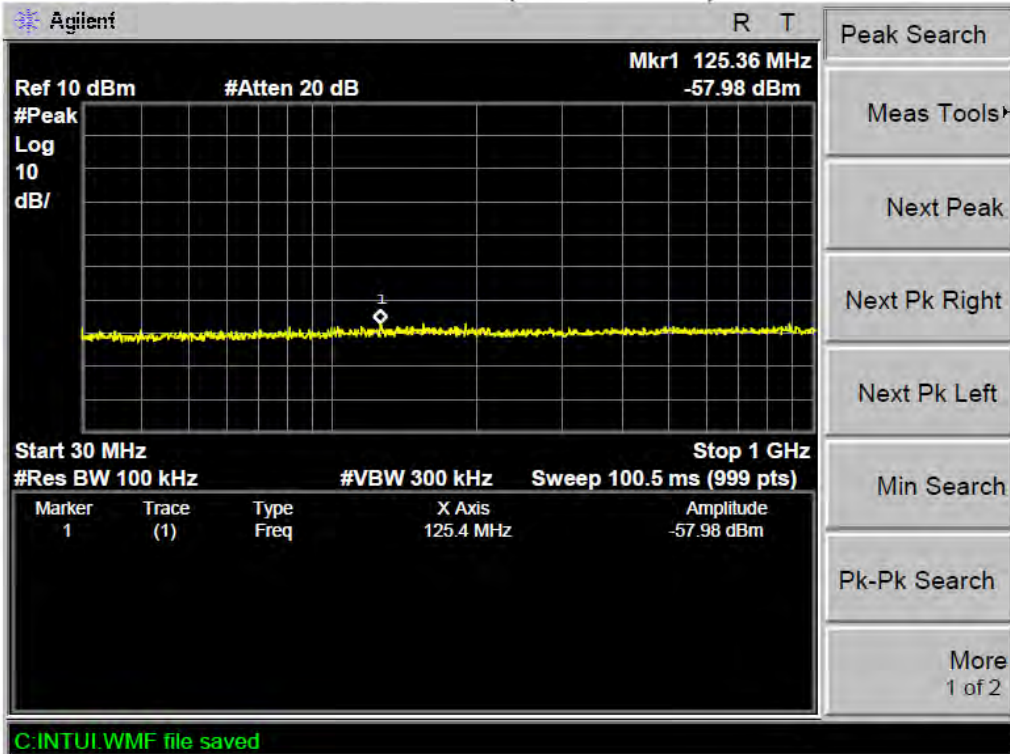


TX 802.11b Channel Low 2412MHz (1GHz-25GHz)

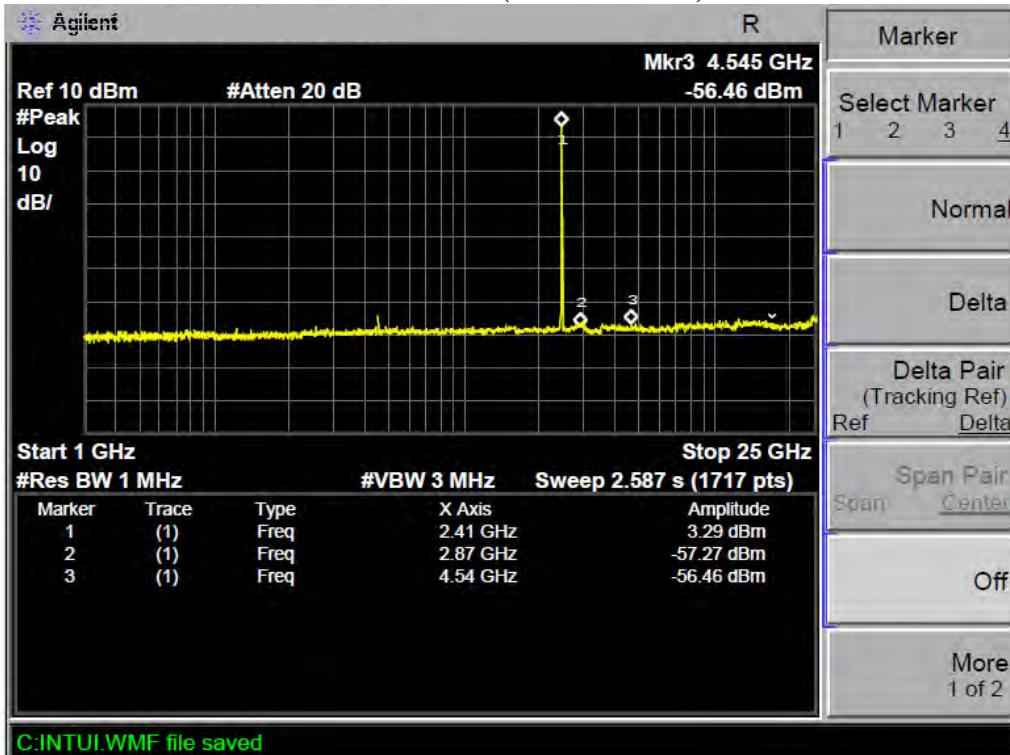


TX 802.11b Channel Middle 2437MHz (30MHz-1GHz)

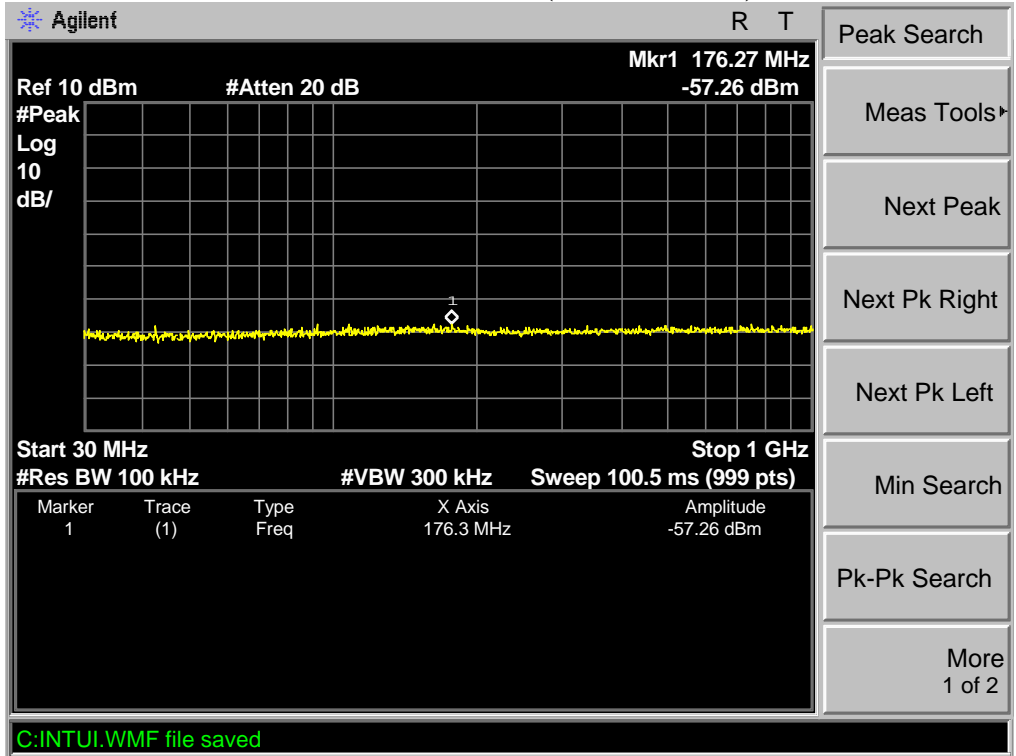


TX 802.11b Channel Middle 2437MHz (1GHz-25GHz)

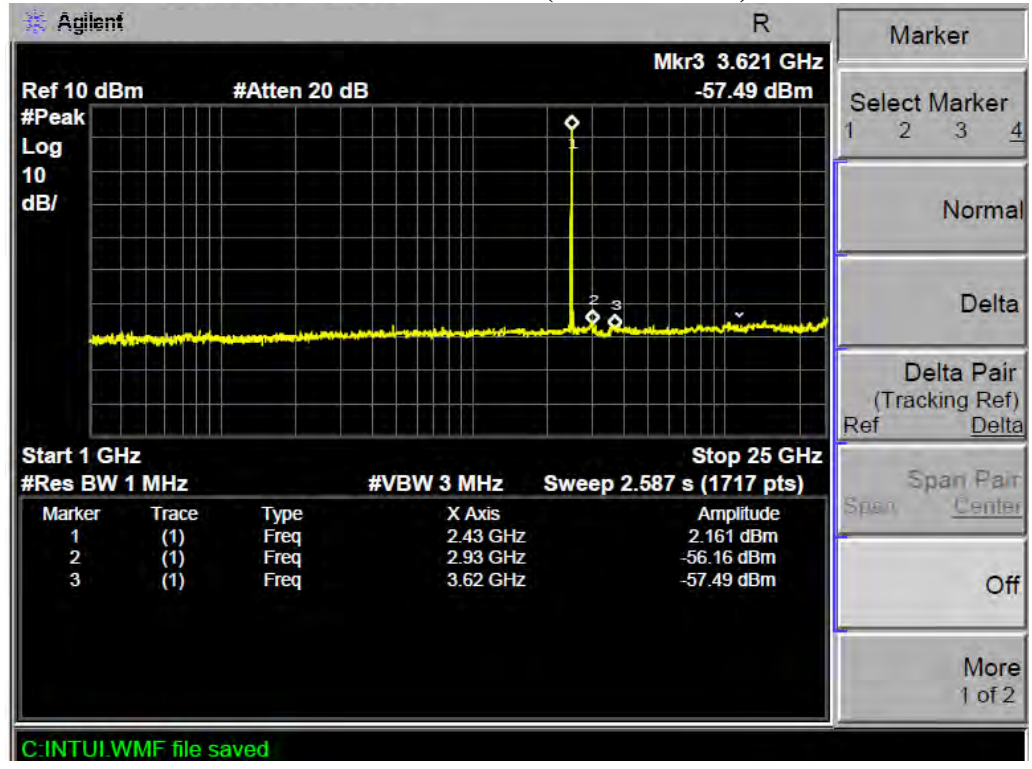


TX 802.11b Channel High 2462MHz (30MHz-1GHz)

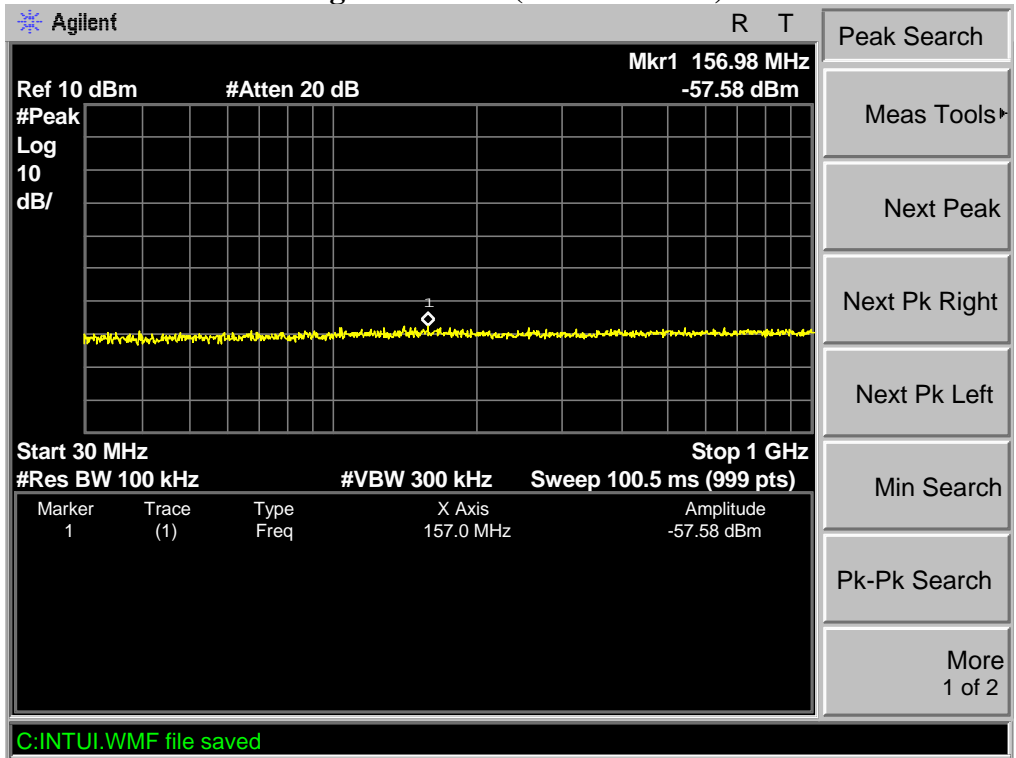


TX 802.11b Channel High 2462MHz (1GHz-25GHz)

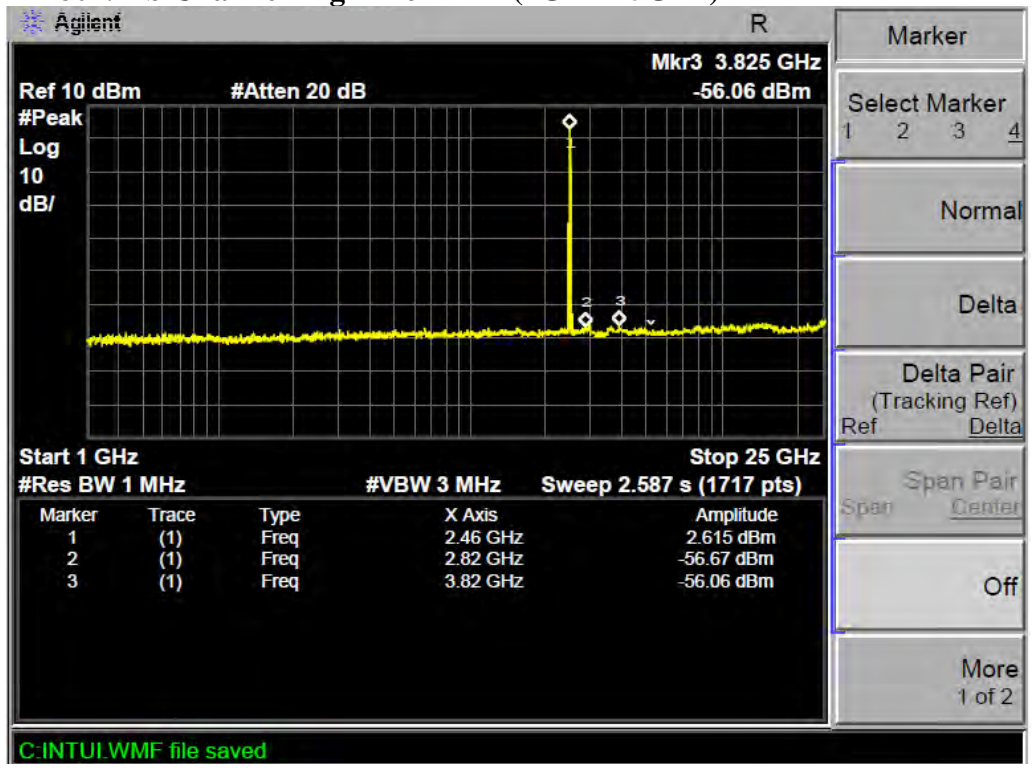


TX 802.11g Channel Low 2412MHz (30MHz-1GHz)

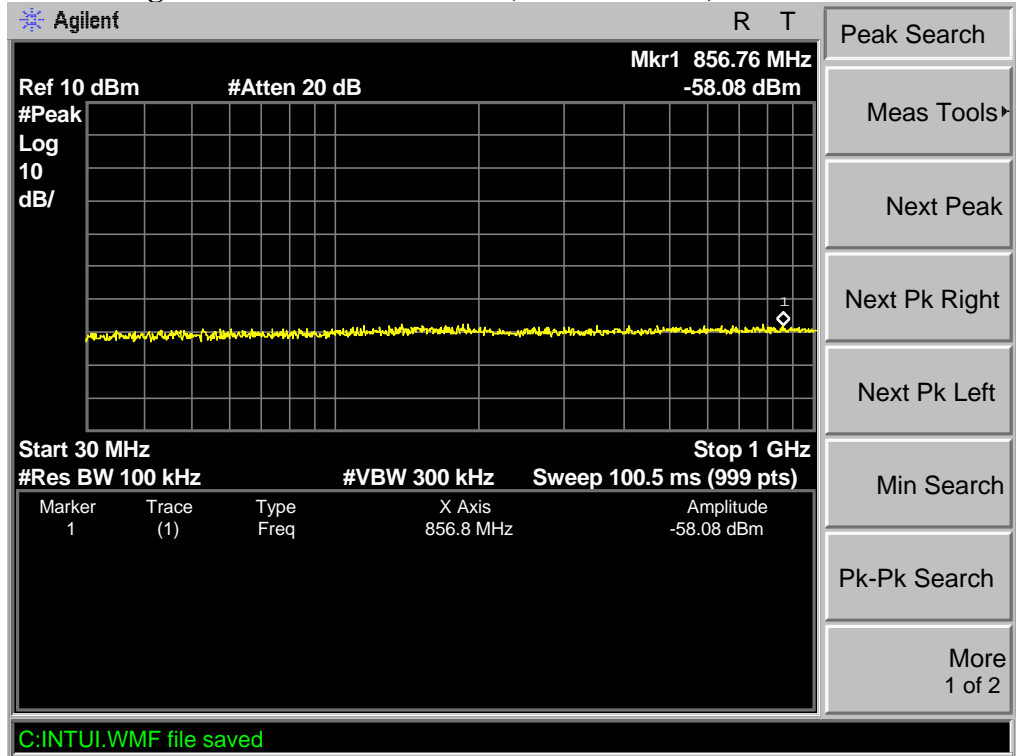


TX 802.11g Channel Low 2412MHz (1GHz-25GHz)

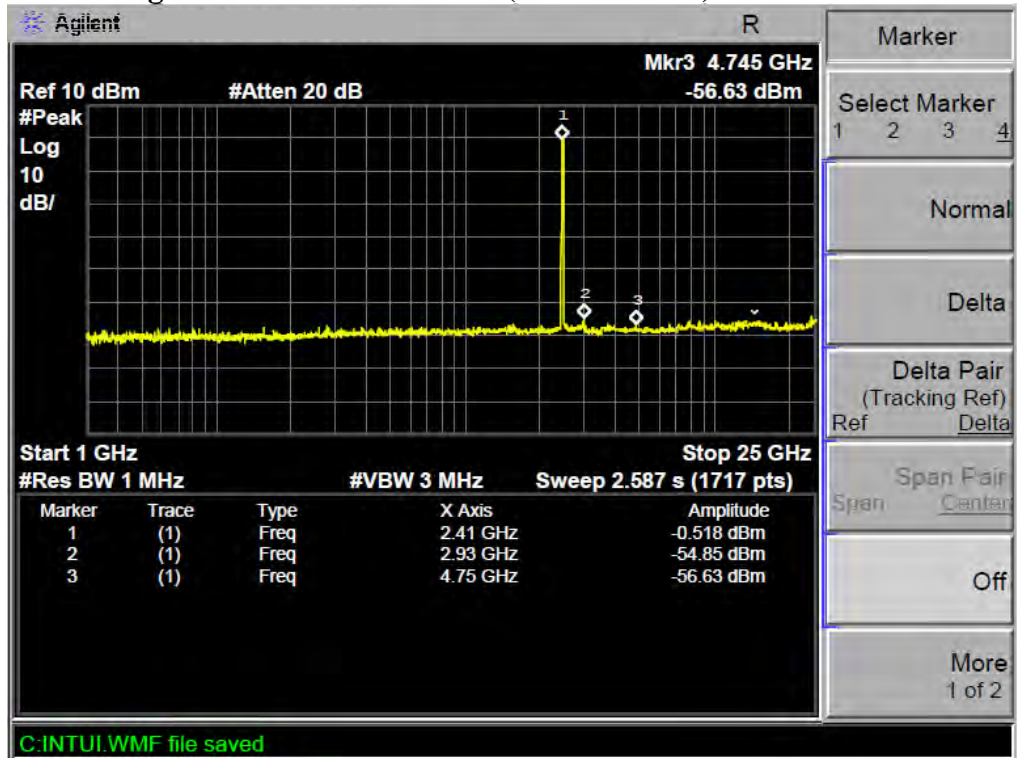


TX 802.11g Channel Middle 2437MHz (30MHz-1GHz)

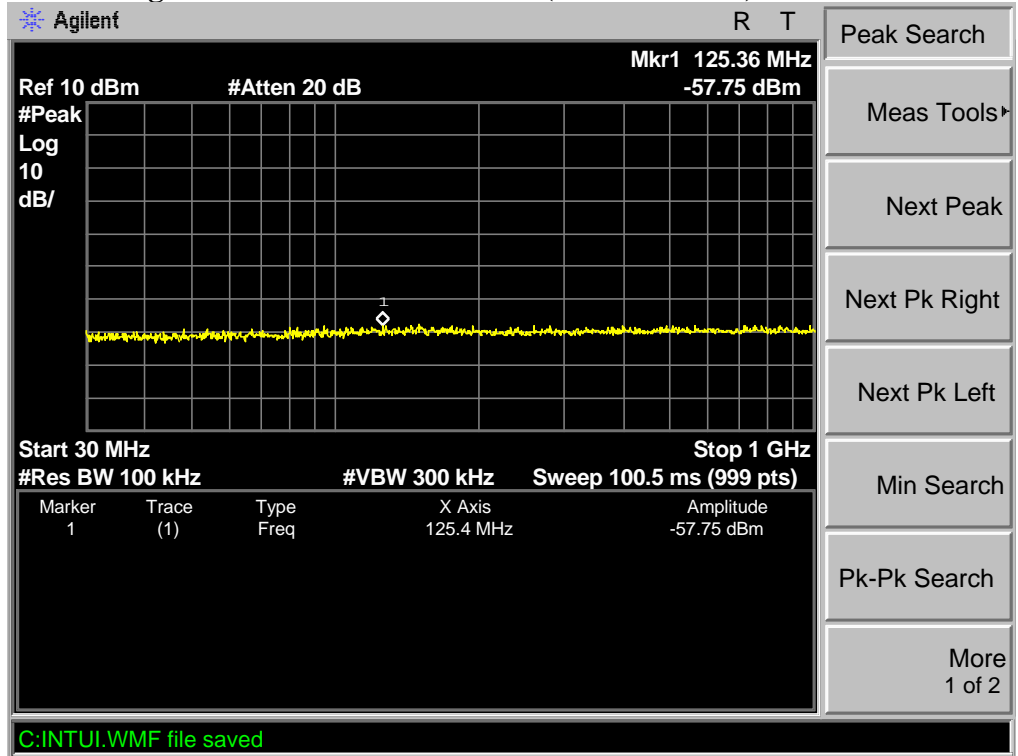


TX 802.11g Channel Middle 2437MHz

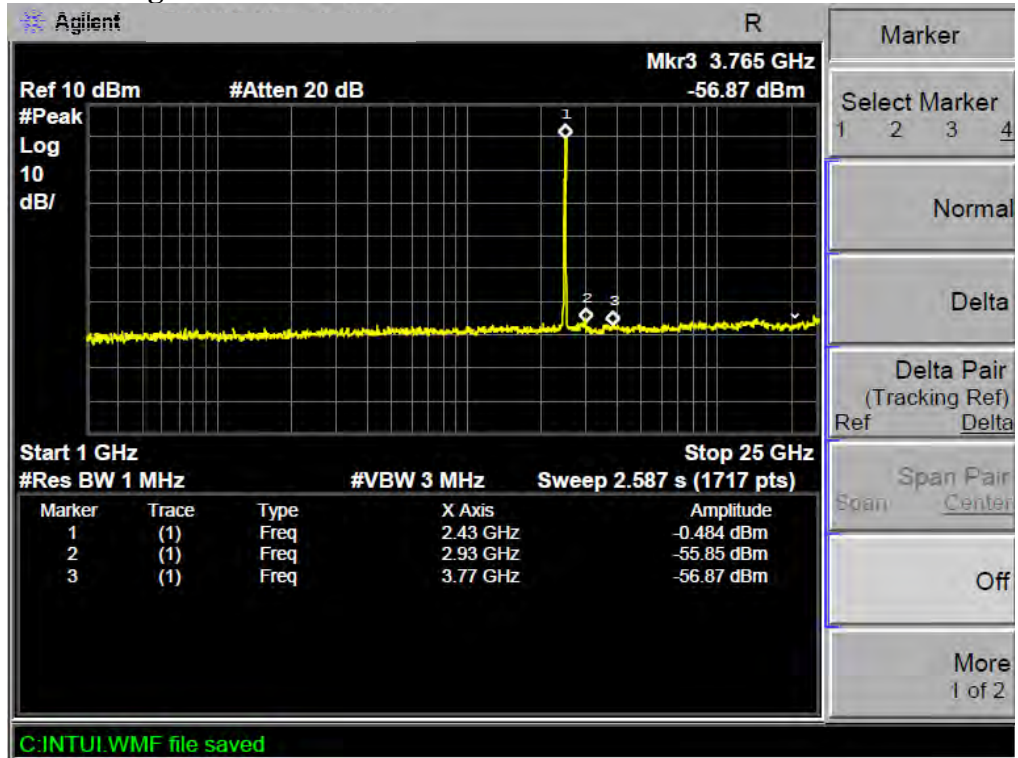


TX 802.11g Channel High 2462MHz (30MHz-1GHz)

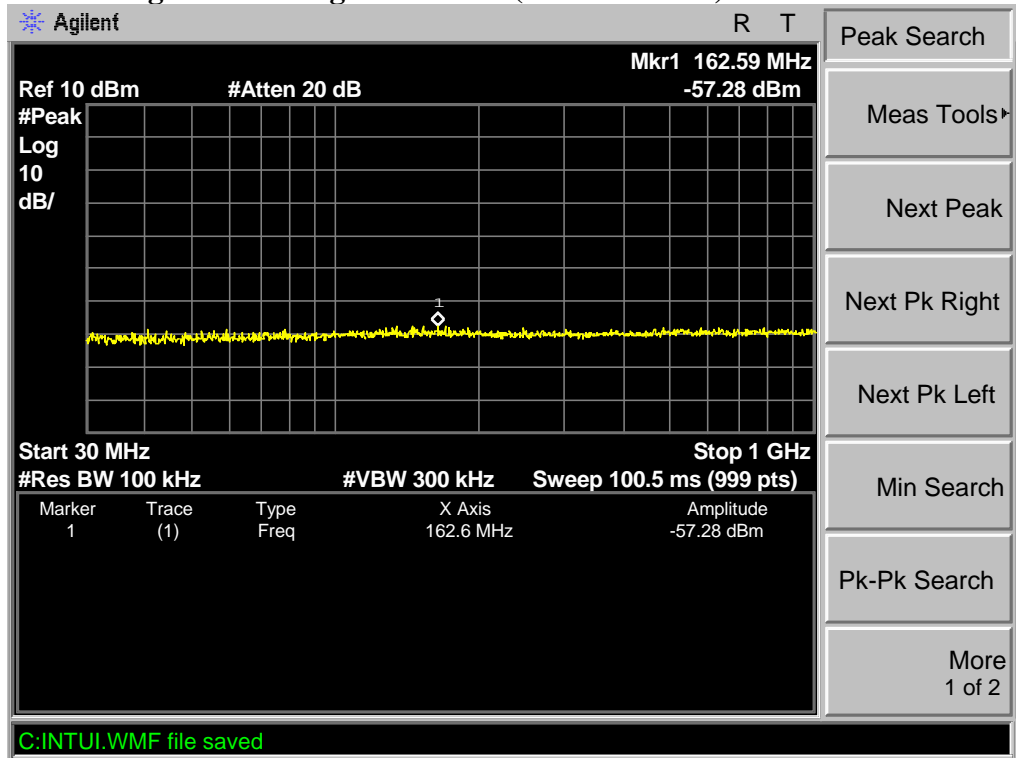


TX 802.11g Channel High 2462MHz (1GHz-25GHz)

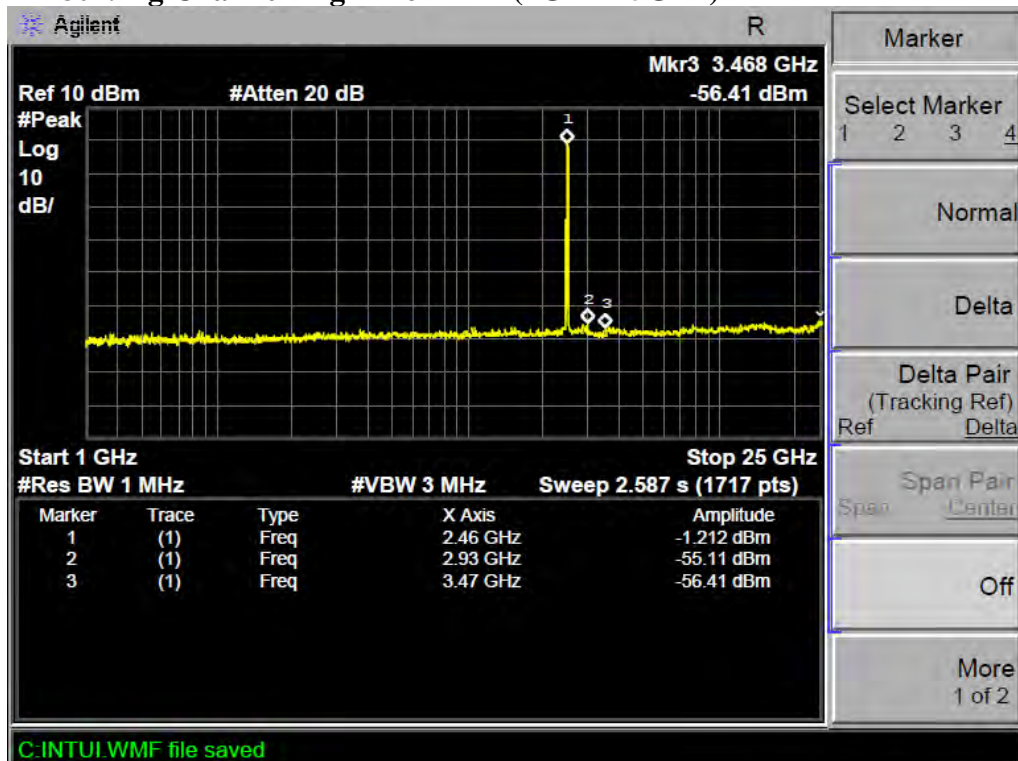


TX 802.11n Channel Low 2412MHz (20MHz) (30MHz-1GHz)

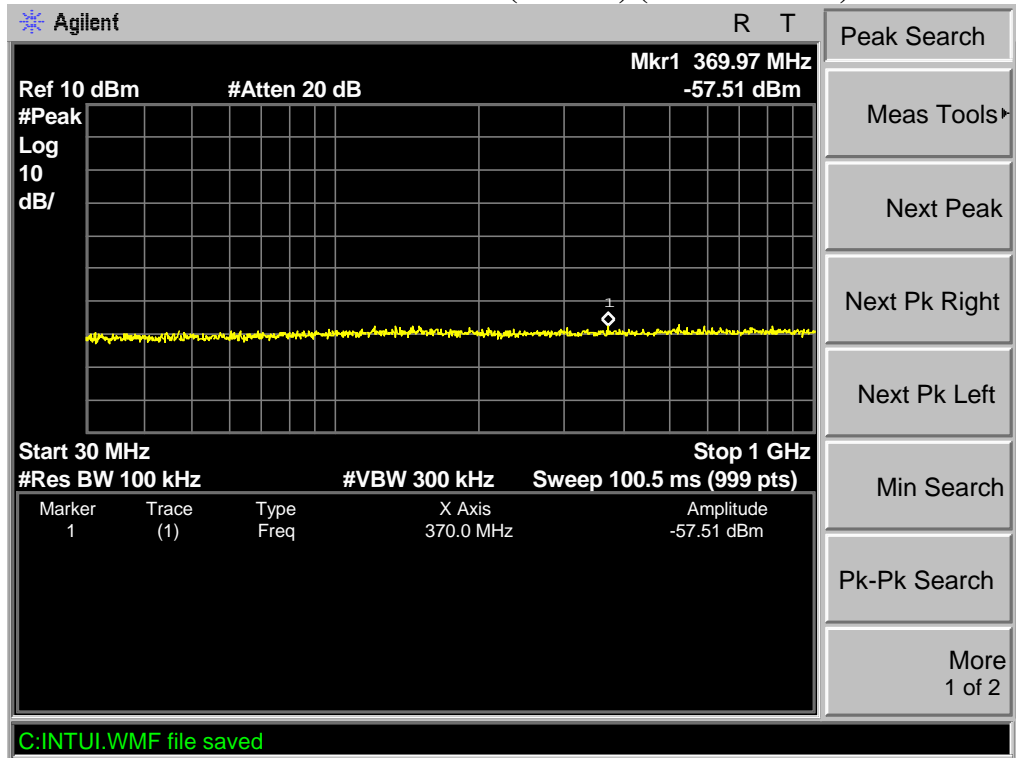


TX 802.11n Channel Low 2412MHz (20MHz) (1GHz-25GHz)

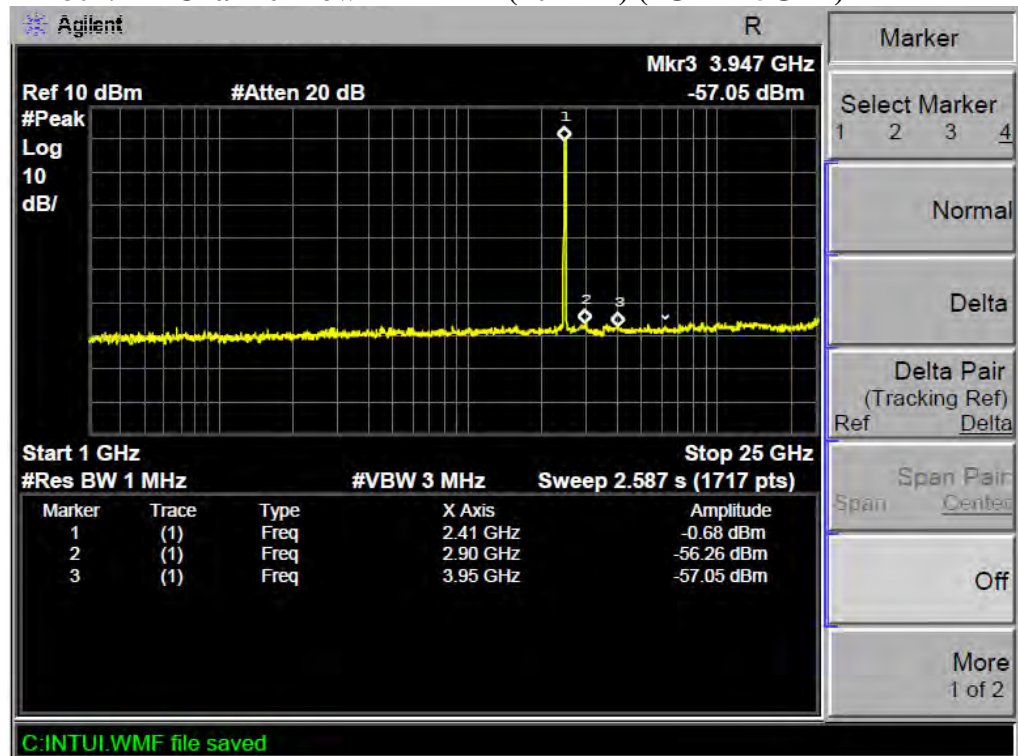


TX 802.11n Channel Middle 2437MHz (20MHz) (30MHz-1GHz)

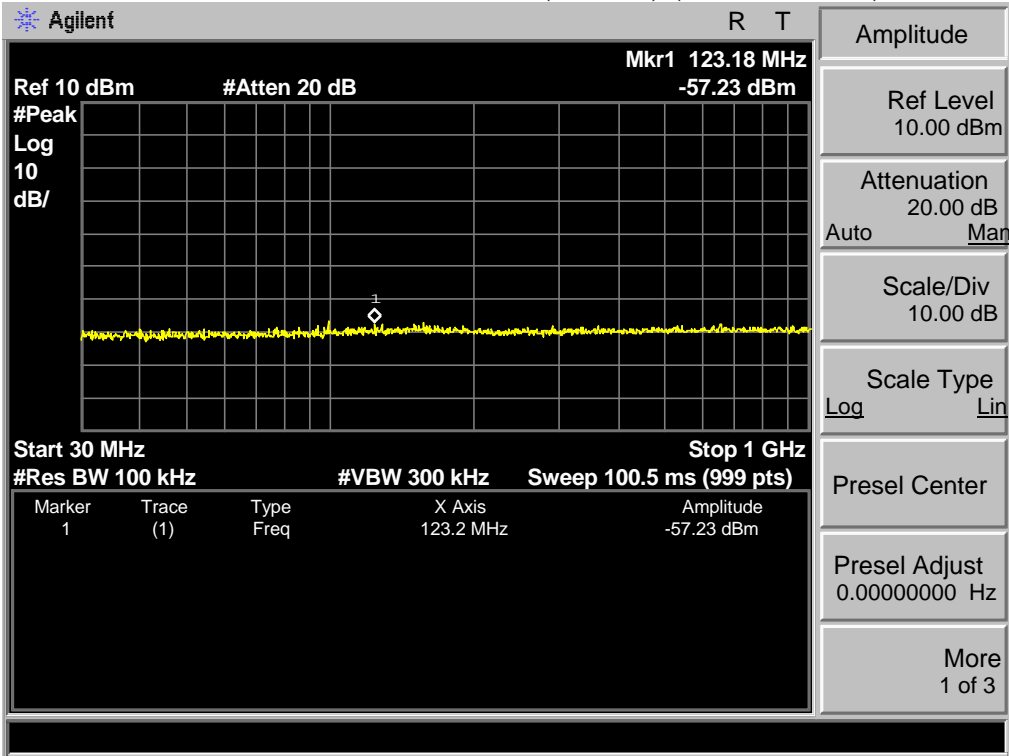


TX 802.11n Channel Middle 2437MHz (20MHz) (1GHz-25GHz)

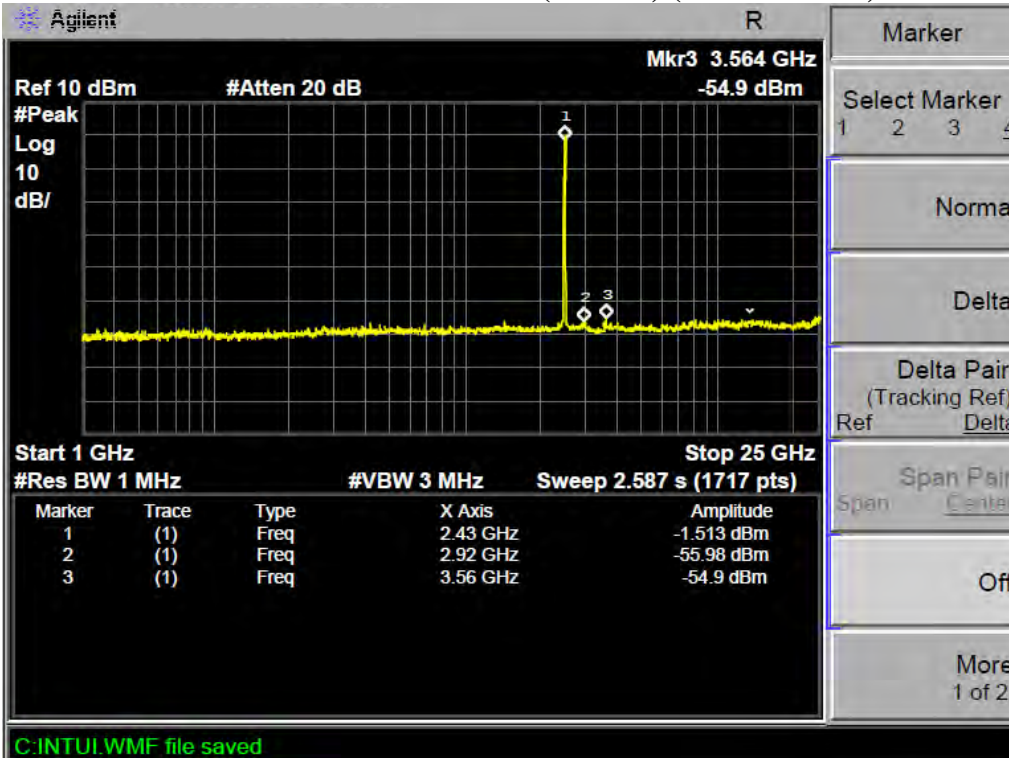


TX 802.11n Channel High 2462MHz (20MHz) (30MHz-1GHz)

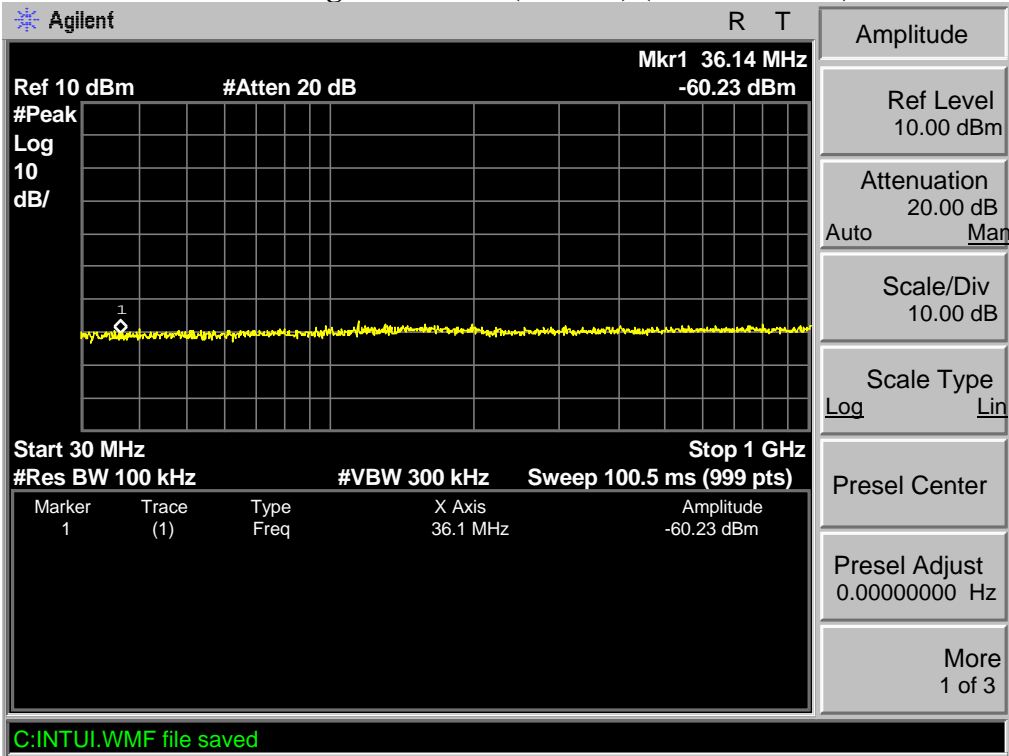


TX 802.11n Channel High 2462MHz (20MHz) (1GHz-25GHz)

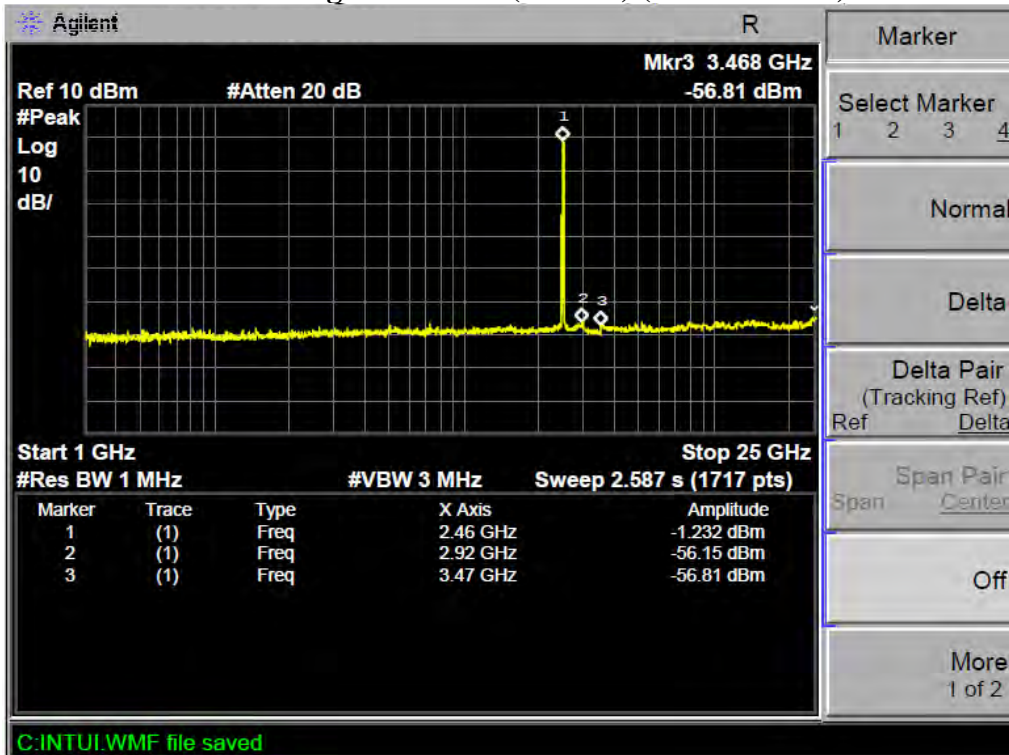


TX 802.11n Channel Low 2422MHz (40MHz) (30MHz-1GHz)

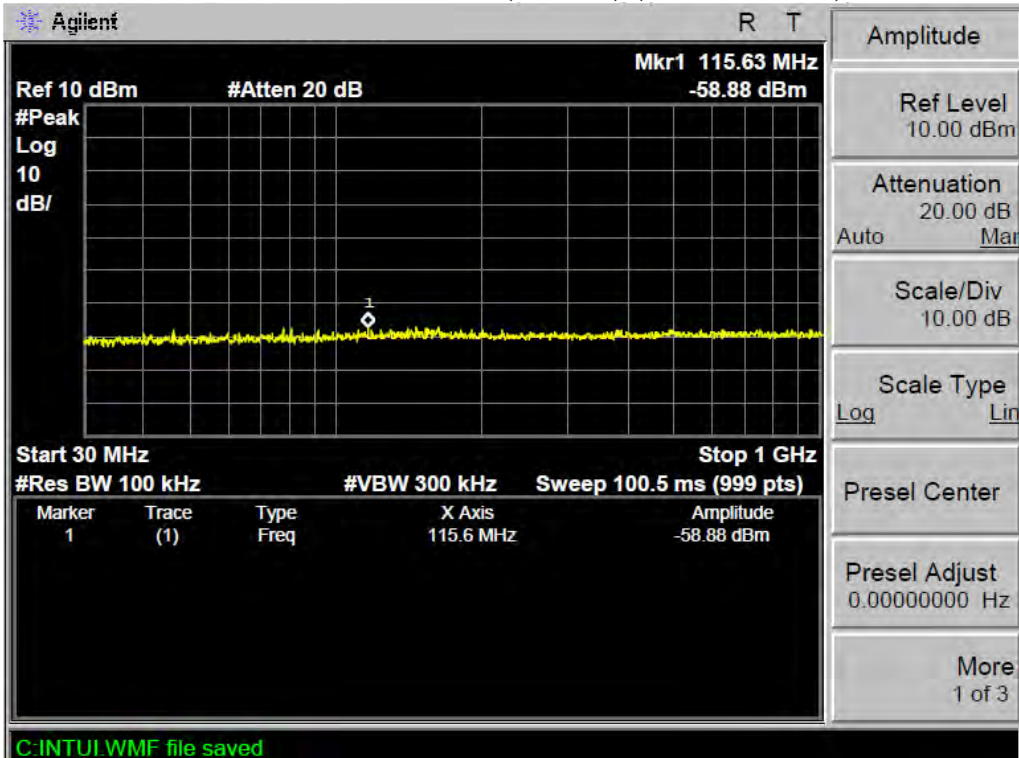


TX 802.11n Channel Low 2422MHz (40MHz) (1GHz-25GHz)

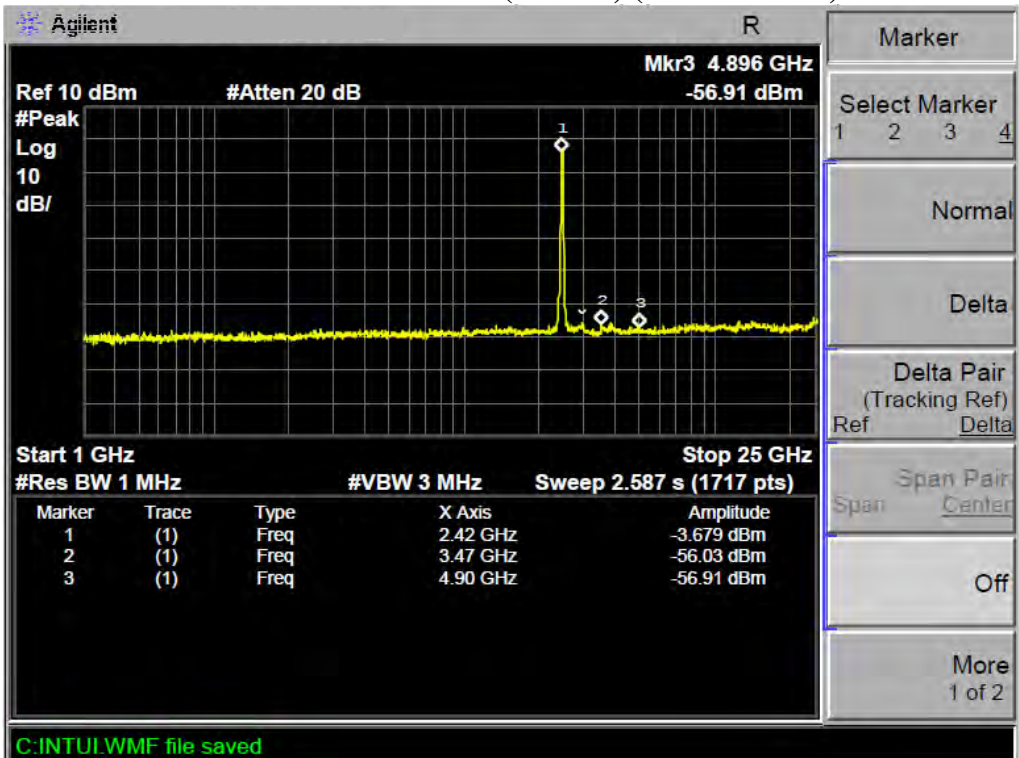


TX 802.11n Channel Middle 2437MHz (40MHz) (30MHz-1GHz)

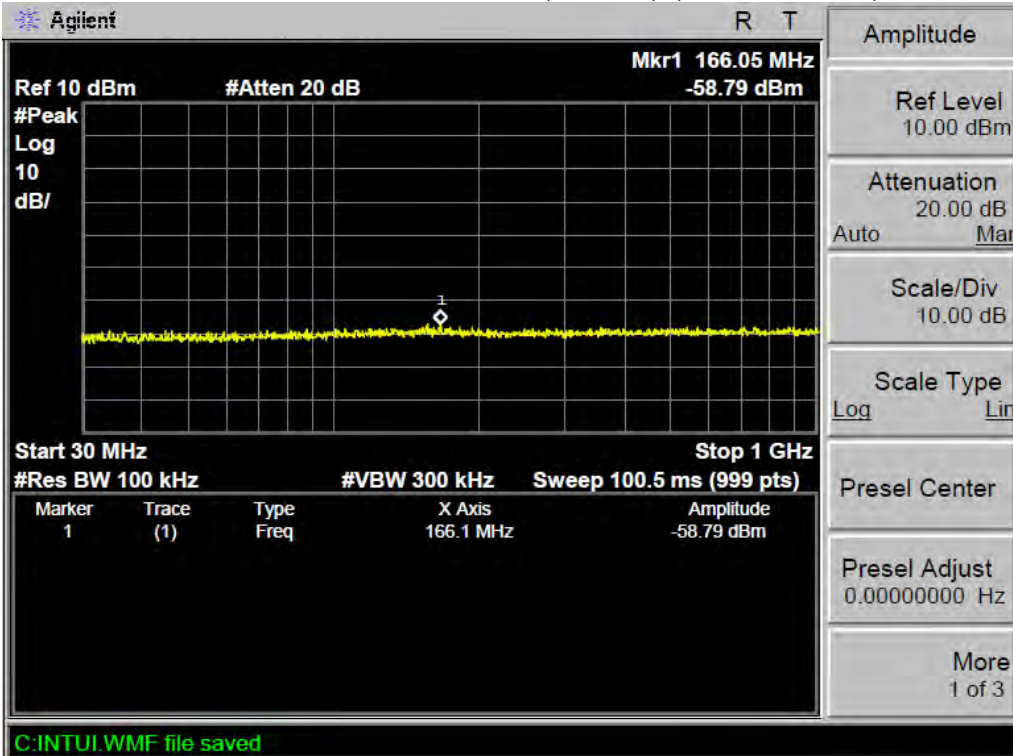


TX 802.11n Channel Middle 2437MHz (40MHz) (1GHz-25GHz)

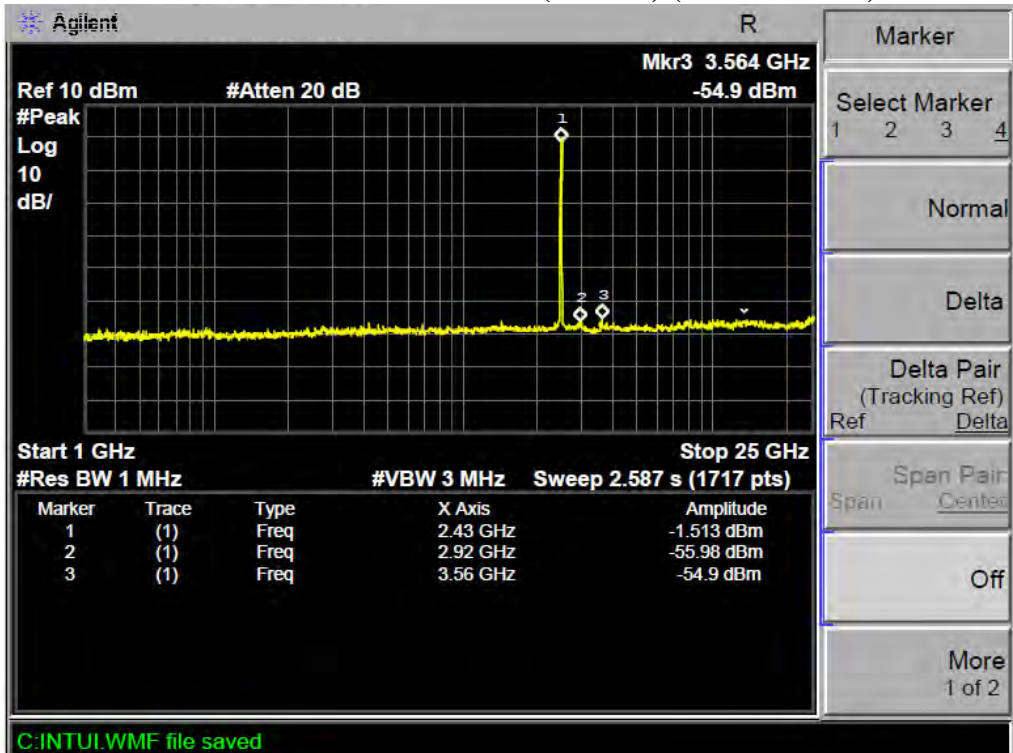

TX 802.11n Channel High 2452MHz (40MHz) (30MHz-1GHz)

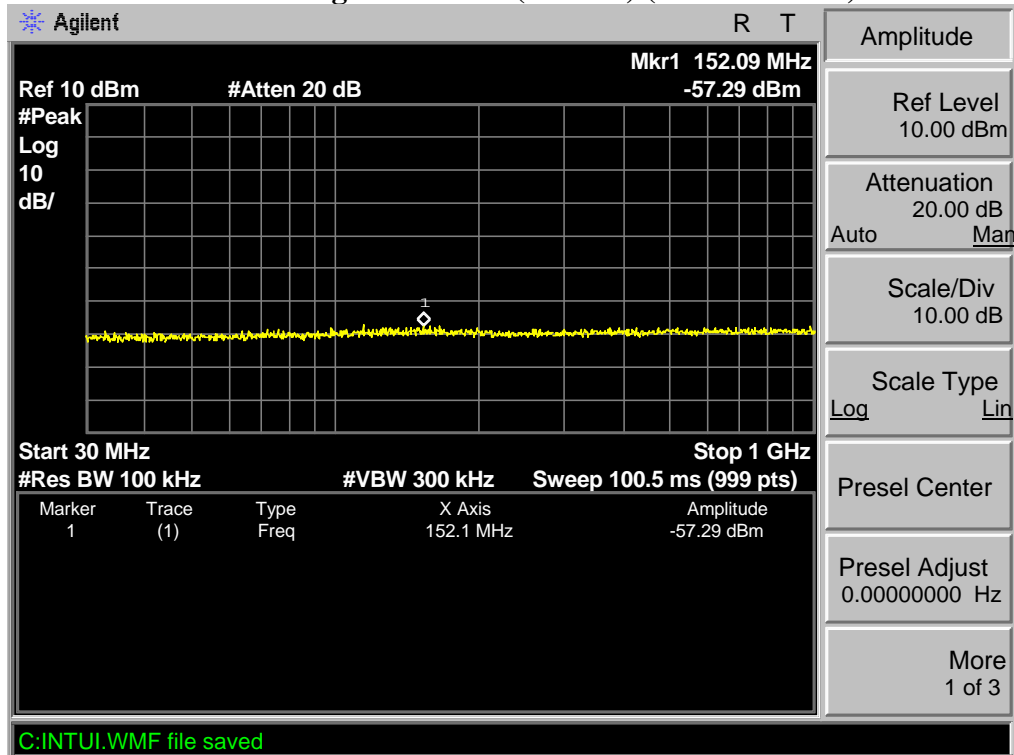

TX 802.11n Channel High 2452MHz (40MHz) (1GHz-25GHz)

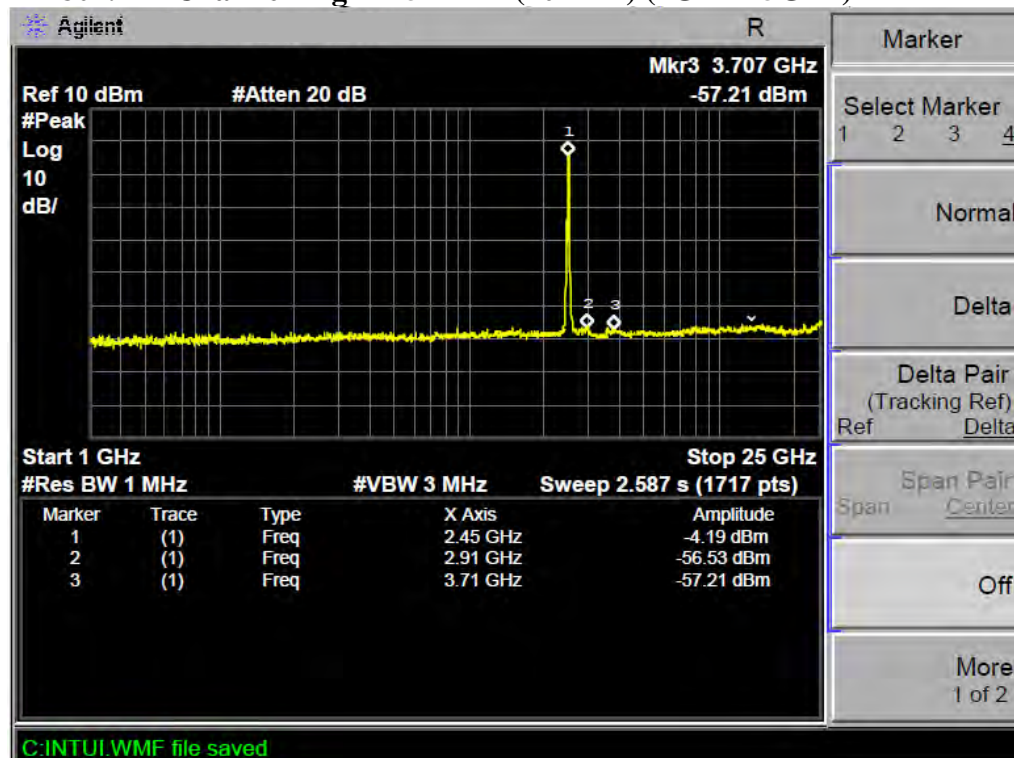


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

15 SECTION 15.207(A)


11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators



(EUT: MID)

11.1.2.Shielding Room Test Setup Diagram

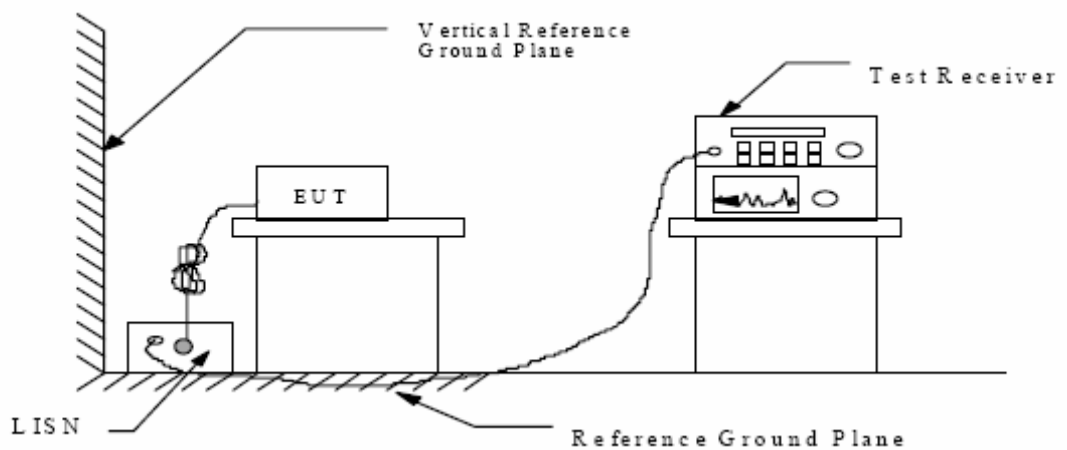

(EUT: MID)

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3. Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1. MID (EUT)

Model Number : PC748
Serial Number : N/A
Manufacturer : Natural Sound Electronics (Shenzhen) Co., Ltd.

11.4. Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 11.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in (Charging) mode measure it.

11.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

11.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>June 4, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC748</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>Charging</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Line
0.153024	50.40	66	-15.4	QP	Neutral
0.206437	45.70	63	-17.6	QP	
0.521206	41.00	56	-15.0	QP	
0.153024	32.50	56	-23.3	AV	
0.383278	28.80	48	-19.4	AV	
0.523291	35.70	46	-10.3	AV	
0.154251	47.40	66	-18.4	QP	Live
0.180957	45.20	64	-19.2	QP	
0.517062	39.60	56	-16.4	QP	
0.154868	29.70	56	-26.0	AV	
0.359562	25.30	49	-23.4	AV	
0.517062	29.50	46	-16.5	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: MID M/N:PC748
 Manufacturer: Natural Sound
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20131112
 Start of Test: 6/4/2013 / 2:19:52PM

SCAN TABLE: "V 150K-30MHZ fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

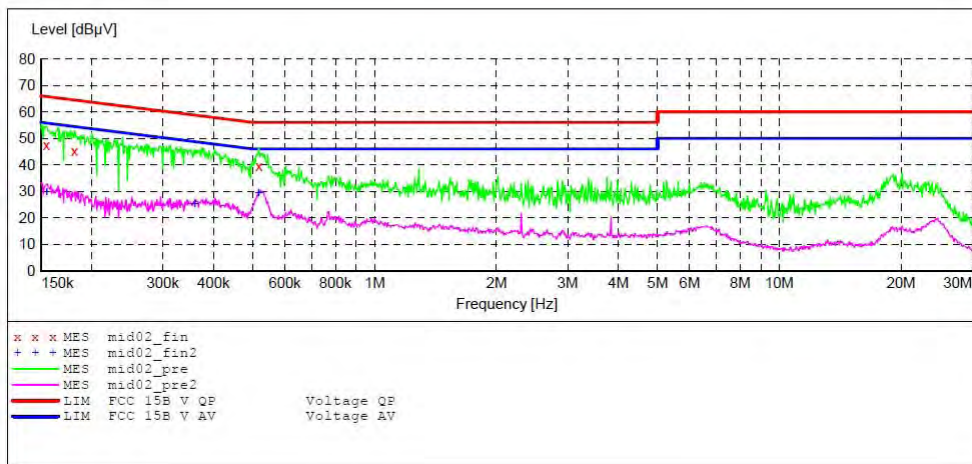

MEASUREMENT RESULT: "mid02_fin"

6/4/2013 2:22PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154251	47.40	11.5	66	18.4	QP	L1	GND
0.180957	45.20	11.7	64	19.2	QP	L1	GND
0.517062	39.60	12.6	56	16.4	QP	L1	GND

MEASUREMENT RESULT: "mid02_fin2"

6/4/2013 2:22PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154868	29.70	11.5	56	26.0	AV	L1	GND
0.359562	25.30	12.3	49	23.4	AV	L1	GND
0.517062	29.50	12.6	46	16.5	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: MID M/N:PC748
 Manufacturer: Natural Sound
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20131112
 Start of Test: 6/4/2013 / 2:16:51PM

SCAN TABLE: "V 150K-30MHz fin"

Start Frequency	Stop Frequency	Step Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz		QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average							

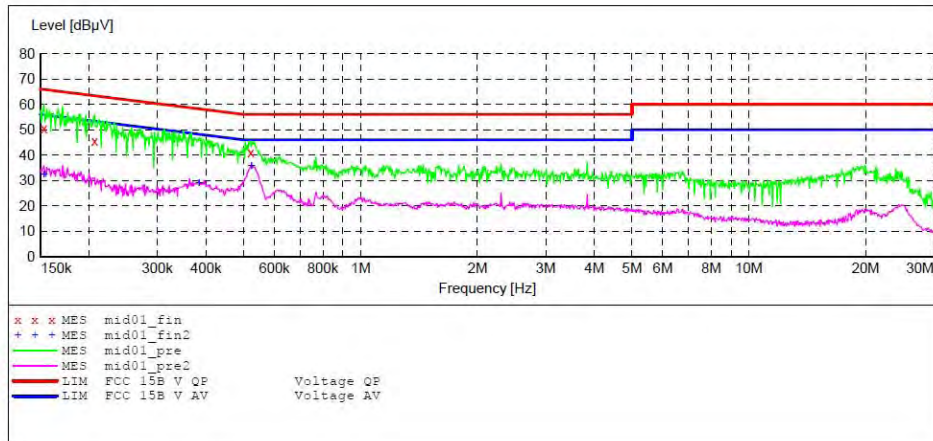

MEASUREMENT RESULT: "mid01_fin"

6/4/2013 2:19PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.153024	50.40	11.5	66	15.4	QP	N	GND
0.206437	45.70	11.8	63	17.6	QP	N	GND
0.521206	41.00	12.6	56	15.0	QP	N	GND

MEASUREMENT RESULT: "mid01_fin2"

6/4/2013 2:19PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.153024	32.50	11.5	56	23.3	AV	N	GND
0.383278	28.80	12.3	48	19.4	AV	N	GND
0.523291	35.70	12.6	46	10.3	AV	N	GND


12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

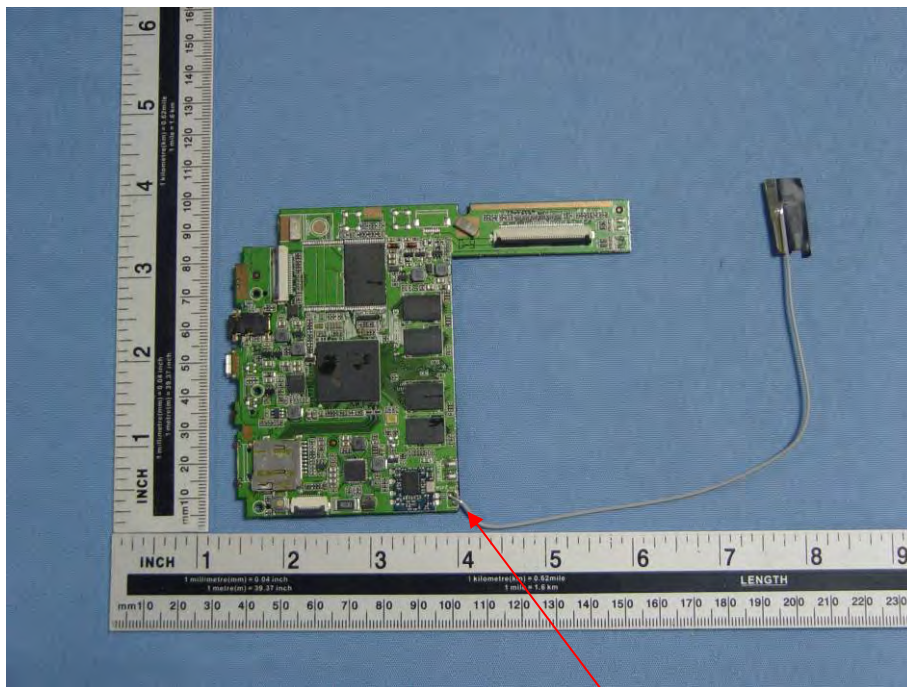

Antenna