

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
HONG KONG NATURAL SOUND ELECTRONICS LIMITED

MID

Model No.: PC7810BXC, CDN-Trio-Stealth G4 7.85,  
CDN-Trio Stealth G4 7.85, MST-78541

FCC ID: PWK-PC7810BXC

Prepared for : HONG KONG NATURAL SOUND ELECTRONICS  
LIMITED  
Address : FLAT/RM M 4/F CONTINENTAL MANSION 300  
KING' S ROAD HONG KONG  
Prepared by : ACCURATE TECHNOLOGY CO., LTD  
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan  
Rd. Science & Industry Park, Nan Shan, Shenzhen,  
Guangdong P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20140923  
Date of Test : Jun 06-16,2014  
Date of Report : Jun 16,2014

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	5
1.3. Special Accessory and Auxiliary Equipment .....	6
1.4. Description of Test Facility .....	7
1.5. Measurement Uncertainty.....	7
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>9</b>
3.1. Operating Mode.....	9
3.2. Configuration and peripherals .....	9
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>10</b>
<b>5. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>47</b>
5.1. Block Diagram of Test Setup.....	47
5.2. Power Line Conducted Emission Measurement Limits.....	47
5.3. Configuration of EUT on Measurement .....	47
5.4. Operating Condition of EUT .....	47
5.5. Test Procedure .....	48
5.6. Power Line Conducted Emission Measurement Results .....	48
<b>6. 6DB BANDWIDTH MEASUREMENT .....</b>	<b>11</b>
6.1. Block Diagram of Test Setup.....	11
6.2. The Requirement For Section 15.247(a)(2).....	11
6.3. EUT Configuration on Measurement .....	11
6.4. Operating Condition of EUT .....	11
6.5. Test Procedure .....	12
6.6. Test Result .....	12
<b>7. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>14</b>
7.1. Block Diagram of Test Setup.....	14
7.2. The Requirement For Section 15.247(b)(3).....	14
7.3. EUT Configuration on Measurement .....	14
7.4. Operating Condition of EUT .....	14
7.5. Test Procedure .....	15
7.6. Test Result .....	15
<b>8. POWER SPECTRAL DENSITY MEASUREMENT.....</b>	<b>17</b>
8.1. Block Diagram of Test Setup.....	17
8.2. The Requirement For Section 15.247(e).....	17
8.3. EUT Configuration on Measurement .....	17
8.4. Operating Condition of EUT .....	17
8.5. Test Procedure .....	18
8.6. Test Result .....	19
<b>9. BAND EDGE COMPLIANCE TEST .....</b>	<b>21</b>
9.1. Block Diagram of Test Setup.....	21
9.2. The Requirement For Section 15.247(d) .....	21
9.3. EUT Configuration on Measurement .....	21
9.4. Operating Condition of EUT .....	22

9.5.	Test Procedure .....	22
9.6.	Test Result .....	22
<b>10.</b>	<b>RADIATED SPURIOUS EMISSION TEST .....</b>	<b>28</b>
10.1.	Block Diagram of Test Setup.....	28
10.2.	The Limit For Section 15.247(d) .....	29
10.3.	Restricted bands of operation .....	29
10.4.	Configuration of EUT on Measurement .....	30
10.5.	Operating Condition of EUT .....	30
10.6.	Test Procedure .....	30
10.7.	The Field Strength of Radiation Emission Measurement Results .....	30
<b>11.</b>	<b>CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST .....</b>	<b>43</b>
11.1.	Block Diagram of Test Setup.....	43
11.2.	The Requirement For Section 15.247(d) .....	43
11.3.	EUT Configuration on Measurement .....	43
11.4.	Operating Condition of EUT .....	44
11.5.	Test Procedure .....	44
11.6.	Test Result .....	44
<b>12.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>51</b>
12.1.	The Requirement .....	51
12.2.	Antenna Construction .....	51

## Test Report Certification

Applicant : HONG KONG NATURAL SOUND ELECTRONICS LIMITED  
Manufacturer : Natural Sound Electronics (Shenzhen) Co., Ltd.  
EUT Description : MID  
(A) MODEL NO.: PC7810BXC, CDN-Trio-Stealth G4 7.85, CDN-Trio  
Stealth G4 7.85, MST-78541  
(B) Trade Name.: N/A  
(C) POWER SUPPLY: DC 3.7V (Powered by battery) or DC 5V (Powered by  
adapter)

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.4: 2009**

The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Jun 06-16,2014



Prepared by :

(Engineer)

Approved & Authorized Signer :

( Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	MID
Model Number	:	PC7810BXC, CDN-Trio-Stealth G4 7.85, CDN-Trio Stealth G4 7.85, MST-78541 Note: These samples are same except for the model number is difference. So we prepare the PC7810BXC for test
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz Bluetooth 4.0: 2402-2480MHz
Number of Channels	:	802.11b/g/n (20MHz):11 802.11n (40MHz): 7 Bluetooth 4.0:40
Antenna Gain	:	1.0dBi
Power Supply	:	DC 5V (Power by adapter)&DC 3.7V(Battery)
Adapter	:	Model number: FY0502000 Input: AC 100-240V; 50/60Hz 0.6A Output: DC 5V/2.0A USB line: Non-shielded, Non-detachable, 1.5m
Modulation mode	:	GFSK DSSS,OFDM
Applicant	:	HONG KONG NATURAL SOUND ELECTRONICS LIMITED
Address	:	FLAT/RM M 4/F CONTINENTAL MANSION 300 KING' S ROAD HONG KONG
Manufacturer	:	Natural Sound Electronics (Shenzhen) Co., Ltd.
Address	:	4th Building, Xinyuan Industrial Zone, Gushu Village, Bao'an District, Shenzhen, China
Date of sample received	:	Jun 06, 2014
Date of Test	:	Jun 06-16,2014

### 1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 1.3.Special Accessory and Auxiliary Equipment

N/A

## 1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC  
The Registration Number is 752051

Listed by Industry Canada  
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories  
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD  
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

## 1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty  
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty  
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty  
(Above 1GHz) = 4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2014	Jan. 10, 2015
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2014	Jan. 10, 2015



### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

#### 3.2. Configuration and peripherals

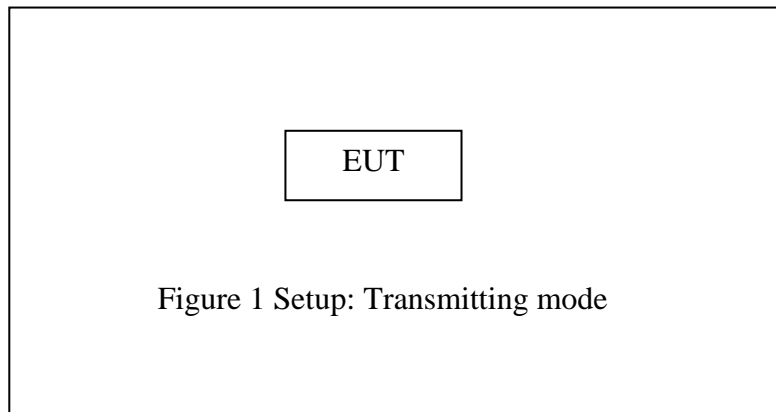


#### 4. TEST PROCEDURES AND RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.207	Power Line Conducted Emission	Compliant
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. 6DB BANDWIDTH MEASUREMENT

### 5.1. Block Diagram of Test Setup

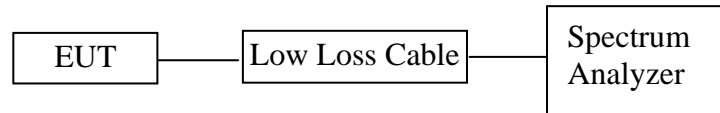

(EUT: MID)

### 5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 5.6. Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.676	0.5	PASS
19	2440	0.684	0.5	PASS
39	2480	0.684	0.5	PASS


The spectrum analyzer plots are attached as below.

*channel 0*

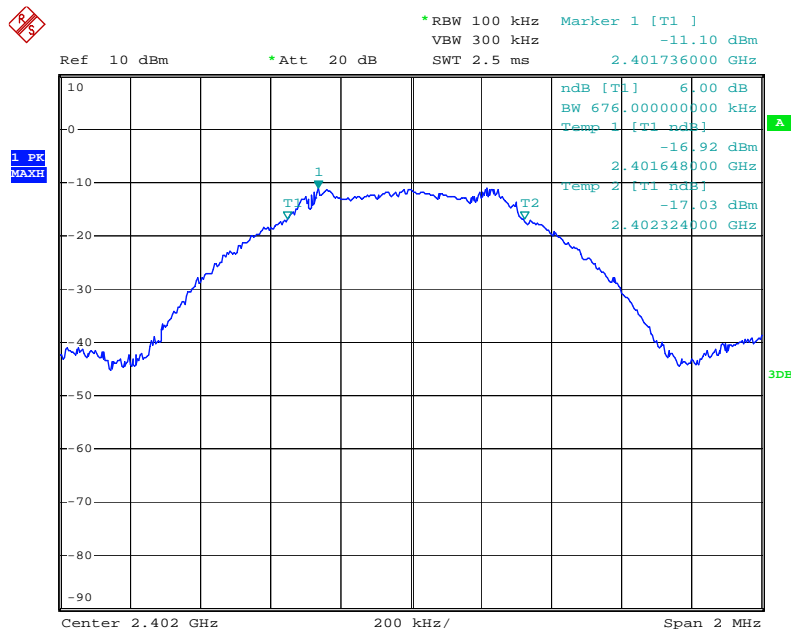


Date: 11.JUN.2014 14:33:11

channel 19

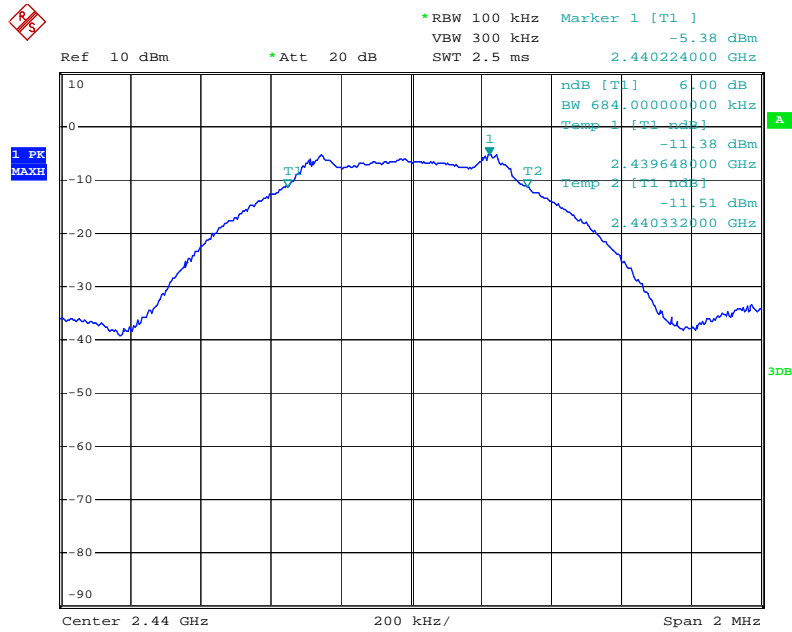

Date: 11.JUN.2014 14:30:31


channel 39

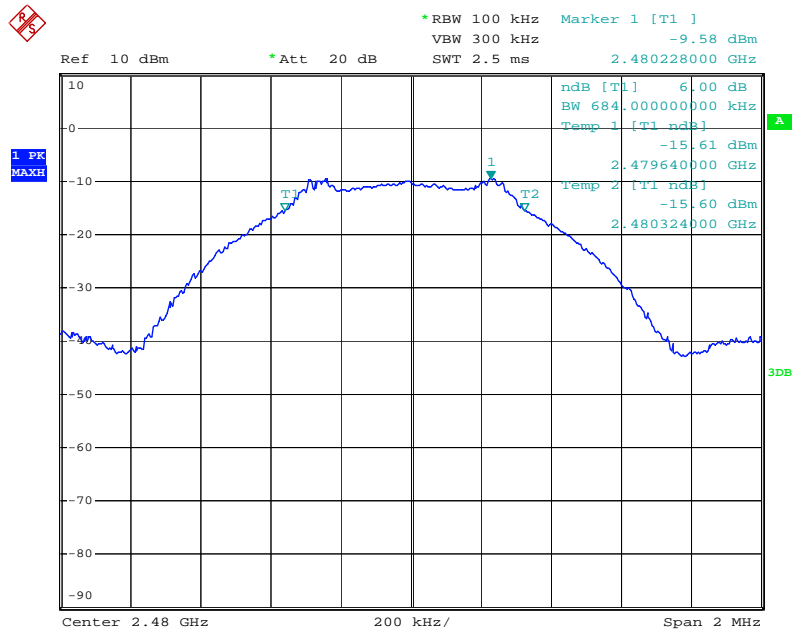

Date: 11.JUN.2014 14:31:35

## 6. MAXIMUM PEAK OUTPUT POWER

### 6.1. Block Diagram of Test Setup



(EUT: MID)

### 6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Test method is options 1 from KDB558074 D01 DTS Meas Guidance v03


6.5.3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.

6.5.4. Measurement the maximum peak output power.

### 6.6. Test Result


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-5.26	30	PASS
19	2440	-4.29	30	PASS
39	2480	-5.28	30	PASS

The spectrum analyzer plots are attached as below.

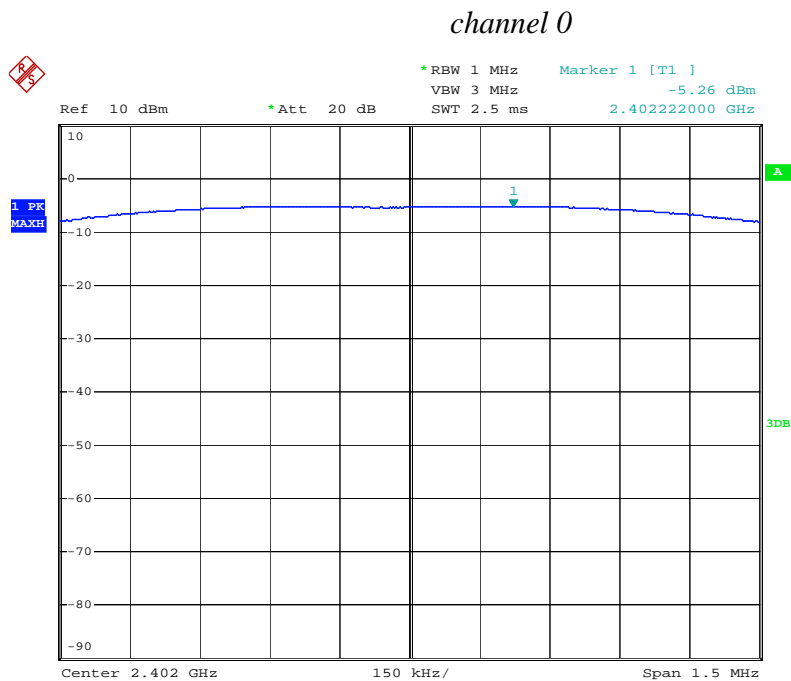


Date: 11.JUN.2014 14:34:44

## channel 19

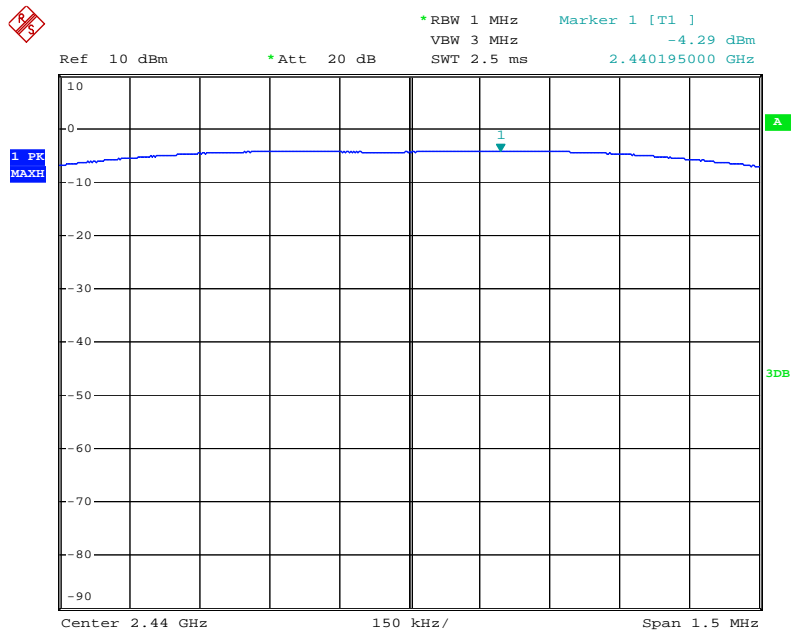

Date: 11.JUN.2014 14:35:43

## channel 39

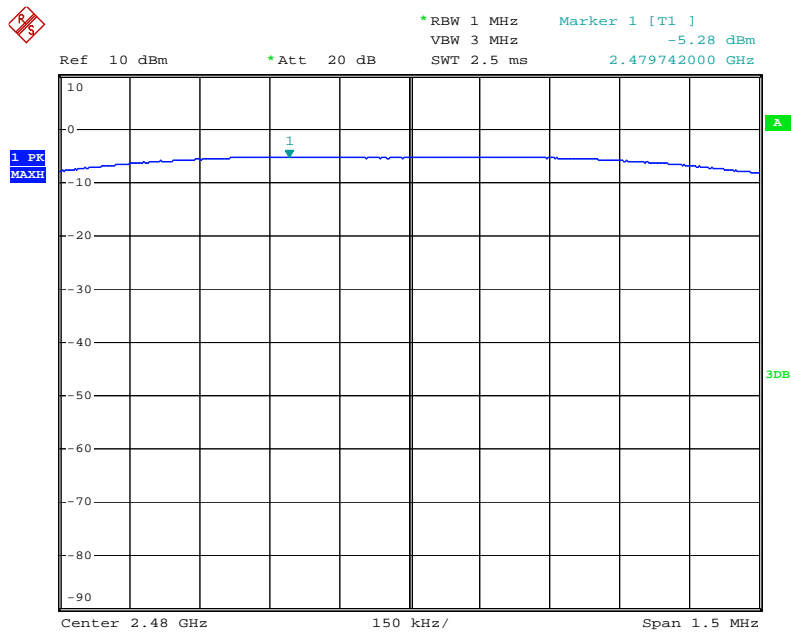


Date: 11.JUN.2014 14:36:33



## 7. POWER SPECTRAL DENSITY MEASUREMENT

### 7.1. Block Diagram of Test Setup

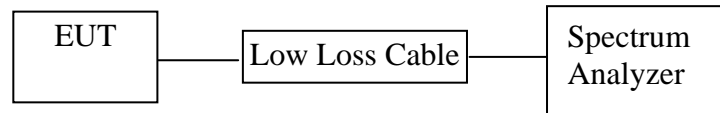

(EUT: MID)

### 7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.3. EUT Configuration on Measurement

The equipment is installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 8.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 7.5. Test Procedure

7.5.1. The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements.

7.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

### 7.5.3. Measurement Procedure PKPSD:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.5.4. Measurement the maximum power spectral density.

### 7.6. Test Result

CHANNEL NUMBER	FREQUENCY (MHz )	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-17.90	8	PASS
19	2440	-17.56	8	PASS
39	2480	-16.56	8	PASS


The spectrum analyzer plots are attached as below.

*channel 0*

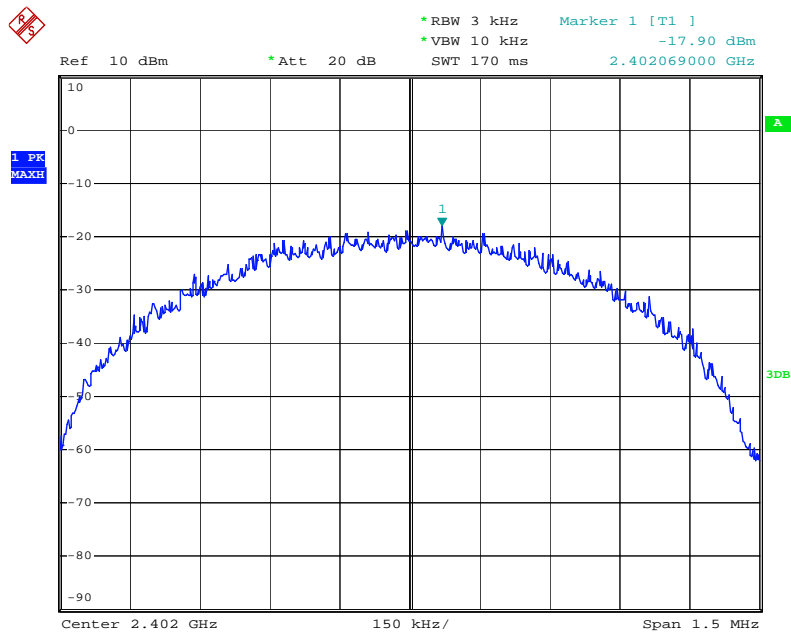


Date: 11.JUN.2014 14:38:50

*channel 19*

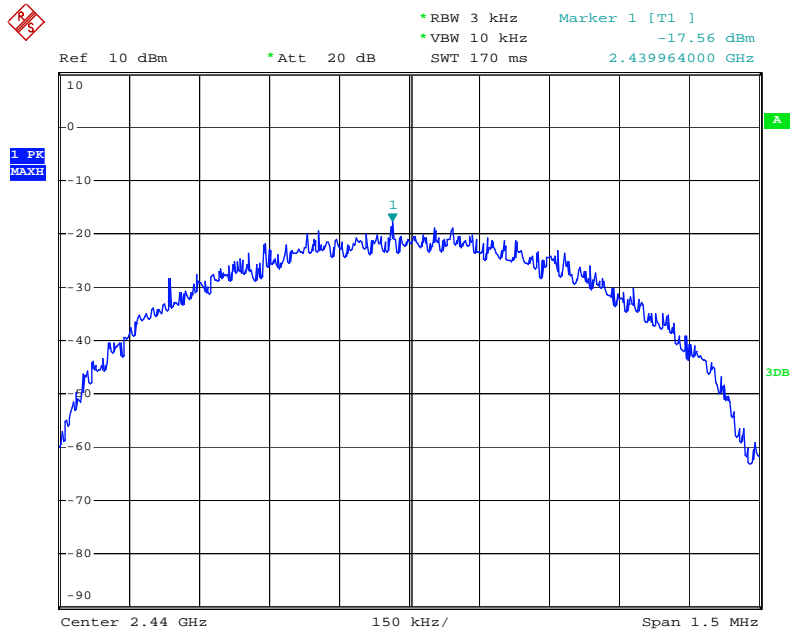

Date: 11.JUN.2014 14:39:20


*channel 39*

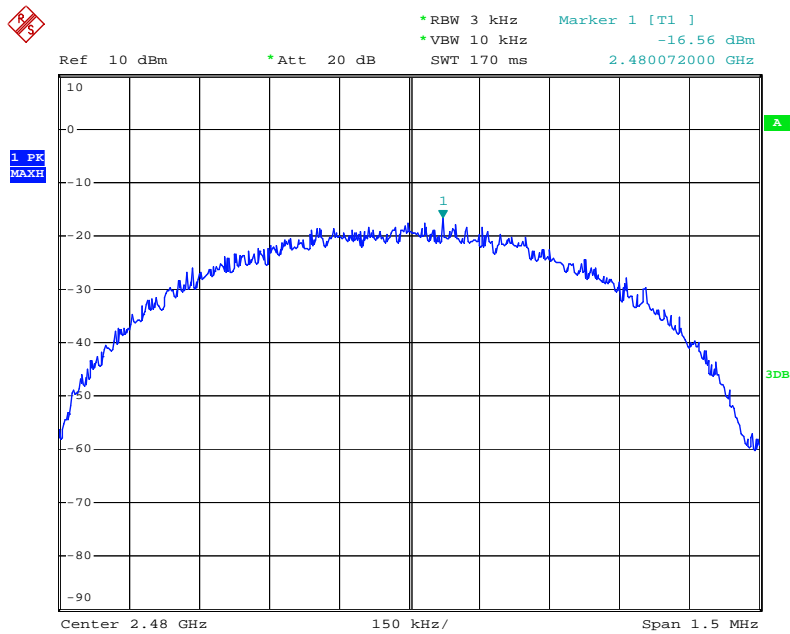

Date: 11.JUN.2014 14:37:43

## 8. BAND EDGE COMPLIANCE TEST

### 8.1. Block Diagram of Test Setup

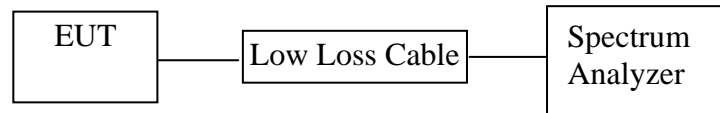

(EUT: MID)

### 8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 8.3. EUT Configuration on Measurement

The equipment is installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 9.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

## 8.5. Test Procedure

### Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

### Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz


8.5.7. The band edges was measured and recorded.

## 8.6. Test Result

### Pass


Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2390.0MHz	53.81	20
39	2483.7MHz	54.51	20

### channel 0

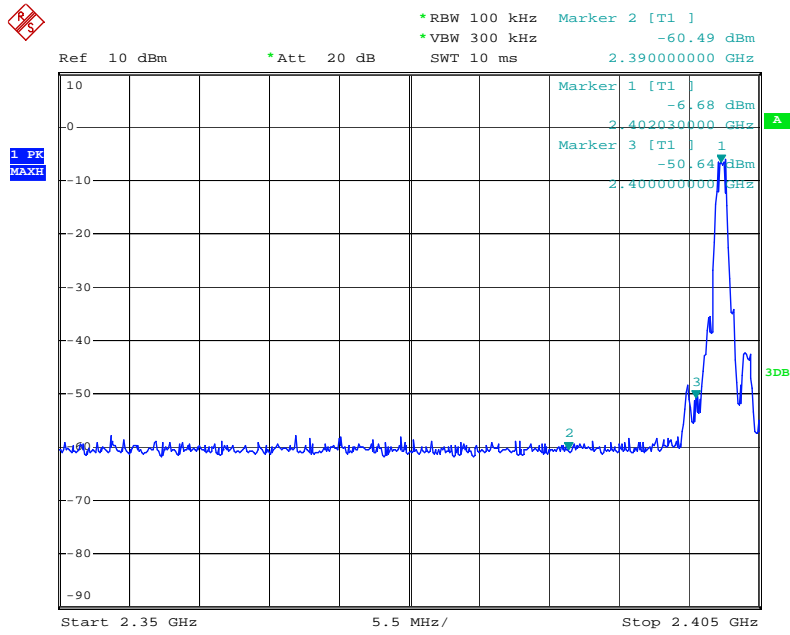

Date: 11.JUN.2014 14:44:05

### channel 39

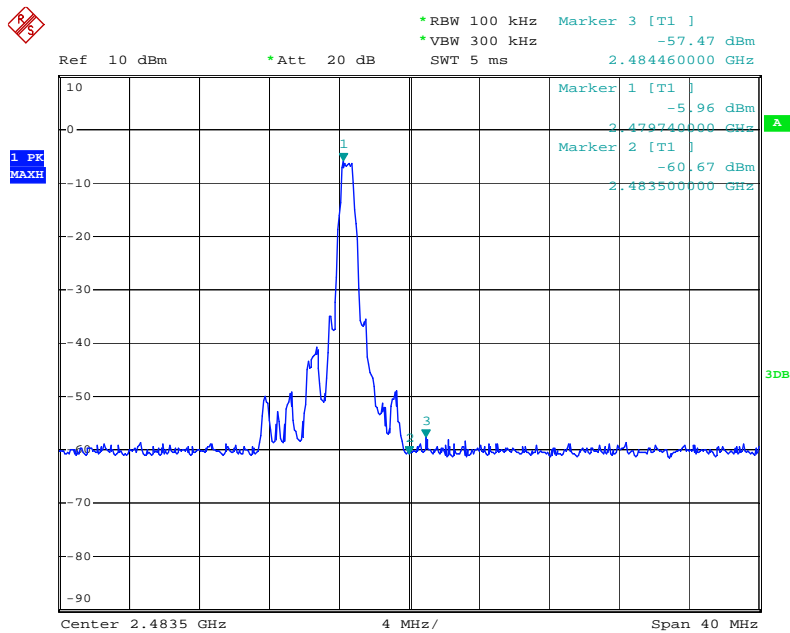

Date: 11.JUN.2014 14:40:46

### Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:  
Result = Reading + Corrected Factor
3. Display the measurement of peak values.



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ricky #1538

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 49 %

EUT: MID

Mode: TX 2402MHz

Model: PC7810BXC

Manufacturer: Natural

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/09/

Time: 10/22/24

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20140923

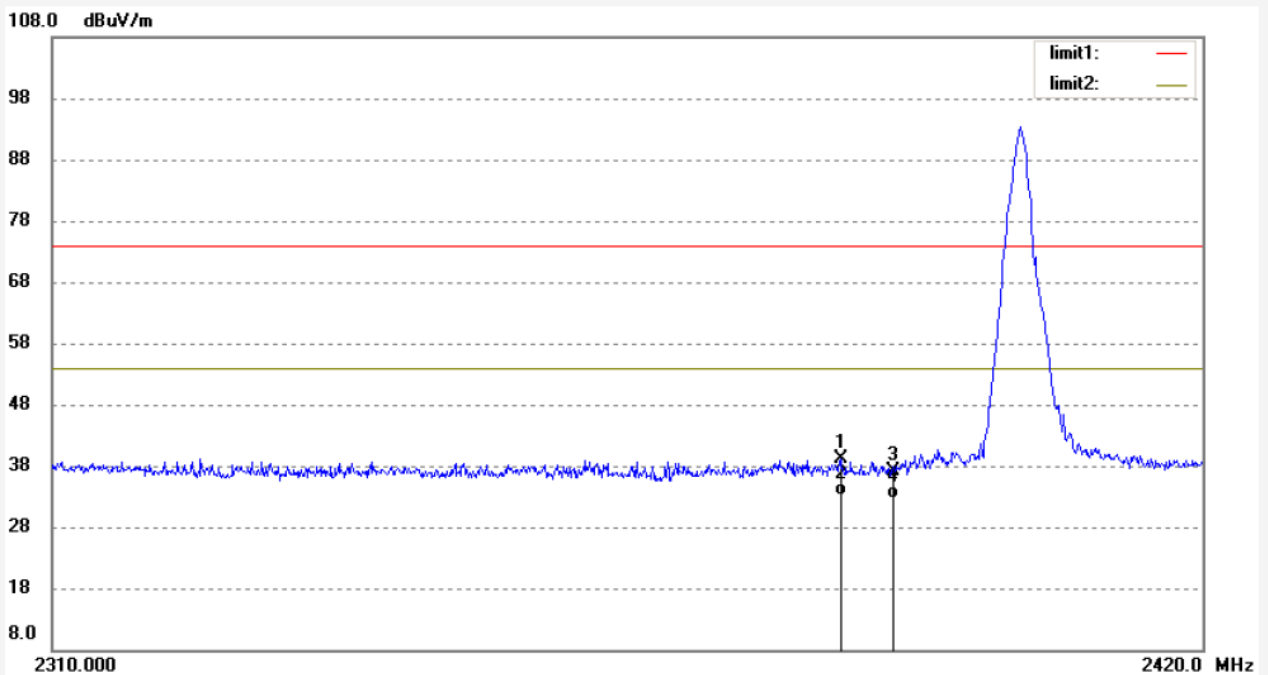

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2384.838	46.78	-7.56	39.22	74.00	-34.78	peak			
2	2384.838	40.65	-7.56	33.09	54.00	-20.91	AVG			
3	2390.000	44.63	-7.53	37.10	74.00	-36.90	peak			
4	2390.000	40.12	-7.53	32.59	54.00	-21.41	AVG			





**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ricky #1539	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/06/09/
Temp.( C)/Hum.(%) 23 C / 49 %	Time: 10/23/25
EUT: MID	Engineer Signature: Ricky
Mode: TX 2402MHz	Distance: 3m
Model: PC7810BXC	
Manufacturer: Natural	

Note: Report No.:ATE20140923

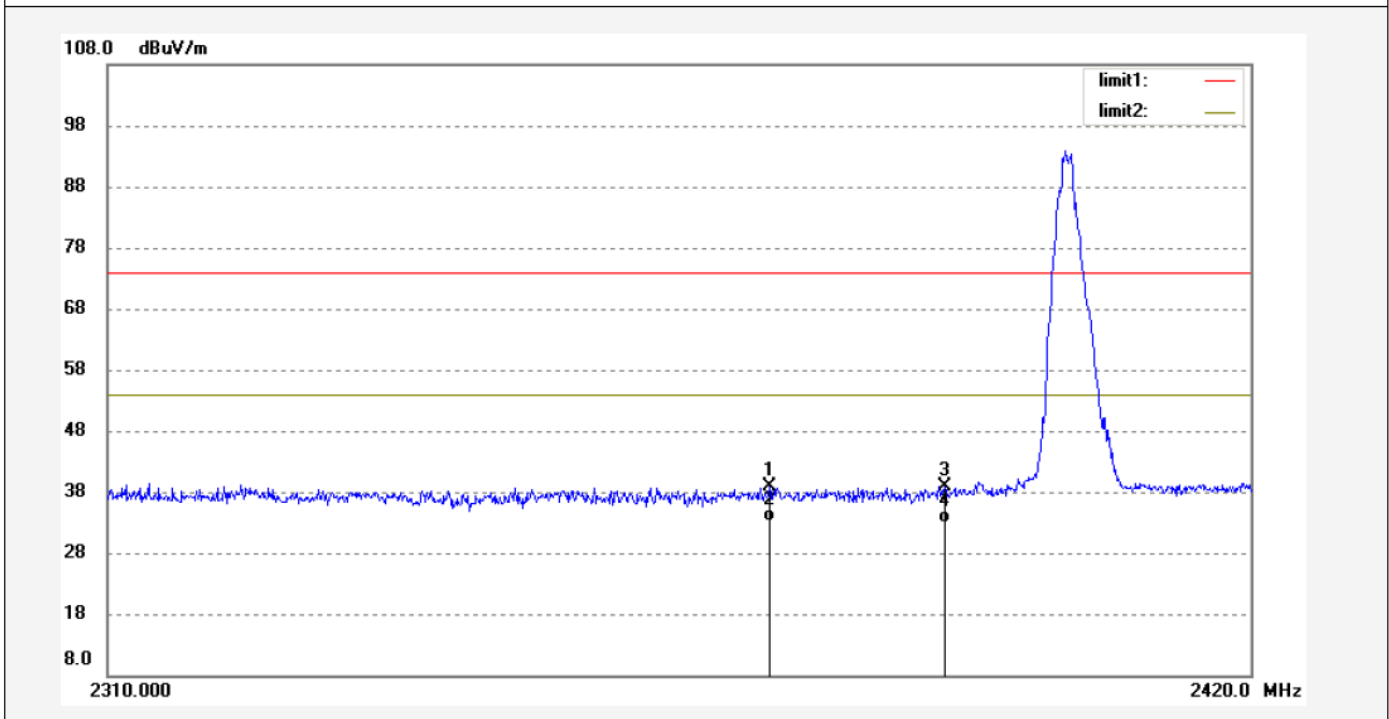

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2373.083	46.55	-7.64	38.91	74.00	-35.09	peak			
2	2373.083	40.73	-7.64	33.09	54.00	-20.91	AVG			
3	2390.000	46.40	-7.53	38.87	74.00	-35.13	peak			
4	2390.000	40.41	-7.53	32.88	54.00	-21.12	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ricky #1536

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 49 %

EUT: MID

Mode: TX 2480MHz

Model: PC7810BXC

Manufacturer: Natural

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/06/09/

Time: 10/20/54

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20140923

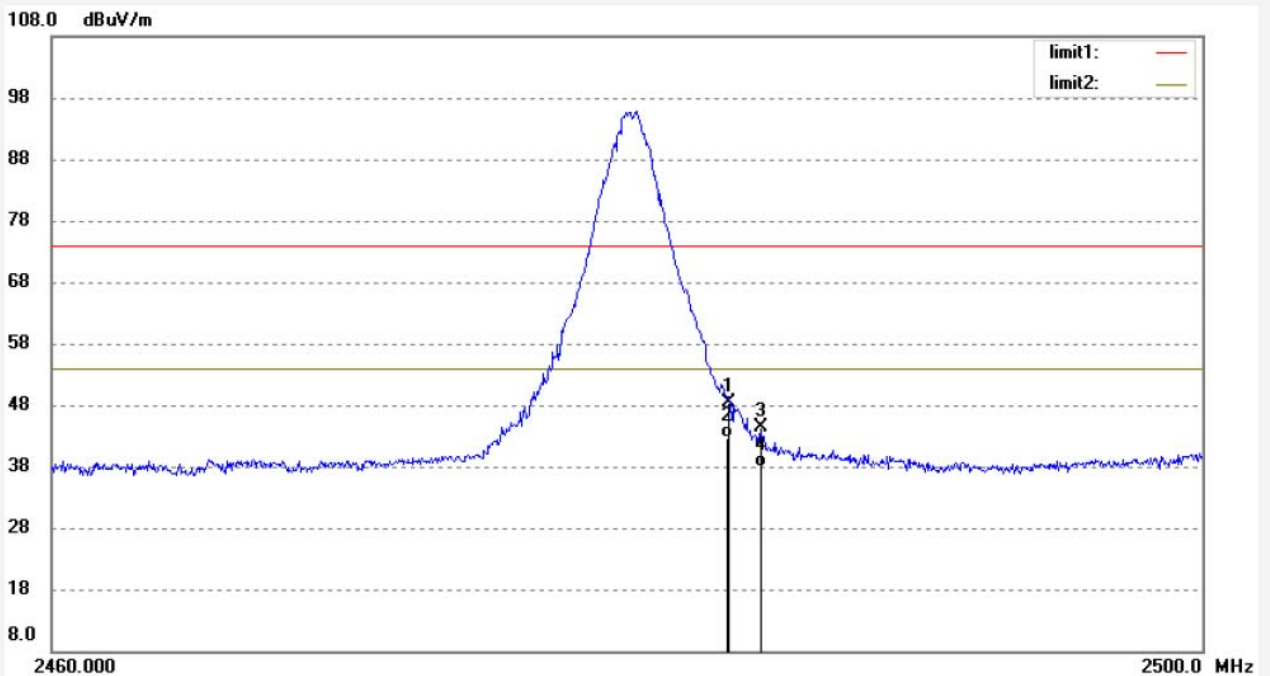


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	55.65	-7.37	48.28	74.00	-25.72	peak			
2	2483.500	50.12	-7.37	42.75	54.00	-11.25	AVG			
3	2484.573	51.74	-7.38	44.36	74.00	-29.64	peak			
4	2484.573	45.30	-7.38	37.92	54.00	-16.08	AVG			

Job No.: ricky #1537  
 Standard: FCC PK  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 49 %  
 EUT: MID  
 Mode: TX 2480MHz  
 Model: PC7810BXC  
 Manufacturer: Natural

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 14/06/09/  
 Time: 10/21/21  
 Engineer Signature: Ricky  
 Distance: 3m

Note: Report No.:ATE20140923

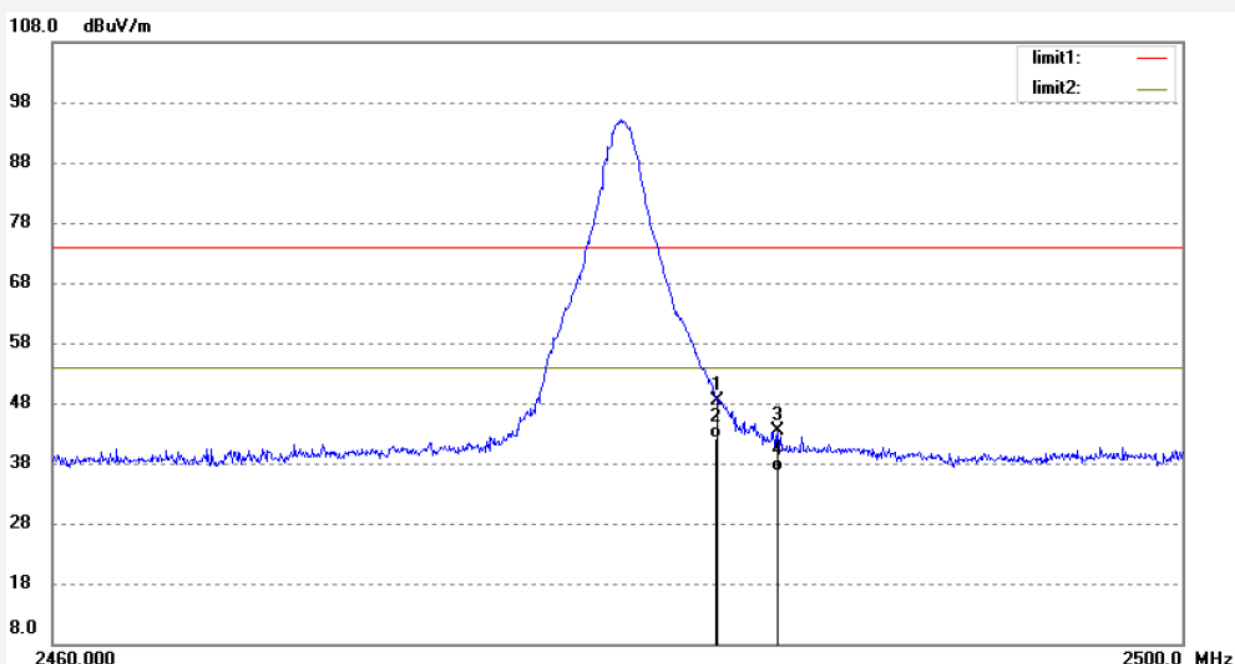


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	55.65	-7.37	48.28	74.00	-25.72	peak			
2	2483.500	49.51	-7.37	42.14	54.00	-11.86	AVG			
3	2485.617	50.81	-7.38	43.43	74.00	-30.57	peak			
4	2485.617	44.13	-7.38	36.75	54.00	-17.25	AVG			

## 9. RADIATED SPURIOUS EMISSION TEST

### 9.1. Block Diagram of Test Setup


#### 9.1.1. Block diagram of connection between the EUT and peripherals

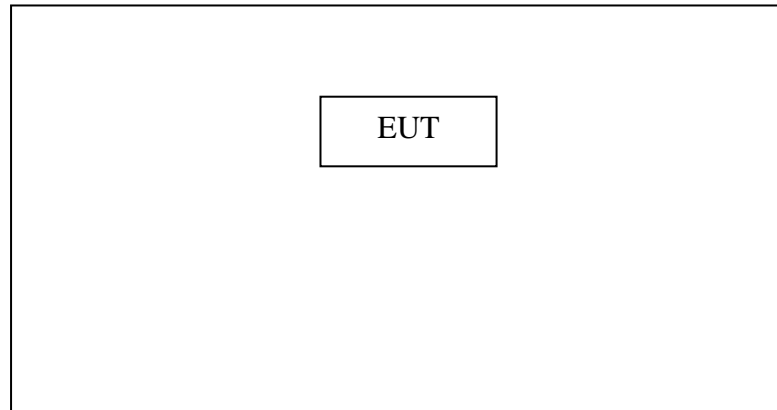

Setup: Transmitting mode

(EUT: MID)

#### 9.1.2. Semi-Anechoic Chamber Test Setup Diagram

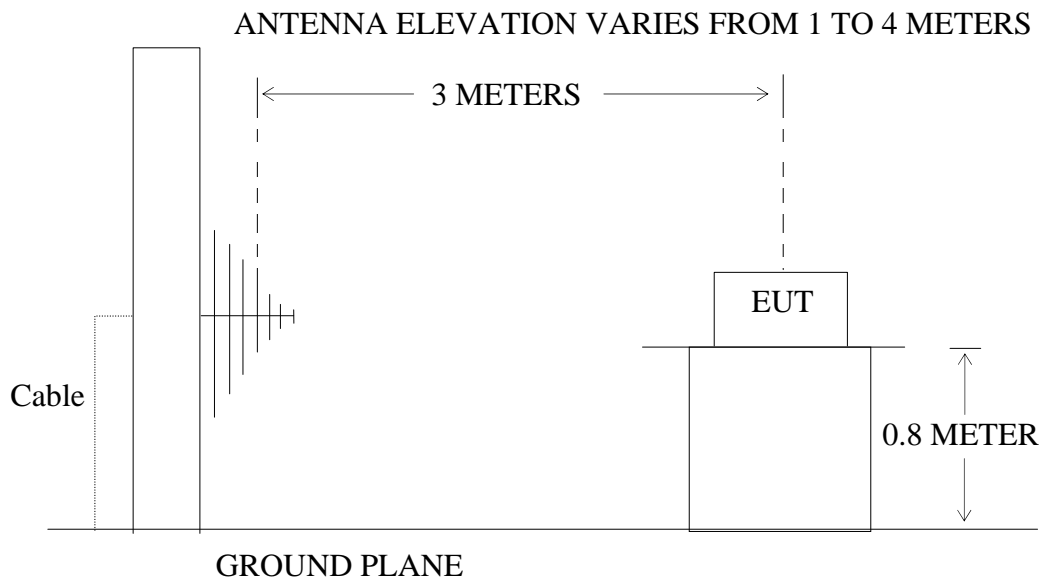

## 9.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

## 9.3.Restricted bands of operation

### 9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 9.4. Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 10.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

## 9.7. The Field Strength of Radiation Emission Measurement Results

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The EUT is tested radiation emission at Low, Middle, High channel in three axes. The worst emissions are reported in all channels. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

3. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

4. The average measurement was not performed when peak measured data under the limit of average detection.



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ricky #1522	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/06/09/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 9/11/36
EUT: MID	Engineer Signature: Ricky
Mode: TX 2402MHz	Distance: 3m
Model: PC7810BXC	
Manufacturer: Natural	

Note: Report No.:ATE20140923

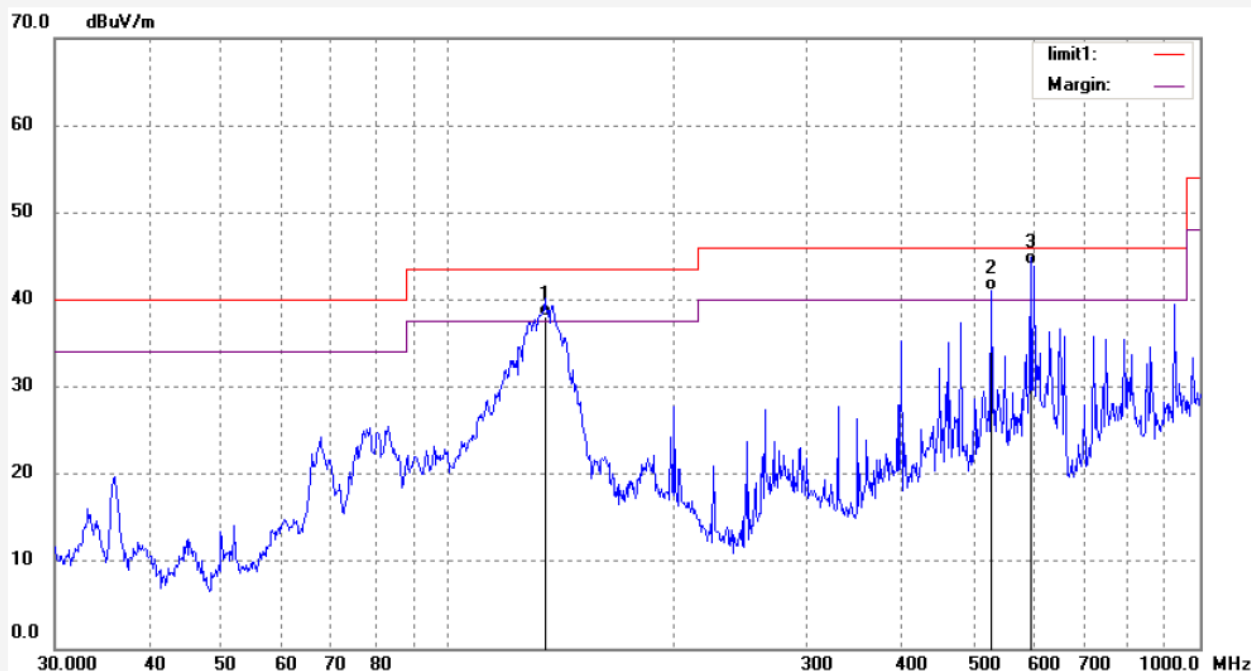

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	134.5592	61.38	-23.25	38.13	43.50	-5.37	QP			
2	528.2458	54.32	-13.32	41.00	46.00	-5.00	QP			
3	595.1327	55.79	-11.79	44.00	46.00	-2.00	QP			



Job No.: ricky #1523

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: MID

Mode: TX 2402MHz

Model: PC7810BXC

Manufacturer: Natural

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/09/

Time: 9/12/37

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20140923

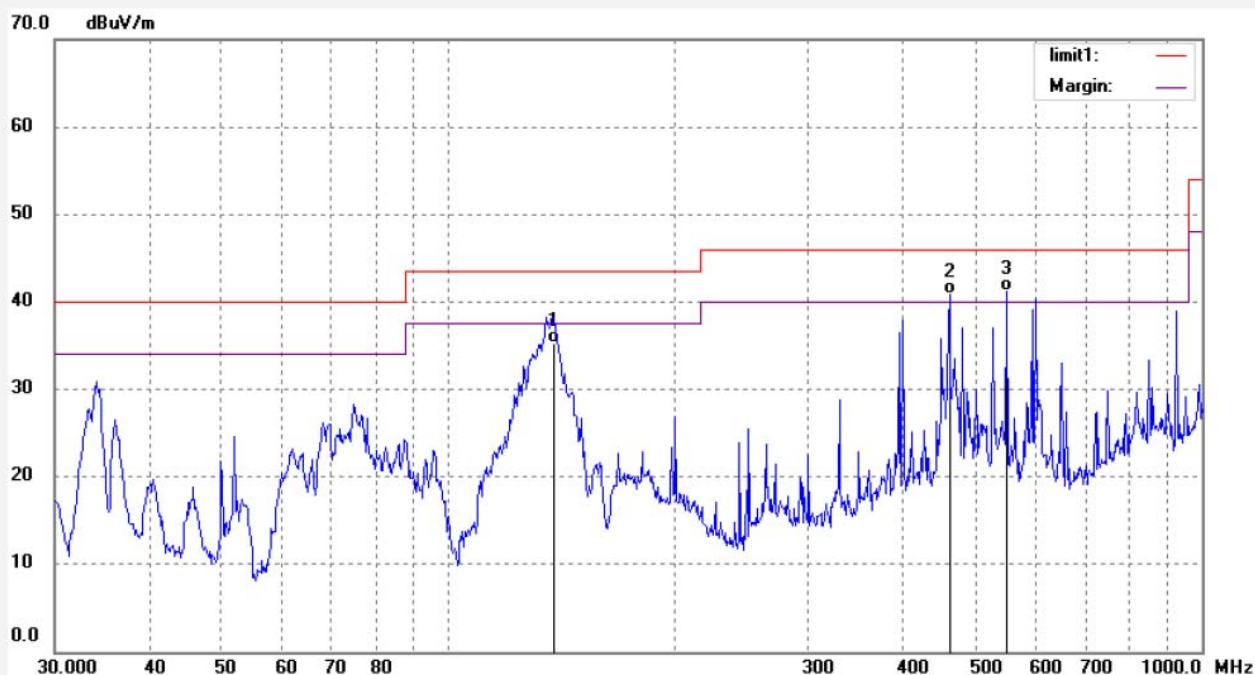

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	137.9028	58.69	-23.39	35.30	43.50	-8.20	QP			
2	462.3455	55.29	-14.37	40.92	46.00	-5.08	QP			
3	550.9480	53.95	-12.82	41.13	46.00	-4.87	QP			



Job No.: ricky #1524

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: MID

Mode: TX 2440MHz

Model: PC7810BXC

Manufacturer: Natural

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/09/

Time: 9/14/38

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20140923

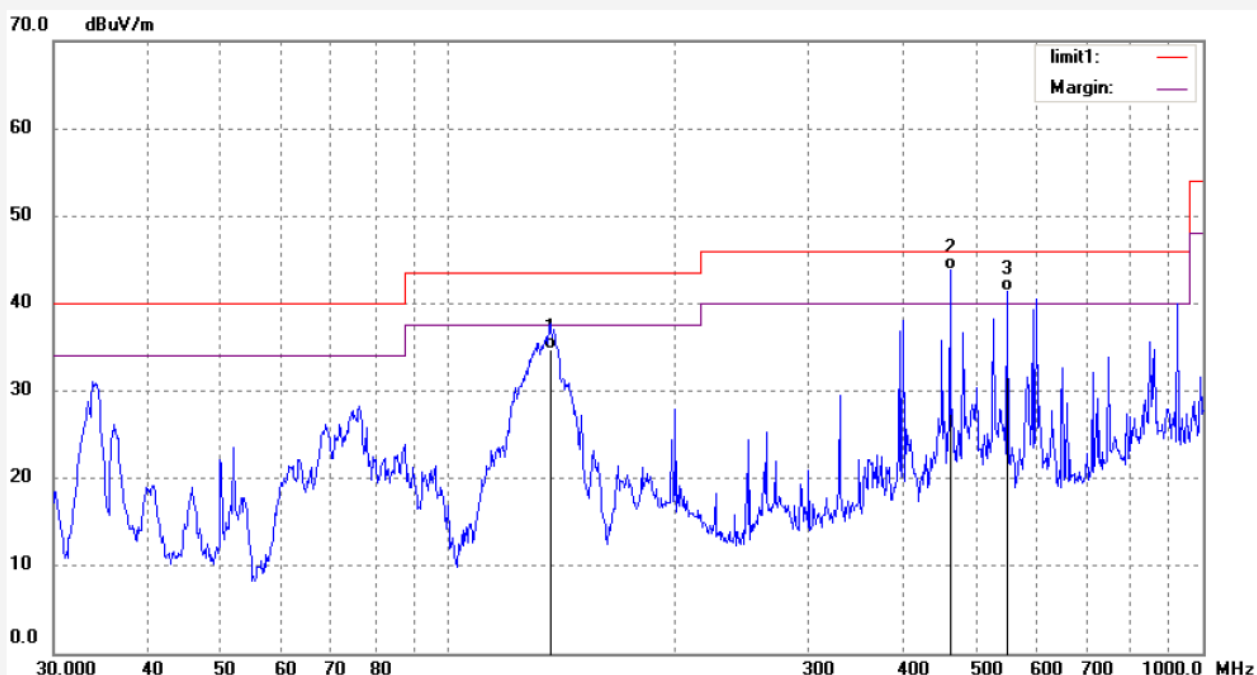

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	136.4598	58.07	-23.33	34.74	43.50	-8.76	QP			
2	462.3455	58.15	-14.37	43.78	46.00	-2.22	QP			
3	550.9480	54.28	-12.82	41.46	46.00	-4.54	QP			



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ricky #1525  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: MID  
Mode: TX 2440MHz  
Model: PC7810BXC  
Manufacturer: Natural

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 14/06/09/  
Time: 9/15/52  
Engineer Signature: Ricky  
Distance: 3m


Note: Report No.:ATE20140923

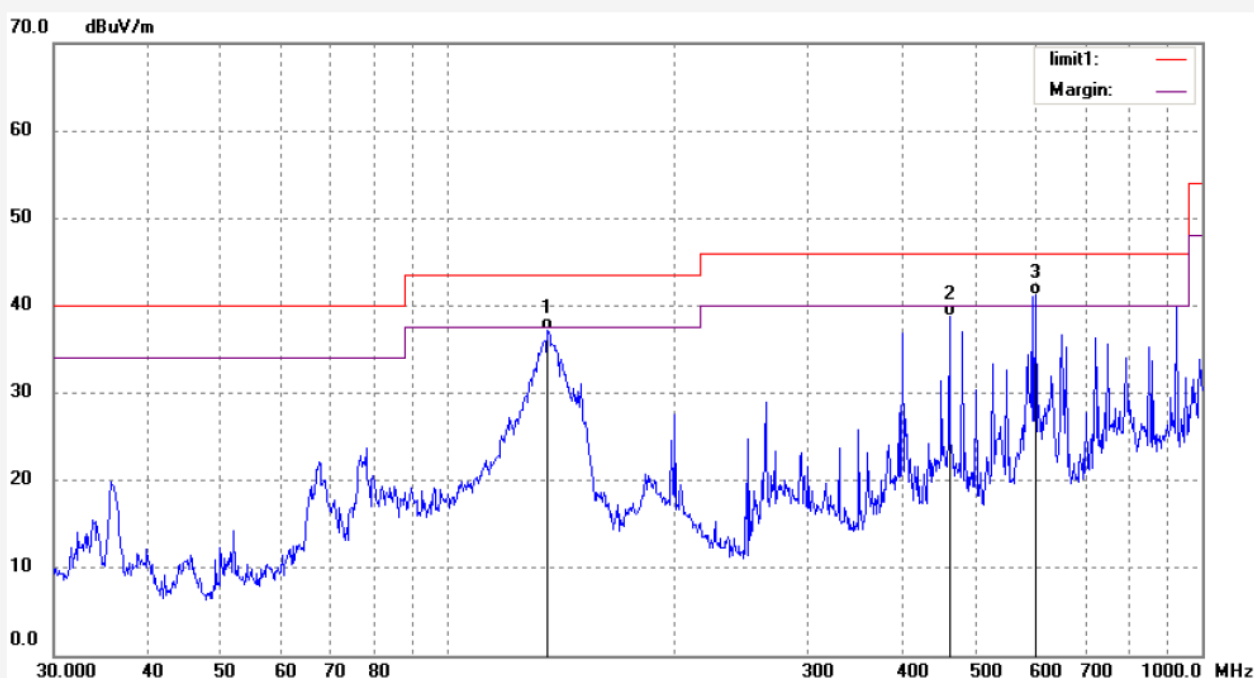

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	135.5062	60.55	-23.29	37.26	43.50	-6.24	QP			
2	462.3455	53.15	-14.37	38.78	46.00	-7.22	QP			
3	601.4265	52.87	-11.65	41.22	46.00	-4.78	QP			

Job No.: ricky #1526	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/06/09/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 9/17/31
EUT: MID	Engineer Signature: Ricky
Mode: TX 2480MHz	Distance: 3m
Model: PC7810BXC	
Manufacturer: Natural	

Note: Report No.:ATE20140923

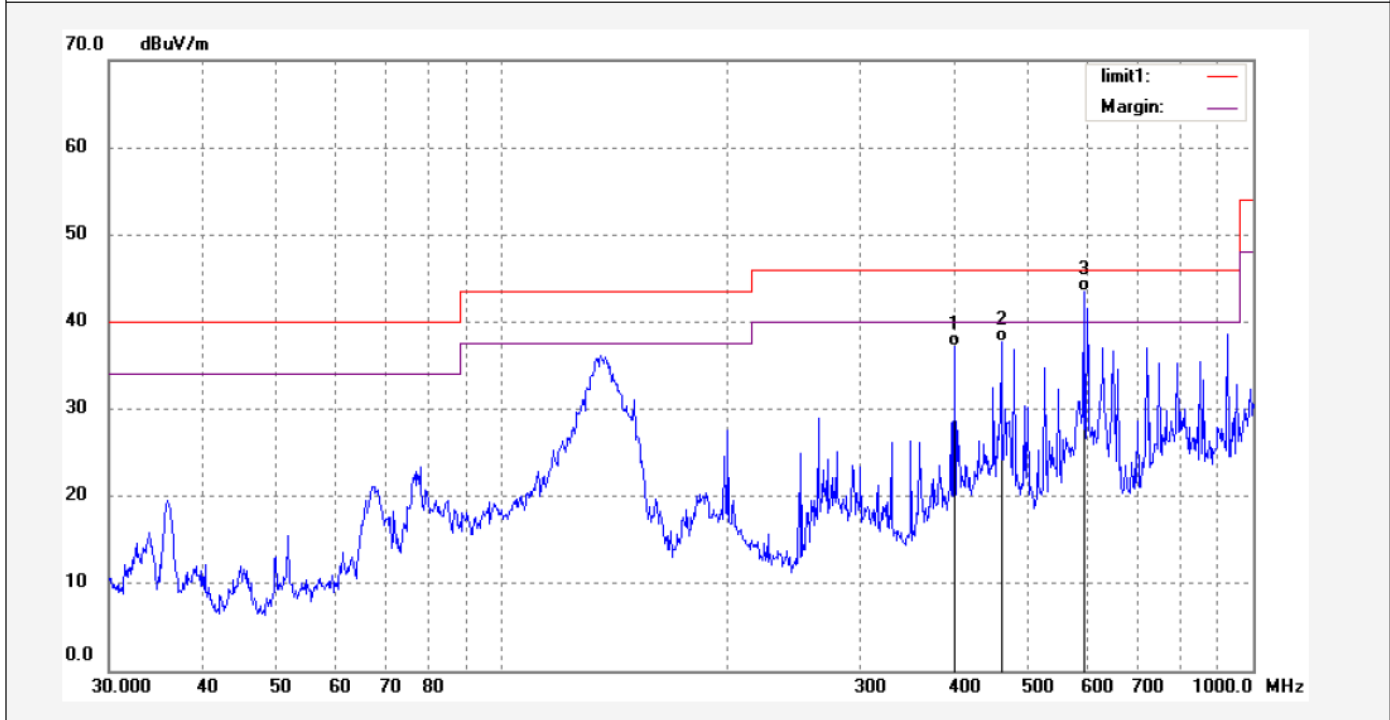


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	400.4319	52.76	-15.63	37.13	46.00	-8.87	QP			
2	462.3455	52.08	-14.37	37.71	46.00	-8.29	QP			
3	595.1329	55.24	-11.79	43.45	46.00	-2.55	QP			

Job No.: ricky #1527  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: MID  
 Mode: TX 2480MHz  
 Model: PC7810BXC  
 Manufacturer: Natural

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 14/06/09/  
 Time: 9/18/42  
 Engineer Signature: Ricky  
 Distance: 3m

Note: Report No.:ATE20140923

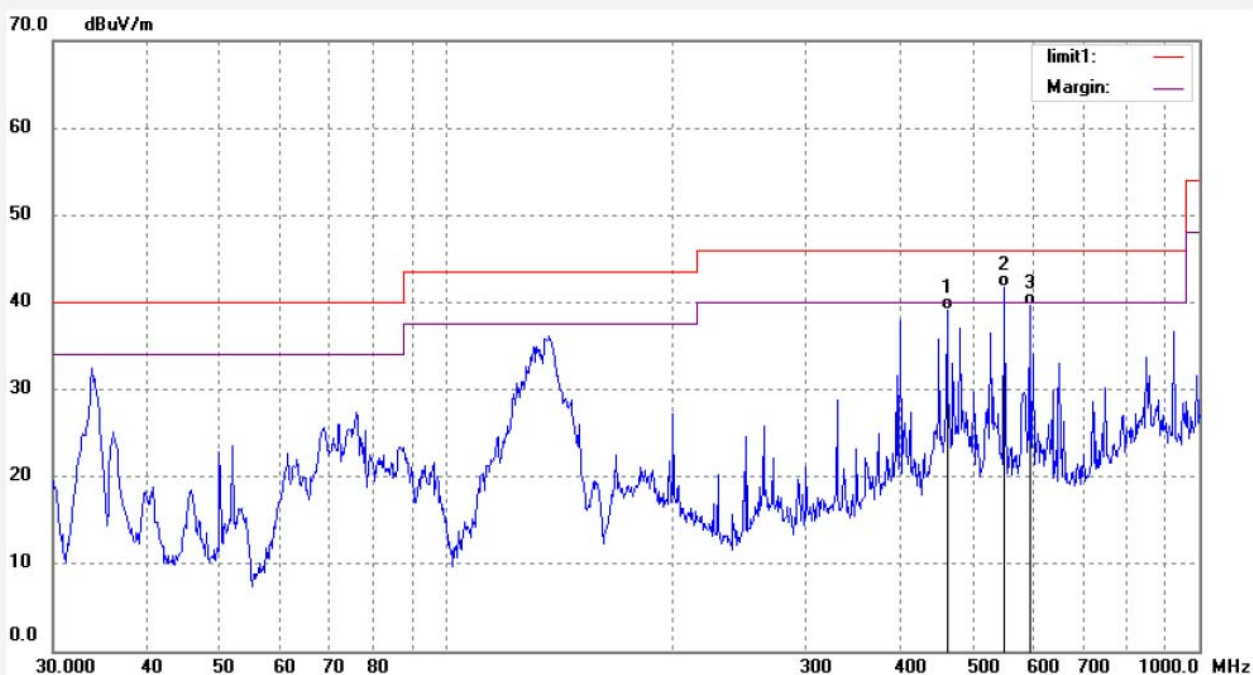


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	462.3455	53.53	-14.37	39.16	46.00	-6.84	QP			
2	550.9480	54.50	-12.82	41.68	46.00	-4.32	QP			
3	595.1329	51.40	-11.79	39.61	46.00	-6.39	QP			

Job No.: ricky #1533  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: MID  
 Mode: TX 2402MHz  
 Model: PC7810BXC  
 Manufacturer: Natural

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 14/06/09/  
 Time: 9/35/06  
 Engineer Signature: Ricky  
 Distance: 3m

Note: Report No.:ATE20140923

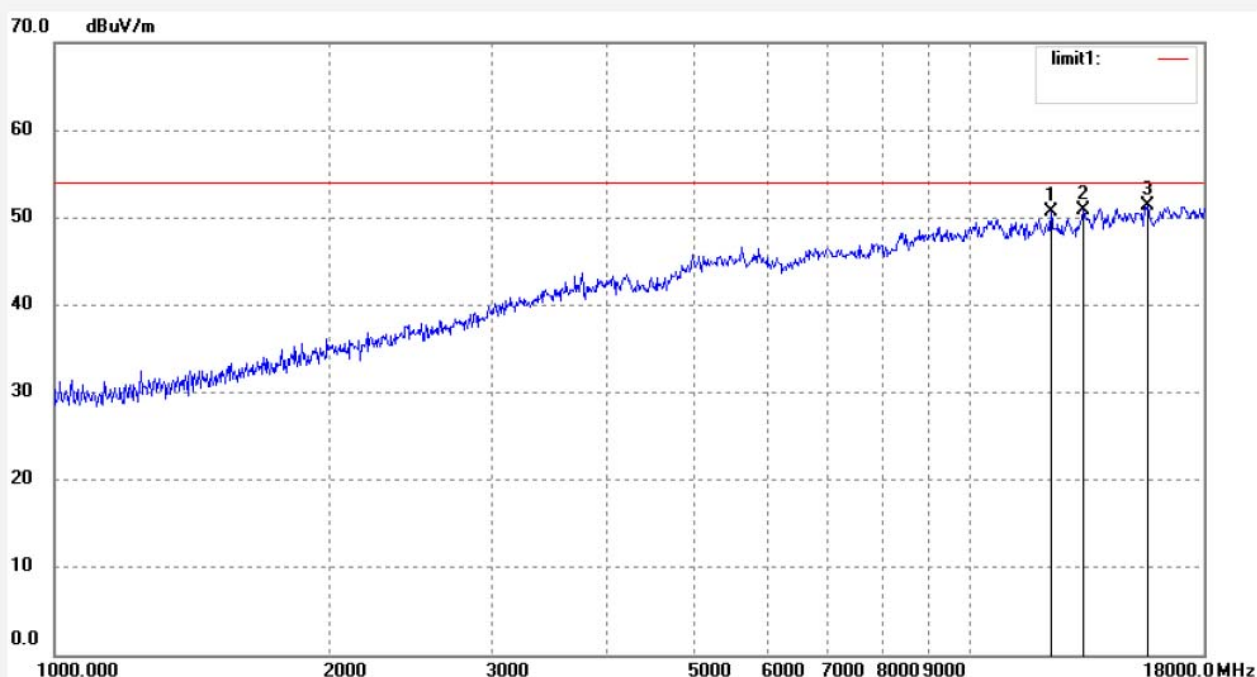

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	12255.224	5.59	45.06	50.65	54.00	-3.35	peak			
2	13288.284	4.27	46.64	50.91	54.00	-3.09	peak			
3	15622.990	2.81	48.53	51.34	54.00	-2.66	peak			



Job No.: ricky #1532

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: MID

Mode: TX 2402MHz

Model: PC7810BXC

Manufacturer: Natural

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/09/

Time: 9/30/49

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20140923

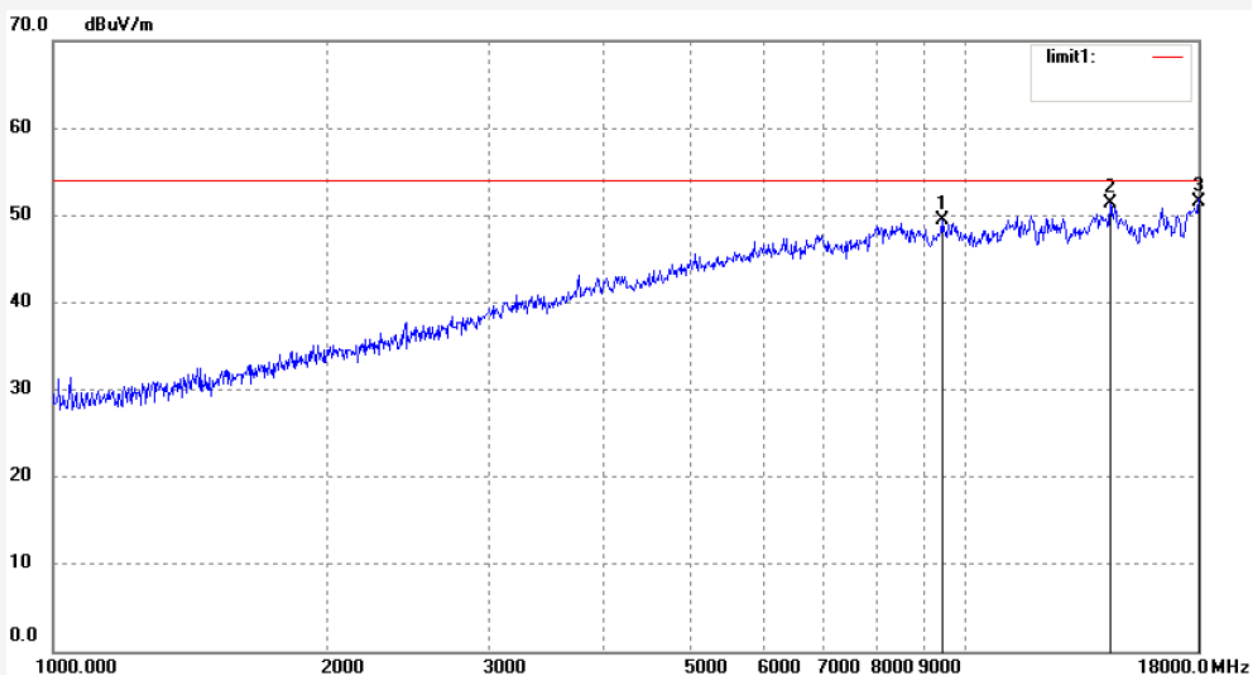

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	9420.880	38.97	10.51	49.48	54.00	-4.52	peak			
2	14408.425	1.30	49.99	51.29	54.00	-2.71	peak			
3	18000.000	-4.10	55.70	51.60	54.00	-2.40	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: ricky #1531  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: MID  
Mode: TX 2440MHz  
Model: PC7810BXC  
Manufacturer: Natural

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 14/06/09/  
Time: 9/28/10  
Engineer Signature: Ricky  
Distance: 3m

Note: Report No.:ATE20140923

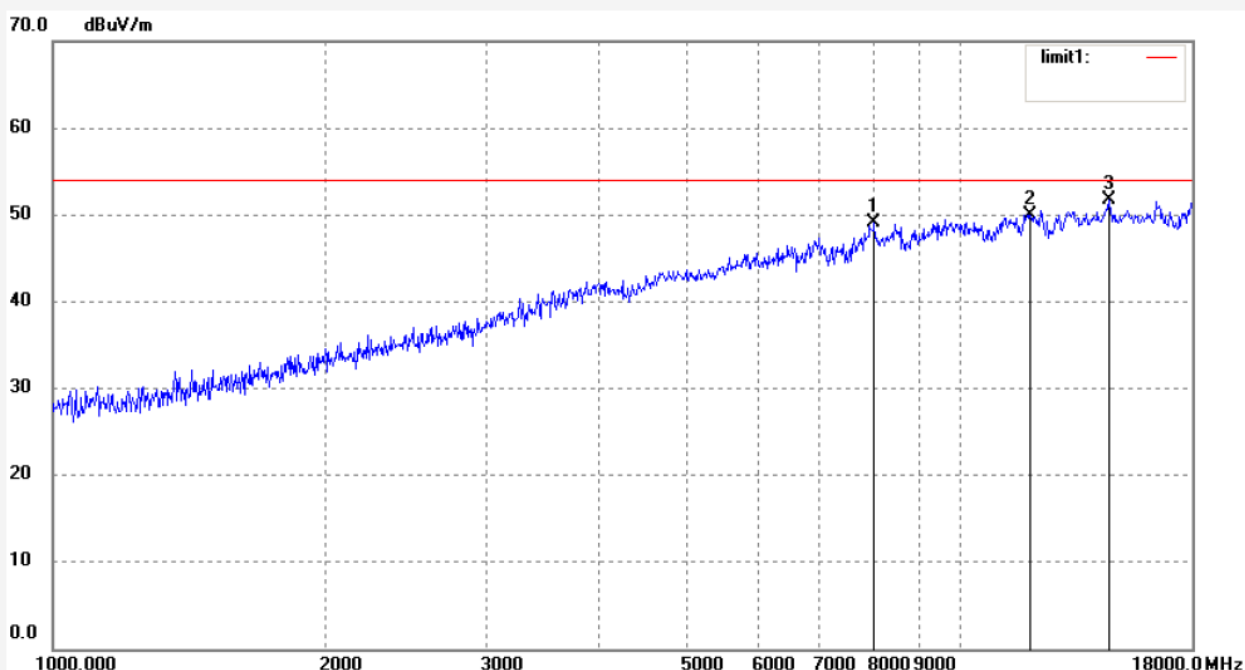


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	8036.214	40.79	8.38	49.17	54.00	-4.83	peak			
2	11940.536	37.69	12.33	50.02	54.00	-3.98	peak			
3	14575.975	1.53	50.27	51.80	54.00	-2.20	peak			

Job No.: ricky #1530  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: MID  
 Mode: TX 2440MHz  
 Model: PC7810BXC  
 Manufacturer: Natural

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 14/06/09/  
 Time: 9/26/40  
 Engineer Signature: Ricky  
 Distance: 3m

Note: Report No.:ATE20140923

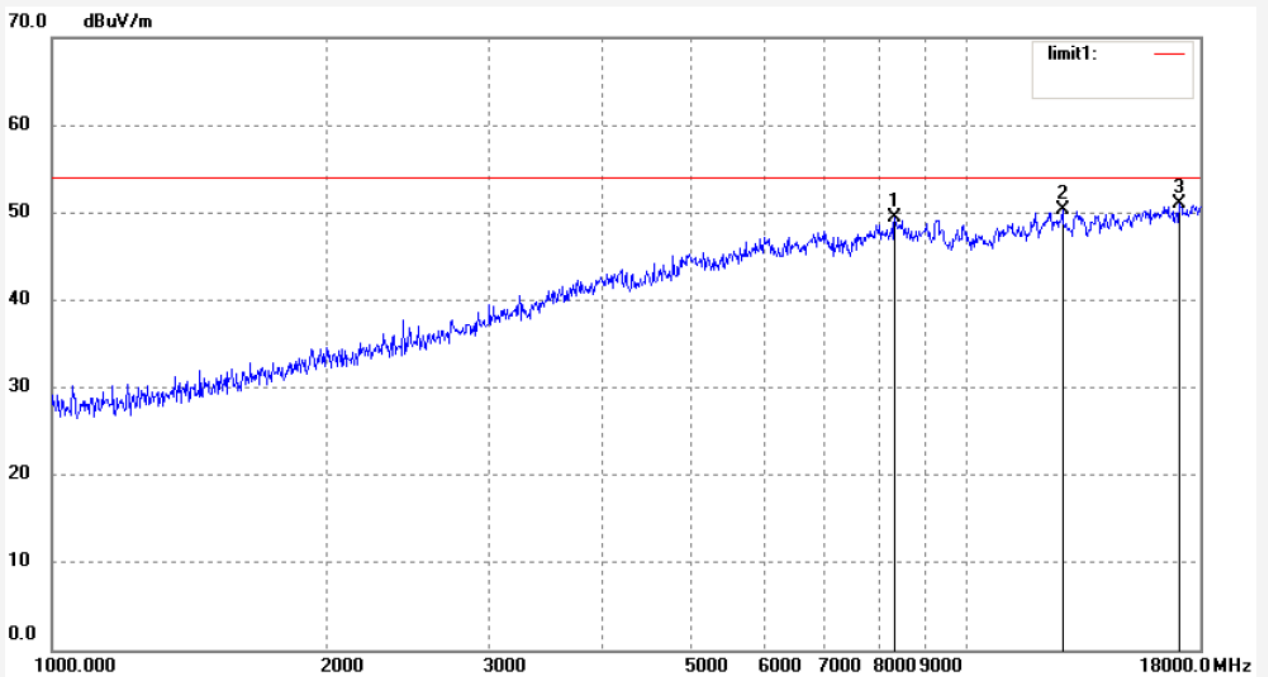

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	8343.918	40.43	8.95	49.38	54.00	-4.62	peak			
2	12724.473	4.51	45.76	50.27	54.00	-3.73	peak			
3	17087.464	0.02	50.95	50.97	54.00	-3.03	peak			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: ricky #1529	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/06/09/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 9/24/22
EUT: MID	Engineer Signature: Ricky
Mode: TX 2480MHz	Distance: 3m
Model: PC7810BXC	
Manufacturer: Natural	

Note: Report No.:ATE20140923

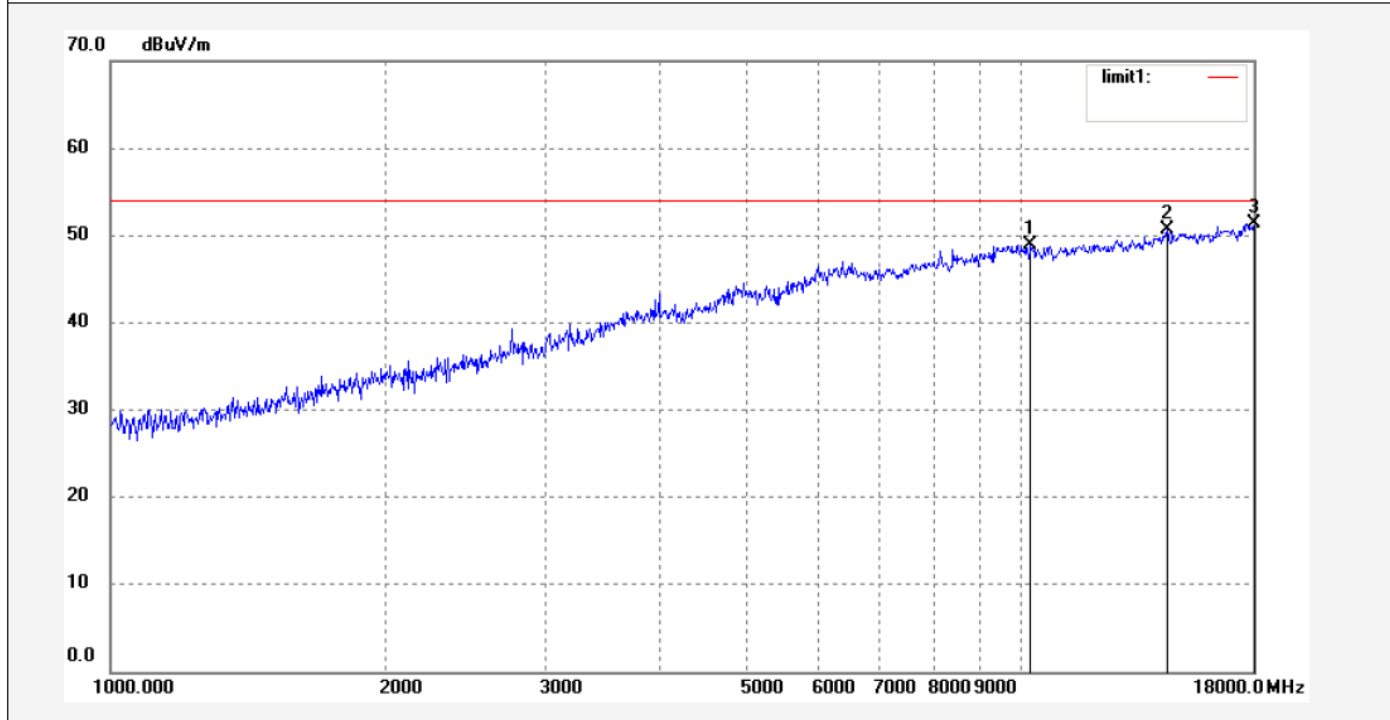

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	10244.585	38.66	10.33	48.99	54.00	-5.01	peak			
2	14450.131	0.51	50.20	50.71	54.00	-3.29	peak			
3	18000.000	-0.30	51.60	51.30	54.00	-2.70	peak			

Job No.: ricky #1528

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: MID

Mode: TX 2480MHz

Model: PC7810BXC

Manufacturer: Natural

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/06/09/

Time: 9/22/47

Engineer Signature: Ricky

Distance: 3m


Note: Report No.:ATE20140923

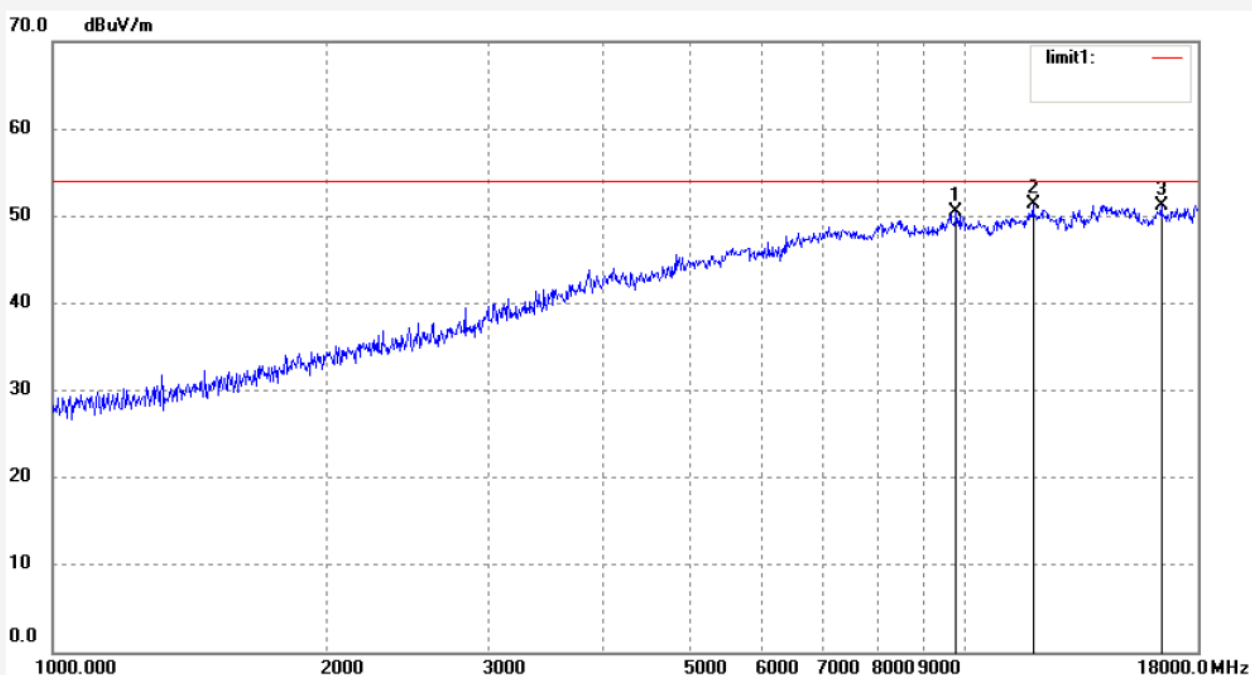

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	9781.602	39.70	10.84	50.54	54.00	-3.46	peak			
2	11871.710	38.47	12.84	51.31	54.00	-2.69	peak			
3	16409.819	2.12	49.10	51.22	54.00	-2.78	peak			

## 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

### 10.1. Block Diagram of Test Setup



(EUT: MID)

### 10.2. The Requirement of Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 11.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 10.5. Test Procedure

10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz


10.5.3. The Conducted Spurious Emission was measured and recorded.

## 10.6. Test Result

**Pass.**


The spectrum analyzer plots are attached as below.

### BLE Channel Low 2402MHz

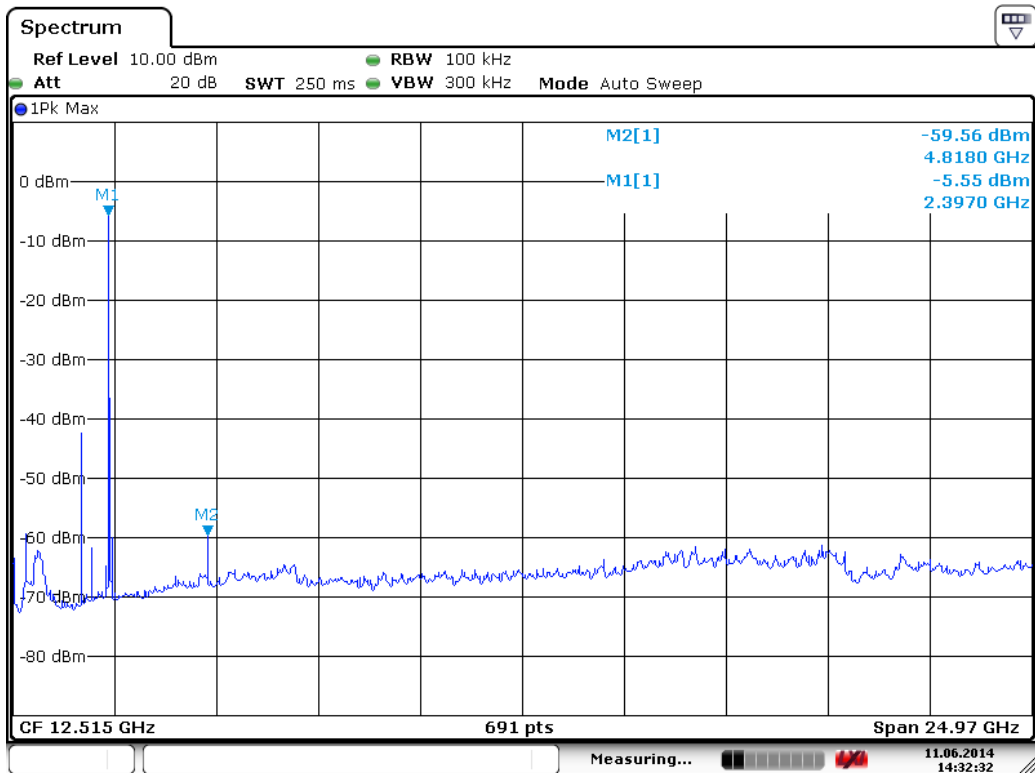


Date: 11.JUN.2014 14:32:32

### BLE Channel Middle 2440MHz

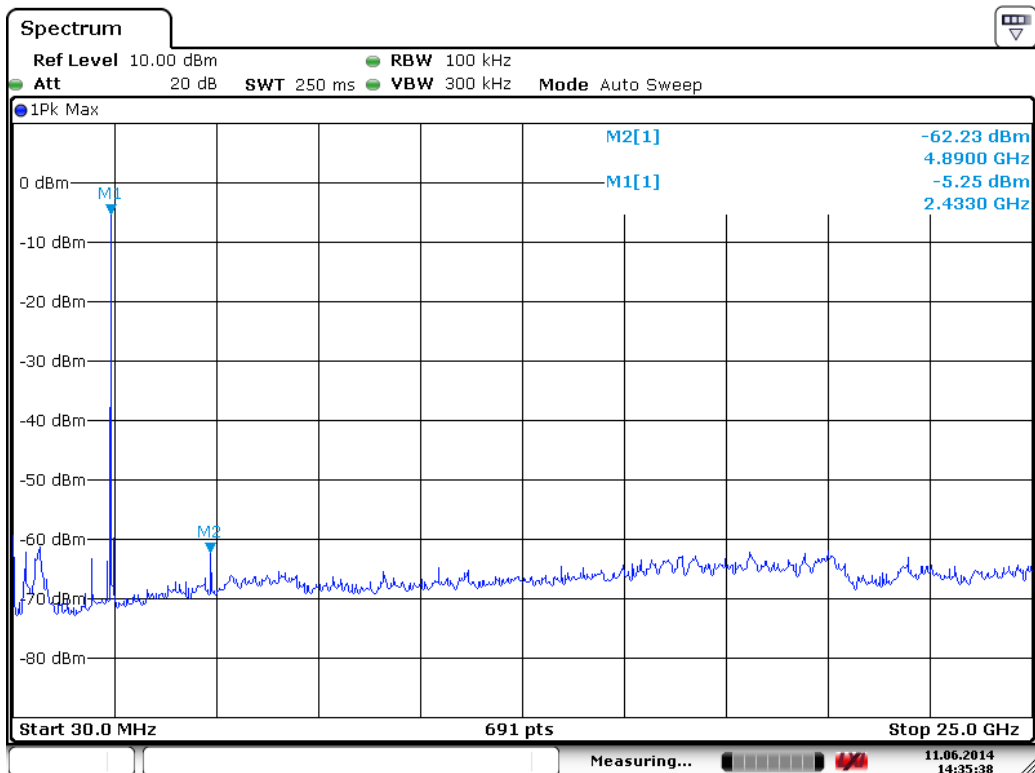

Date: 11.JUN.2014 14:35:38


### BLE Channel High 2480MHz

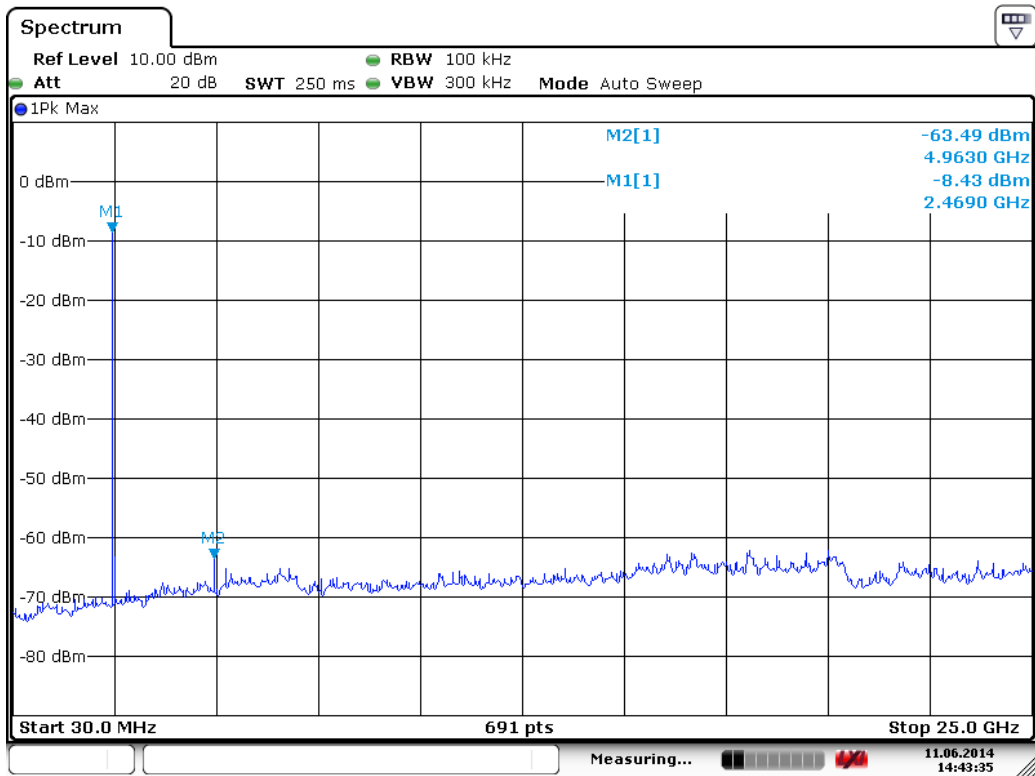

Date: 11.JUN.2014 14:43:34

## 11. POWER LINE CONDUCTED MEASUREMENT

### 11.1. Block Diagram of Test Setup

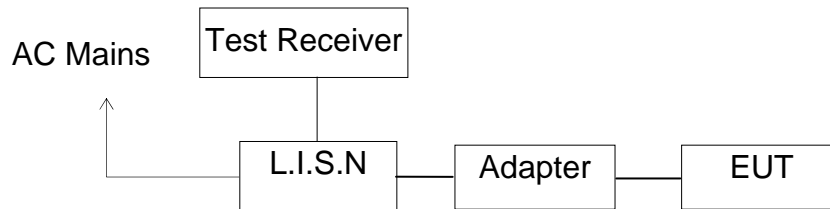

(EUT: MID)

### 11.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 11.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 11.4. Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 5.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in test mode and measure it.

### 11.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 11.6. Power Line Conducted Emission Measurement Results

**PASS.**

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.




ACCURATE TECHNOLOGY CO., LTD

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: MID M/N:PC7810BXC  
 Manufacturer: Natural  
 Operating Condition: Operation  
 Test Site: 1#Shielding Room  
 Operator: Ricky  
 Test Specification: N 120V/60Hz  
 Comment:  
 Report No.:ATE20140923

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

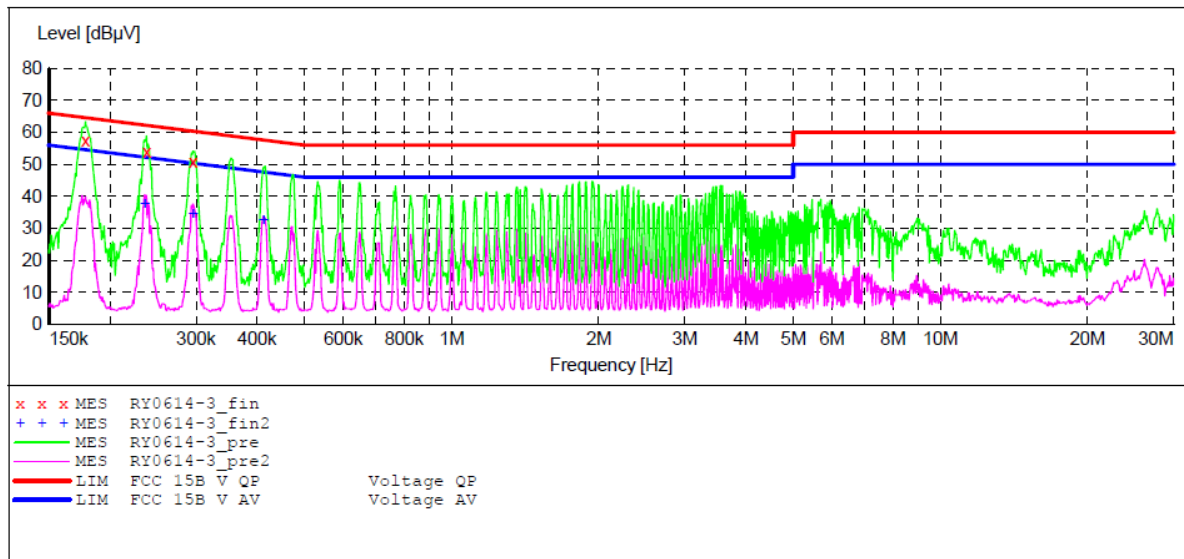

**MEASUREMENT RESULT: "RY0614-3\_fin"**

6/14/2014 10:32AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.178091	57.30	10.5	65	7.3	QP	N	GND
0.237393	54.00	10.6	62	8.2	QP	N	GND
0.295680	50.70	10.6	60	9.7	QP	N	GND

**MEASUREMENT RESULT: "RY0614-3\_fin2"**

6/14/2014 10:32AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.235505	37.60	10.6	52	14.7	AV	N	GND
0.295680	34.60	10.6	50	15.8	AV	N	GND
0.411832	32.60	10.7	48	15.0	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: MID M/N:PC7810BXC  
 Manufacturer: Natural  
 Operating Condition: Operation  
 Test Site: 1#Shielding Room  
 Operator: Ricky  
 Test Specification: L 120V/60Hz  
 Comment: Report No.:ATE20140923

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

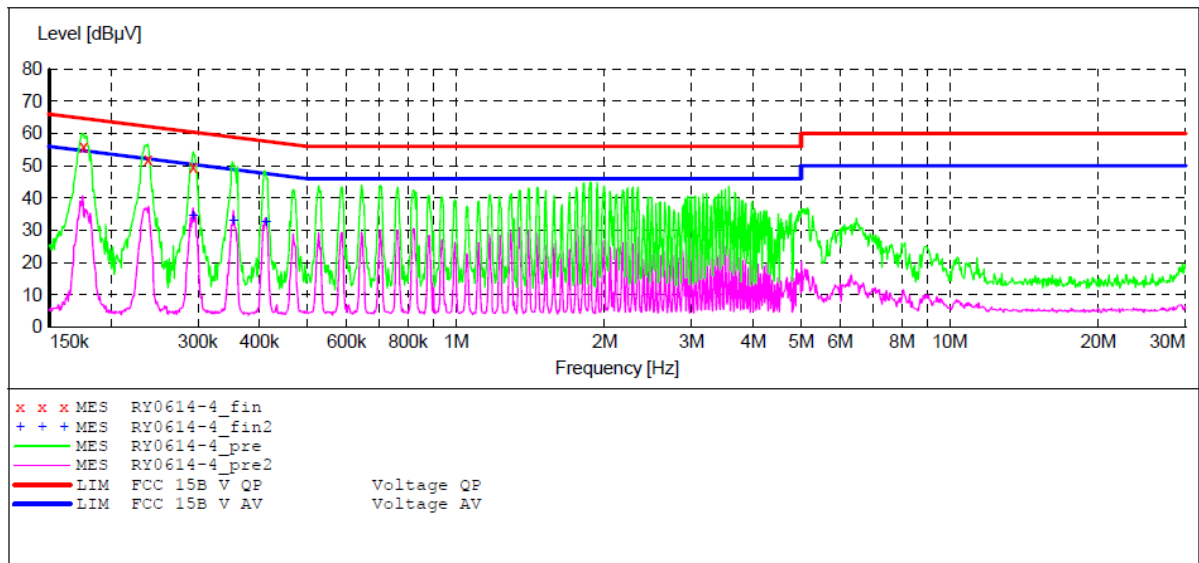

**MEASUREMENT RESULT: "RY0614-4\_fin"**

6/14/2014 10:35AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.175970	55.80	10.5	65	8.9	QP	L1	GND
0.237393	52.10	10.6	62	10.1	QP	L1	GND
0.293329	49.70	10.6	60	10.7	QP	L1	GND

**MEASUREMENT RESULT: "RY0614-4\_fin2"**

6/14/2014 10:35AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.293329	34.50	10.6	50	15.9	AV	L1	GND
0.353867	32.90	10.6	49	16.0	AV	L1	GND
0.411832	32.40	10.7	48	15.2	AV	L1	GND


## 12.ANTENNA REQUIREMENT

### 12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

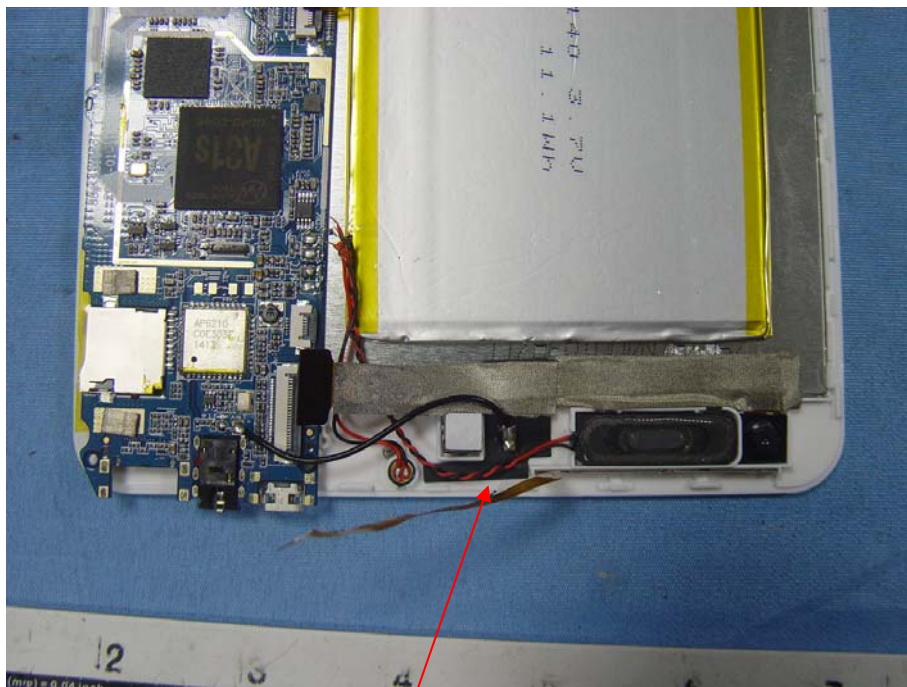

Antenna