

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
HONG KONG NATURAL SOUND ELECTRONICS LIMITED

MID
Model No.: PC9711, Trio-Stealth Pro 9.7C

FCC ID: PWK-PC9711

Prepared for : HONG KONG NATURAL SOUND ELECTRONICS
LIMITED

Address : FLAT/RM M 4/F CONTINENTAL MANSION 300
KING'S ROAD HONG KONG

Prepared by : ACCURATE TECHNOLOGY CO., LTD

Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290

Fax: (0755) 26503396

Report Number : ATE20122826

Date of Test : December 15-25, 2012

Date of Report : December 25, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	6
1.3. Test Procedure	6
1.4. Special Accessory and Auxiliary Equipment	6
1.5. Description of Test Facility	7
1.6. Measurement Uncertainty.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode.....	9
3.2. Configuration and peripherals	10
4. TEST PROCEDURES AND RESULTS	11
5. 6DB BANDWIDTH MEASUREMENT.....	12
5.1. Block Diagram of Test Setup.....	12
5.2. The Requirement For Section 15.247(a)(2).....	12
5.3. EUT Configuration on Measurement	12
5.4. Operating Condition of EUT	12
5.5. Test Procedure	13
5.6. Test Result	13
6. MAXIMUM PEAK OUTPUT POWER	27
6.1. Block Diagram of Test Setup.....	27
6.2. The Requirement For Section 15.247(b)(3).....	27
6.3. EUT Configuration on Measurement	27
6.4. Operating Condition of EUT	27
6.5. Test Procedure	28
6.6. Test Result	28
7. POWER SPECTRAL DENSITY MEASUREMENT.....	42
7.1. Block Diagram of Test Setup.....	42
7.2. The Requirement For Section 15.247(e).....	42
7.3. EUT Configuration on Measurement	42
7.4. Operating Condition of EUT	42
7.5. Test Procedure	43
7.6. Test Result	44
8. BAND EDGE COMPLIANCE TEST	58
8.1. Block Diagram of Test Setup.....	58
8.2. The Requirement For Section 15.247(d)	58
8.3. EUT Configuration on Measurement	58
8.4. Operating Condition of EUT	59
8.5. Test Procedure	59
8.6. Test Result	60
9. RADIATED SPURIOUS EMISSION TEST	93
9.1. Block Diagram of Test Setup.....	93
9.2. The Limit For Section 15.247(d)	94
9.3. Restricted bands of operation	94

- 9.4. Configuration of EUT on Measurement95
- 9.5. Operating Condition of EUT95
- 9.6. Test Procedure95
- 9.7. The Field Strength of Radiation Emission Measurement Results96
- 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST 180**
 - 10.1. Block Diagram of Test Setup..... 180
 - 10.2. The Requirement For Section 15.247(d) 180
 - 10.3. EUT Configuration on Measurement 180
 - 10.4. Operating Condition of EUT 181
 - 10.5. Test Procedure 181
 - 10.6. Test Result 181
- 11. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) 194**
 - 11.1. Block Diagram of Test Setup..... 194
 - 11.2. The Emission Limit 194
 - 11.3. Configuration of EUT on Measurement 195
 - 11.4. Operating Condition of EUT 195
 - 11.5. Test Procedure 195
 - 11.6. Power Line Conducted Emission Measurement Results 196
- 12. ANTENNA REQUIREMENT..... 199**
 - 12.1. The Requirement 199
 - 12.2. Antenna Construction 199

Test Report Certification

Applicant : HONG KONG NATURAL SOUND ELECTRONICS LIMITED
 Manufacturer : Shenzhen Natural Sound Electronics Co., Ltd.
 EUT Description : MID
 (A) MODEL NO.: PC9711, Trio-Stealth Pro 9.7C
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: DC 3.7V (Li-polymer battery) & DC 5V (Power by Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2009

The EUT was tested according to DTS test procedure of October 04, 2012 KDB558074 D01 DTS Meas Guidance v02 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : December 15-25, 2012

Prepared by : Apple Lv
 (Engineer)

Approved & Authorized Signer : Heunb
 (Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	MID
Model Number	:	PC9711, Trio-Stealth Pro 9.7C (Note: These samples are same except for the model number is difference. So we prepare the PC9711 for FCC test.)
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	:	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Antenna Gain	:	0dBi
Power Supply	:	DC 3.7V (Li-polymer battery) & DC 5V (Power by adapter)
Adapter	:	Model number: TESA5-0035015dV-B Input: AC 100-240V; 50/60Hz Output: DC 5V/2000mA Output line: Non-shielded, Non-detachable, 1.5m
Data Rate	:	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Applicant	:	HONG KONG NATURAL SOUND ELECTRONICS LIMITED
Address	:	FLAT/RM M 4/F CONTINENTAL MANSION 300 KING'S ROAD HONG KONG
Manufacturer	:	Shenzhen Natural Sound Electronics Co., Ltd.
Address	:	4 th Building, Xinyuan Industrial Zone, Gushu Village, Bao'an District, Shenzhen, China
Date of sample received	:	December 15, 2012
Date of Test	:	December 15-25, 2012

1.2. Carrier Frequency of Channels

802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

1.3. Test Procedure

The EUT was tested according to DTS test procedure of October 04, 2012 KDB558074 D01 DTS Meas Guidance v02 for compliance to FCC 47CFR 15.247 requirements

1.4. Special Accessory and Auxiliary Equipment

n.a.

1.5. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.6. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty
(Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 8, 2012	Jan. 7, 2013
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 8, 2012	Jan. 7, 2013

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **1.802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

2.802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

3.802.11n (20MHz) Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

4.802.11n (40MHz) Transmitting mode

Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

5. Charging

3.2.Configuration and peripherals

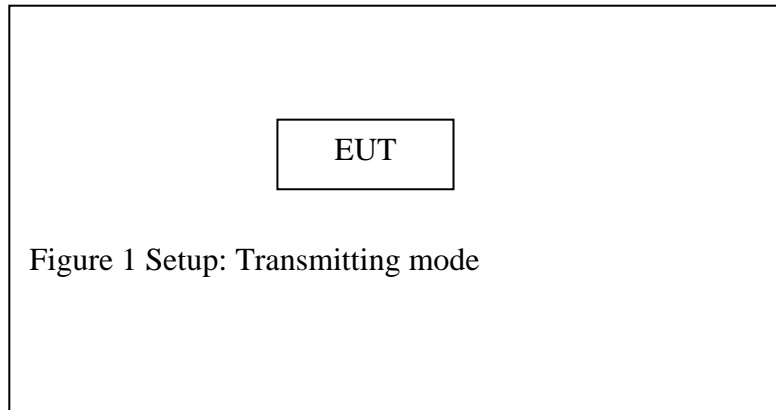


Figure 1 Setup: Transmitting mode

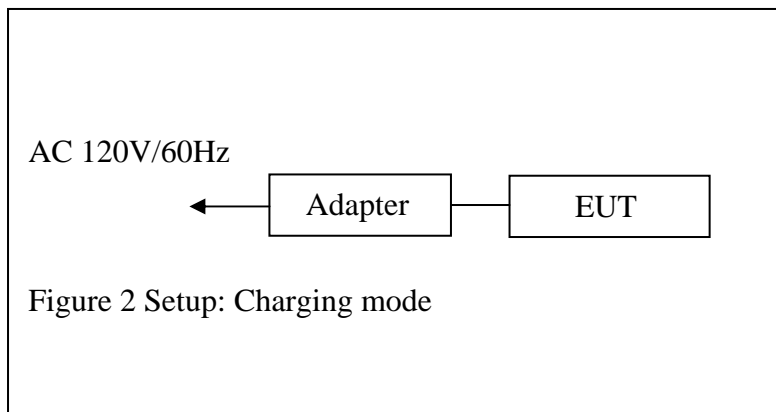



Figure 2 Setup: Charging mode

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup

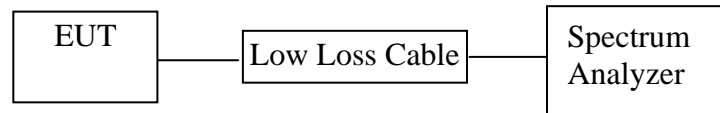

(EUT: MID)

5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. MID (EUT)

Model Number	:	PC9711
Serial Number	:	N/A
Manufacturer	:	Shenzhen Natural Sound Electronics Co., Ltd.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

5.5. Test Procedure

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6. Test Result

PASS.

Date of Test:	<u>December 18, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	10.08	> 0.5MHz
Middle	2437	10.04	> 0.5MHz
High	2462	10.08	> 0.5MHz

The test was performed with 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.56	> 0.5MHz
Middle	2437	16.60	> 0.5MHz
High	2462	16.56	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 20 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	17.80	> 0.5MHz
Middle	2437	17.76	> 0.5MHz
High	2462	17.76	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 40 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2422	36.44	> 0.5MHz
Middle	2437	36.48	> 0.5MHz
High	2452	36.40	> 0.5MHz


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

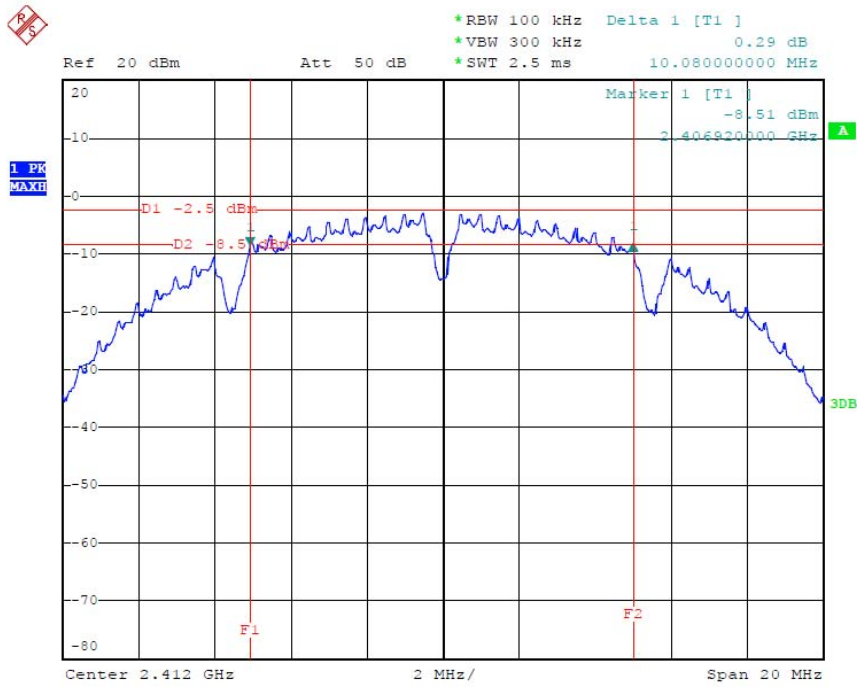


Date: 18.DEC.2012 18:27:24

802.11b Channel Middle 2437MHz

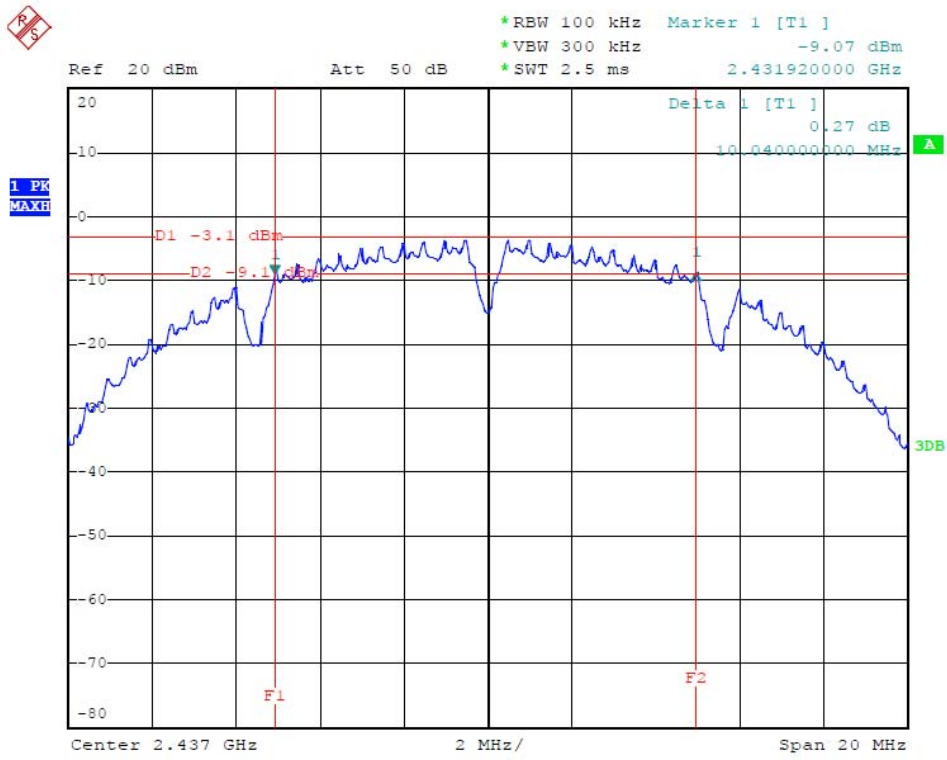


Date: 18.DEC.2012 18:28:23

802.11b Channel High 2462MHz

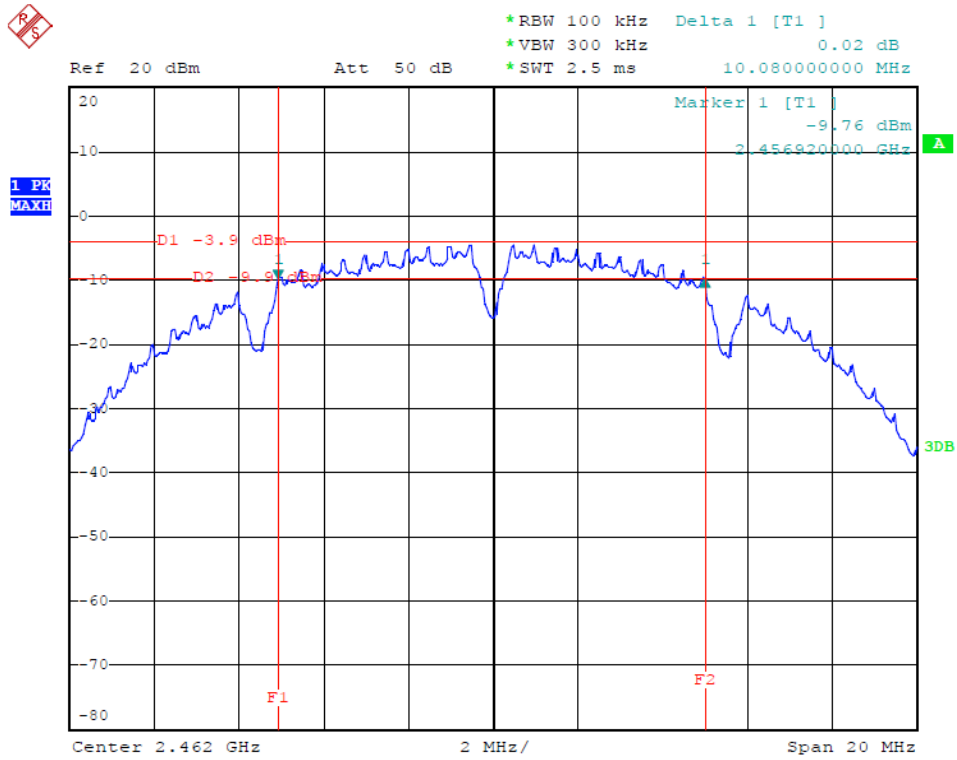


Date: 18.DEC.2012 18:29:12

802.11g Channel Low 2412MHz

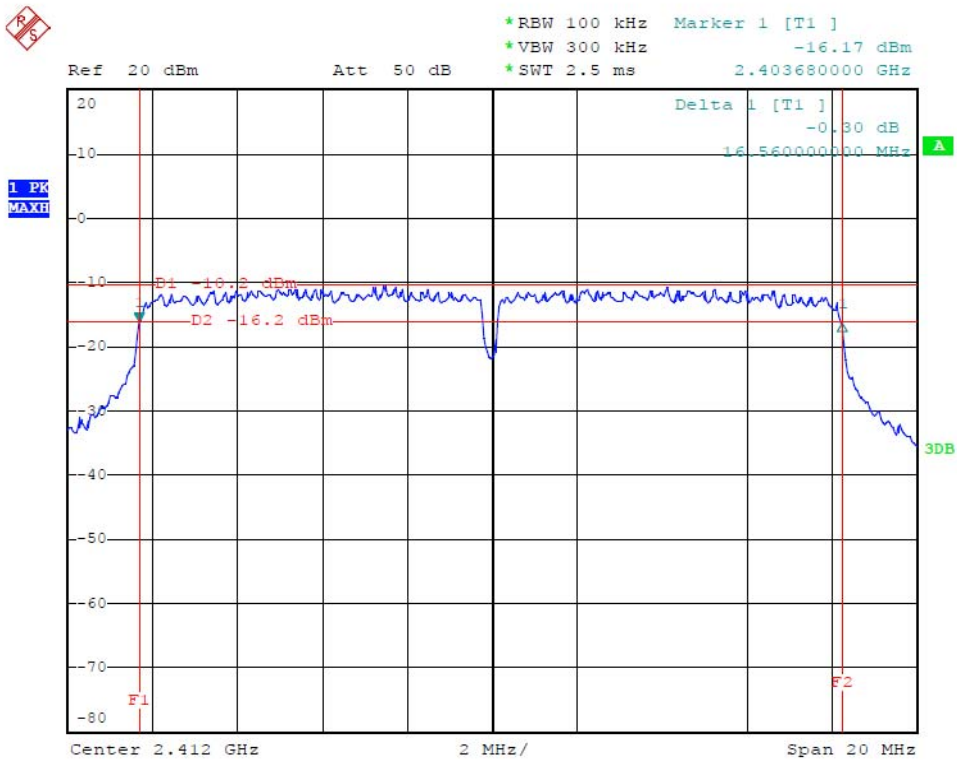


Date: 18.DEC.2012 18:34:17

802.11g Channel Middle 2437MHz

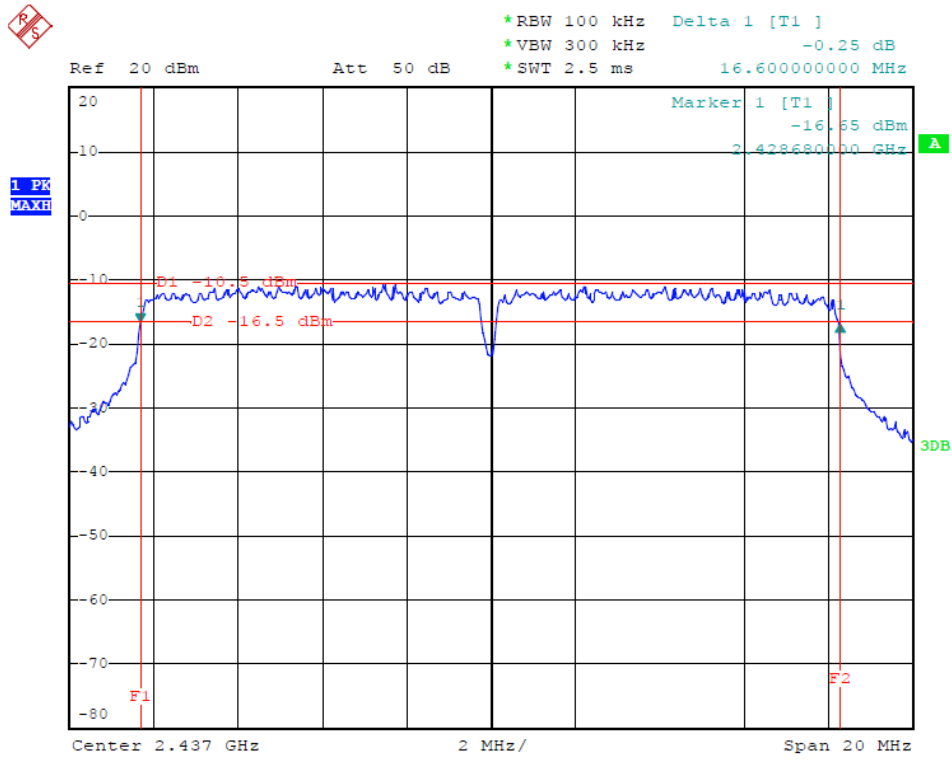


Date: 18.DEC.2012 18:33:02

802.11g Channel High 2462MHz

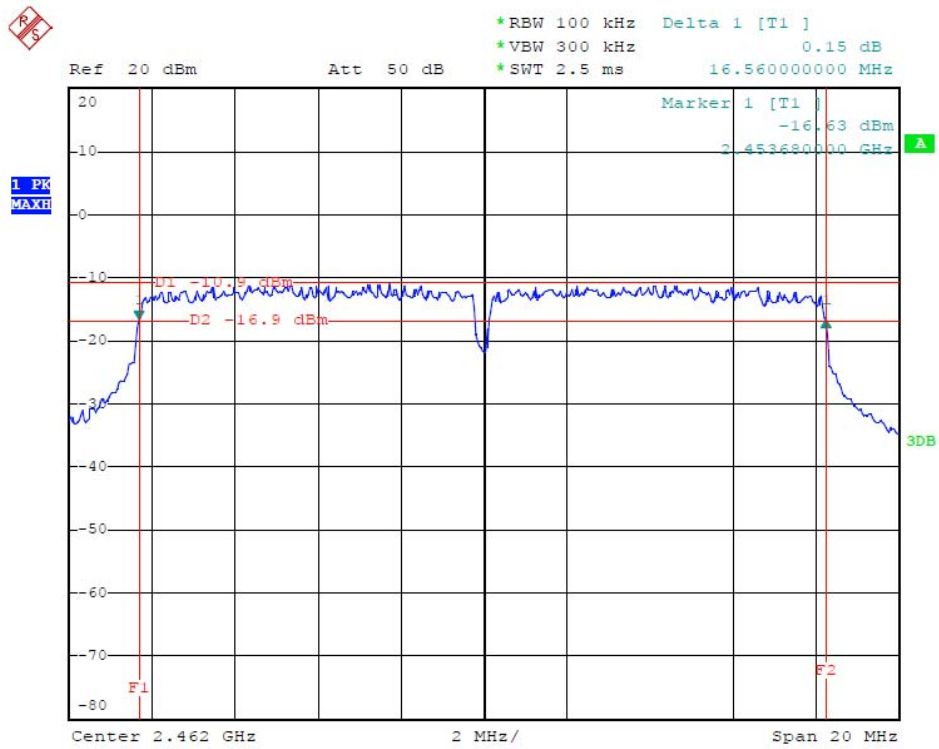


Date: 18.DEC.2012 18:31:18

802.11n Channel Low 2412MHz (20MHz)

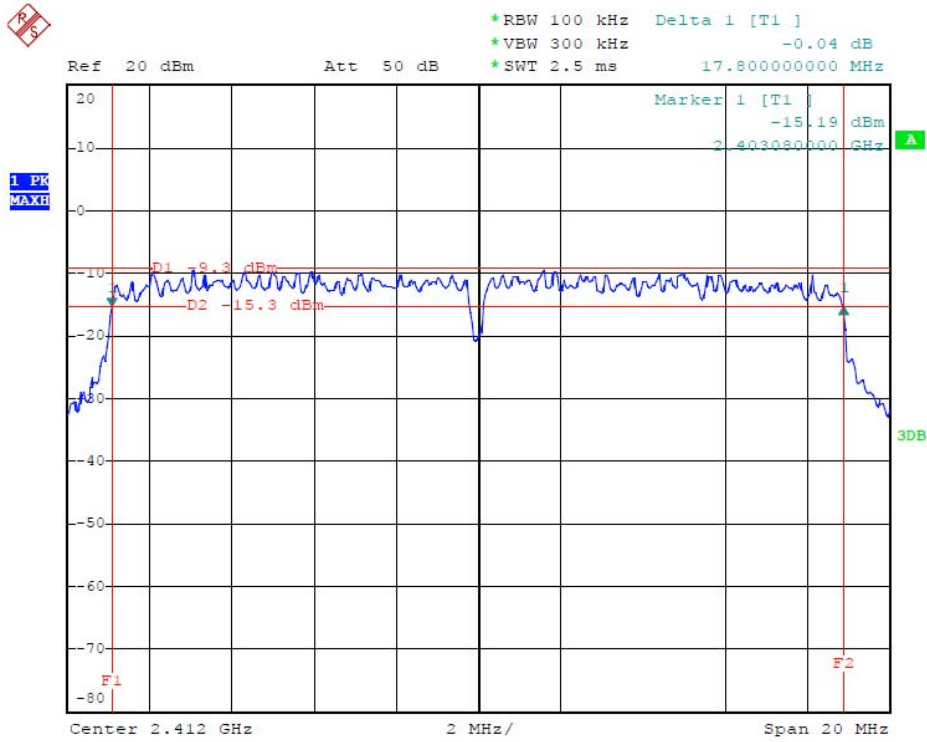


Date: 18.DEC.2012 18:37:20

802.11n Channel Middle 2437MHz(20MHz)

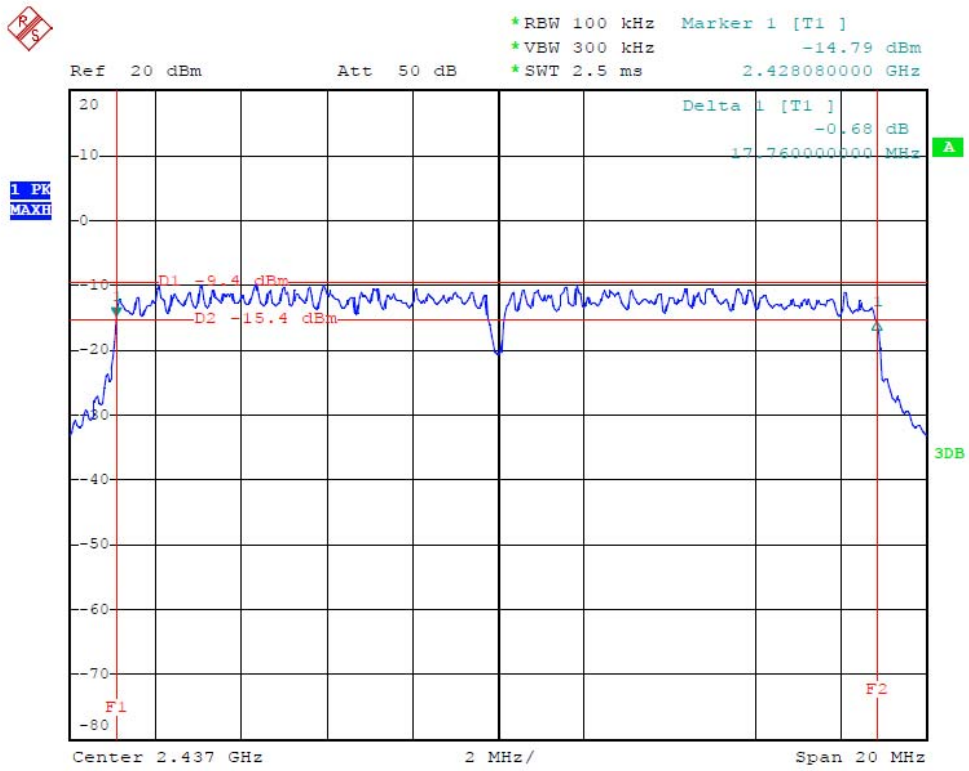


Date: 18.DEC.2012 18:38:29

802.11n Channel High 2462MHz(20MHz)

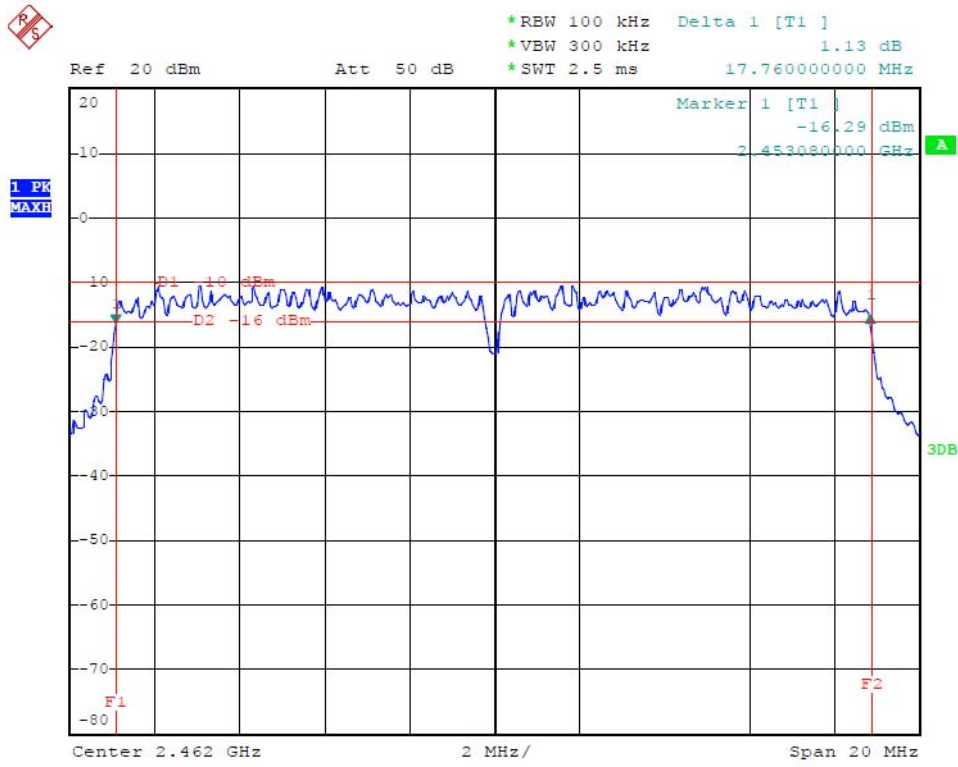


Date: 18.DEC.2012 18:39:28

802.11n Channel Low 2422MHz (40MHz)

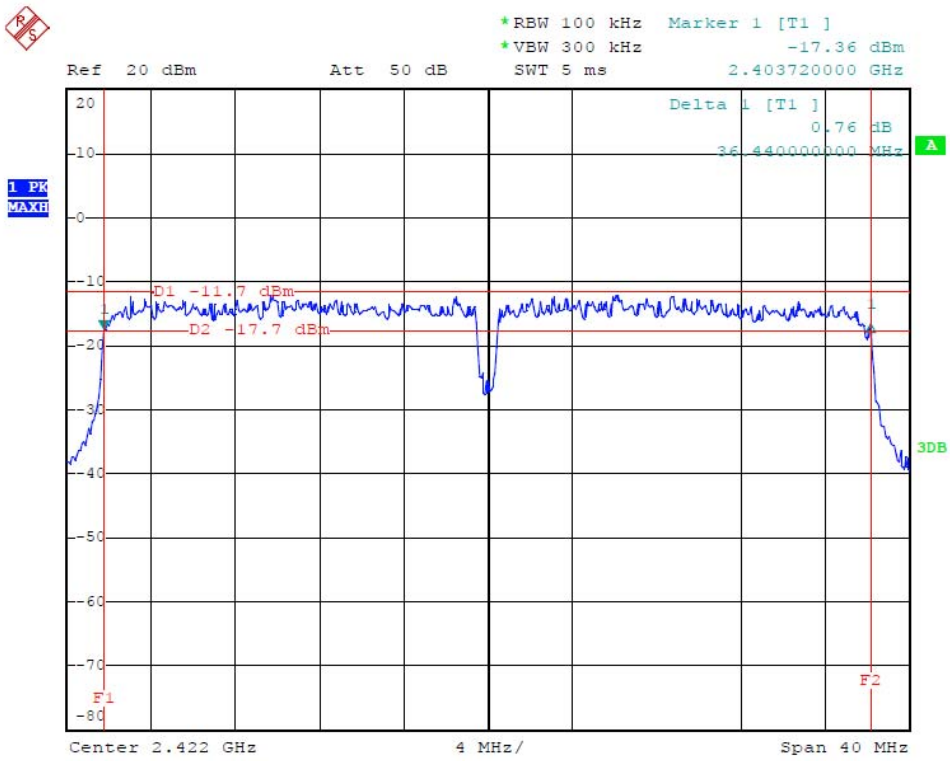


Date: 18.DEC.2012 18:45:15

802.11n Channel Middle 2437MHz(40MHz)

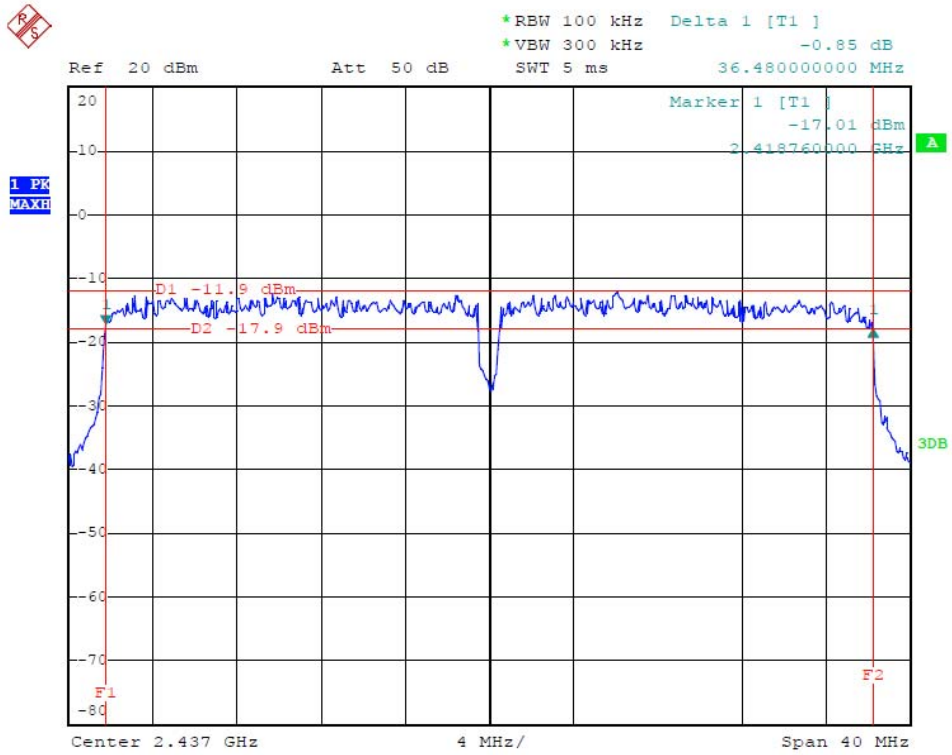

Date: 18.DEC.2012 18:43:45


802.11n Channel High 2452MHz(40MHz)

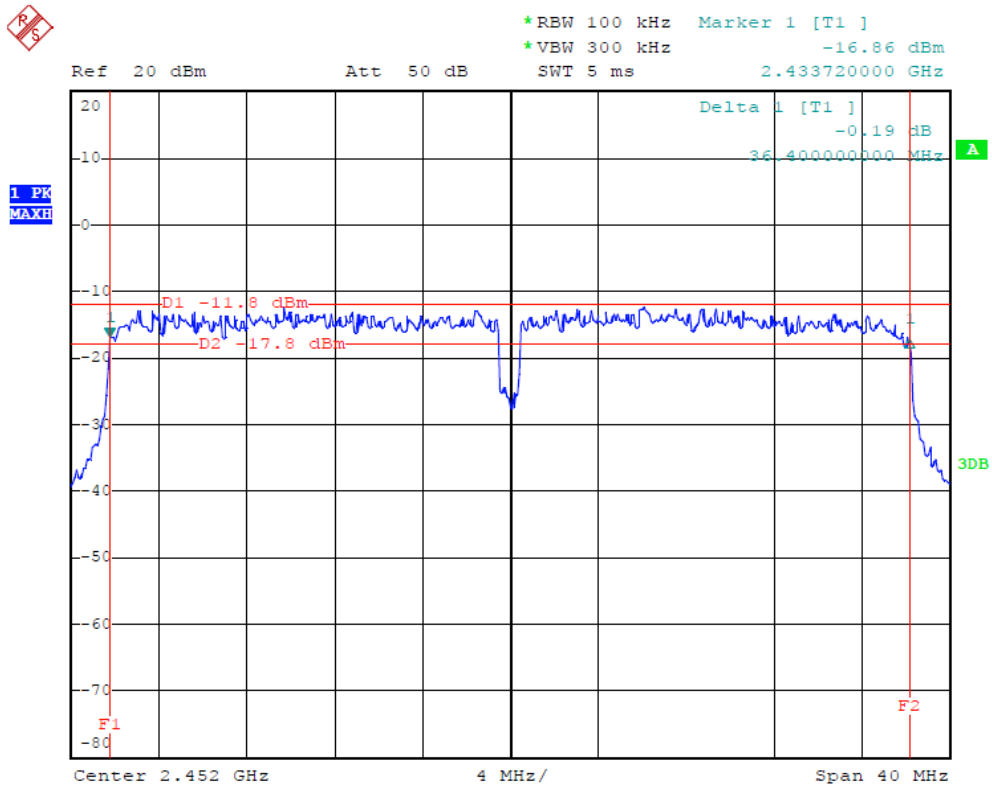

Date: 18.DEC.2012 18:42:28

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup

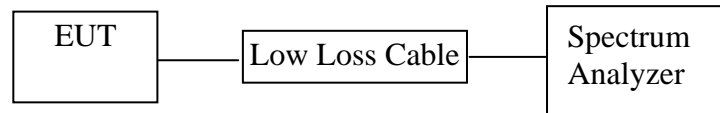

(EUT: MID)

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. MID (EUT)

Model Number	:	PC9711
Serial Number	:	N/A
Manufacturer	:	Shenzhen Natural Sound Electronics Co., Ltd.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The EUT was tested according to DTS test procedure of October 04, 2012 KDB558074 D01 DTS Meas Guidance v02 for compliance to FCC 47CFR 15.247 requirements.

6.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.3. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

6.5.4. Measurement the maximum peak output power.

6.6. Test Result

PASS.

Date of Test:	<u>December 18, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.31	8.53	30 dBm / 1 W
Middle	2437	9.05	8.04	30 dBm / 1 W
High	2462	8.42	6.95	30 dBm / 1 W

The test was performed with 802.11g


Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.48	8.87	30 dBm / 1 W
Middle	2437	9.68	9.29	30 dBm / 1 W
High	2462	9.61	9.14	30 dBm / 1 W

The test was performed with 802.11n (20MHz)				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.42	8.75	30 dBm / 1 W
Middle	2437	9.16	8.24	30 dBm / 1 W
High	2462	9.75	9.44	30 dBm / 1 W

The test was performed with 802.11n (40MHz)				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2422	9.27	8.45	30 dBm / 1 W
Middle	2437	9.01	7.96	30 dBm / 1 W
High	2452	9.75	9.44	30 dBm / 1 W


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

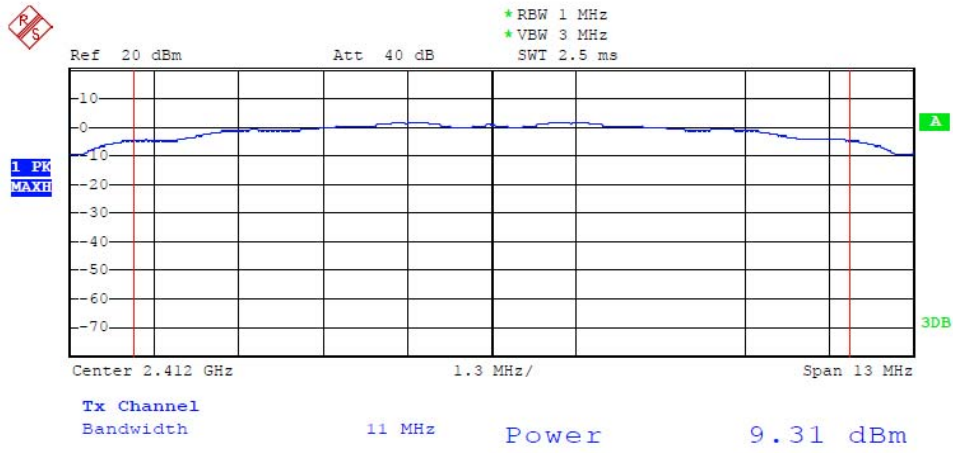


Date: 18.DEC.2012 19:01:24

802.11b Channel Middle 2437MHz

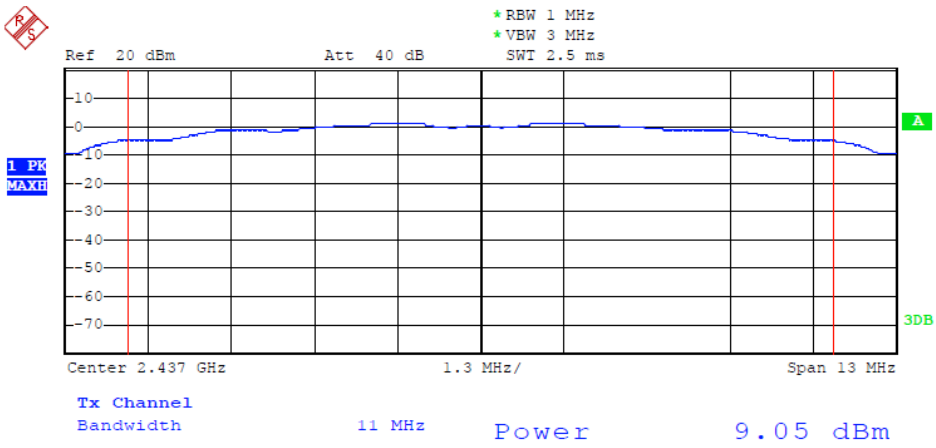


Date: 18.DEC.2012 19:01:46

802.11b Channel High 2462MHz

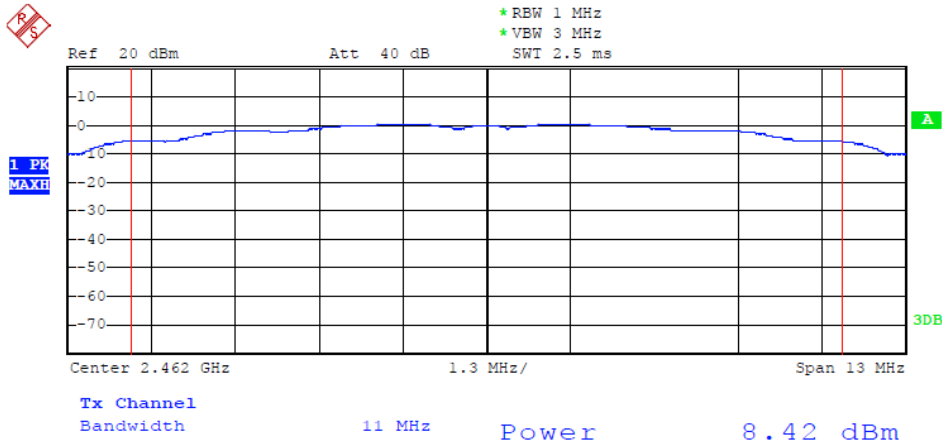


Date: 18.DEC.2012 19:02:11

802.11g Channel Low 2412MHz

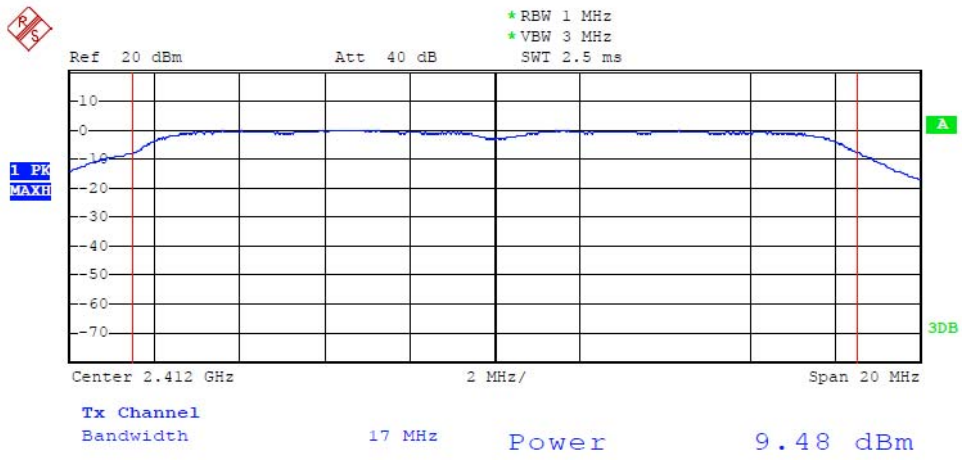


Date: 18.DEC.2012 19:05:03

802.11g Channel Middle 2437MHz

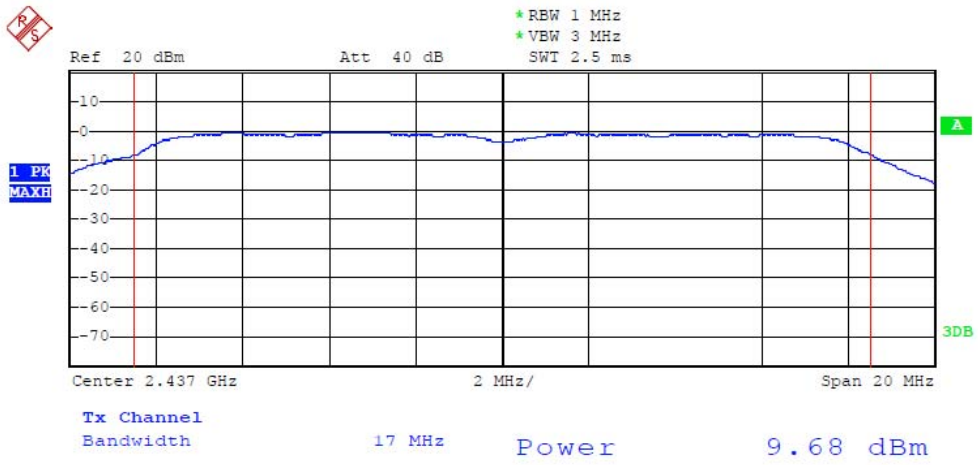


Date: 18.DEC.2012 19:04:25

802.11g Channel High 2462MHz

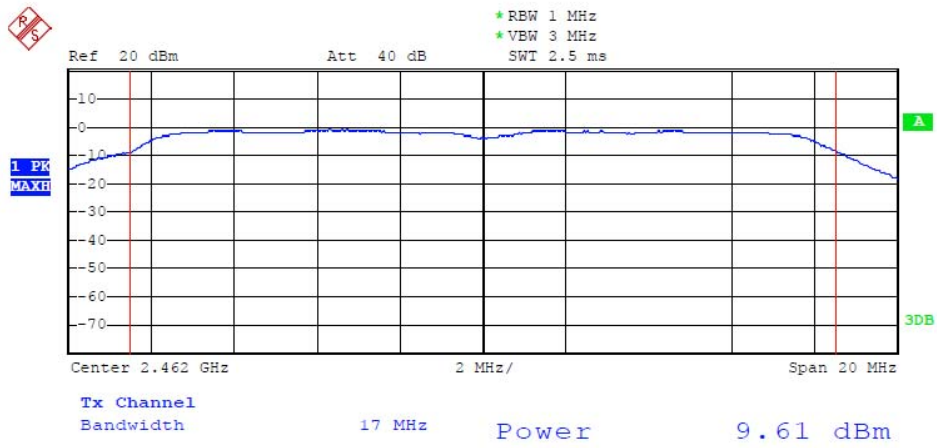


Date: 18.DEC.2012 19:03:45

802.11n Channel Low 2412MHz (20MHz)

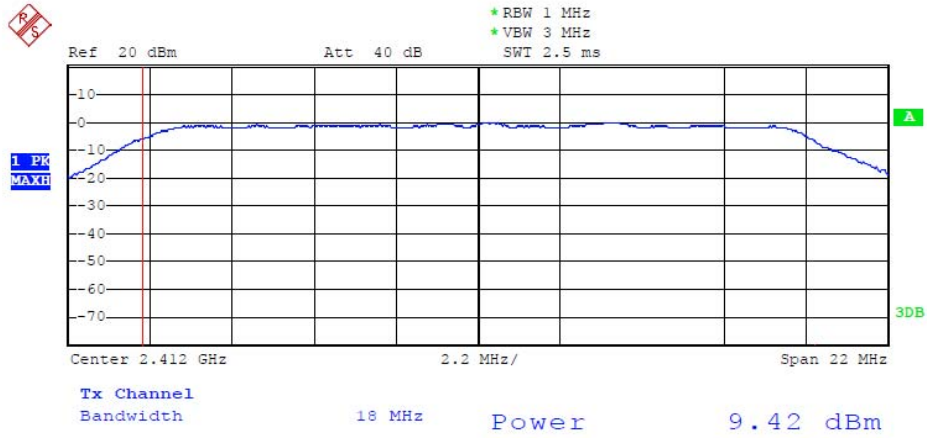


Date: 18.DEC.2012 19:06:10

802.11n Channel Middle 2437MHz (20MHz)

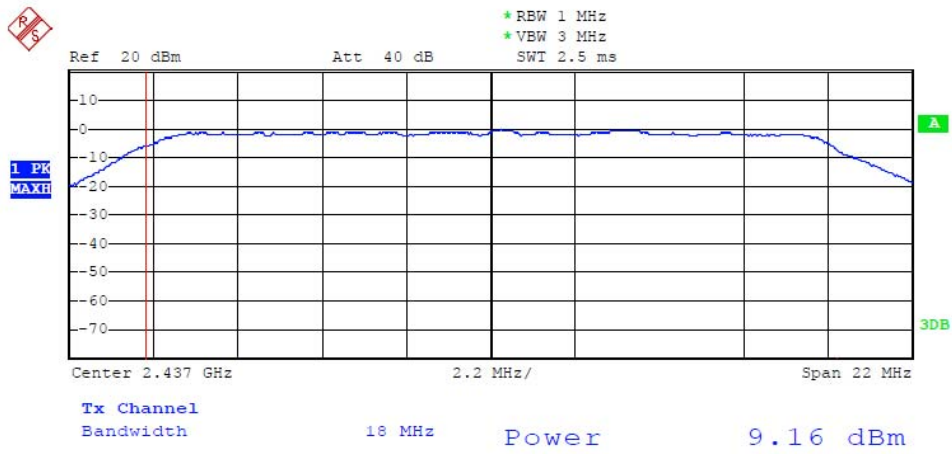


Date: 18.DEC.2012 19:06:40

802.11n Channel High 2462MHz (20MHz)

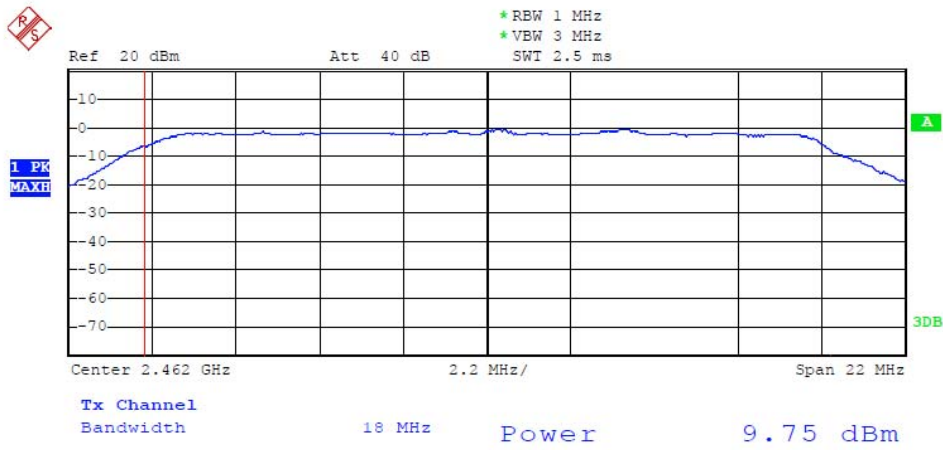


Date: 18.DEC.2012 19:07:16

802.11n Channel Low 2422MHz (40MHz)

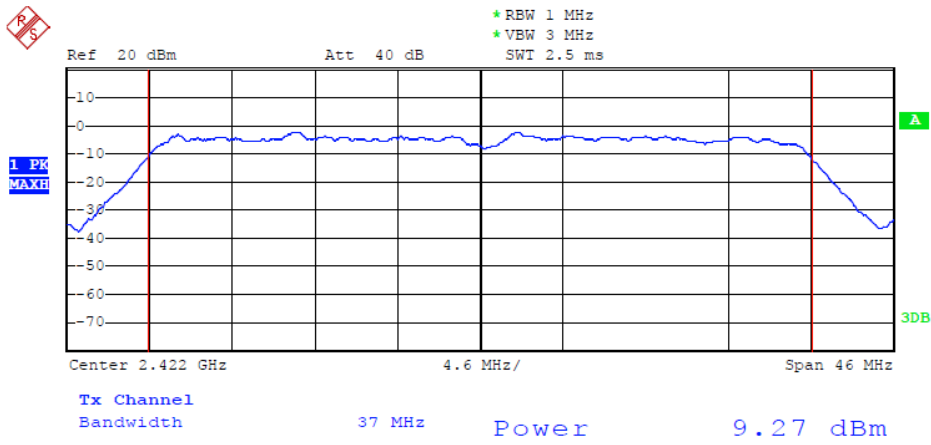

Date: 18.DEC.2012 19:12:04

802.11n Channel High 2452MHz (40MHz)

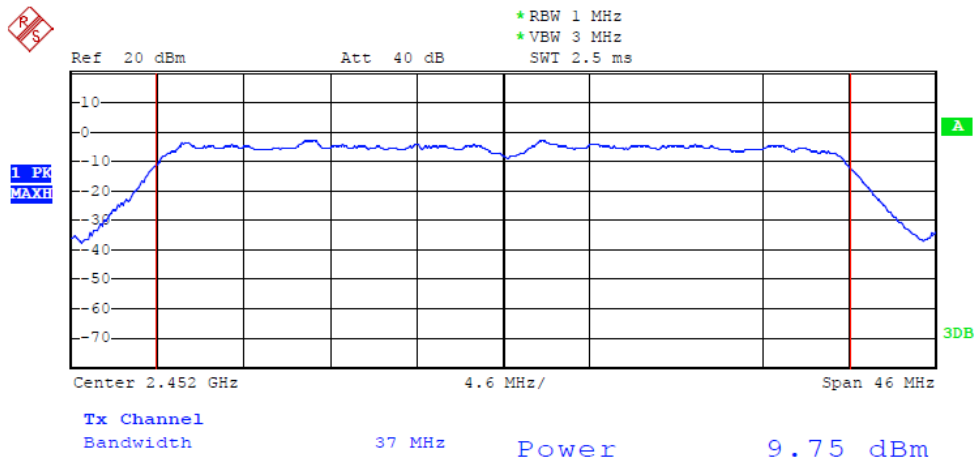

Date: 18.DEC.2012 19:10:53

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: MID)

7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. MID (EUT)

Model Number	:	PC9711
Serial Number	:	N/A
Manufacturer	:	Shenzhen Natural Sound Electronics Co., Ltd.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The EUT was tested according to DTS test procedure of October 04, 2012 KDB558074 D01 DTS Meas Guidance v02 for compliance to FCC 47CFR 15.247 requirements.

7.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.3. Measurement Procedure PKPSD:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.5.4. Measurement the maximum power spectral density.

7.6. Test Result

PASS.

Date of Test:	<u>December 18, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-23.85	8 dBm
Middle	2437	-24.42	8 dBm
High	2462	-25.10	8 dBm

The test was performed with 802.11g

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-26.55	8 dBm
Middle	2437	-27.34	8 dBm
High	2462	-27.97	8 dBm

The test was performed with 802.11n (20MHz)


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-23.47	8 dBm
Middle	2437	-24.34	8 dBm
High	2462	-24.93	8 dBm

The test was performed with 802.11n (40MHz)

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2422	-26.33	8 dBm
Middle	2437	-25.70	8 dBm
High	2452	-26.07	8 dBm


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

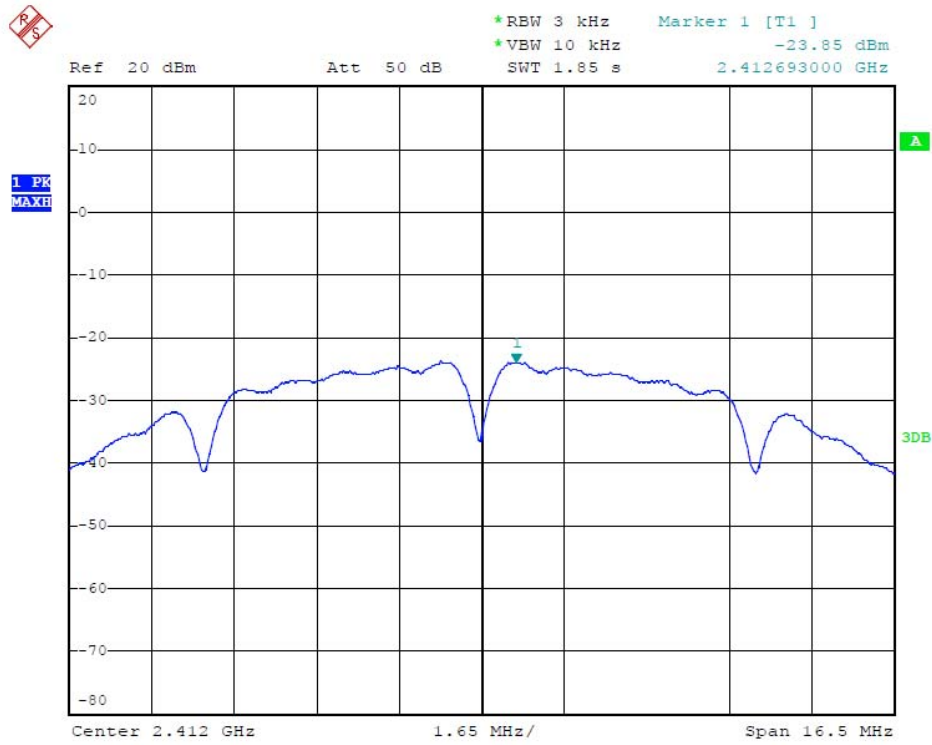


Date: 18.DEC.2012 19:14:51

802.11b Channel Middle 2437MHz

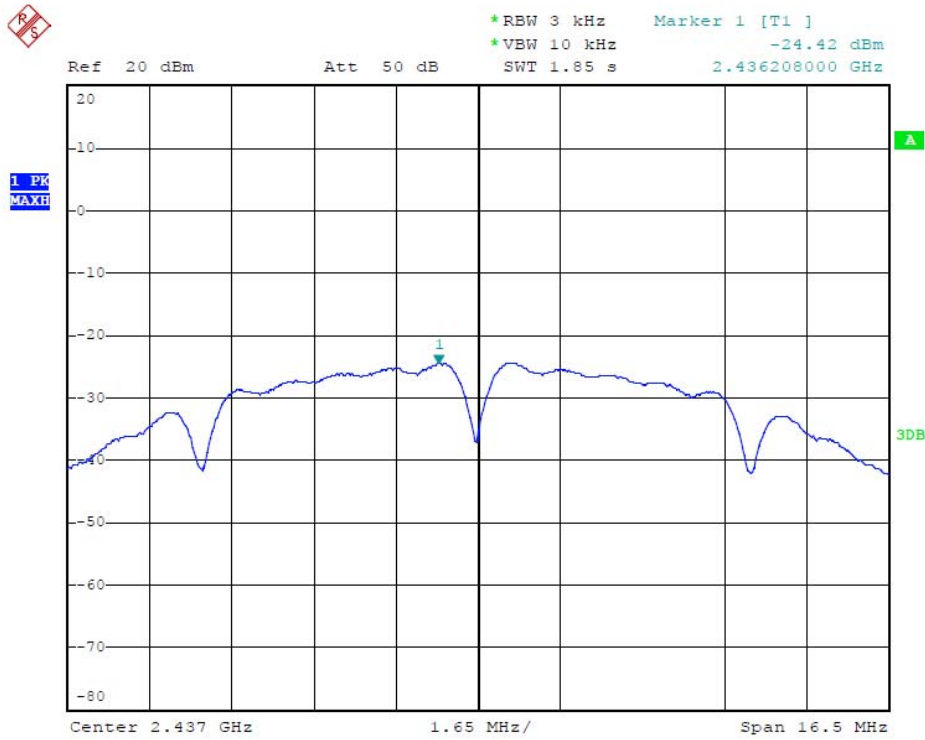


Date: 18.DEC.2012 19:15:15

802.11b Channel High 2462MHz

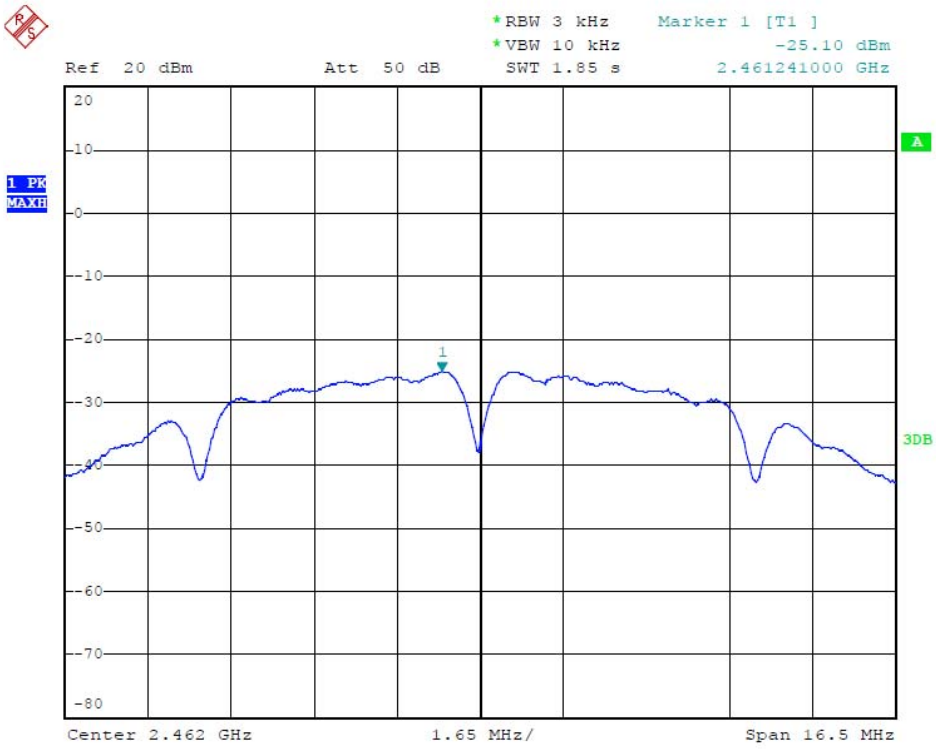


Date: 18.DEC.2012 19:15:54

802.11g Channel Low 2412MHz

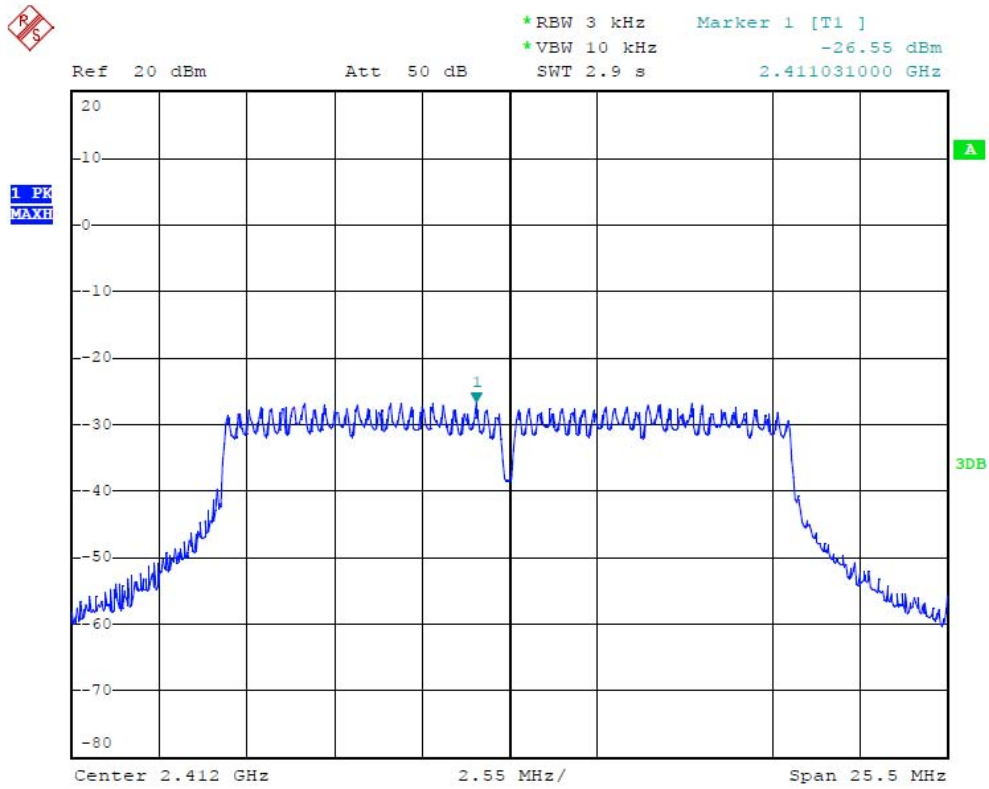


Date: 18.DEC.2012 19:17:38

802.11g Channel Middle 2437MHz

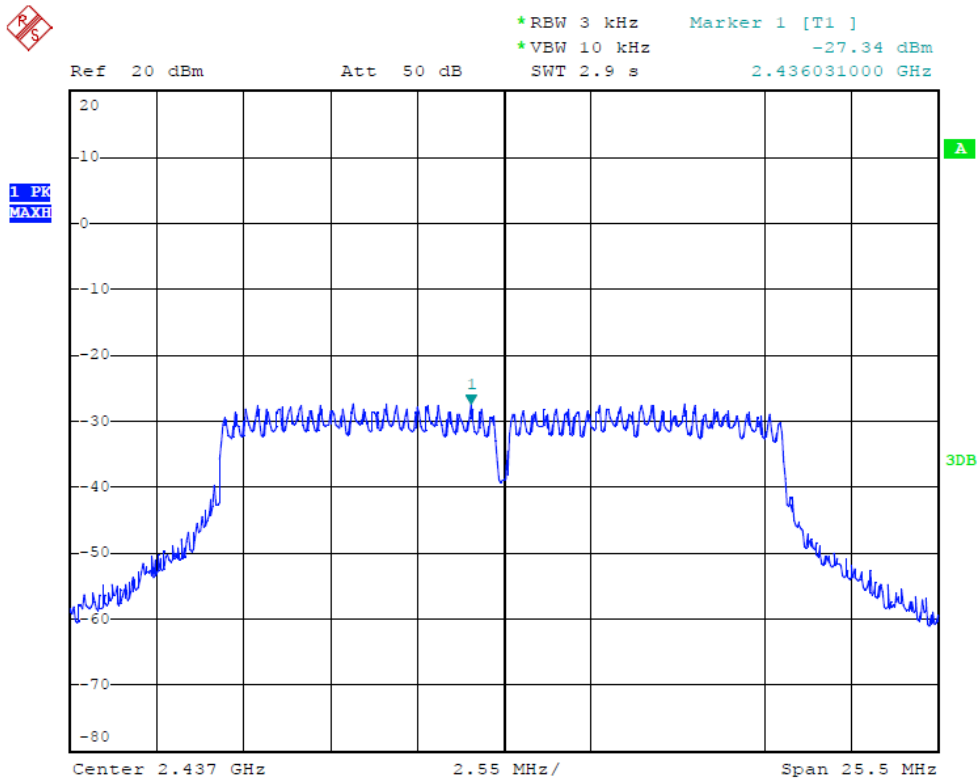


Date: 18.DEC.2012 19:17:16

802.11g Channel High 2462MHz

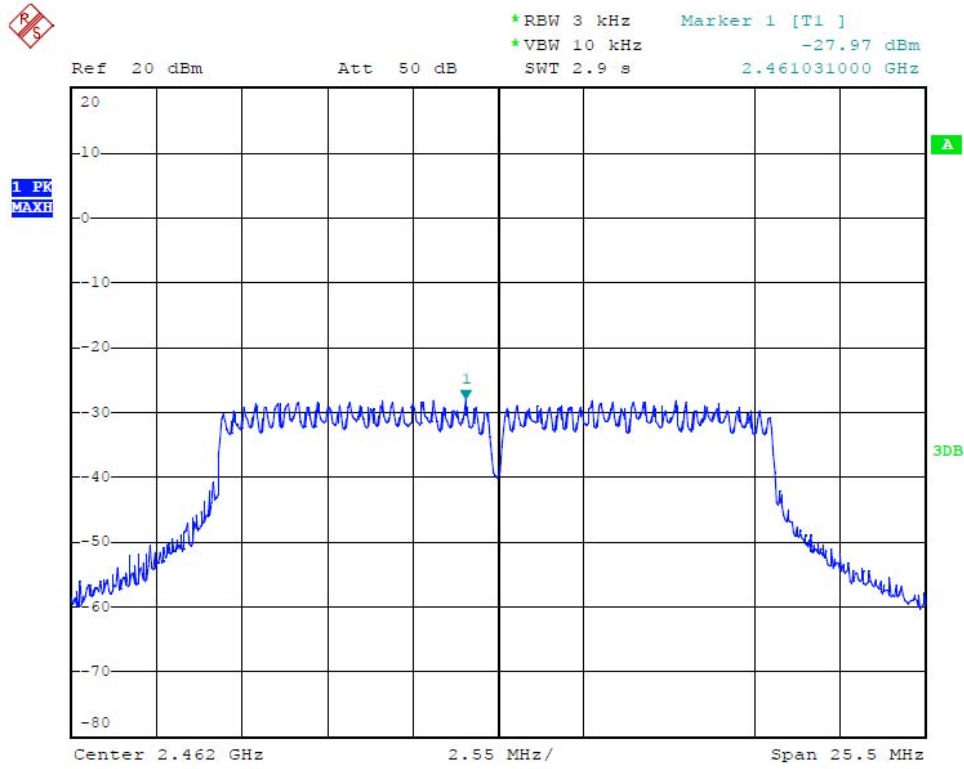


Date: 18.DEC.2012 19:16:51

802.11n Channel Low 2412MHz (20MHz)

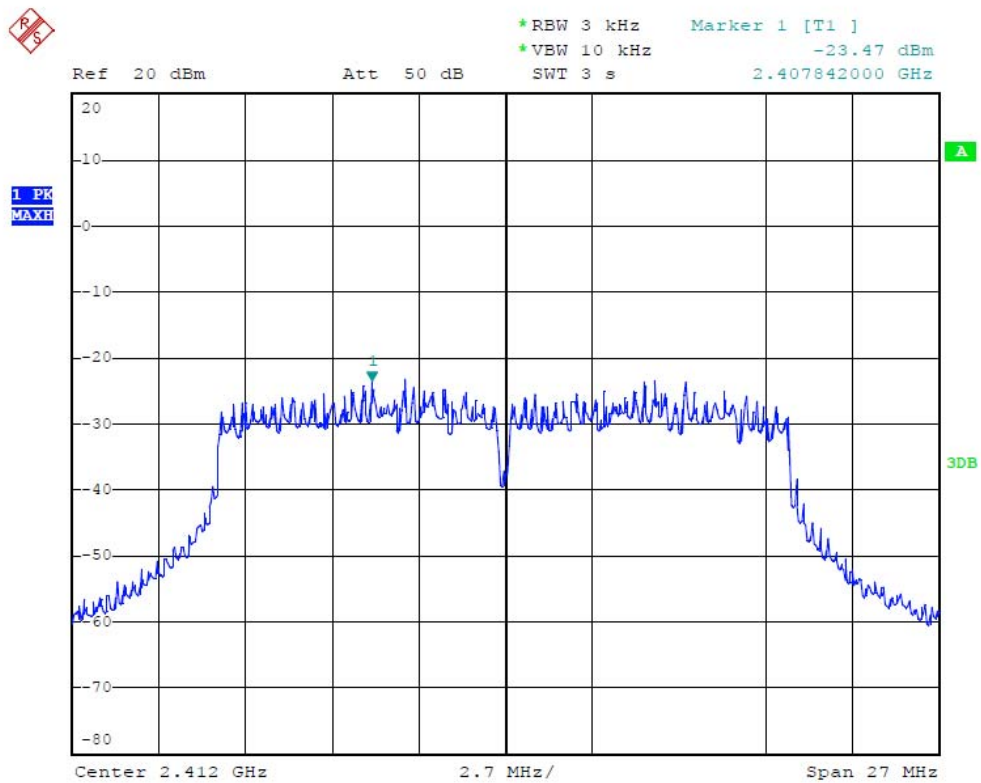


Date: 18.DEC.2012 19:18:53

802.11n Channel Middle 2437MHz (20MHz)

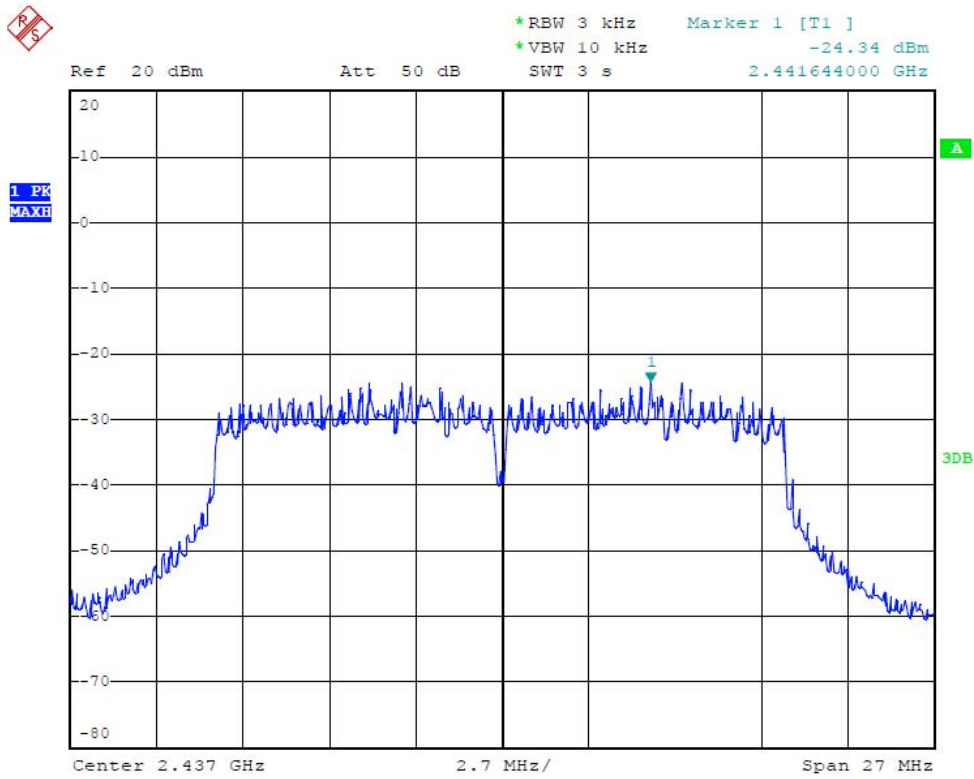


Date: 18.DEC.2012 19:19:36

802.11n Channel High 2462MHz(20MHz)

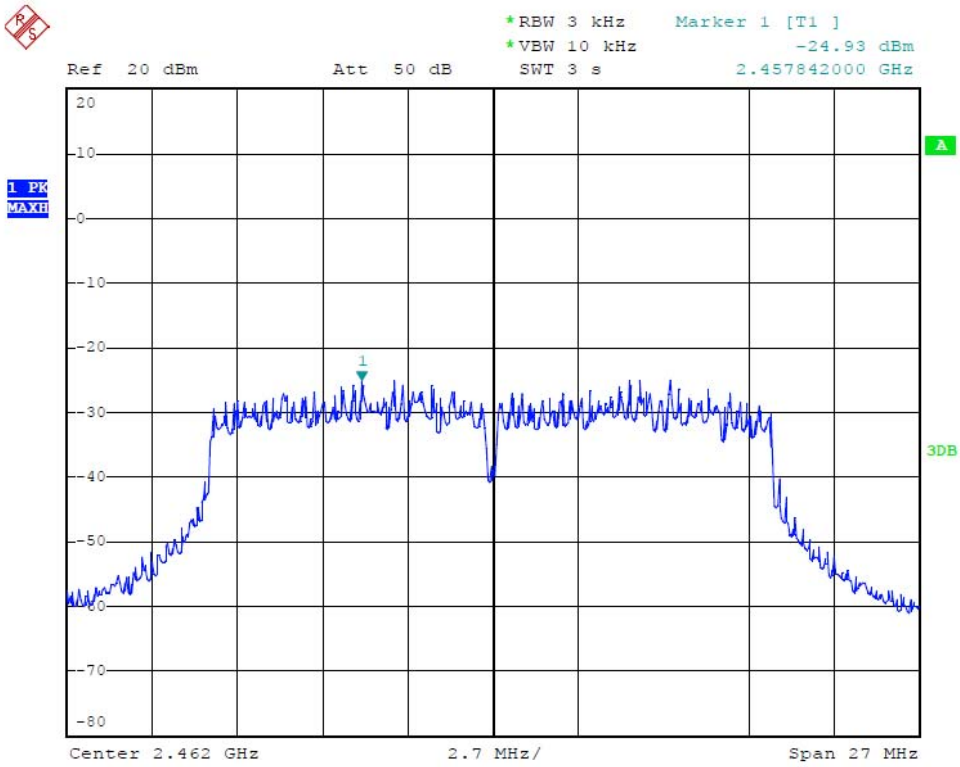


Date: 18.DEC.2012 19:20:08

802.11n Channel Low 2422MHz (40MHz)

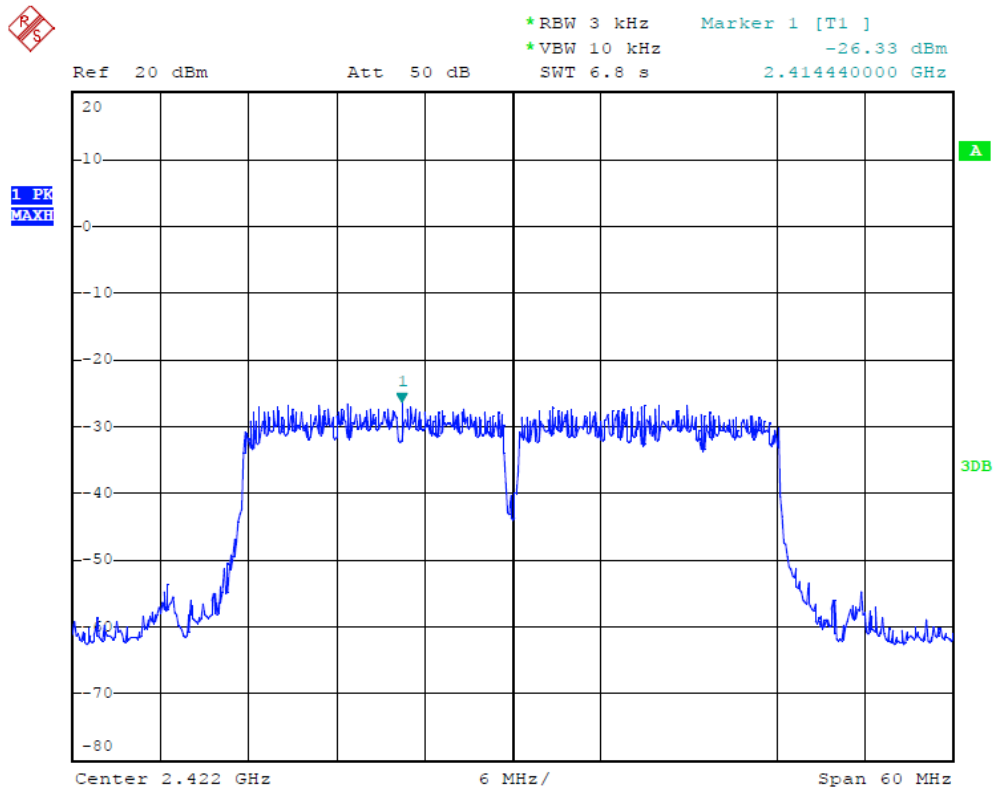


Date: 18.DEC.2012 19:22:53

802.11n Channel Middle 2437MHz(40MHz)

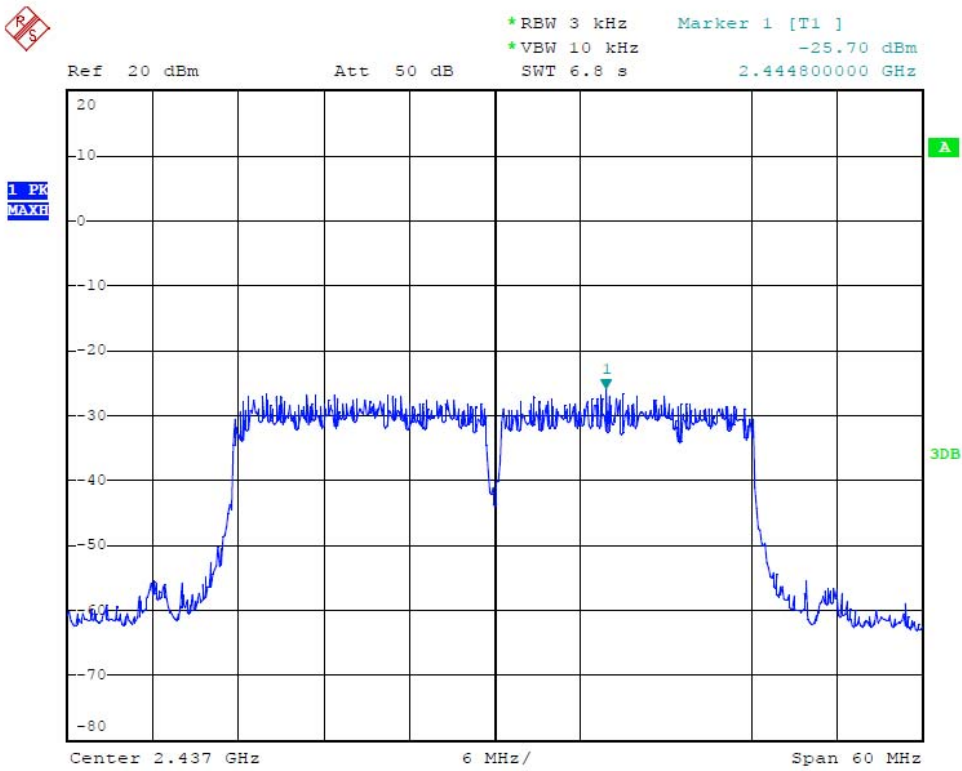

Date: 18.DEC.2012 19:22:04


802.11n Channel High 2452MHz(40MHz)

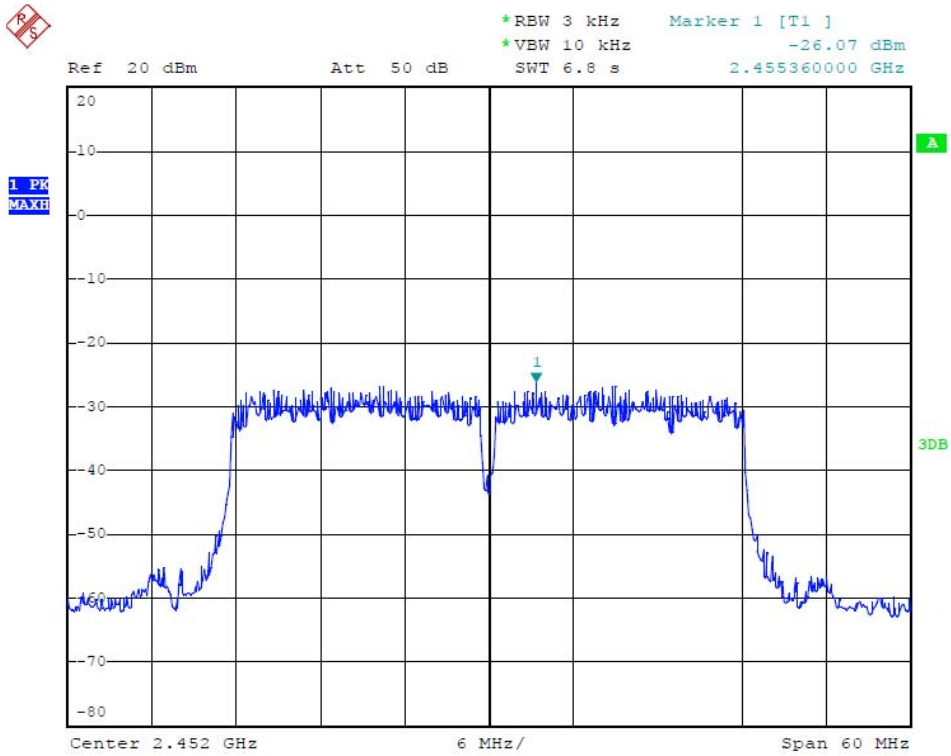

Date: 18.DEC.2012 19:21:31

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup

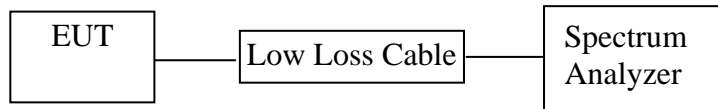

(EUT: MID)

8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. MID (EUT)

Model Number	:	PC9711
Serial Number	:	N/A
Manufacturer	:	Shenzhen Natural Sound Electronics Co., Ltd.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz MHz. We select 2412MHz, 2462MHz and 2422MHz, 2452MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

8.5.7. The band edges was measured and recorded.

8.6. Test Result

Pass**Conducted test**

Date of Test:	<u>December 18, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60HZ</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	35.84	> 20dBc
2462	36.58	> 20dBc

The test was performed with 802.11g

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	30.32	> 20dBc
2462	30.33	> 20dBc


The test was performed with 802.11n (20MHz)

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	31.11	> 20dBc
2462	31.99	> 20dBc

The test was performed with 802.11n (40MHz)


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2422	26.96	> 20dBc
2452	26.87	> 20dBc

802.11b Channel Low 2412MHz

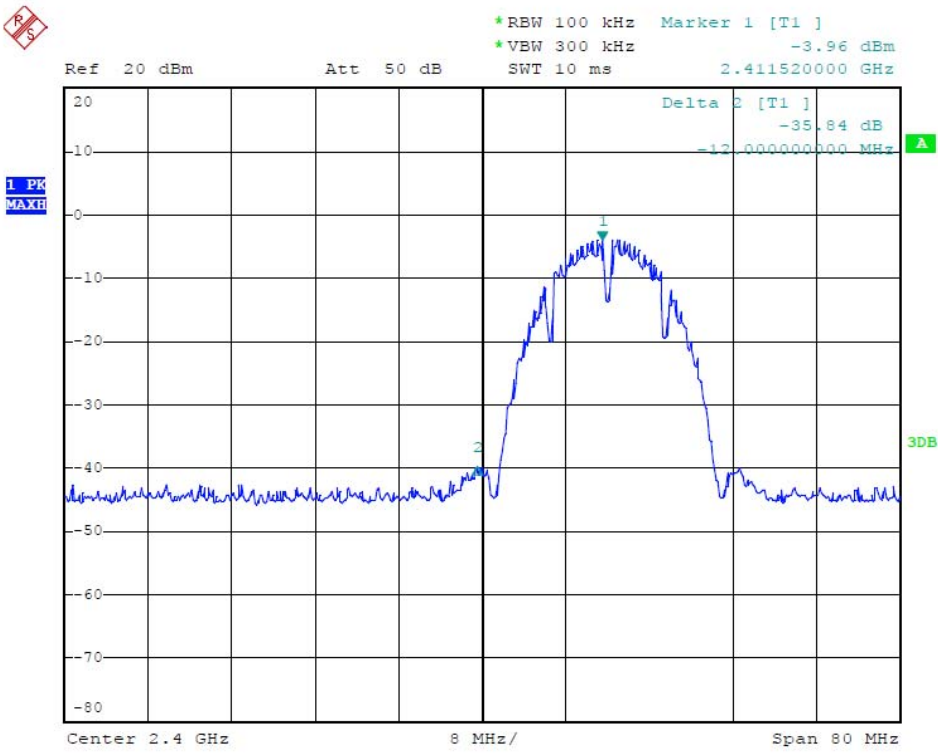


Date: 18.DEC.2012 19:28:18

802.11b Channel High 2462MHz

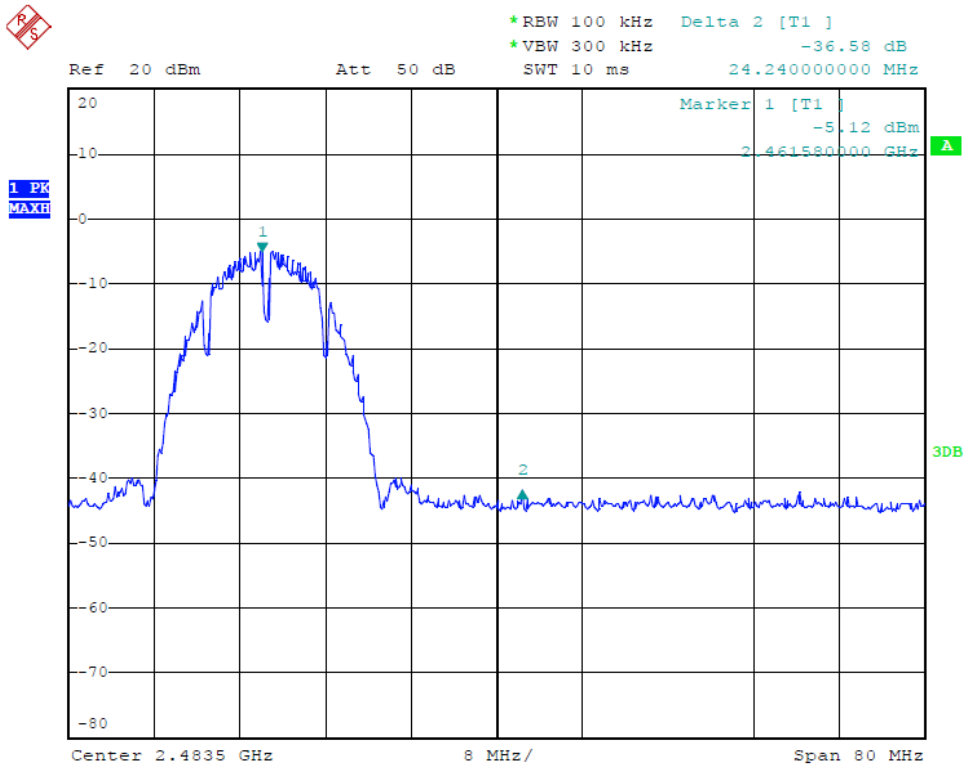


Date: 18.DEC.2012 19:27:37

802.11g Channel Low 2412MHz

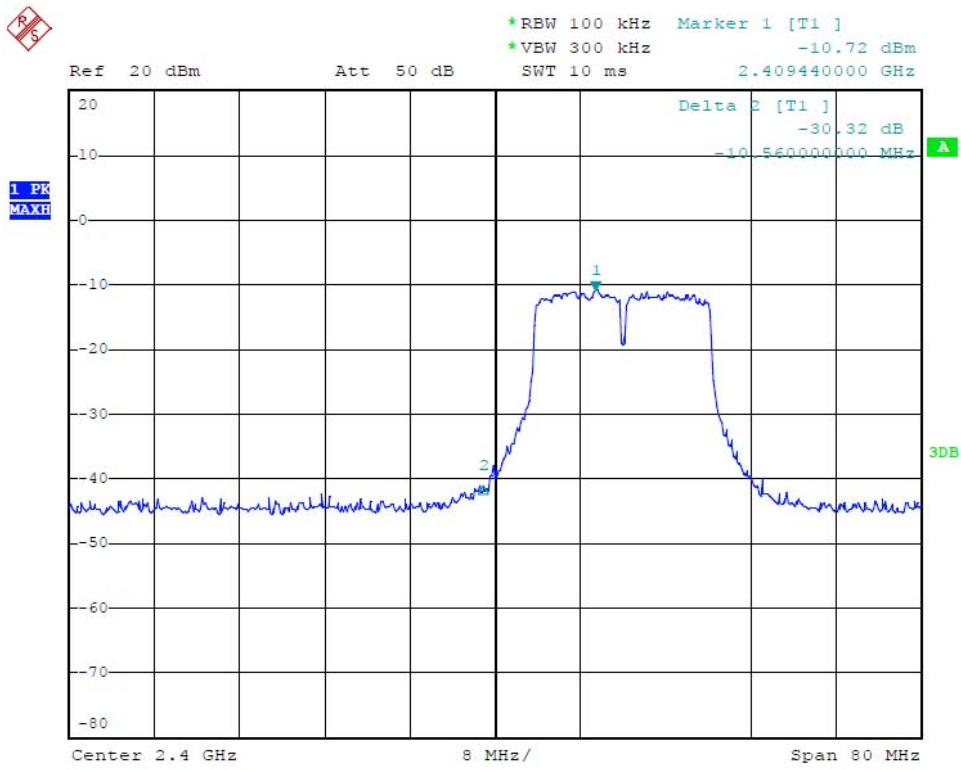


Date: 18.DEC.2012 19:29:57

802.11g Channel High 2462MHz

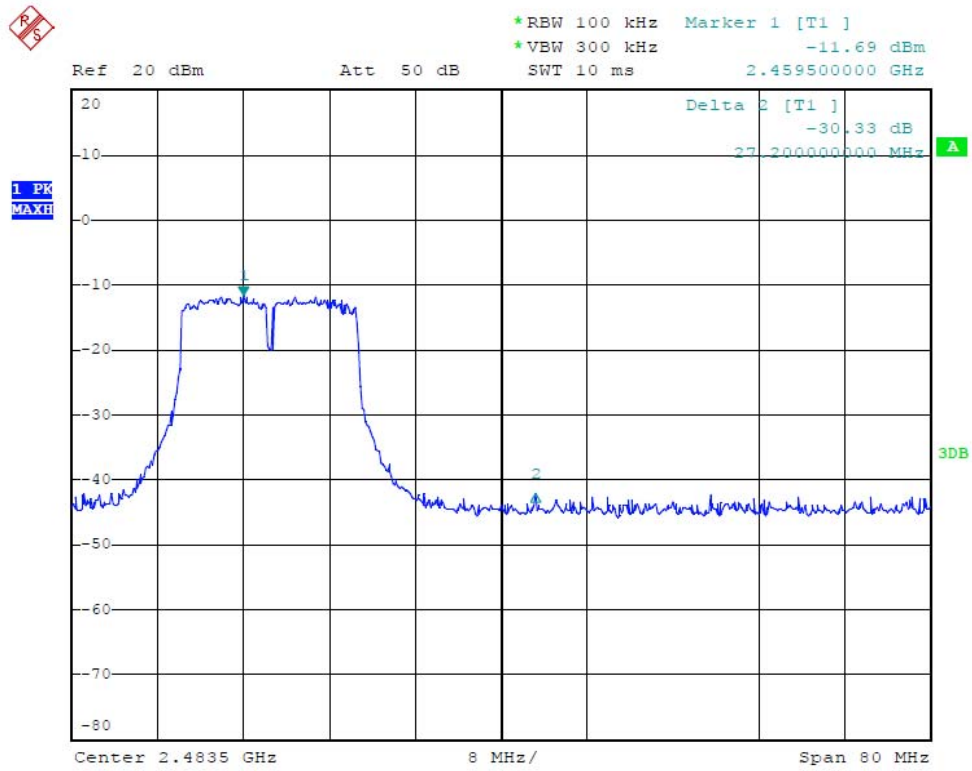


Date: 18.DEC.2012 19:30:44

802.11n Channel Low 2412MHz (20MHz)

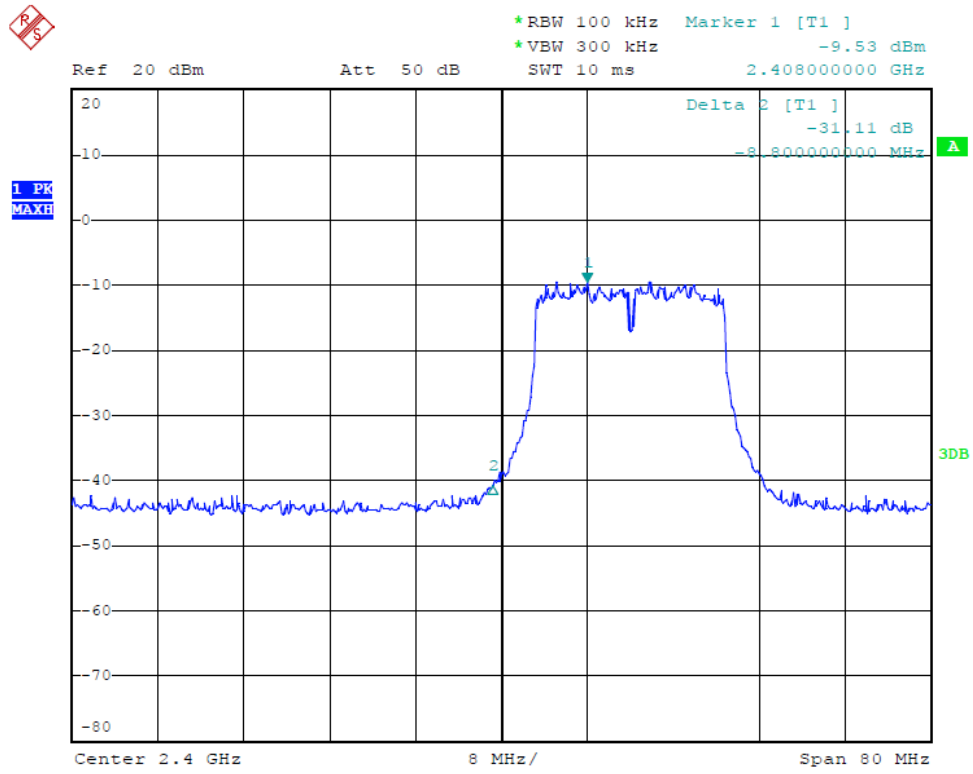


Date: 18.DEC.2012 19:32:57

802.11n Channel High 2462MHz (20MHz)

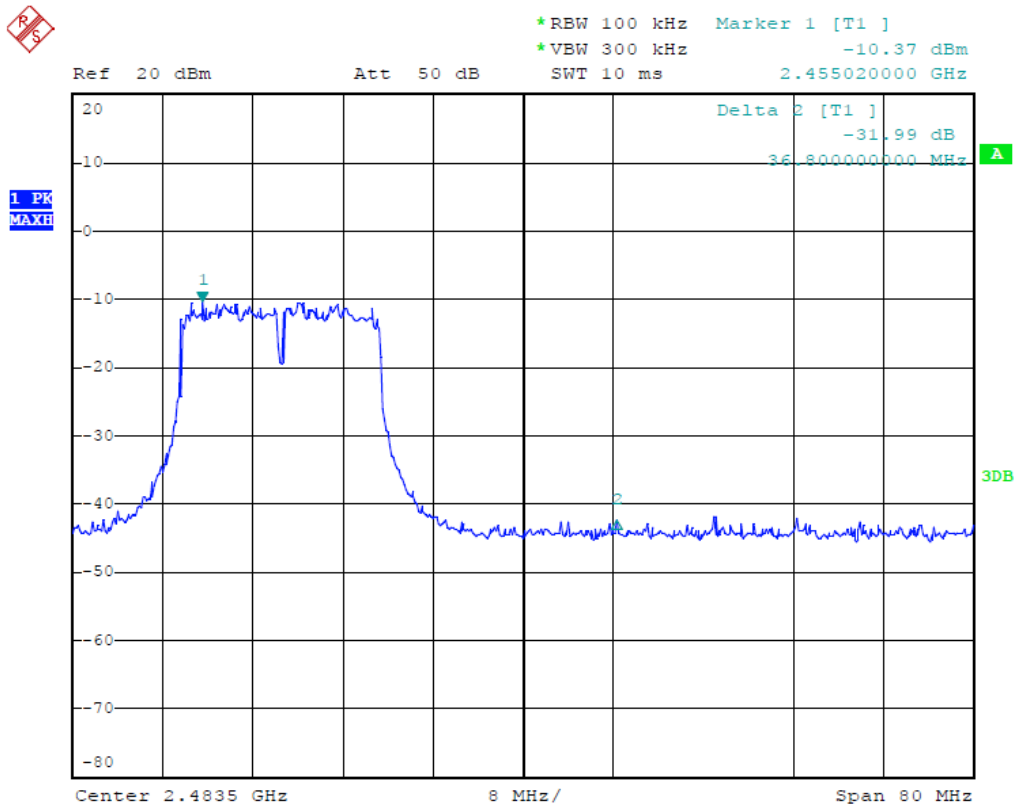


Date: 18.DEC.2012 19:32:00

802.11n Channel Low 2422MHz (40MHz)

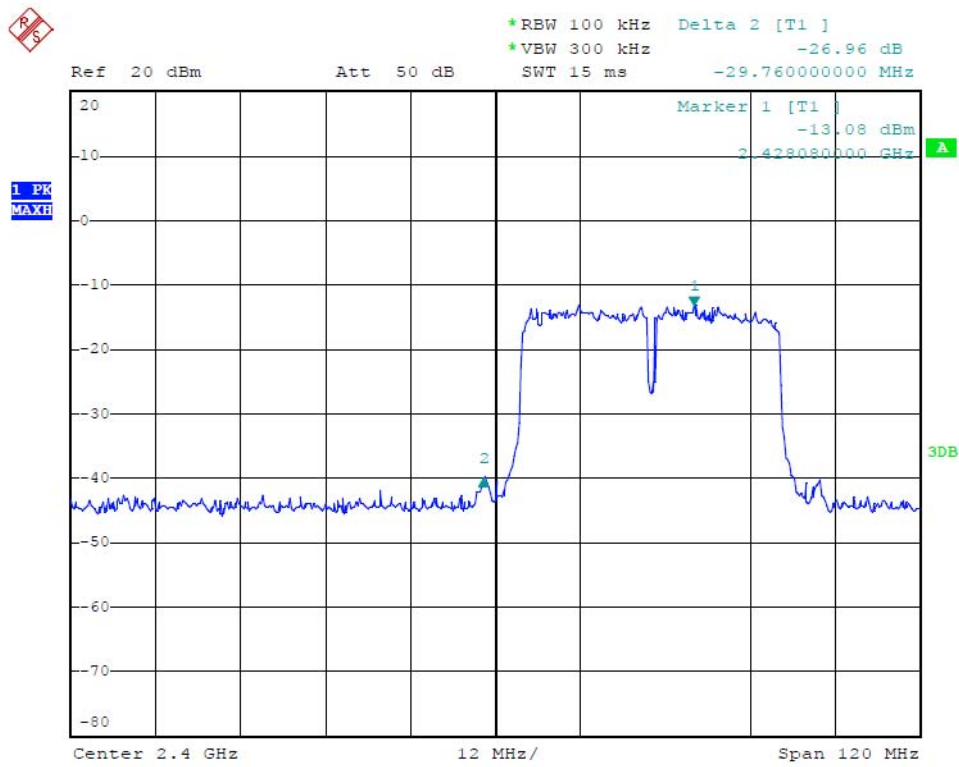

Date: 18.DEC.2012 19:25:11

802.11n Channel High 2452MHz (40MHz)

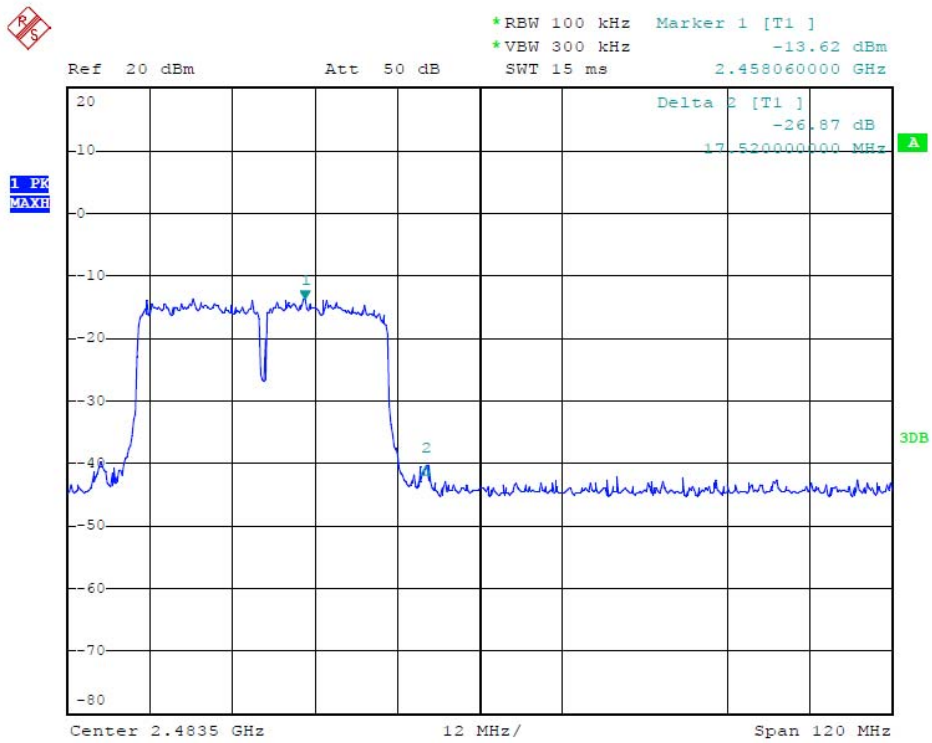

Date: 18.DEC.2012 19:26:04

Radiated Band Edge Result

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11b Channel Low 2412MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	39.00	47.63	-7.81	31.19	39.82	54.00	74.00	-22.81	-34.18	Vertical
2376.130	45.02	50.43	-7.62	37.40	42.81	54.00	74.00	-16.60	-31.19	Vertical
2390.000	38.69	38.99	-7.53	31.16	31.46	54.00	74.00	-22.84	-42.54	Vertical
2310.000	42.00	48.76	-7.81	34.19	40.95	54.00	74.00	-19.81	-33.05	Horizontal
2375.989	43.85	49.29	-7.62	36.23	41.67	54.00	74.00	-17.77	-32.33	Horizontal
2390.000	39.62	45.67	-7.53	32.09	38.14	54.00	74.00	-21.91	-35.86	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11b Channel High 2462MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	41.42	47.94	-7.37	34.05	40.57	54.00	74.00	-19.95	-33.43	Vertical
2488.774	42.92	49.33	-7.39	35.53	41.94	54.00	74.00	-18.47	-32.06	Vertical
2500.000	39.32	45.17	-7.40	31.92	37.77	54.00	74.00	-22.08	-36.23	Vertical
2483.500	38.91	44.94	-7.37	31.54	37.57	54.00	74.00	-22.46	-36.43	Horizontal
2490.993	41.46	48.91	-7.38	34.08	41.53	54.00	74.00	-19.92	-32.47	Horizontal
2500.000	39.33	45.20	-7.40	31.93	37.80	54.00	74.00	-22.07	-36.20	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11g Channel Low 2412MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	41.69	46.75	-7.81	33.88	38.94	54.00	74.00	-20.12	-35.06	Vertical
2375.849	47.99	52.68	-7.62	40.37	45.06	54.00	74.00	-13.63	-28.94	Vertical
2390.000	47.98	52.13	-7.53	40.45	45.62	54.00	74.00	-13.55	-28.38	Vertical
2310.000	38.97	44.75	-7.81	31.16	36.94	54.00	74.00	-22.84	-37.06	Horizontal
2376.130	42.61	48.89	-7.62	34.99	41.27	54.00	74.00	-19.01	-32.73	Horizontal
2390.000	39.17	45.46	-7.53	31.64	37.93	54.00	74.00	-22.36	-36.07	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11g Channel High 2462MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	43.97	49.00	-7.37	36.60	41.63	54.00	74.00	-17.40	-32.37	Vertical
2490.993	41.36	47.76	-7.38	33.98	40.38	54.00	74.00	-20.02	-33.62	Vertical
2500.000	40.00	45.77	-7.40	32.60	38.37	54.00	74.00	-21.40	-35.63	Vertical
2483.500	37.95	44.98	-7.37	30.58	37.61	54.00	74.00	-23.42	-36.39	Horizontal
2495.118	40.02	46.74	-7.39	32.63	39.35	54.00	74.00	-21.37	-34.65	Horizontal
2500.000	36.99	44.90	-7.40	29.59	37.50	54.00	74.00	-24.41	-36.50	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel Low 2412MHz</u> <u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	41.66	47.22	-7.81	33.85	39.41	54.00	74.00	-20.15	-34.59	Vertical
2376.130	43.93	53.41	-7.62	36.31	45.79	54.00	74.00	-17.69	-28.21	Vertical
2390.000	42.02	48.73	-7.53	34.49	41.20	54.00	74.00	-19.51	-32.80	Vertical
2310.000	39.69	45.84	-7.81	31.88	38.03	54.00	74.00	-22.12	-35.97	Horizontal
2375.849	42.71	48.48	-7.62	35.09	40.86	54.00	74.00	-18.91	-33.14	Horizontal
2390.000	41.22	47.35	-7.53	33.69	39.82	54.00	74.00	-20.31	-34.18	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel High 2462MHz (20MHz)</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	42.02	48.47	-7.37	34.65	41.10	54.00	74.00	-19.35	-32.90	Vertical
2492.578	40.00	46.75	-7.39	32.61	39.36	54.00	74.00	-21.39	-34.64	Vertical
2500.000	38.99	43.62	-7.40	31.59	36.22	54.00	74.00	-22.41	-37.78	Vertical
2483.500	39.17	45.35	-7.37	31.80	37.98	54.00	74.00	-22.20	-36.02	Horizontal
2489.566	40.02	46.87	-7.39	32.63	39.48	54.00	74.00	-21.37	-34.52	Horizontal
2500.000	36.91	43.69	-7.40	29.51	36.29	54.00	74.00	-24.49	-37.71	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel Low 2422MHz</u>	Test Engineer:	<u>Pei</u>
	<u>(40MHz)</u>		

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	40.02	46.60	-7.81	32.21	38.79	54.00	74.00	-21.79	-35.21	Vertical
2376.046	48.02	53.47	-7.62	40.40	45.85	54.00	74.00	-13.60	-28.15	Vertical
2390.000	49.32	54.18	-7.53	41.79	46.65	54.00	74.00	-12.21	-27.35	Vertical
2310.000	40.03	46.58	-7.81	32.22	38.77	54.00	74.00	-21.78	-35.23	Horizontal
2376.235	43.69	51.90	-7.62	36.07	44.28	54.00	74.00	-17.93	-29.72	Horizontal
2390.000	40.33	46.24	-7.53	32.80	38.71	54.00	74.00	-21.20	-35.29	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>December 17, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>PC9711</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel High 2452MHz (40MHz)</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	40.08	46.57	-7.37	32.71	39.20	54.00	74.00	-21.29	-34.80	Vertical
2493.631	41.08	47.82	-7.39	33.69	40.43	54.00	74.00	-20.31	-33.57	Vertical
2500.000	39.62	46.05	-7.40	32.22	38.65	54.00	74.00	-21.78	-35.35	Vertical
2483.500	39.64	45.82	-7.37	32.27	38.45	54.00	74.00	-21.73	-35.55	Horizontal
2487.116	41.90	47.91	-7.38	34.52	40.53	54.00	74.00	-19.48	-33.47	Horizontal
2500.000	38.97	44.83	-7.40	31.57	37.43	54.00	74.00	-22.43	-36.57	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #387	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/24/26
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

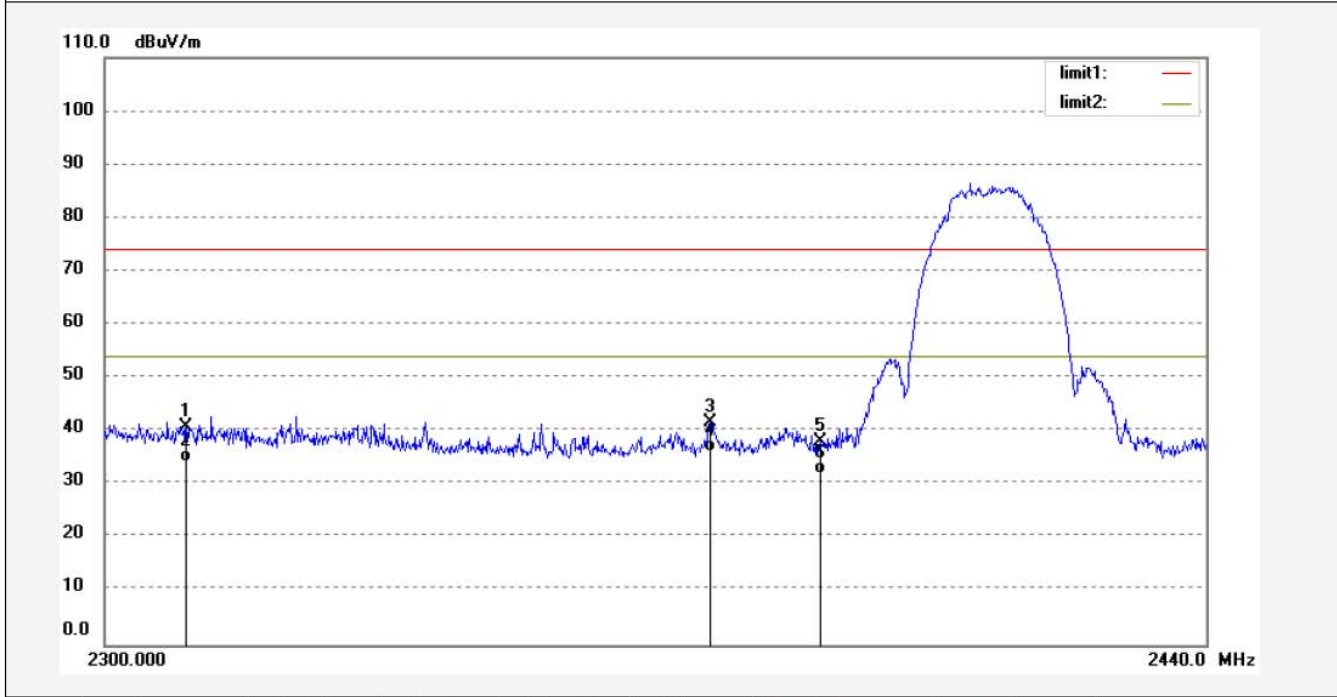

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	48.76	-7.81	40.95	74.00	-33.05	peak			
2	2310.000	42.00	-7.81	34.19	54.00	-19.81	AVG			
3	2375.989	49.29	-7.62	41.67	74.00	-32.33	peak			
4	2375.989	43.85	-7.62	36.23	54.00	-17.77	AVG			
5	2390.000	45.67	-7.53	38.14	74.00	-35.86	peak			
6	2390.000	39.62	-7.53	32.09	54.00	-21.91	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #386	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/22/47
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

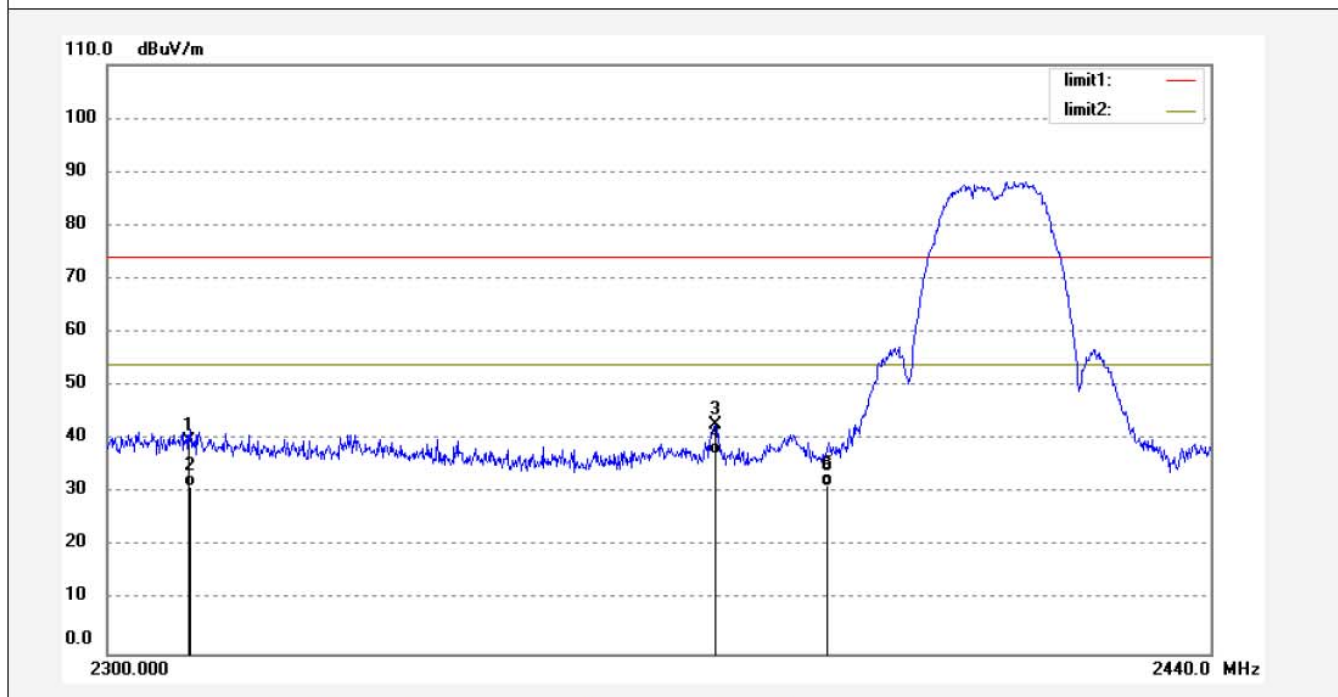

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	47.63	-7.81	39.82	74.00	-34.18	peak			
2	2310.000	39.00	-7.81	31.19	54.00	-22.81	AVG			
3	2376.130	50.43	-7.62	42.81	74.00	-31.19	peak			
4	2376.130	45.02	-7.62	37.40	54.00	-16.60	AVG			
5	2390.000	38.99	-7.53	31.46	54.00	-22.54	peak			
6	2390.000	38.69	-7.53	31.16	54.00	-22.84	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #384	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/15/56
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

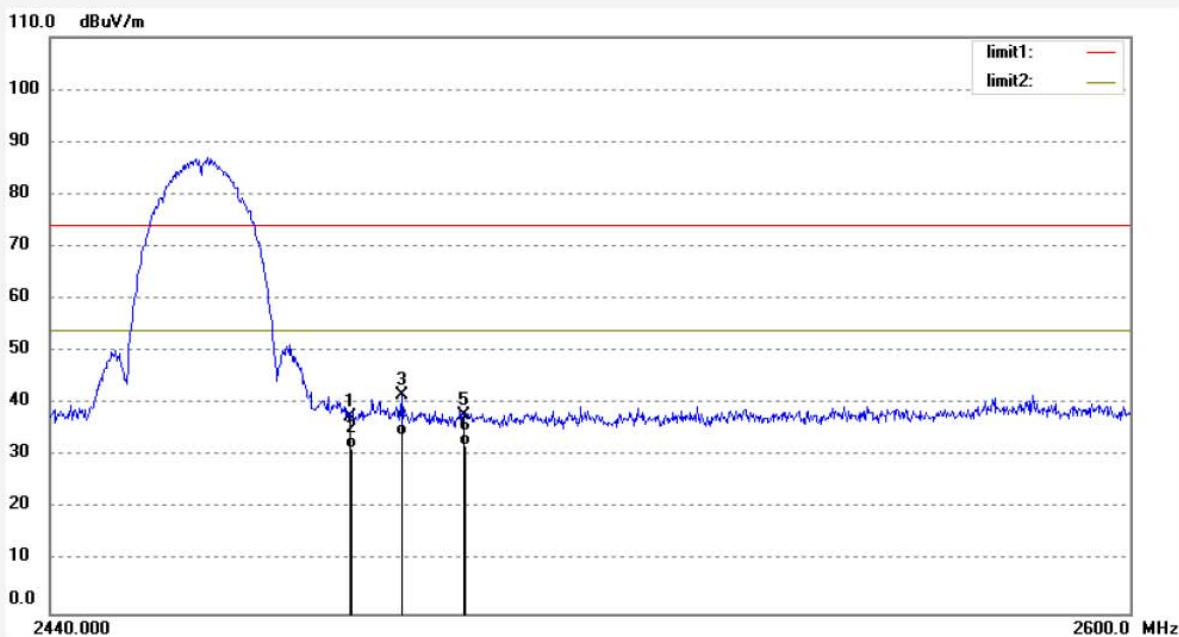

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.94	-7.37	37.57	74.00	-36.43	peak			
2	2483.500	38.91	-7.37	31.54	54.00	-22.46	AVG			
3	2490.993	48.91	-7.38	41.53	74.00	-32.47	peak			
4	2490.993	41.46	-7.38	34.08	54.00	-19.92	AVG			
5	2500.000	45.20	-7.40	37.80	74.00	-36.20	peak			
6	2500.000	39.33	-7.40	31.93	54.00	-22.07	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #385	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/18/12
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

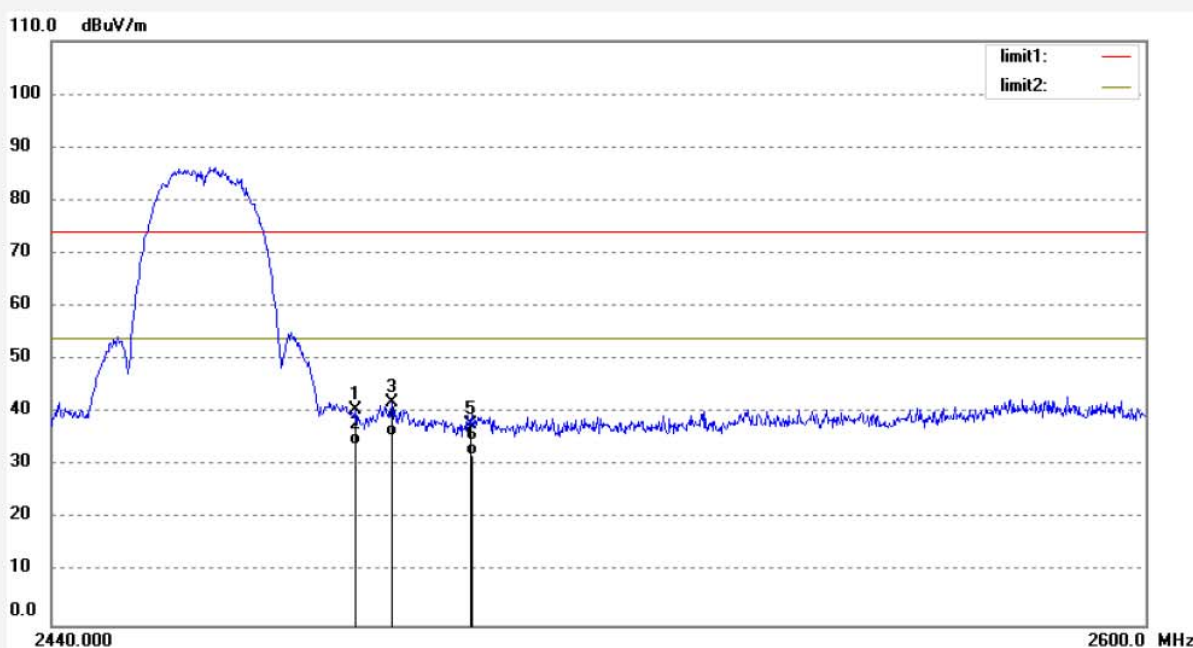

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.94	-7.37	40.57	74.00	-33.43	peak			
2	2483.500	41.42	-7.37	34.05	54.00	-19.95	AVG			
3	2488.774	49.33	-7.39	41.94	74.00	-32.06	peak			
4	2488.774	42.92	-7.39	35.53	54.00	-18.47	AVG			
5	2500.000	45.17	-7.40	37.77	74.00	-36.23	peak			
6	2500.000	39.32	-7.40	31.92	54.00	-22.08	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #380	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/01/53
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

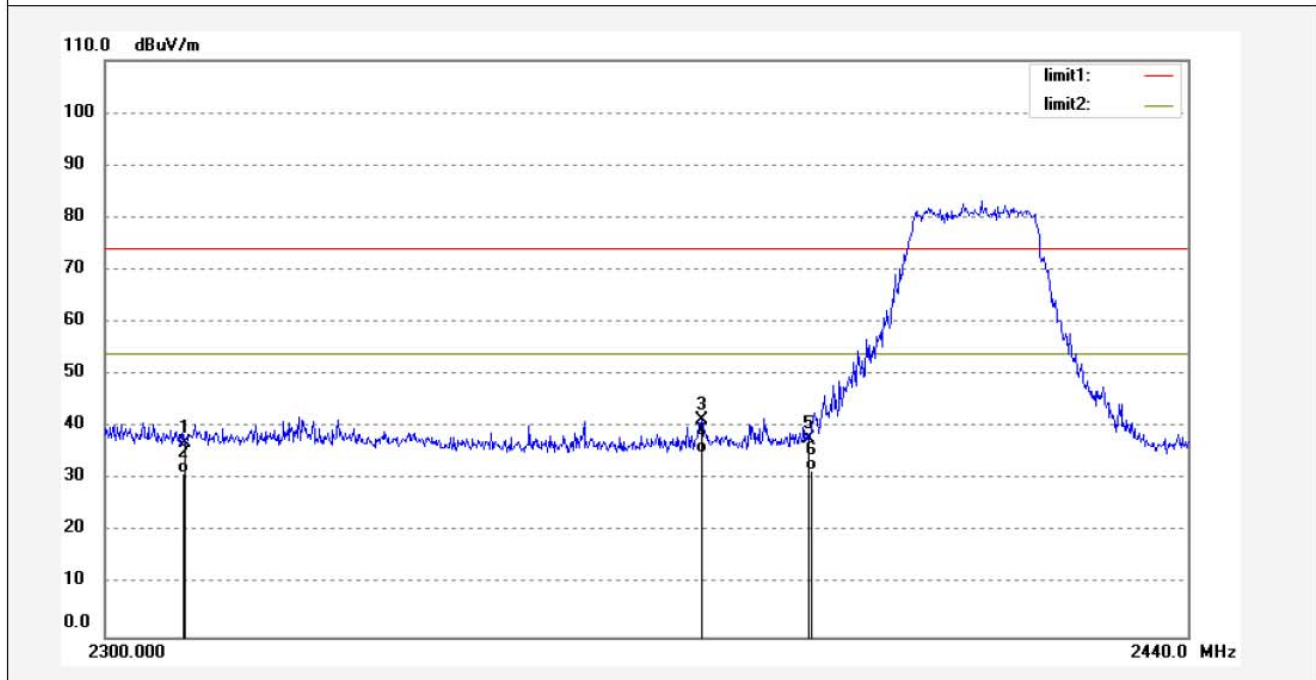

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.75	-7.81	36.94	74.00	-37.06	peak			
2	2310.000	38.97	-7.81	31.16	54.00	-22.84	AVG			
3	2376.130	48.89	-7.62	41.27	74.00	-32.73	peak			
4	2376.130	42.61	-7.62	34.99	54.00	-19.01	AVG			
5	2390.000	45.46	-7.53	37.93	74.00	-36.07	peak			
6	2390.000	39.17	-7.53	31.64	54.00	-22.36	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #381	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/05/06
EUT: MID	Engineer Signature:
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

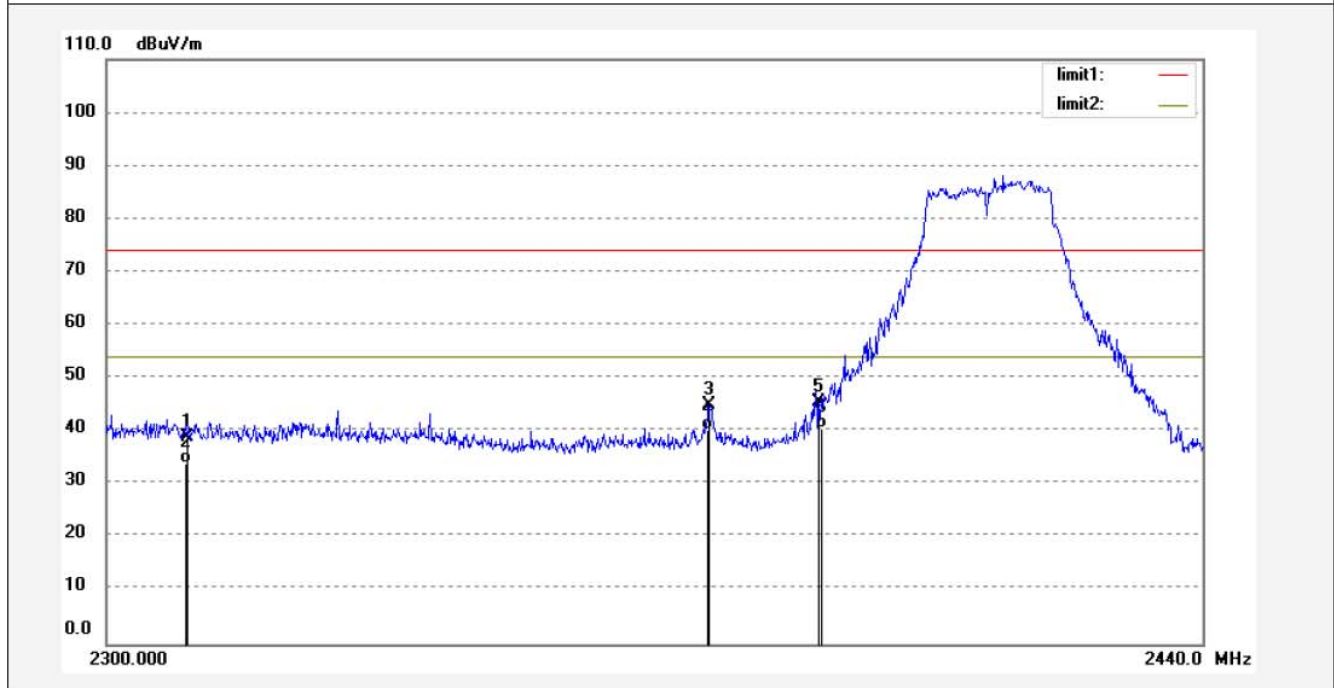

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.75	-7.81	38.94	74.00	-35.06	peak			
2	2310.000	41.69	-7.81	33.88	54.00	-20.12	AVG			
3	2375.849	52.68	-7.62	45.06	74.00	-28.94	peak			
4	2375.849	47.99	-7.62	40.37	54.00	-13.63	AVG			
5	2390.000	53.15	-7.53	45.62	74.00	-28.38	peak			
6	2390.000	47.98	-7.53	40.45	54.00	-13.55	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Star_tmp #383

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: MID

Mode: TX Channel 11(802.11g)

Model: PC9711

Manufacturer: Natural Sound

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/12/17/

Time: 4/12/59

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122826

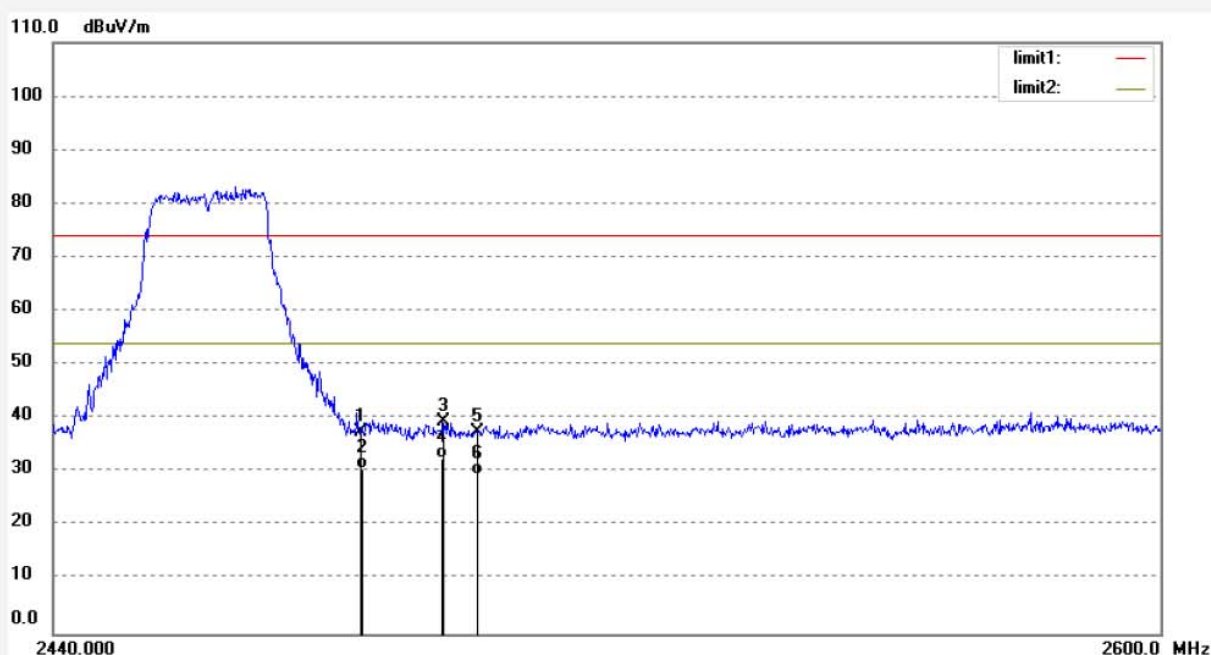

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.98	-7.37	37.61	74.00	-36.39	peak			
2	2483.500	37.95	-7.37	30.58	54.00	-23.42	AVG			
3	2495.118	46.74	-7.39	39.35	74.00	-34.65	peak			
4	2495.118	40.02	-7.39	32.63	54.00	-21.37	AVG			
5	2500.000	44.90	-7.40	37.50	74.00	-36.50	peak			
6	2500.000	36.99	-7.40	29.59	54.00	-24.41	AVG			


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: Star_tmp #382
 Standard: FCC 15C PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 49 %
 EUT: MID
 Mode: TX Channel 11(802.11g)
 Model: PC9711
 Manufacturer: Natural Sound

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/12/17/
 Time: 4/08/08
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20122826

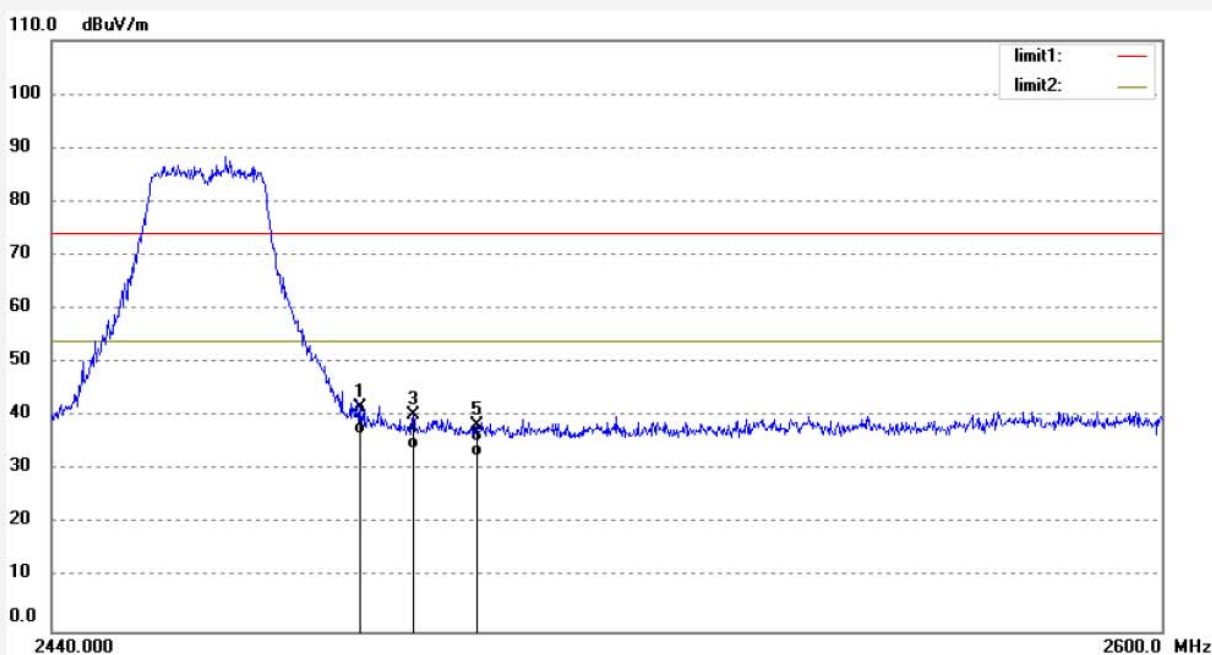

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.00	-7.37	41.63	74.00	-32.37	peak			
2	2483.500	43.97	-7.37	36.60	54.00	-17.40	AVG			
3	2490.993	47.76	-7.38	40.38	74.00	-33.62	peak			
4	2490.993	41.36	-7.38	33.98	54.00	-20.02	AVG			
5	2500.000	45.77	-7.40	38.37	74.00	-35.63	peak			
6	2500.000	40.00	-7.40	32.60	54.00	-21.40	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #388
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: MID
Mode: TX Channel 1(802.11n)
Model: PC9711
Manufacturer: Natural Sound

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/12/17/
Time: 4/27/12
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122826

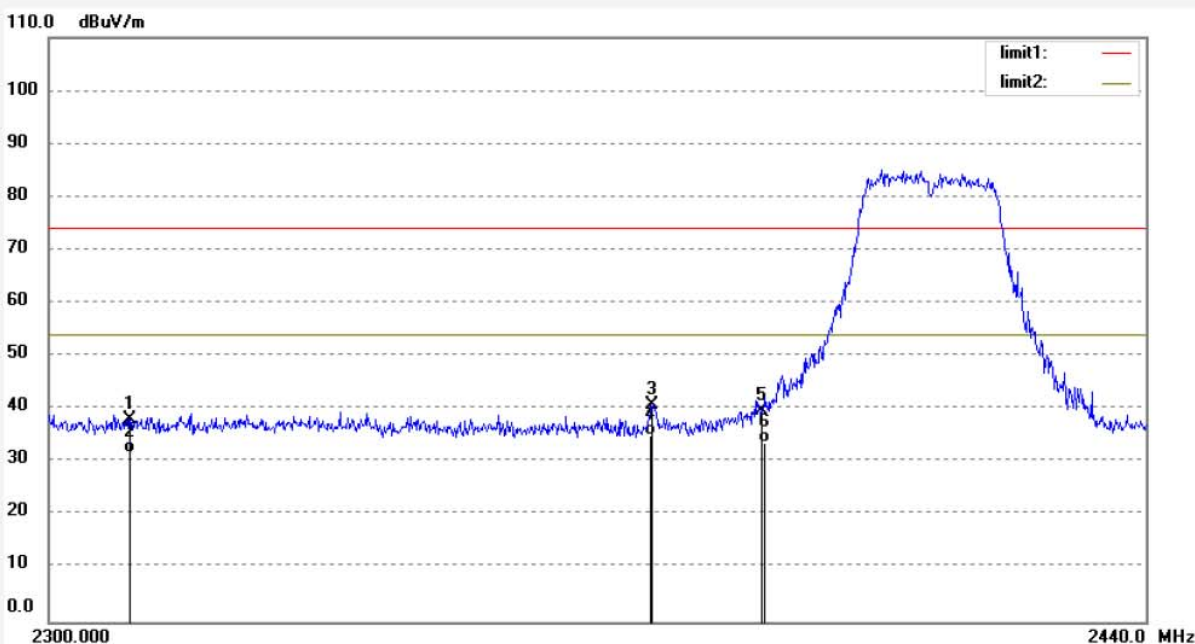

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	45.84	-7.81	38.03	74.00	-35.97	peak			
2	2310.000	39.69	-7.81	31.88	54.00	-22.12	AVG			
3	2375.849	48.48	-7.62	40.86	74.00	-33.14	peak			
4	2375.849	42.71	-7.62	35.09	54.00	-18.91	AVG			
5	2390.000	47.35	-7.53	39.82	74.00	-34.18	peak			
6	2390.000	41.22	-7.53	33.69	54.00	-20.31	AVG			


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: Star_tmp #389
 Standard: FCC 15C PK
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 23 C / 49 %
 EUT: MID
 Mode: TX Channel 1(802.11n)
 Model: PC9711
 Manufacturer: Natural Sound

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 12/12/17/
 Time: 4/31/39
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20122826

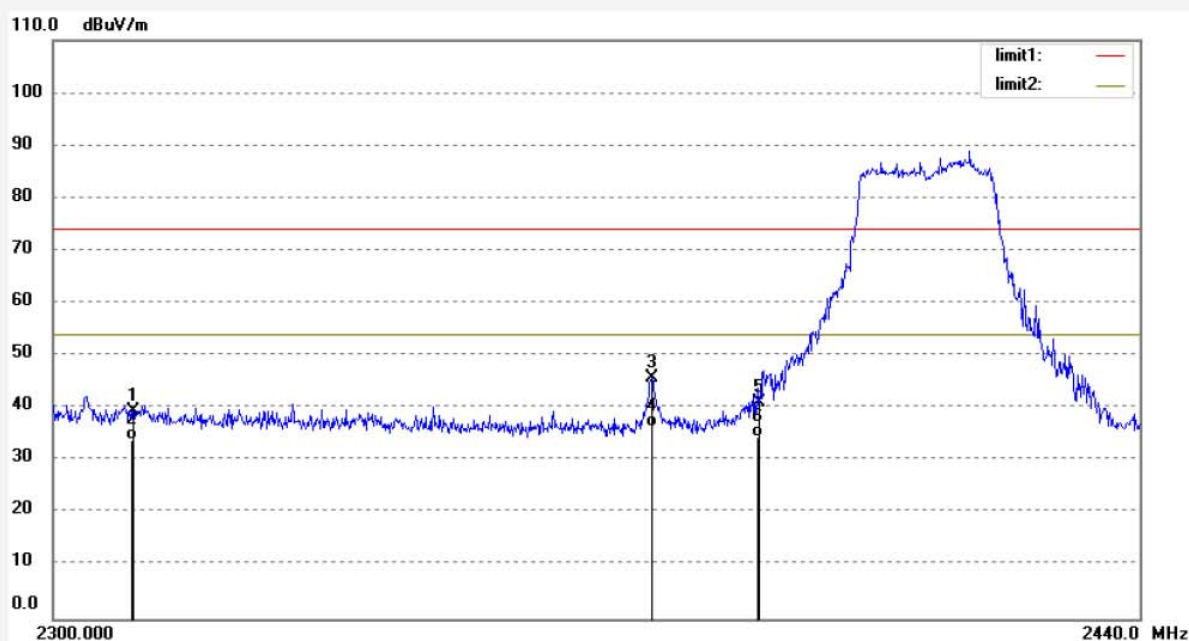

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	47.22	-7.81	39.41	74.00	-34.59	peak			
2	2310.000	41.66	-7.81	33.85	54.00	-20.15	AVG			
3	2376.130	53.41	-7.62	45.79	74.00	-28.21	peak			
4	2376.130	43.93	-7.62	36.31	54.00	-17.69	AVG			
5	2390.000	48.73	-7.53	41.20	74.00	-32.80	peak			
6	2390.000	42.02	-7.53	34.49	54.00	-19.51	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #391
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: MID
Mode: TX Channel 11(802.11n)
Model: PC9711
Manufacturer: Natural Sound

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 12/12/17/
Time: 4/36/42
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122826

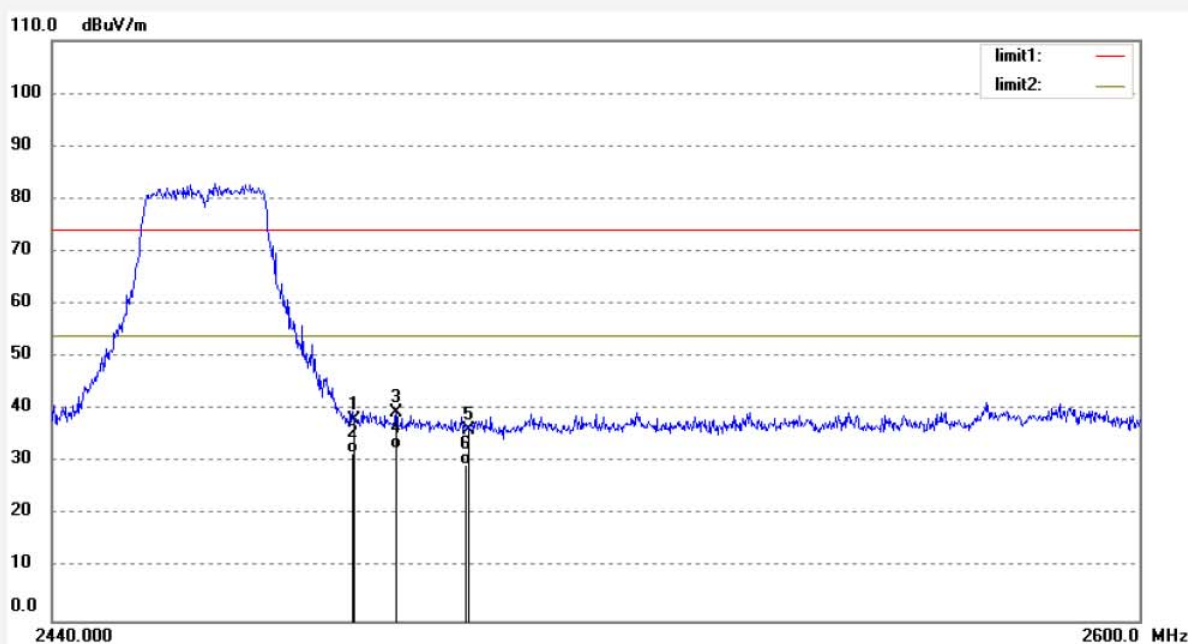

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.35	-7.37	37.98	74.00	-36.02	peak			
2	2483.500	39.17	-7.37	31.80	54.00	-22.20	AVG			
3	2489.566	46.87	-7.39	39.48	74.00	-34.52	peak			
4	2489.566	40.02	-7.39	32.63	54.00	-21.37	AVG			
5	2500.000	43.69	-7.40	36.29	74.00	-37.71	peak			
6	2500.000	36.91	-7.40	29.51	54.00	-24.49	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #390	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/33/30
EUT: MID	Engineer Signature:
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

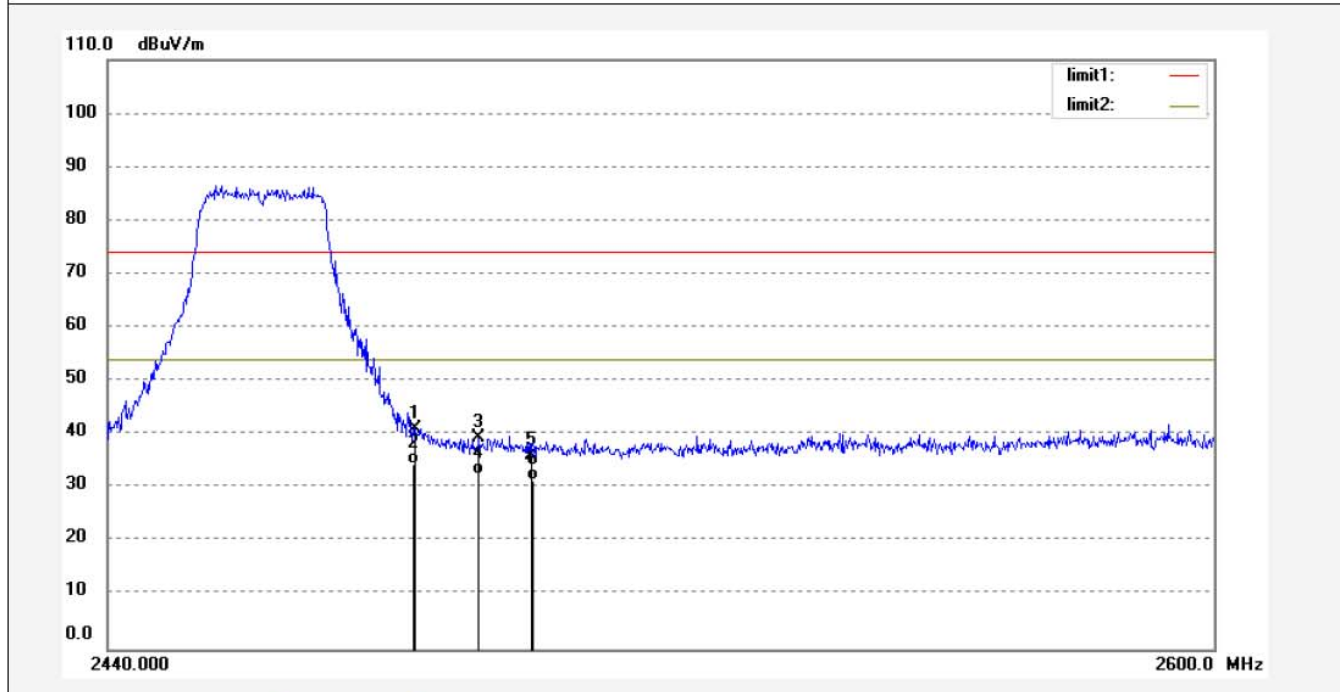

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.47	-7.37	41.10	74.00	-32.90	peak			
2	2483.500	42.02	-7.37	34.65	54.00	-19.35	AVG			
3	2492.578	46.75	-7.39	39.36	74.00	-34.64	peak			
4	2492.578	40.00	-7.39	32.61	54.00	-21.39	AVG			
5	2500.000	43.62	-7.40	36.22	74.00	-37.78	peak			
6	2500.000	38.99	-7.40	31.59	54.00	-22.41	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #395	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/50/16
EUT: MID	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

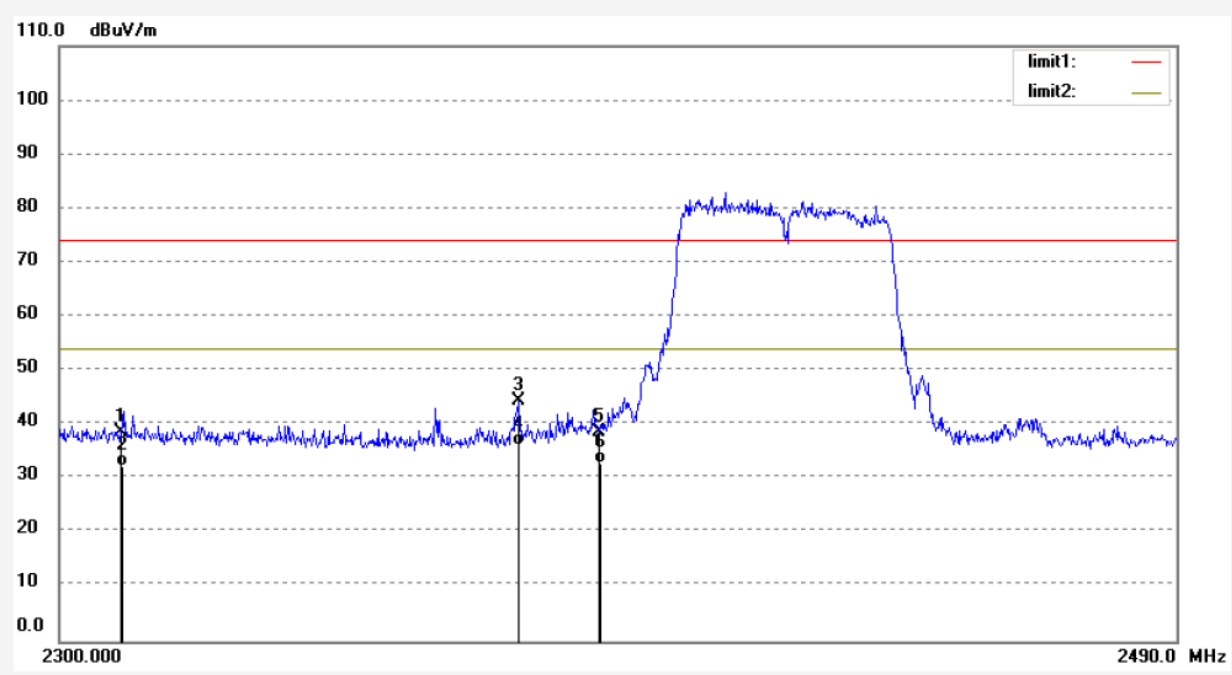

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.58	-7.81	38.77	74.00	-35.23	peak			
2	2310.000	40.03	-7.81	32.22	54.00	-21.78	AVG			
3	2376.235	51.90	-7.62	44.28	74.00	-29.72	peak			
4	2376.235	43.69	-7.62	36.07	54.00	-17.93	AVG			
5	2390.000	46.24	-7.53	38.71	74.00	-35.29	peak			
6	2390.000	40.33	-7.53	32.80	54.00	-21.20	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #394	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 12/12/17/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/46/04
EUT: MID	Engineer Signature:
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: PC9711	
Manufacturer: Natural Sound	

Note: Report No.:ATE20122826

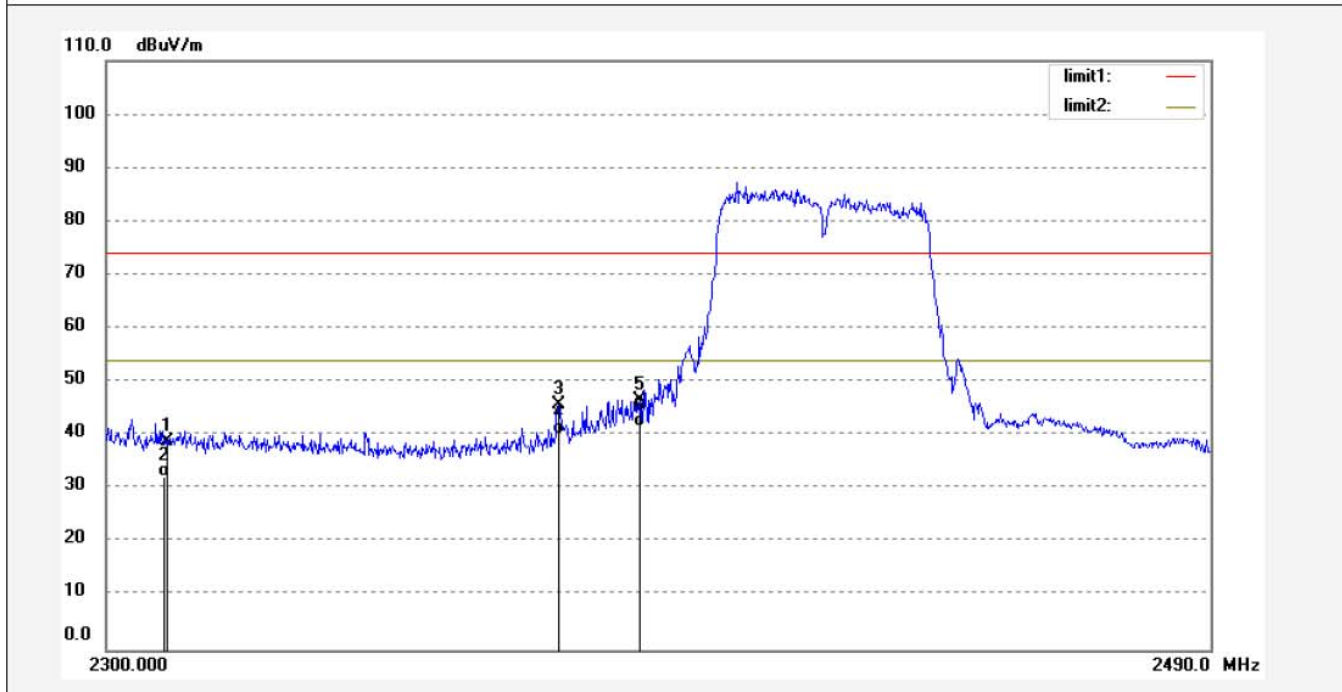

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.60	-7.81	38.79	74.00	-35.21	peak			
2	2310.000	40.02	-7.81	32.21	54.00	-21.79	AVG			
3	2376.046	53.47	-7.62	45.85	74.00	-28.15	peak			
4	2376.046	48.02	-7.62	40.40	54.00	-13.60	AVG			
5	2390.000	54.18	-7.53	46.65	74.00	-27.35	peak			
6	2390.000	49.32	-7.53	41.79	54.00	-12.21	AVG			