



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: TEI@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

INDUSTRY CANADA RSS-131 AND FCC PART 22H AND PART 24E TEST REPORT

Applicant	Wilson Electronics, Inc.
Address	3301 E. Deseret Drive St. George, Utah 84790 USA
FCC ID	PWO271220SA
IC Label	IC: 4726A-271220SA
Model Number	271220
Product Description	Dual-Band Bi-Directional Wireless Amplifier
Date Sample Received	November 3, 2008
Date Tested	November 11, 2008
Tested By	Nam Nguyen
Approved By	Mario de Aranzeta
Report No.	2596AUT8TestReport.pdf
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Test Certificate #0955-01



TABLE OF CONTENTS

ATTESTATION STATEMENT	5
REPORT SUMMARY	6
TEST ENVIRONMENT	6
TEST SETUP	6
DEVICE UNDER TEST INFORMATION	7
EQUIPMENT LIST	8
TEST PROCEDURE	9
RF POWER OUTPUT	12
Test Data Table 1 – Output Power – CDMA 1900 – Uplink/Downlink	12
Test Data Table 2 – Output Power – EDGE 1900 – Uplink/Downlink	12
Test Data Table 3 – Output Power – GSM 1900 – Uplink/Downlink	12
Test Data Table 4 – Output Power – WCDMA 1900 – Uplink/Downlink	12
Test Data Table 5 – Output Power – CDMA 800 – Uplink/Downlink	13
Test Data Table 6 – Output Power – EDGE 800 – Uplink/Downlink	13
Test Data Table 7 – Output Power – GSM 800 – Uplink/Downlink	13
Test Data Table 8 – Output Power – WCDMA 800 – Uplink/Downlink	13
Test Data Table 9 – Output Power – AMPS 800 – Uplink/Downlink.....	13
INPUT/OUTPUT MODULATED AMPLITUDE COMPARISON AND BAND-EDGES COMPLIANCE	14
Test Data Table 10 – CDMA 1900 – Uplink/Downlink.....	15
Figure 1: CDMA – In vs. Out 1851.25MHz.....	15
Figure 2: CDMA – In vs. Out 1908.75MHz.....	16
Figure 3: CDMA – In vs. Out 1931.25MHz.....	17
Figure 4: CDMA – In vs. Out 1988.75MHz.....	18
Test Data Table 11 – WCDMA 1900 – Uplink/Downlink.....	19
Figure 5: WCDMA – In vs. Out 1852.50 MHz.....	19
Figure 6: WCDMA – In vs. Out 1907.50 MHz.....	20
Figure 7: WCDMA – In vs. Out 1932.50 MHz.....	21
Figure 8: WCDMA – In vs. Out 1977.50 MHz.....	22
Test Data Table 12 – EDGE 1900 – Uplink/Downlink	23
Figure 9: EDGE – In vs. Out 1850.20MHz	23
Figure 10: EDGE – In vs. Out 1909.80MHz	24
Figure 11: EDGE – In vs. Out 1930.20MHz	25
Figure 12: EDGE – In vs. Out 1989.80MHz	26
Test Data Table 13 –GSM 1900 – Uplink/Downlink	27
Figure 13: GSM – In vs. Out 1850.20MHz	27
Figure 14: GSM – In vs. Out 1909.80MHz	28
Figure 15: GSM – In vs. Out 1930.20MHz	29
Figure 16: GSM – In vs. Out 1989.80MHz	30
Test Data Table 14 – CDMA 800 – Uplink/Downlink.....	31
Figure 17: CDMA – In vs. Out 825.25MHz.....	31

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



Figure 18: CDMA – In vs. Out 847.75 MHz.....	32
Figure 19: CDMA – In vs. Out 870.25 MHz.....	33
Figure 20: CDMA – In vs. Out 892.75 MHz.....	34
Test Data Table 15 – WCDMA 800 – Uplink/Downlink.....	35
Figure 21: WCDMA – In vs. Out 826.50 MHz.....	35
Figure 22: WCDMA – In vs. Out 846.50 MHz.....	36
Figure 23: WCDMA – In vs. Out 871.50 MHz.....	37
Figure 24: WCDMA – In vs. Out 893.50 MHz.....	38
Test Data Table 16 – EDGE 800 – Uplink/Downlink	39
Figure 25: EDGE – In vs. Out 824.20 MHz	39
Figure 26: EDGE – In vs. Out 848.80 MHz	40
Figure 27: EDGE – In vs. Out 869.20 MHz	41
Figure 28: EDGE – In vs. Out 893.80 MHz	42
Test Data Table 17 – GSM 800 – Uplink/Downlink	43
Figure 29: GSM – In vs. Out 824.2 MHz	43
Figure 30: GSM – In vs. Out 848.8 MHz	44
Figure 31: GSM – In vs. Out 869.2MHz	45
Figure 32: GSM – In vs. Out 893.8MHz	46
Test Data Table 18 – AMPS 800 – Uplink/Downlink	47
Figure 33: AMPS – In vs. Out 824.20 MHz.....	47
INTERMODULATION PRODUCT SPURIOUS EMISSIONS	51
Figure 34: CDMA 3 tones intermodulation - (1850 – 1910) MHz.	52
Figure 35: CDMA 3 tones intermodulation - (1930 – 1990) MHz.	53
Figure 36: CDMA 3 tones intermodulation - (824 – 849) MHz.	54
Figure 37: CDMA 3 tones intermodulation - (869 – 894) MHz.	55
Figure 38: GSM 3 tones intermodulation - (1850 – 1910) MHz.....	56
Figure 39: GSM 3 tones intermodulation - (1930 – 1990) MHz.....	57
Figure 40: GSM 3 tones intermodulation - (824 – 849) MHz.....	58
Figure 41: GSM 3 tones intermodulation - (869 – 894) MHz.....	59
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	60
Test Data Table 19 – Conducted Emissions – CDMA 1900 – Uplink	60
Test Data Table 20 – Conducted Emissions – CDMA 1900 – Downlink	60
Test Data Table 21 – Conducted Emissions – GSM 1900 - Uplink	61
Test Data Table 22 – Conducted Emissions – GSM 1900 - Downlink.....	61
Test Data Table 23 – Conducted Emissions – CDMA 800 - Uplink.....	61
Test Data Table 24 – Conducted Emissions – CDMA 800 - Downlink	62
Test Data Table 25 – Conducted Emissions – GSM 800 – Uplink.....	62
Test Data Table 26 – Conducted Emissions – GSM 800 - Downlink.....	62
Test Data Table 26 – Conducted Emissions – AMPS 800 - Uplink.....	63
Test Data Table 27 – Conducted Emissions – AMPS 800 – Downlink.....	63
OUT OF BAND REJECTION: FREQUENCY RESPONSE	64
Figure 42. Frequency response (1850 – 1910) MHz band	64
Figure 43. Frequency response (1930 – 1990) MHz band	65
Figure 44. Frequency response (824 – 849) MHz band.....	66
Figure 45. Frequency response (869 – 894) MHz band	67
FIELD STRENGTH OF SPURIOUS EMISSIONS	68

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



Test Data Table 28 – Radiated Emissions - CW.....	68
Test Data Table 29 – Radiated Emissions - CW.....	69
Test Data Table 30 – Radiated Emissions - CW.....	69
Test Data Table 31 – Radiated Emissions - CW	70
MEAN OUTPUT POWER FOR MULTI-CHANNEL ENHANCER (FOR IC ONLY) .	71
Test Data Table 32 – Mean Power	71
Test Data Table 33 – Mean Power	72
PASSBAND GAIN AND BANDWIDTH (FOR IC ONLY)	73
Figure 46: Passband Gain and Bandwidth (uplink 800 MHz)	73
Figure 47: Passband Gain and Bandwidth (downlink 800 MHz)	74
Figure 48: Passband Gain and Bandwidth (uplink 1900 MHz)	75
Figure 49: Passband Gain and Bandwidth (downlink 1900 MHz)	76

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



ATTESTATION STATEMENT

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report. All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, Florida 32669.

Authorized Signatory Name: Mario de Aranzeta



Signature:

Function: Engineer

Date: 5/5/2009

APPLICANT: WILSON ELECTRONICS, INC.
FCC ID: PWO271220SA, IC: 4726A-271220SA
Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



REPORT SUMMARY

Disclaimer	The test results relate only to the items tested.
Report Purpose	To demonstrate the modified unit continues to comply with FCC Part 22H and Pt 24 and Industry Canada RS-131 requirements for a PCS amplifier.
Applicable Rule Part(s)	Pt 22, Pt 24, Pt 15.109, RSS-131
Test Procedure(s)	ANSI/TIA-603-C: 2004

TEST ENVIRONMENT

Test Facilities	All required tests were performed by Timco Engineering Inc. that is located at 849 NW State Road 45 Newberry, FL 32669.
Test Conditions	Temperature: 26°C Relative Humidity: 50%

TEST SETUP

Deviation to the rules	There was no deviation from the test standards.
Modification to the DUT	No modification was made to the DUT.
Test Exercise (e.g. software description, test signal, etc.)	The DUT was placed in continuous transmit mode of operation.

APPLICANT: WILSON ELECTRONICS, INC.
FCC ID: PWO271220SA, IC: 4726A-271220SA
Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

DEVICE UNDER TEST INFORMATION

Manufactured by	Wilson Electronics
DUT Description	Dual-Band Bi-directional Wireless Amplifier
FCC ID	PWO271220SA
IC Label	IC: 4726A-271220SA
Model Name	271220
Operating Frequency	Uplink 824 – 849 MHz Downlink 869 – 894 MHz Uplink 1850 – 1910 MHz Downlink 1930 – 1990 MHz
Maximum Output Power Rating per manufacturer spec	Uplink: 1.39 Watt Downlink: 0.004 Watt
Emission Designators	F9W (CDMA & WCDMA), GXW (GSM), F1D (AMPS), GXW (EDGE)
Modulation(s)	CDMA, WCDMA, GSM, EDGE, FM, HSPA, EVDO
User Power Range & Control	There are NO user power controls
Test Item	Pre-Production
DC Voltage and Current into final amplifier	Power Into Final Amplifier (uplink) Vcc = 3.6 Vdc, 1.02 A Power Input (downlink) Vcc= 3.6 Vdc, 0.49A
Type of Equipment	Fixed and Mobile

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
AC Voltmeter	HP	400FL	2213A14499	CAL 12/29/06	12/29/08
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/07	3/30/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/06	3/3/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/06	4/5/09
Frequency Counter	HP	5385A	2730A03025	CAL 7/6/07	7/6/09
Hygro-Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	CAL 12/1/06	12/1/08
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/07	5/9/09
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/07	5/14/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA


Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

TEST PROCEDURE

RF Power Output

RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal voltage and the amplifier properly adjusted the RF output measures.


RF Output Power Test Setup Diagram

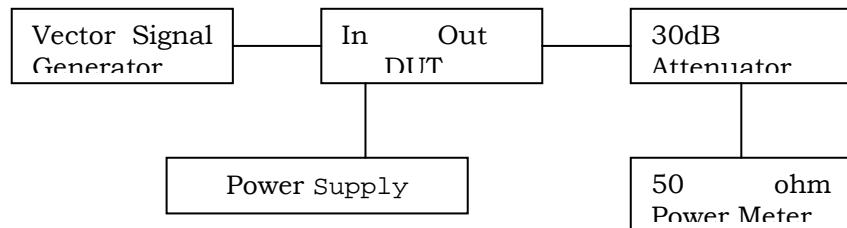

Input/Output Modulated Amplitude Comparison And Band-Edges Compliance

On the following plot, the reference level was calibrated using a resolution bandwidth wider than the emission bandwidth. First the gain was measured for the maximum output power. Then for each frequency and type of modulation, an attenuation equals to the gain of the amplifier was added on the measurement side of the amplifier, as to overlay the input versus output modulated envelope.

Test Setup Diagram

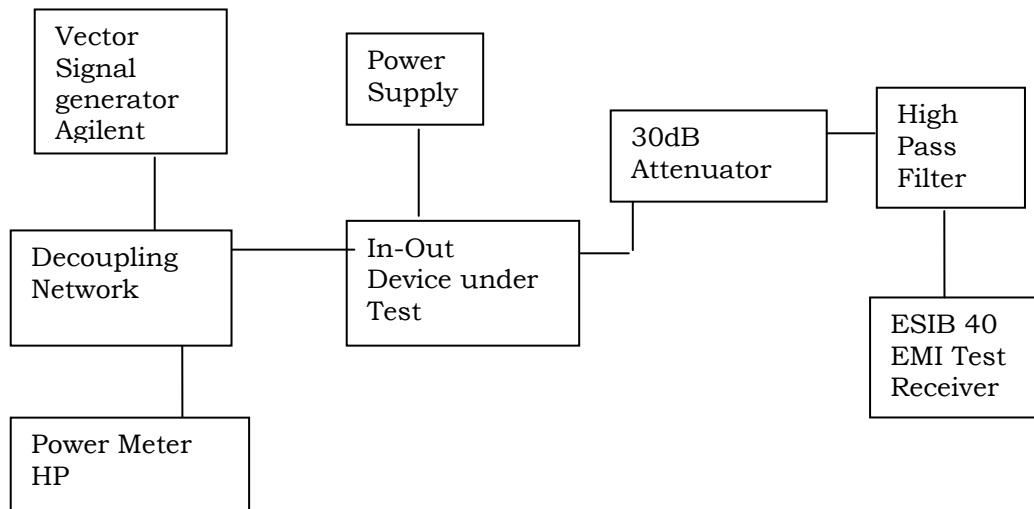

[Continued]

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA


Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Intermodulation Product Spurious Emissions

The procedure used was ANSI/TIA-603-C: 2004. The spectrum was scanned from 9kHz to at least the tenth harmonic of the fundamental using a HP 8566B spectrum analyzer.

The modulation type was tested using the two-tone / three tone test method. The input power to the amplifier was set at maximum drive level by combining the two tones. The two tones were chosen in such a way (1) the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

Setup Diagram

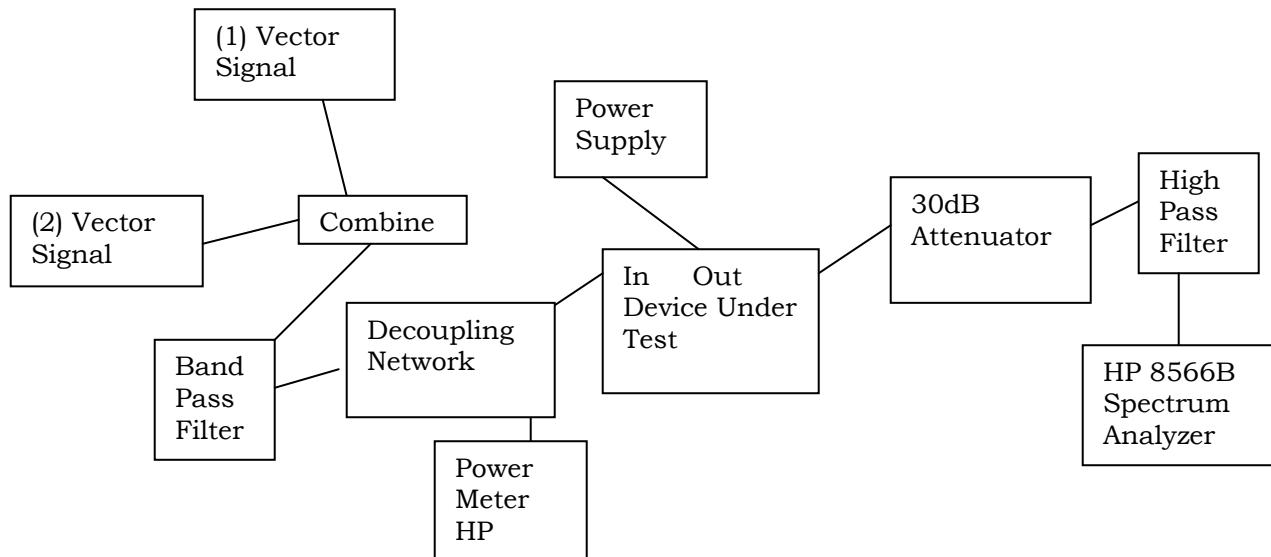


Spurious Emissions at Antenna Terminals

The procedure used was ANSI/TIA-603-C: 2004. The spectrum was scanned from 9kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer.

Data on the following page shows the level of conducted spurious responses. For analog modulation, the carrier was modulated 100% using a 2500 Hz tone. For digital modulation, the carrier is modulated to its maximum extent. The spectrum was scanned from 9 kHz to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA-603-C: 2004. The maximum input power was set for each test.

[Continued]


Conducted Spurious Emissions Test Setup Diagram

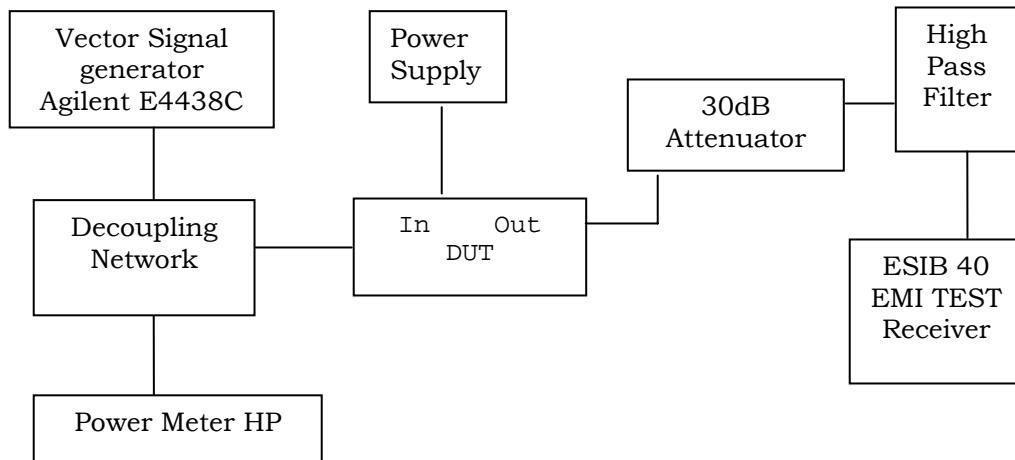

Radiated Spurious Emissions

The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. The CW signal was used to perform this test. This test was conducted per ANSI/TIA-603-C: 2004 using the substitution method.

Radiated Spurious Emissions Test Setup Diagram

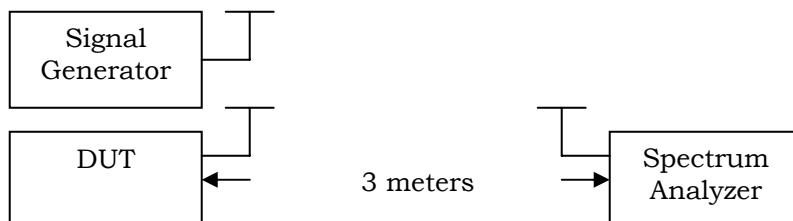

Equipment placed 80 cm above ground on a rotating table platform.

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

RF POWER OUTPUT

Rule Part(s) No.: Pt 2.1046(a)

Requirements: Pt 2.1046(a)

Test Result: As the following table indicates. Notes: the maximum power output value was obtained with CDMA modulation at 1868MHz and 1940MHz.

Test Data Table 1 – Output Power – CDMA 1900 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1851.25	-16	29.69	931
1880.00	-16	30.12	1028
1908.75	-15	27.87	612

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1931.25	-37	1.54	1.43
1960.00	-37	1.65	1.46
1988.75	-37	1.80	1.51

Test Data Table 2 – Output Power – EDGE 1900 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1850.20	-17	24.61	289
1880.00	-17	25.06	321
1909.80	-16	22.28	169

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1930.20	-45	-7.3	0.19
1960.00	-45	-6.4	0.23
1989.80	-45	-7.65	0.17

Test Data Table 3 – Output Power – GSM 1900 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1850.20	-16	24.91	310
1880.00	-16	26.28	425
1909.80	-15	22.31	170

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1930.20	-37	-2.82	0.52
1960.00	-37	-2.94	0.51
1989.80	-37	-2.7	0.54

Test Data Table 4 – Output Power – WCDMA 1900 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1852.50	-18	30.36	1086
1880.00	-18	30.88	1225
1907.50	-16	28.61	726

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
1932.50	-47	-1.00	0.79
1960.00	-47	-2.70	0.53
1987.50	-47	-1.65	0.68

[Continued]

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 5 – Output Power – CDMA 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
825.25	-17	29.98	995
836.50	-17	31.42	1387
847.75	-17	29.25	841

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
870.25	-37	5.63	3.66
881.50	-37	4.62	2.9
892.75	-37	4.59	2.88

Test Data Table 6 – Output Power – EDGE 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
824.20	-16	23.89	245
836.50	-16	26.04	402
848.80	-16	23.56	227

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
869.20	-41	-2.52	0.56
881.50	-41	-3.46	0.45
893.80	-41	-3.7	0.43

Test Data Table 7 – Output Power – GSM 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
824.20	-15	24.40	275
836.50	-15	26.85	484
848.80	-15	24.23	265

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
869.20	-37	0.68	1.17
881.50	-37	-0.08	0.98
893.80	-37	-0.63	0.86

Test Data Table 8 – Output Power – WCDMA 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
826.50	-18	29	794
836.50	-18	31.3	1349
846.50	-18	29.03	800

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
871.50	-47	0.21	1.05
881.50	-47	-2.8	0.52
891.50	-47	-1.43	0.72

Test Data Table 9 – Output Power – AMPS 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
824.20	-16	23.96	249
836.50	-16	26.57	454
848.80	-16	23.64	231

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
869.20	-41	-1.43	0.72
881.50	-41	-4.15	0.38
893.80	-41	-2.63	0.55

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



INPUT/OUTPUT MODULATED AMPLITUDE COMPARISON AND BAND-EDGES COMPLIANCE

Rule Parts No.: Pt 2.1049, Pt 2.1051, 22H, 24E

Requirements: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Data: The DUT appears to meet the requirements.

Bandedge compliance: Measurements were performed in accordance with Part 24.238

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

Compensating for RBW (1%) using $10 \log (12.5/3) = 6.2$ dB we get the following amplitudes at the bandedge:

Test Data Table 10 – CDMA 1900 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude bandedge (dBm)	Limit (dBm)	Margin (dB)
1851.25	1849.91	-20.54	-13	7.54
1908.75	1910.08	-20.32	-13	7.32
1931.25	1929.98	-36.32	-13	23.32
1988.75	1990.03	-38.25	-13	25.25


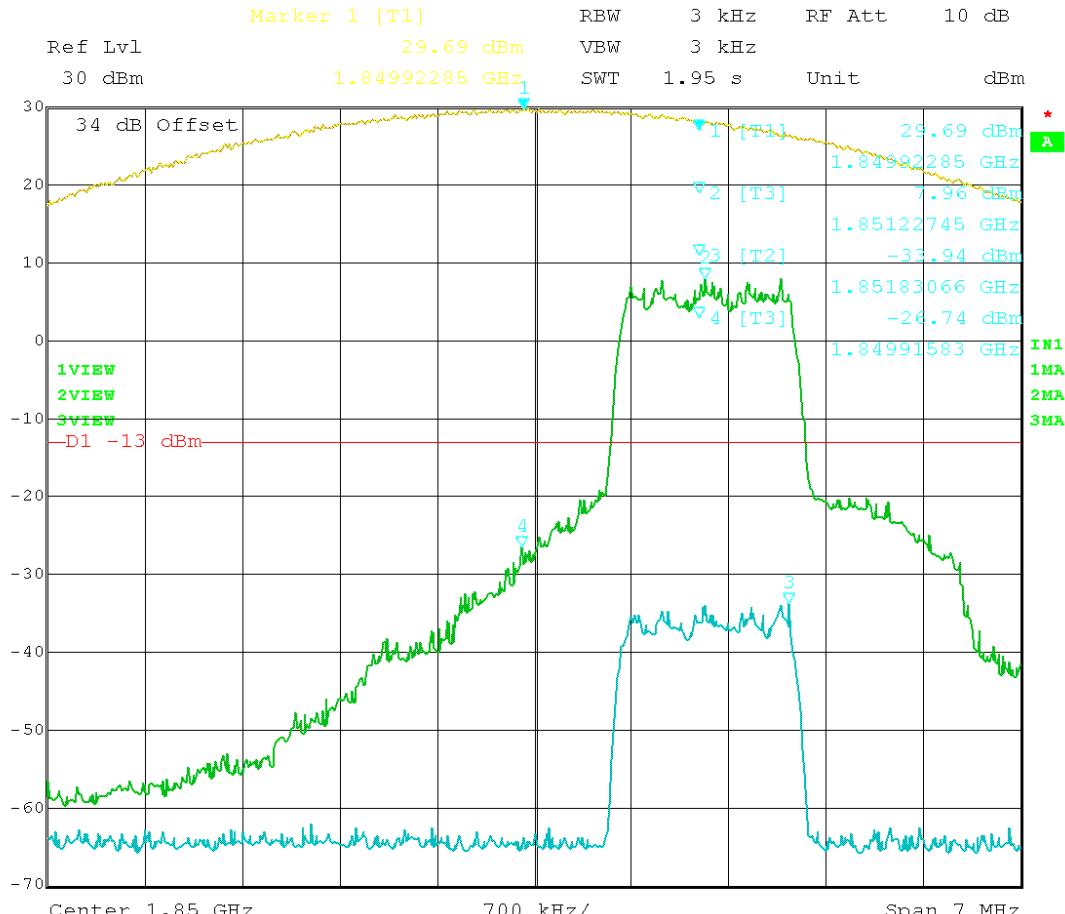


Figure 1: CDMA – In vs. Out 1851.25MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

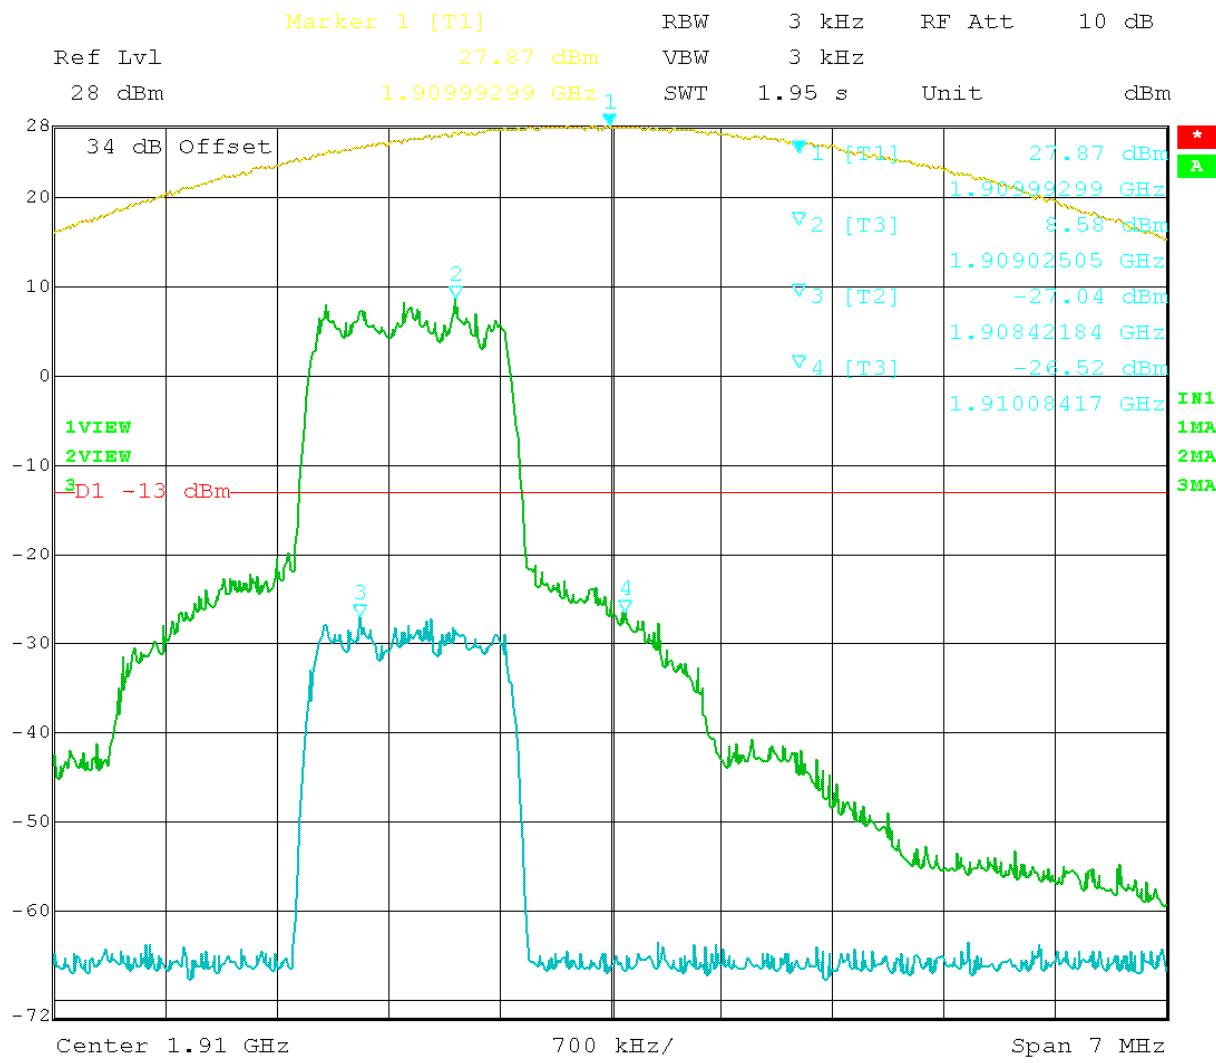

Date: 3.FEB.2009 14:35:25

Figure 2: CDMA – In vs. Out 1908.75MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

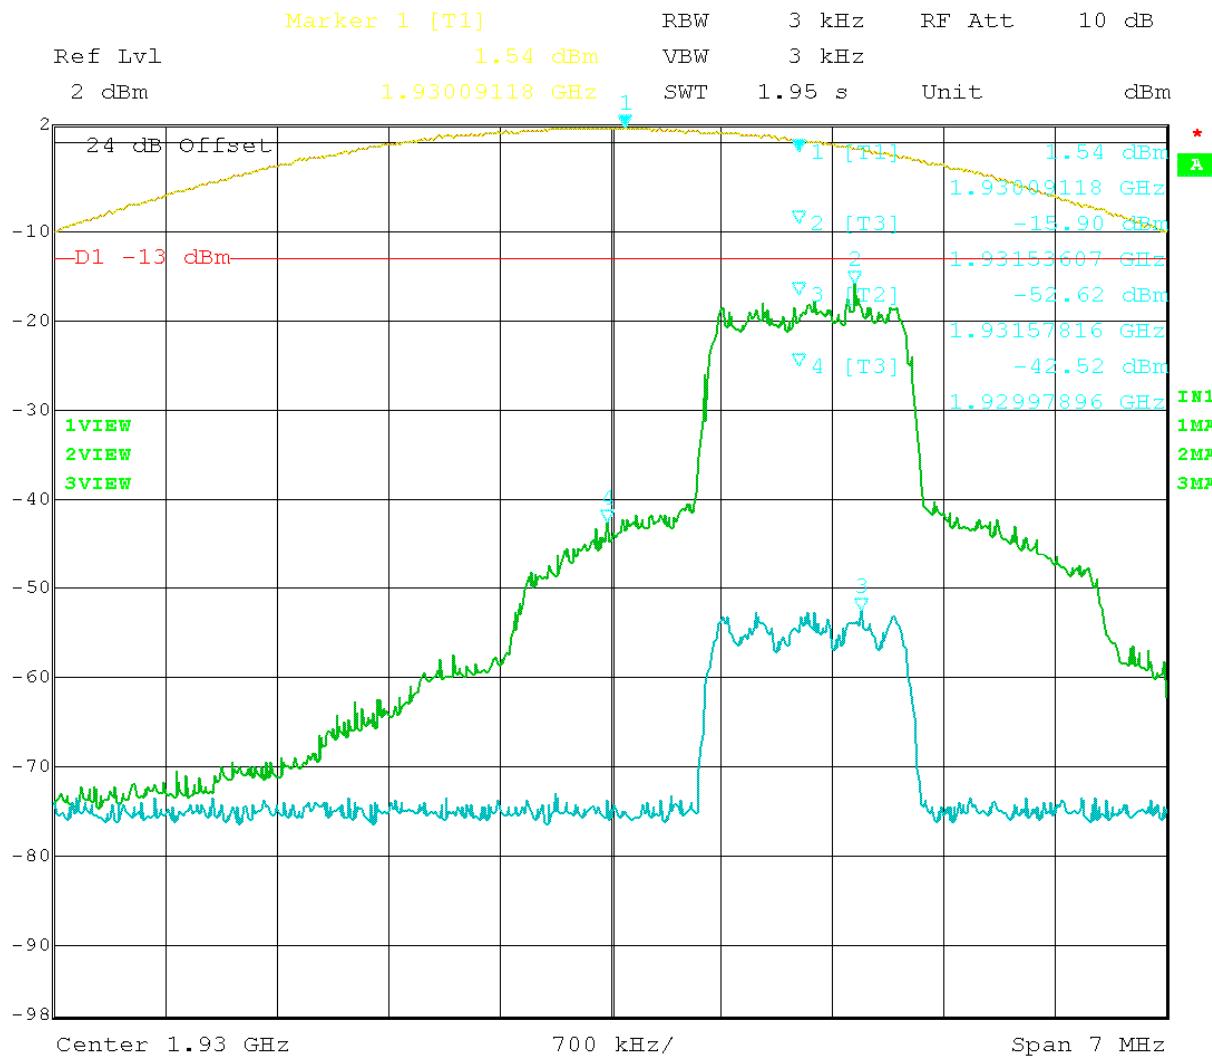


Figure 3: CDMA – In vs. Out 1931.25MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


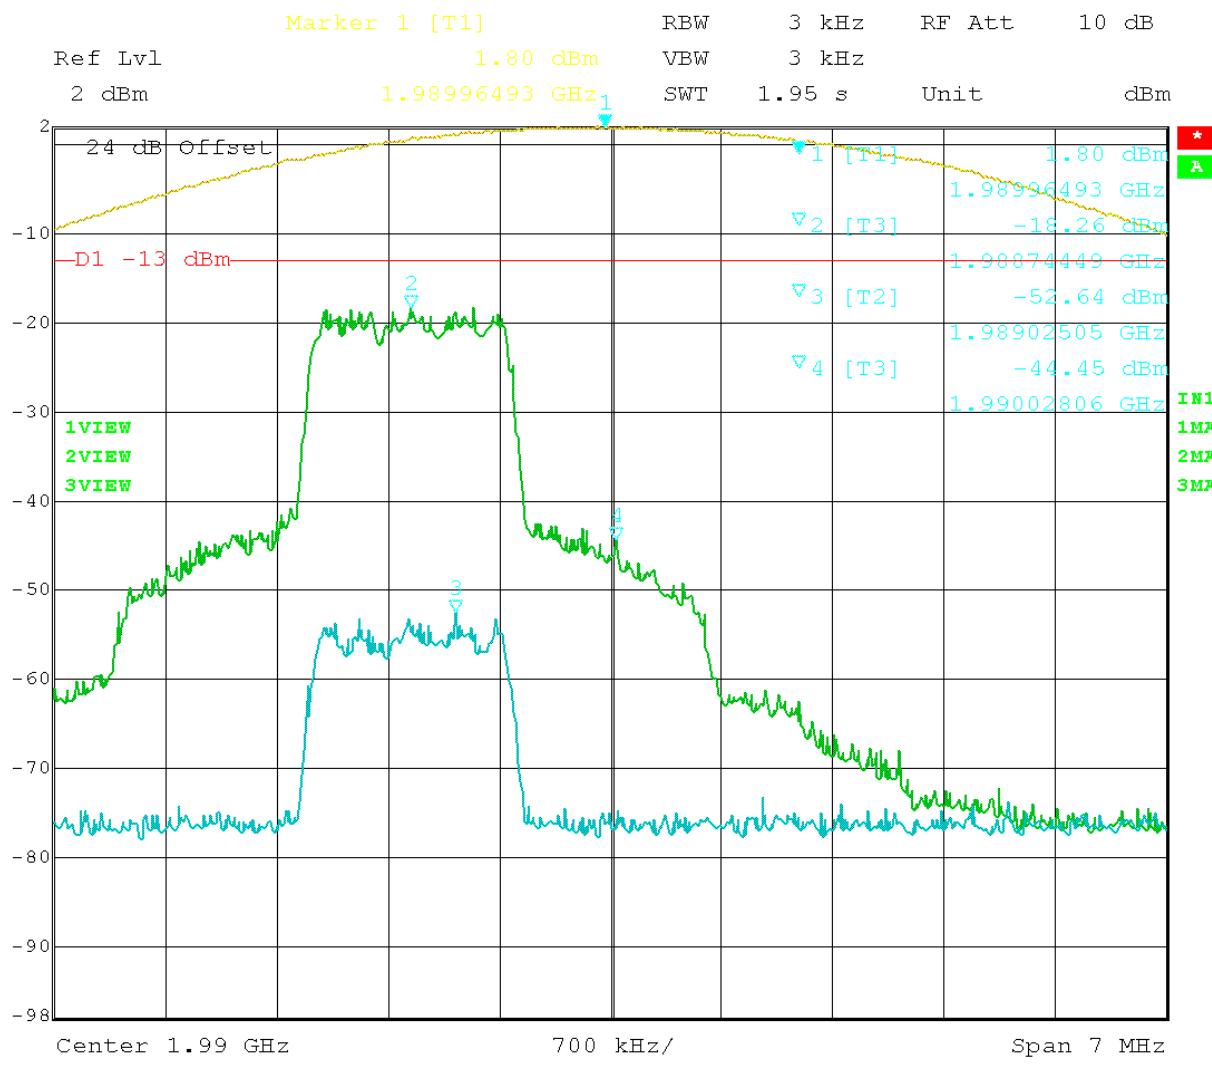


Figure 4: CDMA – In vs. Out 1988.75MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 11 – WCDMA 1900 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude bandedge (dBm)	Limit (dBm)	Margin (dB)
1852.5	1848.68	-22.26	-13	9.26
1907.5	1910.20	-26.08	-13	13.08
1932.5	1928.68	-40.85	-13	27.85
1987.5	1990.70	-48.45	-13	35.45

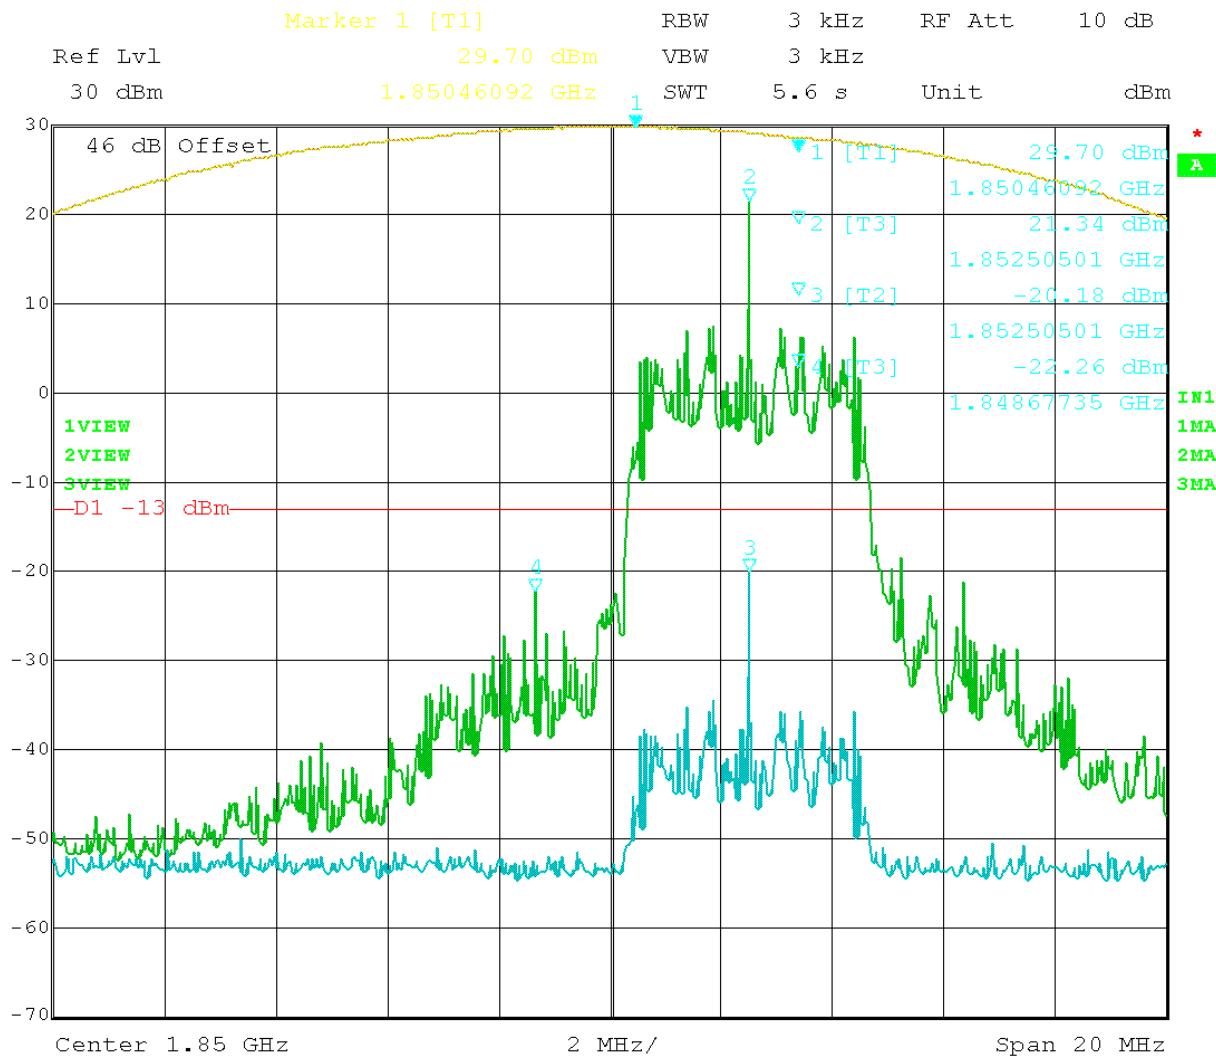


Date: 20.APR.2009 13:06:38

Figure 5: WCDMA – In vs. Out 1852.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

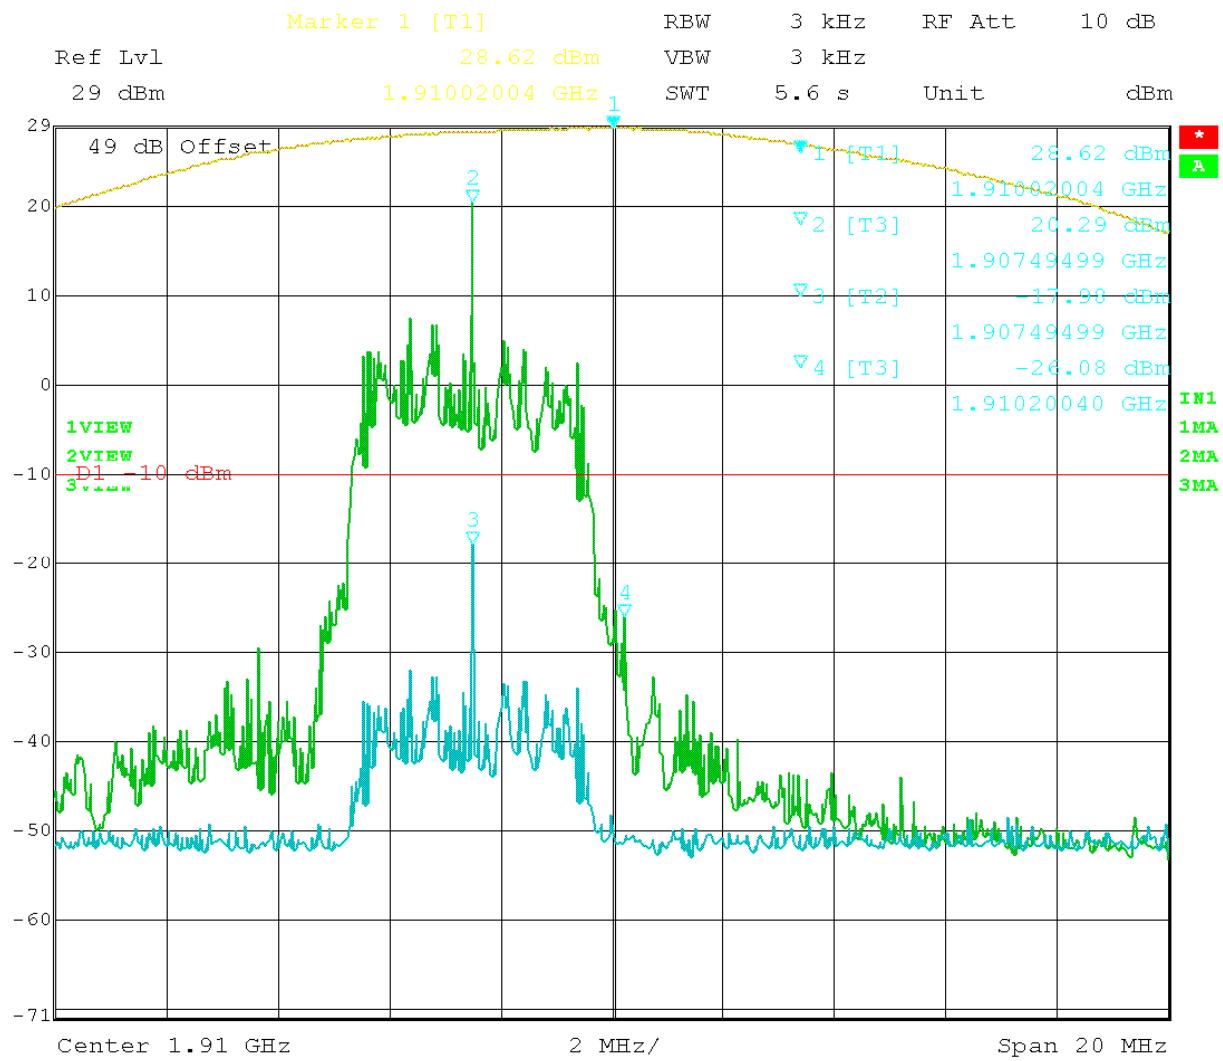

Date: 20.APR.2009 13:13:17

Figure 6: WCDMA – In vs. Out 1907.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


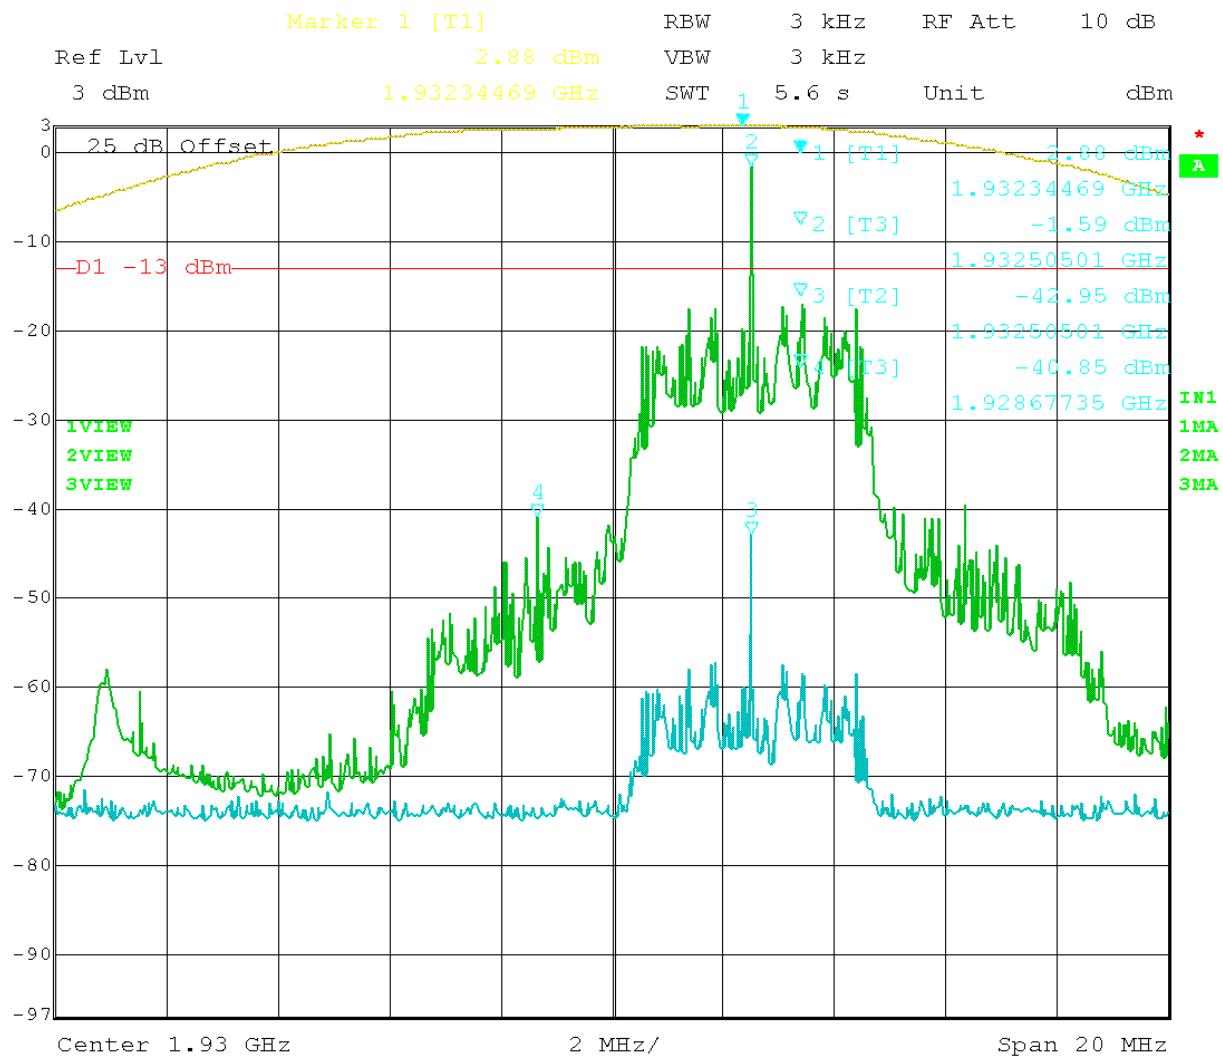


Figure 7: WCDMA – In vs. Out 1932.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

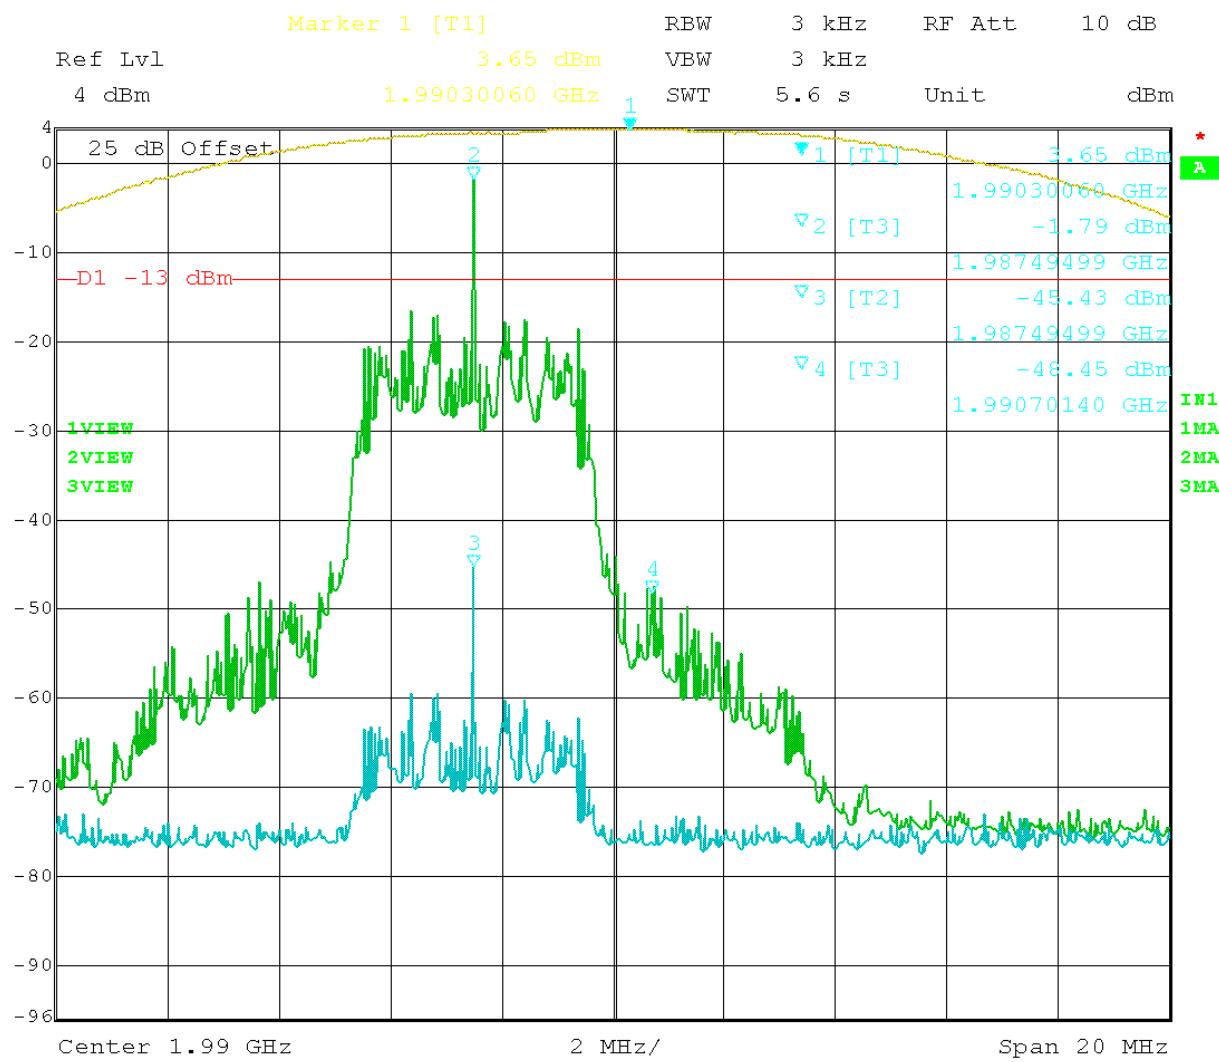

Date: 20.APR.2009 14:07:31

Figure 8: WCDMA – In vs. Out 1977.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 12 – EDGE 1900 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
1850.2	1849.99	-17.16	-13	4.16
1909.8	1910.02	-28.67	-13	15.67
1930.2	1929.98	-56.73	-13	43.73
1989.8	1990.02	-59.23	-13	46.23

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

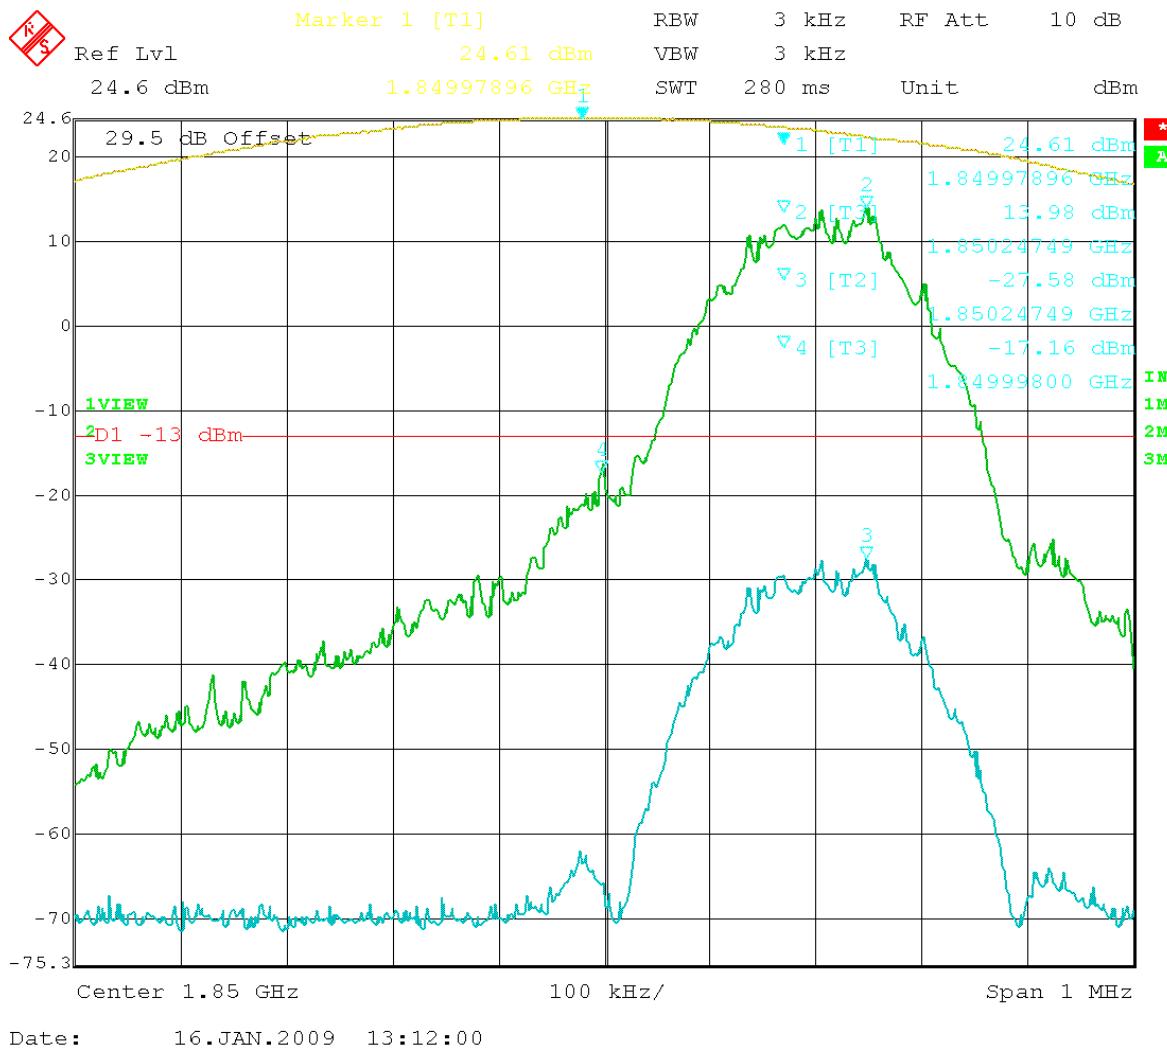


Figure 9: EDGE – In vs. Out 1850.20MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

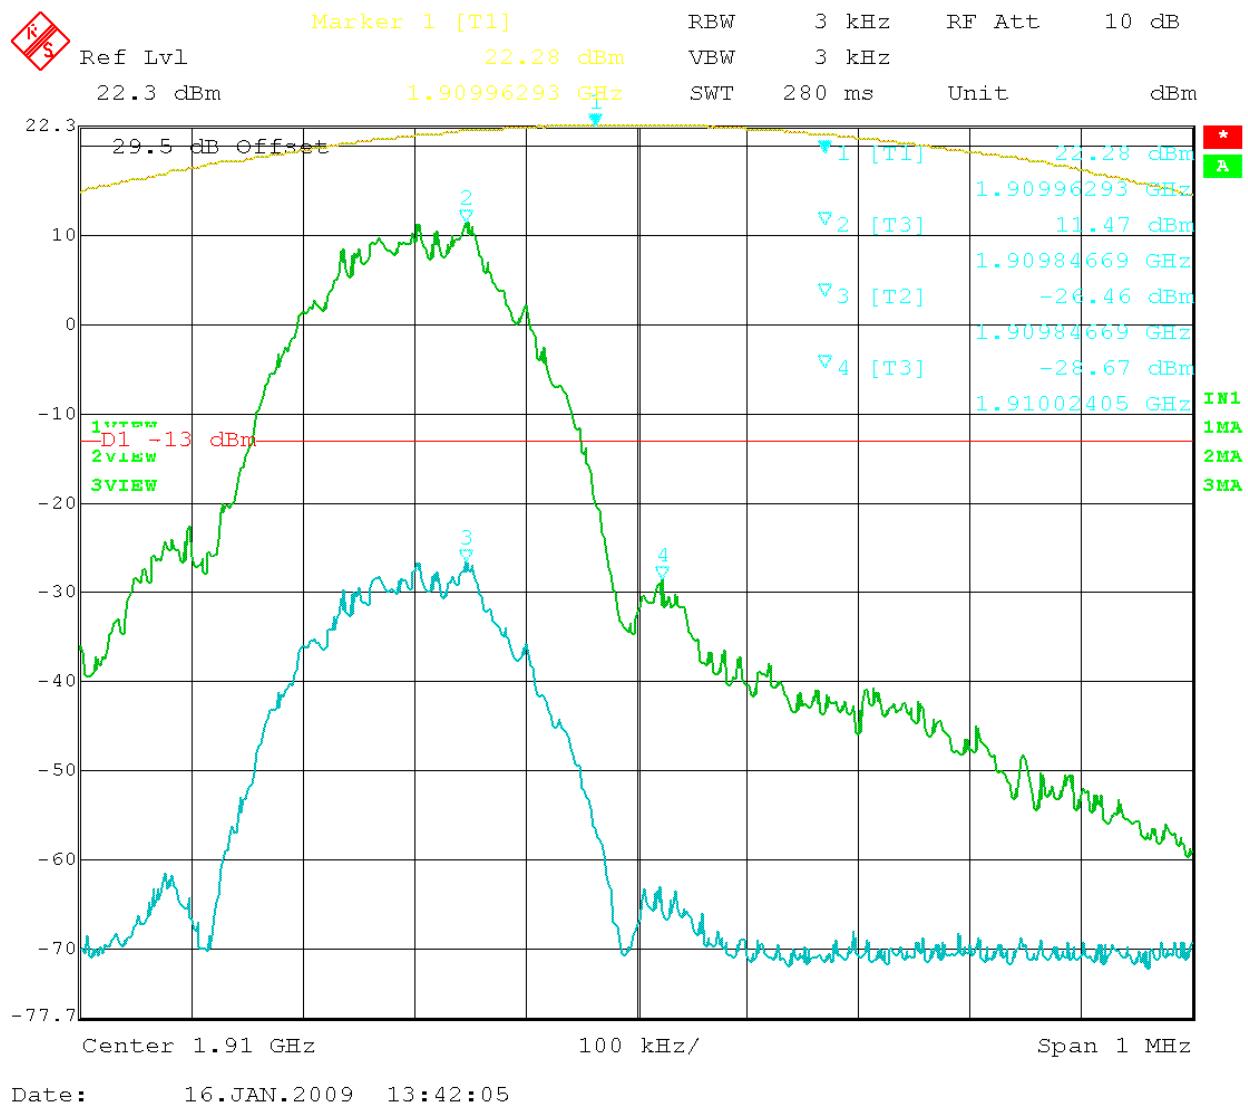


Figure 10: EDGE – In vs. Out 1909.80MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

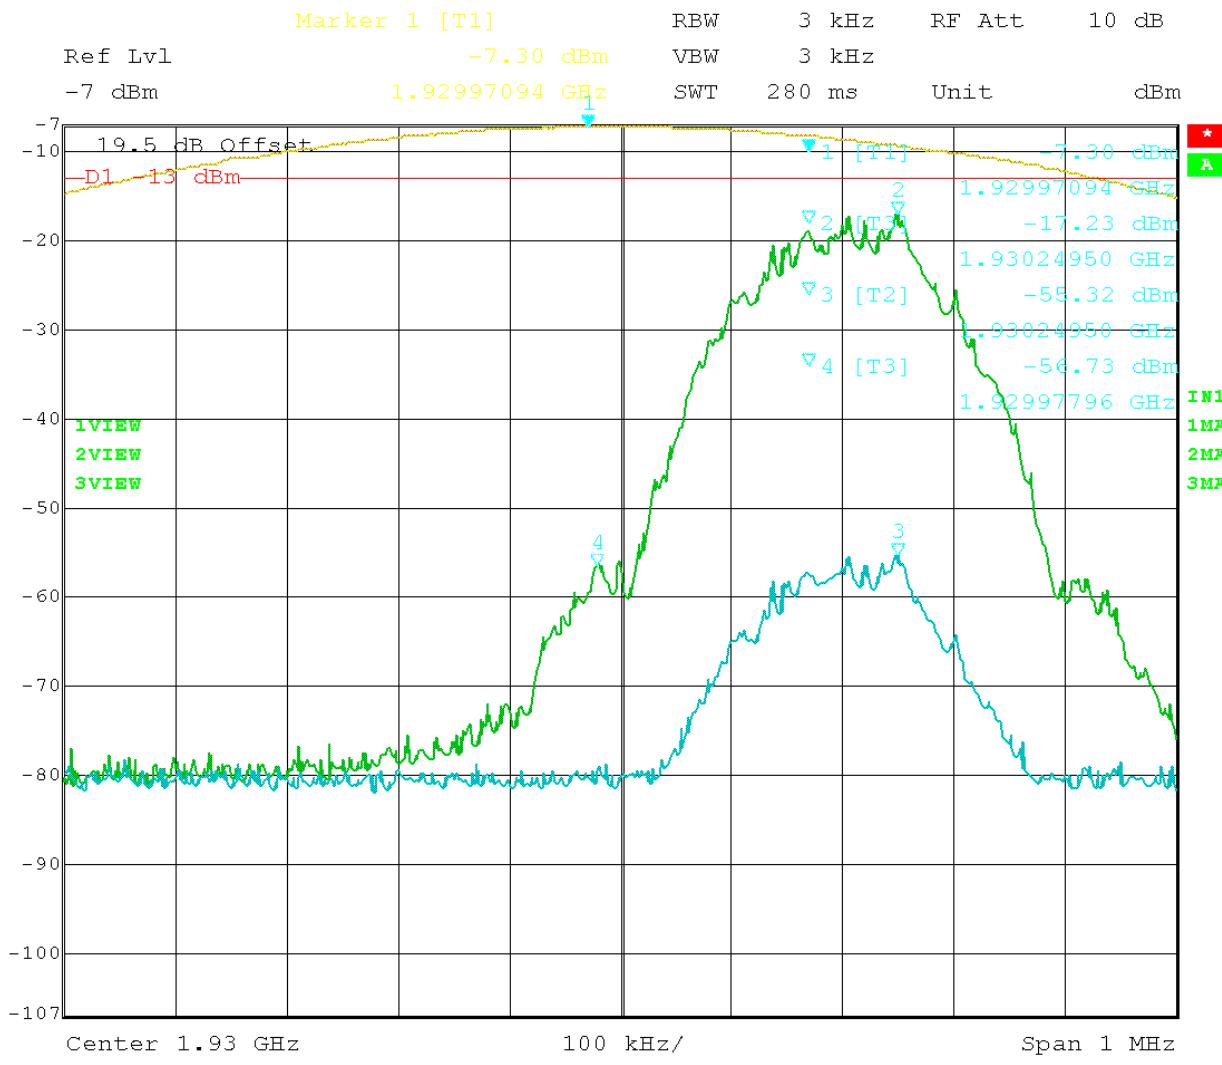


Figure 11: EDGE – In vs. Out 1930.20MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

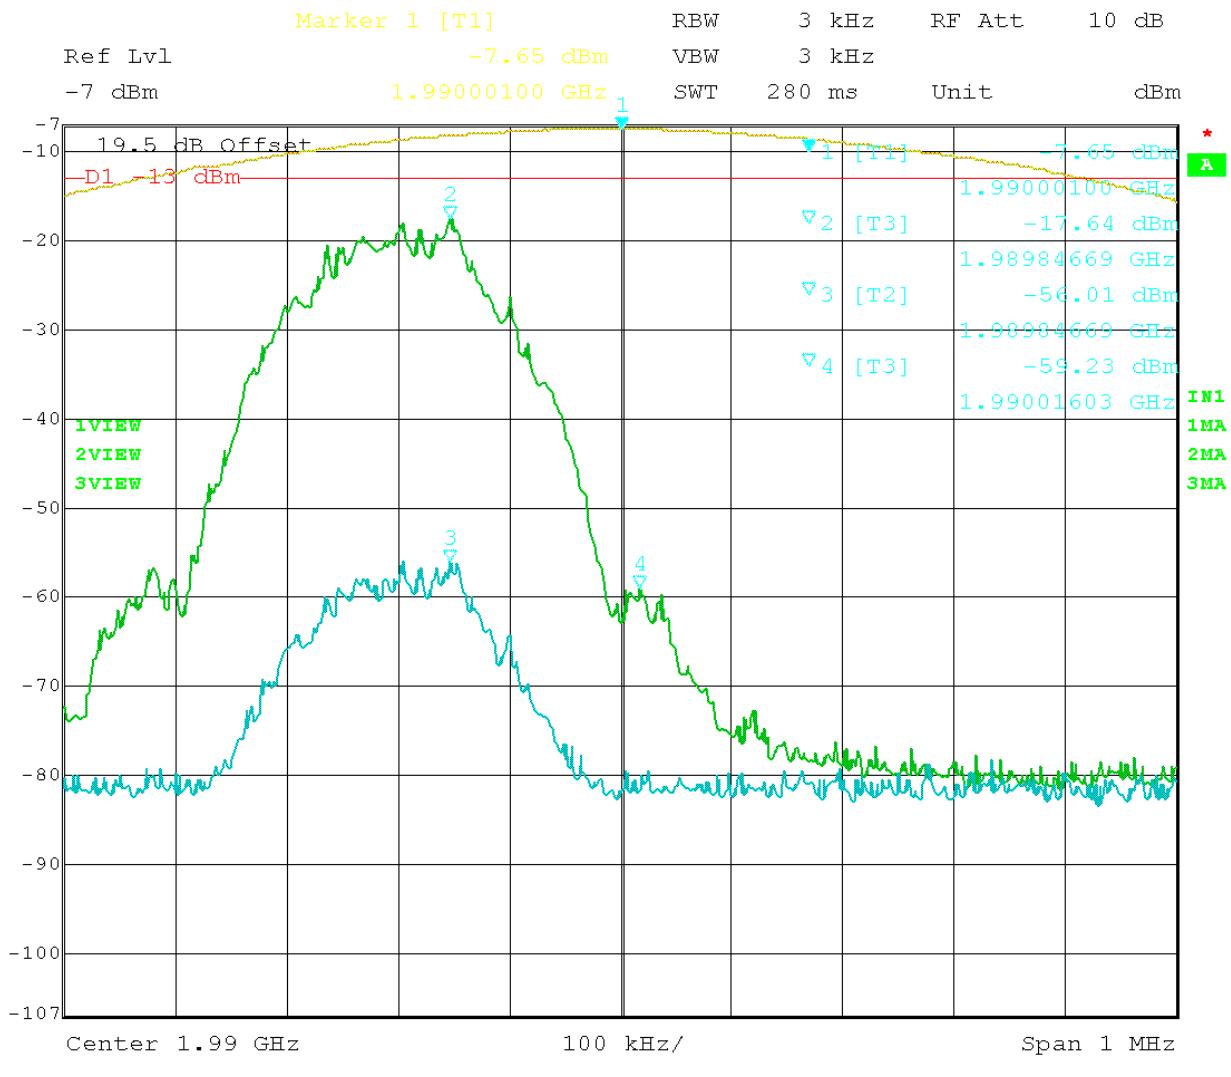


Figure 12: EDGE – In vs. Out 1989.80MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 13 –GSM 1900 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
1850.2	1849.98	-19.98	-13	6.98
1909.8	1910.02	-23.88	-13	10.88
1930.2	1929.98	-48.2	-13	35.2
1989.8	1990.02	-48.65	-13	35.65

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.


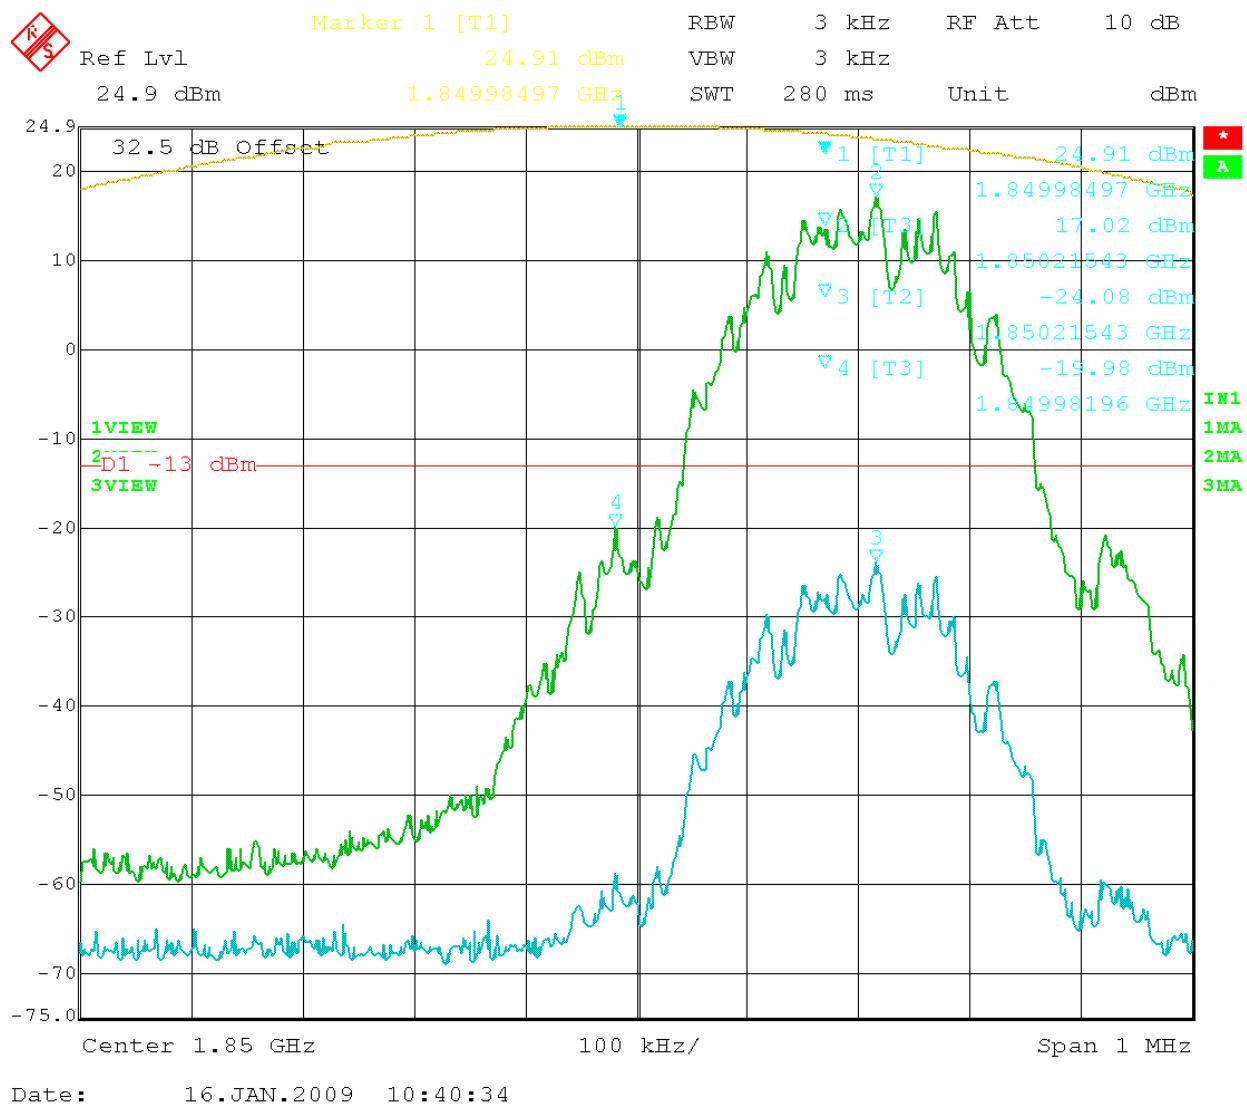


Figure 13: GSM – In vs. Out 1850.20MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

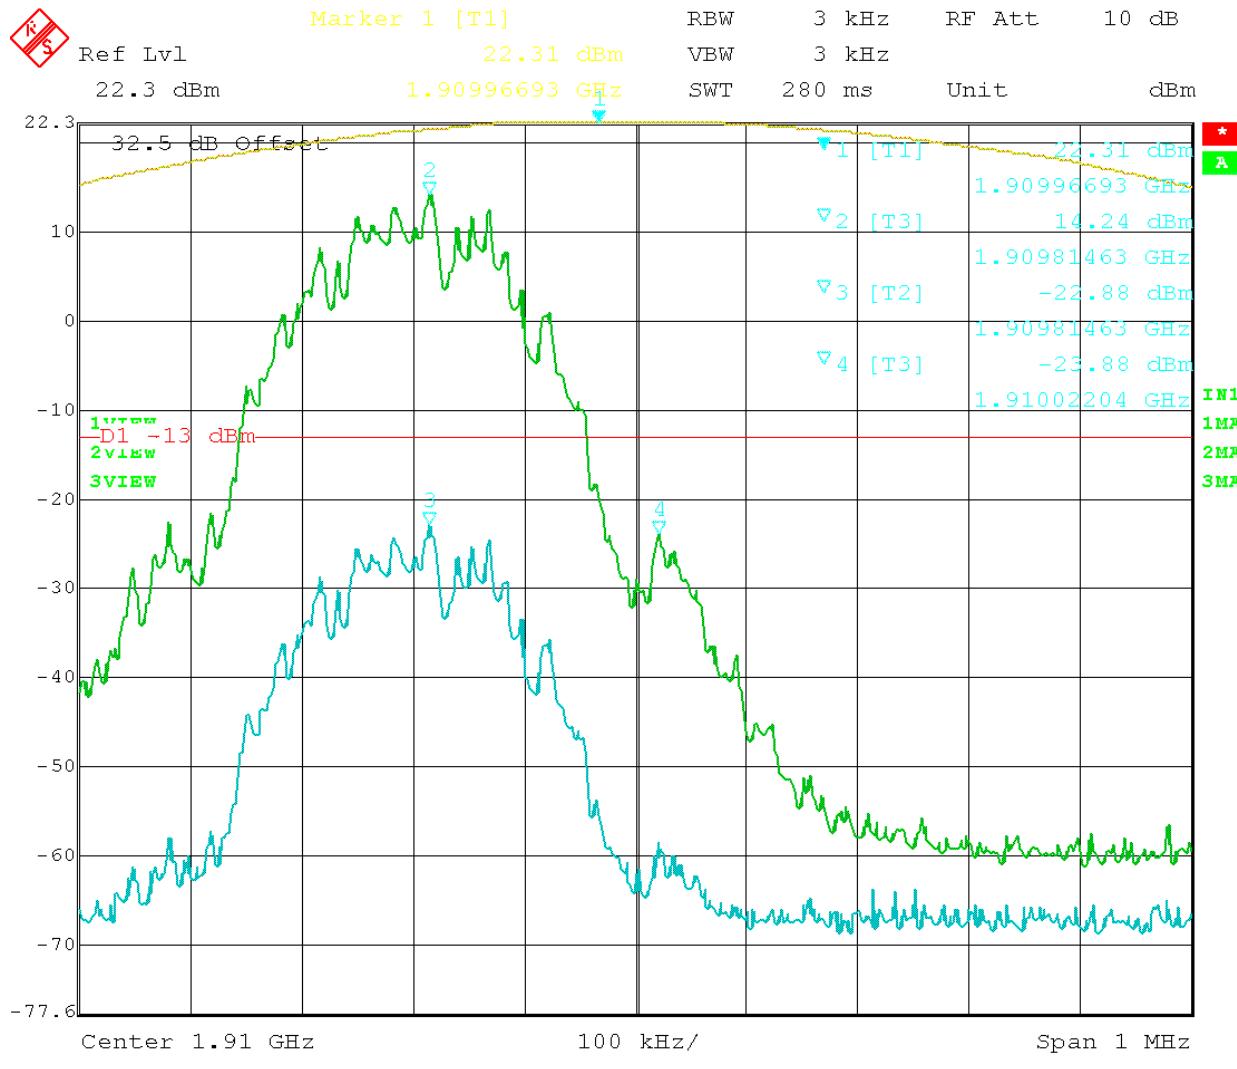

Date: 16.JAN.2009 10:49:02

Figure 14: GSM – In vs. Out 1909.80MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

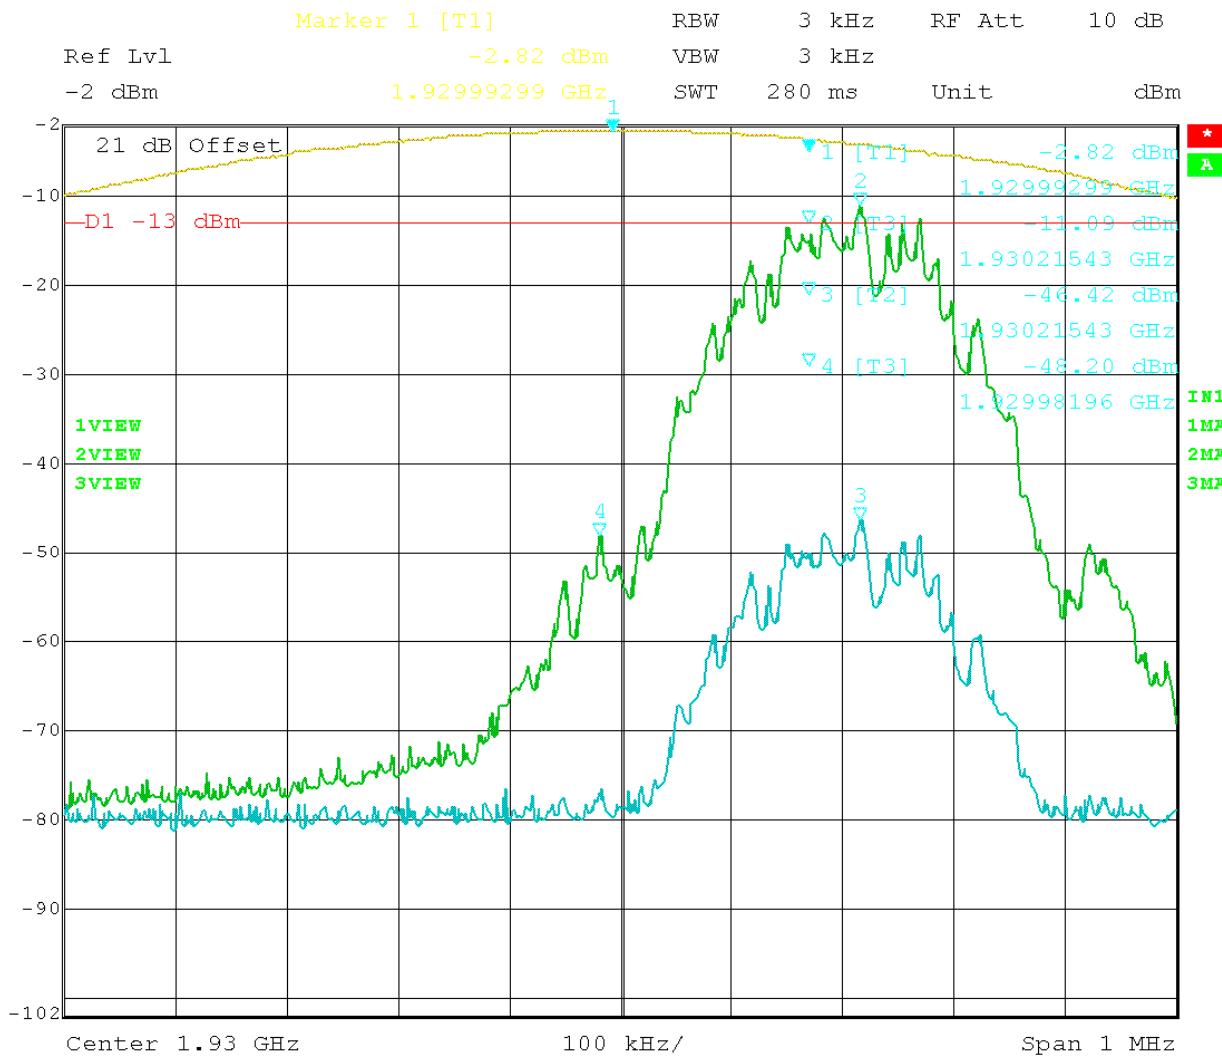


Figure 15: GSM – In vs. Out 1930.20MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

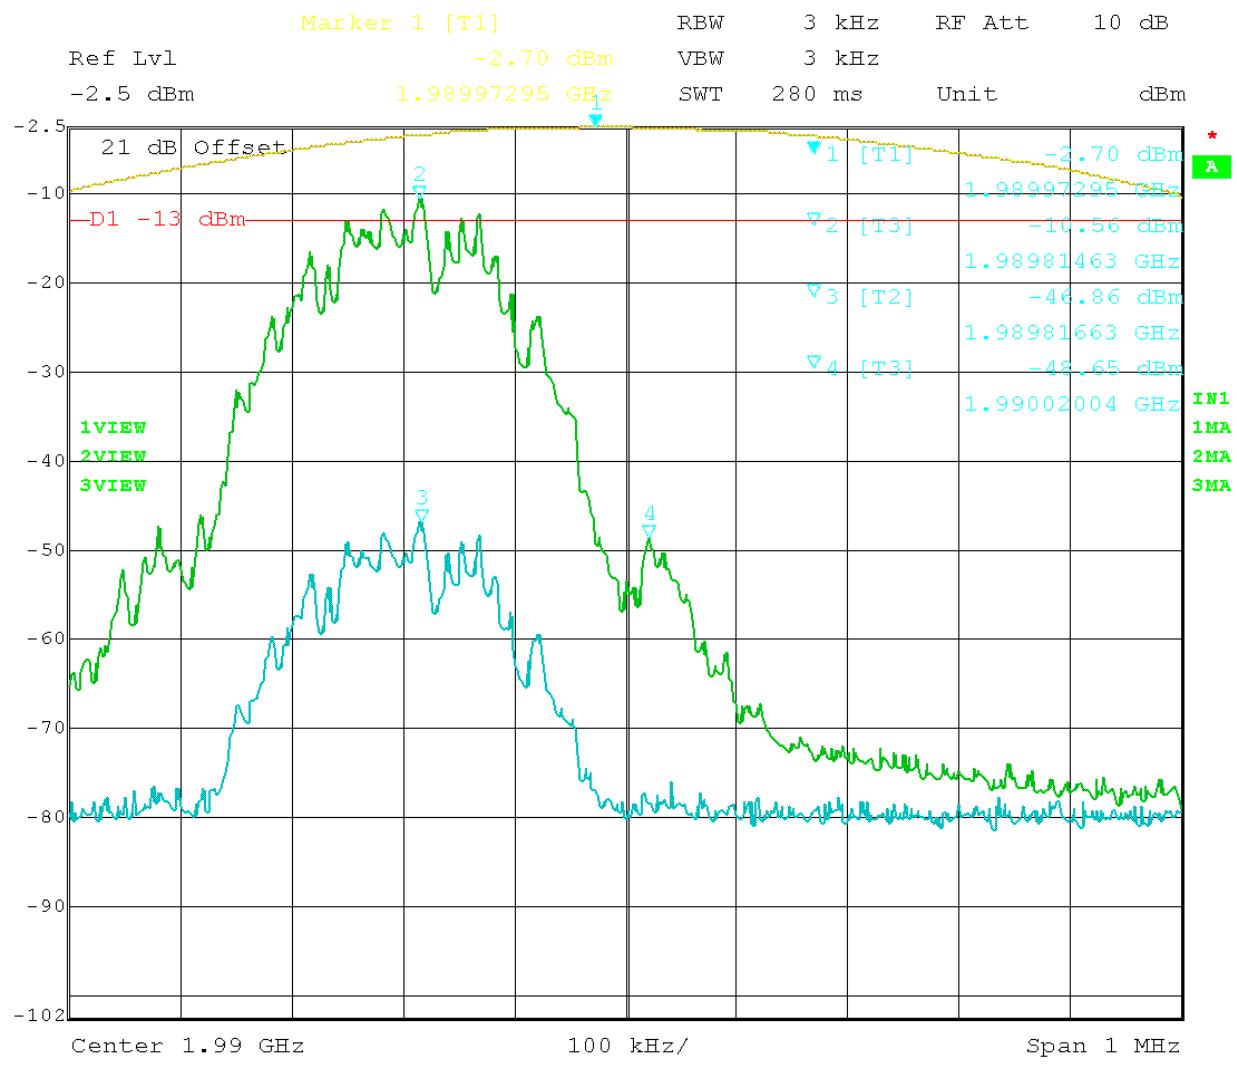



Figure 16: GSM – In vs. Out 1989.80MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Compensating for RBW (1%) using $10 \log(12.5/3) = 6.2$ dB we get the following amplitudes at the bandedge:

Test Data Table 14 – CDMA 800 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
825.25	823.90	-19.05	-13	6.05
847.75	849.05	-18.63	-13	5.63
870.25	868.94	-36.6	-13	23.6
892.75	894.11	-37.51	-13	24.51

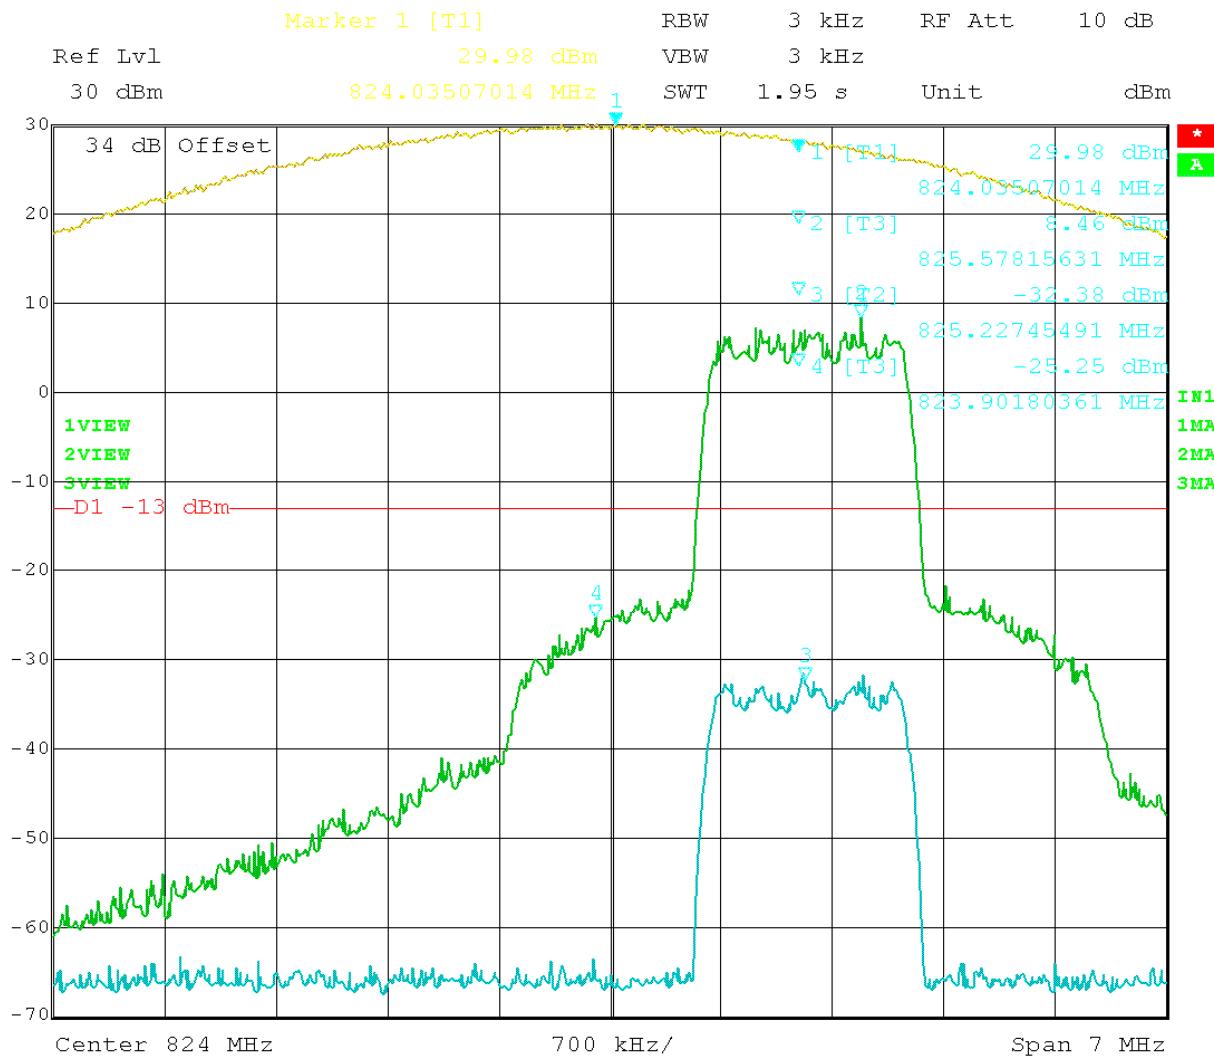


Date: 3.FEB.2009 15:01:08

Figure 17: CDMA – In vs. Out 825.25MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

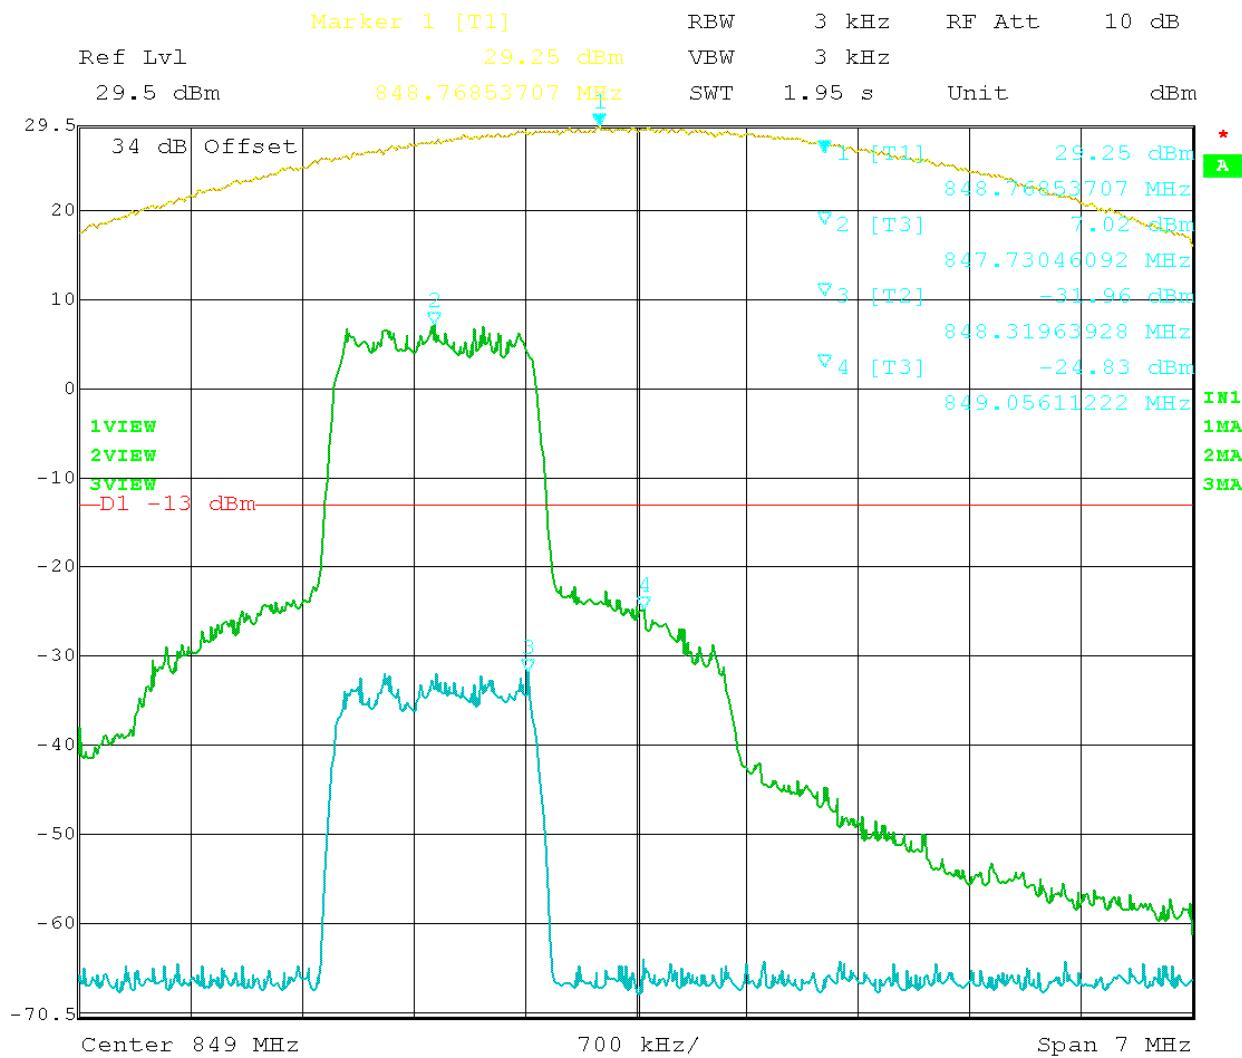

Date: 3.FEB.2009 15:08:40

Figure 18: CDMA – In vs. Out 847.75 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


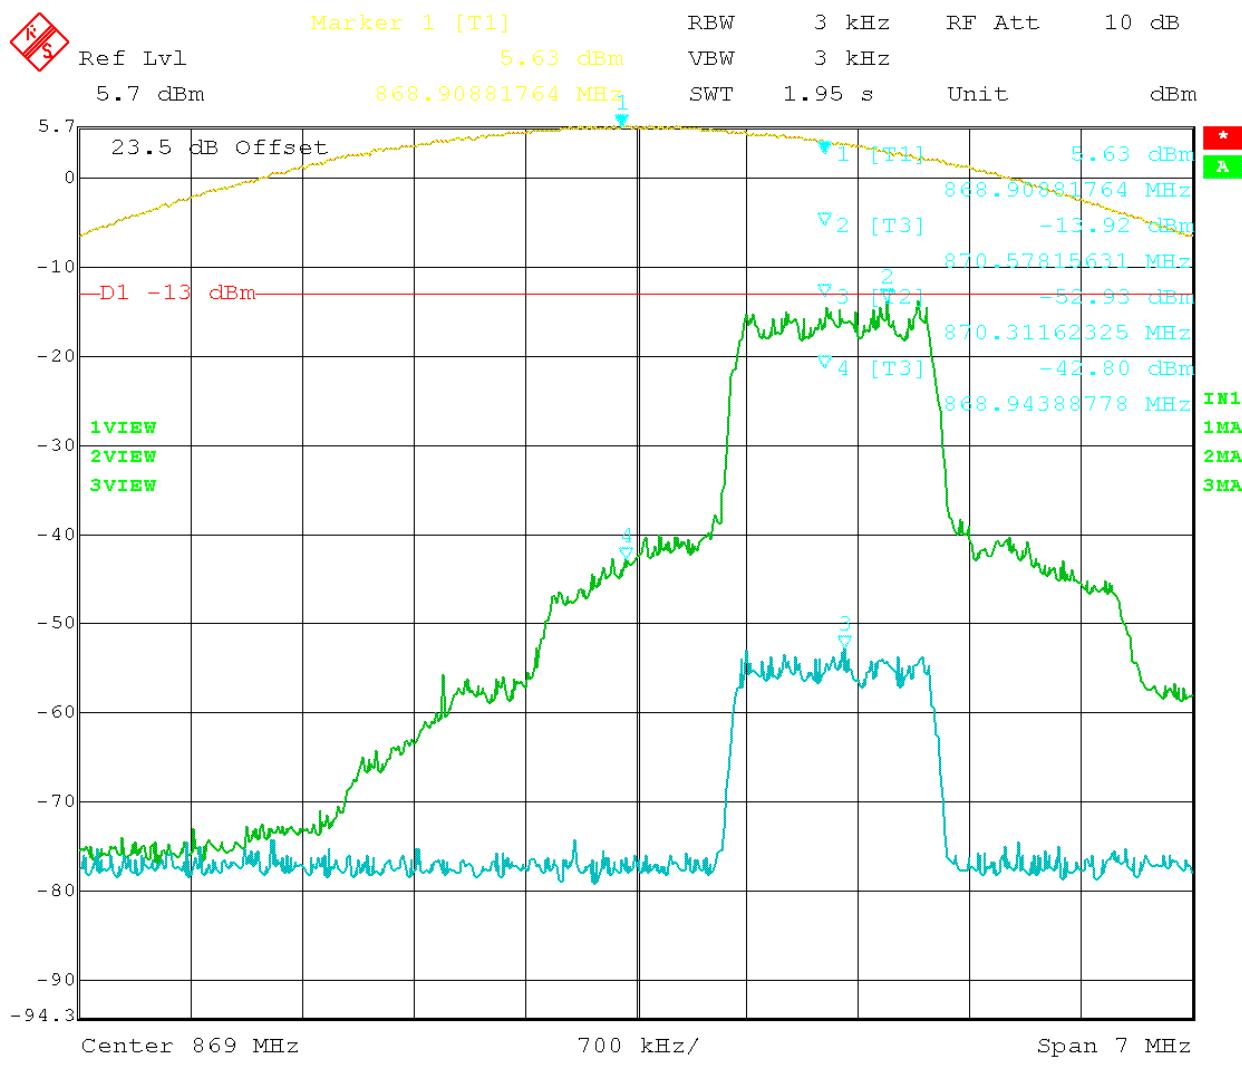


Figure 19: CDMA – In vs. Out 870.25 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

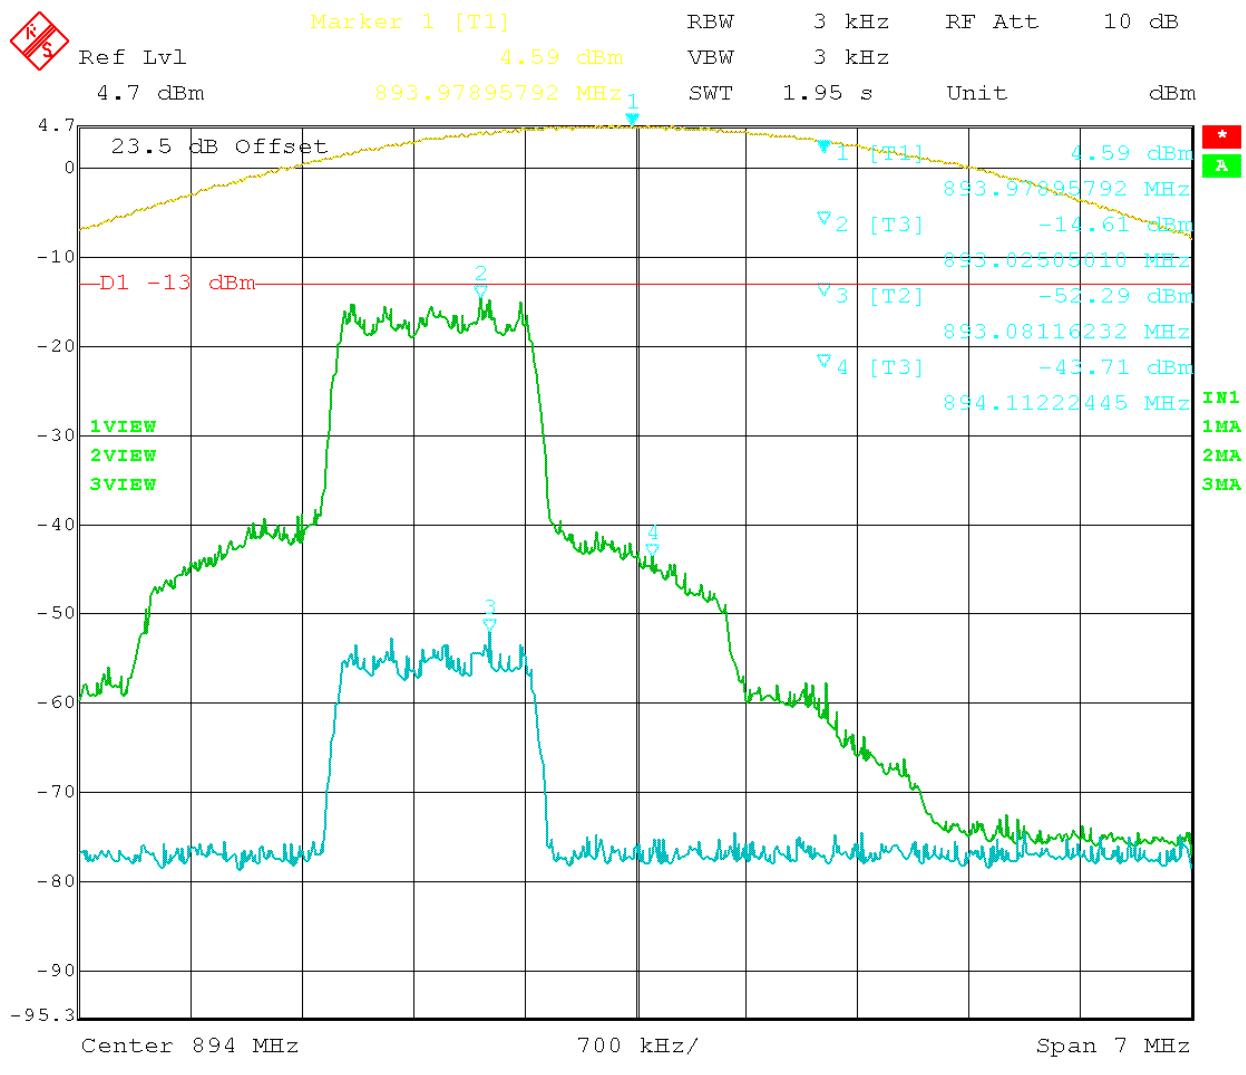

Date: 19.JAN.2009 14:30:57

Figure 20: CDMA – In vs. Out 892.75 MHz


APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 15 – WCDMA 800 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
826.50	822.64	-19.79	-13	6.79
846.50	849.24	-19.45	-13	6.45
871.50	868.92	-41.82	-13	28.82
893.50	894.76	-48.04	-13	35.04

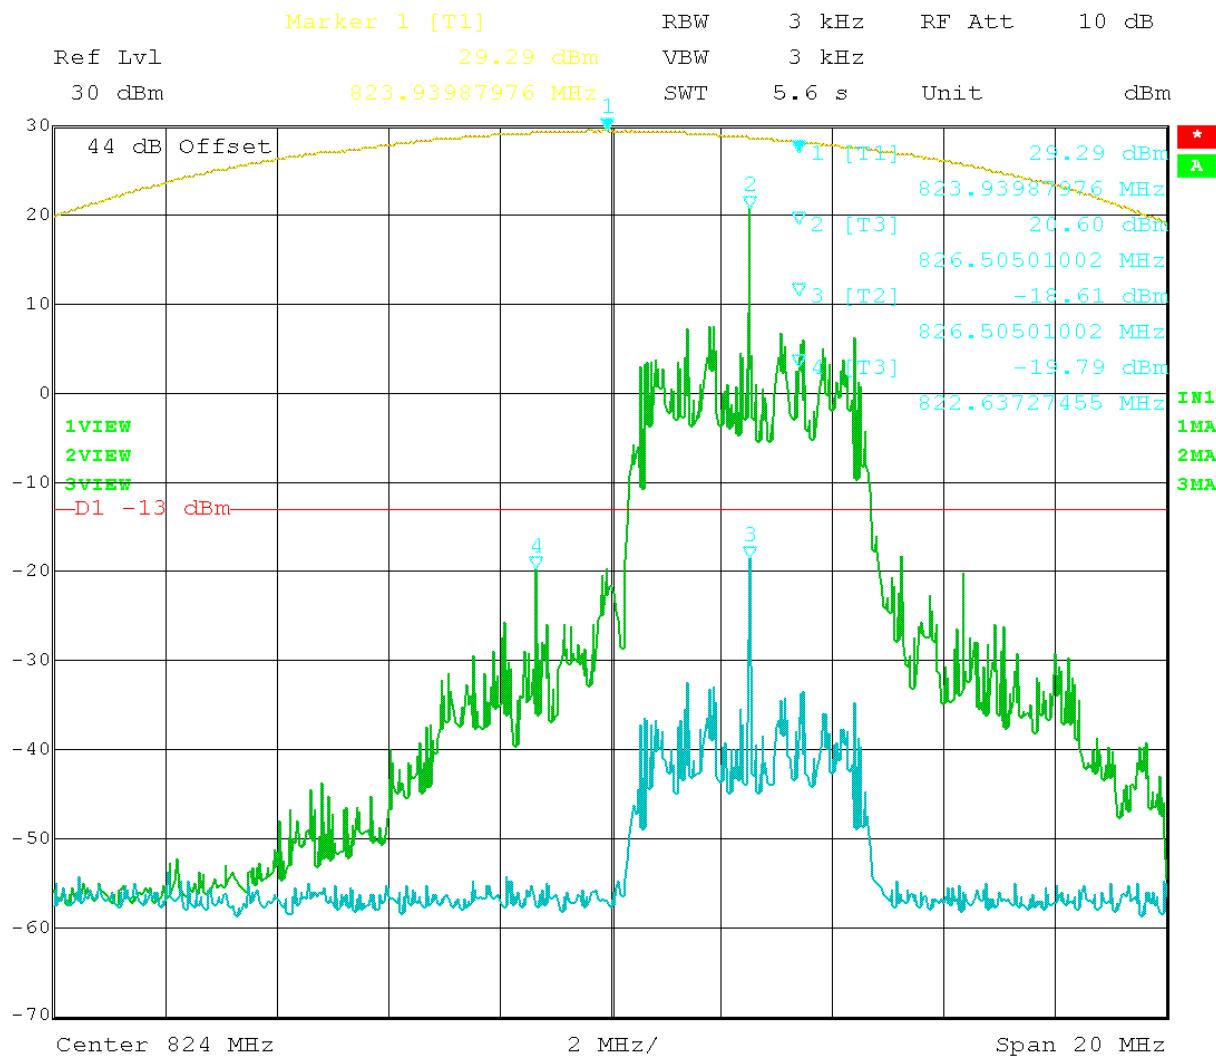


Date: 20.APR.2009 11:23:20

Figure 21: WCDMA – In vs. Out 826.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

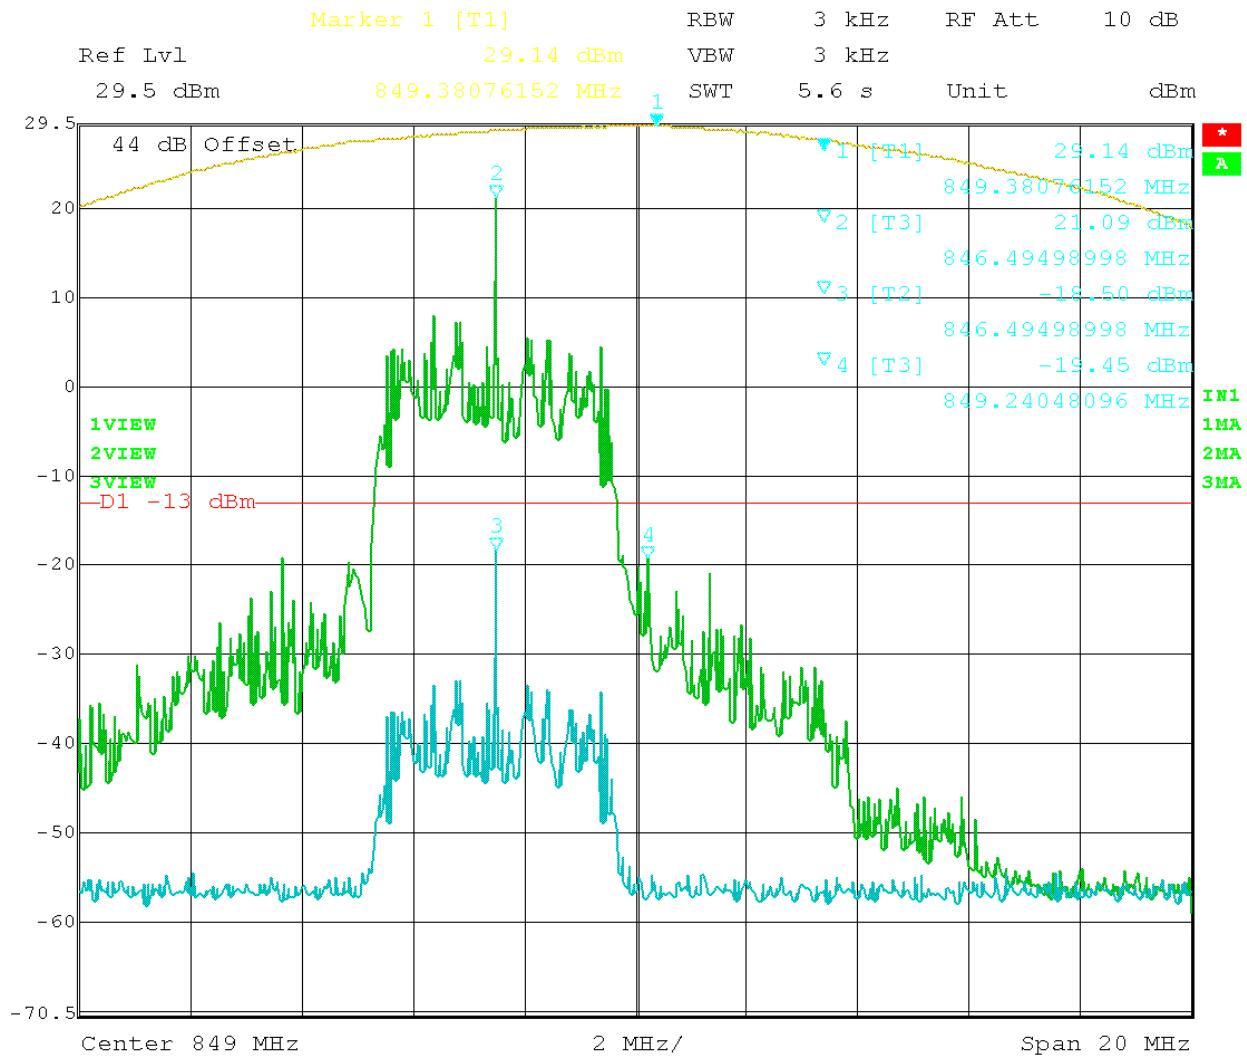


Date: 20.APR.2009 11:29:05

Figure 22: WCDMA – In vs. Out 846.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA


Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

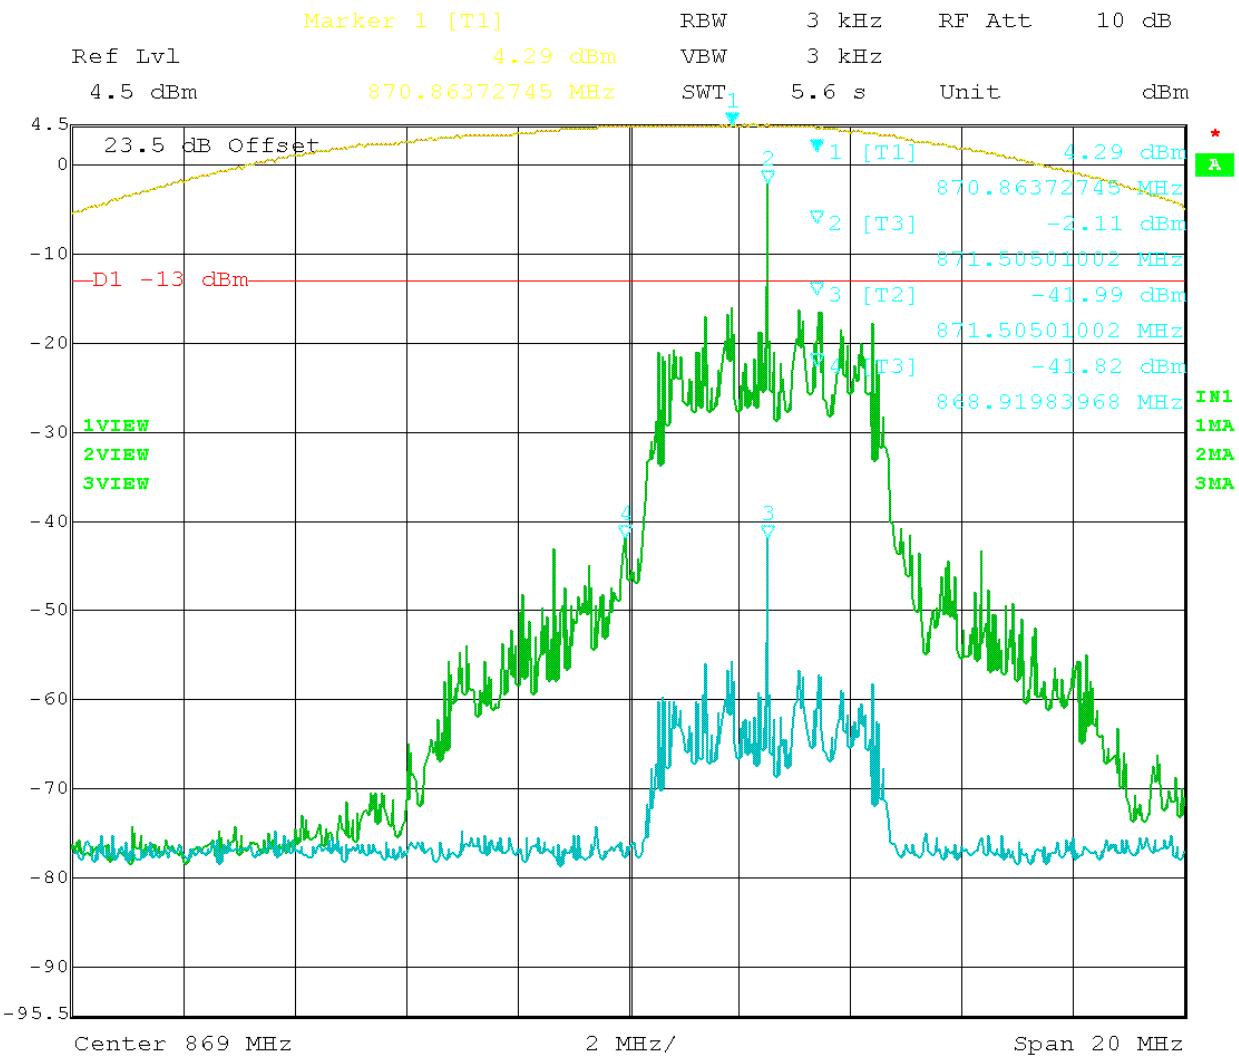

Date: 20.APR.2009 13:31:43

Figure 23: WCDMA – In vs. Out 871.50 MHz

APPLICANT: WILSON ELECTRONICS, INC.
FCC ID: PWO271220SA, IC: 4726A-271220SA
Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

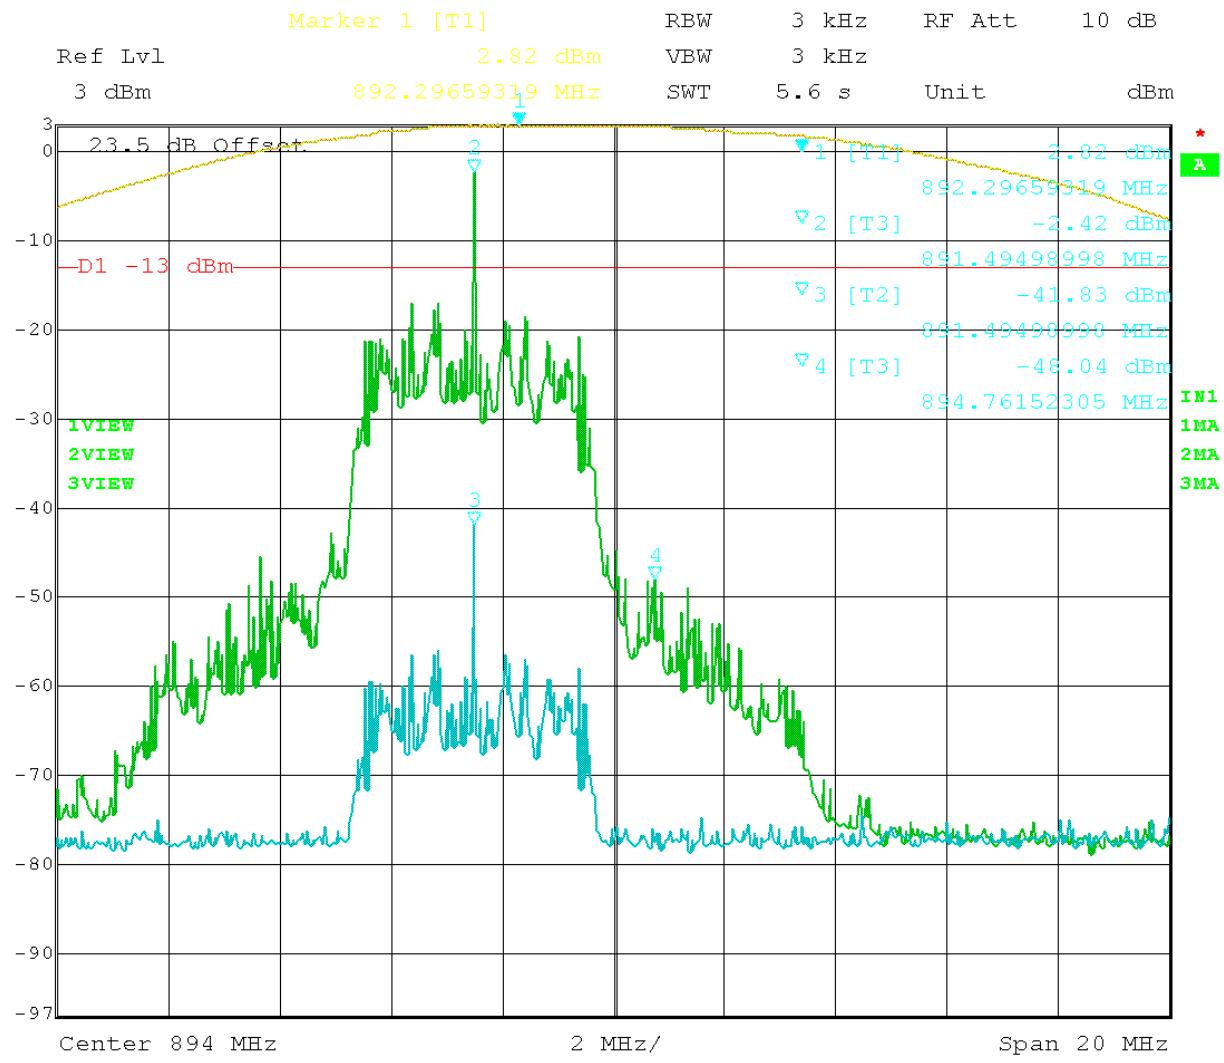

Date: 20.APR.2009 13:43:02

Figure 24: WCDMA – In vs. Out 893.50 MHz

Test Data Table 16 – EDGE 800 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
824.2	823.99	-21.81	-13	8.81
848.8	849.02	-24.7	-13	11.7
869.2	868.99	-46.97	-13	33.97
893.8	894.01	-51.81	-13	38.81

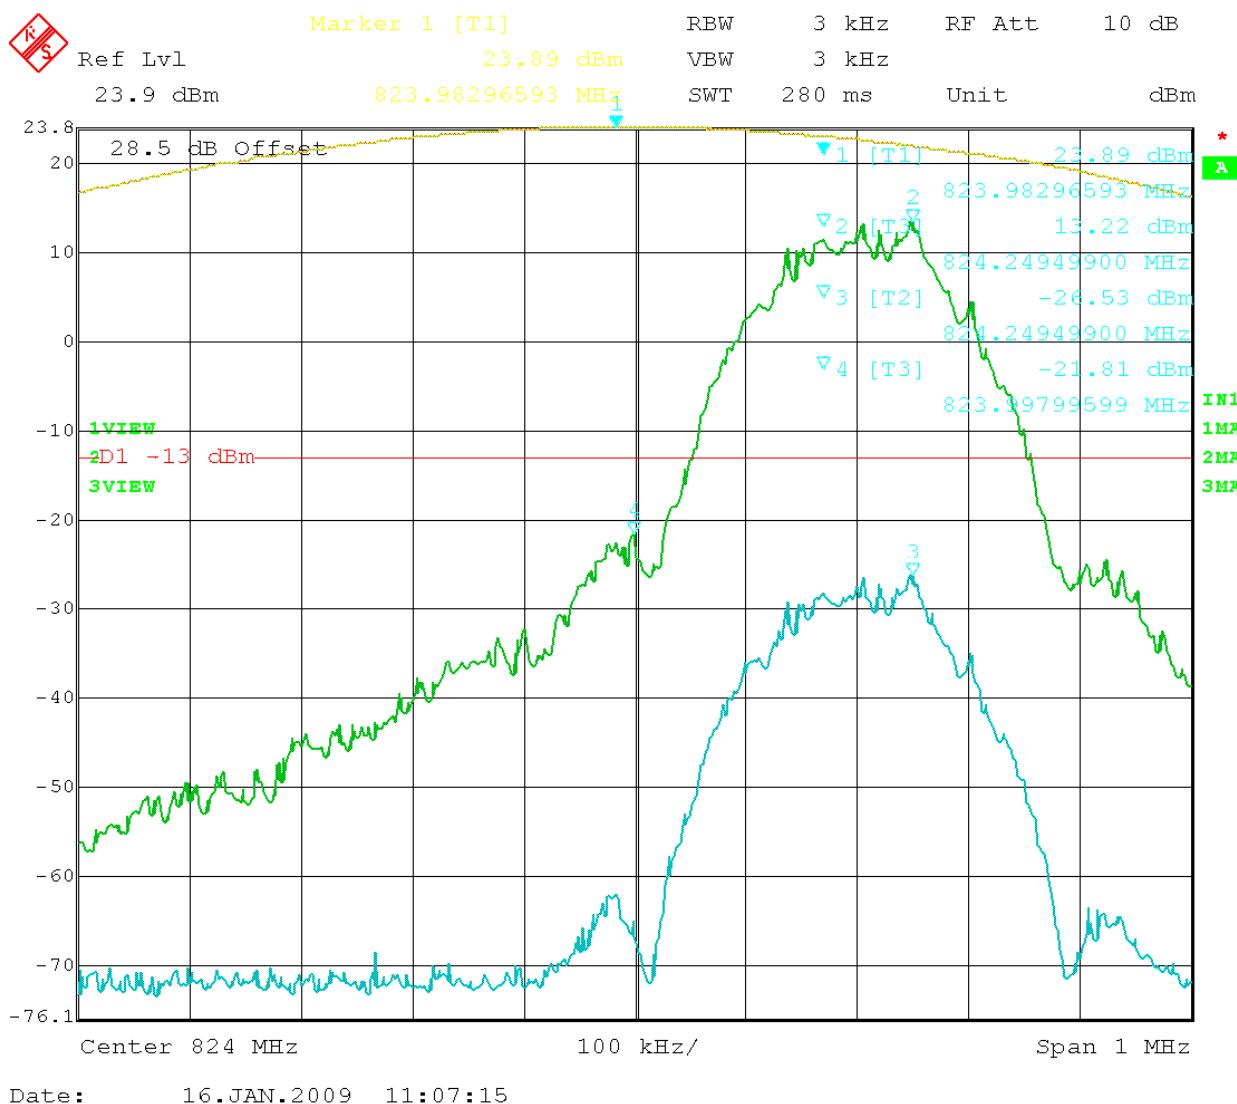


Figure 25: EDGE – In vs. Out 824.20 MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

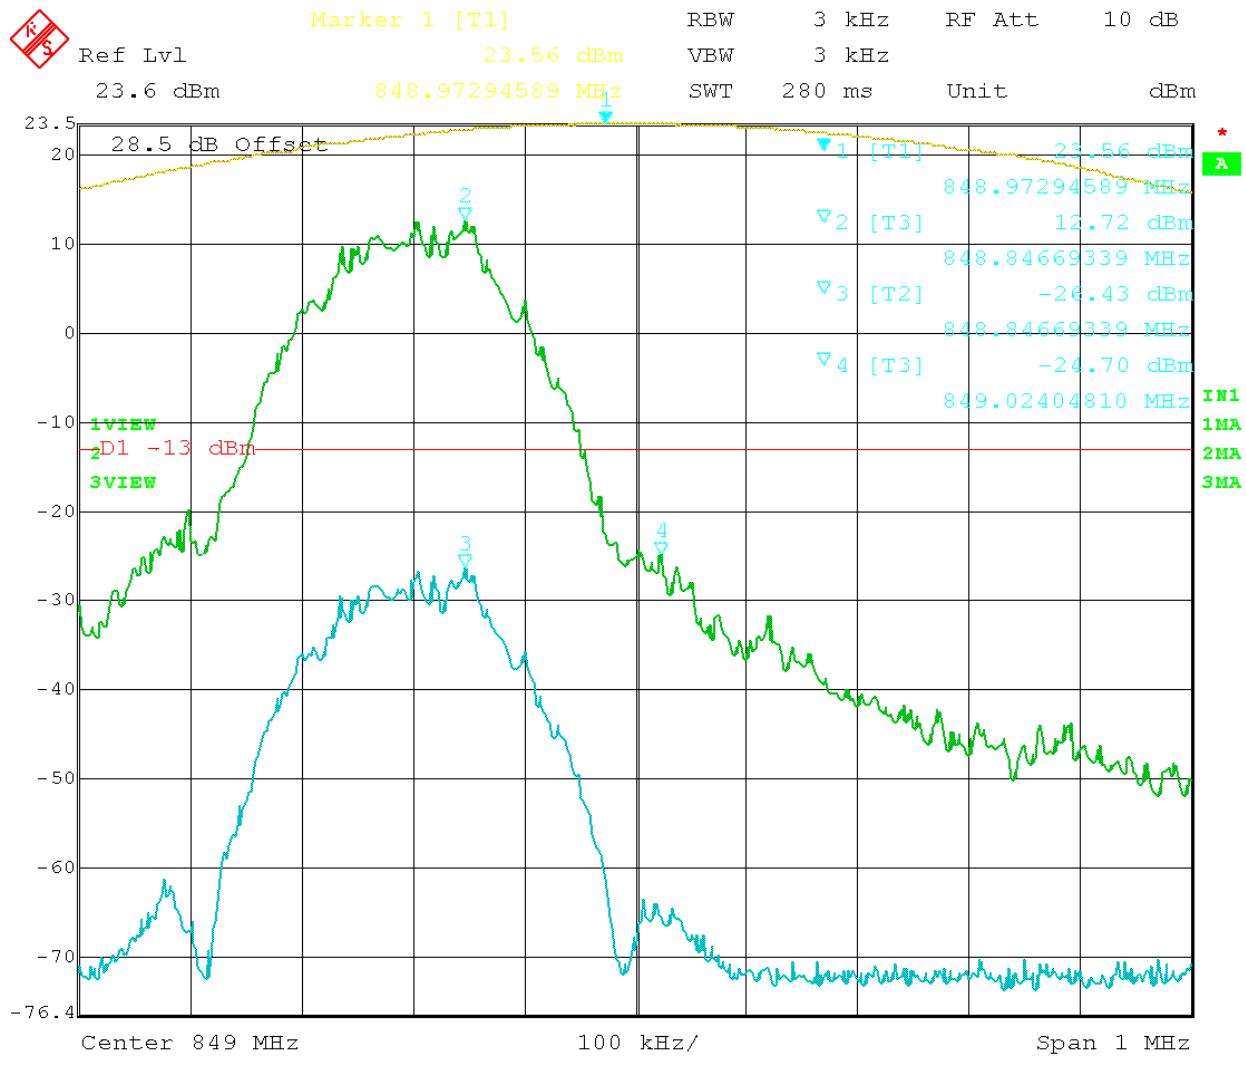


Figure 26: EDGE – In vs. Out 848.80 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

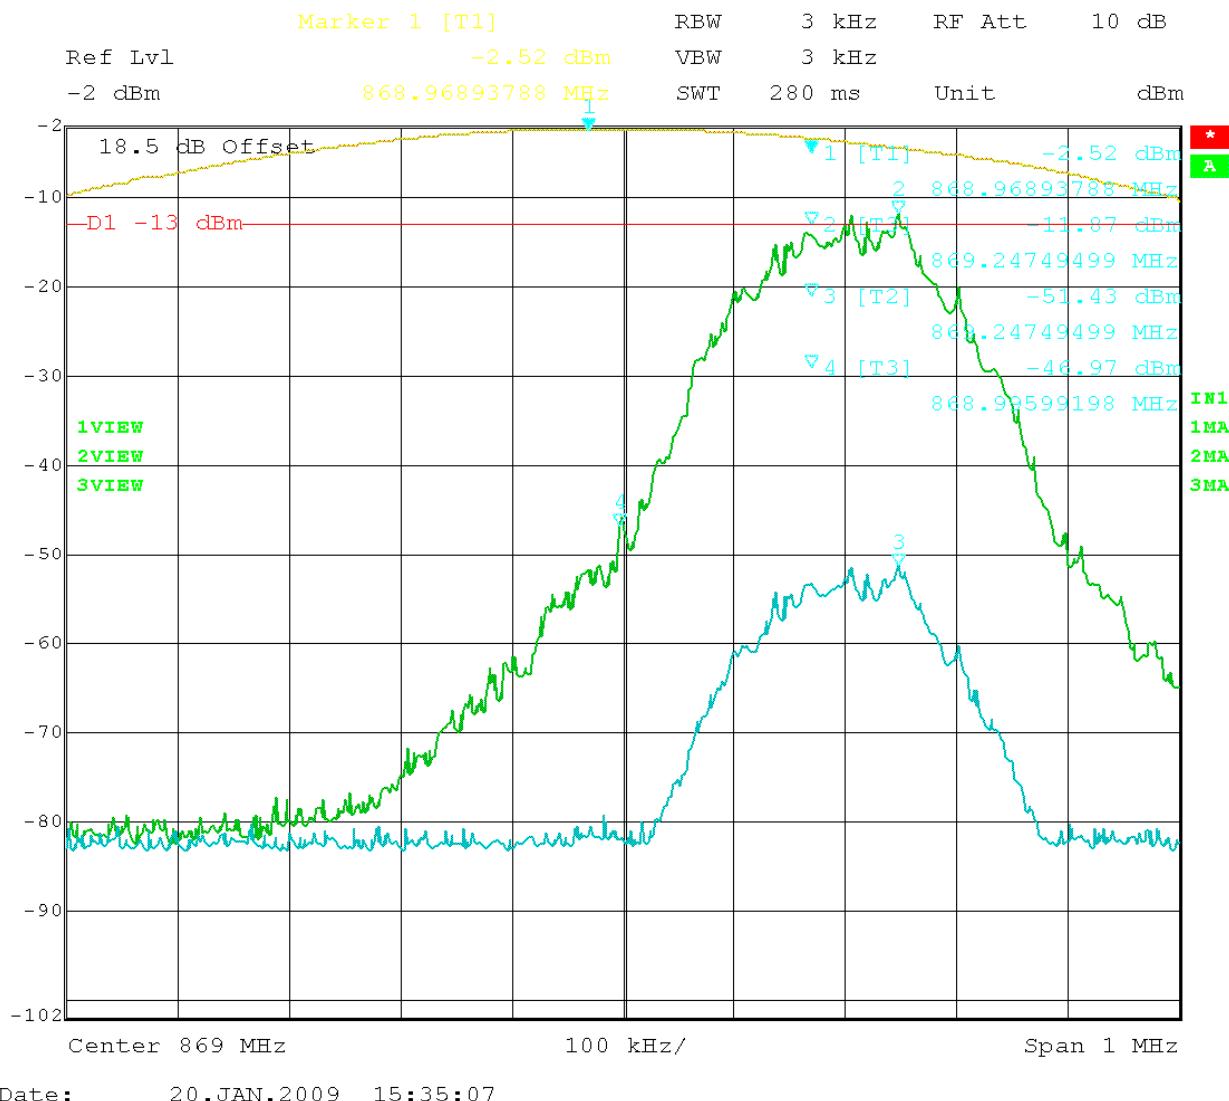


Figure 27: EDGE – In vs. Out 869.20 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

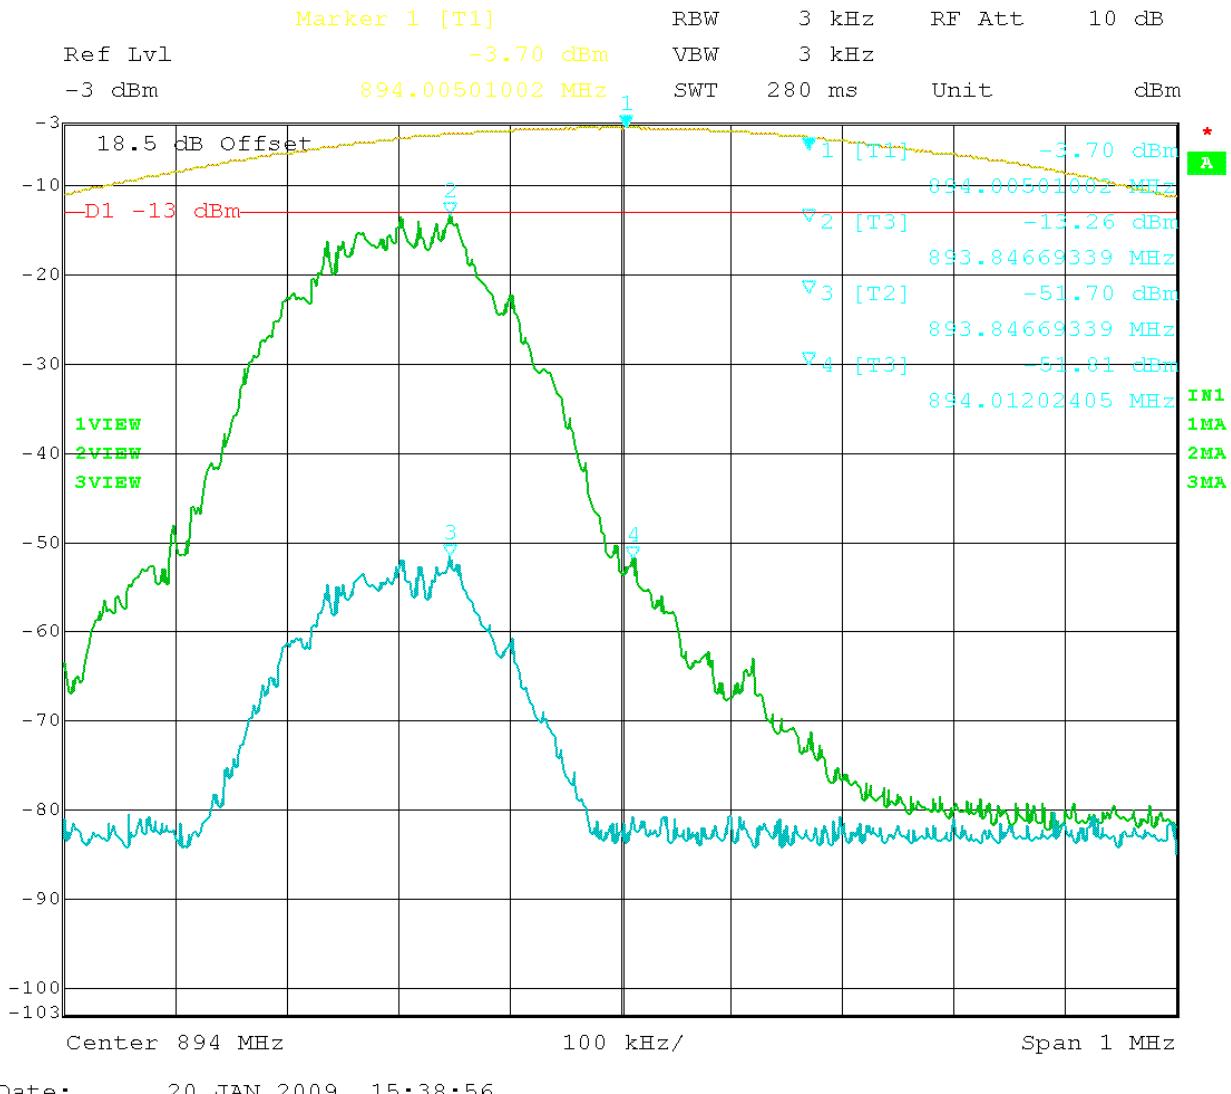


Figure 28: EDGE – In vs. Out 893.80 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 17 – GSM 800 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
824.2	823.98	-20.31	-13	7.31
848.8	849.02	-22.14	-13	9.14
869.2	868.98	-44.32	-13	31.32
893.8	894.02	-46.29	-13	33.29

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

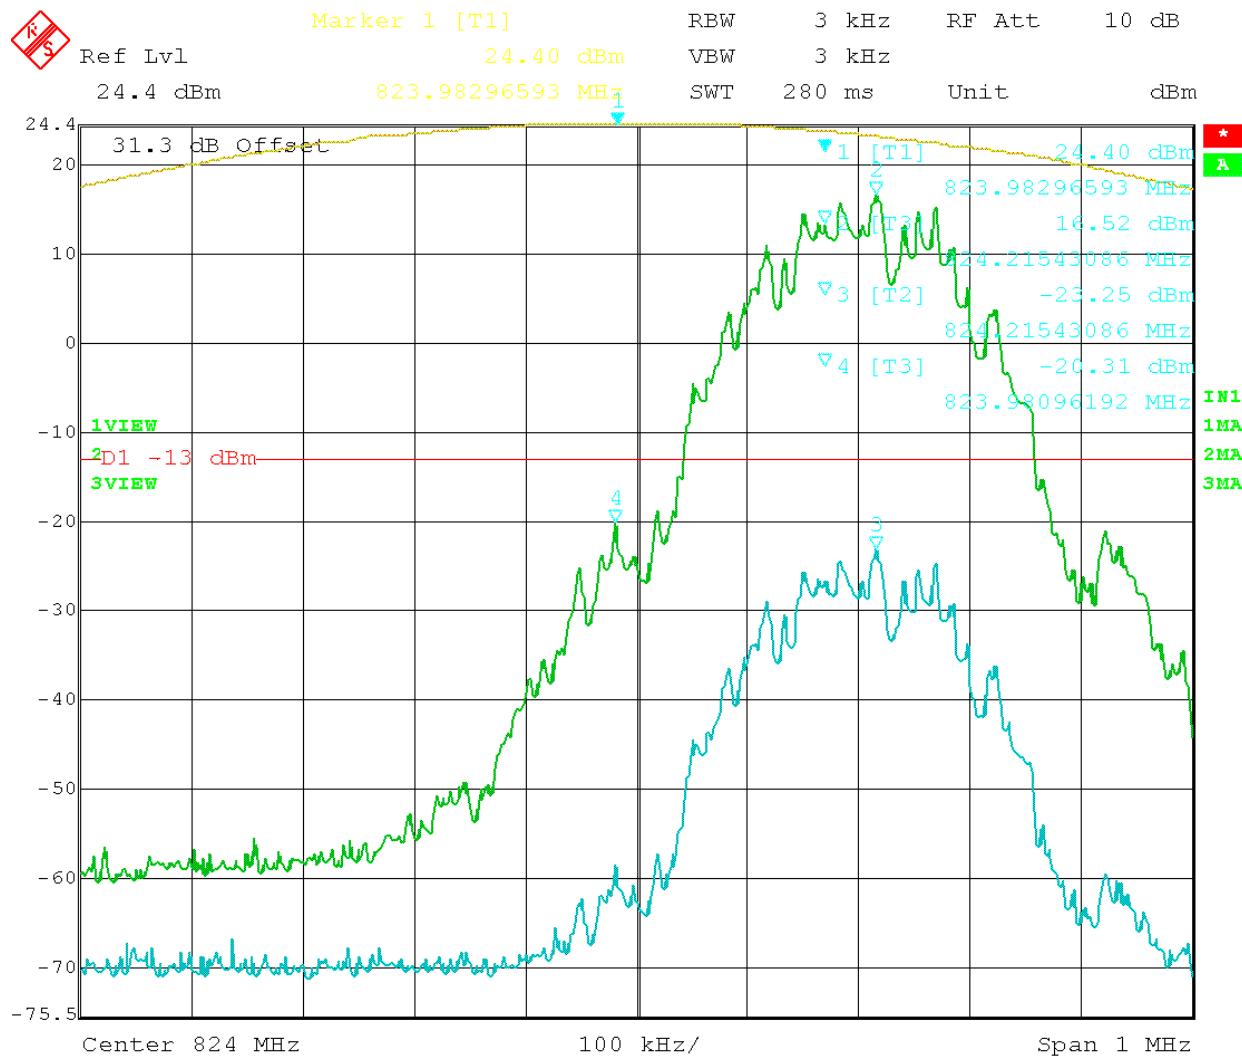


Figure 29: GSM – In vs. Out 824.2 MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

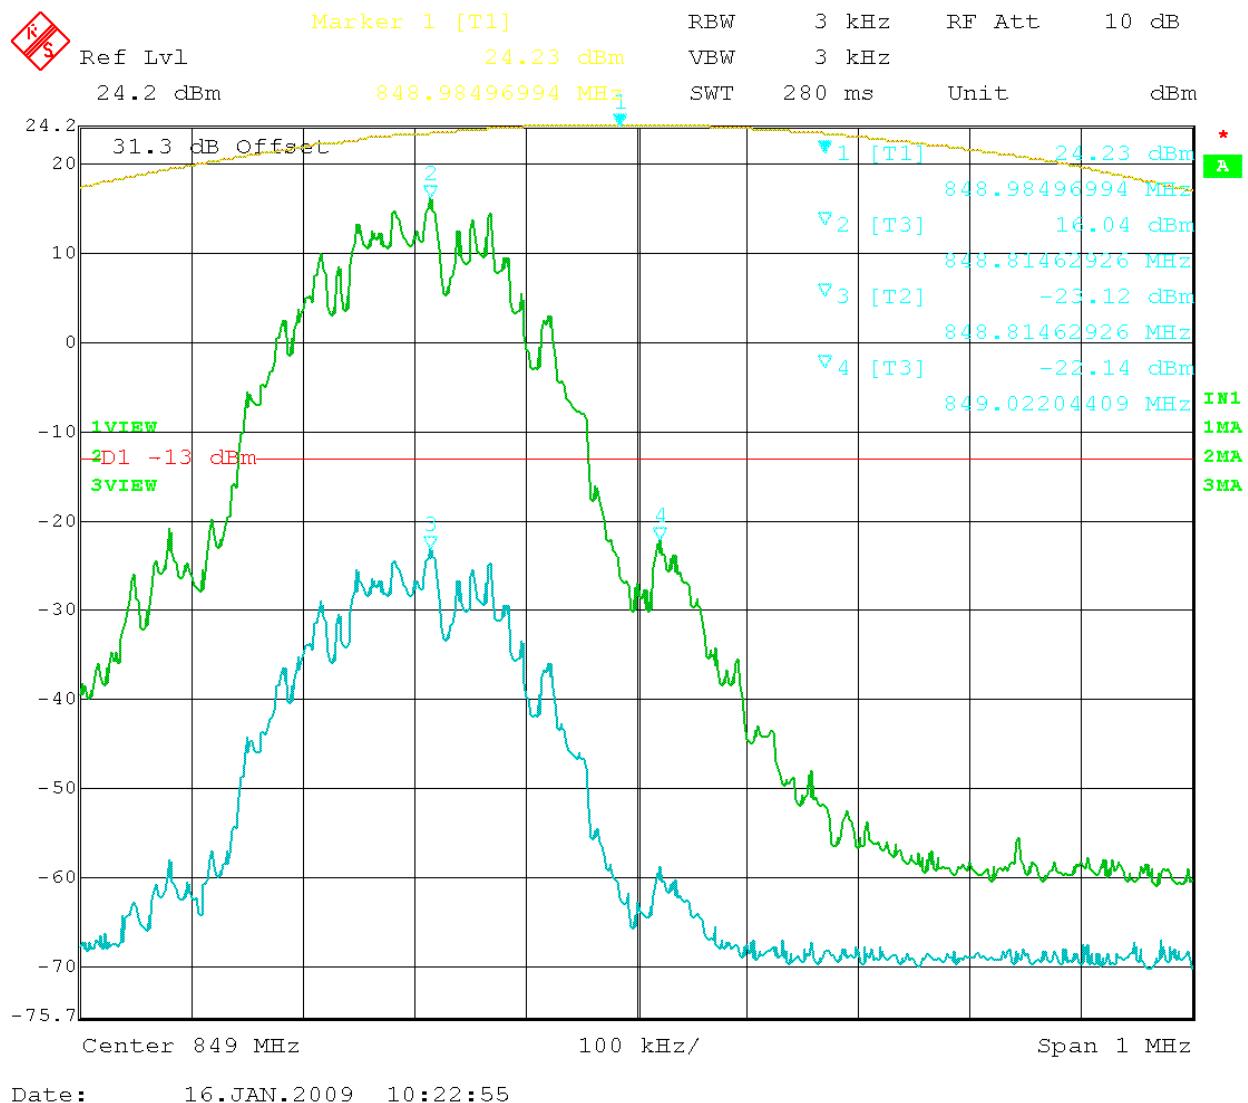


Figure 30: GSM – In vs. Out 848.8 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

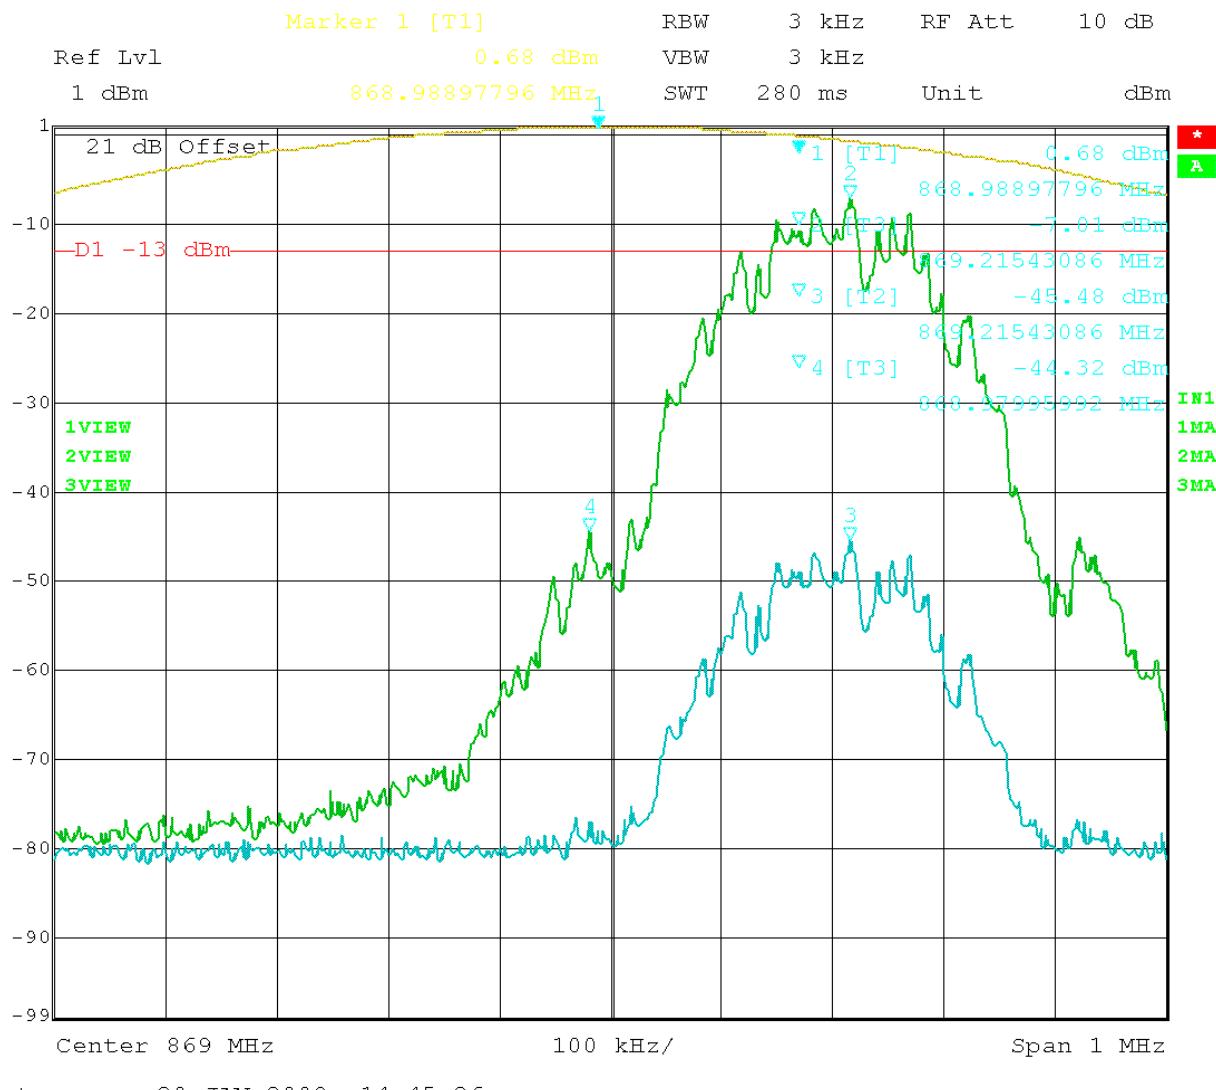


Figure 31: GSM – In vs. Out 869.2MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

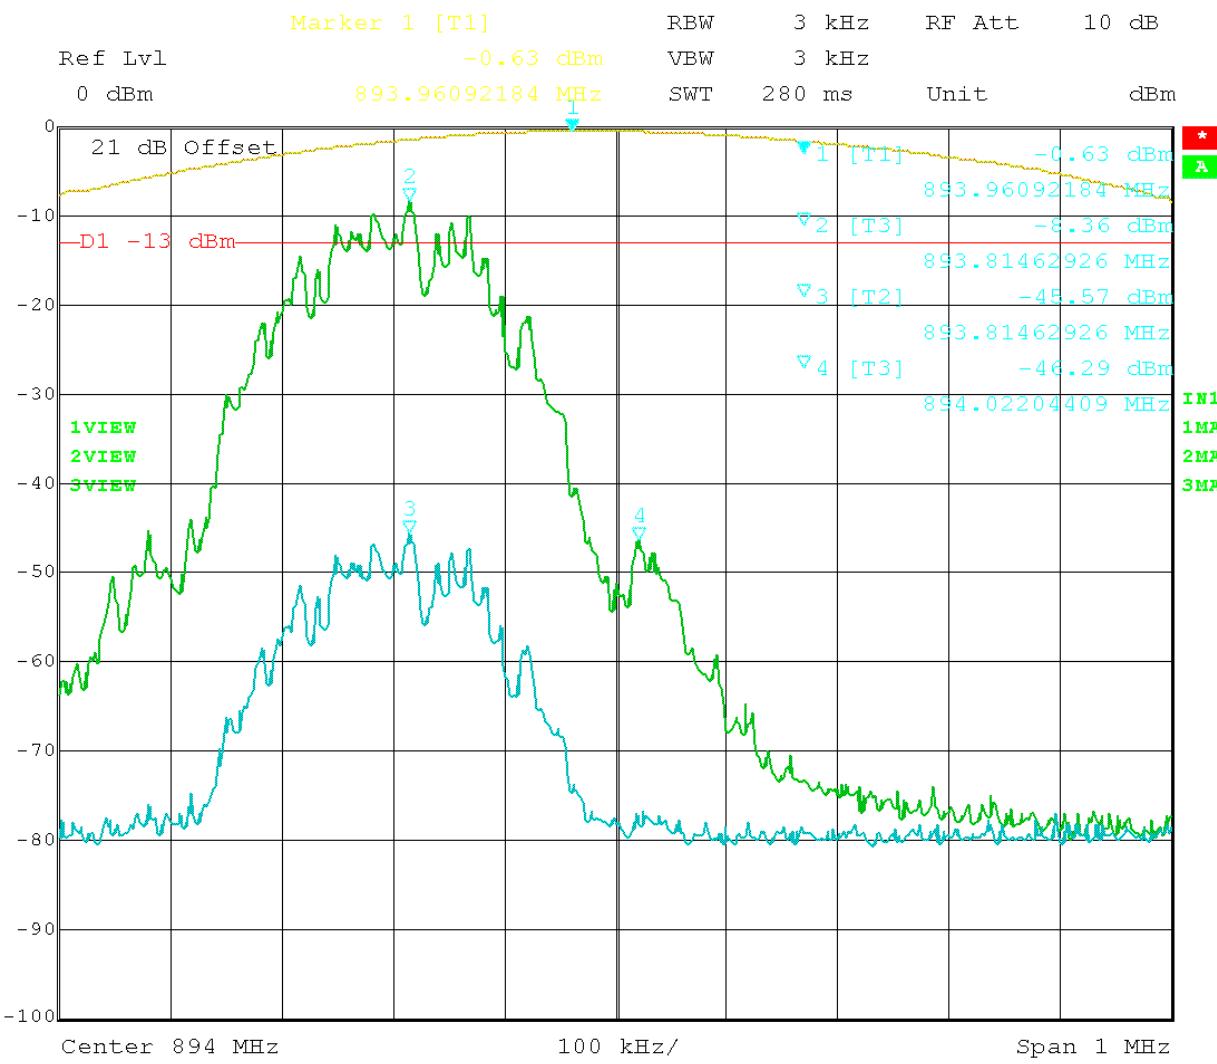



Figure 32: GSM – In vs. Out 893.8MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 18 – AMPS 800 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
824.2	823.98	-53.04	-13	40.04
848.8	849.01	-54.11	-13	41.11
869.2	868.82	-74.03	-13	61.03
893.8	894.21	-72.82	-13	59.82

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

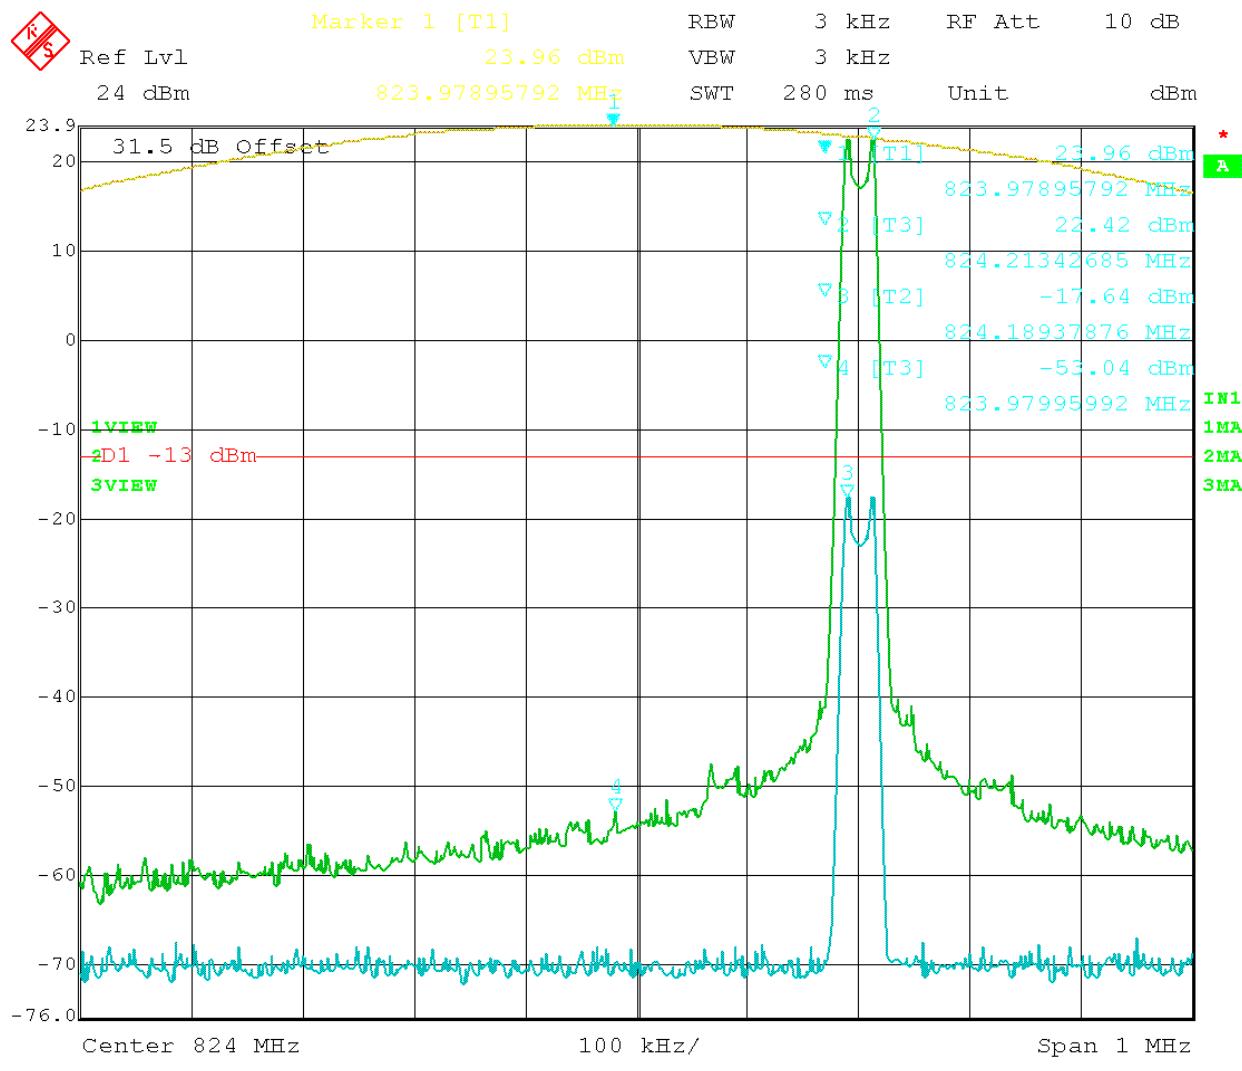

Date: 19.JAN.2009 09:18:35

Figure 33: AMPS – In vs. Out 824.20 MHz

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


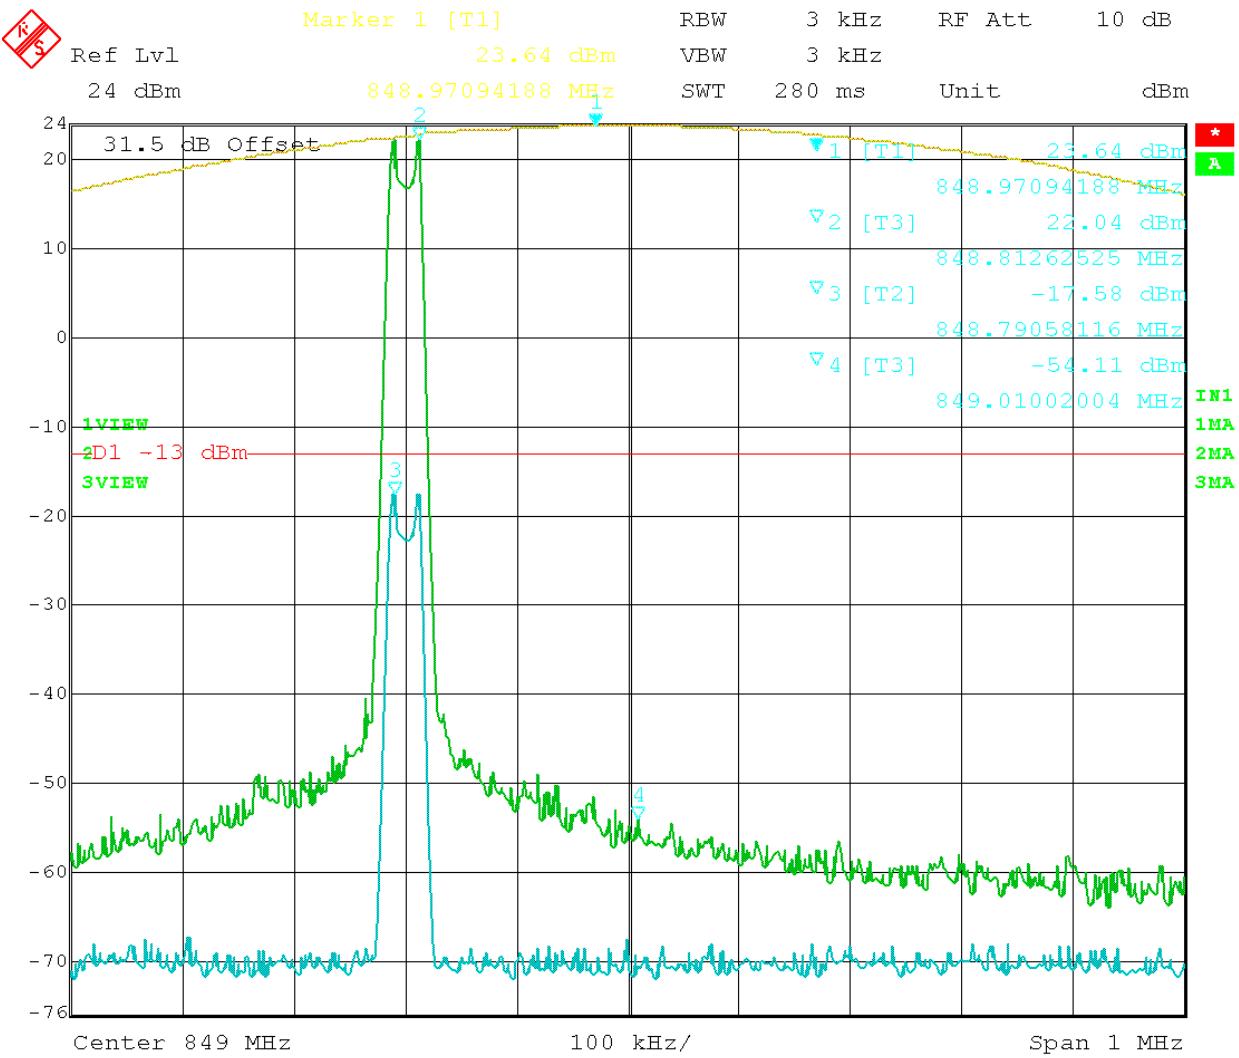


Figure 34: AMPS – In vs. Out 848.80 MHz


APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

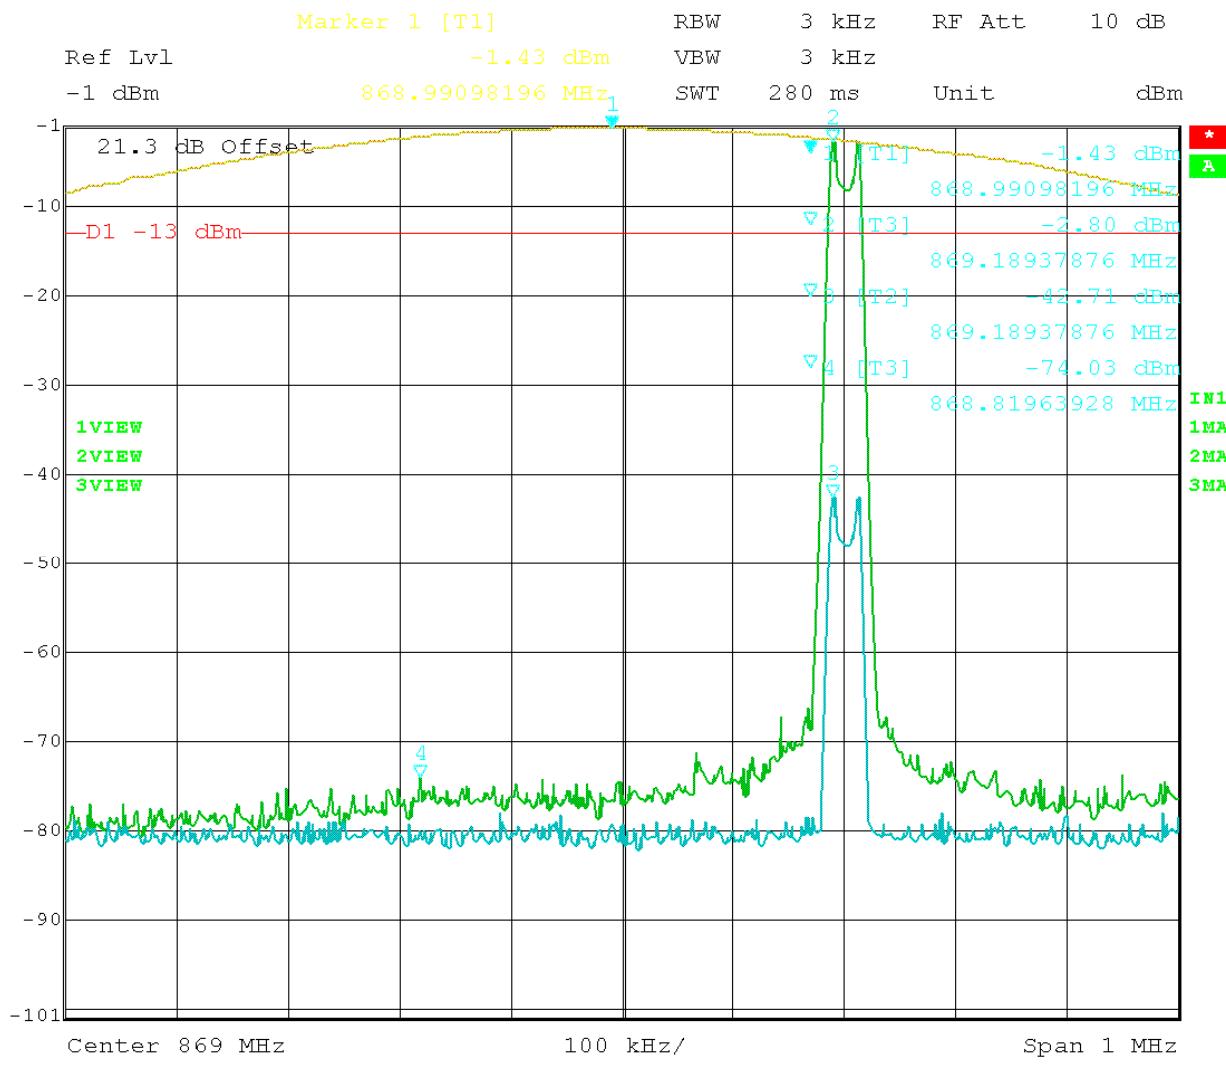

Date: 21.JAN.2009 09:17:49

Figure 35: AMPS – In vs. Out 869.20 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

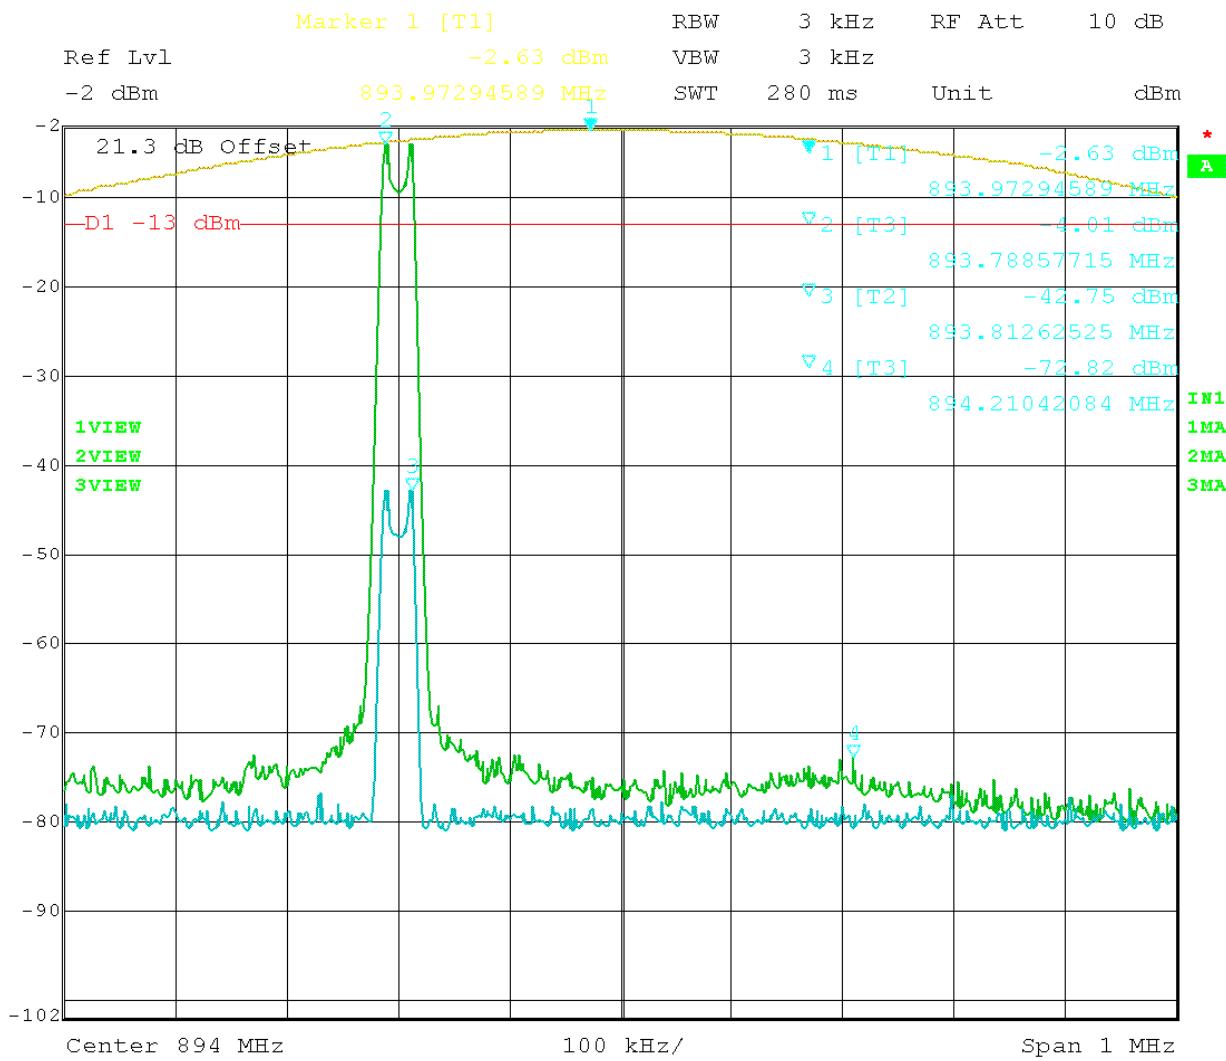

Date: 21.JAN.2009 09:34:29

Figure 36: AMPS – In vs. Out 893.80 MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



INTERMODULATION PRODUCT SPURIOUS EMISSIONS

Rule Parts No.: Pt 2.1051

Requirements: Emissions must be $43 + 10 \log (P_o)$ dB below the mean power output of the transmitter or below the -13dBm

All the modulation types were tested using the three tone test method. A CW signal was used instead of GSM, EDGE, and F1D modulations. EDGE and GSM provided the same test results and only GSM data are presented in this report. The input power to the amplifier was set at maximum drive level by combining the three tones. The three tones were chosen in such a way (1) the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

Test Data: The DUT appears to meet the requirements.

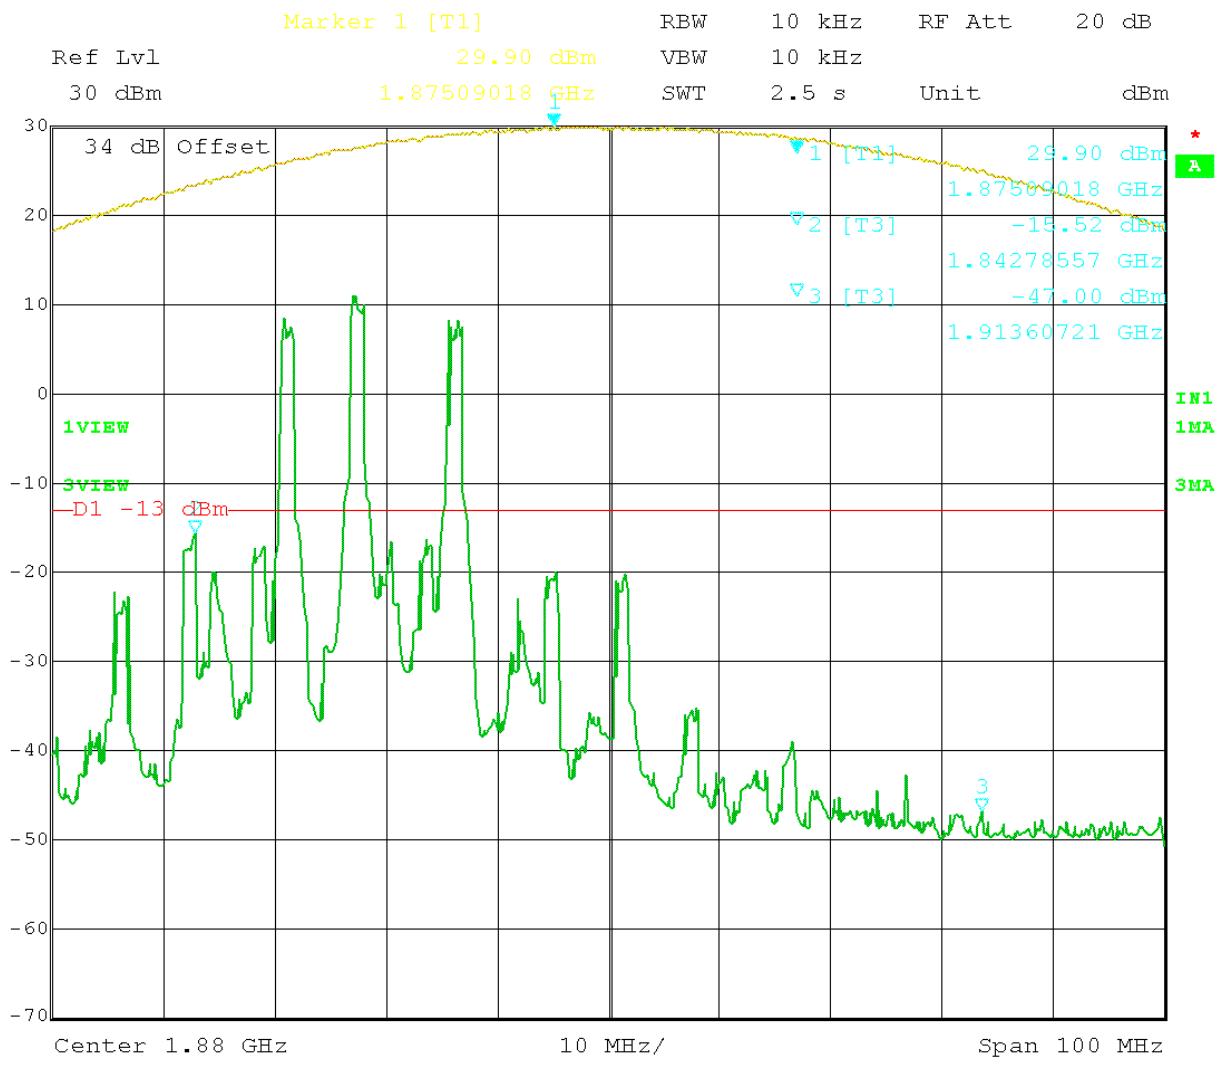


Figure 34: CDMA 3 tones intermodulation - (1850 – 1910) MHz.

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


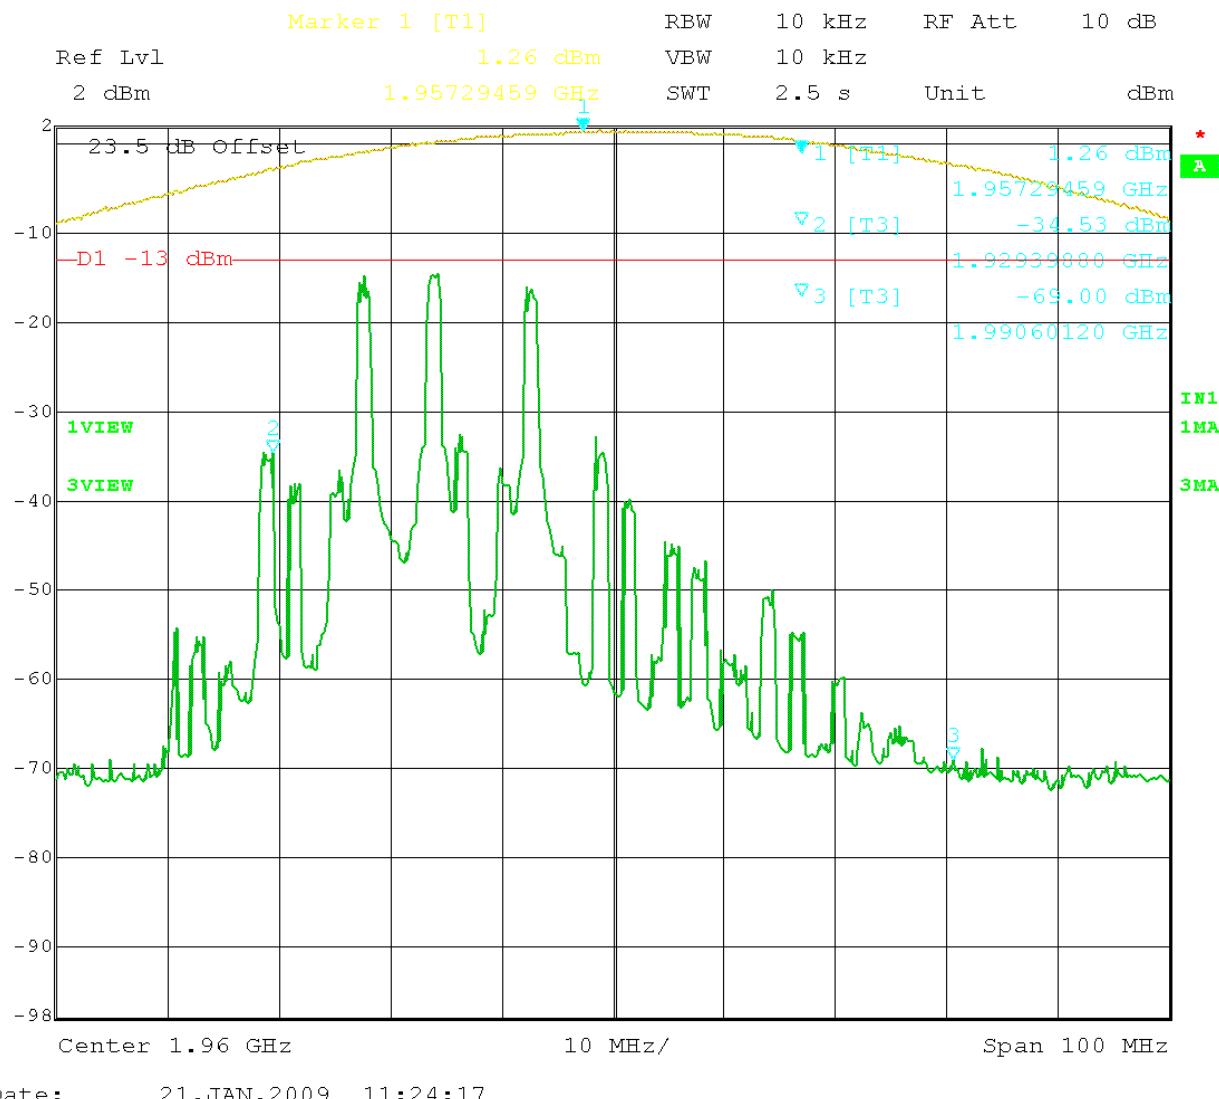


Figure 35: CDMA 3 tones intermodulation - (1930 – 1990) MHz.

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

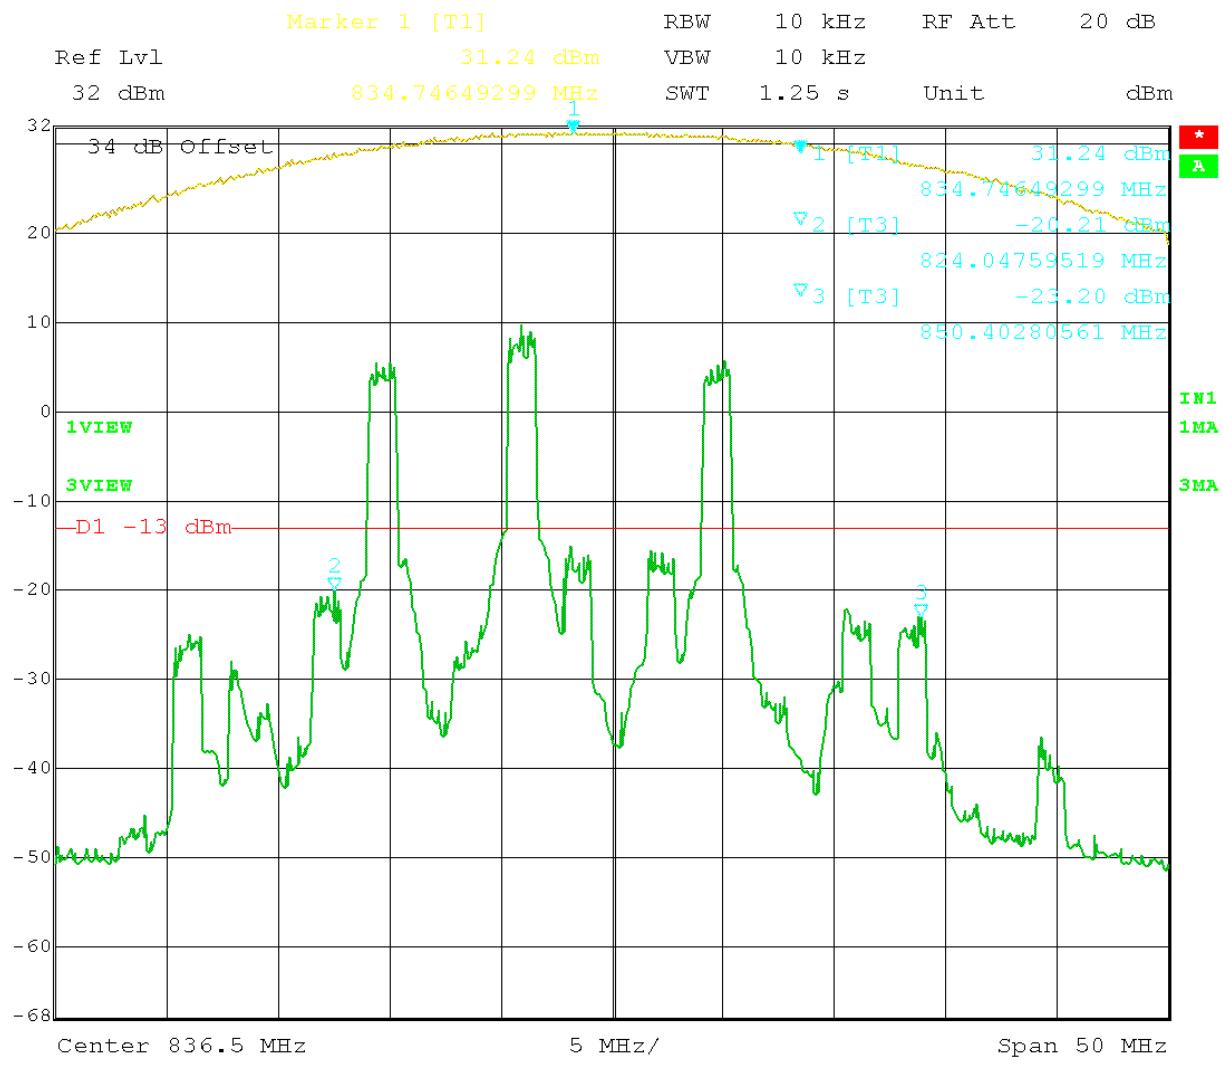

Date: 21.JAN.2009 11:08:56

Figure 36: CDMA 3 tones intermodulation – (824 – 849) MHz.

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

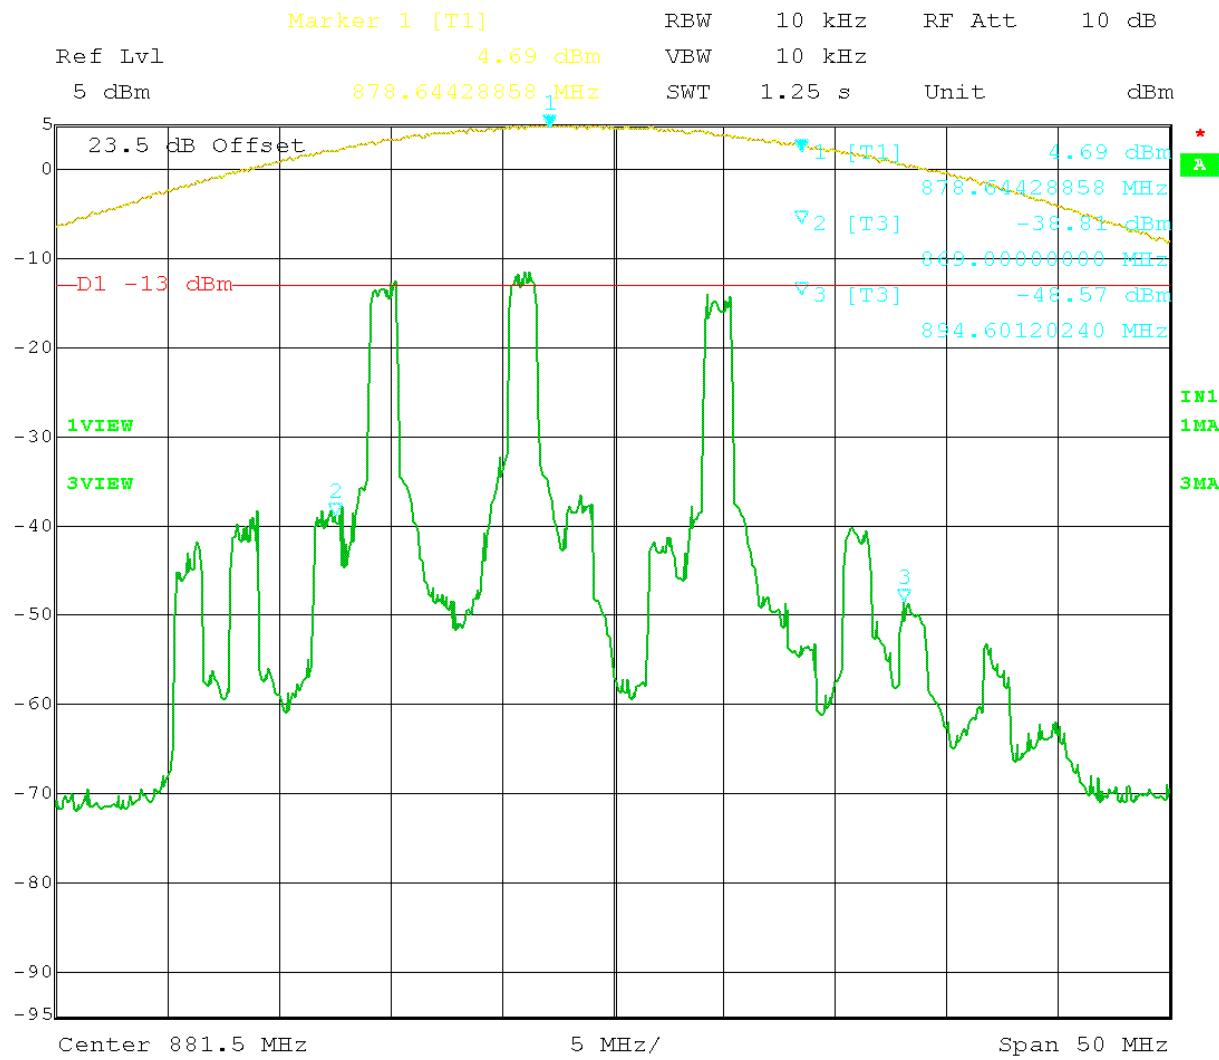


Figure 37: CDMA 3 tones intermodulation - (869 – 894) MHz.

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

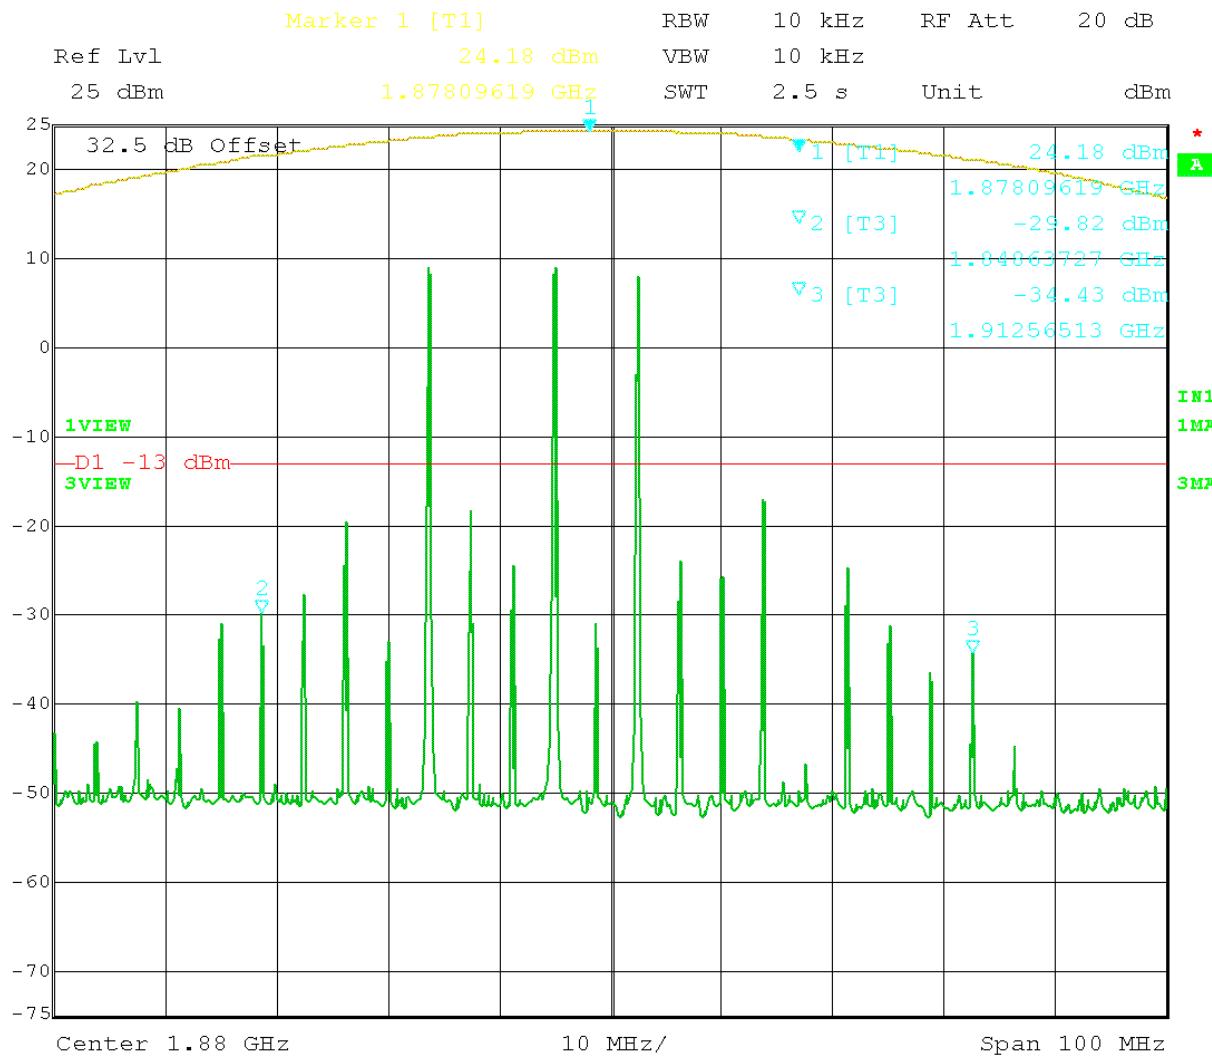


Figure 38: GSM 3 tones intermodulation - (1850 – 1910) MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


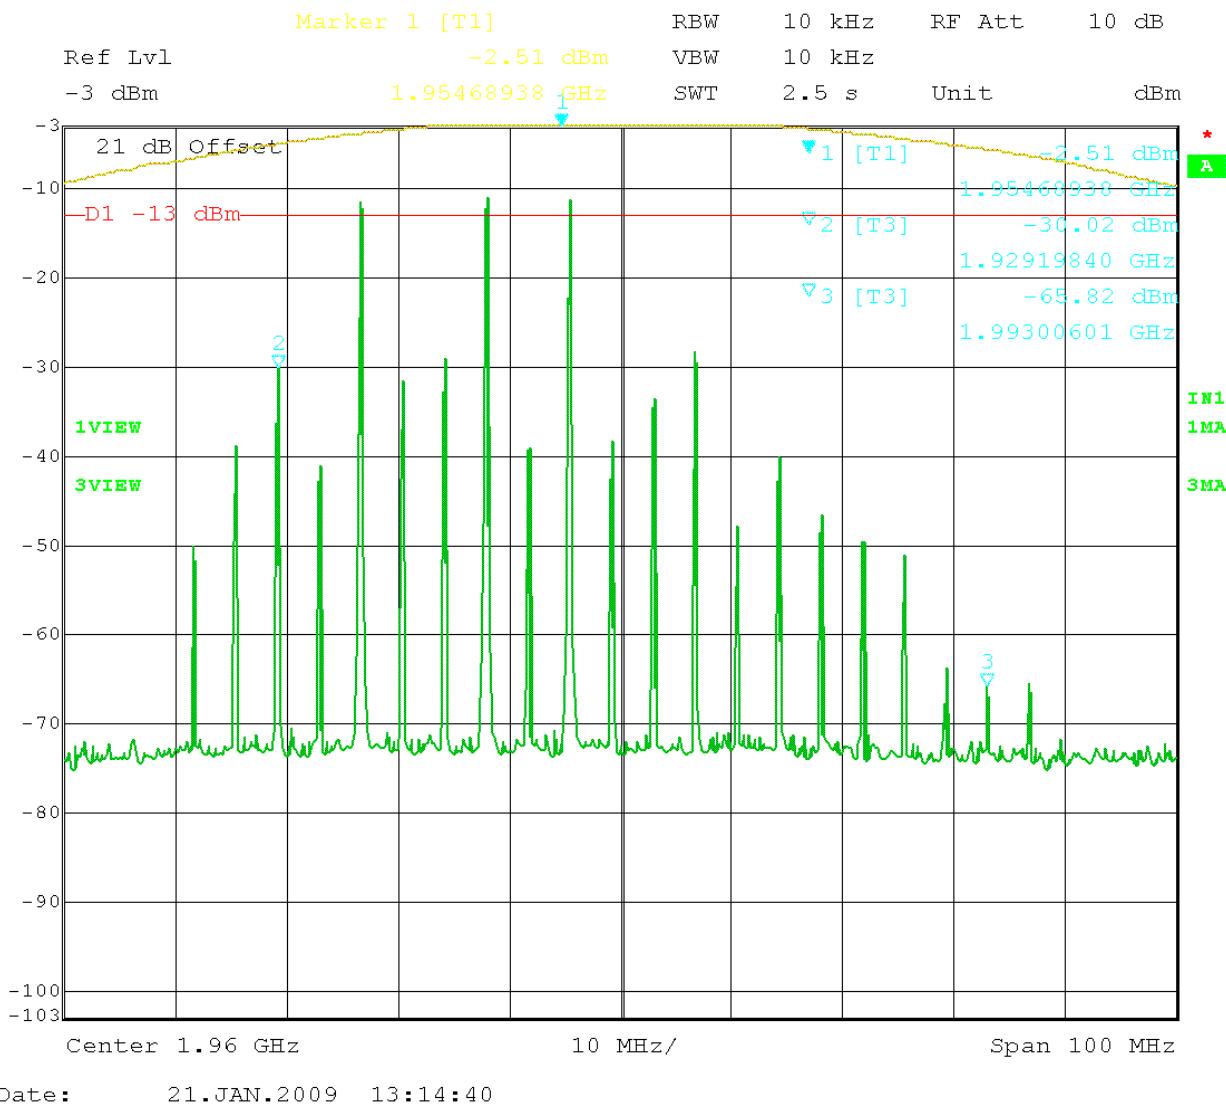


Figure 39: GSM 3 tones intermodulation - (1930 – 1990) MHz


APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

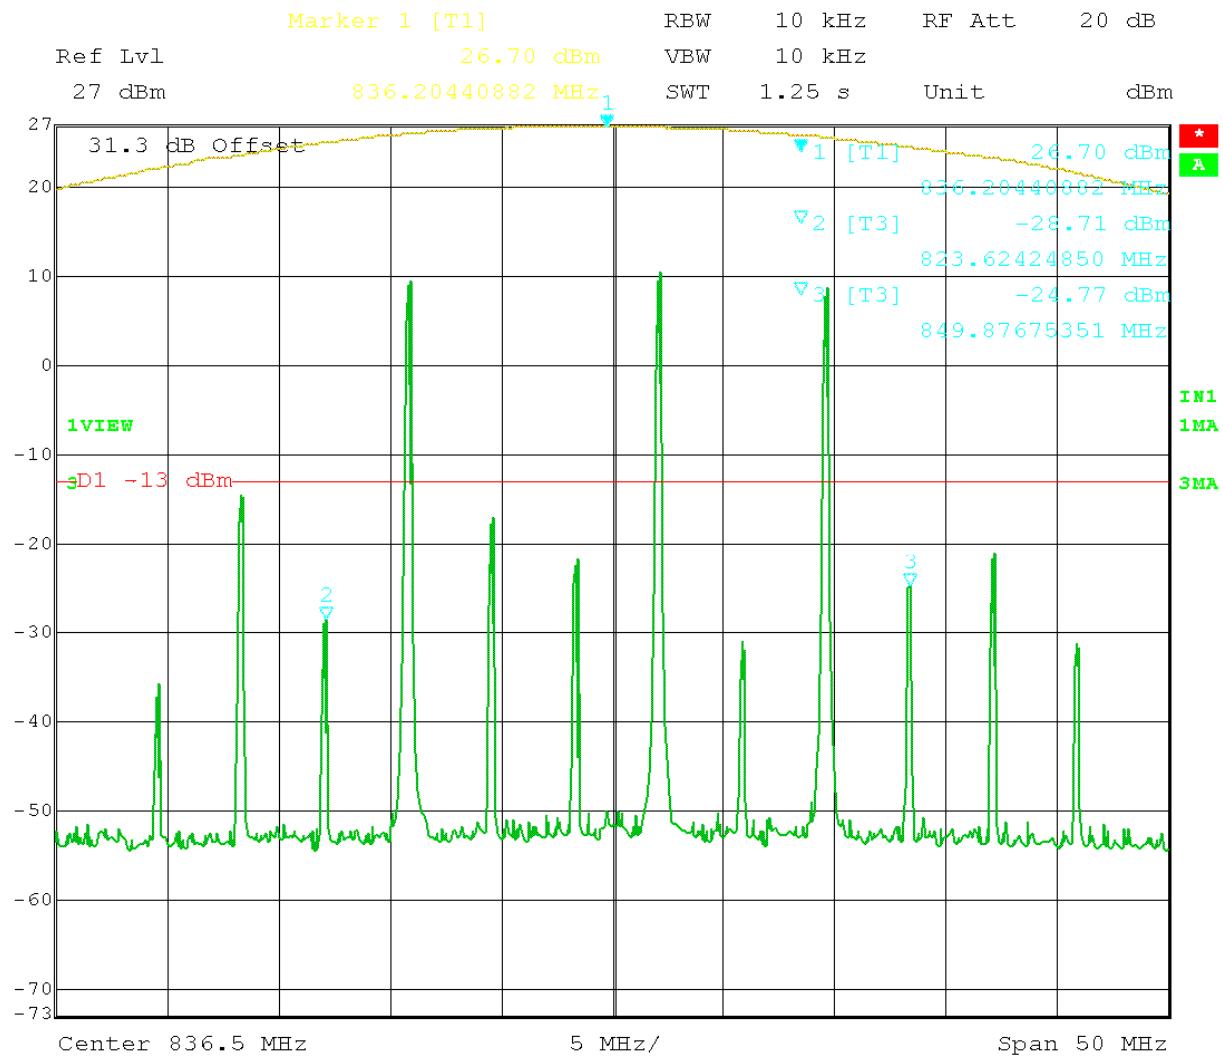

Date: 21.JAN.2009 13:36:47

Figure 40: GSM 3 tones intermodulation - (824 – 849) MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

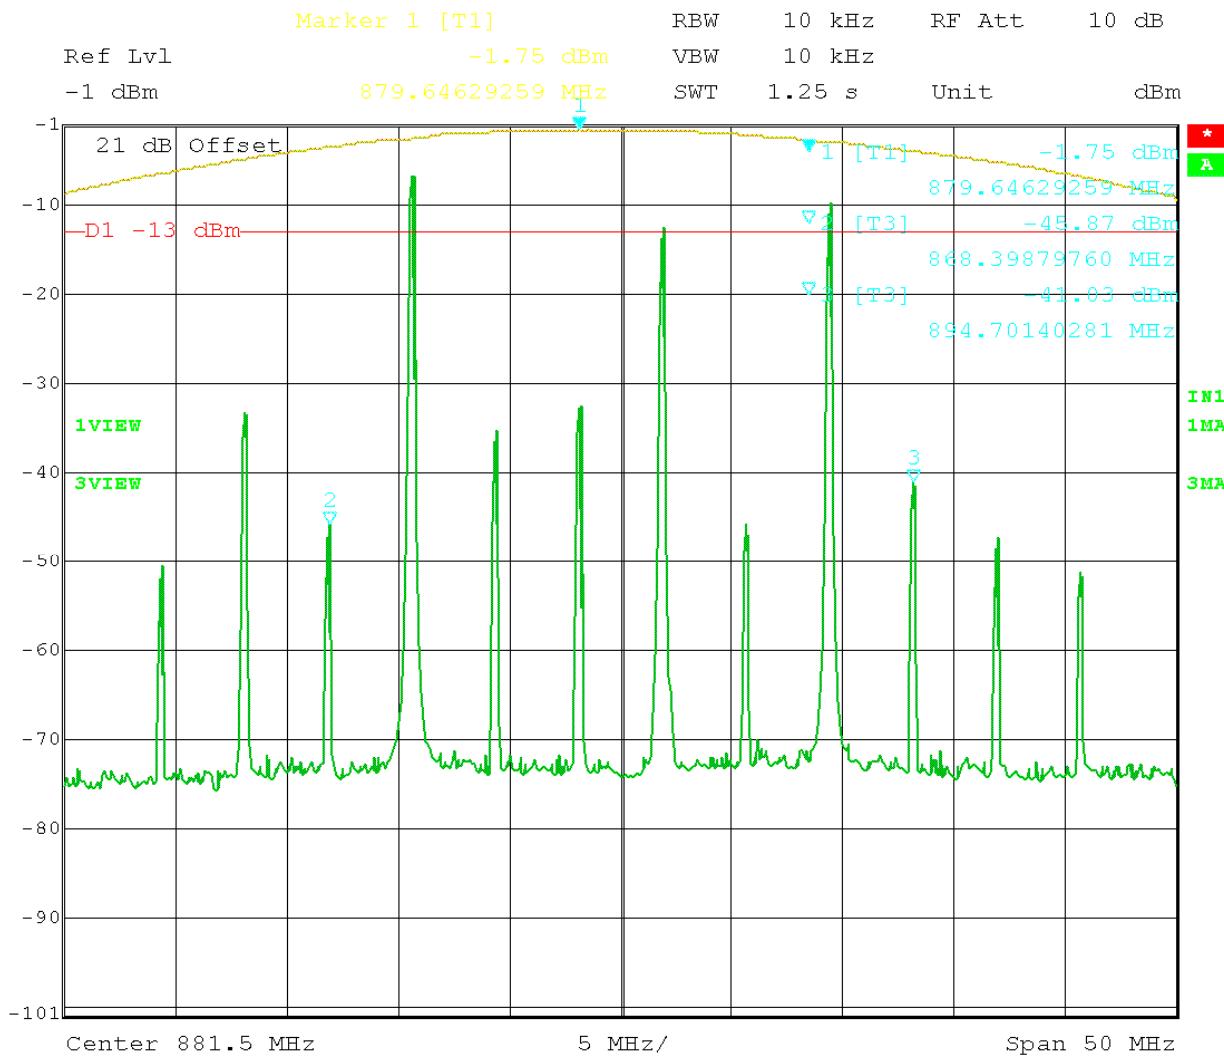

Date: 21.JAN.2009 13:25:14

Figure 41: GSM 3 tones intermodulation - (869 – 894) MHz

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Rule Parts No.: Pt 2.1051

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter:

$$1850 - 1910 \text{ MHz: } 43 + 10\log(1.39) = 44 \text{ dBc}$$

$$1930 - 1990: 43 + 10\log(0.01) = 23 \text{ dBc}$$

Test Result: The DUT appears to meet the requirements.

Test Data Table 19 – Conducted Emissions – CDMA 1900 – Uplink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
1851.25	0	1880.00	0	1908.75	0
3702.50	73.94	3760.00	68.29	3817.50	55.95
5553.75	>62.0	5640.00	84.72	5726.25	85.52
7405.00	>62.0	7520.00	>62.0	7635.00	>62.0
9256.25	>62.0	9400.00	>62.0	9543.75	92.99
11107.50	>62.0	11280.00	>62.0	11452.50	>62.0
12958.75	>62.0	13160.00	>62.0	13361.25	>62.0
14810.00	>62.0	15040.00	>62.0	15270.00	>62.0
16661.25	>62.0	16920.00	>62.0	17178.75	>62.0
18512.50	>62.0	18800.00	>62.0	19087.50	>62.0

Test Data Table 20 – Conducted Emissions – CDMA 1900 – Downlink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
1931.25	0	1960.00	0	1988.75	0
3862.50	53.16	3920.00	54.89	3977.50	55.19
5793.75	>60.0	5880.00	>60.0	5966.25	>60.0
7725.00	>60.0	7840.00	>60.0	7955.00	>60.0
9656.25	>60.0	9800.00	>60.0	9943.75	>60.0
11587.50	>60.0	11760.00	>60.0	11932.50	>60.0
13518.75	>60.0	13720.00	>60.0	13921.25	>60.0
15450.00	>60.0	15680.00	>60.0	15910.00	>60.0
17381.25	>60.0	17640.00	>60.0	17898.75	>60.0
19312.50	>60.0	19600.00	>60.0	19887.50	>60.0

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 21 – Conducted Emissions – GSM 1900 - Uplink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
1850.20	0	1880.00	0	1909.80	0
3700.40	72.39	3760.00	69.47	3819.60	59.54
5550.60	>58.0	5640.00	87.55	5729.40	83.16
7400.80	>58.0	7520.00	>58.0	7639.20	>58.0
9251.00	>58.0	9400.00	>58.0	9549.00	>58.0
11101.20	>58.0	11280.00	>58.0	11458.80	>58.0
12951.40	>58.0	13160.00	>58.0	13368.60	>58.0
14801.60	>58.0	15040.00	>58.0	15278.40	>58.0
16651.80	>58.0	16920.00	>58.0	17188.20	>58.0
18502.00	>58.0	18800.00	>58.0	19098.00	>58.0

Test Data Table 22 – Conducted Emissions – GSM 1900 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
1930.20	0	1960.00	0	1989.80	0
3860.40	51.51	3920.00	51.44	3979.60	52.53
5790.60	>56.0	5880.00	>56.0	5969.40	>56.0
7720.80	>56.0	7840.00	>56.0	7959.20	>56.0
9651.00	>56.0	9800.00	>56.0	9949.00	>56.0
11581.20	>56.0	11760.00	>56.0	11938.80	>56.0
13511.40	>56.0	13720.00	>56.0	13928.60	>56.0
15441.60	>56.0	15680.00	>56.0	15918.40	>56.0
17371.80	>56.0	17640.00	>56.0	17908.20	>56.0
19302.00	>56.0	19600.00	>56.0	19898.00	>56.0

Test Data Table 23 – Conducted Emissions – CDMA 800 - Uplink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
825.25	0	836.50	0	847.75	0
1650.50	98.23	1673.00	91.84	1695.50	93
2475.75	89.91	2509.50	90.02	2543.25	82.46
3301.00	99.65	3346.00	101	3391.00	98.07
4126.25	>62.0	4182.50	>62.0	4238.75	>62.0
4951.50	>62.0	5019.00	>62.0	5086.50	>62.0
5776.75	>62.0	5855.50	>62.0	5934.25	>62.0
6602.00	>62.0	6692.00	>62.0	6782.00	>62.0
7427.25	>62.0	7528.50	>62.0	7629.75	>62.0
8252.50	>62.0	8365.00	>62.0	8477.50	>62.0

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 24 – Conducted Emissions – CDMA 800 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)
870.25	0		881.50	0		892.75	0
1740.50	71.97		1763.00	70.81		1785.50	69.94
2610.75	72.34		2644.50	69.81		2678.25	69.13
3481.00	66.72		3526.00	69.69		3571.00	72.64
4351.25	70.82		4407.50	72.61		4463.75	>60.0
5221.50	>60.0		5289.00	>60.0		5356.50	>60.0
6091.75	>60.0		6170.50	>60.0		6249.25	>60.0
6962.00	>60.0		7052.00	>60.0		7142.00	>60.0
7832.25	>60.0		7933.50	>60.0		8034.75	>60.0
8702.50	>60.0		8815.00	>60.0		8927.50	>60.0

Test Data Table 25 – Conducted Emissions – GSM 800 – Uplink

Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)
824.20	0		836.50	0		848.80	0
1648.40	82.86		1673.00	80.5		1697.60	77.55
2472.60	77.68		2509.50	77.09		2546.40	71.25
3296.80	>58.0		3346.00	>58.0		3395.20	81.28
4121.00	>58.0		4182.50	>58.0		4244.00	81.64
4945.20	>58.0		5019.00	>58.0		5092.80	>58.0
5769.40	>58.0		5855.50	>58.0		5941.60	>58.0
6593.60	>58.0		6692.00	>58.0		6790.40	>58.0
7417.80	>58.0		7528.50	>58.0		7639.20	>58.0
8242.00	>58.0		8365.00	>58.0		8488.00	>58.0

Test Data Table 26 – Conducted Emissions – GSM 800 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)
869.20	0		881.50	0		893.80	0
1738.40	66.77		1763.00	66.11		1787.60	63.66
2607.60	68.22		2644.50	64.3		2681.40	63.28
3476.80	66.58		3526.00	68.42		3575.20	68.83
4346.00	65.45		4407.50	68.27		4469.00	68.42
5215.20	>56.0		5289.00	>56.0		5362.80	>56.0
6084.40	>56.0		6170.50	>56.0		6256.60	>56.0
6953.60	>56.0		7052.00	>56.0		7150.40	>56.0
7822.80	>56.0		7933.50	>56.0		8044.20	>56.0
8692.00	>56.0		8815.00	>56.0		8938.00	>56.0

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

Test Data Table 26 – Conducted Emissions – AMPS 800 - Uplink

Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)
824.20	0		836.50	0		848.80	0
1648.40	90.51		1673.00	86.47		1697.60	87.36
2472.60	84.56		2509.50	88.92		2546.40	76.27
3296.80	91.97		3346.00	95.79		3395.20	83.92
4121.00	>58.0		4182.50	96.4		4244.00	87.59
4945.20	>58.0		5019.00	>58.0		5092.80	>58.0
5769.40	>58.0		5855.50	>58.0		5941.60	>58.0
6593.60	>58.0		6692.00	>58.0		6790.40	>58.0
7417.80	>58.0		7528.50	>58.0		7639.20	>58.0
8242.00	>58.0		8365.00	>58.0		8488.00	>58.0

Test Data Table 27 – Conducted Emissions – AMPS 800 – Downlink

Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)		Emission Frequency MHz	dB Below Carrier (dBc)
869.20	0		881.50	0		893.80	0
1738.40	65.76		1763.00	63.52		1787.60	63.79
2607.60	68.12		2644.50	63.29		2681.40	65.03
3476.80	>56.0		3526.00	>56.0		3575.20	>56.0
4346.00	>56.0		4407.50	>56.0		4469.00	>56.0
5215.20	>56.0		5289.00	>56.0		5362.80	>56.0
6084.40	>56.0		6170.50	>56.0		6256.60	>56.0
6953.60	>56.0		7052.00	>56.0		7150.40	>56.0
7822.80	>56.0		7933.50	>56.0		8044.20	>56.0
8692.00	>56.0		8815.00	>56.0		8938.00	>56.0

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

OUT OF BAND REJECTION: FREQUENCY RESPONSE

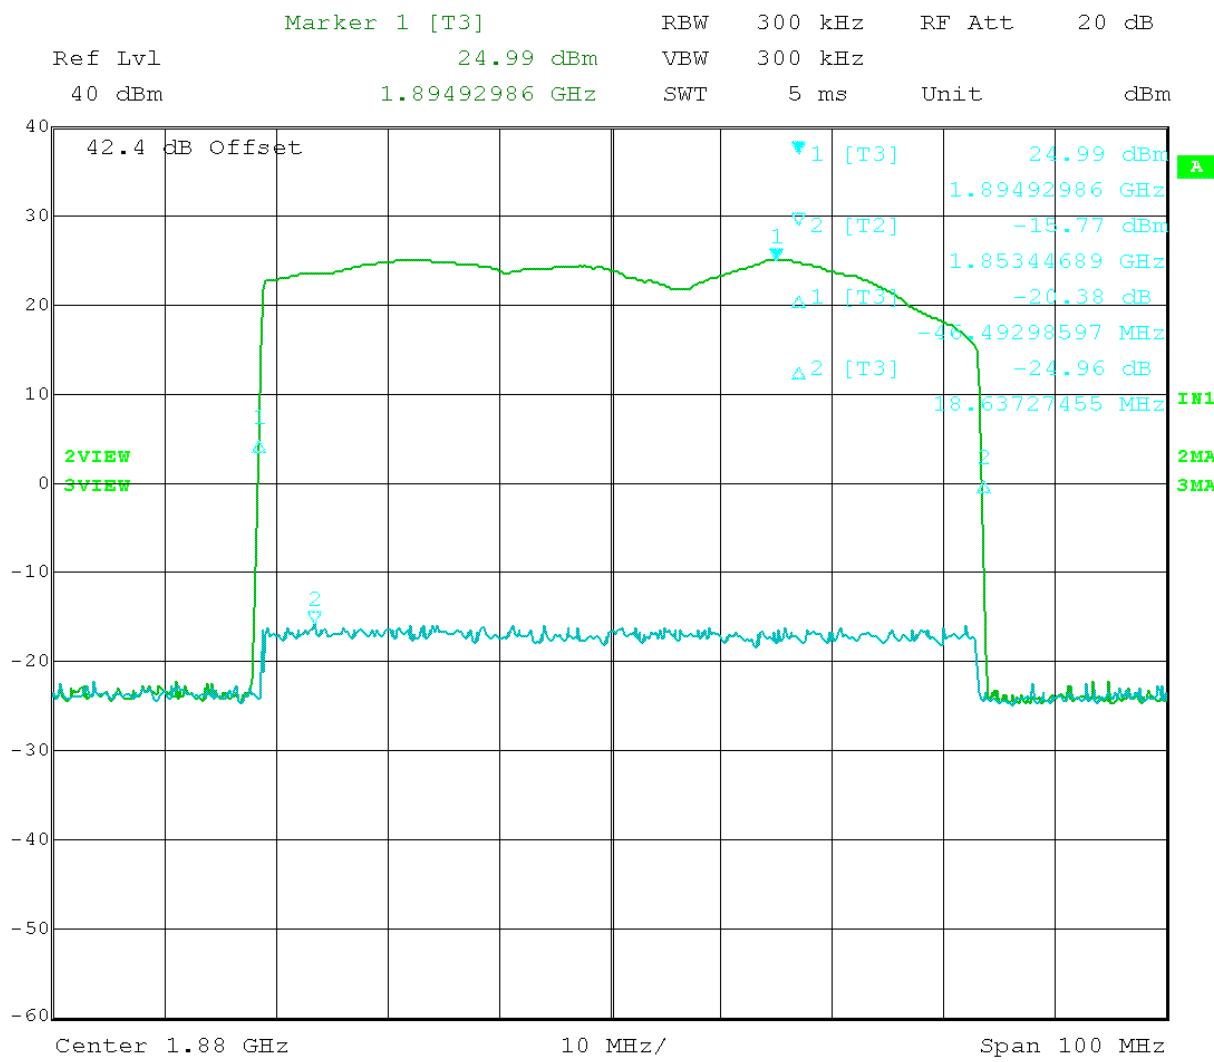


Figure 42. Frequency response (1850 – 1910) MHz band

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

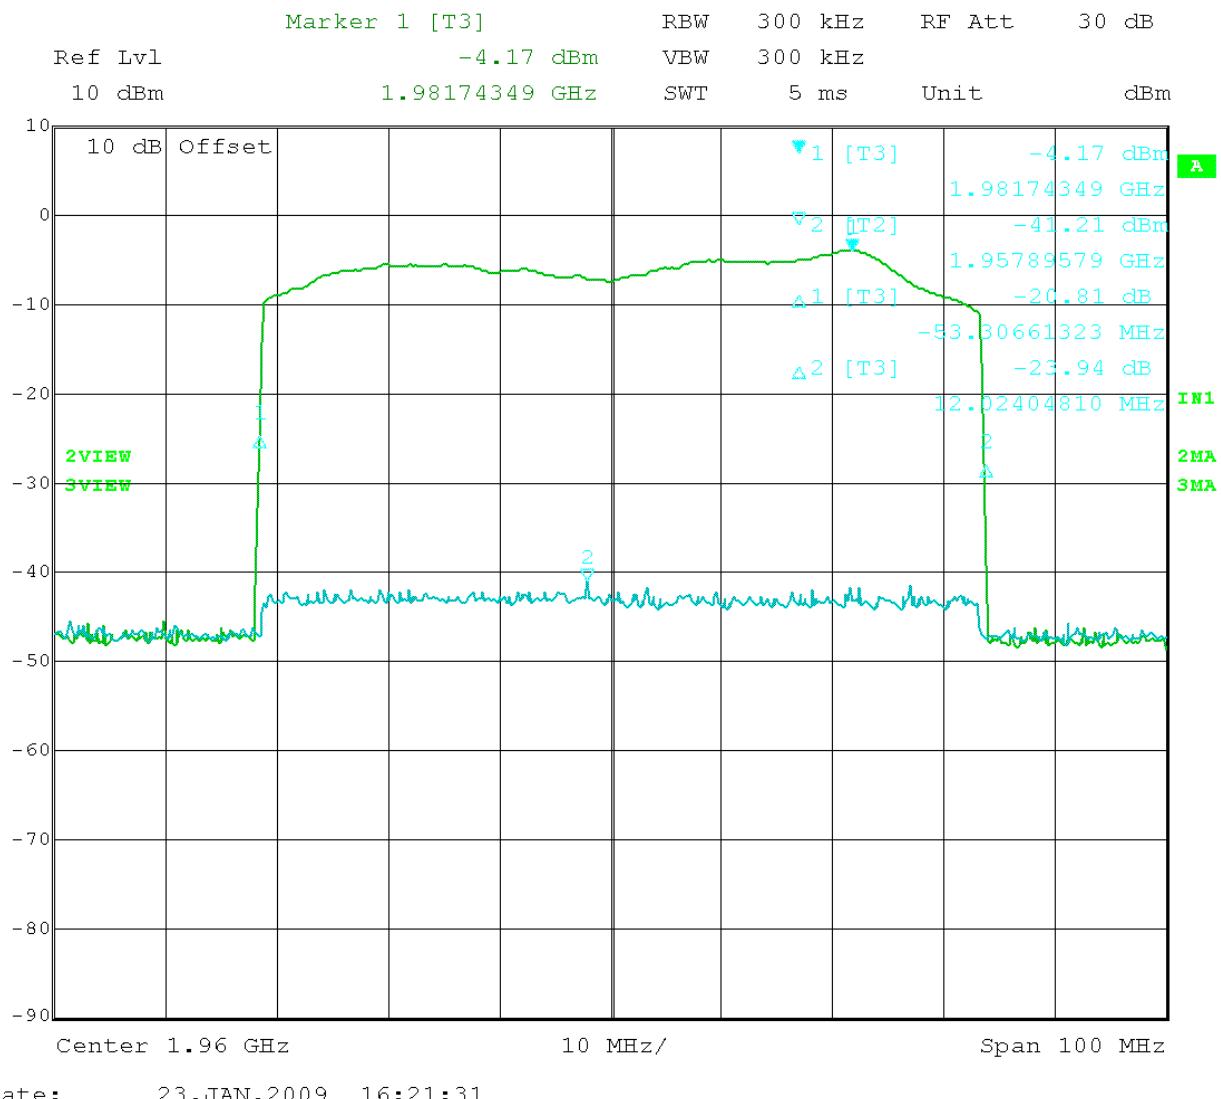


Figure 43. Frequency response (1930 – 1990) MHz band

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


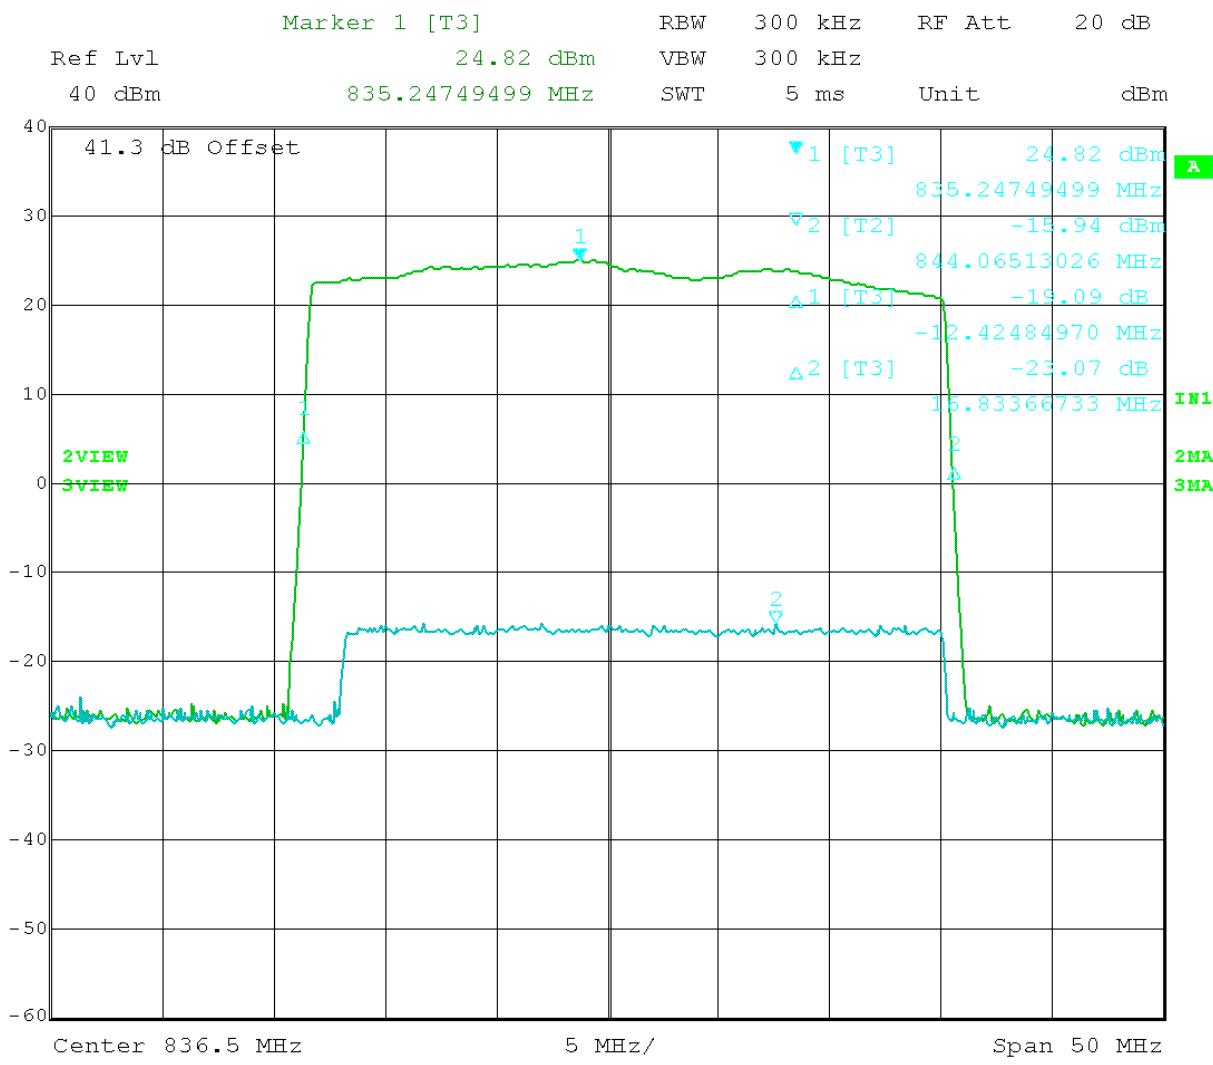


Figure 44. Frequency response (824 – 849) MHz band

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

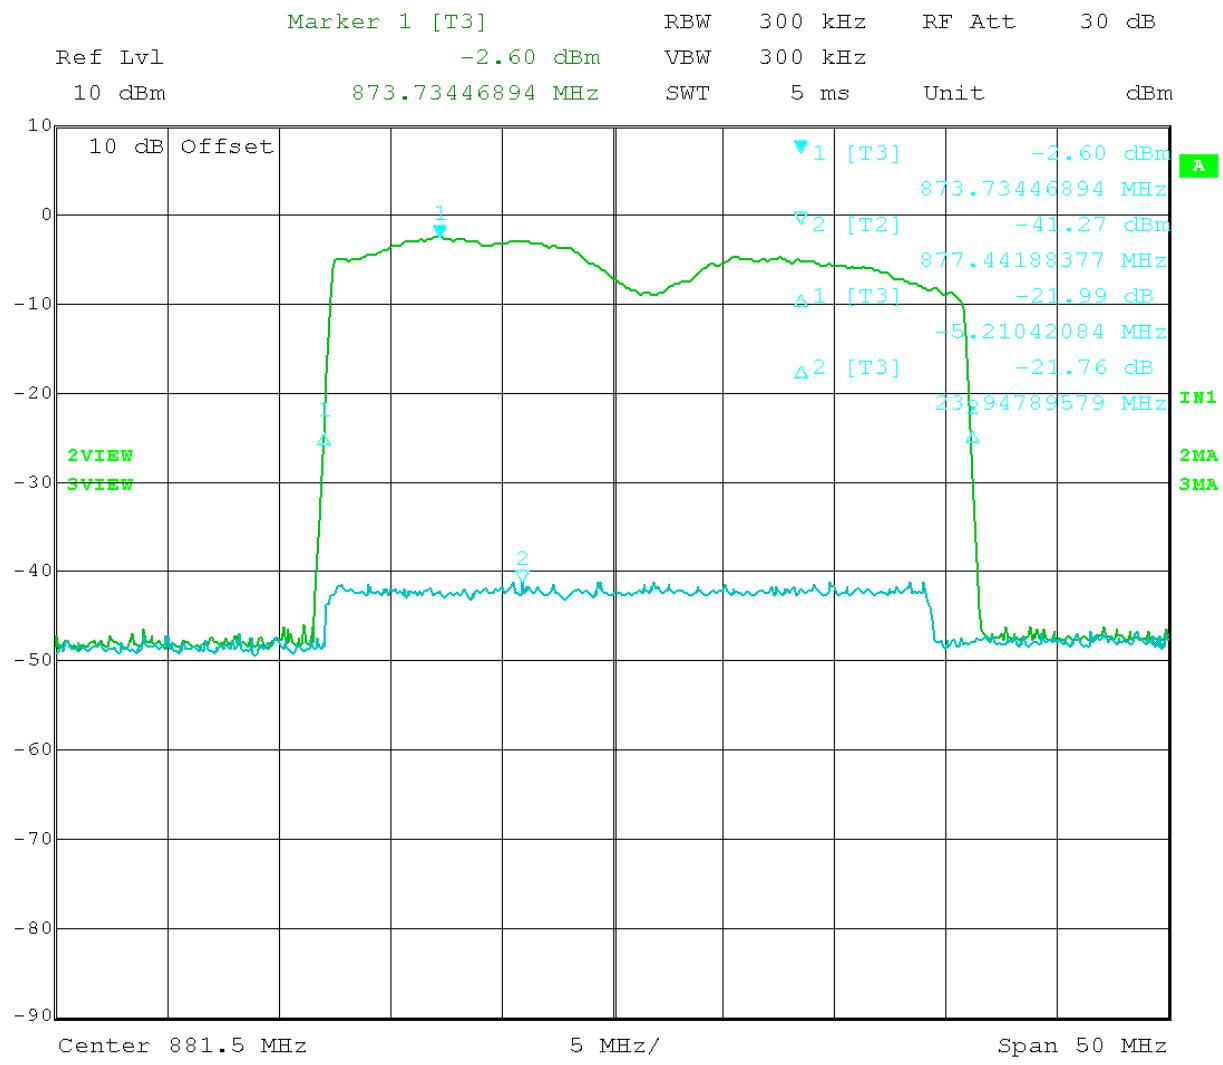

Date: 23.JAN.2009 16:40:11

Figure 45. Frequency response (869 – 894) MHz band

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts No.: Pt 2.1053

Requirements: Emissions must be $43 + 10\log(P_0)$ dB below the mean power output of the amplifier:

$$43 + 10\log(1.390) = 44 \text{ dB}$$
$$43 + 10\log(0.032) = 28 \text{ dB}$$

Test Result: The test data indicates the DUT meets the requirements

Test Data Table 28 – Radiated Emissions - CW

Emission Frequency (MHz)	Ant. Polarity (V/H)	Corrected DUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
1880.00		30.00	0	0	0
3760.00	H	-34.60	1.43	7.55	58.48
5640.00	H	-33.20	1.75	8.55	56.40
7520.00	V/H	*	*	*	*
9400.00	V/H	*	*	*	*
11280.00	V/H	*	*	*	*
13160.00	V/H	*	*	*	*
15040.00	V/H	*	*	*	*
16920.00	V/H	*	*	*	*
18800.00	V/H	*	*	*	*

[Continued]

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



Test Data Table 29 – Radiated Emissions - CW

Emission Frequency (MHz)	Ant. Polarity (V/H)	Corrected DUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
836.50		30.00	0	0	0
1673.00	H	-49.40	1.10	5.13	75.37
2509.50	H	-54.50	1.25	7.00	78.75
3346.00	H	-38.30	1.40	7.55	62.15
4182.50	H	-45.20	1.55	8.32	68.43
5019.00	H	-43.10	1.70	8.20	66.60
5855.50	H	-54.90	1.85	8.89	77.87
6692.00	V/H	*	*	*	*
7528.50	V/H	*	*	*	*
8365.00	V/H	*	*	*	*

Notes: *No other emissions were found up to the 10th harmonics - NOISE FLOOR

Test Data Table 30 – Radiated Emissions - CW

Emission Frequency (MHz)	Ant. Polarity (V/H)	Corrected DUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
1960.00		10.00	0	0	0
3920.00	H	-47.80	1.46	7.55	51.71
5880.00	H	-54.80	1.79	8.88	57.71
7840.00	V/H	*	*	*	*
9800.00	V/H	*	*	*	*
11760.00	V/H	*	*	*	*
13720.00	V/H	*	*	*	*
15680.00	V/H	*	*	*	*
17640.00	V/H	*	*	*	*
19600.00	V/H	*	*	*	*

[Continued]

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



Test Data Table 31 – Radiated Emissions – CW

Emission Frequency (MHz)	Ant. Polarity (V/H)	Corrected DUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
881.50		10.00	0	0	0
1763.00	H	-58.10	1.10	5.13	64.07
2644.50	H	-53.60	1.25	7.00	57.85
3526.00	H	-57.70	1.40	7.55	61.55
4407.50	H	-59.90	1.55	8.32	63.13
5289.00	V/H	*	*	*	*
6170.50	V/H	*	*	*	*
7052.00	V/H	*	*	*	*
7933.50	V/H	*	*	*	*
8815.00	V/H	*	*	*	*

Notes: *No other emissions were found up to the 10th harmonics - NOISE FLOOR



MEAN OUTPUT POWER FOR MULTI-CHANNEL ENHANCER (FOR IC ONLY)

Rule Part(s) No.: RSS-131 Issue 2 Para.4.3.1

Requirements: For enhancers rated 500 watts or less: Raise the input level to the DUT until the greater level of the intermodulation products at the enhancer output terminals, Po3 or Po4, equals -43 dBW.

For enhancers rated over 500 watts: Raise the input level to the DUT until the greater level of the intermodulation products at the enhancer output terminals, Po3 or Po4, is 67 dB below the level of either output tone level, Po1 or Po2.

Record all signal levels and their frequencies. Calculate the mean output power (Pmean) under this testing condition using $P_{mean} = P_1 + 3 \text{ dB}$.

Test Result: As the following table indicates.

Test Data Table 32 – Mean Power

Channel	Freq (MHz)	dBm	dBw
F1	833.644	15.82	
F2	840.257	14.71	
F3	827.031	-13.24	
F4	846.870	-13.35	
Mean		18.82	
F1	877.211	3.98	
F2	885.227	2.01	
F3	869.195	-13.33	
F4	893.243	-13.78	
Mean		6.98	

[Continued]

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc



Test Data Table 33 – Mean Power

Channel	Freq (MHz)	dBm	dBw
F1	1873.987	14.08	
F2	1890.501	15.45	
F3	1857.473	-13.01	
F4	1907.015	-13.36	
Mean		18.45	
F1	1957.034	-3.76	
F2	1962.164	-2.84	
F3	1951.904	-15.51	
F4	1967.294	-14.58	
Mean		0.16	

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

PASSBAND GAIN AND BANDWIDTH (FOR IC ONLY)

Rule Part No.: RSS-131 Issue 2 Para 4.2

Requirements: RSS-131 Issue 2 Para 4.2

Test Data: See plots


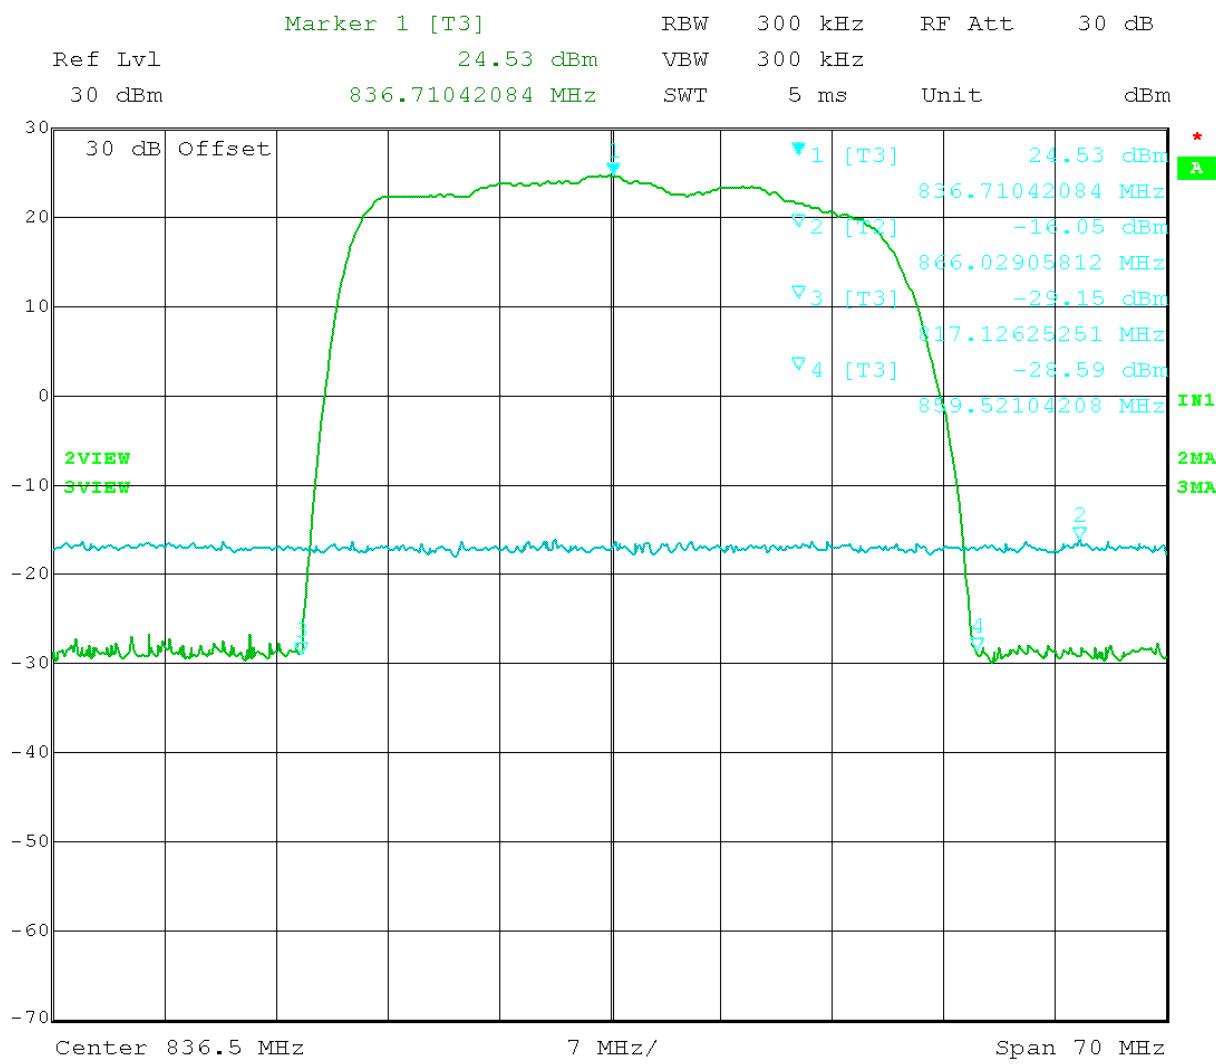


Figure 46: Passband Gain and Bandwidth (uplink 800 MHz)

APPLICANT: WILSON ELECTRONICS, INC.

FCC ID: PWO271220SA, IC: 4726A-271220SA

Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

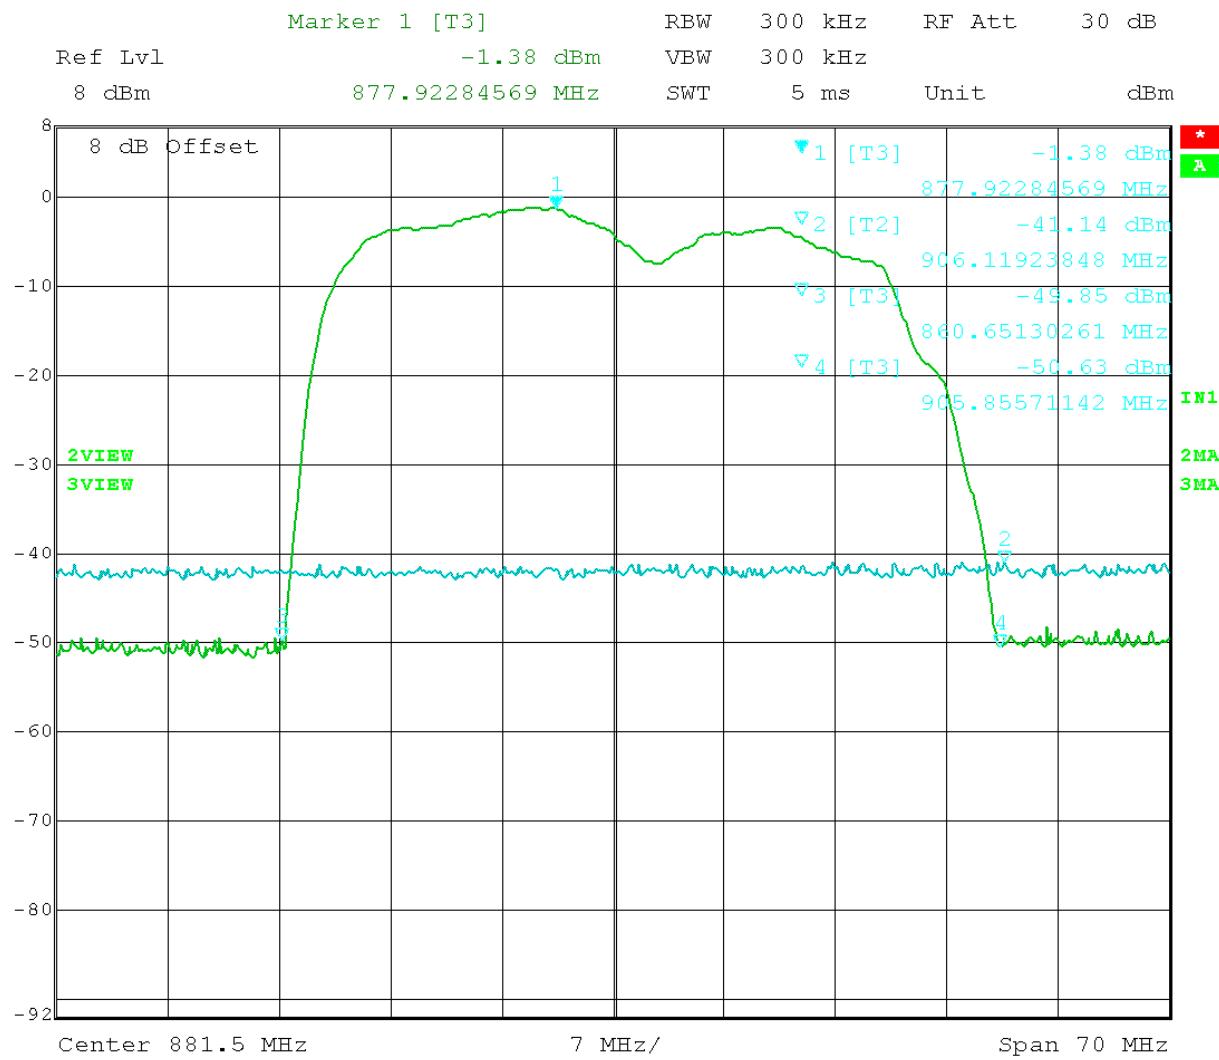

Date: 22.APR.2009 10:51:50

Figure 47: Passband Gain and Bandwidth (downlink 800 MHz)

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc


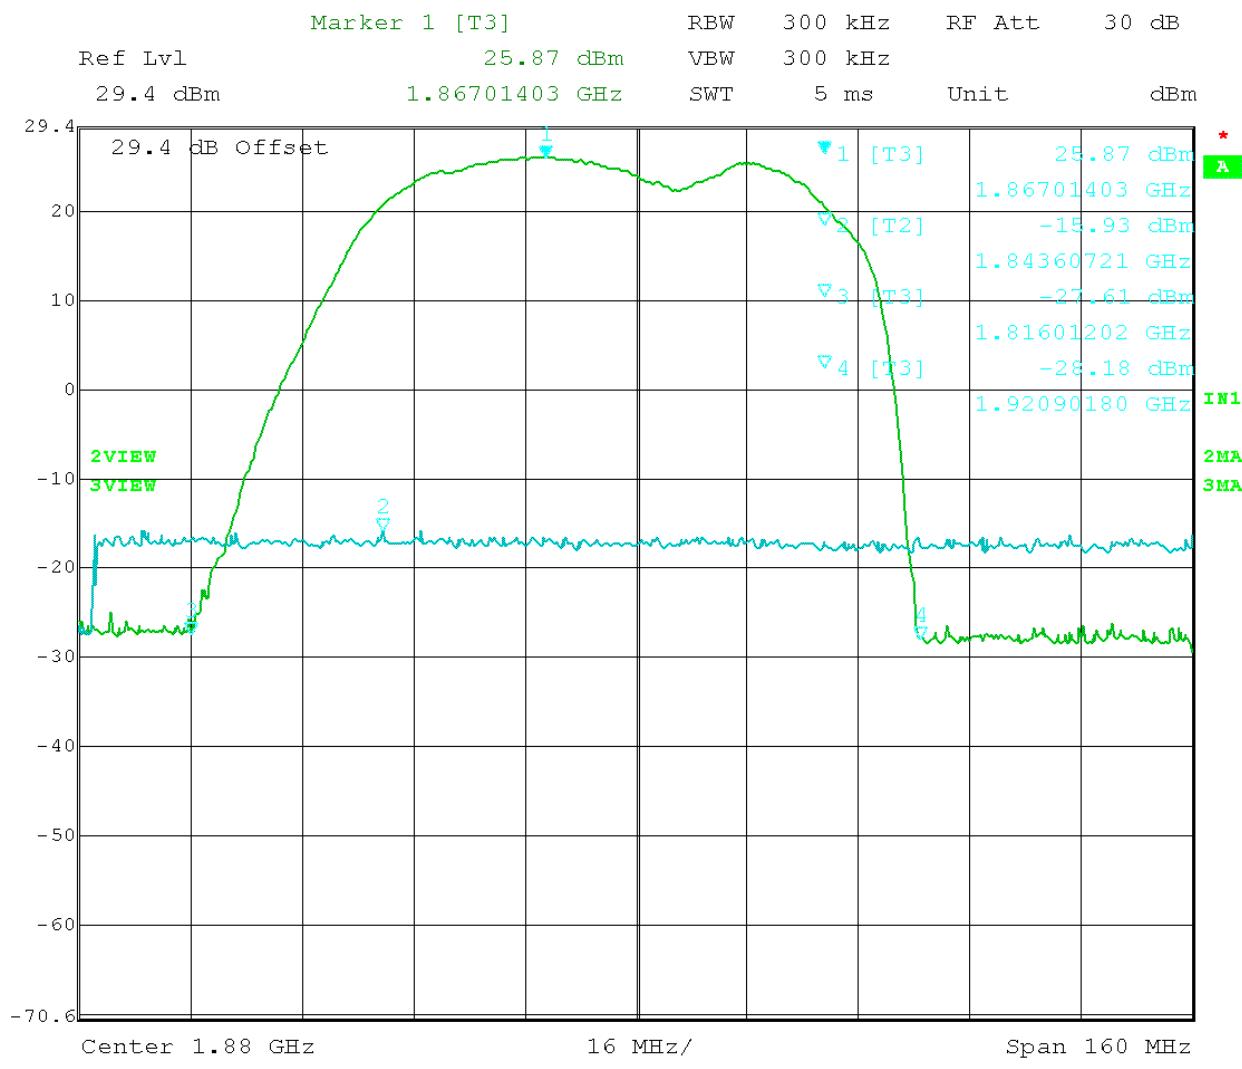


Figure 48: Passband Gain and Bandwidth (uplink 1900 MHz)

APPLICANT: WILSON ELECTRONICS, INC.
 FCC ID: PWO271220SA, IC: 4726A-271220SA
 Report #:X:\W\WILSON_PWO\2596AUT8\2596AUT8TestReport.doc

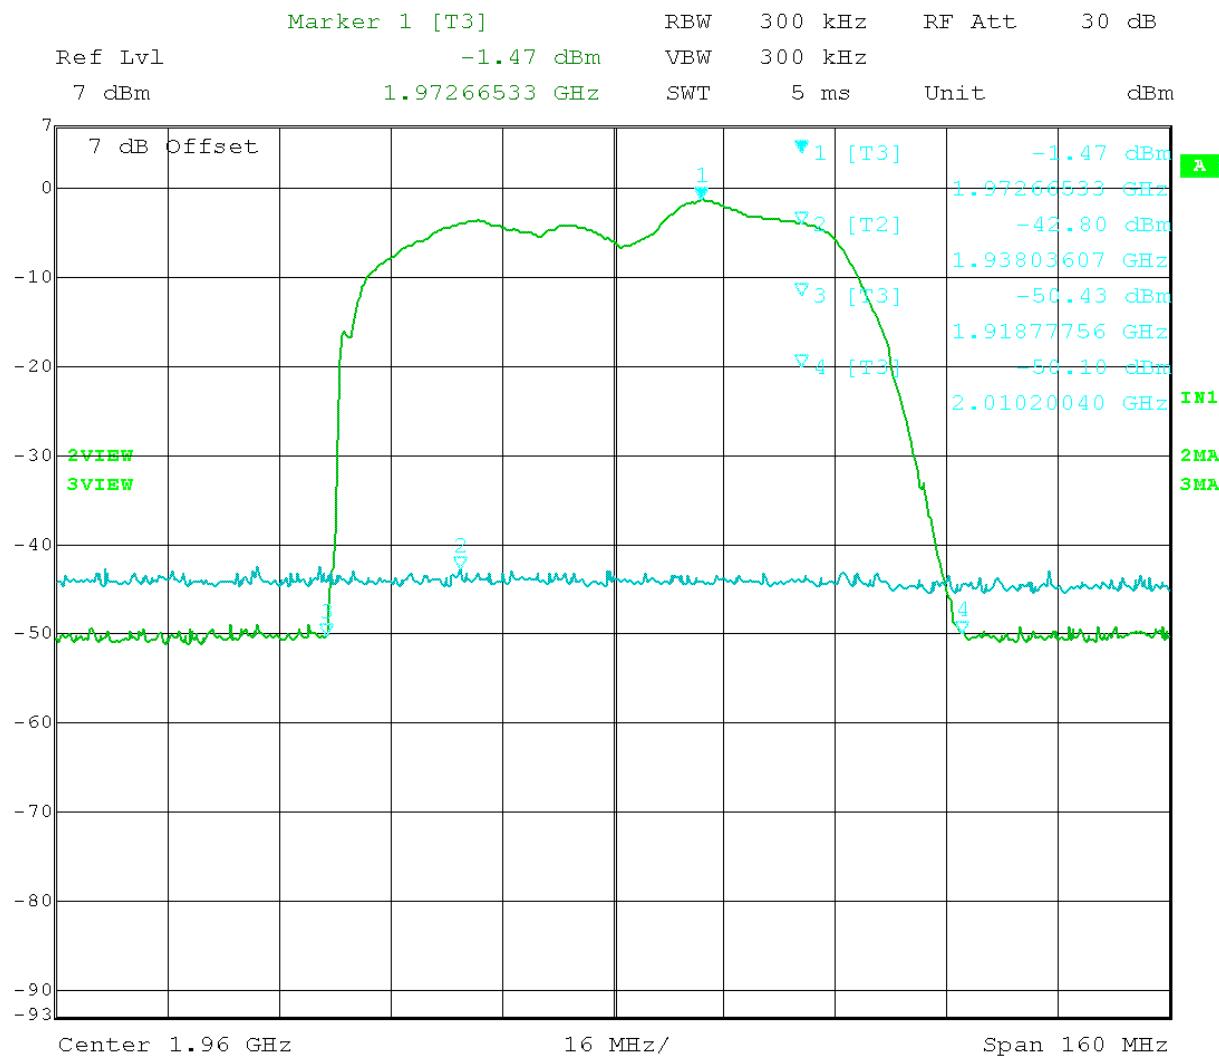

Date: 22.APR.2009 11:07:10

Figure 49: Passband Gain and Bandwidth (downlink 1900 MHz)