



TEST AND MEASUREMENT REPORT

For

Wilson Electronics, Inc.

3301 East Deseret Drive,
St. George, Utah 84790, USA

FCC ID: PWO271865
Model: 271865

Report Type: Original Report	Product Type: LTE Signal Booster
Test Engineer: <u>Quinn Jiang</u> 	
Report Number: <u>R1106171-27B</u>	
Report Date: <u>2012-04-10</u>	
Reviewed By: <u>EMC/RF Lead</u>  Victor Zhang	
Prepared By: Bay Area Compliance Laboratories Corp. (91) 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" ...

TABLE OF CONTENTS

- 1 GENERAL INFORMATION4**
 - 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....5
 - 1.2 MECHANICAL DESCRIPTION5
 - 1.3 OBJECTIVE.....5
 - 1.4 RELATED SUBMITTAL(S)/GRANT(S).....5
 - 1.5 TEST METHODOLOGY6
 - 1.6 MEASUREMENT UNCERTAINTY.....6
 - 1.7 TEST FACILITY.....6
- 2 SYSTEM TEST CONFIGURATION7**
 - 2.1 JUSTIFICATION.....7
 - 2.2 EUT EXERCISE SOFTWARE.....7
 - 2.3 EQUIPMENT MODIFICATIONS7
 - 2.4 LOCAL SUPPORT EQUIPMENT AND SOFTWARE LIST AND DETAILS7
 - 2.5 INTERNAL CONFIGURATIONS OF EUT.....7
 - 1.8 EUT POWER SUPPLY INFORMATION.....7
 - 2.6 INTERFACE PORTS AND CABLES8
 - 2.7 TEST SETUP BLOCK DIAGRAM.....8
- 3 SUMMARY OF TEST RESULTS.....10**
- 4 FCC §2.1046 & §27.50 – RF OUTPUT POWER..... 11**
 - 4.1 APPLICABLE STANDARD 11
 - 4.2 TEST PROCEDURE 11
 - 4.3 TEST EQUIPMENT LIST AND DETAILS 11
 - 4.4 TEST ENVIRONMENTAL CONDITIONS..... 11
 - 4.5 TEST RESULTS 12
- 5 FCC §2.1047 - MODULATION CHARACTERISTIC..... 14**
 - 5.1 APPLICABLE STANDARD 14
 - 5.2 TEST RESULT 14
- 6 FCC §2.1049 & §27.53 - OCCUPIED BANDWIDTH 15**
 - 6.1 APPLICABLE STANDARD 15
 - 6.2 TEST PROCEDURE 15
 - 6.3 TEST EQUIPMENT LIST AND DETAILS 15
 - 6.4 TEST ENVIRONMENTAL CONDITIONS..... 15
 - 6.5 TEST RESULTS 16
- 7 FCC §2.1053 & §27.53 - SPURIOUS RADIATED EMISSIONS..... 41**
 - 7.1 APPLICABLE STANDARD 41
 - 7.2 TEST PROCEDURE 41
 - 7.3 TEST EQUIPMENT LIST AND DETAILS 41
 - 7.4 TEST ENVIRONMENTAL CONDITIONS..... 42
 - 7.5 SUMMARY OF TEST RESULTS..... 42
 - 7.6 TEST RESULTS 43
- 8 FCC §2.1051 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 44**
 - 8.1 APPLICABLE STANDARD 44
 - 8.2 TEST PROCEDURE 44
 - 8.3 TEST EQUIPMENT LIST AND DETAILS 44
 - 8.4 TEST ENVIRONMENTAL CONDITIONS..... 44
 - 8.5 TEST RESULTS 44
- 9 FCC §27.53 – BAND EDGE..... 53**
 - 9.1 APPLICABLE STANDARD 53

9.2	TEST PROCEDURE	53
9.3	TEST EQUIPMENT LIST AND DETAILS	53
9.4	TEST ENVIRONMENTAL CONDITIONS	53
9.5	TEST RESULTS	53
10	FCC §2.1055 & §27.54 – FREQUENCY STABILITY.....	78
10.1	APPLICABLE STANDARD	78
10.2	TEST PROCEDURE	78
10.3	TEST RESULTS	78
11	FCC §1.1307(B) & §27.52 & §2.1091 - RF EXPOSURE INFORMATION.....	79
11.1	APPLICABLE STANDARD	79
11.2	MPE PREDICTION	79
12	EXHIBIT A - FCC ID LABEL REQUIREMENTS.....	80
12.1	FCC ID LABEL REQUIREMENT	80
12.2	FCC ID LABEL CONTENTS	80
12.3	FCC LABEL LOCATION ON EUT	80
13	EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	81
13.1	RADIATED EMISSIONS - FRONT VIEW	81
13.2	RADIATED EMISSIONS 30 MHZ TO 1 GHZ- REAR VIEW.....	81
13.3	RADIATED EMISSIONS ABOVE 1 GHZ- REAR VIEW	82
13.4	CONDUCTED MEASUREMENT VIEW	82
14	EXHIBIT C - EUT PHOTOGRAPHS	83
14.1	EUT - TOP VIEW.....	83
14.2	EUT - SIDE VIEW 1	83
14.3	EUT - SIDE VIEW 2.....	84
14.4	EUT – INSIDE ANTENNA PORT VIEW	84
14.5	EUT – OUTSIDE ANTENNA PORT VIEW	85
14.6	EUT - BOTTOM VIEW	85
14.7	EUT – COVER OFF VIEW.....	86
14.8	EUT – COVER OFF CLOSE UP VIEW	86
14.9	EUT – MAIN PCB BOARD FRONT VIEW	87
14.10	EUT – MAIN PCB BOARD REAR VIEW.....	87
14.11	AC/DC POWER SUPPLY VIEW	88

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1106171-27	Original Report	2011-08-16
1	R1106171-27A	Updated Label drawing	2011-10-03
2	R1106171-27B	Updated report data	2012-04-10

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Wilson Electronics, Inc.*, and their product, *FCC ID: PWO271865*, model: *271865*, which will henceforth be referred to as the EUT “Equipment Under Test”. The EUT is an LTE Signal Booster. 50 Ω N-type connectors are used for connecting to both the inside and outside antenna connections of the amplifier. The downlink frequency range is 746 MHz to 757 MHz. The uplink frequency range is 776 MHz to 787 MHz. The amplifier contains a microcontroller which controls the gain. The self-generated clock frequency of the microcontroller is 16 MHz. The modulation type is OFDMA.

Technical Specification

Modulation	Frequency (MHz)	
	Downlink	Uplink
LTE	746-757	776-787

1.2 Mechanical Description

The EUT Approximate measurement is: 155 mm (L) x 100 mm (W) x 30 mm (H). Weight: 586 g.

The test data gathered are from production sample, serial number: 801865C1011733557, provided by the manufacturer.

1.3 Objective

This type approval report is prepared on behalf of *Wilson Electronics, Inc.* in accordance with Part 2, Subpart J, and Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, band edge, and conducted and radiated margin.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 27 - Miscellaneous Wireless Communications Services
Applicable Standards: TIA/EIA-603-C, ANSI C63.4-2003.

All radiated and conducted emission measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-3729, C-4176, G-469, and T-1206. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is a National Institute of Standards and Technology (NIST) accredited laboratory under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2001670.htm>

2 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

N/A, signal was sent through EUT using a signal generator, device was set to normal operating mode.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Local Support Equipment and Software List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746
Dell	Laptop	Latitude D600	CN-0X2034-48643-3A6-8307
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309
Agilent	Signal Studio for 3GPP LTE	N7624B	-

2.5 Internal Configurations of EUT

Manufacturer	Description	Model	Serial Number
Wilson Electronics, Inc.	Main PCB Board	PCB-801865 REV C	-

1.8 EUT Power Supply Information


Manufacturer	Description	Model	Serial Number
Jentec Technology Co., Ltd.	AC/DC Power Adapter	AF1806-B	32LCP9

2.6 Interface Ports and Cables


Cable Description	Length (m)	To	From
RF Cable	< 1	EUT	Spectrum Analyzer
RF Cable	< 1	EUT	Signal Generator

2.7 Test Setup Block Diagram

Antenna Port Conducted Testing

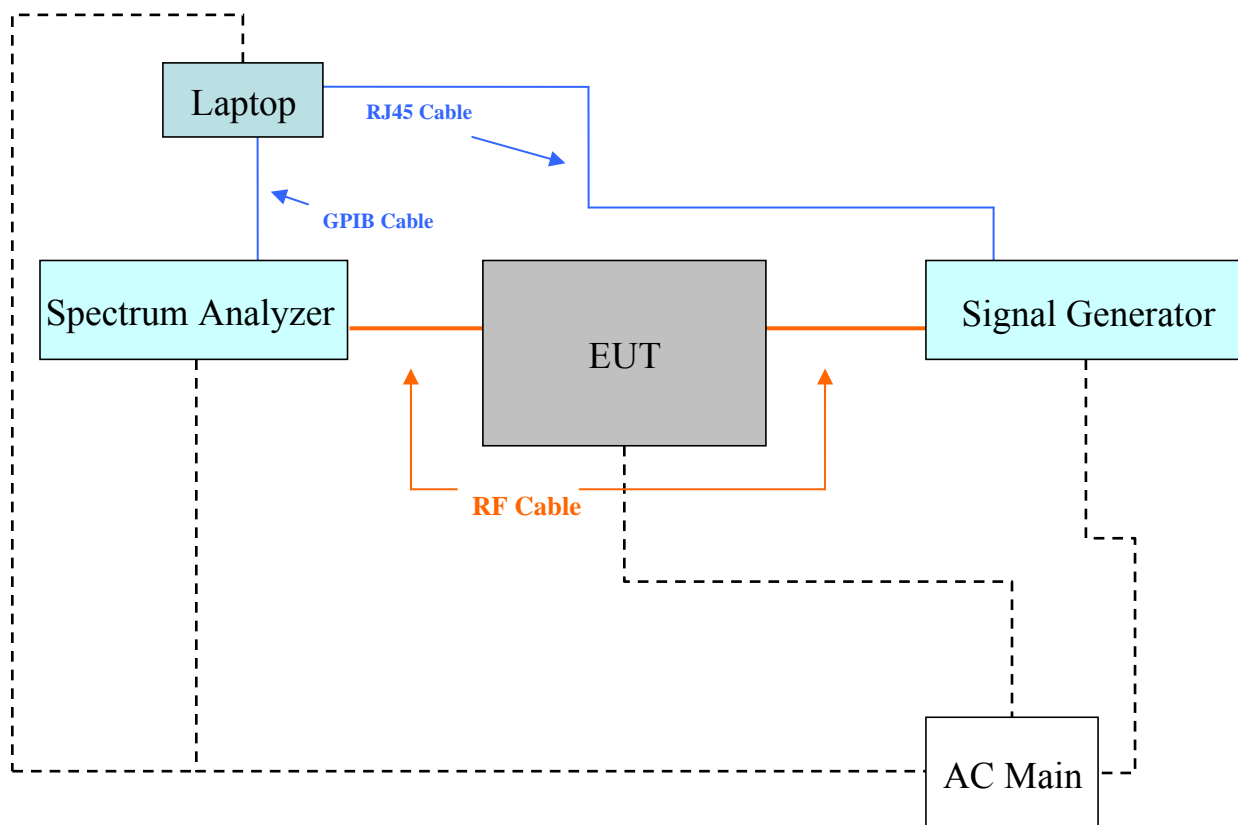

Radiated Emissions Testing

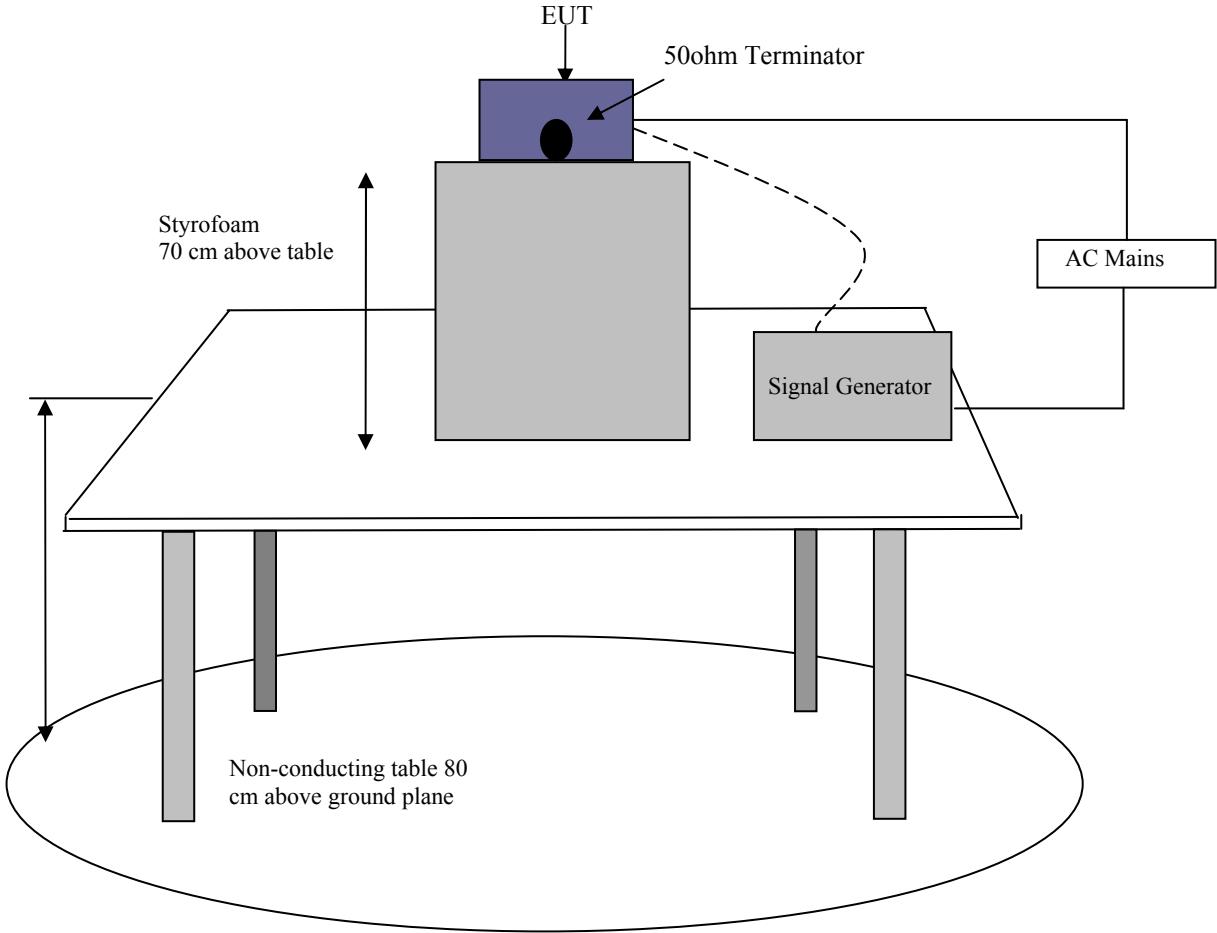

3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§2.1046, §27.50(b)	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A ¹
§2.1049, §27.53 (c)	Occupied Bandwidth	Compliant
§2.1053, §27.53 (c)	Spurious Radiated Emissions	Compliant
§2.1051, §27.53 (c)	Spurious Emissions at Antenna Terminals	Compliant
§27.53 (c)(g)	Band Edge	Compliant
§2.1055, §27.54	Frequency Stability	Note ¹
§2.1091, §27.52	RF Exposure Information	Compliant

1) Note: EUT is a signal booster.

4 FCC §2.1046 & §27.50 – RF OUTPUT POWER

4.1 Applicable Standard

According to FCC §27.50, the maximum effective radiated power (ERP) of fixed and base station must not exceed 1000 Watts.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

4.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	40-48 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-22 to 2011-06-24 at RF Site.

4.5 Test Results

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
LTE Downlink 746-757 MHz	QPSK (1.4 MHz)	747	-48.4	24.20
	QPSK (1.4 MHz)	752	-48.4	21.60
	QPSK (1.4 MHz)	756	-45.4	21.43
	16QAM (1.4 MHz)	747	-48.4	24.08
	16QAM (1.4 MHz)	752	-48.4	21.82
	16QAM (1.4 MHz)	756	-45.4	21.56
	64QAM (1.4 MHz)	747	-48.4	24.06
	64QAM (1.4 MHz)	752	-48.4	21.83
	64QAM (1.4 MHz)	756	-45.4	21.58
	QPSK (3 MHz)	748	-47.4	25.30
	QPSK (3 MHz)	752	-47.4	23.22
	QPSK (3 MHz)	755	-45	22.60
	16QAM (3 MHz)	748	-47.4	25.41
	16QAM (3 MHz)	752	-47.4	23.20
	16QAM (3 MHz)	755	-45	22.65
	64QAM (3 MHz)	748	-47.2	25.40
	64QAM (3 MHz)	752	-47.6	23.14
	64QAM (3 MHz)	755	-45	22.55
	QPSK (5 MHz)	749	-46.8	25.38
	QPSK (5 MHz)	754	-46.6	22.88
	16QAM (5 MHz)	749	-46.8	25.40
	16QAM (5 MHz)	754	-46.6	22.9
	64QAM (5 MHz)	749	-46.8	25.51
	64QAM (5 MHz)	754	-46.8	22.97
QPSK (10 MHz)	752	-46	24.94	
16QAM (10 MHz)	752	-46	25.02	
64QAM (10 MHz)	752	-46	24.93	

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
LTE Uplink 776-787 MHz	QPSK (1.4 MHz)	777	-44	25.87
	QPSK (1.4 MHz)	782	-41.8	27.78
	QPSK (1.4 MHz)	786	-42.8	27.87
	16QAM (1.4 MHz)	777	-44.2	25.75
	16QAM (1.4 MHz)	782	-42	27.50
	16QAM (1.4 MHz)	786	-43.2	27.55
	64QAM (1.4 MHz)	777	-44.4	25.50
	64QAM (1.4 MHz)	782	-42.2	27.22
	64QAM (1.4 MHz)	786	-43.2	27.34
	QPSK (3 MHz)	778	-43.6	26.63
	QPSK (3 MHz)	782	-41.4	28.24
	QPSK (3 MHz)	785	-41.6	28.65
	16QAM (3 MHz)	778	-44	26.24
	16QAM (3 MHz)	782	-41.8	27.64
	16QAM (3 MHz)	785	-42	28.27
	64QAM (3 MHz)	778	-44	26.14
	64QAM (3 MHz)	782	-42	27.55
	64QAM (3 MHz)	785	-42	28.18
	QPSK (5 MHz)	779	-42.8	26.98
	QPSK (5 MHz)	784	-41.2	28.67
	16QAM (5 MHz)	779	-43.2	26.50
	16QAM (5 MHz)	784	-41.6	28.22
	64QAM (5 MHz)	779	-43.4	26.32
	64QAM (5 MHz)	784	-41.6	28.19
	QPSK (10 MHz)	782	-41.6	28.10
	16QAM (10 MHz)	782	-41.6	28.01
	64QAM (10 MHz)	782	-41.6	27.97

5 FCC §2.1047 - MODULATION CHARACTERISTIC

5.1 Applicable Standard

According to FCC §2.1047(d) and Part 27, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

5.2 Test Result

N/A

6 FCC §2.1049 & §27.53 - OCCUPIED BANDWIDTH

6.1 Applicable Standard

Requirements: FCC §2.1049 and §27.53.

6.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 kHz and the 26 dB & 99% bandwidth was recorded.

6.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	40-48 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-22 to 2011-06-24 at RF Site

6.5 Test Results

Occupied Bandwidth – Downlink

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Downlink 746-757 MHz	QPSK (1.4 MHz)	752	1.1630	1.1623
	16QAM (1.4 MHz)	752	1.1631	1.1657
	64QAM (1.4 MHz)	752	1.1625	1.1618
	QPSK (3 MHz)	752	2.7299	2.7364
	16QAM (3 MHz)	752	2.7314	2.7326
	64QAM (3 MHz)	752	2.7301	2.7353
	QPSK (5 MHz)	754	4.4994	4.4829
	16QAM (5 MHz)	754	4.5015	4.4841
	64QAM (5 MHz)	754	4.5019	4.4821
	QPSK (10 MHz)	752	8.9350	8.9008
	16QAM (10 MHz)	752	8.9329	8.8908
	64QAM (10 MHz)	752	8.9333	8.8983

Occupied Bandwidth – Uplink


Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Uplink 776-787 MHz	QPSK (1.4 MHz)	782	1.1483	1.1591
	16QAM (1.4 MHz)	782	1.1464	1.1584
	64QAM (1.4 MHz)	782	1.1466	1.1604
	QPSK (3 MHz)	782	2.7165	2.7197
	16QAM (3 MHz)	782	2.7176	2.7203
	64QAM (3 MHz)	782	2.7119	2.7189
	QPSK (5 MHz)	784	4.4754	4.4849
	16QAM (5 MHz)	784	4.4808	4.4922
	64QAM (5 MHz)	784	4.4792	4.4909
	QPSK (10 MHz)	782	8.9082	8.9271
	16QAM (10 MHz)	782	8.9110	8.9357
	64QAM (10 MHz)	782	8.9152	8.9327

Please refer to the following plots.


DL: 746 - 757 MHz

LTE-QPSK (1.4 MHz), Frequency: 752 MHz

Input

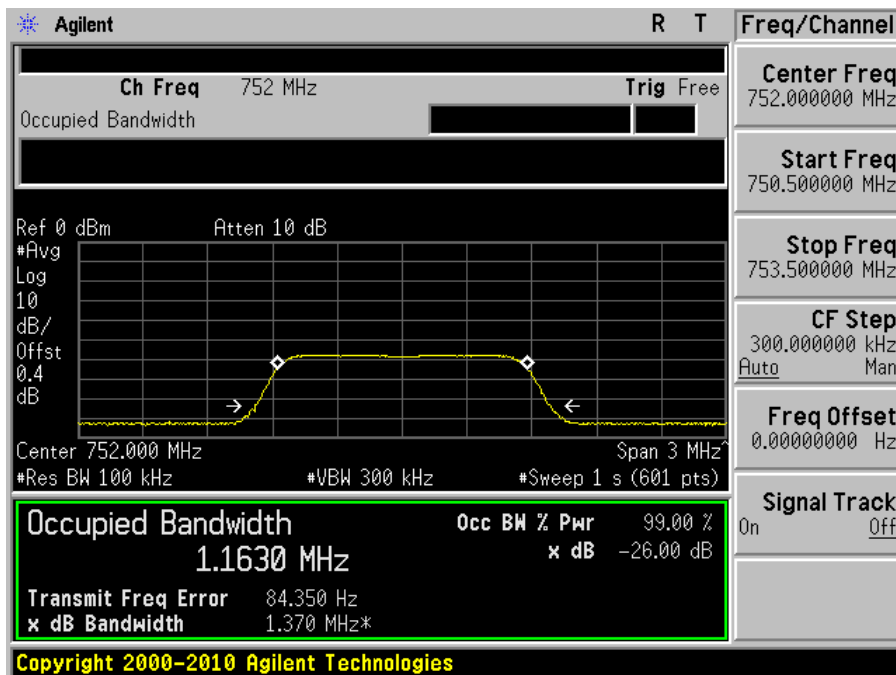


Output

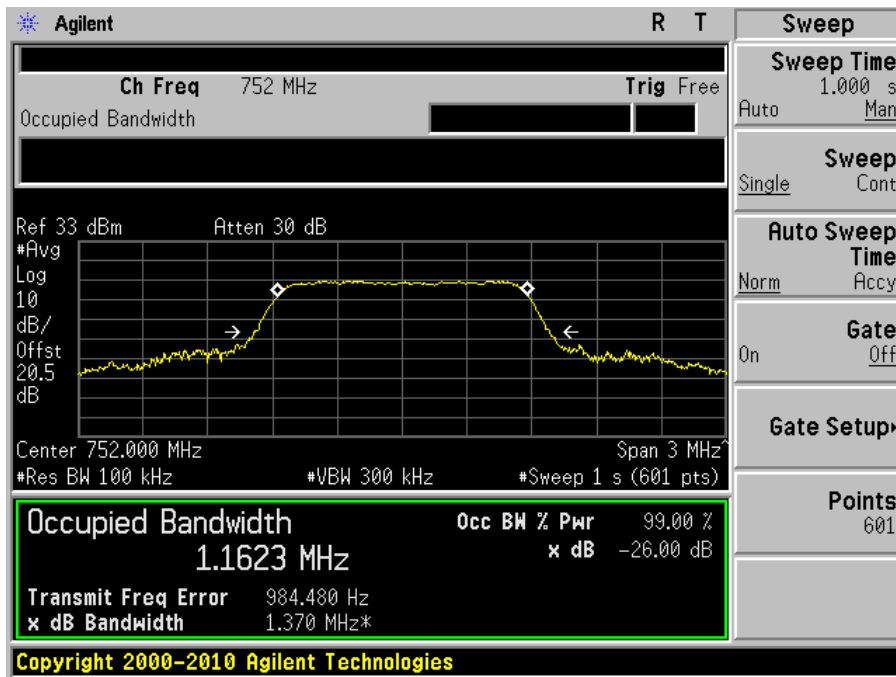


LTE-16QAM (1.4 MHz), Frequency: 752 MHz

Input

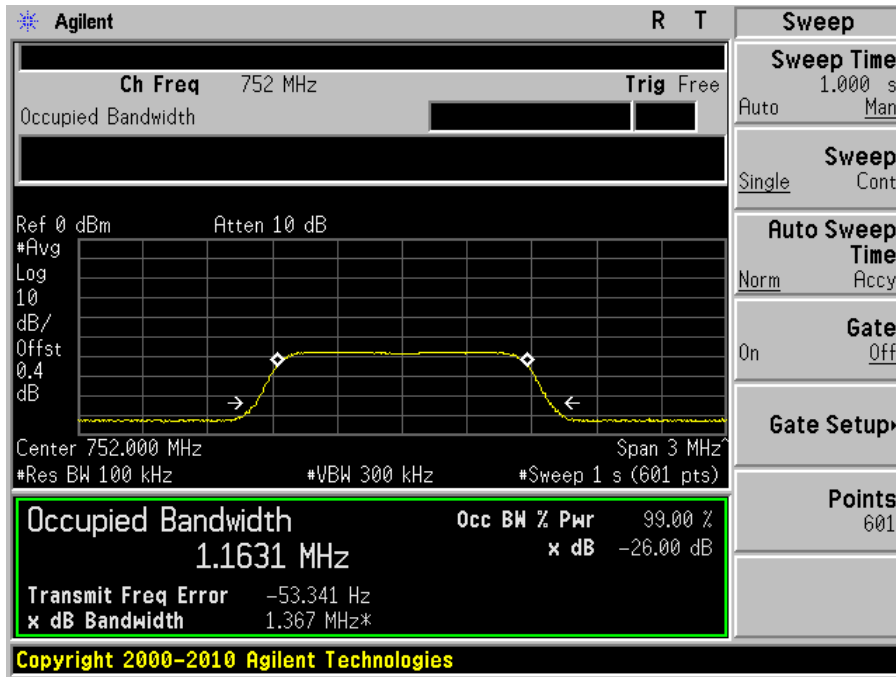


Output

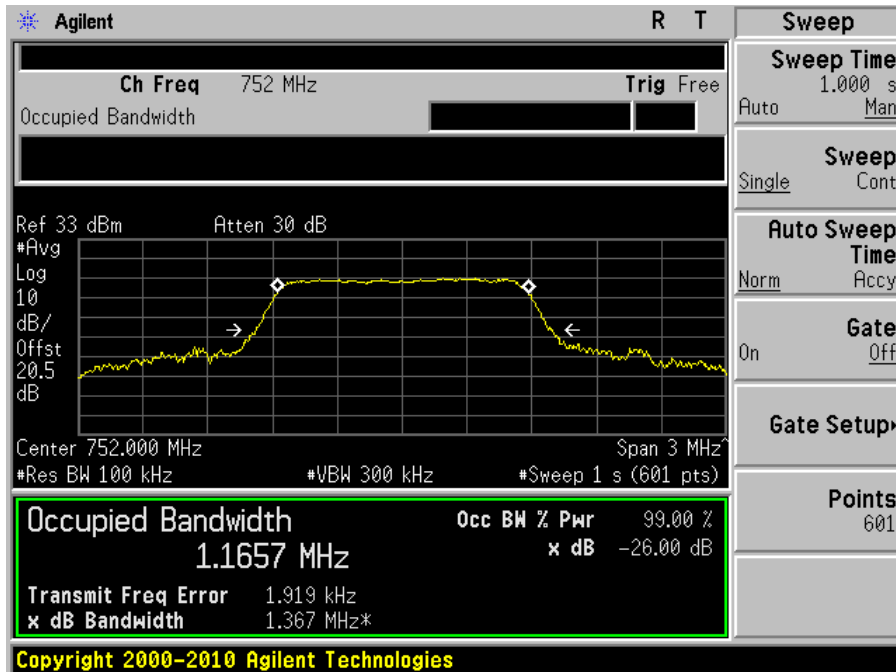


LTE-64QAM (1.4 MHz), Frequency: 752 MHz

Input

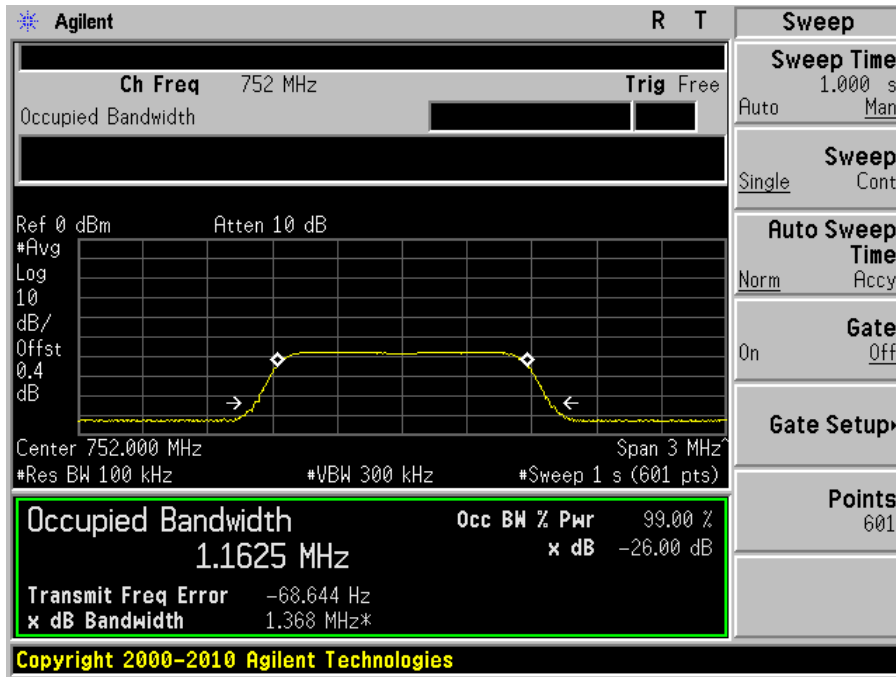


Output

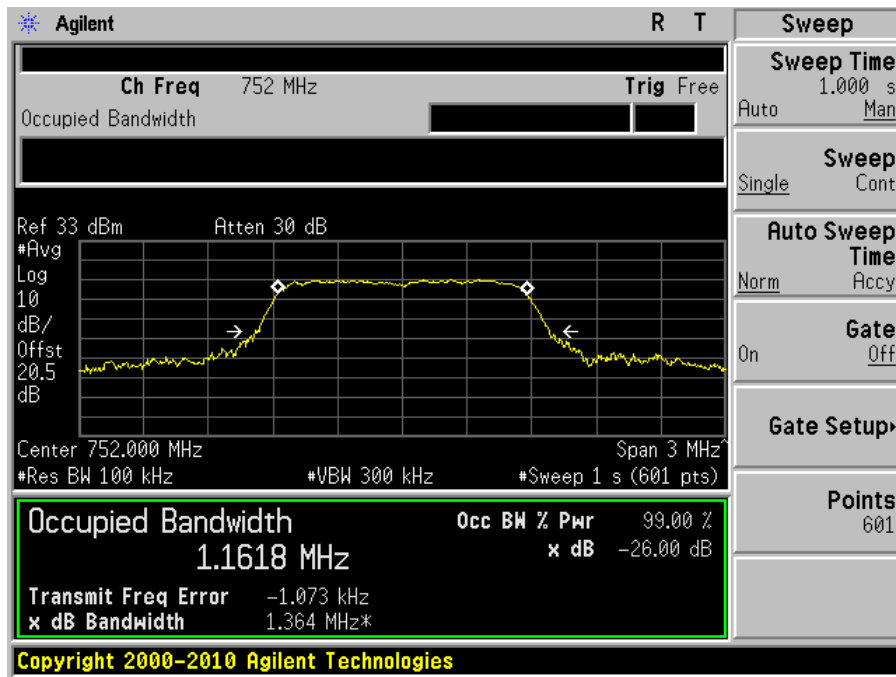


LTE-QPSK (3 MHz), Frequency: 752 MHz

Input

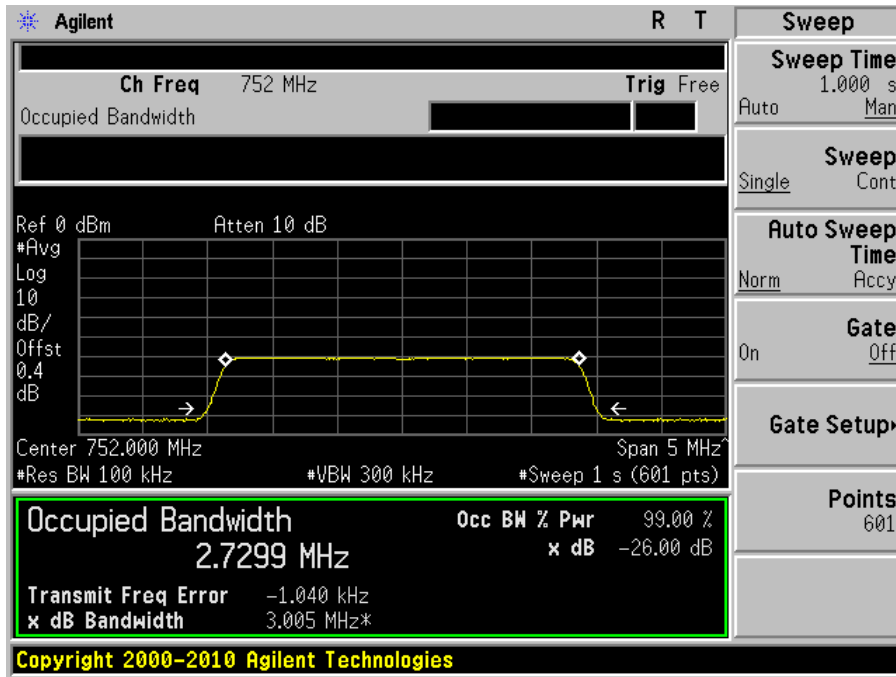


Output

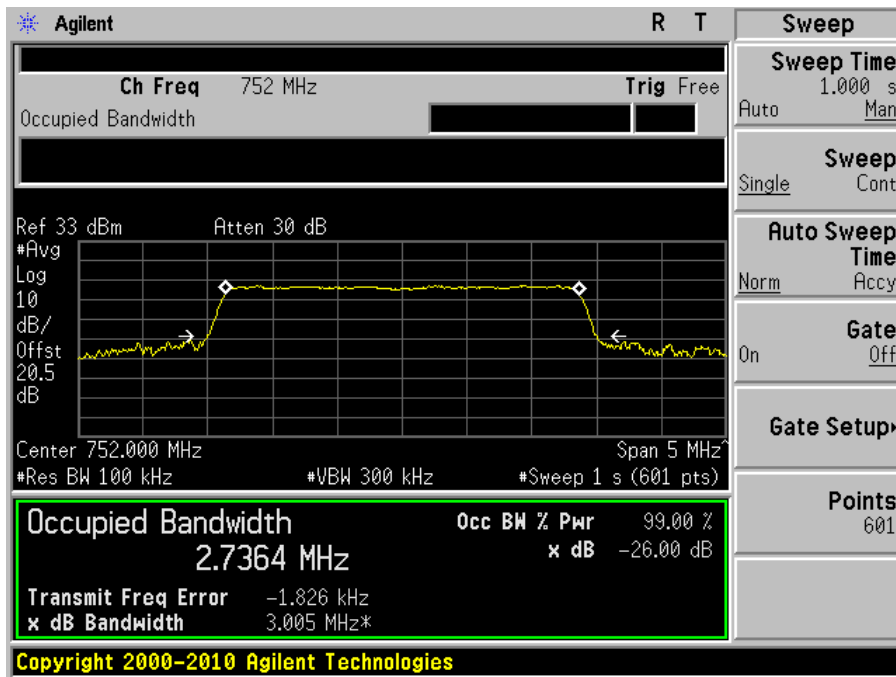


LTE-16QAM (3 MHz), Frequency: 752 MHz

Input

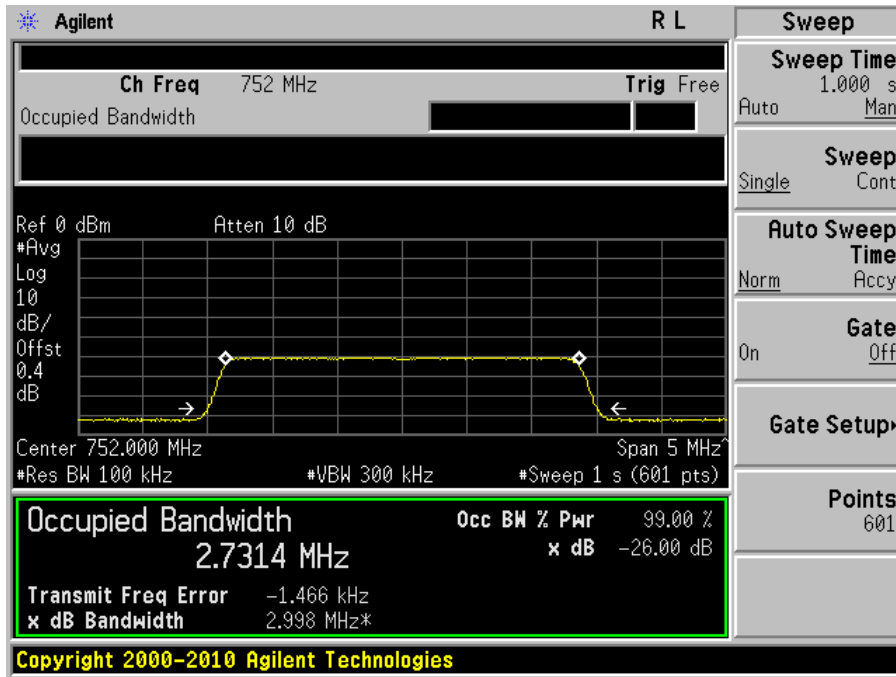


Output

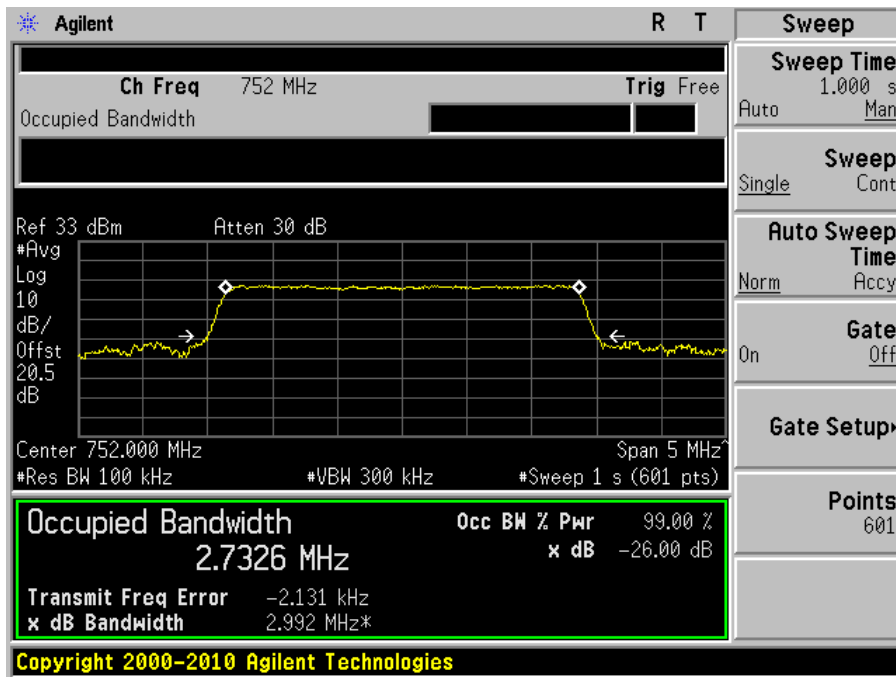


LTE-64QAM (3 MHz), Frequency: 752 MHz

Input

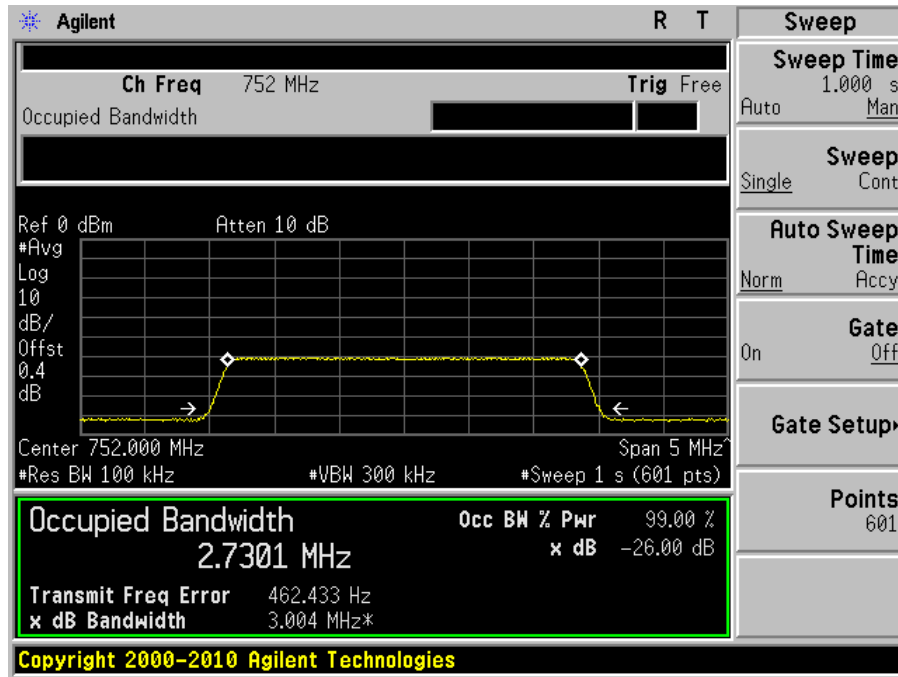


Output

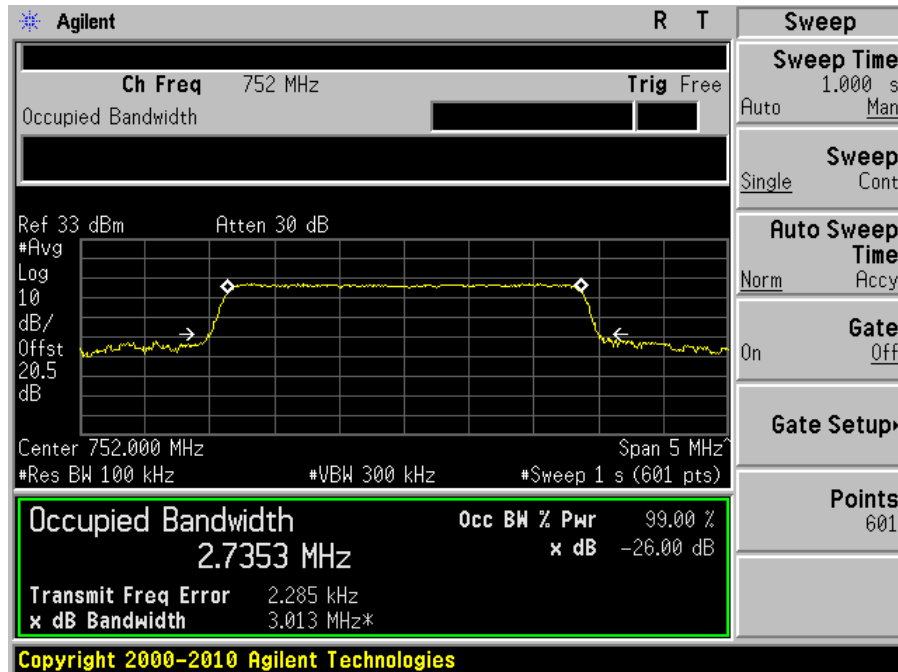


LTE-QPSK (5 MHz), Frequency: 754 MHz

Input

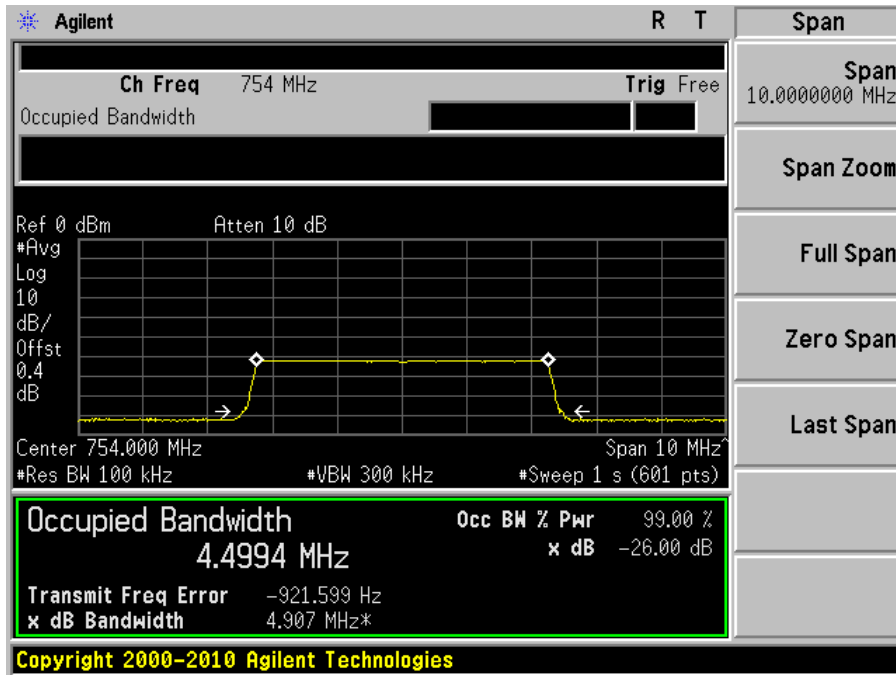


Output

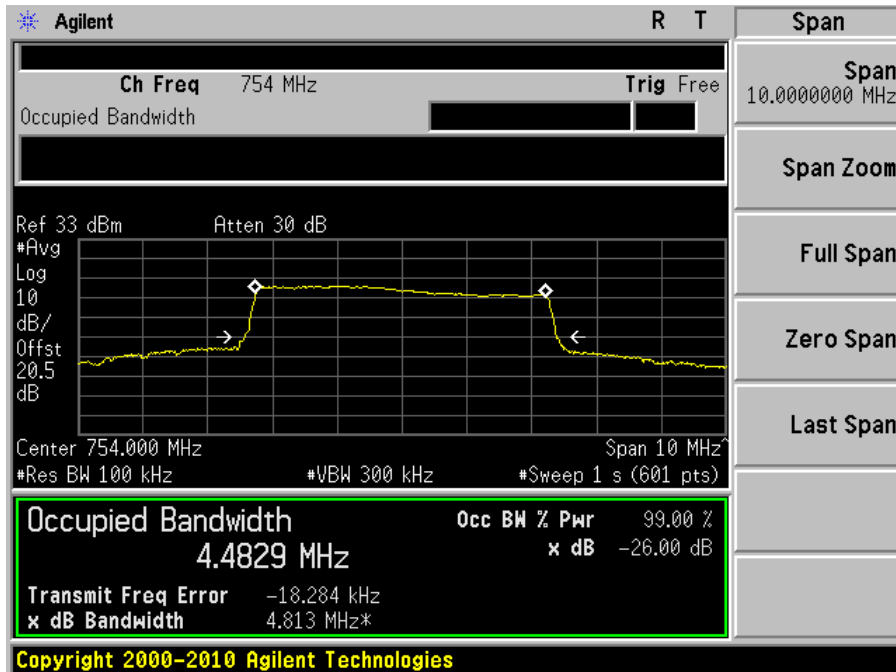


LTE-16QAM (5 MHz), Frequency: 754 MHz

Input

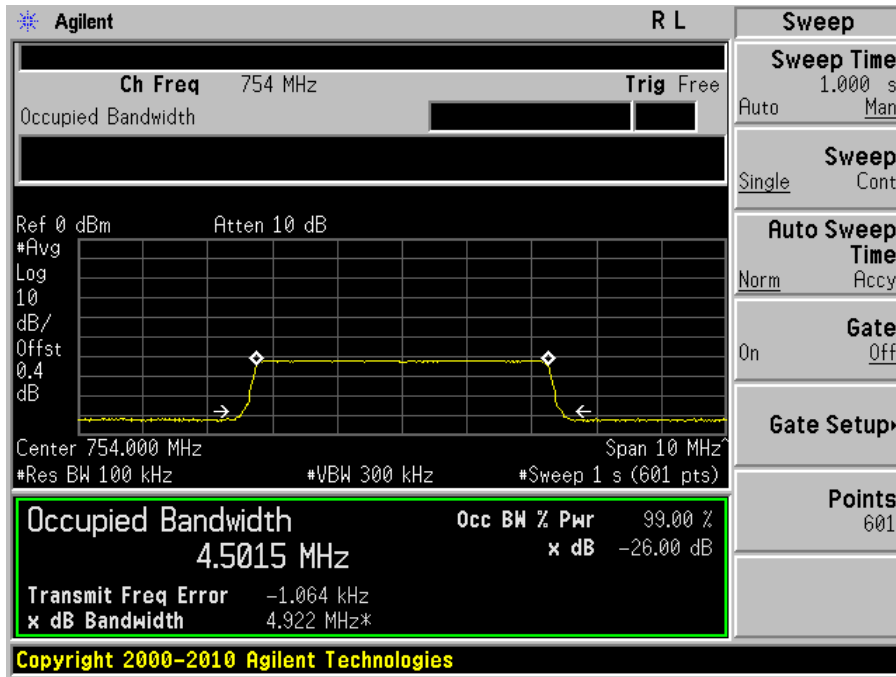


Output

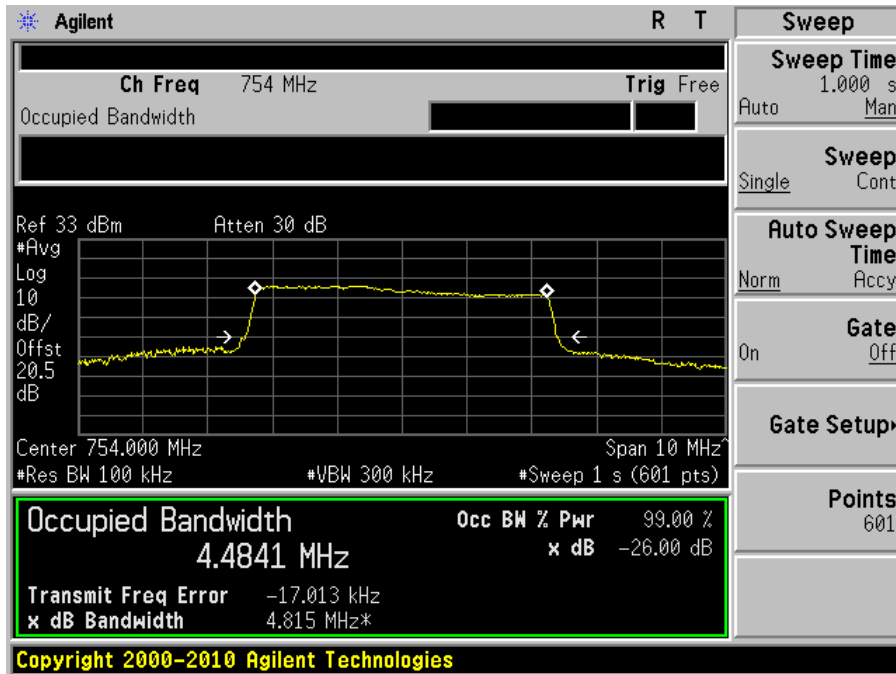


LTE-64QAM (5 MHz), Frequency: 754 MHz

Input

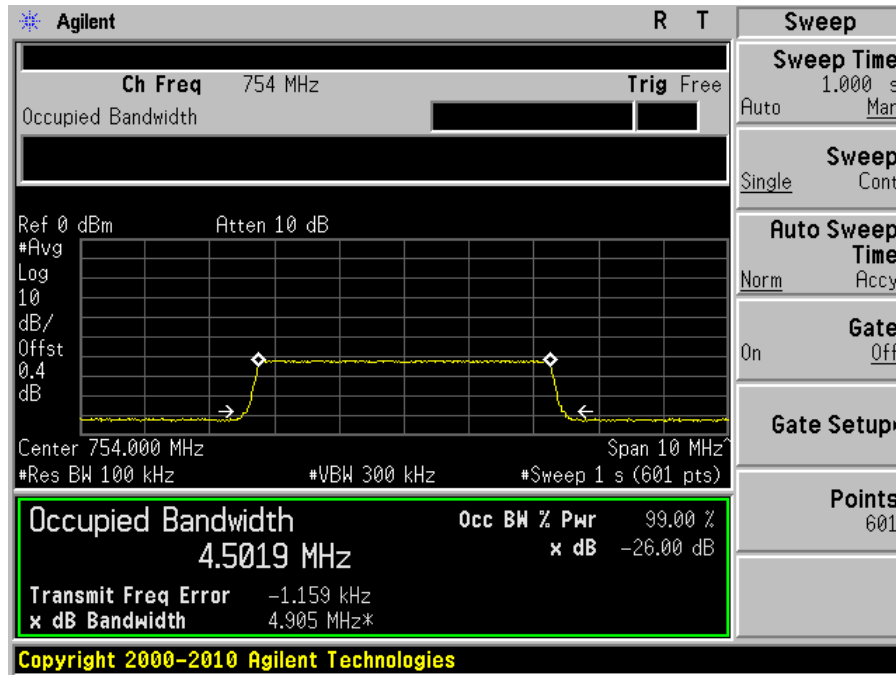


Output

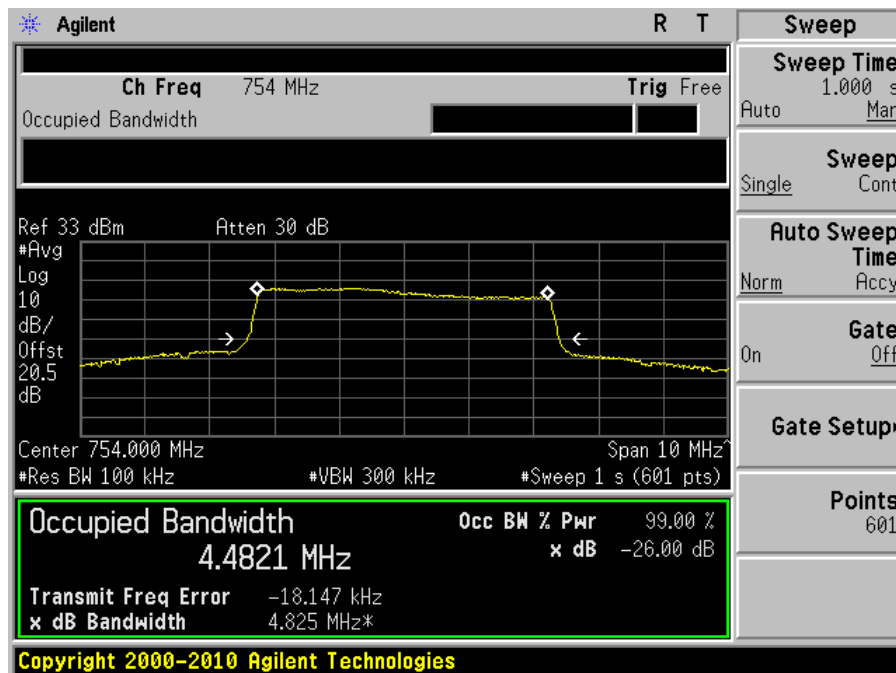


LTE-QPSK (10 MHz), Frequency: 752 MHz

Input

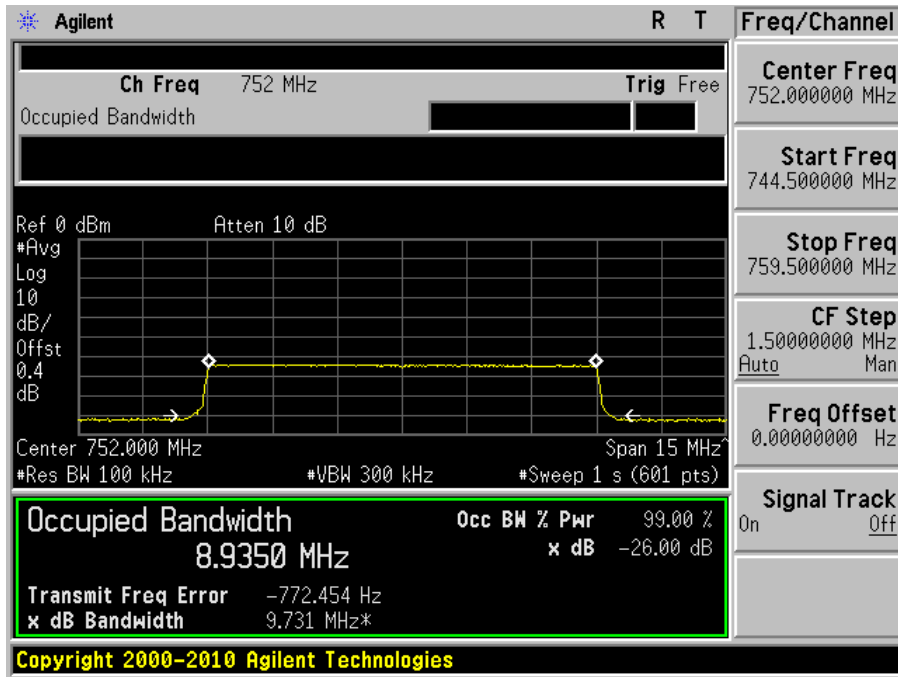


Output

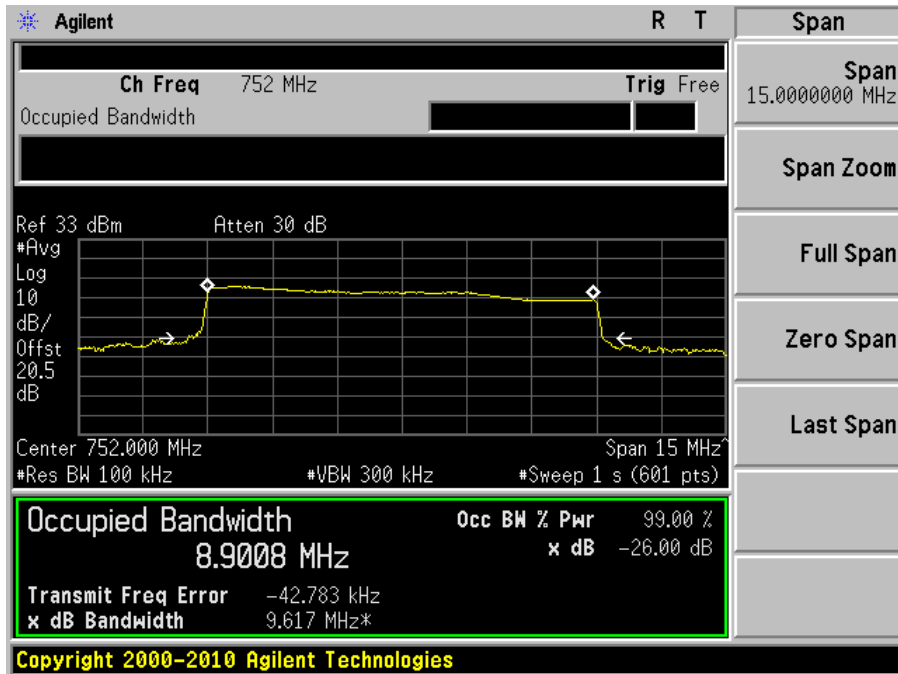


LTE-16QAM (10 MHz), Frequency: 752 MHz

Input

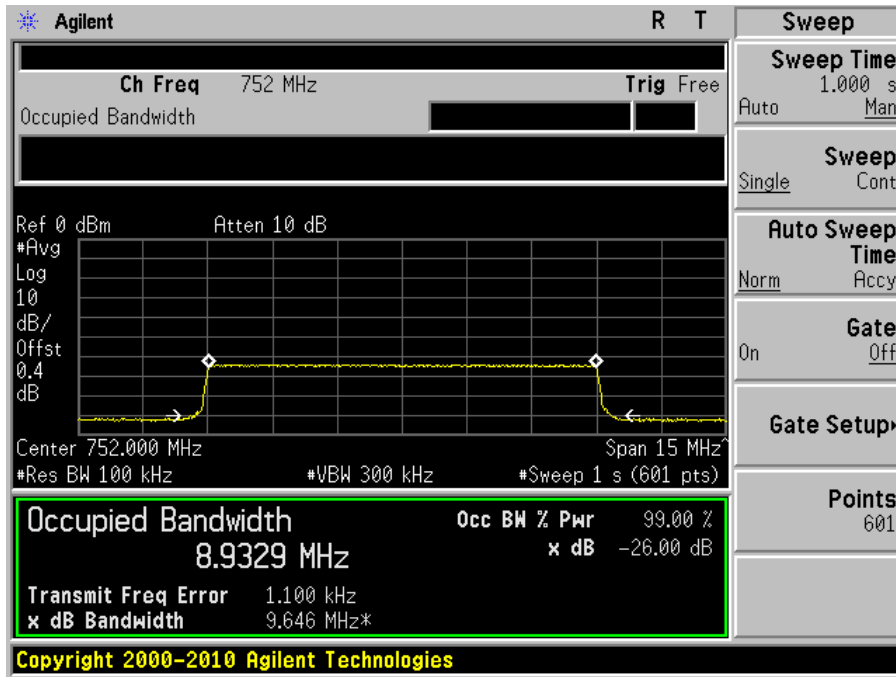


Output

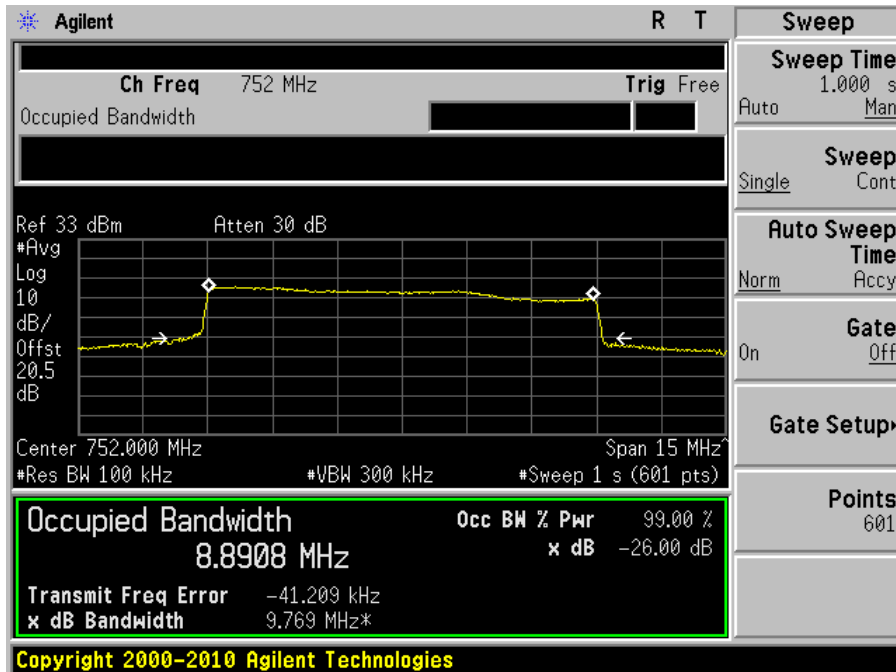


LTE-64QAM (10 MHz), Frequency: 752 MHz

Input

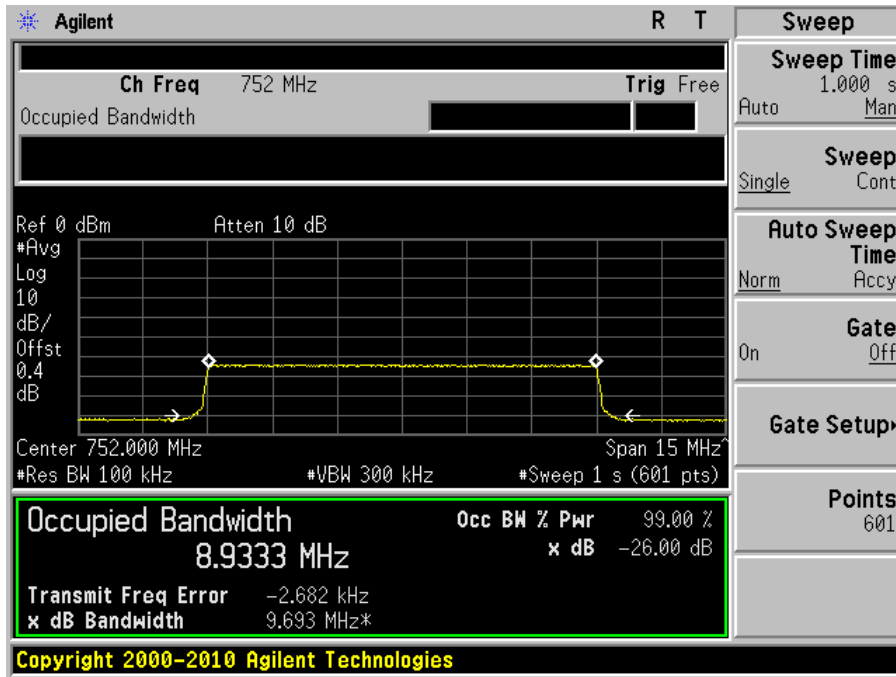


Output

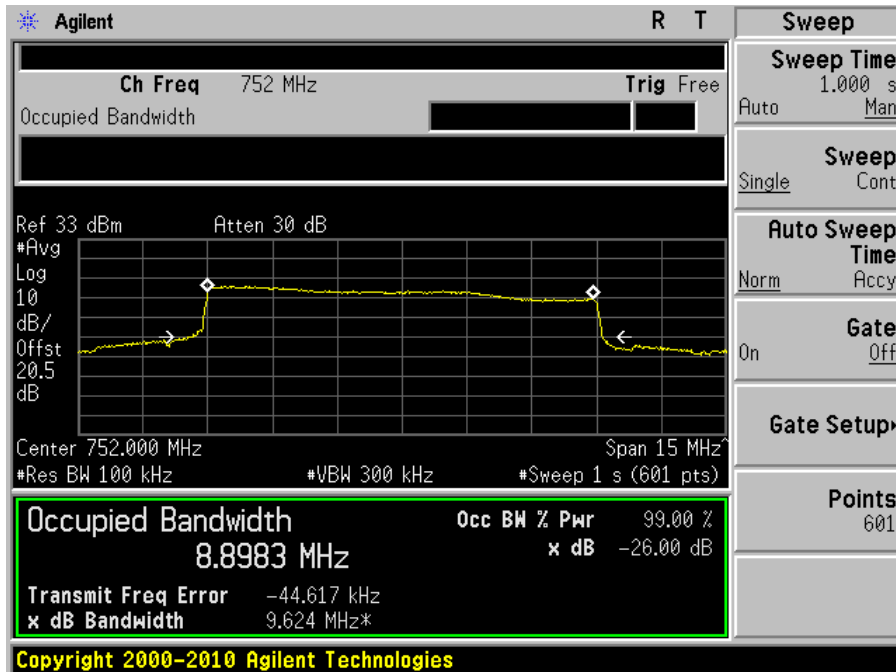


UL: 776 - 787 MHz

LTE-QPSK (1.4 MHz), Frequency: 782 MHz

Input

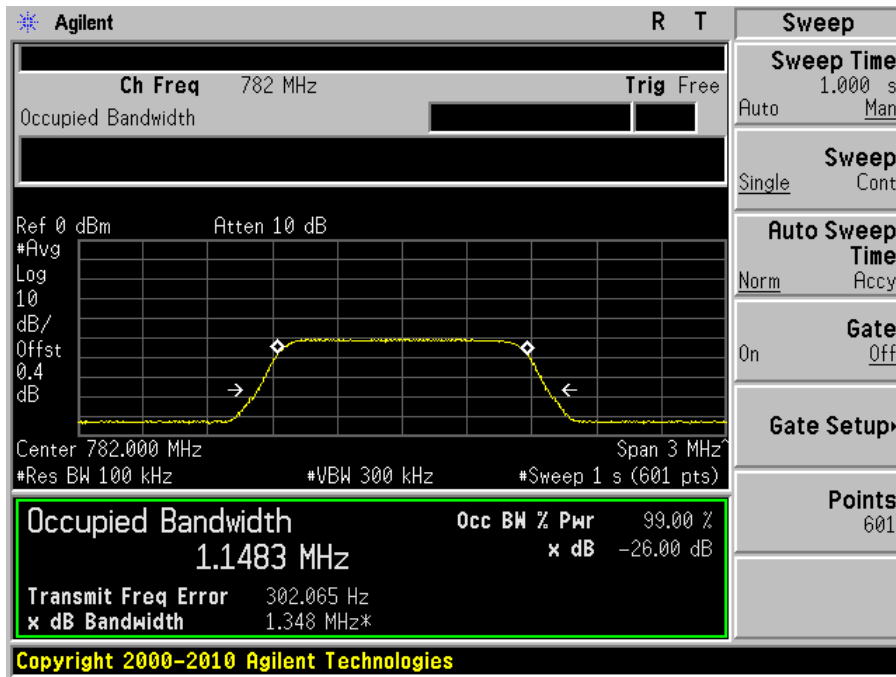


Output

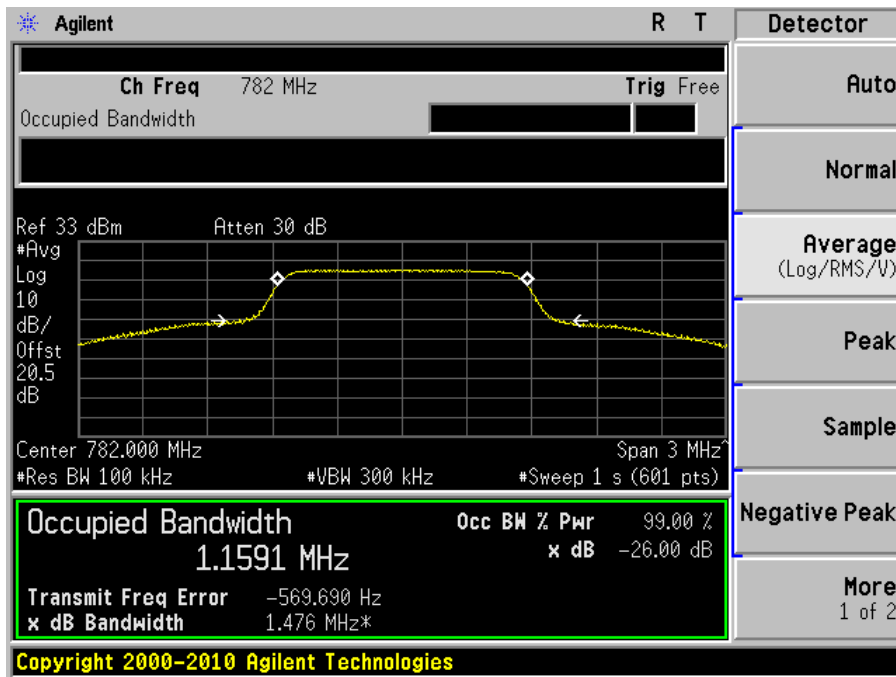


LTE-16QAM (1.4 MHz), Frequency: 782 MHz

Input

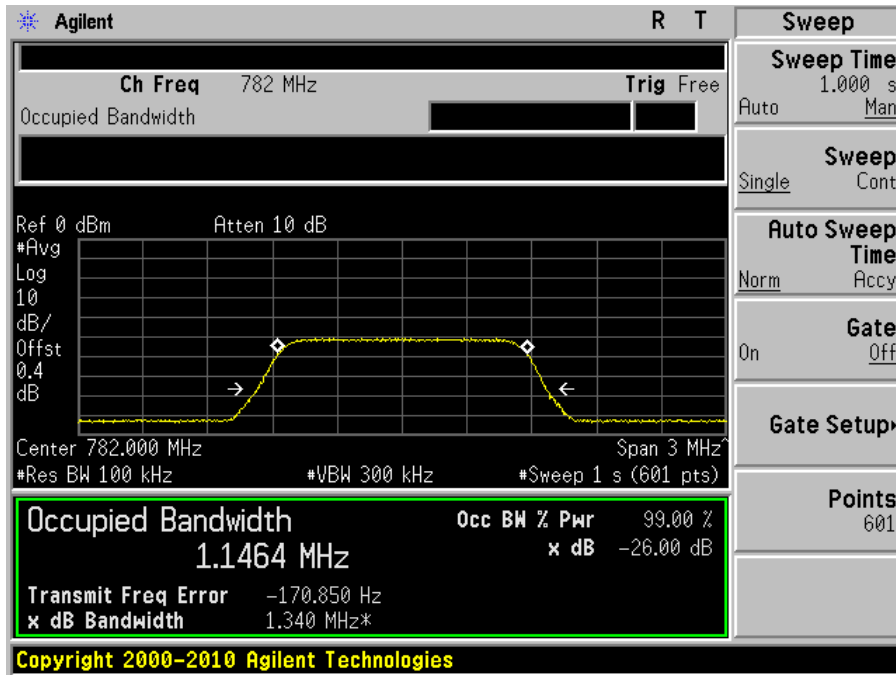


Output

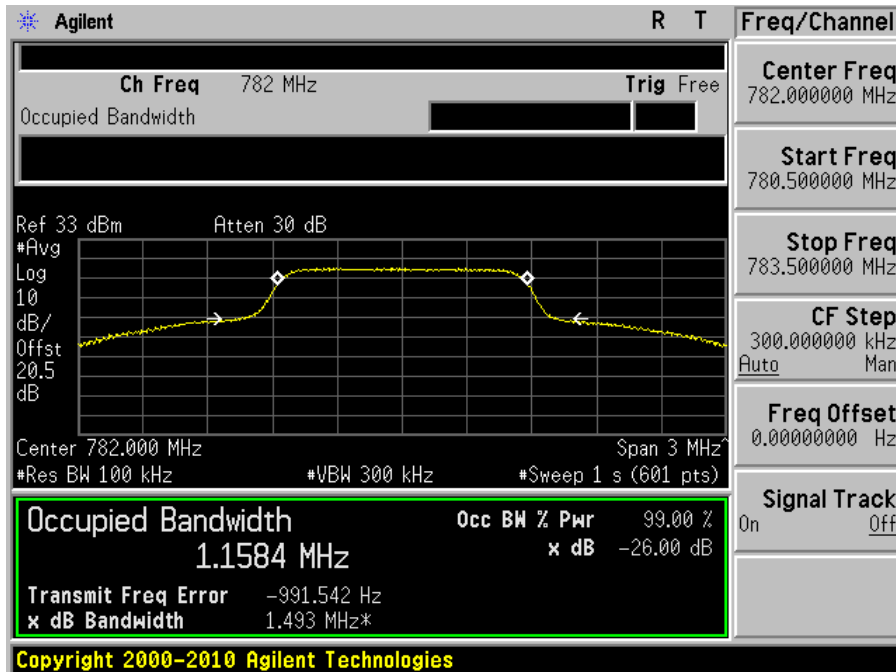


LTE-64QAM (1.4 MHz), Frequency: 782 MHz

Input

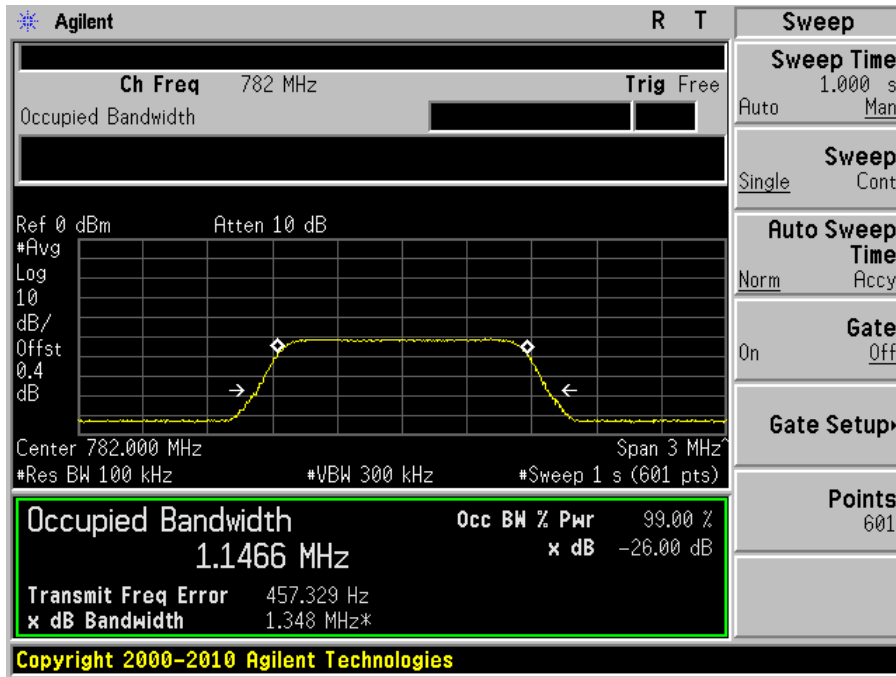


Output

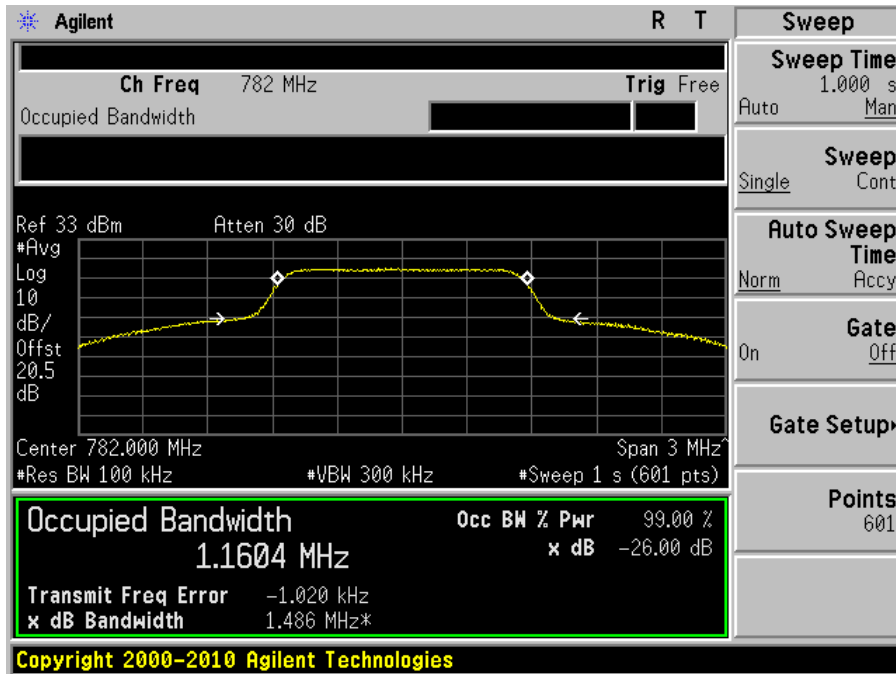


LTE-QPSK (3 MHz), Frequency: 782 MHz

Input

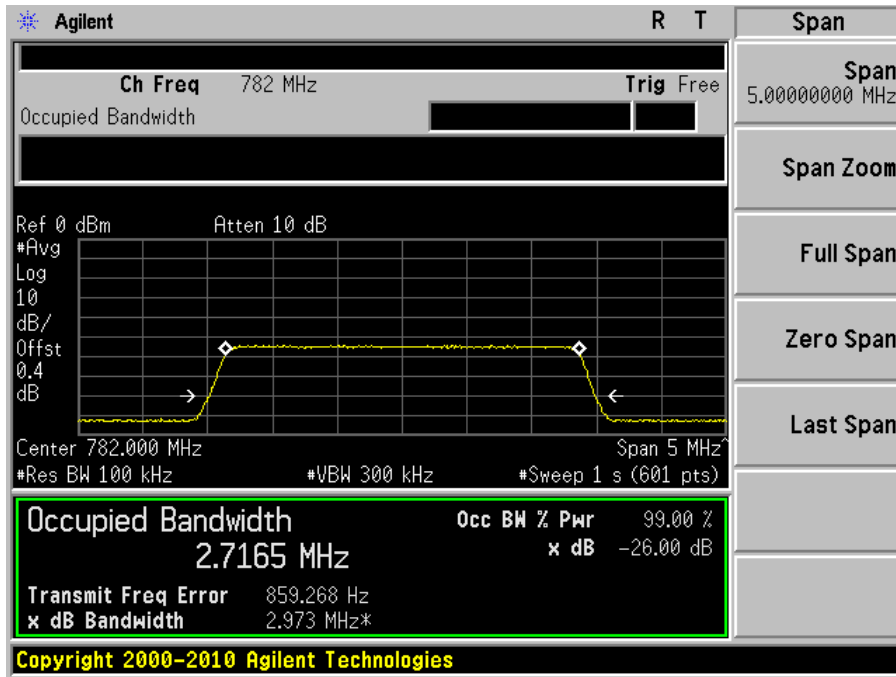


Output

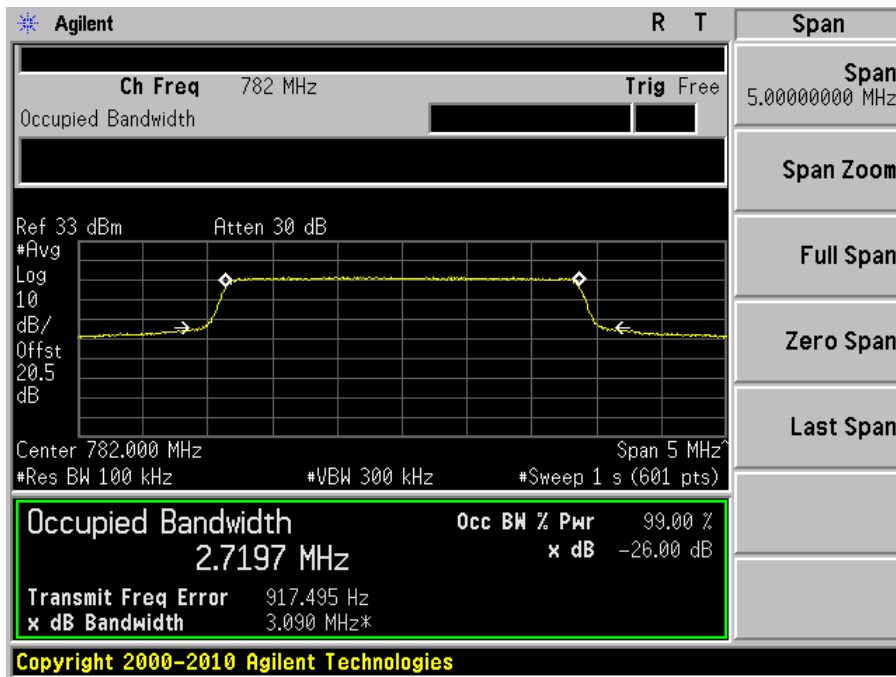


LTE-16QAM (3 MHz), Frequency: 782 MHz

Input

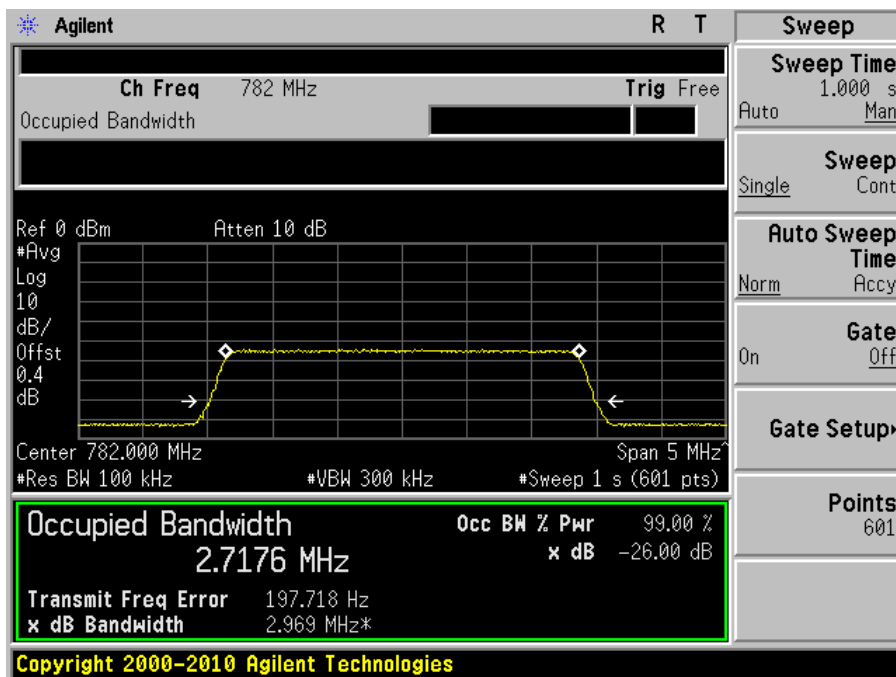


Output

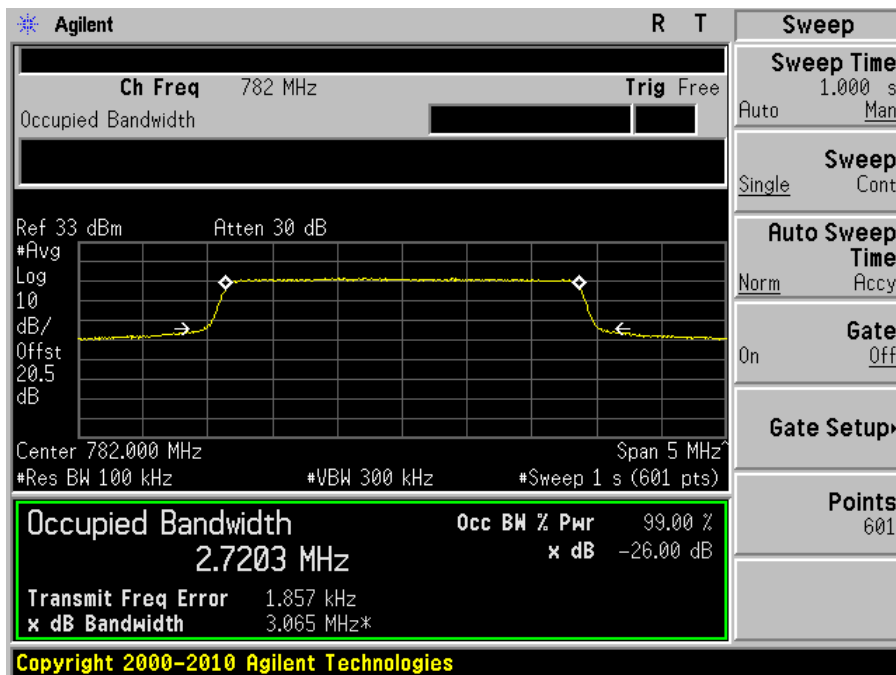


LTE-64QAM (3 MHz), Frequency: 782 MHz

Input

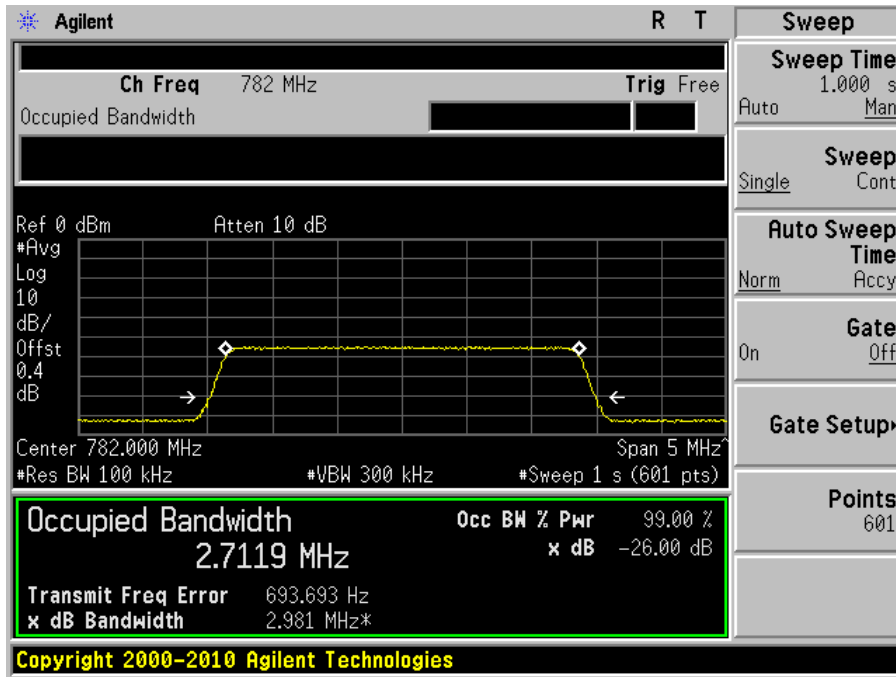


Output

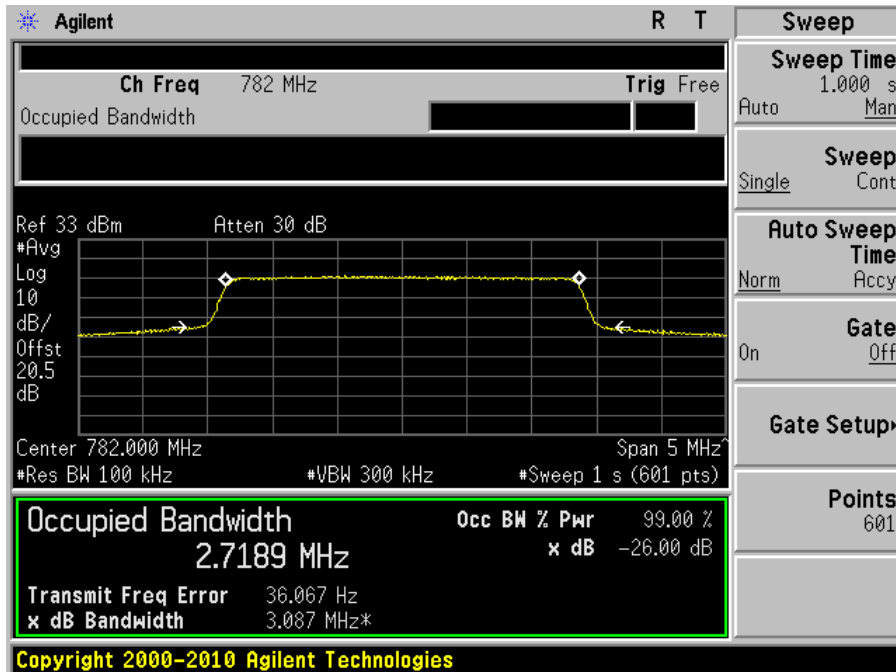


LTE-QPSK (5 MHz), Frequency: 784 MHz

Input

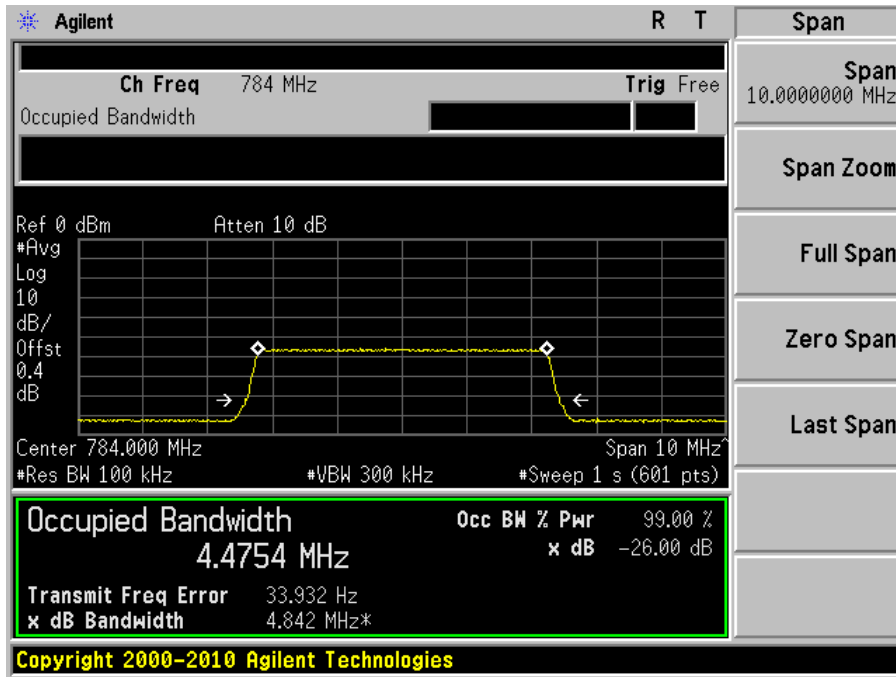


Output

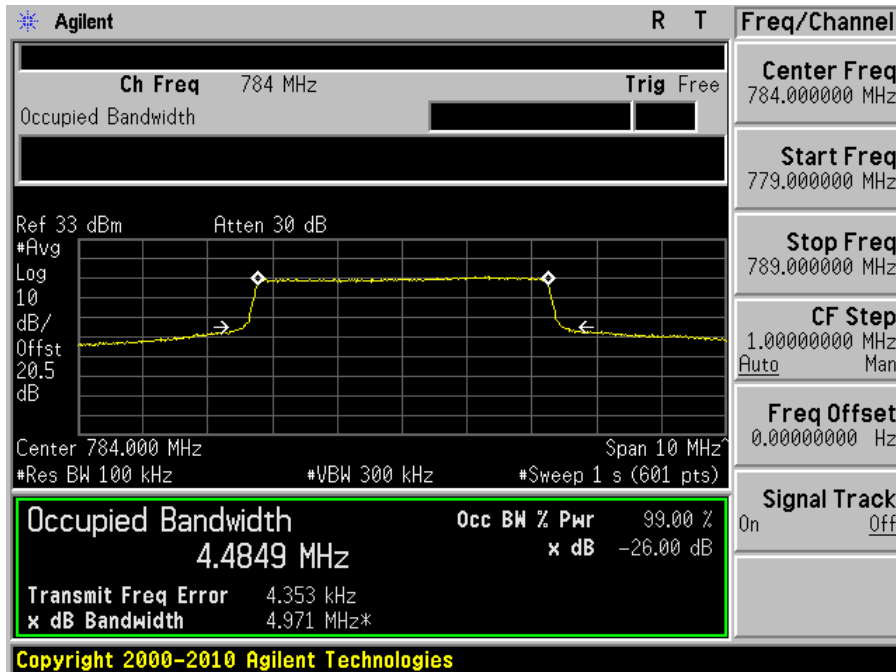


LTE-16QAM (5 MHz), Frequency: 784 MHz

Input

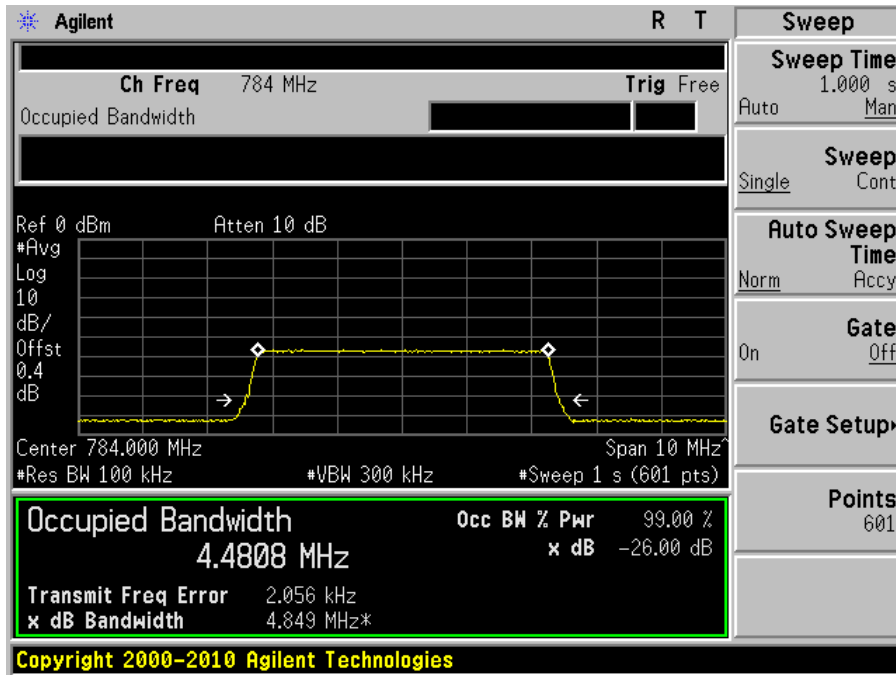


Output

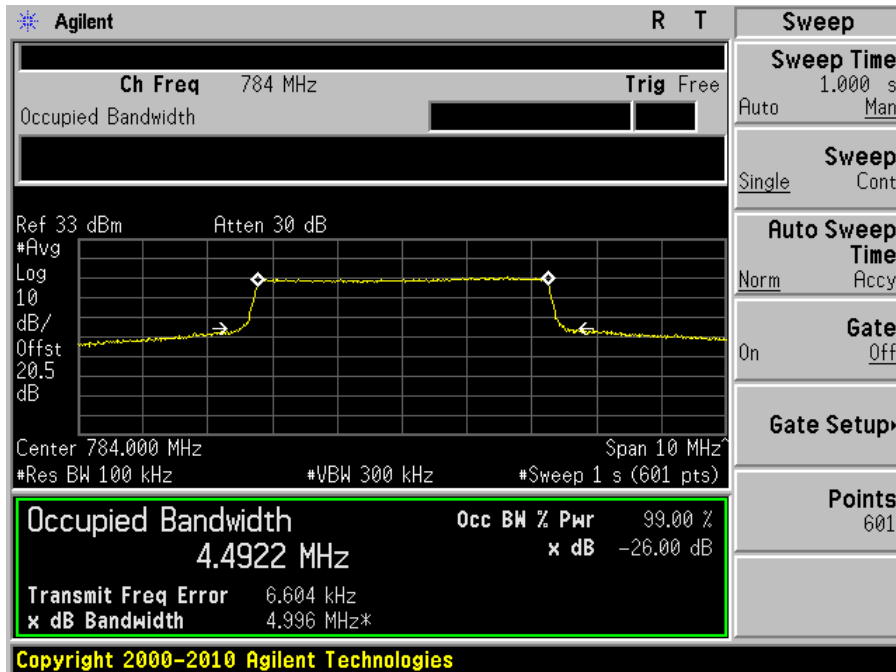


LTE-64QAM (5 MHz), Frequency: 784 MHz

Input

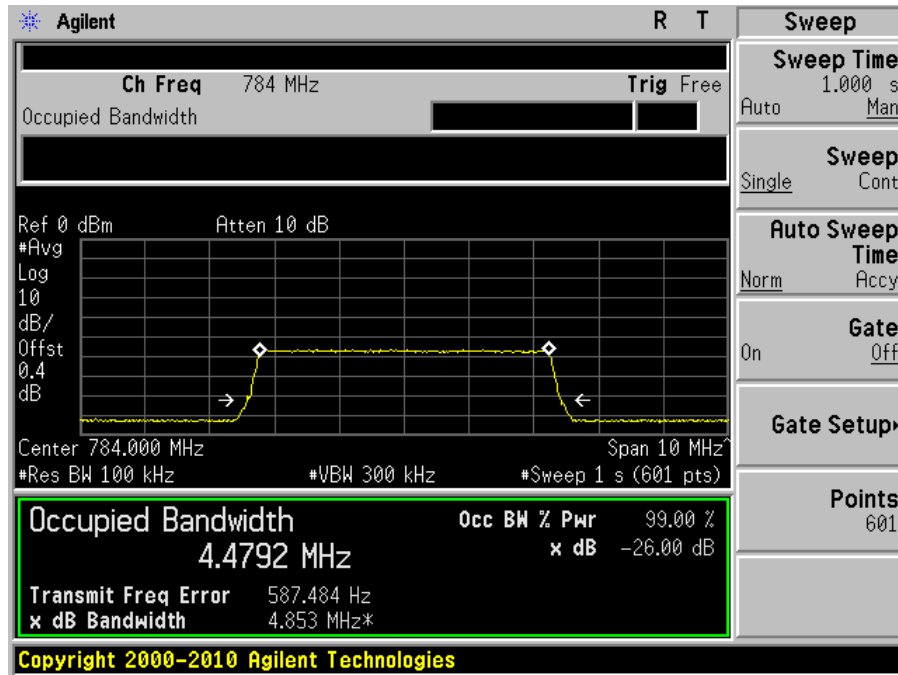


Output

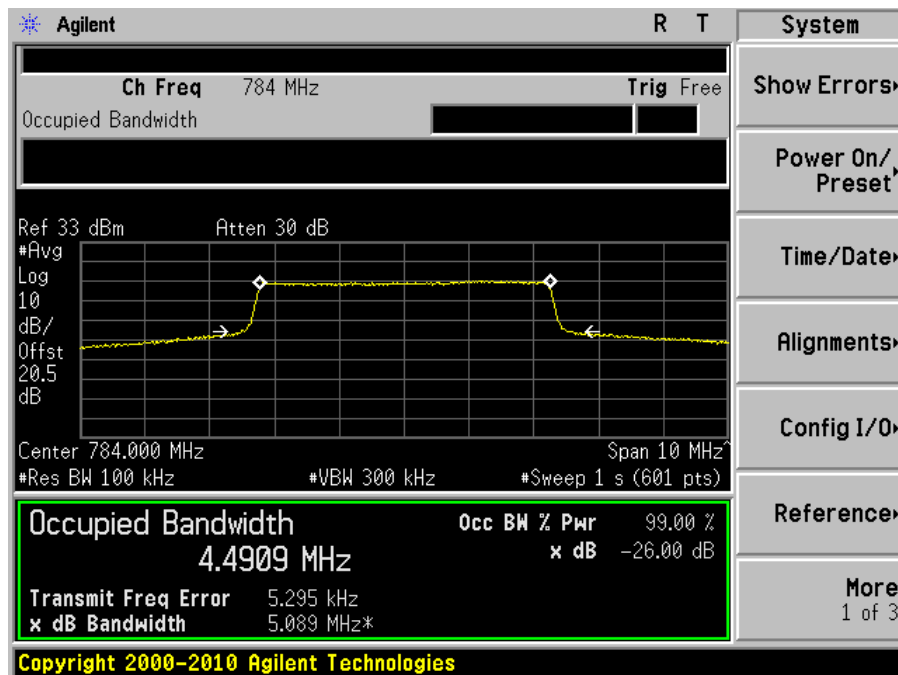


LTE-QPSK (10 MHz), Frequency: 782 MHz

Input

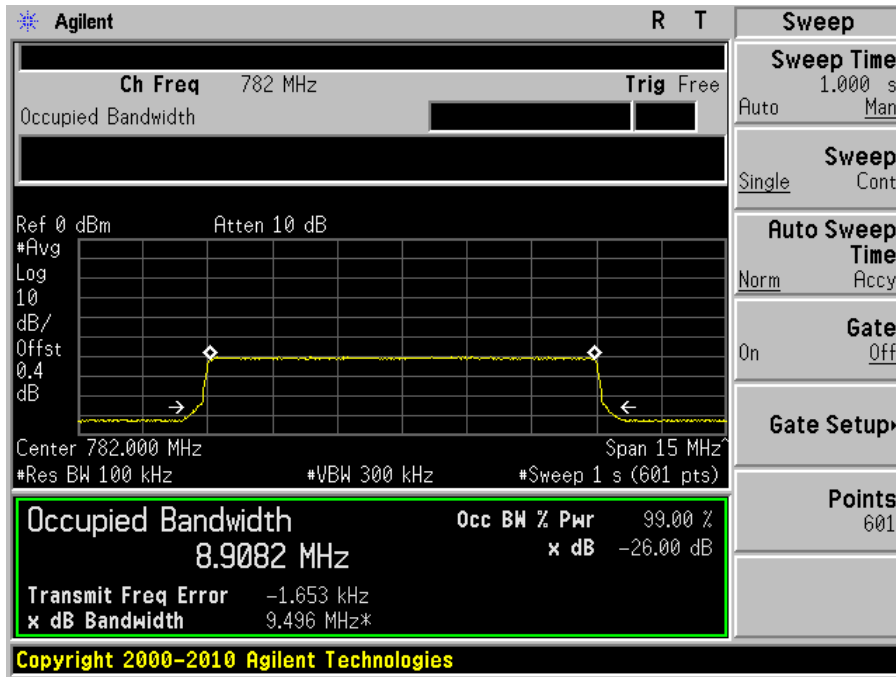


Output

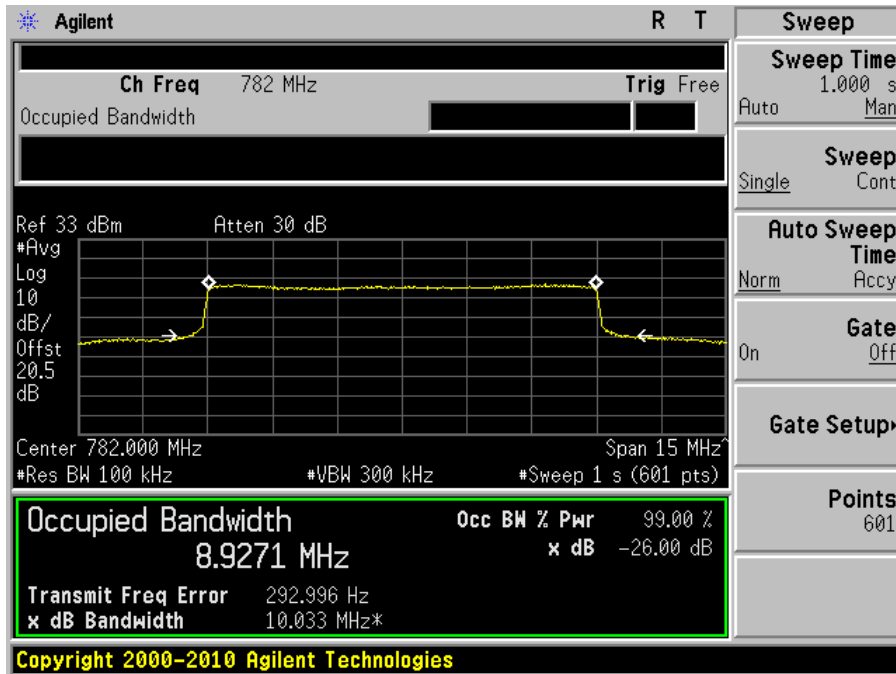


LTE-16QAM (10 MHz), Frequency: 782 MHz

Input

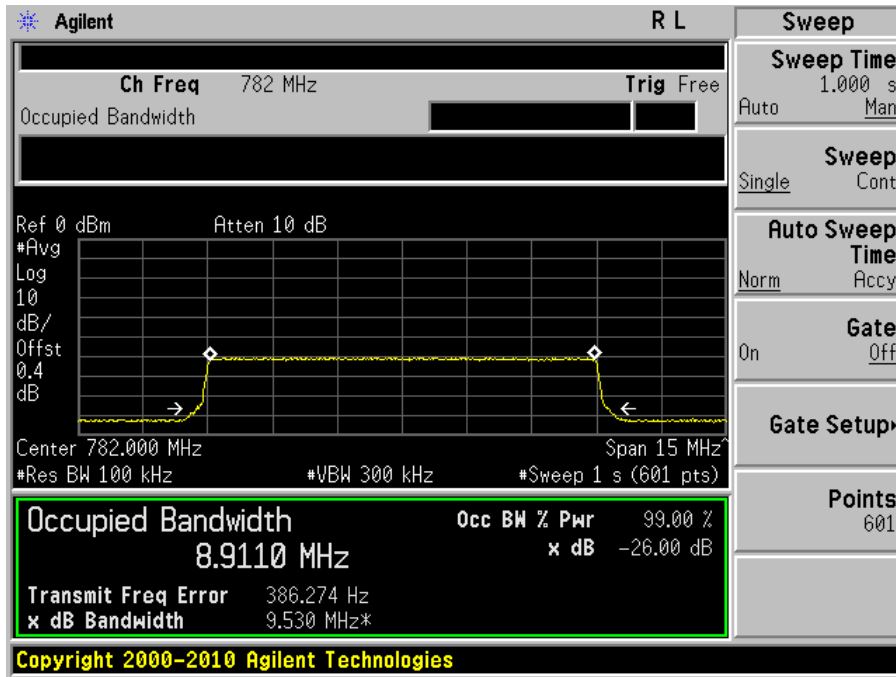


Output

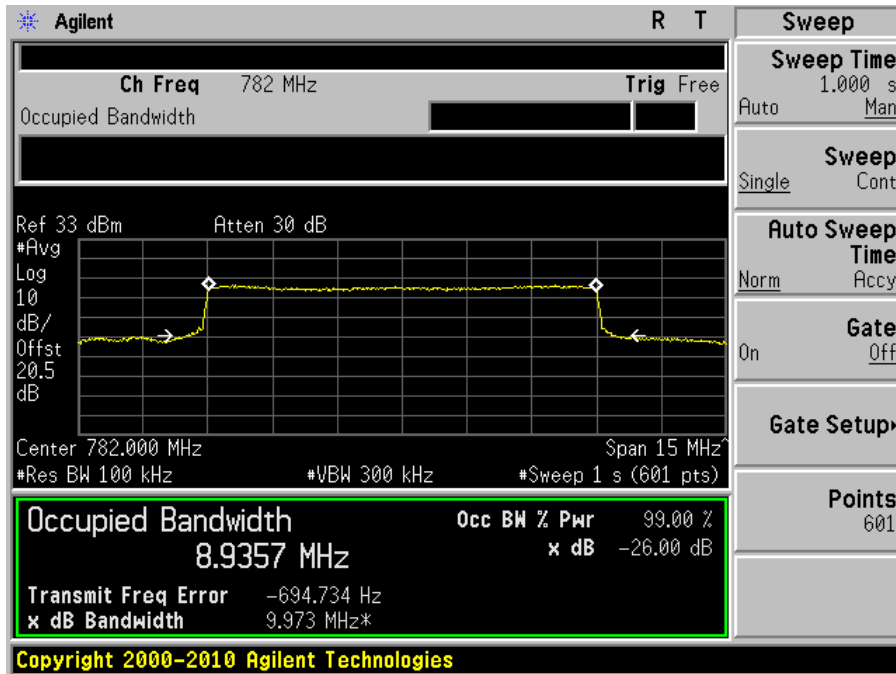


LTE-64QAM (10 MHz), Frequency: 782 MHz

Input

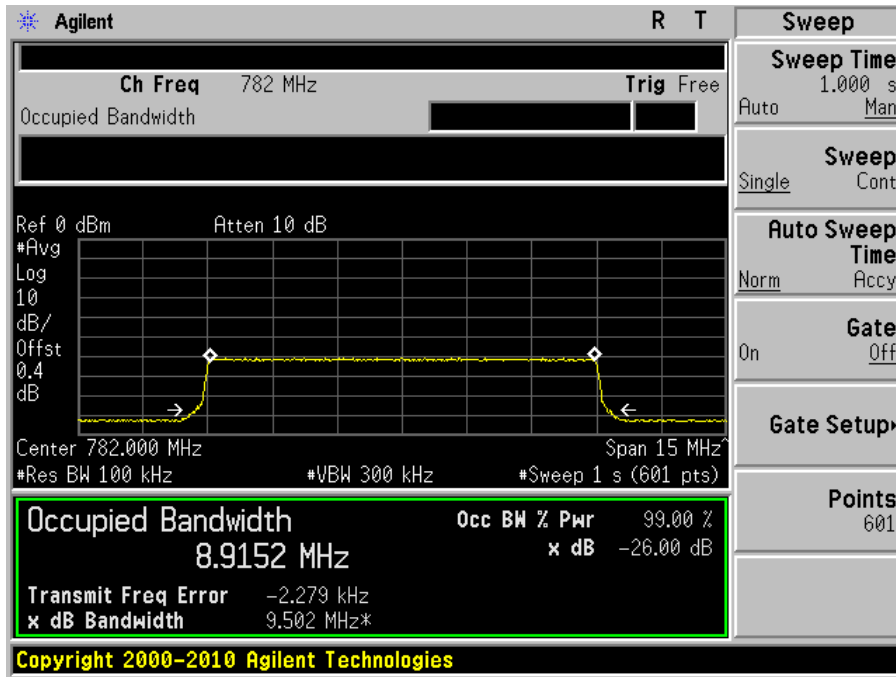

Output

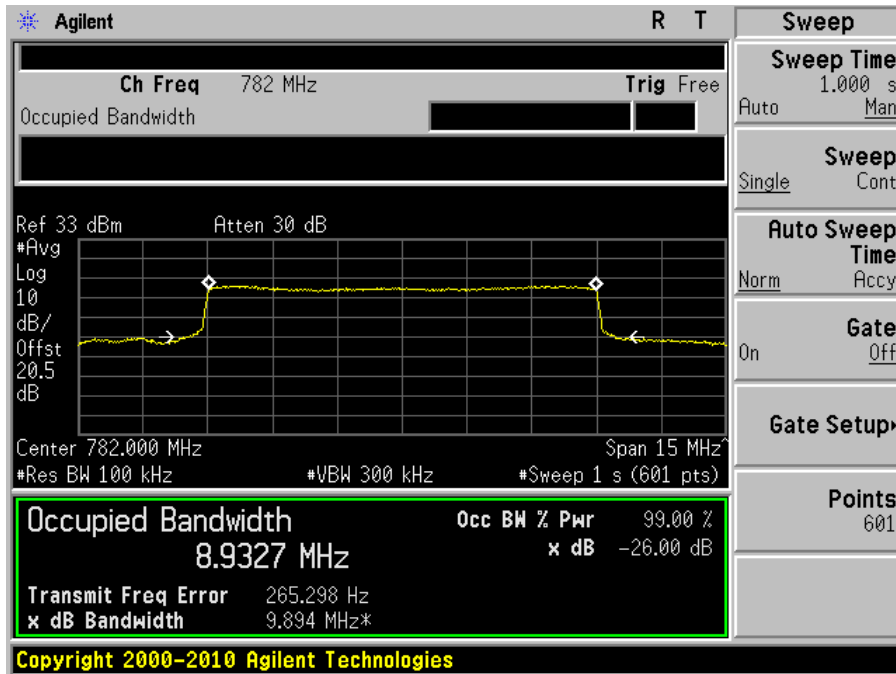

7 FCC §2.1053 & §27.53 - SPURIOUS RADIATED EMISSIONS

7.1 Applicable Standard

Requirements: FCC §2.1053, §27.53.

7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX Power in Watts}/0.001)$ – the absolute level
 Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$

7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746	2010-03-31 ¹
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB1	A020106-1	2011-05-17
Hewlett Packard	Pre-amplifier	8447D	2944A06639	2011-06-18
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Hewlett Packard	Pre-amplifier	8449B	3147A00400	2011-02-03

1) Note: two year calibration cycle.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	40-48 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-22 to 2011-06-24 at Chamber2.

7.5 Summary of Test Results

The worst case reading as follows:

Frequency Bands	Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Frequency Range
DL: 746-757 MHz	-24.41	3757.4	Horizontal	30 MHz – 22 GHz
UL: 776-787 MHz	-22.1	3126.1	Horizontal	30 MHz – 22 GHz

7.6 Test Results

DL: 746 - 757 MHz

Modulation: CW Signal – 751.5 MHz (Scan from 30 MHz to 8 GHz @ 3 Meter Distance)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
97.08	53.81	117	191	H	97.08	-64.67	0	0.3	-64.97	-13	-51.97
97.08	57.41	149	149	V	97.08	-61.07	0	0.3	-61.37	-13	-48.37
3757.4	55.26	152	100	H	3757.4	-45.11	9.2	1.5	-37.41	-13	-24.41
3757.4	51.81	132	100	V	3757.4	-48.56	9.2	1.5	-40.86	-13	-27.86

UL: 776 - 787 MHz

Modulation: CW Signal – 781.5 MHz (Scan from 30 MHz to 8 GHz @ 3 Meter Distance)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
65.15	46.06	222	380	H	65.15	-71.47	0	0.3	-71.77	-13	-58.77
65.15	57.68	239	147	V	65.15	-59.85	0	0.3	-60.15	-13	-47.15
3126.1	60.96	220	127	H	3126.1	-42.7	9.1	1.5	-35.1	-13	-22.1
3126.1	55.37	228	293	V	3126.1	-48.29	9.1	1.5	-40.69	-13	-27.69

8 FCC §2.1051 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 Applicable Standard

Requirements: FCC §2.1051 & §27.53.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

8.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746	2010-03-31 ¹
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

1) Note: two year calibration cycle.

Statement of Traceability: BA CL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	40-48 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-22 to 2011-06-24 at RF Site.


8.5 Test Results

Please refer to the following plots.


DL: 746-757 MHz

Modulation: CW Signal, Frequency: 751.5 MHz


Plot 1: 30 MHz to 1 GHz

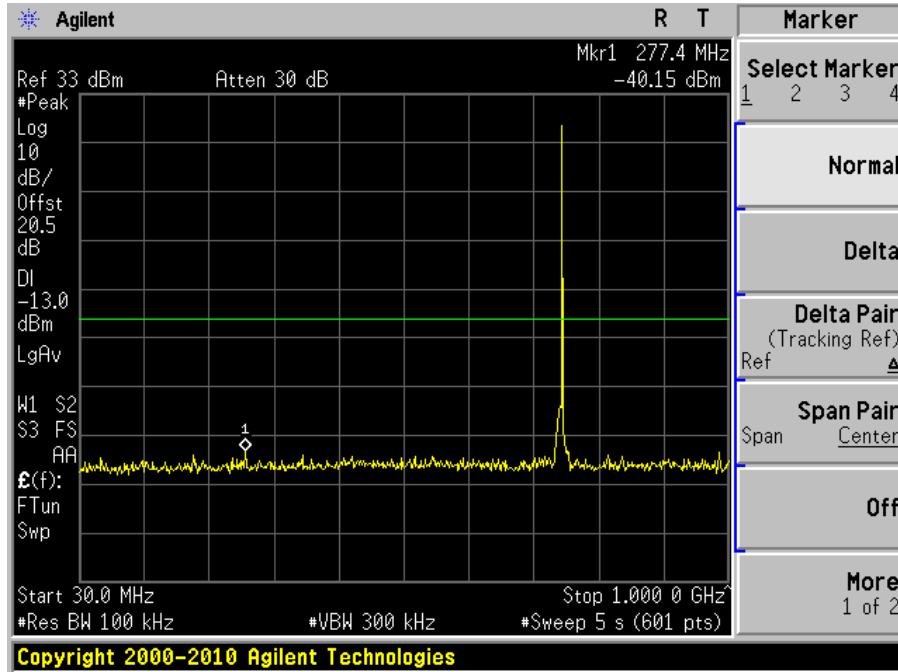


Plot 2: Above 1 GHz

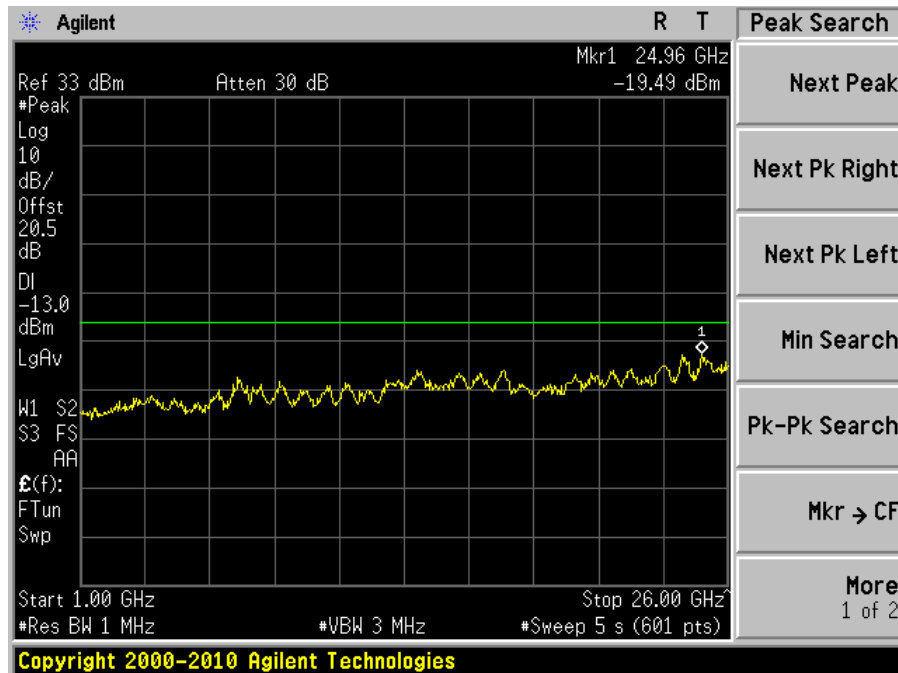

Inter-Modulation:
Lowest Frequency
Input

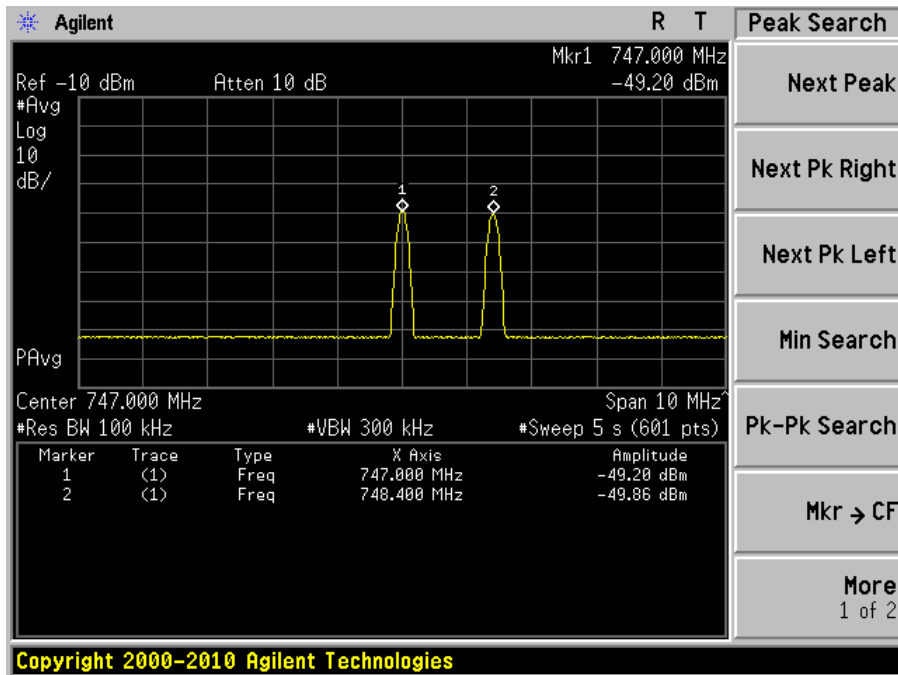


Output

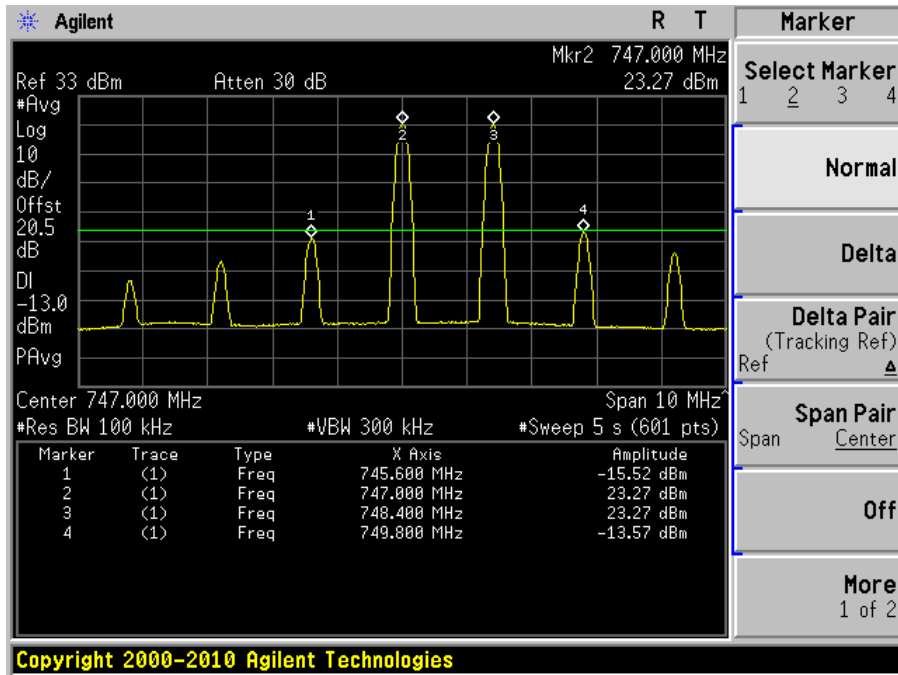


Middle Frequency

Input

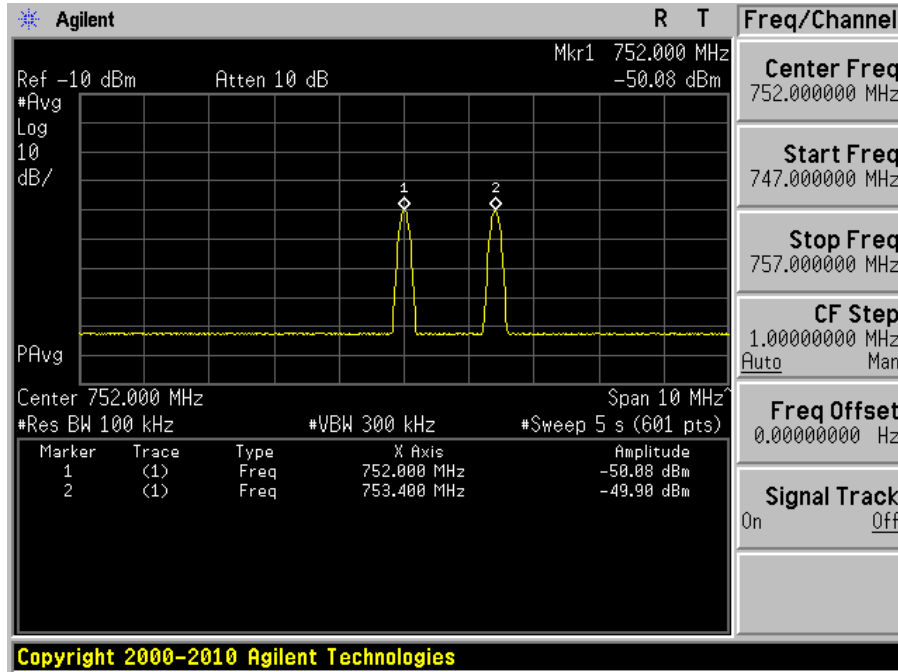


Output

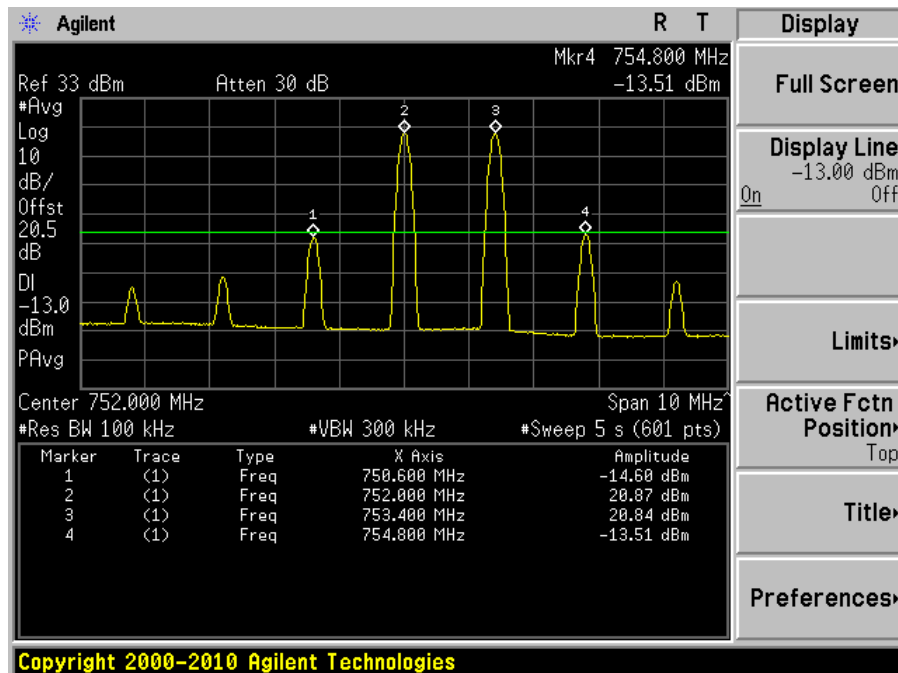


Highest Frequency

Input

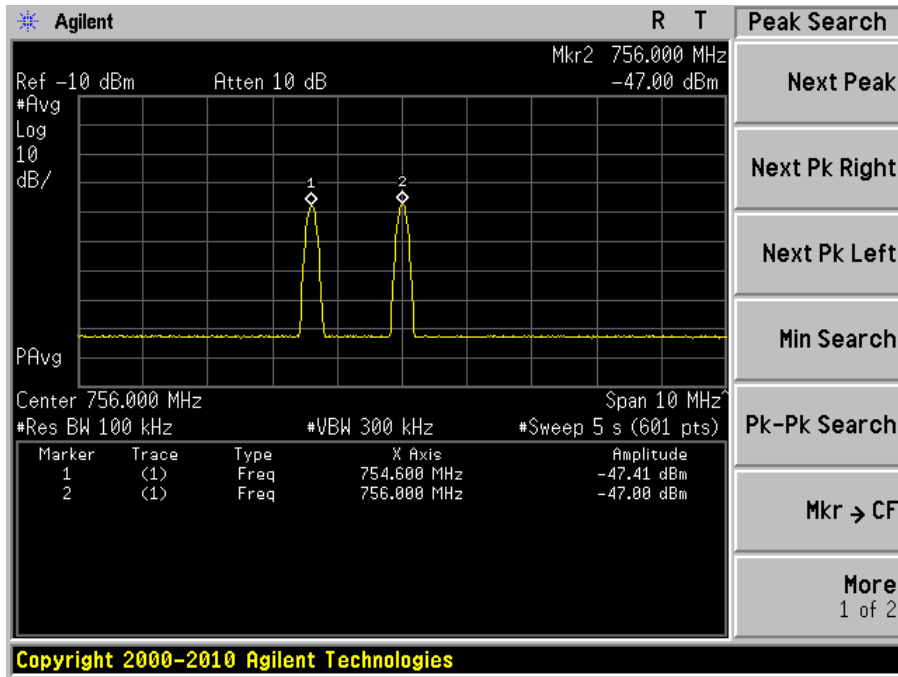


Output

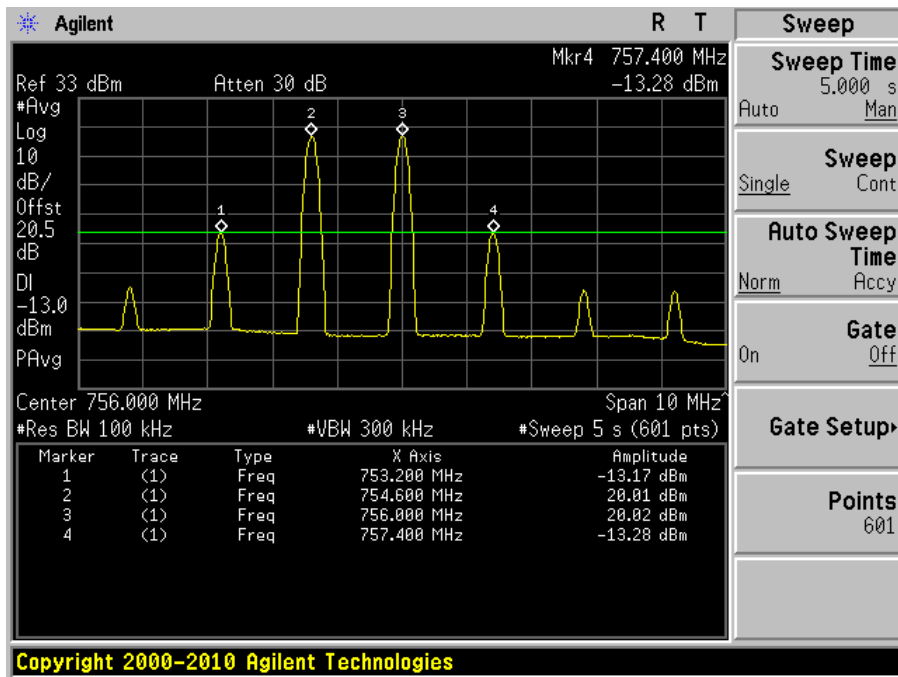


UL: 776-787 MHz

Modulation: CW Signal, Frequency: 781.5 MHz


Plot 1: 30 MHz to 1 GHz

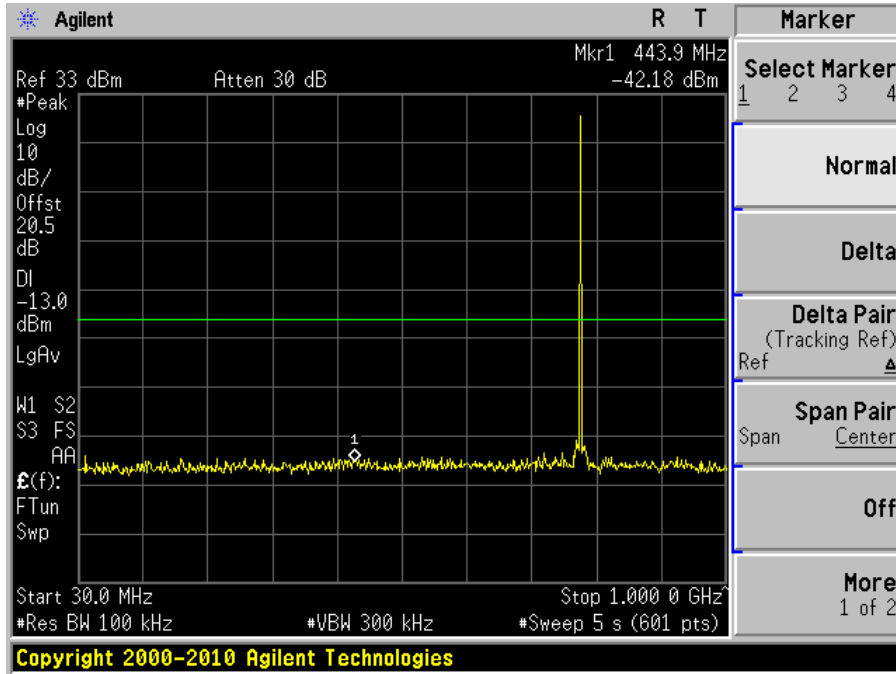


Plot 2: Above 1 GHz

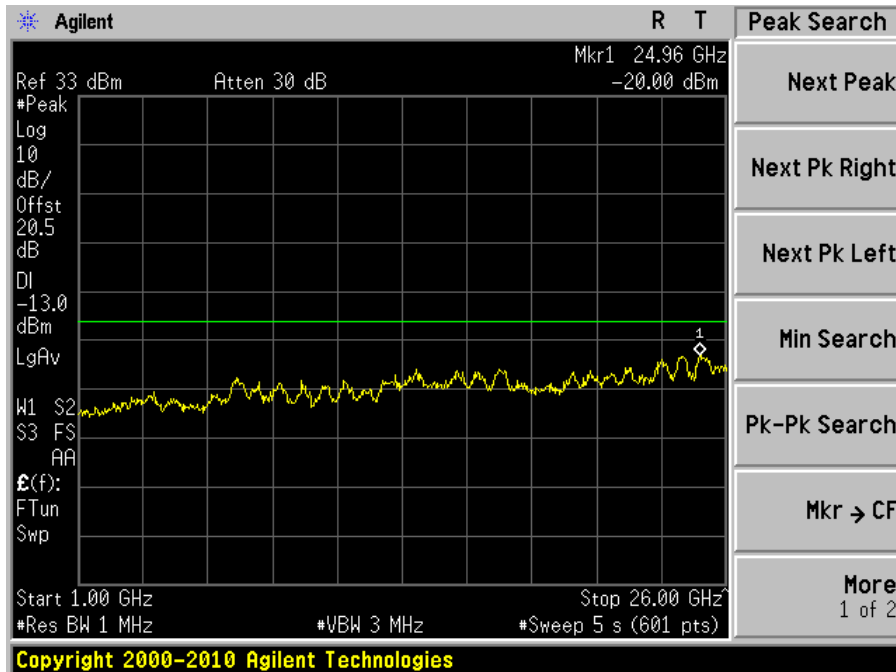

Inter-modulation:
Lowest Frequency
Input

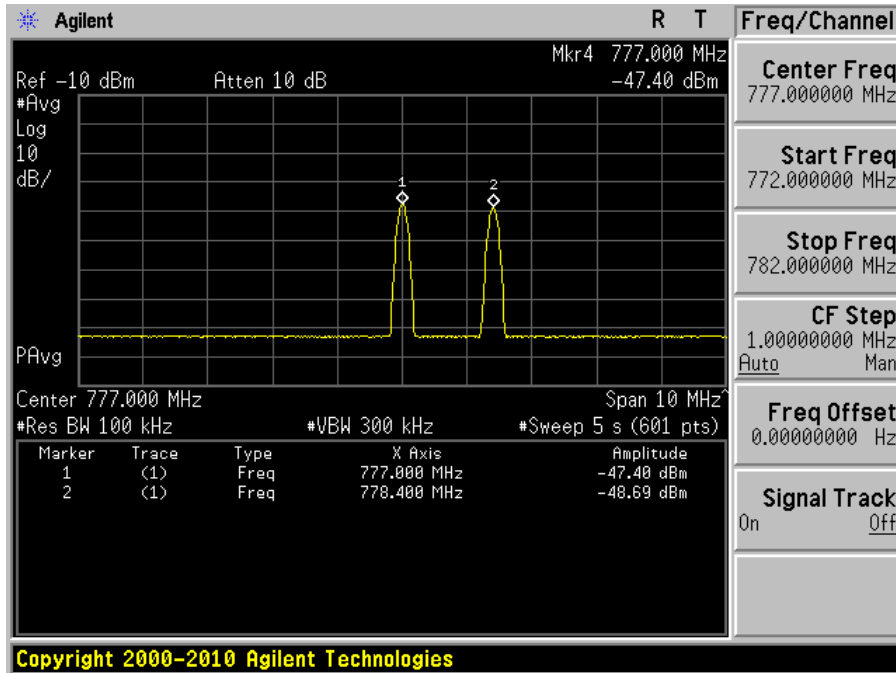


Output

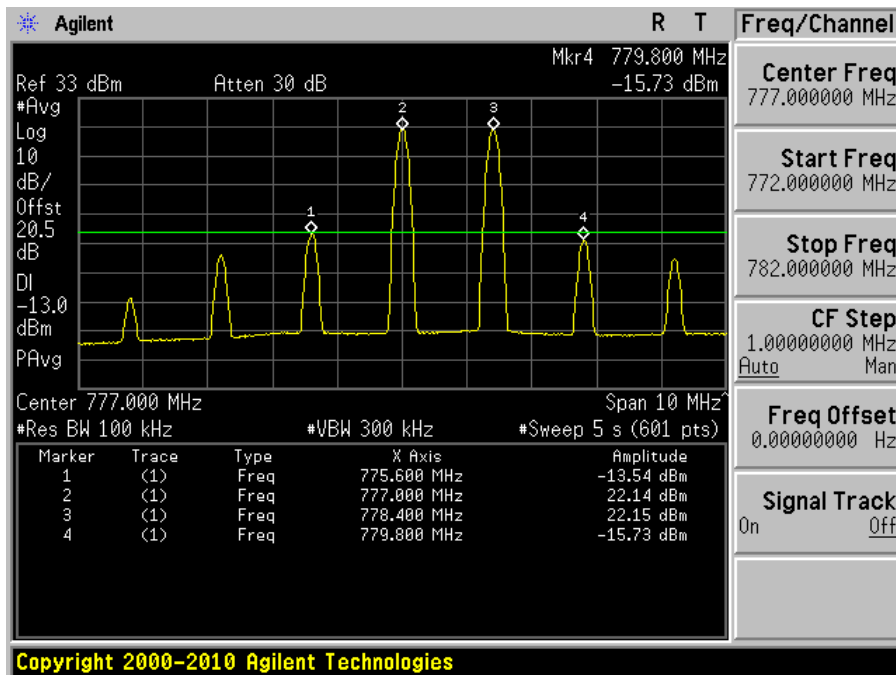


Middle Frequency

Input

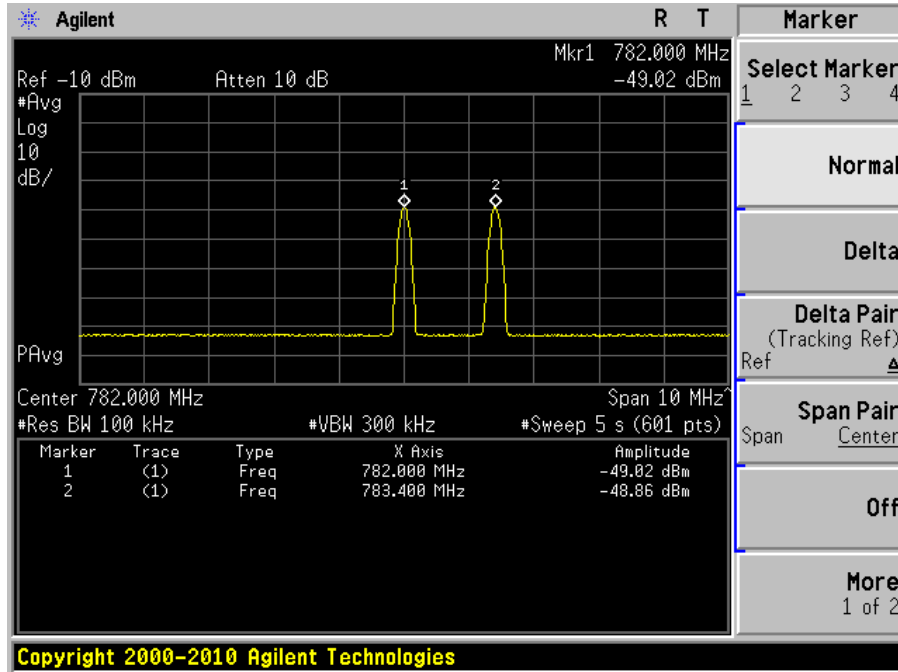


Output

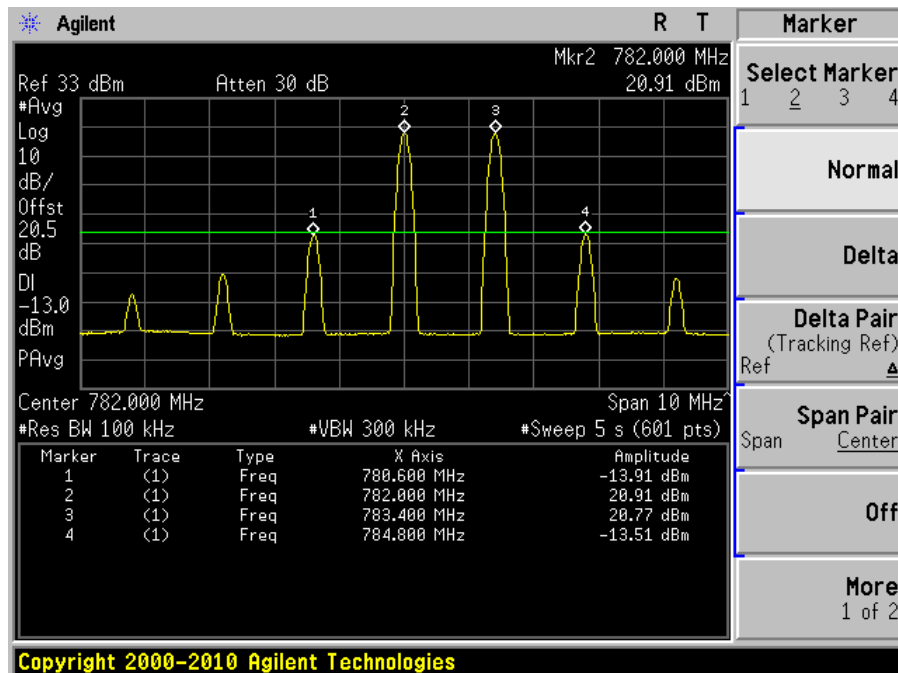


Highest Frequency

Input

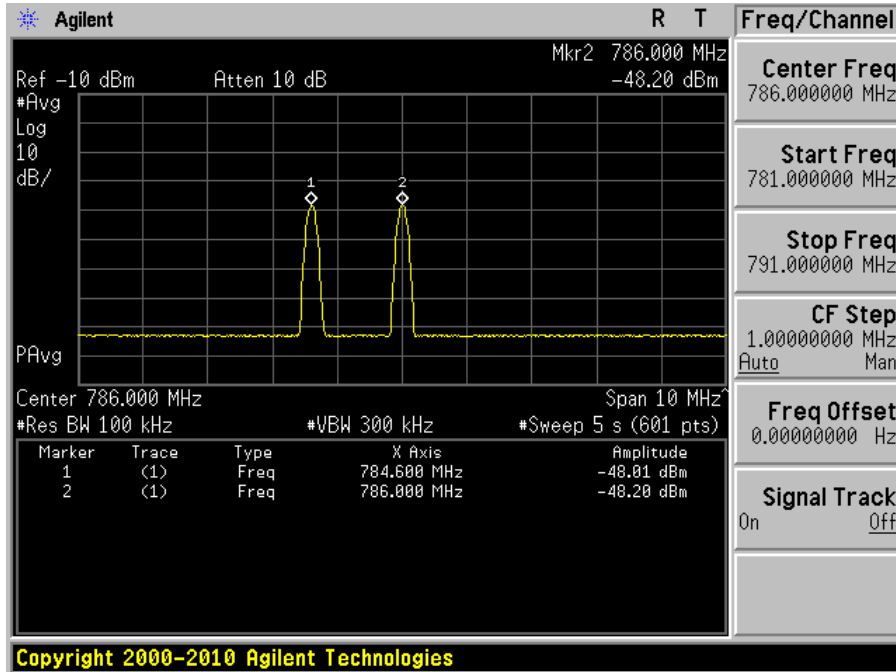

Output

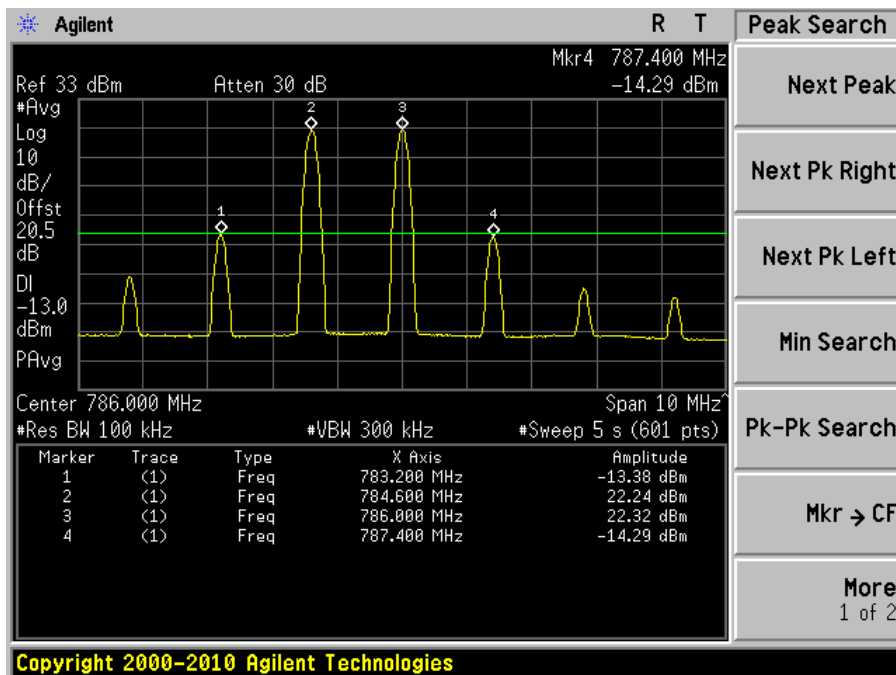

9 FCC §27.53 – BAND EDGE

9.1 Applicable Standard

According to FCC §27.53, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

9.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2011-08-11

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	40-48 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-22 to 2011-06-24 at RF Site.


9.5 Test Results

Please refer to the following plots.


DL: 746-757 MHz

Modulation: LTE-QPSK (1.4 MHz):

Plot 1: Lowest Edge

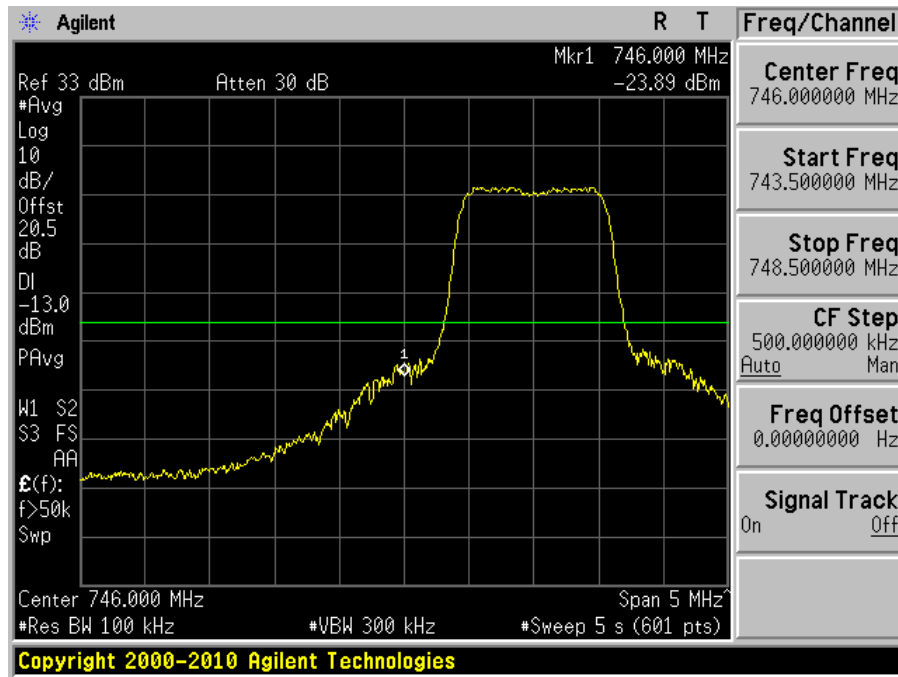


Plot 2: Highest Edge

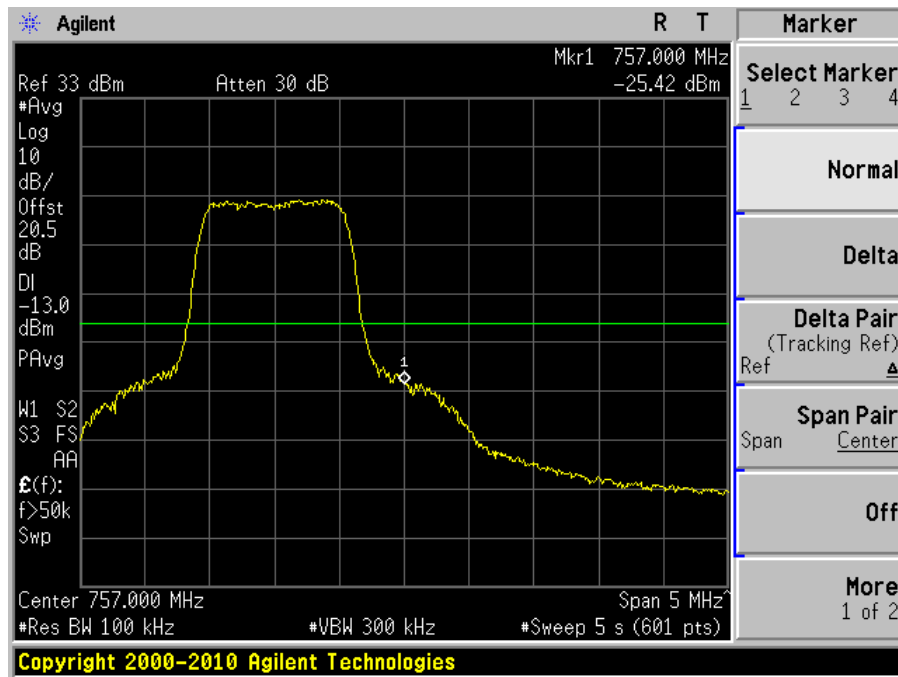


Modulation: LTE-16QAM (1.4 MHz):

Plot 1: Lowest Edge

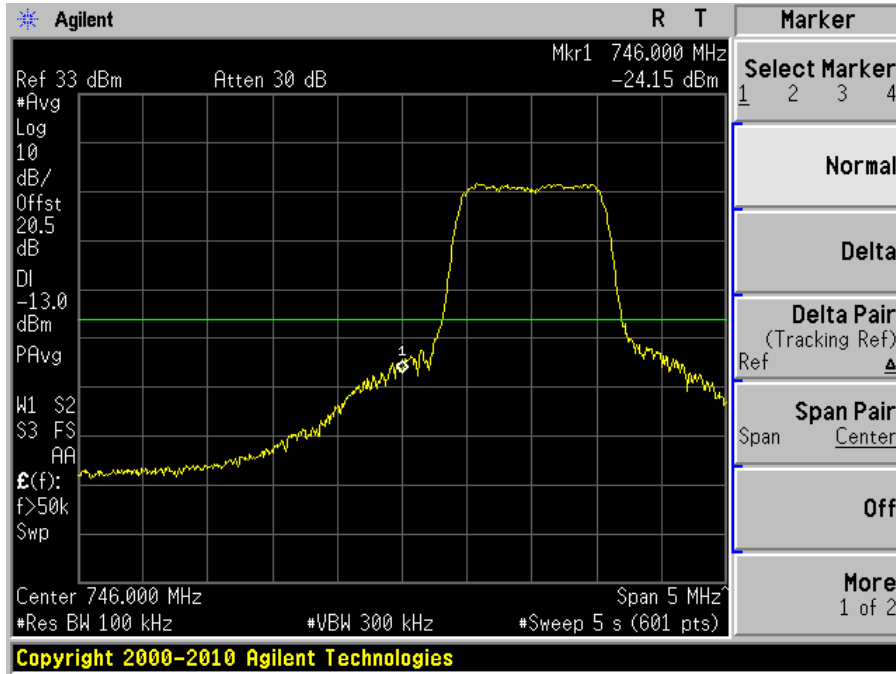


Plot 2: Highest Edge

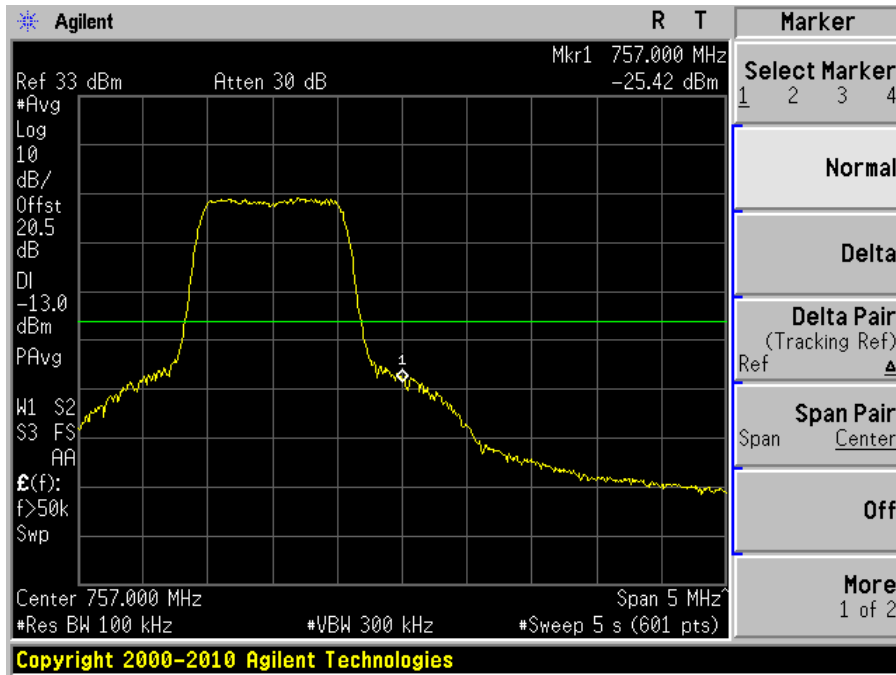


Modulation: LTE-64QAM (1.4 MHz):

Plot 1: Lowest Edge

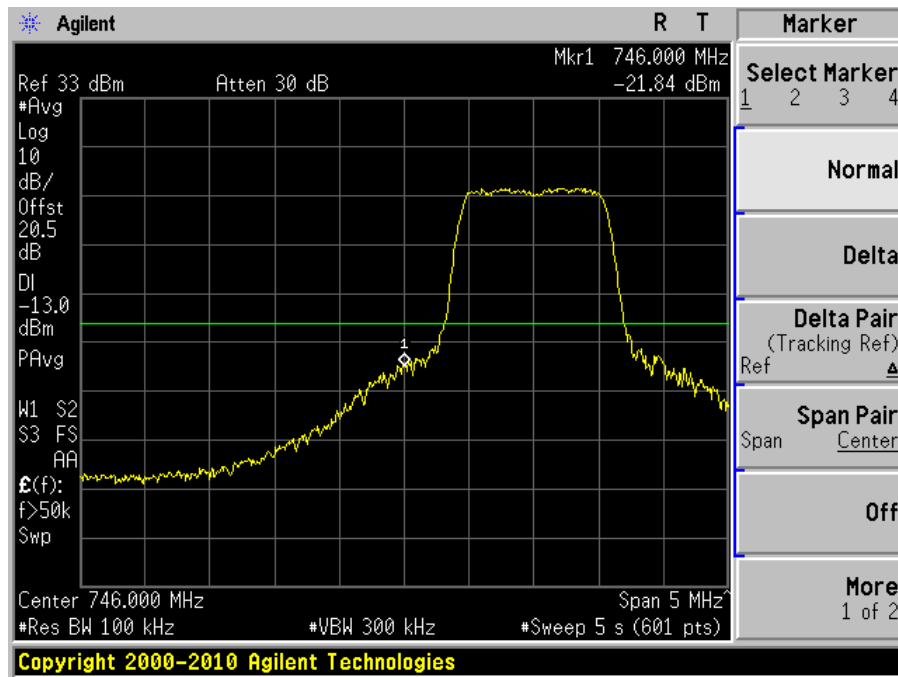


Plot 2: Highest Edge

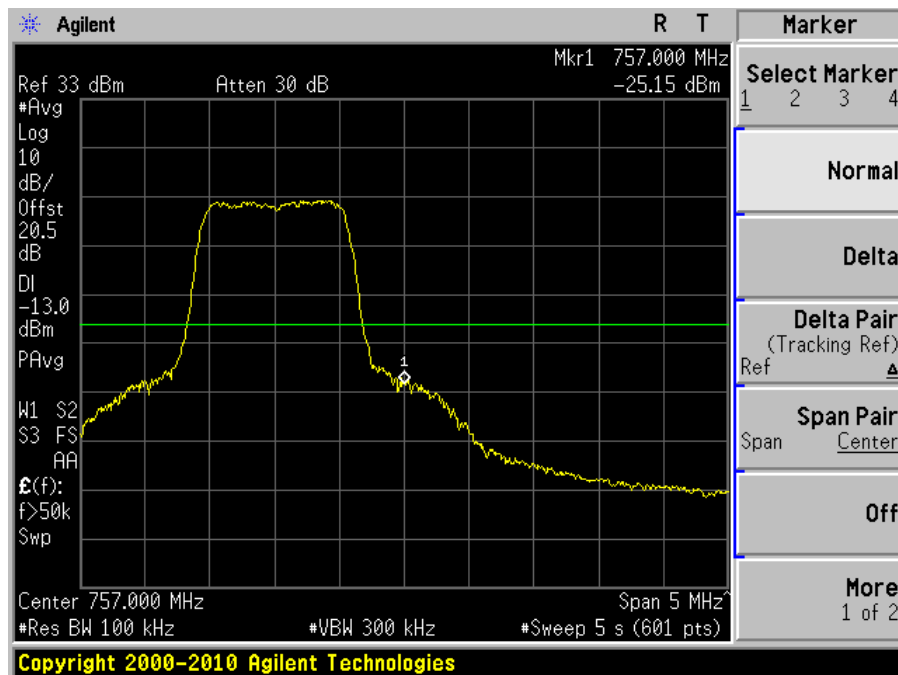


Modulation: LTE-QPSK (3 MHz):

Plot 1: Lowest Edge

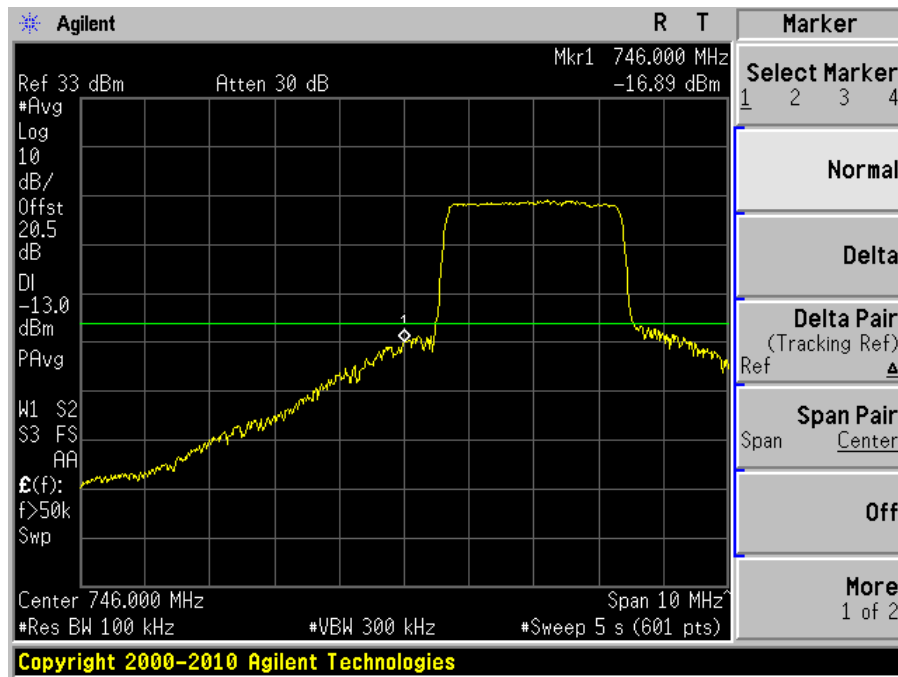


Plot 2: Highest Edge

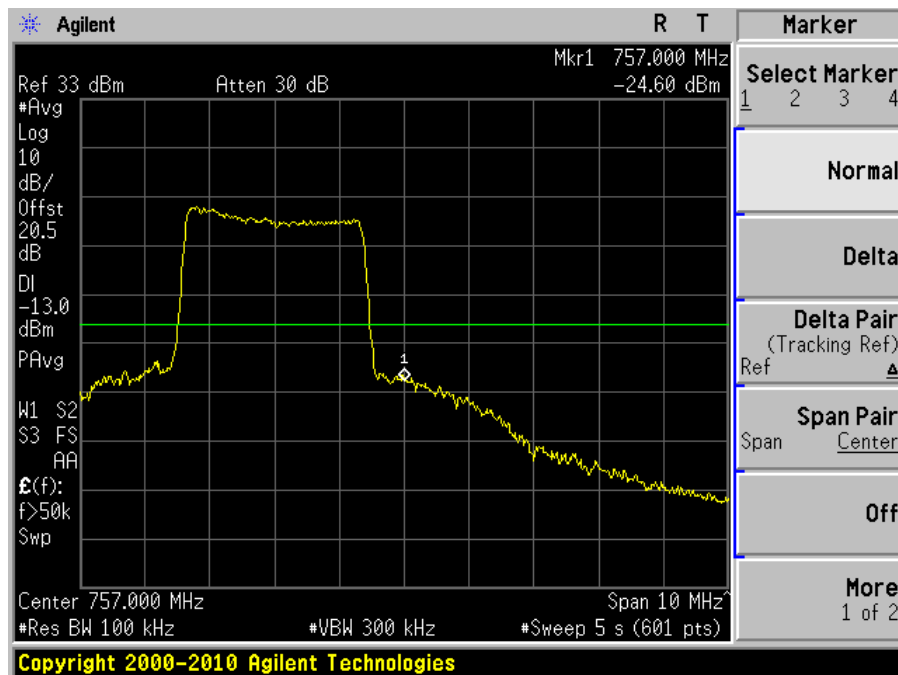


Modulation: LTE-16QAM (3 MHz):

Plot 1: Lowest Edge

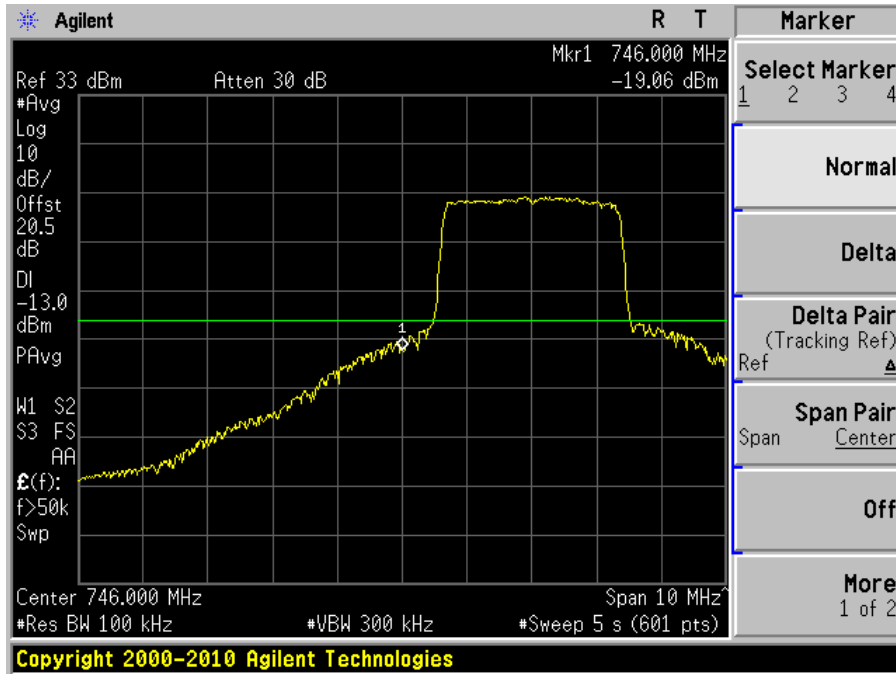


Plot 2: Highest Edge

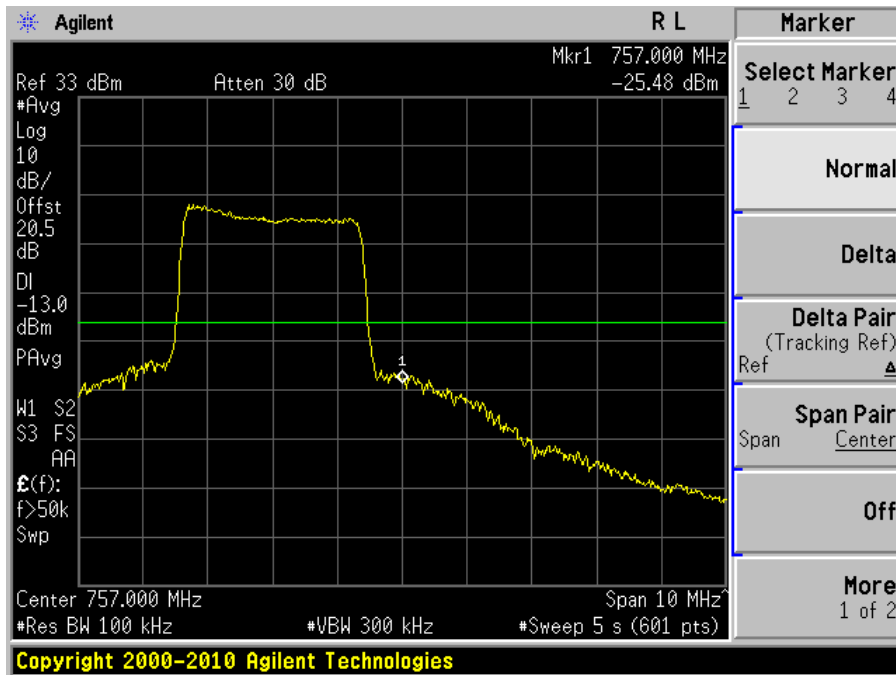


Modulation: LTE-64QAM (3 MHz):

Plot 1: Lowest Edge

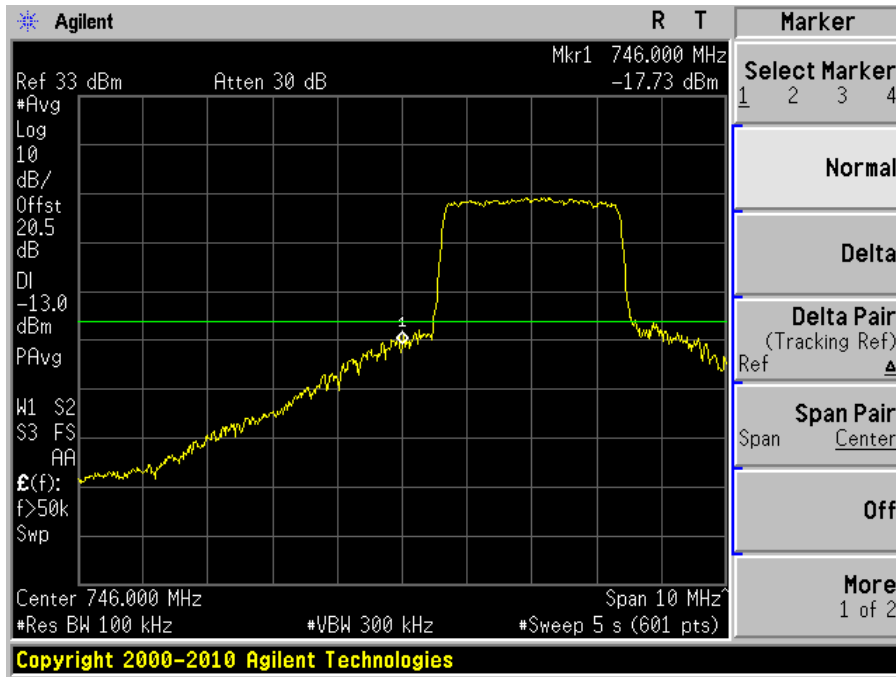


Plot 2: Highest Edge

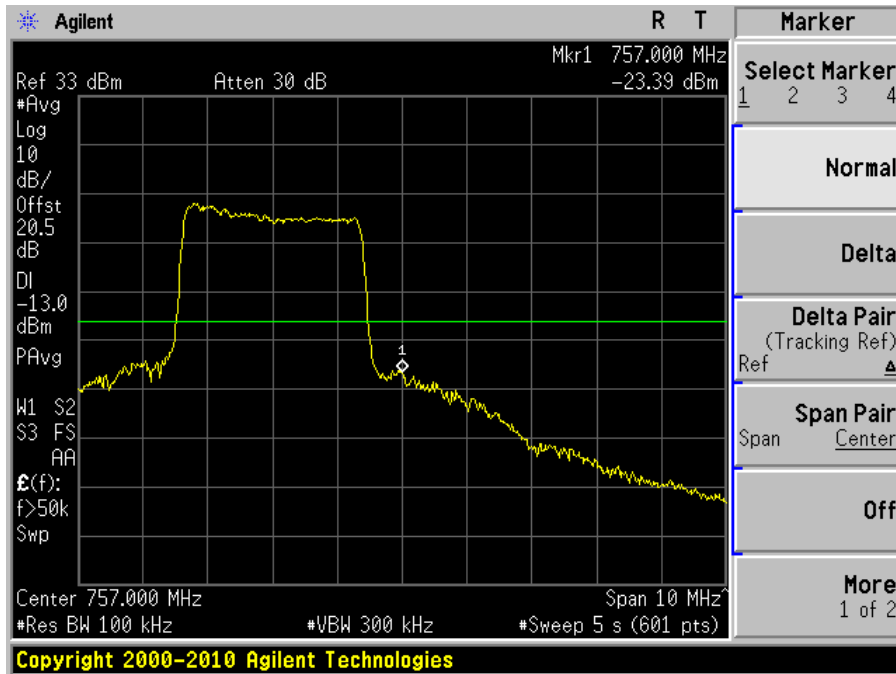


Modulation: LTE-QPSK (5 MHz):

Plot 1: Lowest Edge

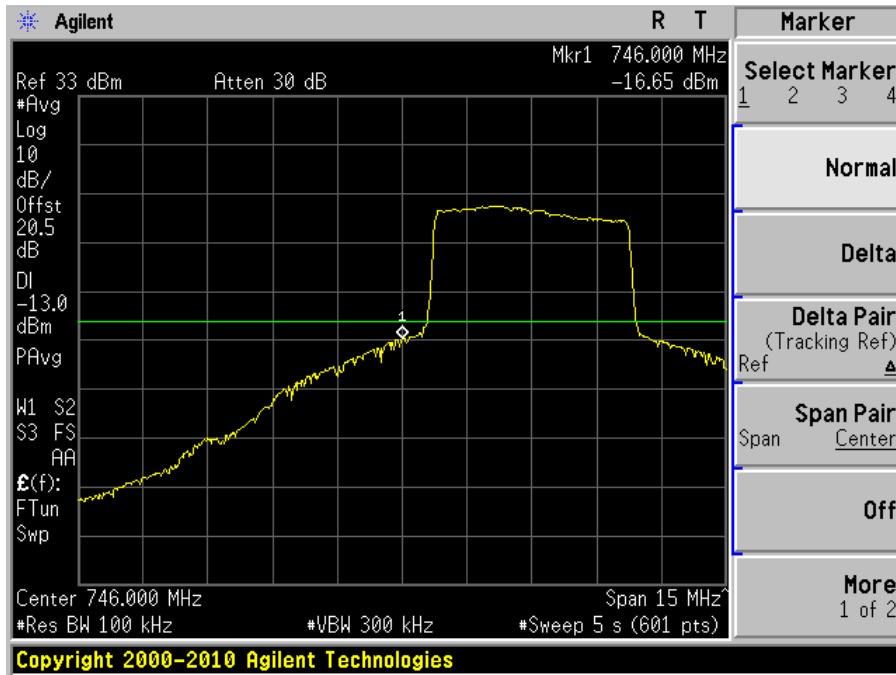


Plot 2: Highest Edge

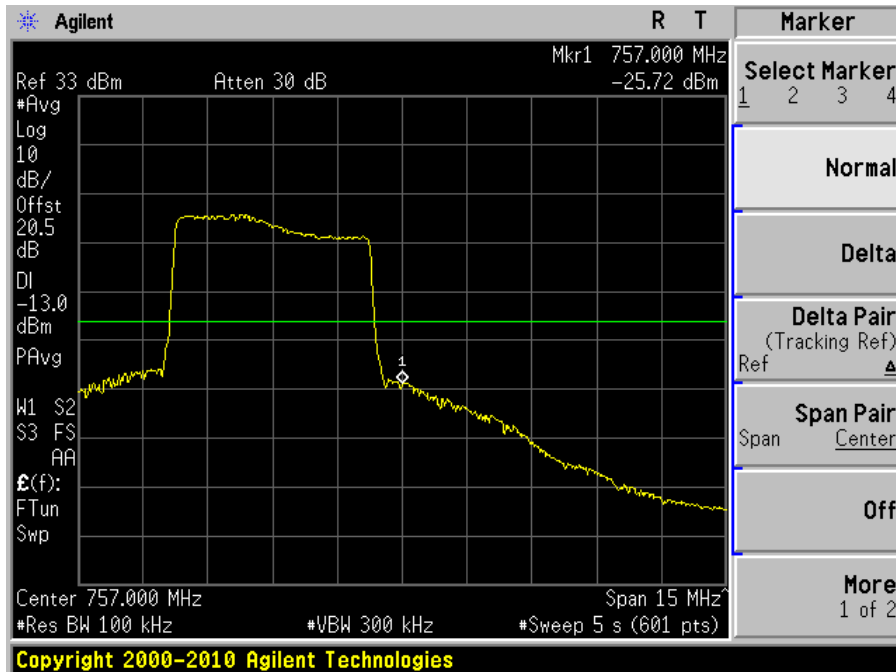


Modulation: LTE-16QAM (5 MHz):

Plot 1: Lowest Edge

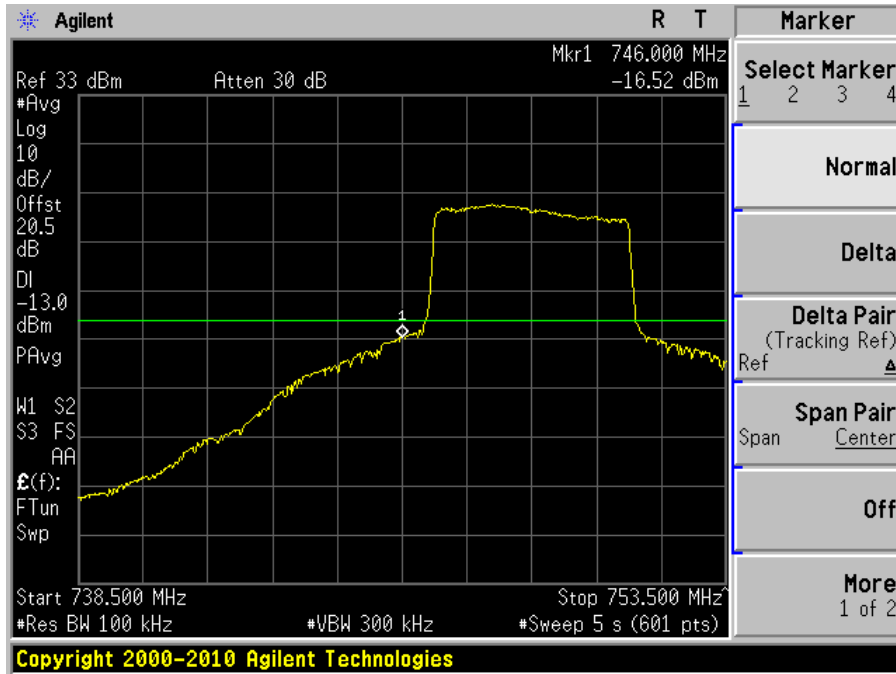


Plot 2: Highest Edge

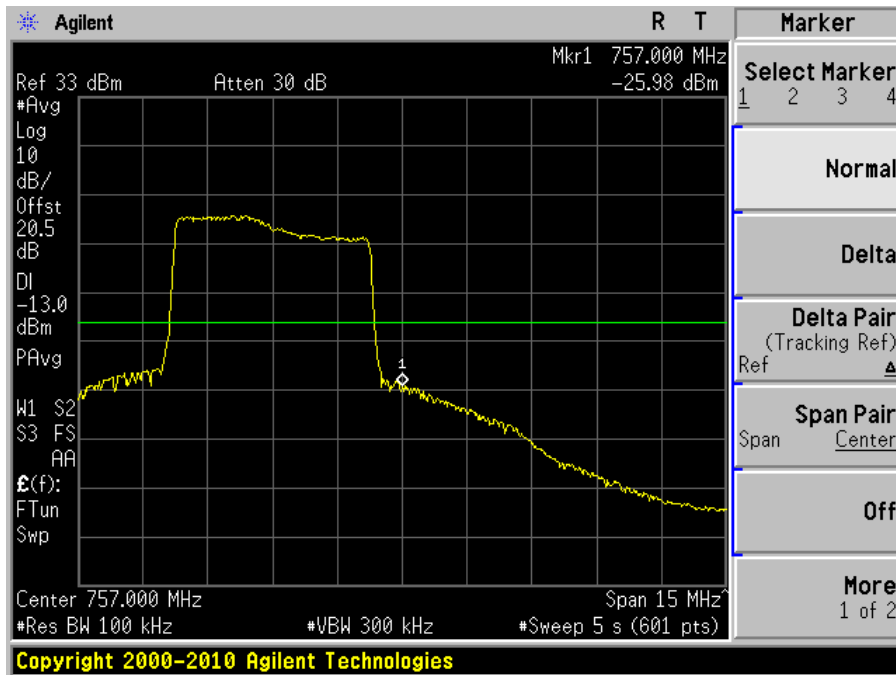


Modulation: LTE-64QAM (5 MHz):

Plot 1: Lowest Edge

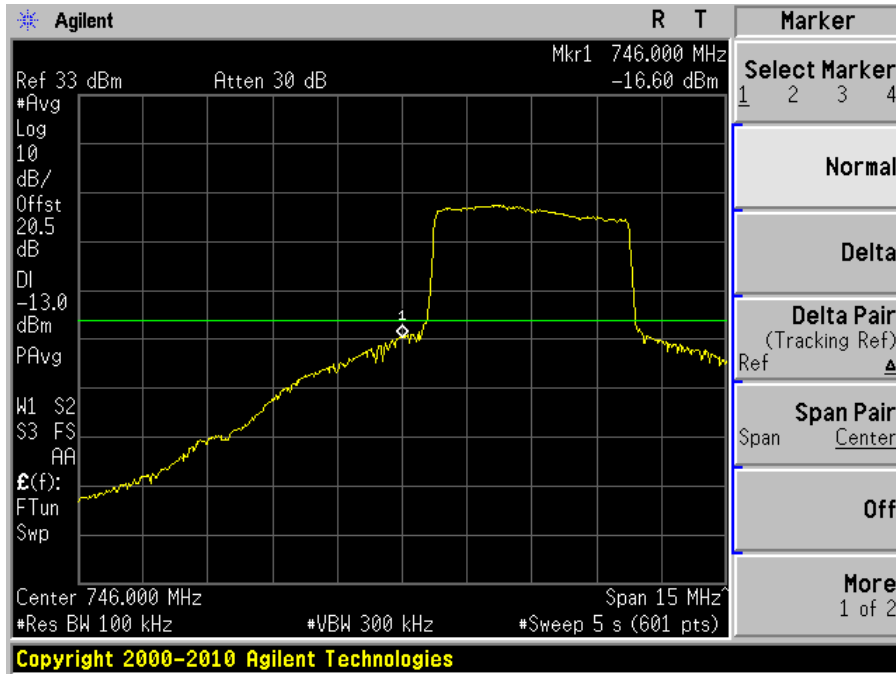


Plot 2: Highest Edge

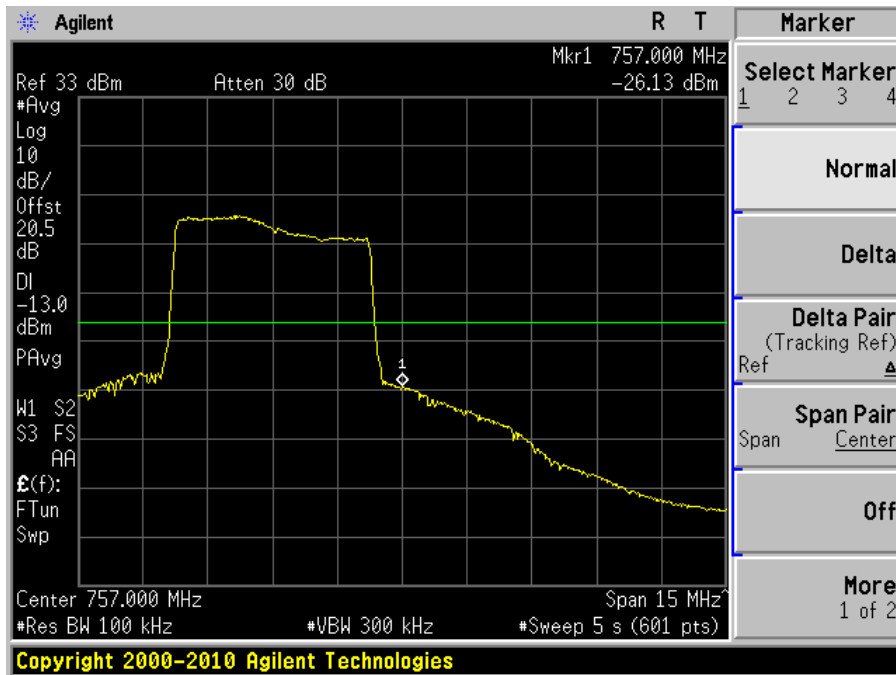


Modulation: LTE-QPSK (10 MHz):

Plot 1: Lowest Edge

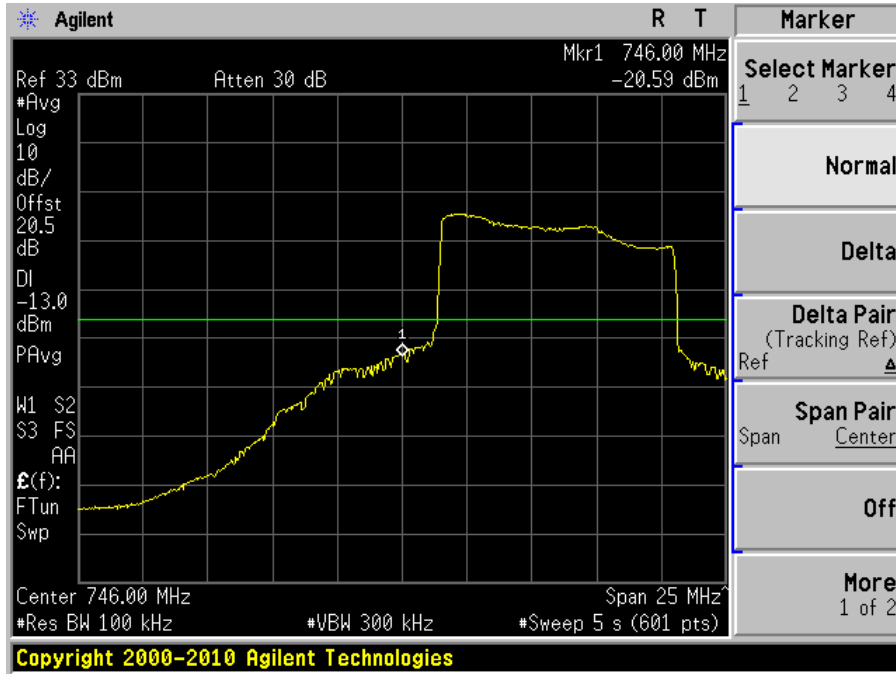


Plot 2: Highest Edge

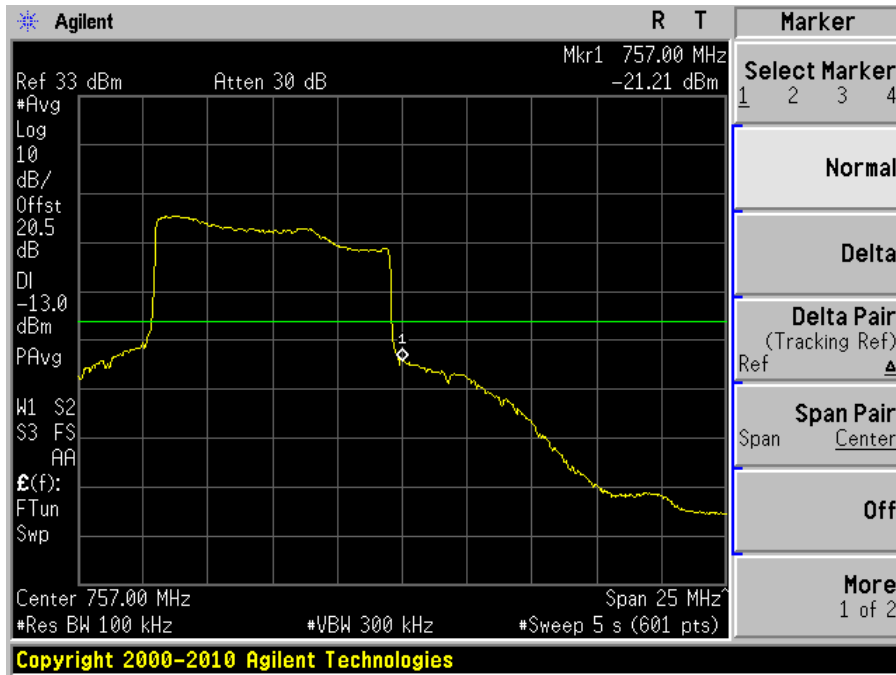


Modulation: LTE-16QAM (10 MHz):

Plot 1: Lowest Edge

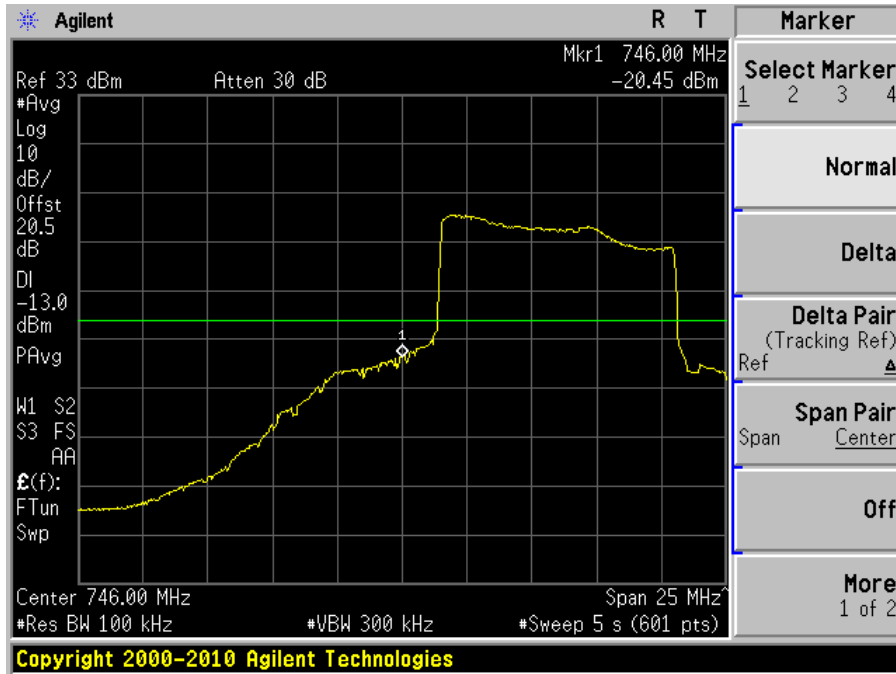


Plot 2: Highest Edge

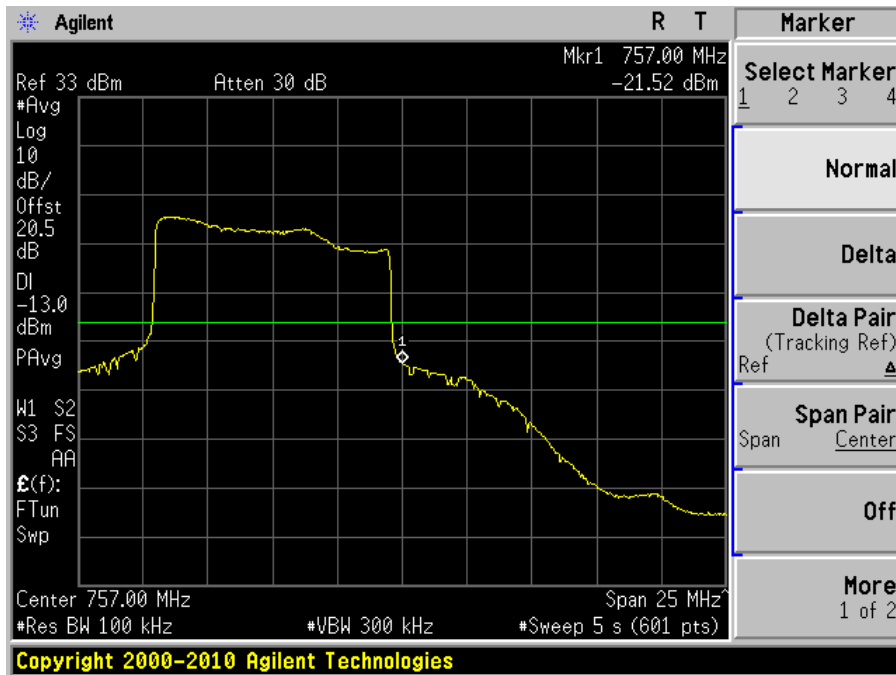


Modulation: LTE-64QAM (10 MHz):

Plot 1: Lowest Edge

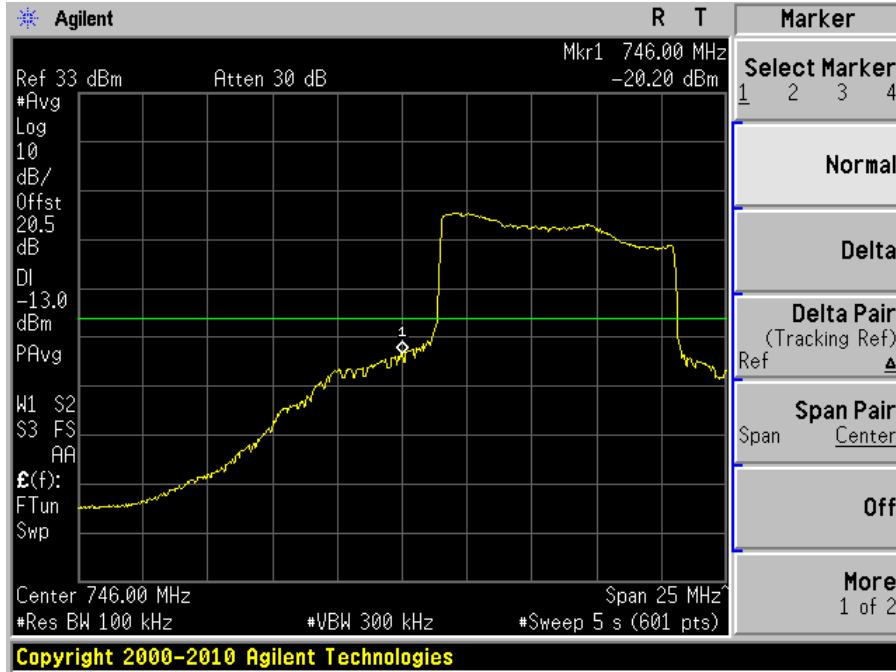


Plot 2: Highest Edge

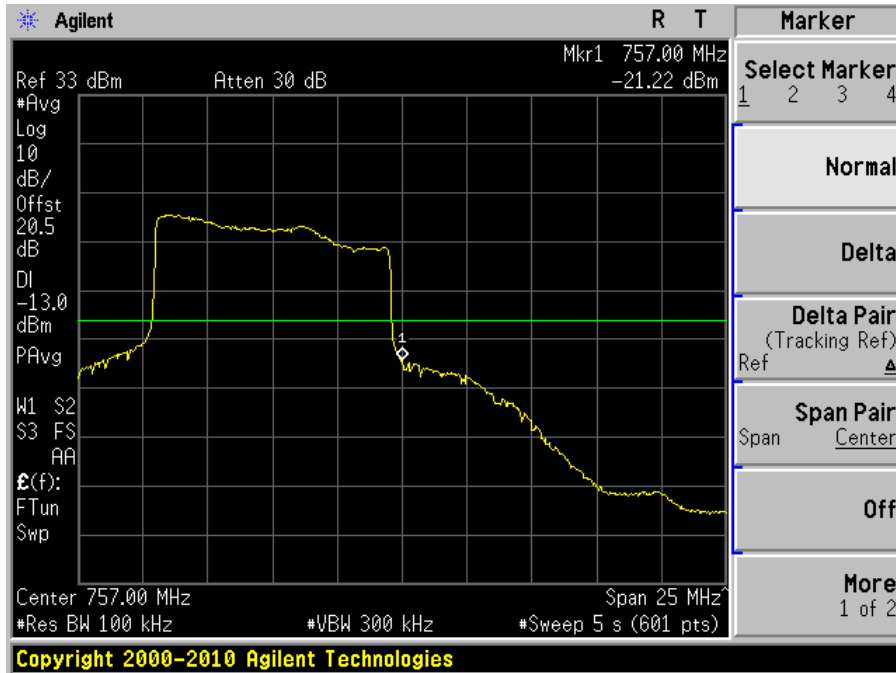


UL: 776-787 MHz

Modulation: LTE-QPSK (1.4 MHz):

Plot 1: Lowest Edge

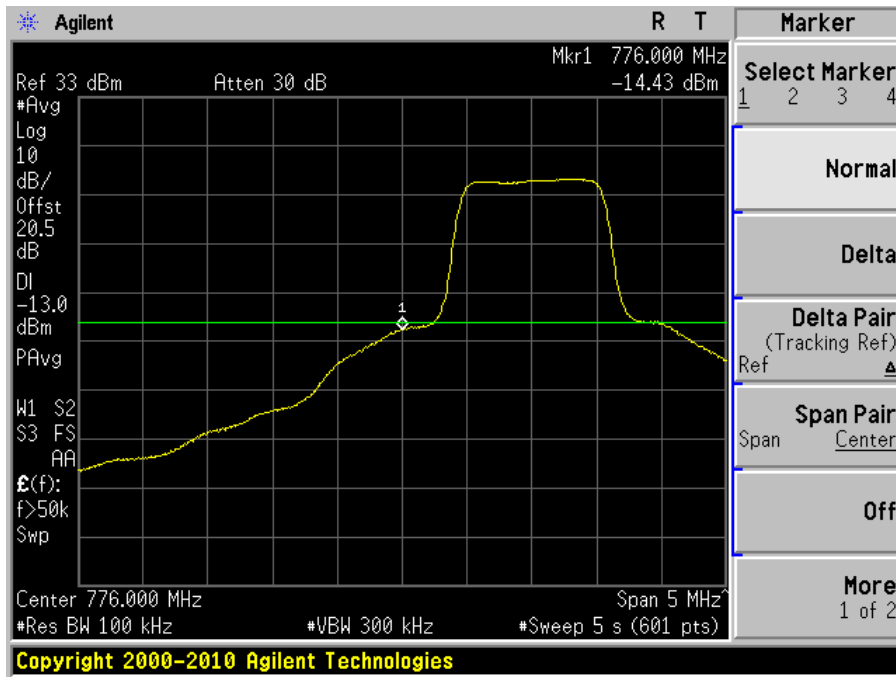


Plot 2: Highest Edge

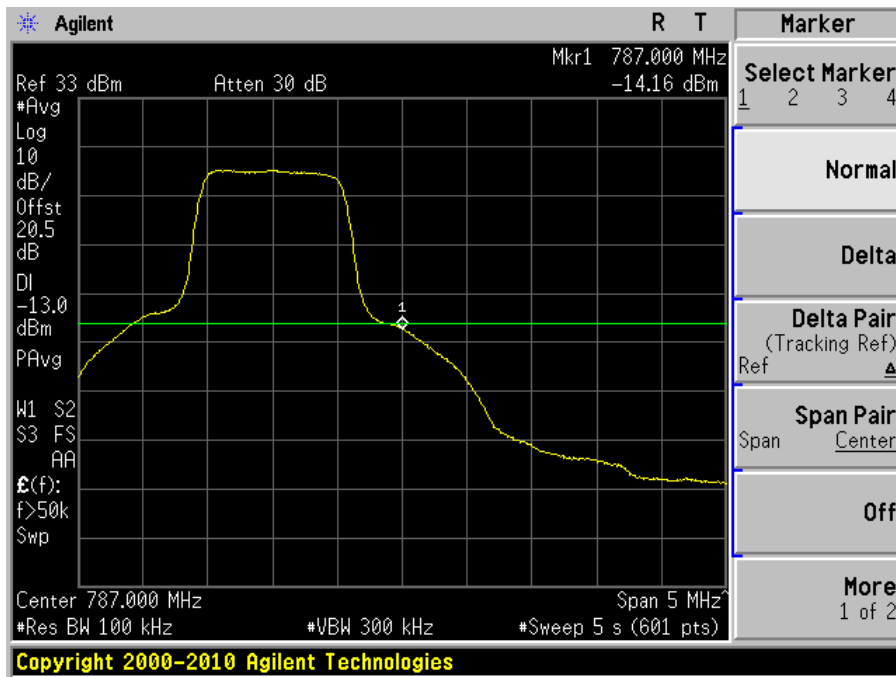


Modulation: LTE-16QAM (1.4 MHz):

Plot 1: Lowest Edge

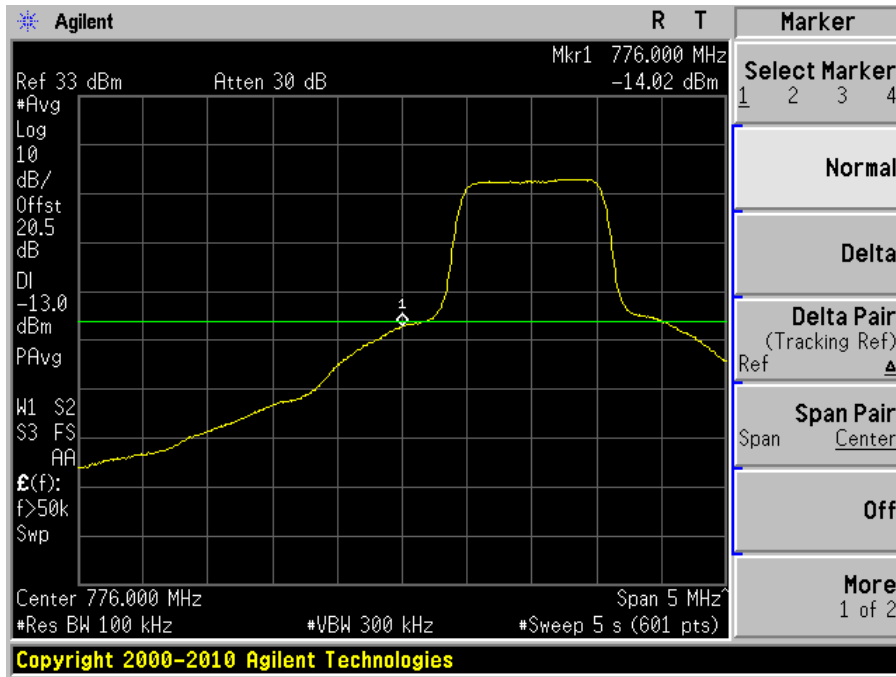


Plot 2: Highest Edge

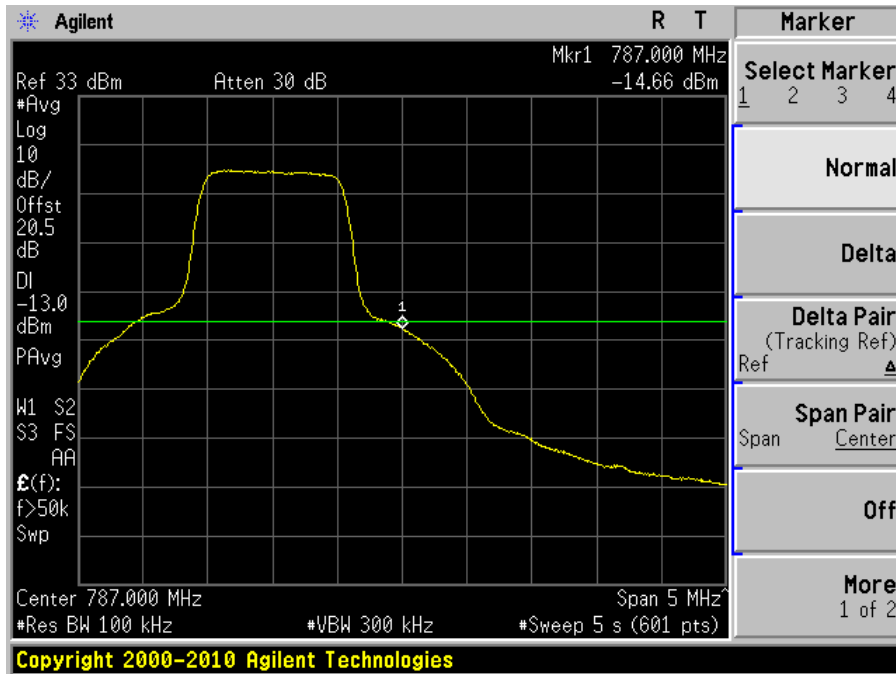


Modulation: LTE-64QAM (1.4 MHz):

Plot 1: Lowest Edge

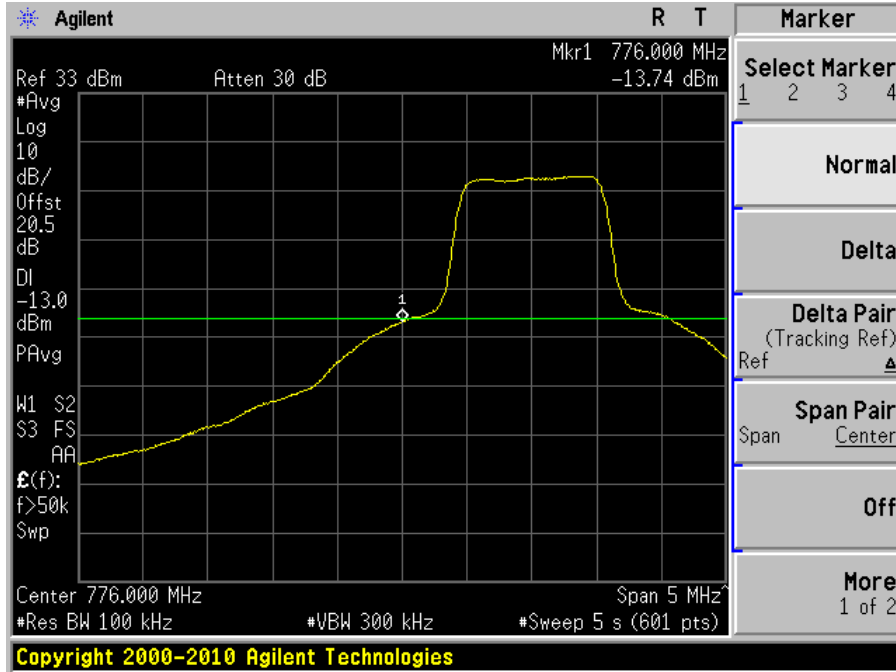


Plot 2: Highest Edge

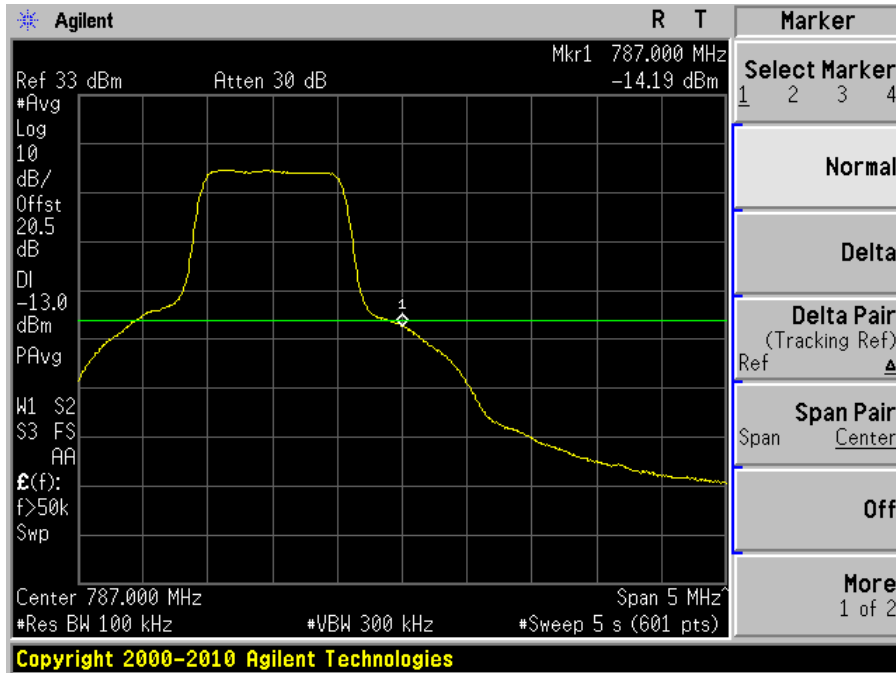


Modulation: LTE-QPSK (3 MHz):

Plot 1: Lowest Edge

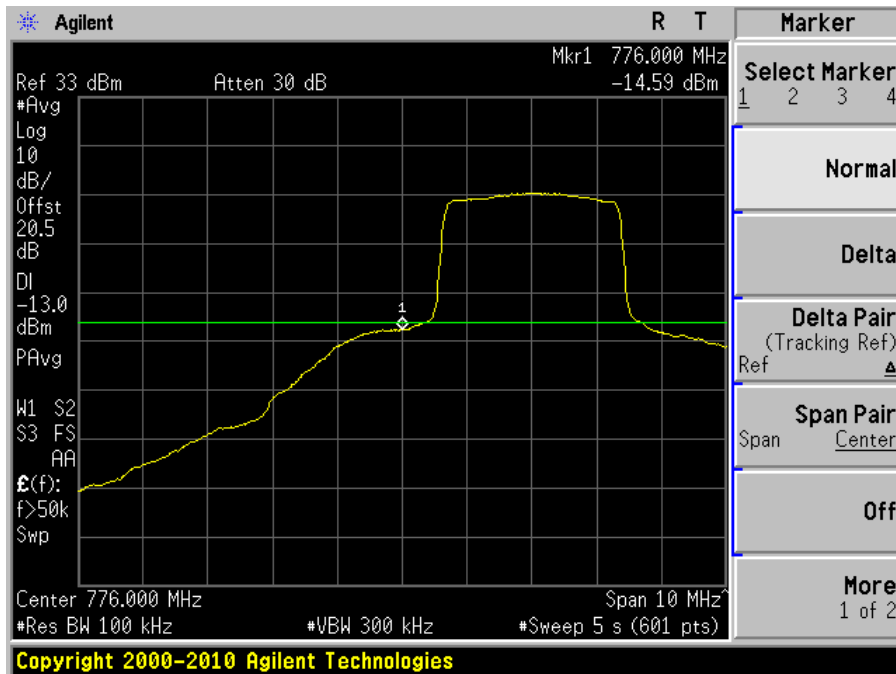


Plot 2: Highest Edge

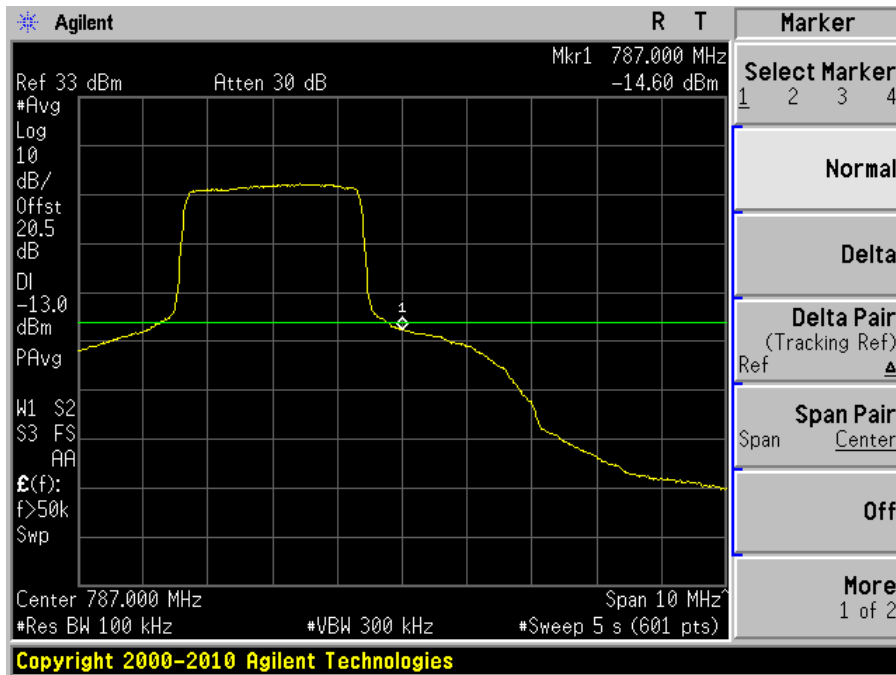


Modulation: LTE-16QAM (3 MHz):

Plot 1: Lowest Edge

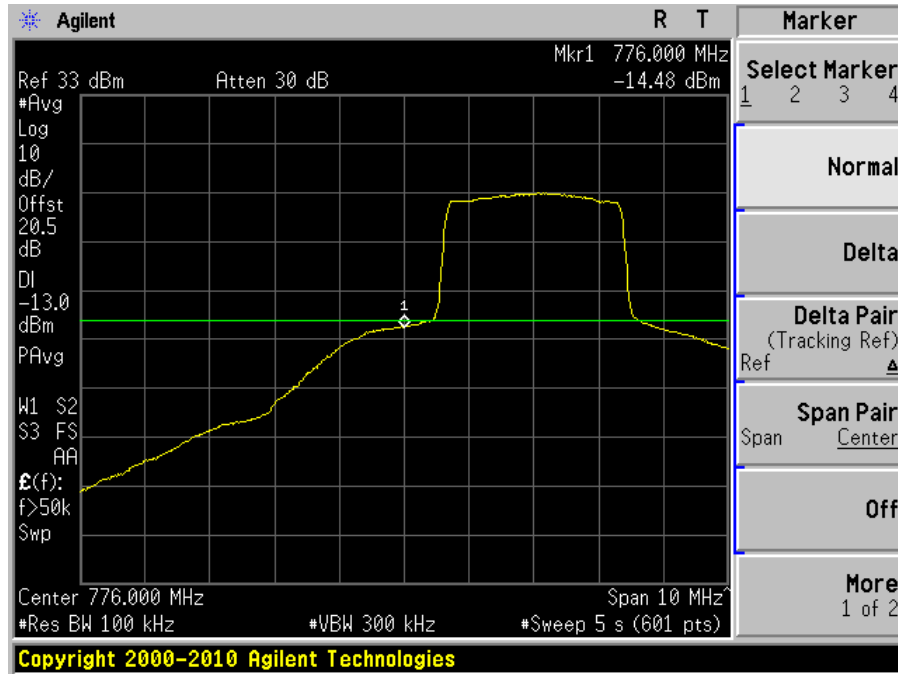


Plot 2: Highest Edge

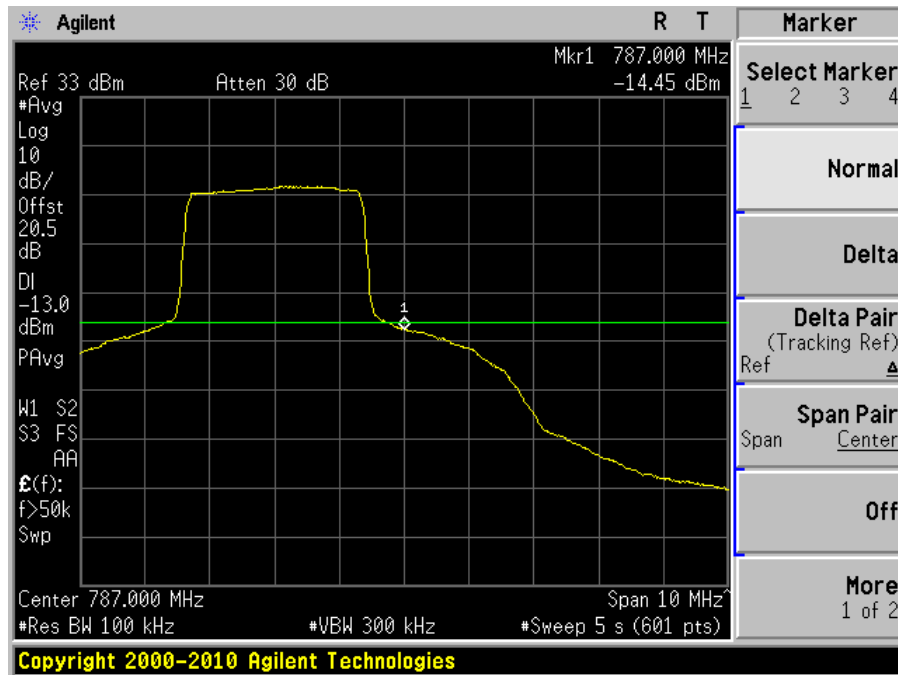


Modulation: LTE-64QAM (3 MHz):

Plot 1: Lowest Edge

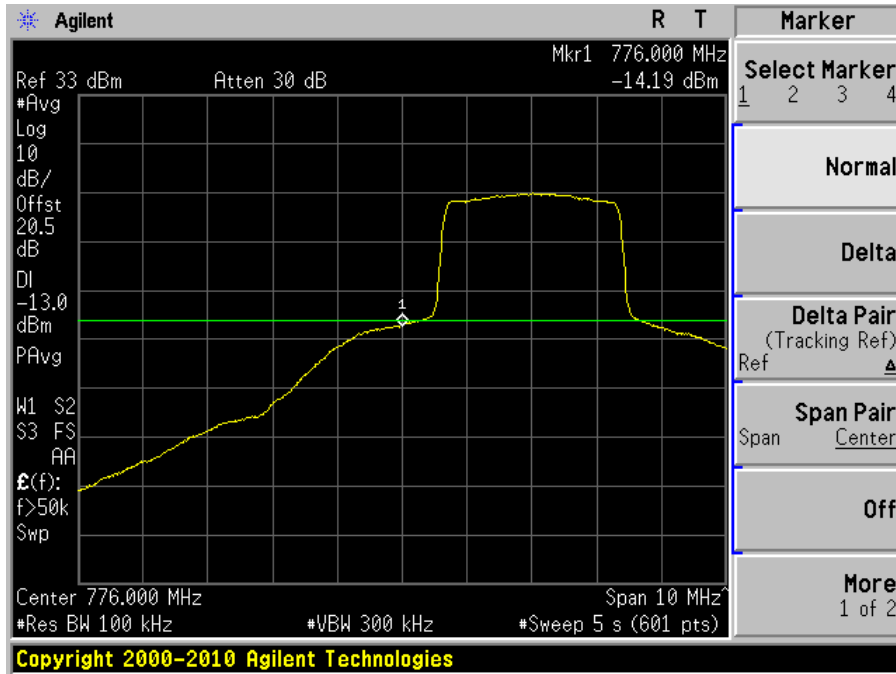


Plot 2: Highest Edge

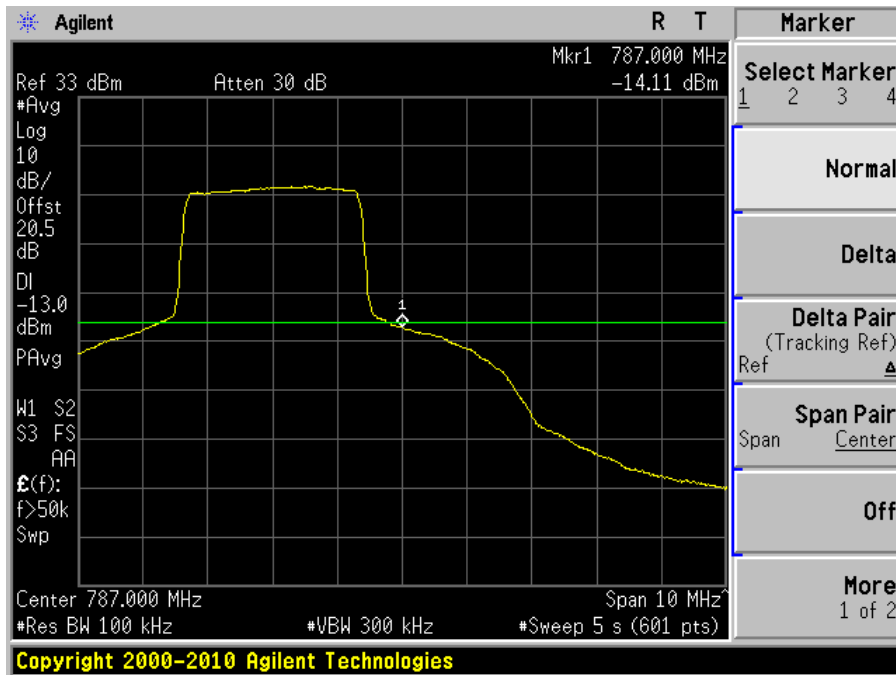


Modulation: LTE-QPSK (5 MHz):

Plot 1: Lowest Edge

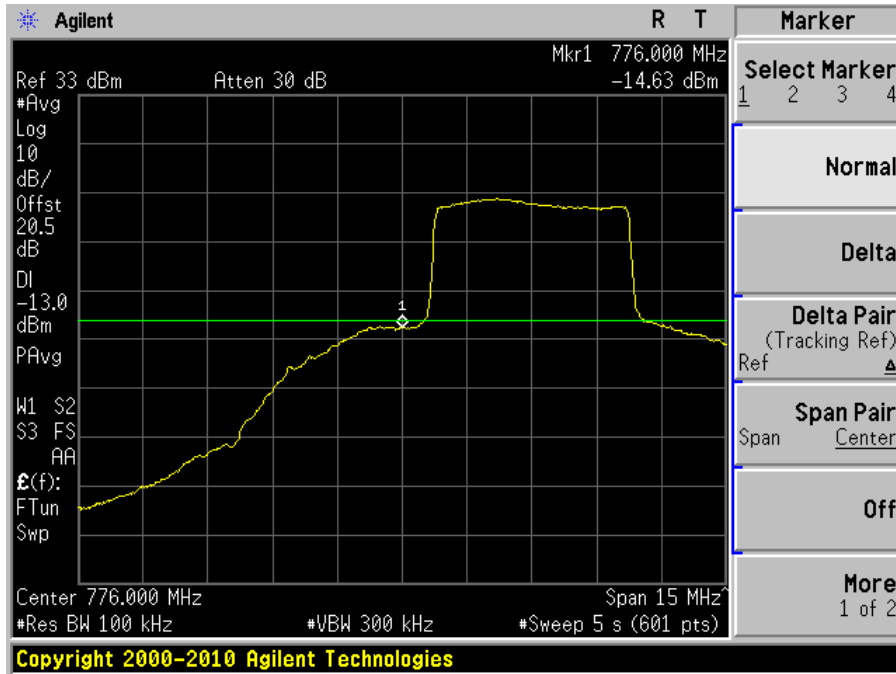


Plot 2: Highest Edge

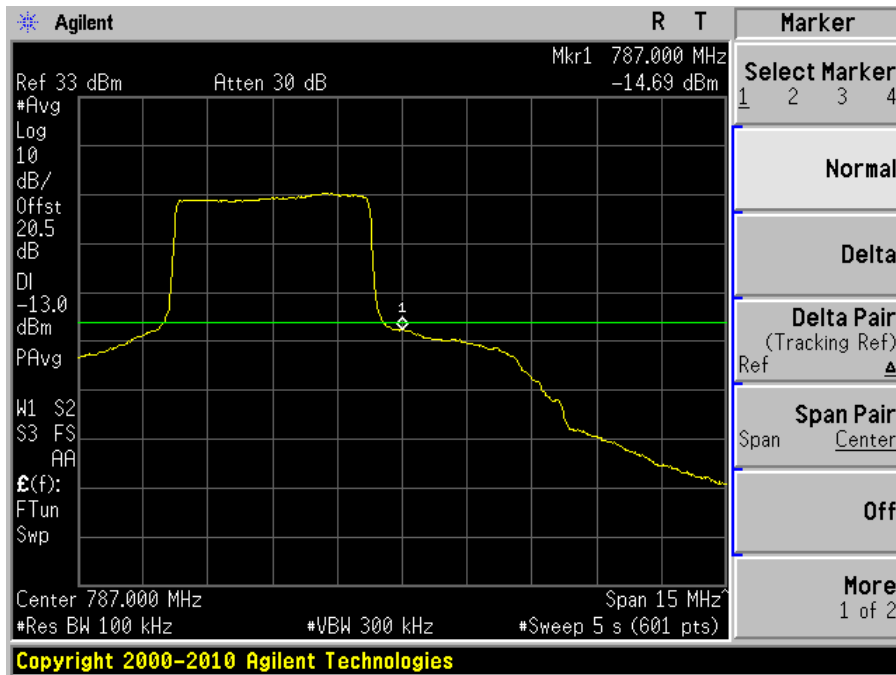


Modulation: LTE-16QAM (5 MHz):

Plot 1: Lowest Edge

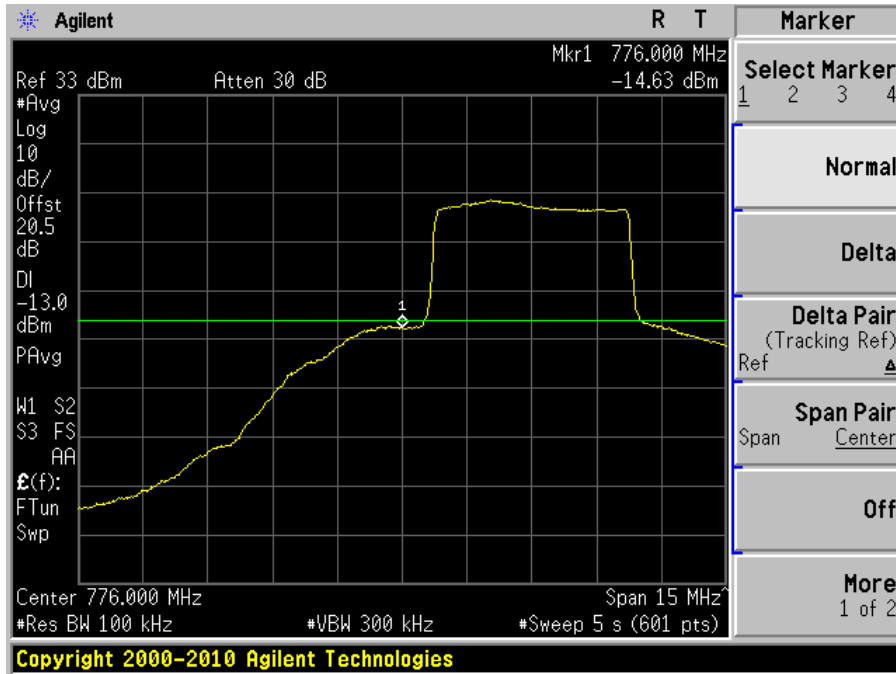


Plot 2: Highest Edge

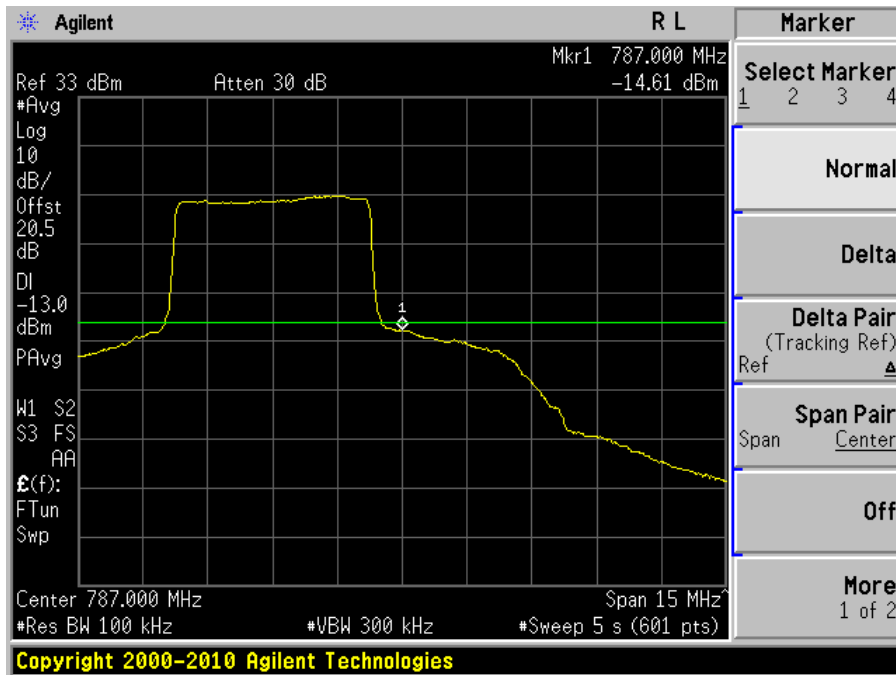


Modulation: LTE-64QAM (5 MHz):

Plot 1: Lowest Edge

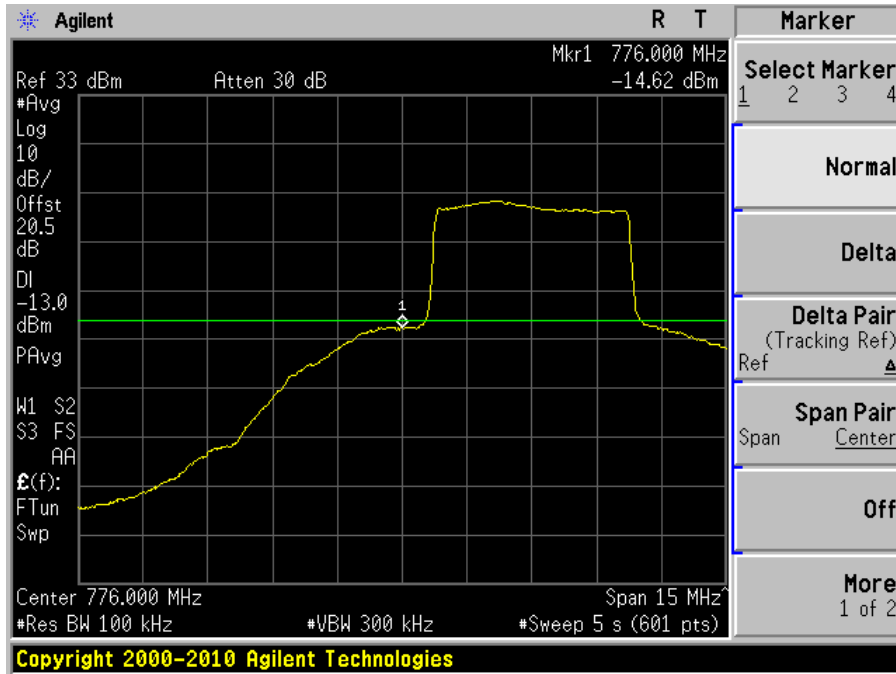


Plot 2: Highest Edge

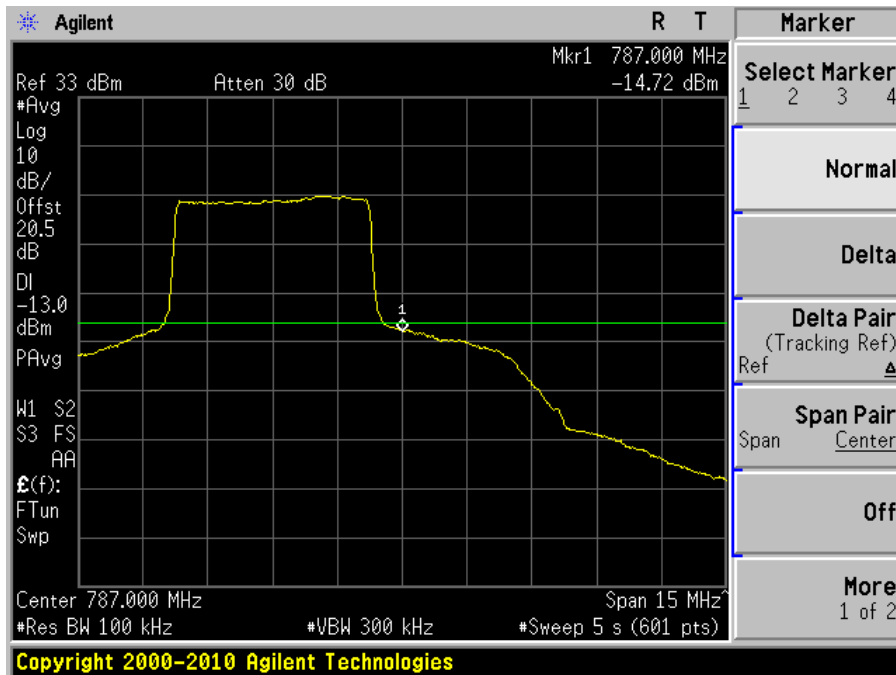


Modulation: LTE-QPSK (10 MHz):

Plot 1: Lowest Edge

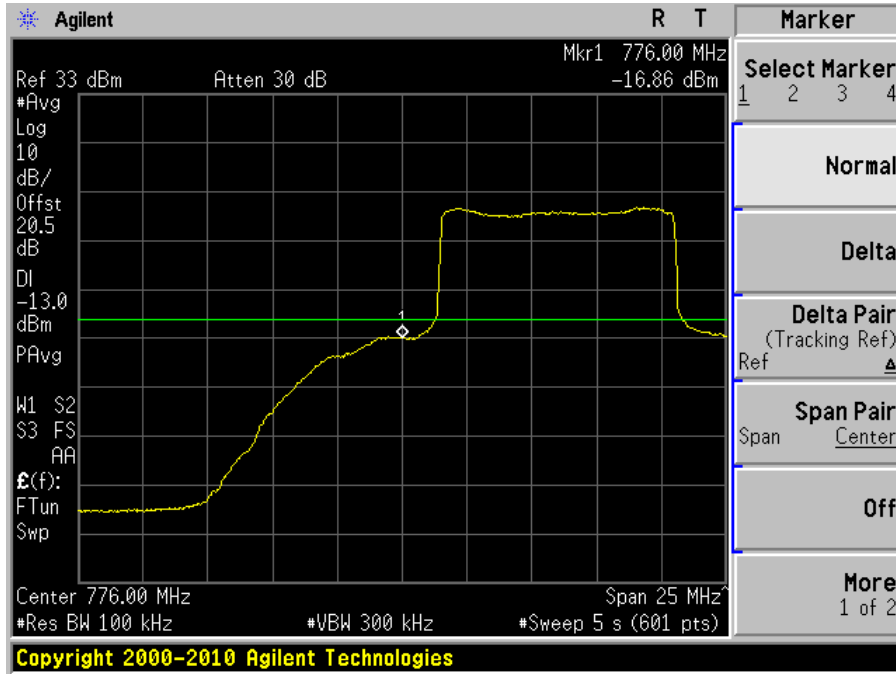


Plot 2: Highest Edge

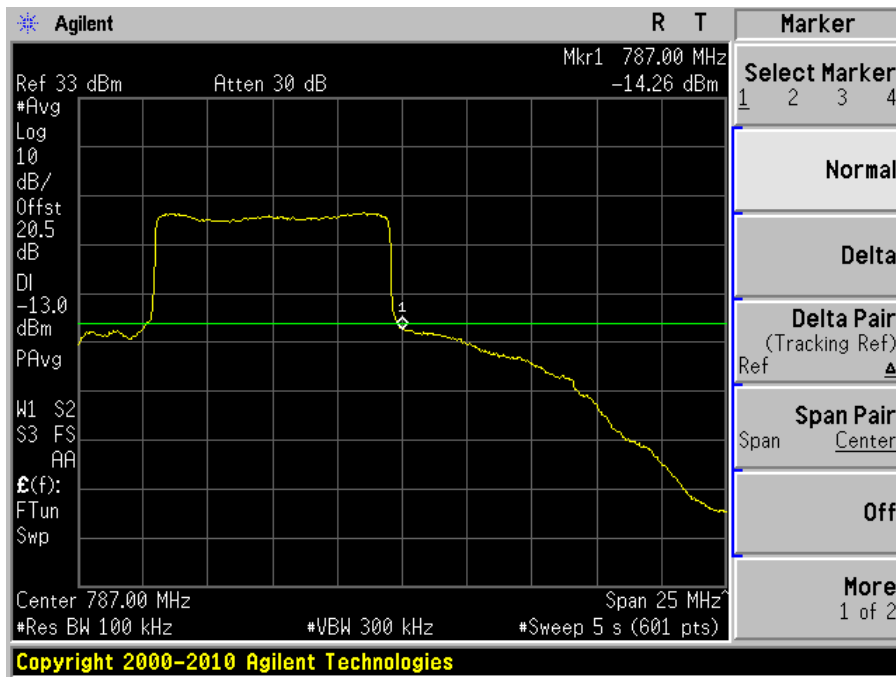


Modulation: LTE-16QAM (10 MHz):

Plot 1: Lowest Edge

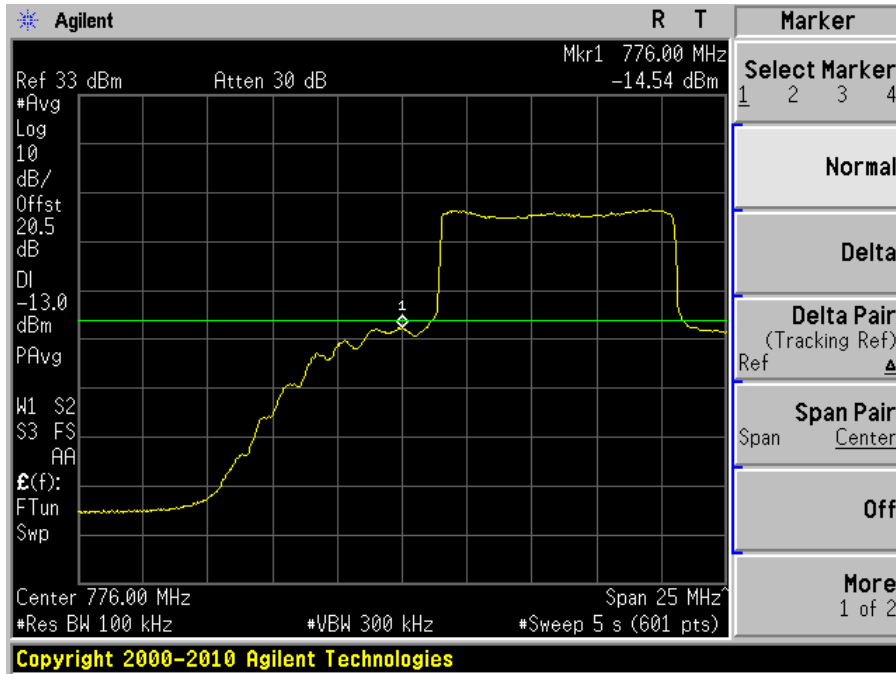


Plot 2: Highest Edge

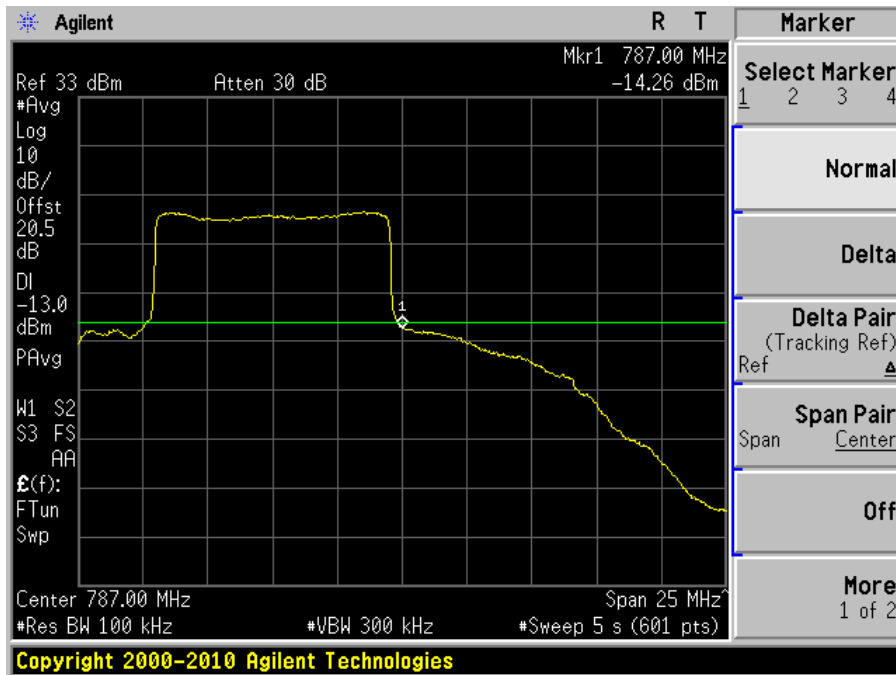


Modulation: LTE-64QAM (10 MHz):

Plot 1: Lowest Edge

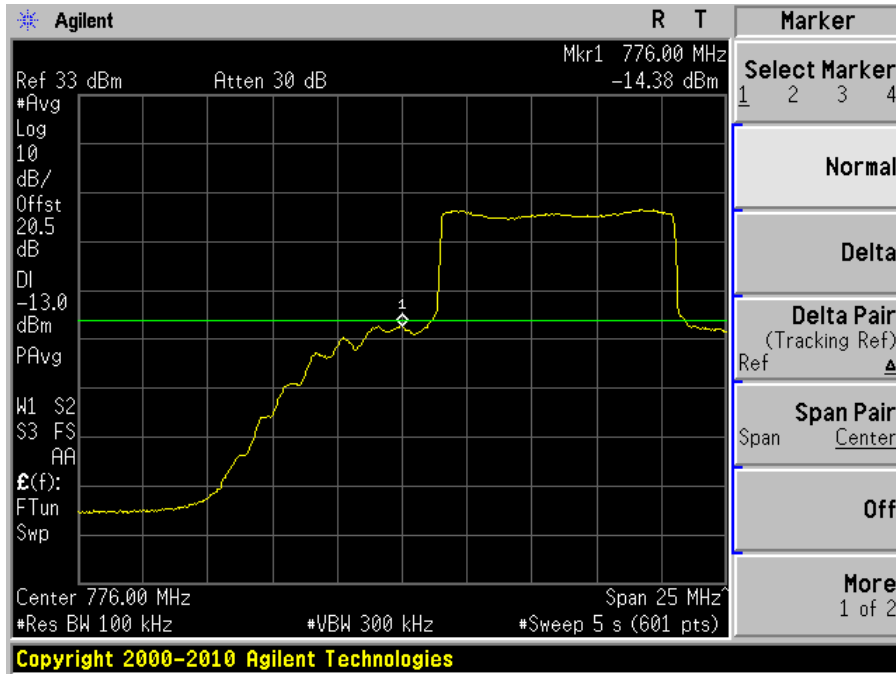

Plot 2: Highest Edge

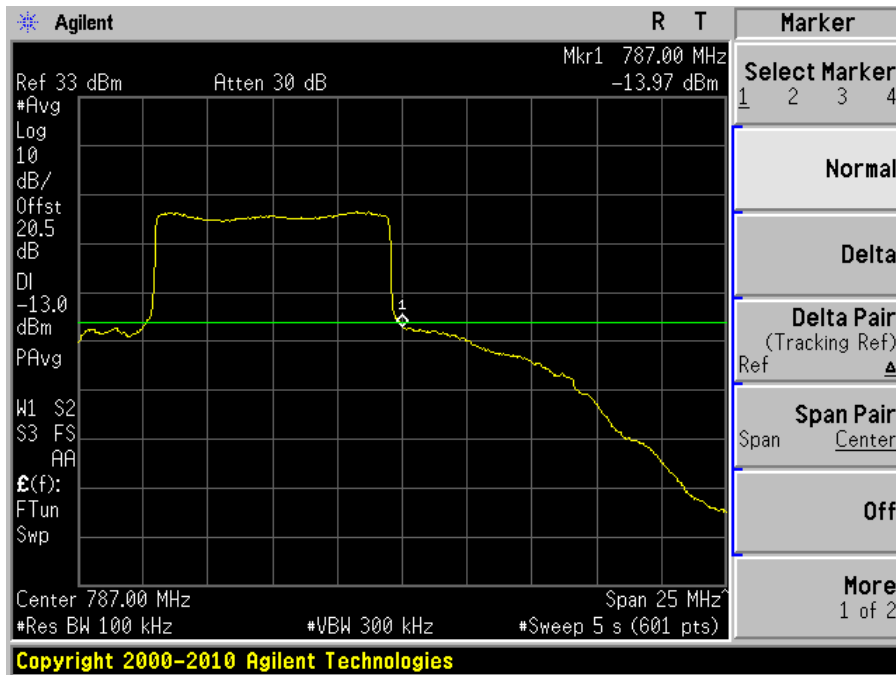

10 FCC §2.1055 & §27.54 – FREQUENCY STABILITY

10.1 Applicable Standard

According to FCC §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

10.2 Test Procedure

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

10.3 Test Results

Not applicable, EUT is a signal booster; the signal source is from the signal generator, no frequency stability applied.

11 FCC §1.1307(b) & §27.52 & §2.1091 - RF EXPOSURE INFORMATION

11.1 Applicable Standard

According to FCC §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	¹ (100)	30
1.34-30	824/f	2.19/f	¹ (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

¹ = Plane-wave equivalent power density

11.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Test Results:

Please refer to the FCC ID: PWO271865 MPE calculation exhibit for the details.