



FCC PART 27



TEST AND MEASUREMENT REPORT

For

Wilson Electronics, Inc.

3301 East Deseret Drive,
St. George, Utah 84790, USA

FCC ID: PWO272365
Model: 272365

Report Type: Original Report
Product Type: Signal Booster
Test Engineer: Quinn Jiang
Report Number: R1106071-27
Report Date: 2011-09-12
Reviewed By: EMC/RF Lead
Prepared By: Bay Area Compliance Laboratories Corp.

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.
* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" ...

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	6
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION	7
2.1	JUSTIFICATION.....	7
2.2	EUT EXERCISE SOFTWARE.....	7
2.3	EQUIPMENT MODIFICATIONS	7
2.4	LOCAL SUPPORT EQUIPMENT AND SOFTWARE LIST AND DETAILS	7
2.5	INTERNAL CONFIGURATIONS OF EUT.....	7
2.6	INTERFACE PORTS AND CABLES	7
2.7	TEST SETUP BLOCK DIAGRAM.....	8
3	SUMMARY OF TEST RESULTS.....	10
4	FCC §2.1046 & §27.50 – RF OUTPUT POWER.....	11
4.1	APPLICABLE STANDARD	11
4.2	TEST PROCEDURE	11
4.3	TEST ENVIRONMENTAL CONDITIONS.....	11
4.4	TEST EQUIPMENT LIST AND DETAILS	11
4.5	TEST RESULTS	11
5	FCC §2.1047 - MODULATION CHARACTERISTIC.....	15
5.1	APPLICABLE STANDARD	15
5.2	TEST RESULT	15
6	FCC §2.1049 & §27.53 - OCCUPIED BANDWIDTH	16
6.1	APPLICABLE STANDARD	16
6.2	TEST PROCEDURE	16
6.3	TEST ENVIRONMENTAL CONDITIONS.....	16
6.4	TEST EQUIPMENT LIST AND DETAILS	16
6.5	TEST RESULTS	17
7	FCC §2.1053 & §27.53 - SPURIOUS RADIATED EMISSIONS.....	49
7.1	APPLICABLE STANDARD	49
7.2	TEST PROCEDURE	49
7.3	TEST ENVIRONMENTAL CONDITIONS.....	49
7.4	TEST EQUIPMENT LIST AND DETAILS	50
7.5	SUMMARY OF TEST RESULTS.....	50
7.6	TEST RESULTS	51
8	FCC §2.1051 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	52
8.1	APPLICABLE STANDARD	52
8.2	TEST PROCEDURE	52
8.3	TEST ENVIRONMENTAL CONDITIONS.....	52
8.4	TEST EQUIPMENT LIST AND DETAILS	52
8.5	TEST RESULTS	52

9 FCC §27.53 – BAND EDGE.....61

- 9.1 APPLICABLE STANDARD 61
- 9.2 TEST PROCEDURE 61
- 9.3 TEST ENVIRONMENTAL CONDITIONS 61
- 9.4 TEST EQUIPMENT LIST AND DETAILS 61
- 9.5 TEST RESULTS 61

10 FCC §2.1055 & §27.54 – FREQUENCY STABILITY.....92

- 10.1 APPLICABLE STANDARD 92
- 10.2 TEST PROCEDURE 92
- 10.3 TEST RESULTS 92

11 FCC §1.1307(B) & §27.52 & §2.1091 - RF EXPOSURE INFORMATION.....93

- 11.1 APPLICABLE STANDARD 93
- 11.2 MPE PREDICTION 93

12 EXHIBIT A - FCC ID LABEL REQUIREMENTS.....96

- 12.1 FCC ID LABEL REQUIREMENT 96
- 12.2 FCC ID LABEL CONTENTS 96
- 12.3 FCC LABEL LOCATION ON EUT 96

13 EXHIBIT B - TEST SETUP PHOTOGRAPHS.....97

- 13.1 RADIATED EMISSIONS - FRONT VIEW 97
- 13.2 RADIATED EMISSIONS 30 MHZ TO 1 GHZ- REAR VIEW 97
- 13.3 RADIATED EMISSIONS ABOVE 1 GHZ- REAR VIEW 98
- 13.4 CONDUCTED MEASUREMENT VIEW 98

14 EXHIBIT C- EUT PHOTOGRAPHS99

- 14.1 EUT - TOP VIEW..... 99
- 14.2 EUT - SIDE VIEW 1 99
- 14.3 EUT - SIDE VIEW 2 100
- 14.4 EUT – UPLINK PORT VIEW 100
- 14.5 EUT – DOWNLINK PORT VIEW 101
- 14.6 EUT - BOTTOM VIEW 101
- 14.7 EUT – COVER OFF VIEW..... 102
- 14.8 EUT – COVER OFF CLOSE UP VIEW 102
- 14.9 EUT – MAIN PCB BOARD FRONT (WITH SHIELDS) VIEW 103
- 14.10 EUT – MAIN PCB BOARD FRONT (WITHOUT SHIELDS) VIEW 103
- 14.11 EUT – MAIN PCB BOARD REAR VIEW 104
- 14.12 POWER SUPPLY VIEW 104

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1106071-27	Original Report	2011-07-14
1	R1106071-27	Update MPE for Uplink Band	2011-09-12

1 GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of Wilson Electronics, Inc., and their product, FCC ID: PWO272365, Model: 272365, which will henceforth be referred to as the EUT “Equipment Under Test”. The EUT is a single band, wireless, in-building bi-directional signal booster amplifier for enhancing the range of AWS devices. 50 Ω N-type connectors are used for connecting to both the inside and outside antenna connections of the amplifier. The downlink frequency range is 2110-2155 MHz. The uplink frequency range is 1710-1755 MHz. The amplifier contains a microcontroller which controls the gain. The self-generated clock frequency of the microcontroller is 8 MHz. The modulation types are UMTS and OFDMA.

Technical Specification

Modulation	Frequency (MHz)	
	Downlink	Uplink
LTE	2110-2155	1710-1755
WCDMA	2110-2155	1710-1755
HSDPA	2110-2155	1710-1755
HSUPA	2110-2155	1710-1755

1.2 Mechanical Description

The EUT Approximate measurement is: 155 mm (L) x 100 mm (W) x 30 mm (H). Weight: 586g.

The test data gathered are from production sample, serial number: 80236599991234568, provided by the manufacturer.

1.3 Objective

This type approval report is prepared on behalf of *Wilson Electronics, Inc.*, in accordance with Part 2, Subpart J, and Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, band edge, and conducted and radiated margin.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 27 - Miscellaneous Wireless Communications Services
Applicable Standards: TIA/EIA-603-C, ANSI C63.4-2003.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from +2.0 dB for Conducted Emissions tests and +4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

2 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

N/A, signal was sent through EUT using a signal generator, device was set to normal operating mode.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Local Support Equipment and Software List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746
Dell	Laptop	Latitude D600	CN-0X2034-48643-3A6-8307
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309
Agilent	Signal Studio for 3GPP LTE	N7624B	-

2.5 Internal Configurations of EUT


Manufacturer	Description	Model	Serial Number
Wilson Electronics, Inc.	Main PCB Board	802365 Rev A	-

2.6 Interface Ports and Cables


Cable Description	Length (m)	To	From
RF Cable	< 1	EUT	Spectrum Analyzer
RF Cable	< 1	EUT	Signal Generator

2.7 Test Setup Block Diagram

Conducted RF

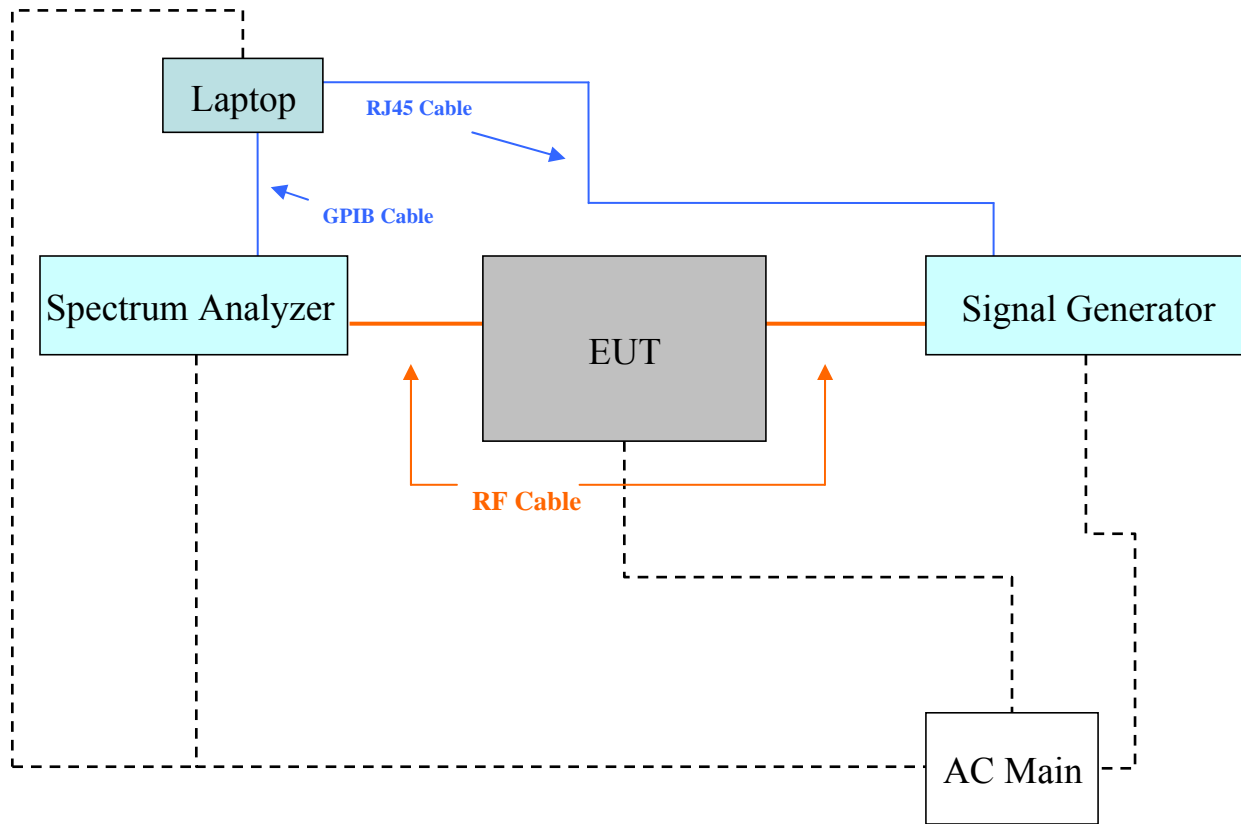

Radiated Emission

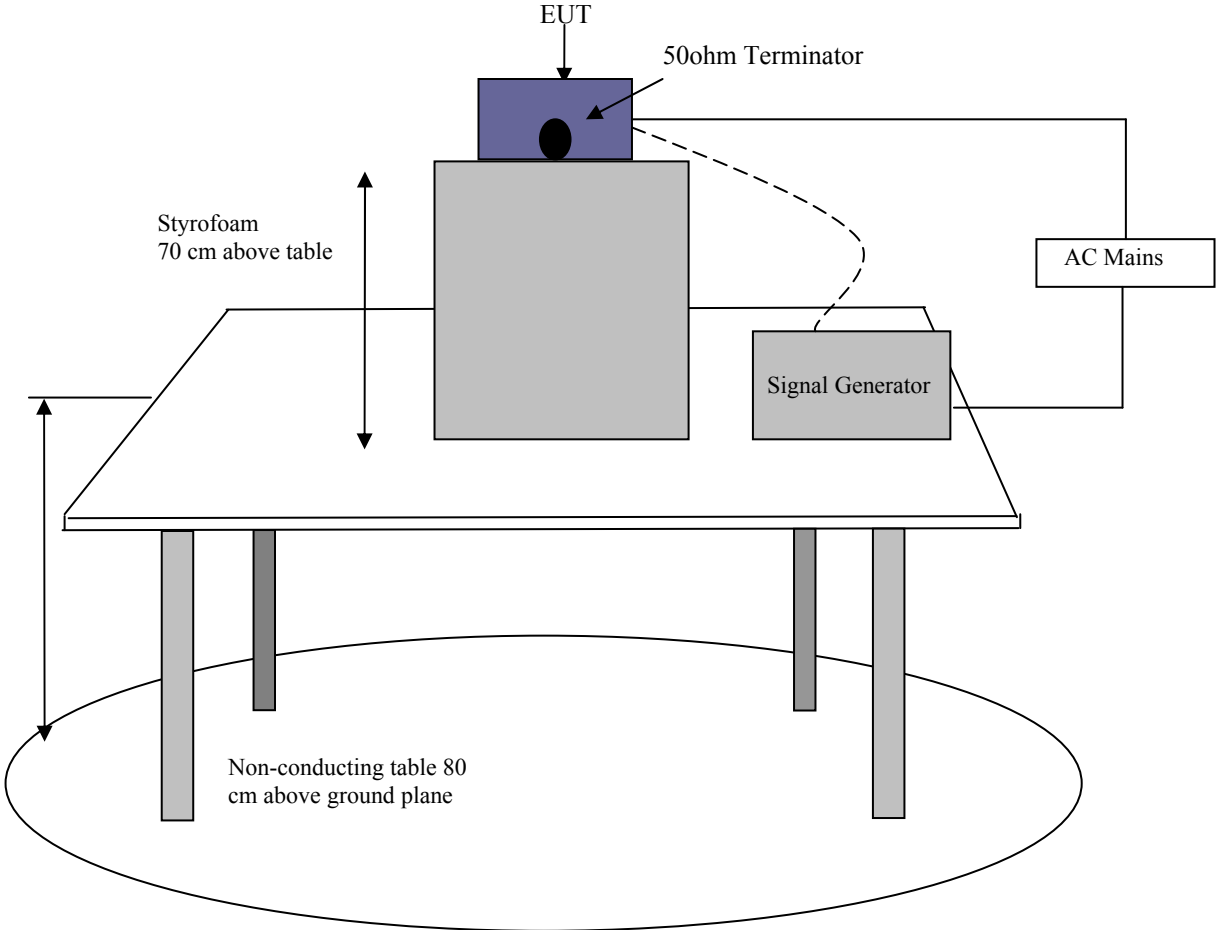

3 SUMMARY OF TEST RESULTS

FCC Rules	Description of Tests	Results
§2.1046, §27.50(d)(i)	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A
§2.1049, §27.53 (c)	Occupied Bandwidth	Compliant
§2.1053, §27.53 (c)(g)	Spurious Radiated Emissions	Compliant
§2.1051, §27.53 (c)(g)	Spurious Emissions at Antenna Terminals	Compliant
§27.53 (c)(g)	Band Edge	Compliant
§2.1055, §27.54	Frequency Stability	Note ¹
§2.1091, §27.52	RF Exposure	Compliant

Note¹: EUT is a booster/amplifier.

4 FCC §2.1046 & §27.50 – RF OUTPUT POWER

4.1 Applicable Standard

According to FCC §27.50, the maximum effective radiated power (ERP) of fixed and base station must not exceed 1000 Watts.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the signal generator and the spectrum analyzer through sufficient attenuation.

4.3 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	38-45 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-16 to 2011-06-18 at RF Site.

4.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

4.5 Test Results

Please refer to the following tables.

Maximum Output Power (LTE) – Downlink (2110-2155 MHz)

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 2110 - 2155 MHz	QPSK (1.4 MHz)	2111	-48	21.92
	QPSK (1.4 MHz)	2132	-48	18.69
	QPSK (1.4 MHz)	2154	-48	21.14
	16QAM (1.4 MHz)	2111	-48	21.90
	16QAM (1.4 MHz)	2132	-48	18.69
	16QAM (1.4 MHz)	2154	-48	21.02
	64QAM (1.4 MHz)	2111	-48	21.98
	64QAM (1.4 MHz)	2132	-48	18.76
	64QAM (1.4 MHz)	2154	-48	21.08
	QPSK (3 MHz)	2112	-48	21.93
	QPSK (3 MHz)	2132	-48	18.94
	QPSK (3 MHz)	2153	-48	21.40
	16QAM (3 MHz)	2112	-48	21.91
	16QAM (3 MHz)	2132	-48	18.75
	16QAM (3 MHz)	2153	-48	21.48
	64QAM (3 MHz)	2112	-48	21.83
	64QAM (3 MHz)	2132	-48	18.80
	64QAM (3 MHz)	2153	-48	21.45
	QPSK (5 MHz)	2113	-48	21.55
	QPSK (5 MHz)	2132	-48	18.82
	QPSK (5 MHz)	2152	-48	21.94
	16QAM (5 MHz)	2113	-48	21.55
	16QAM (5 MHz)	2132	-48	18.79
	16QAM (5 MHz)	2152	-48	21.97
	64QAM (5 MHz)	2113	-48	21.56
	64QAM (5 MHz)	2132	-48	18.92
	64QAM (5 MHz)	2152	-48	21.96
	QPSK (10 MHz)	2115	-48.8	20.06
	QPSK (10 MHz)	2132	-48.8	18.38
	QPSK (10 MHz)	2150	-48.8	21.97
	16QAM (10 MHz)	2115	-48.8	20.08
	16QAM (10 MHz)	2132	-48.8	18.39
16QAM (10 MHz)	2150	-48.8	21.98	
64QAM (10 MHz)	2115	-48.8	20.07	
64QAM (10 MHz)	2132	-48.8	18.38	
64QAM (10 MHz)	2150	-48.8	21.95	

Maximum Output Power (LTE) – Uplink (1711-1755 MHz)

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Uplink 1710 - 1755 MHz	QPSK (1.4 MHz)	1711	-34.40	24.23
	QPSK (1.4 MHz)	1732	-34.40	26.93
	QPSK (1.4 MHz)	1754	-34.40	25.45
	16QAM (1.4 MHz)	1711	-34.80	23.70
	16QAM (1.4 MHz)	1732	-34.80	26.42
	16QAM (1.4 MHz)	1754	-34.80	25.04
	64QAM (1.4 MHz)	1711	-34.90	23.70
	64QAM (1.4 MHz)	1732	-34.90	26.35
	64QAM (1.4 MHz)	1754	-34.90	24.91
	QPSK (3 MHz)	1712	-33.10	25.33
	QPSK (3 MHz)	1732	-33.10	27.65
	QPSK (3 MHz)	1753	-33.10	26.51
	16QAM (3 MHz)	1712	-33.80	24.65
	16QAM (3 MHz)	1732	-33.80	26.96
	16QAM (3 MHz)	1753	-33.80	25.87
	64QAM (3 MHz)	1712	-33.80	24.59
	64QAM (3 MHz)	1732	-33.80	27.02
	64QAM (3 MHz)	1753	-33.80	25.77
	QPSK (5 MHz)	1713	-32.80	25.77
	QPSK (5 MHz)	1732	-32.80	27.89
	QPSK (5 MHz)	1752	-32.80	26.86
	16QAM (5 MHz)	1713	-33.10	25.31
	16QAM (5 MHz)	1732	-33.10	27.40
	16QAM (5 MHz)	1752	-33.10	26.38
	64QAM (5 MHz)	1713	-33.10	25.24
	64QAM (5 MHz)	1732	-33.10	27.34
	64QAM (5 MHz)	1752	-33.10	26.32
	QPSK (10 MHz)	1715	-32.60	26.34
	QPSK (10 MHz)	1732	-32.60	27.92
	QPSK (10 MHz)	1750	-32.60	27.15
	16QAM (10 MHz)	1715	-32.40	26.26
	16QAM (10 MHz)	1732	-32.40	27.74
16QAM (10 MHz)	1750	-32.40	27.04	
64QAM (10 MHz)	1715	-32.50	26.24	
64QAM (10 MHz)	1732	-32.50	27.71	
64QAM (10 MHz)	1750	-32.50	26.98	

Maximum Output Power (WCDMA)

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 2110-2155 MHz	WCDMA	2112.4	-47.9	21.69
		2132.4	-47.9	19.07
		2152.6	-47.9	21.58
Uplink 1710-1755 MHz	WCDMA	1712.4	-34.9	24.80
		1732.4	-34.9	26.05
		1752.6	-34.9	24.77

Maximum Output Power (HSDPA)

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 2110-2155 MHz	HSDPA	2112.4	-47.9	21.65
		2132.4	-47.9	19.05
		2152.6	-47.9	21.54
Uplink 1710- 1755 MHz	HSDPA	1712.4	-34.9	23.58
		1732.4	-34.9	25.99
		1752.6	-34.9	24.66

Maximum Output Power (HSUPA)

Mode	Modulation	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
Downlink 2110-2155 MHz	HSUPA	2112.4	-47.9	21.64
		2132.4	-47.9	19.05
		2152.6	-47.9	21.56
Uplink 1710-1755 MHz	HSUPA	1712.4	-34.9	23.53
		1732.4	-34.9	25.97
		1752.6	-34.9	24.64

5 FCC §2.1047 - MODULATION CHARACTERISTIC

5.1 Applicable Standard

According to FCC §2.1047(d) and Part 27, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

5.2 Test Result

N/A

6 FCC §2.1049 & §27.53 - OCCUPIED BANDWIDTH

6.1 Applicable Standard

Requirements: FCC §2.1049 and §27.53.

6.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 kHz and the 26 dB & 99% bandwidth was recorded.

6.3 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	38-45 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-16 to 2011-06-18 at RF Site.

6.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.5 Test Results

Occupied Bandwidth (LTE) – Downlink (2110-2155 MHz)

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Downlink 2110-2155 MHz	QPSK (1.4 MHz)	2132	1.1635	1.1628
	16QAM (1.4 MHz)	2132	1.1636	1.1642
	64QAM (1.4 MHz)	2132	1.1640	1.1633
	QPSK (3 MHz)	2132	2.7315	2.7290
	16QAM (3 MHz)	2132	2.7329	2.7305
	64QAM (3 MHz)	2132	2.7314	2.7288
	QPSK (5 MHz)	2132	4.5064	4.4958
	16QAM (5 MHz)	2132	4.5076	4.4959
	64QAM (5 MHz)	2132	4.5070	4.4963
	QPSK (10 MHz)	2132	8.9376	8.9335
	16QAM (10 MHz)	2132	8.9394	8.9374
	64QAM (10 MHz)	2132	8.9364	8.9331

Occupied Bandwidth (LTE) – Uplink (1710-1755 MHz)

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Uplink 1710-1755 MHz	QPSK (1.4 MHz)	1732	1.1493	1.1612
	16QAM (1.4 MHz)	1732	1.1466	1.1598
	64QAM (1.4 MHz)	1732	1.1479	1.1615
	QPSK (3 MHz)	1732	2.7172	2.7236
	16QAM (3 MHz)	1732	2.7178	2.7264
	64QAM (3 MHz)	1732	2.7142	2.7209
	QPSK (5 MHz)	1732	4.4817	4.4880
	16QAM (5 MHz)	1732	4.4863	4.4897
	64QAM (5 MHz)	1732	4.4832	4.4867
	QPSK (10 MHz)	1732	8.9157	8.9155
	16QAM (10 MHz)	1732	8.9208	8.9163
	64QAM (10 MHz)	1732	8.9236	8.9218


Occupied Bandwidth (WCDMA/HSDPA/HSUPA)

Mode	Modulation	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
Downlink 2110 - 2155 MHz	WCDMA	2132.4	4.2138	4.1914
Uplink 1710 - 1755 MHz	WCDMA	1732.4	4.2052	4.2151
Downlink 2110 - 2155 MHz	HSDPA	2132.4	4.2144	4.1914
Uplink 1710 - 1755 MHz	HSDPA	1732.4	4.2080	4.2188
Downlink 2110 - 2155 MHz	HSUPA	2132.4	4.2117	4.1849
Uplink 1710 - 1755 MHz	HSUPA	1732.4	4.2037	4.2186


LTE, Downlink: 2110-2155 MHz

LTE-QPSK (1.4 MHz), Frequency: 2132 MHz

Input

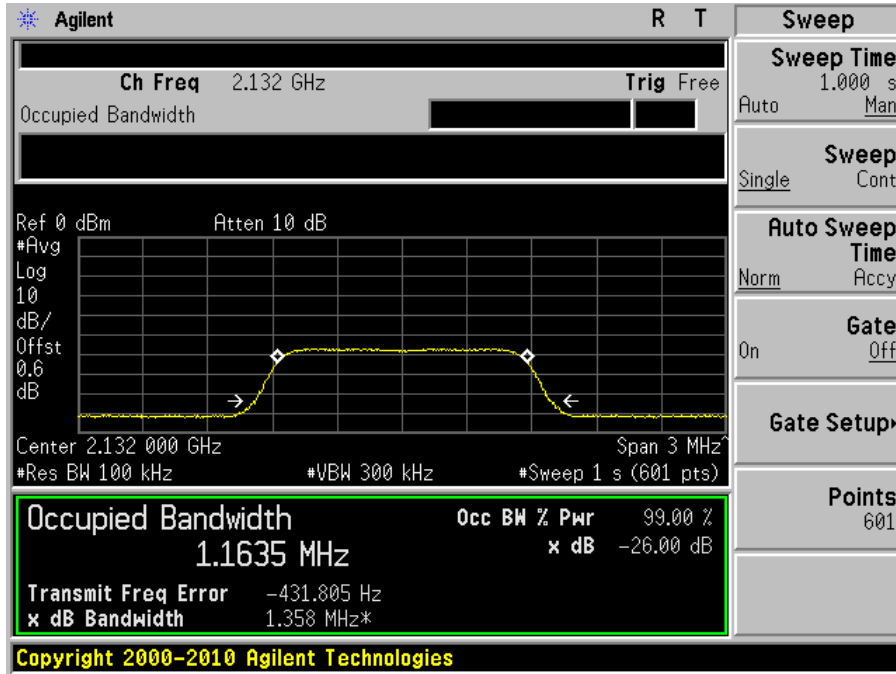


Output

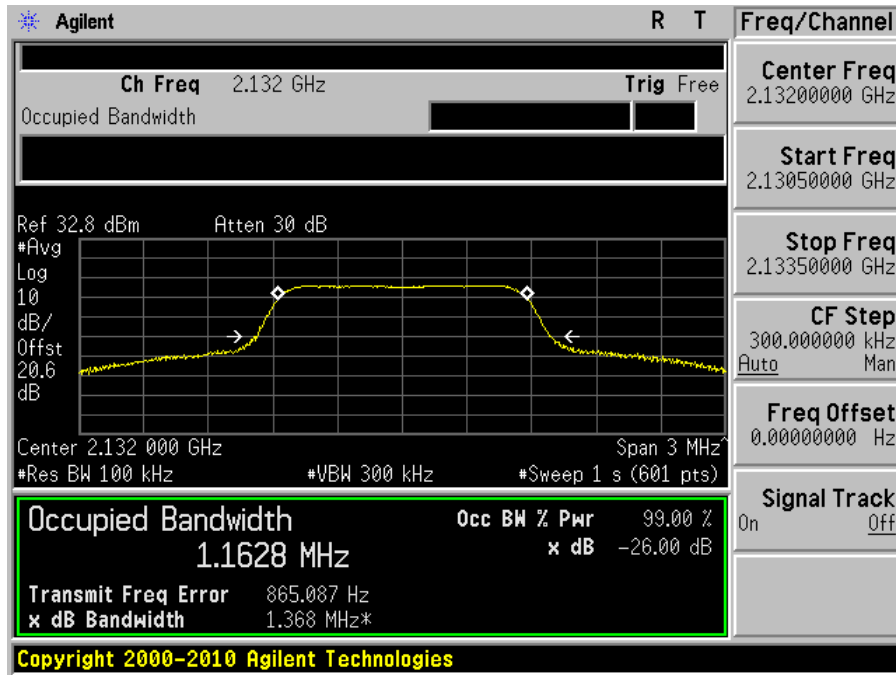


LTE-16QAM (1.4 MHz), Frequency: 2132 MHz

Input

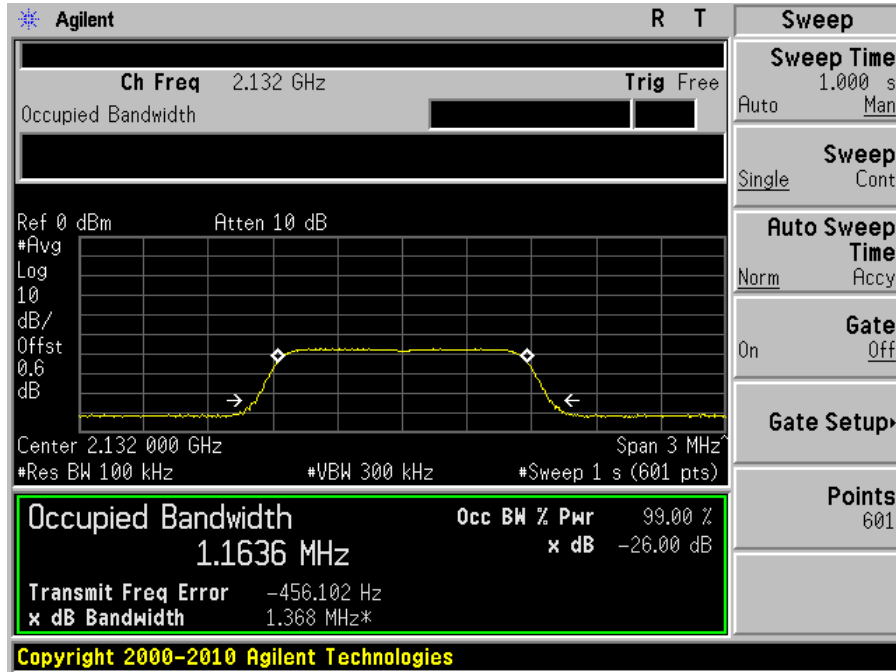


Output

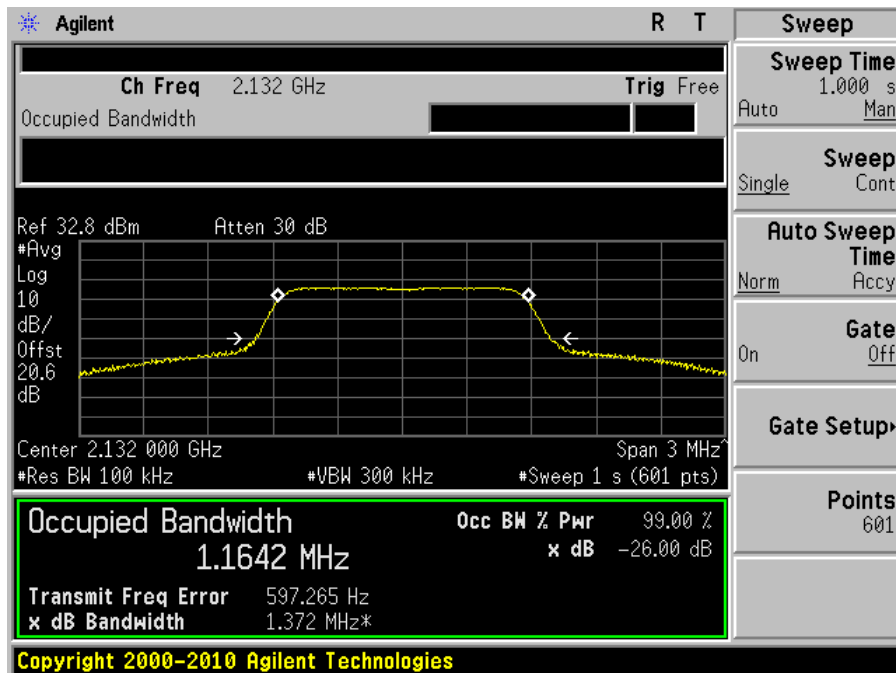


LTE-64QAM (1.4 MHz), Frequency: 2132 MHz

Input

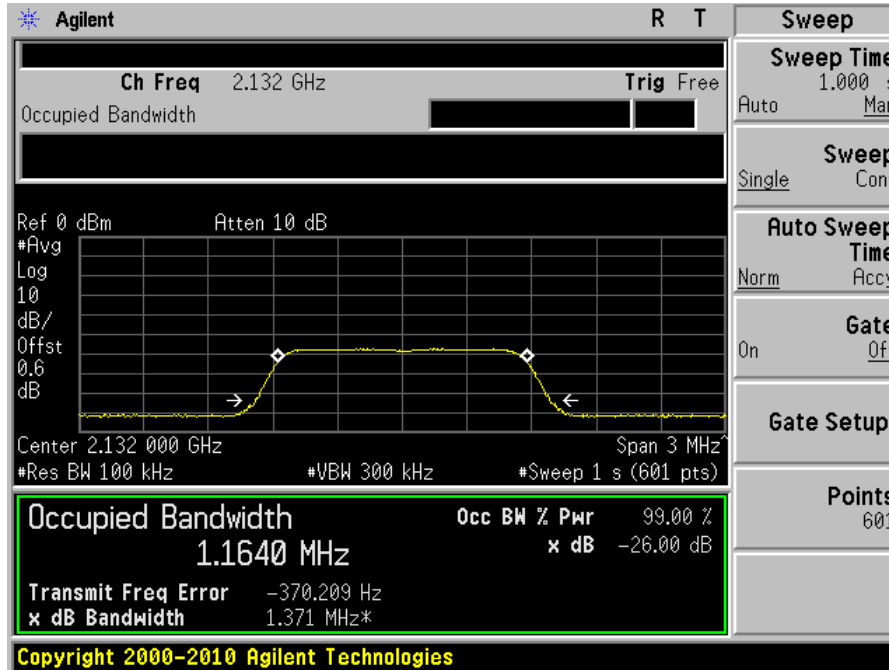


Output

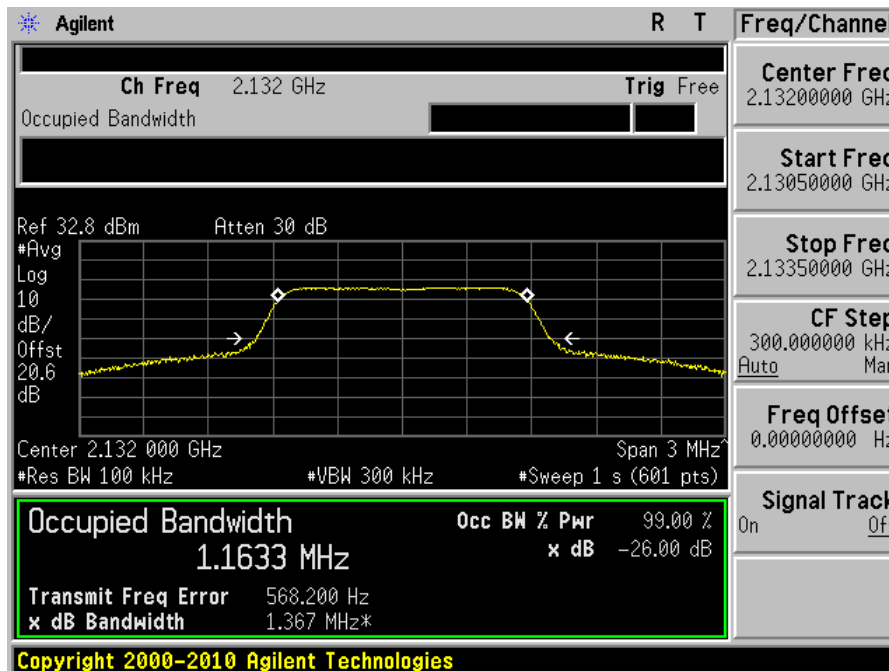


LTE-QPSK (3 MHz), Frequency: 2132 MHz

Input

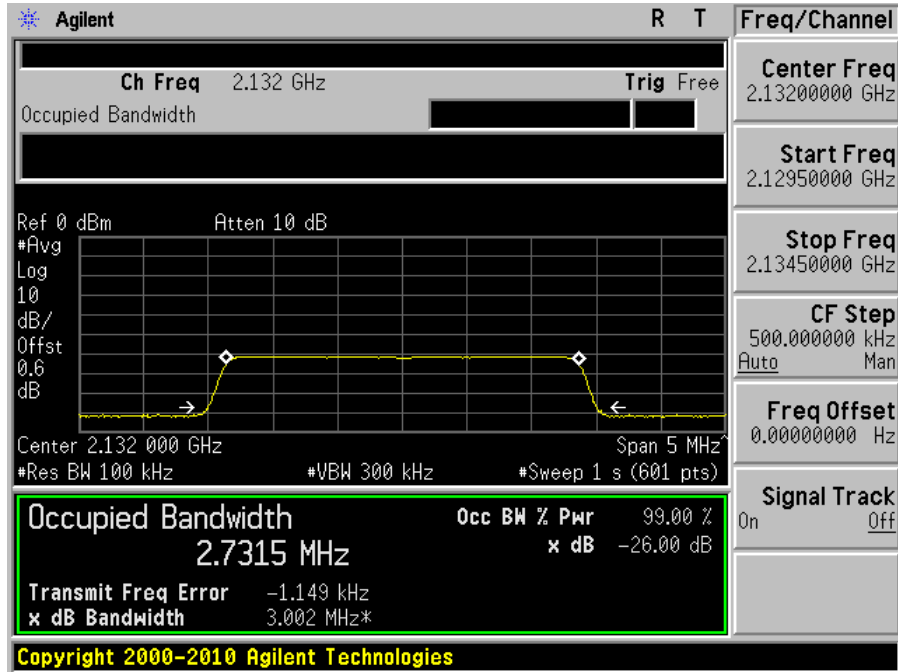


Output

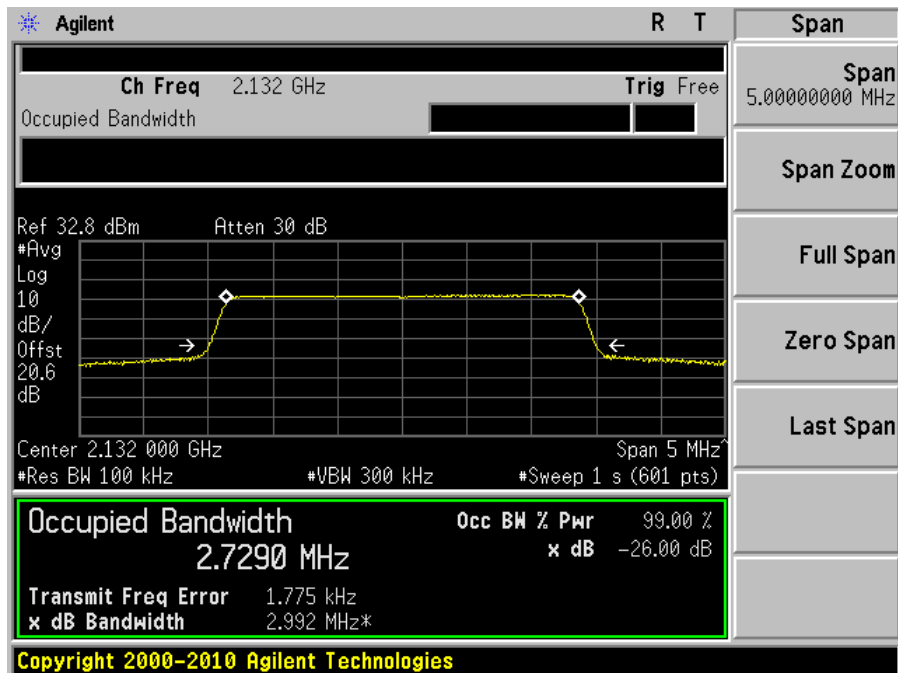


LTE-16QAM (3 MHz), Frequency: 2132 MHz

Input

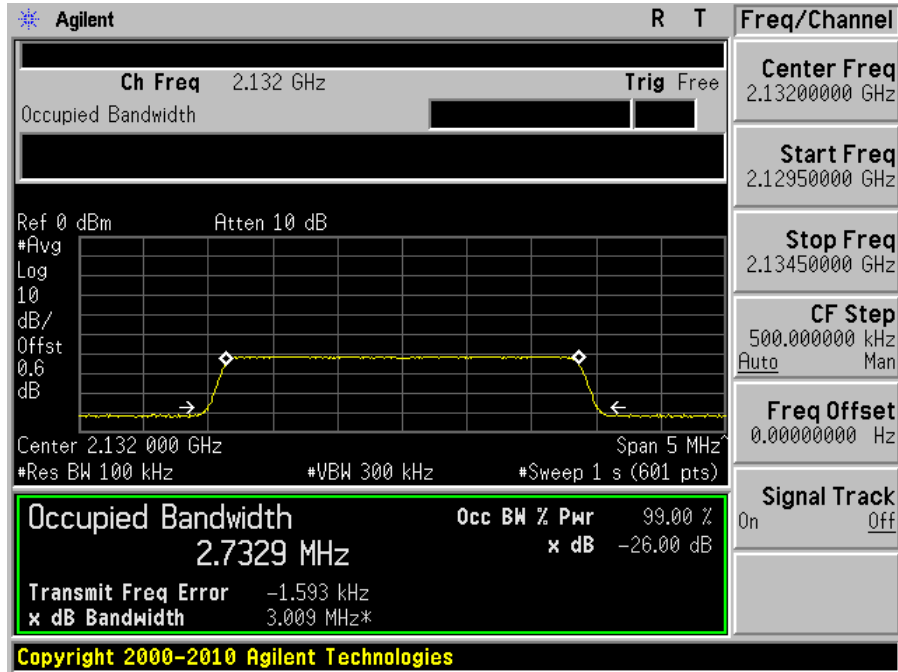


Output

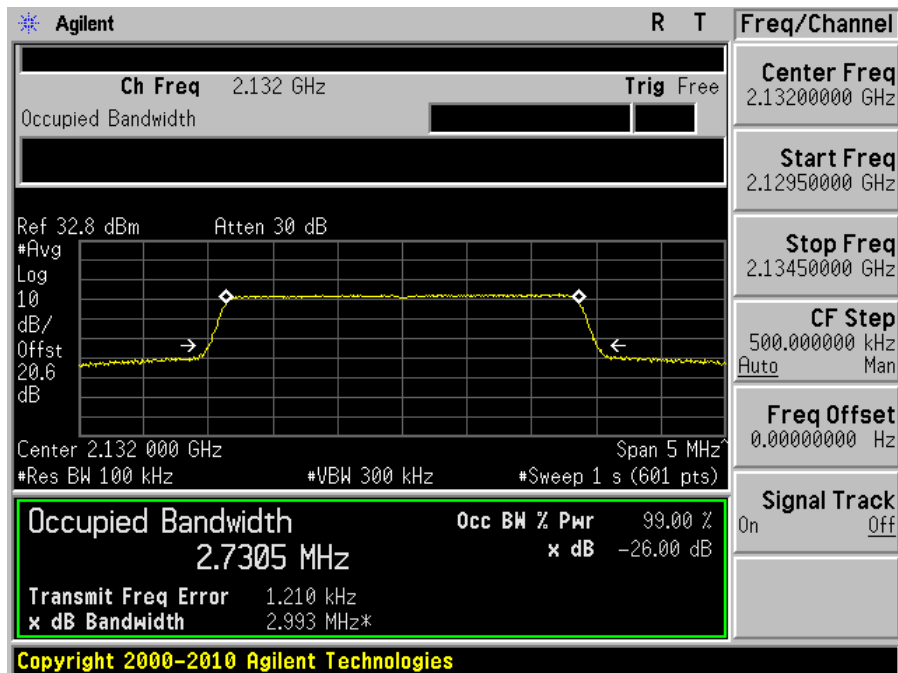


LTE-64QAM (3 MHz), Frequency: 2132 MHz

Input

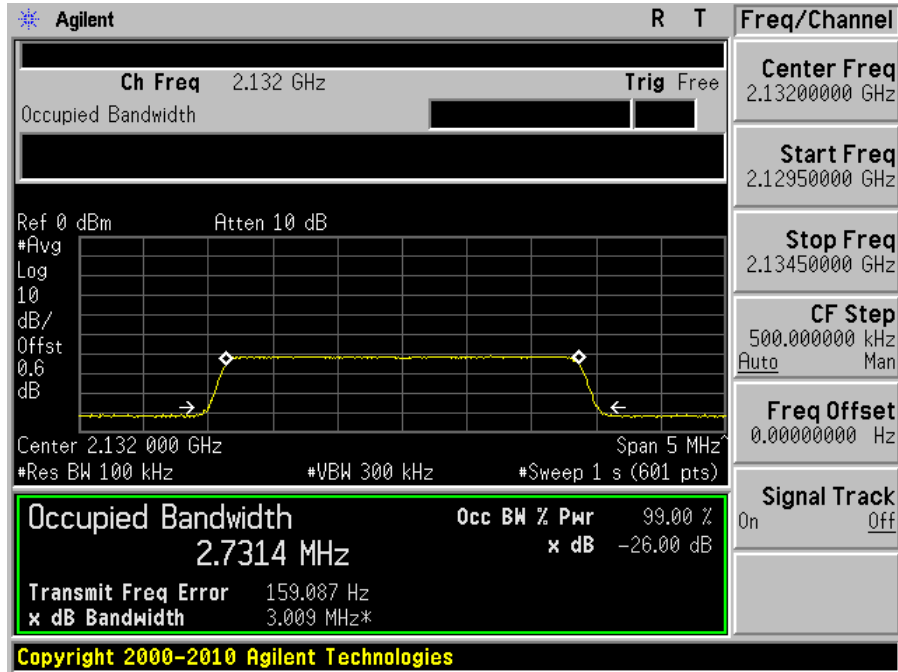


Output

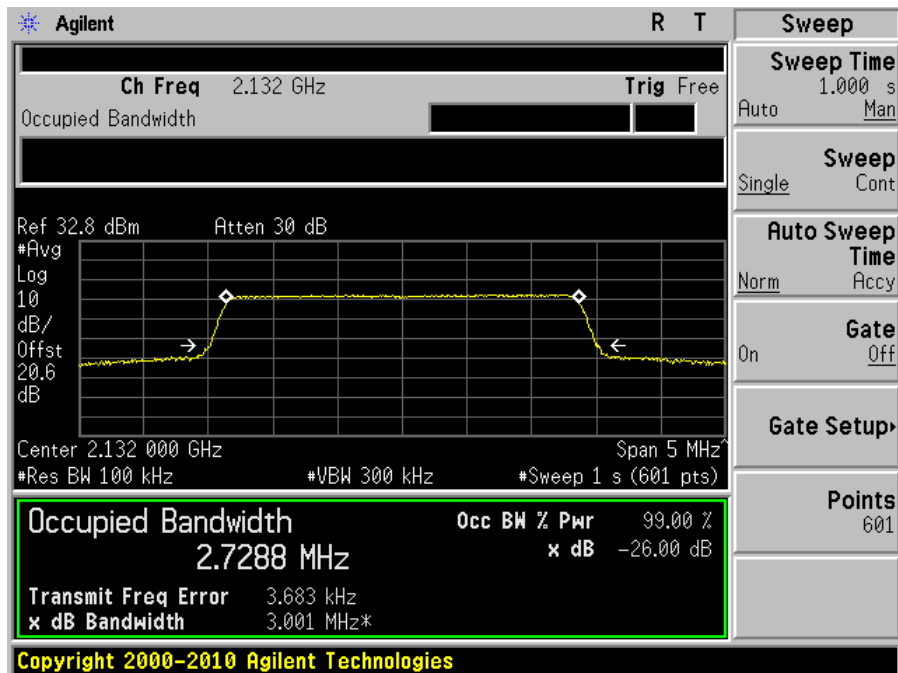


LTE-QPSK (5 MHz), Frequency: 2132 MHz

Input

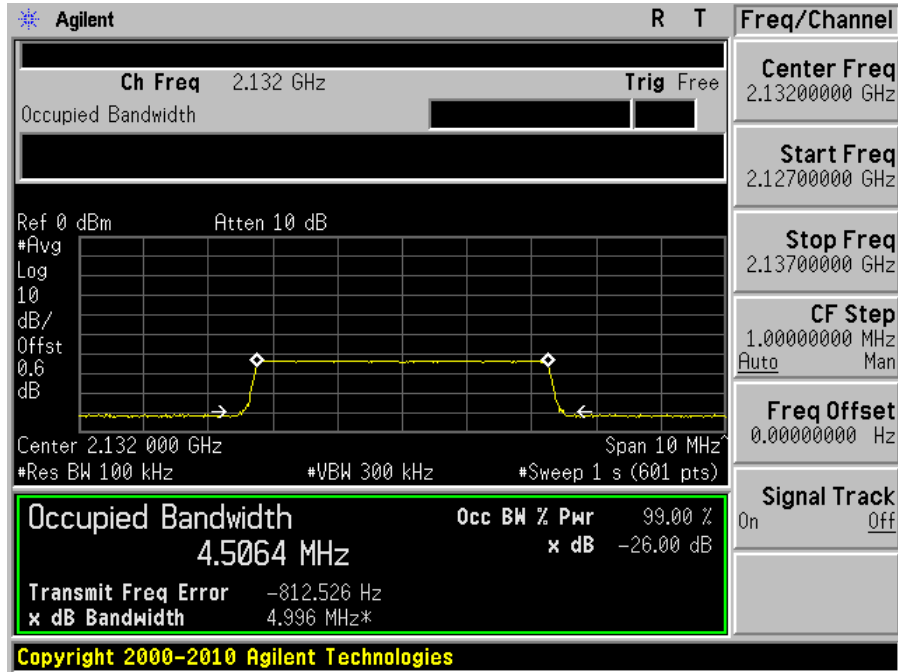


Output

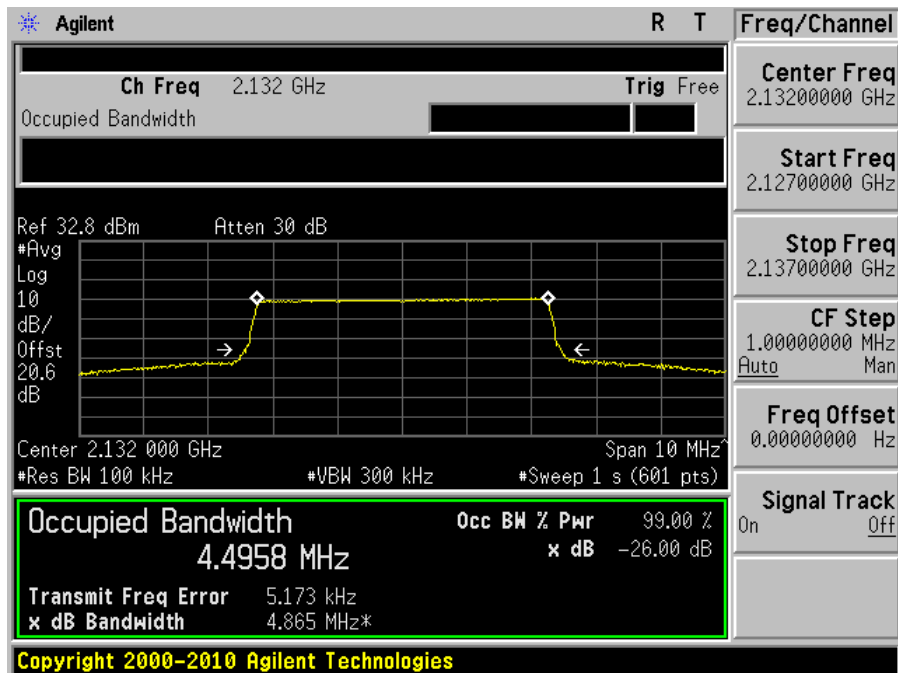


LTE-16QAM (5 MHz), Frequency: 2132 MHz

Input

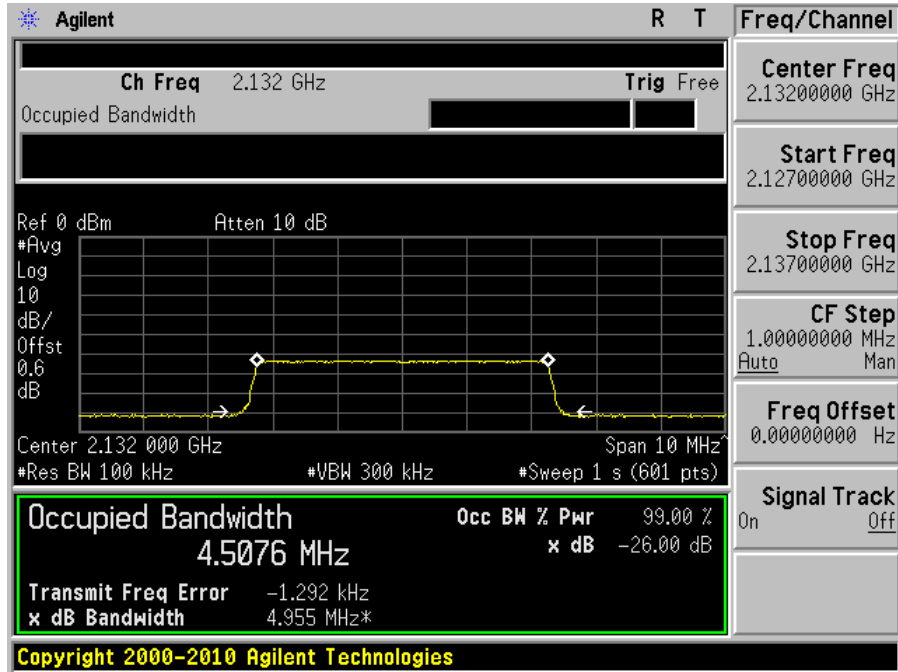


Output

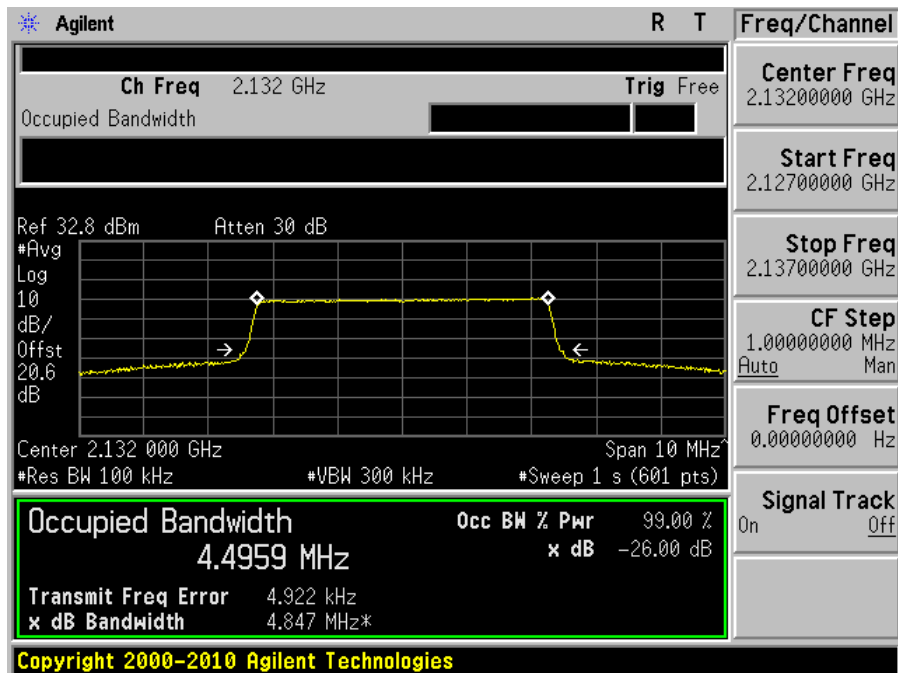


LTE-64QAM (5 MHz), Frequency: 2132 MHz

Input

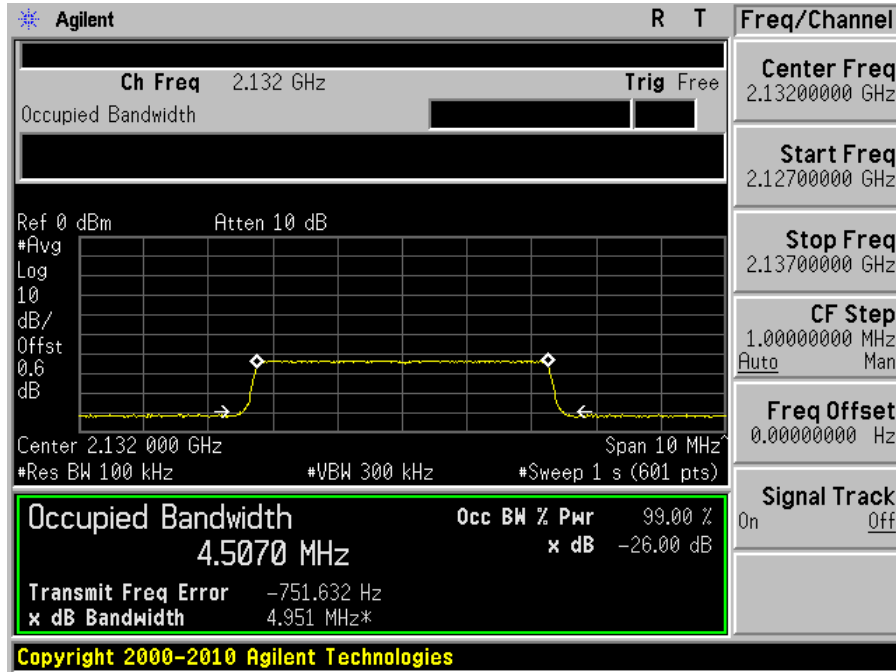


Output

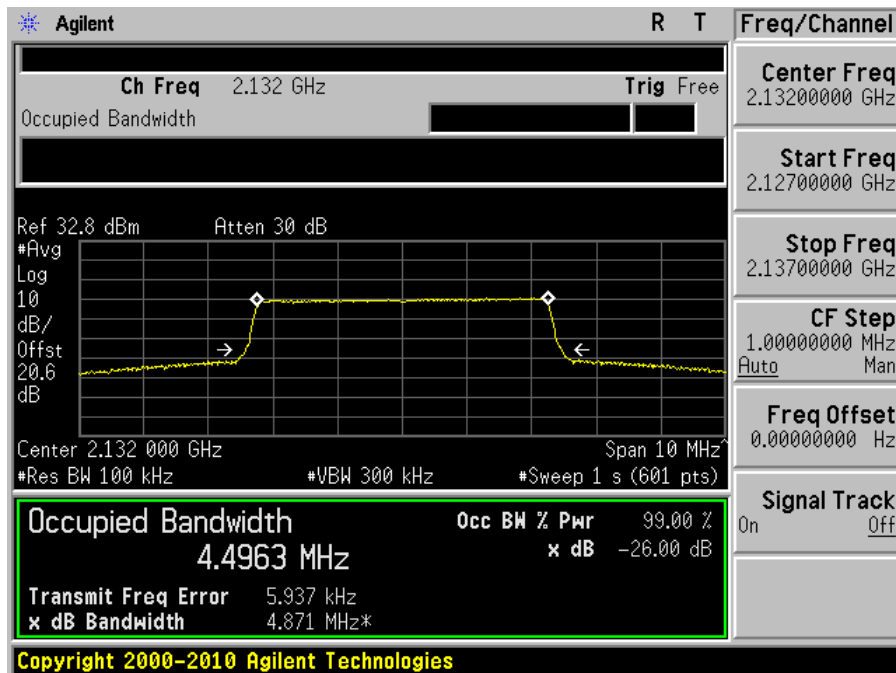


LTE-QPSK (10 MHz), Frequency: 2132 MHz

Input

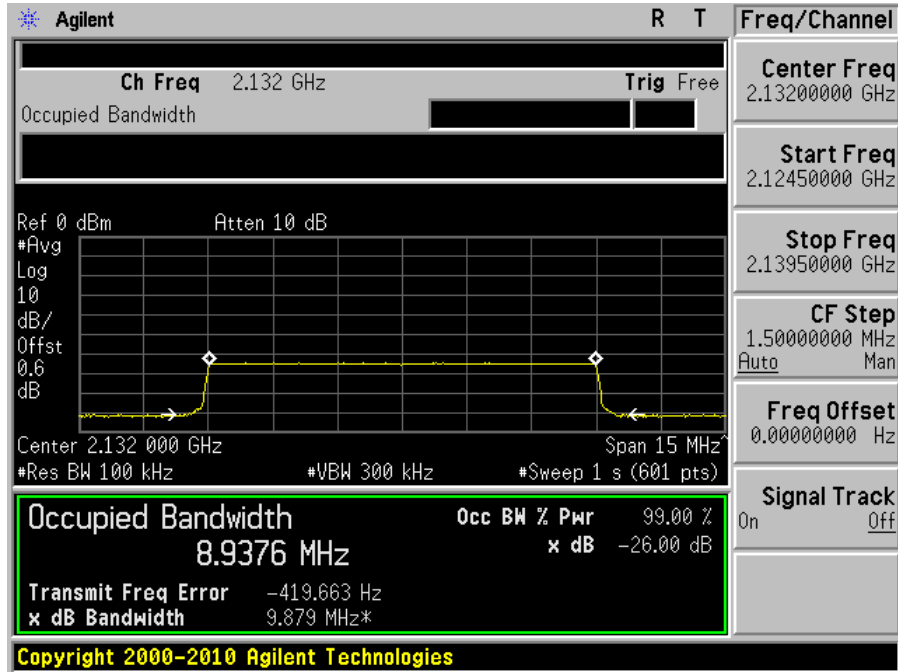


Output

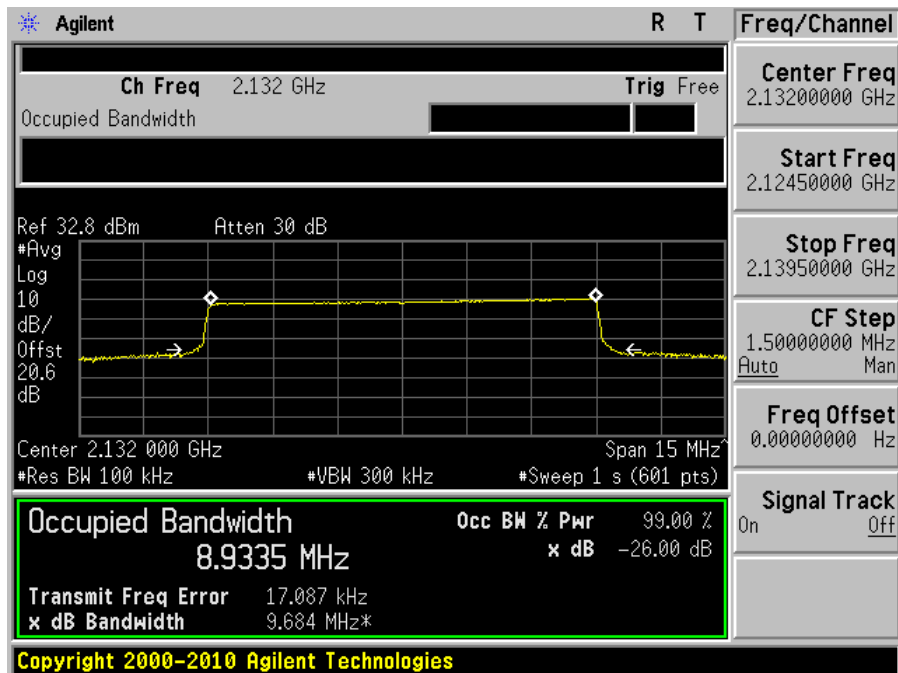


LTE-16QAM (10 MHz), Frequency: 2132 MHz

Input

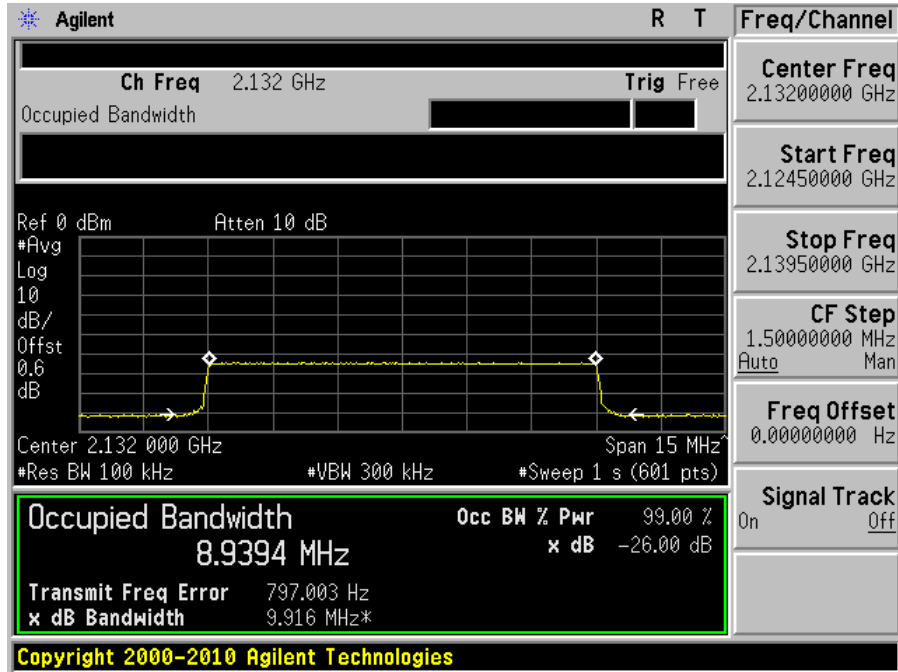


Output

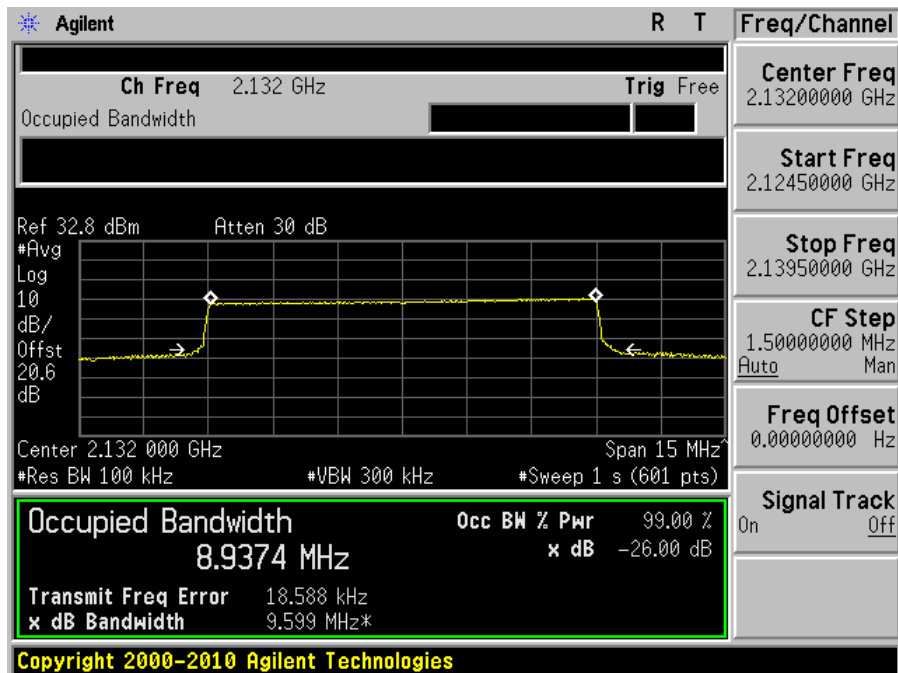


LTE-64QAM (10 MHz), Frequency: 2132 MHz

Input

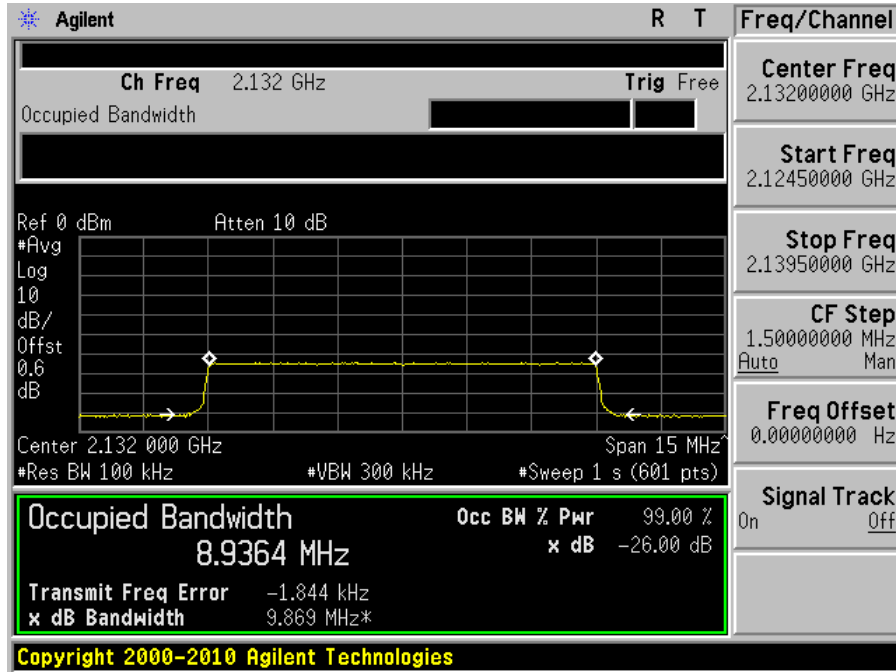


Output

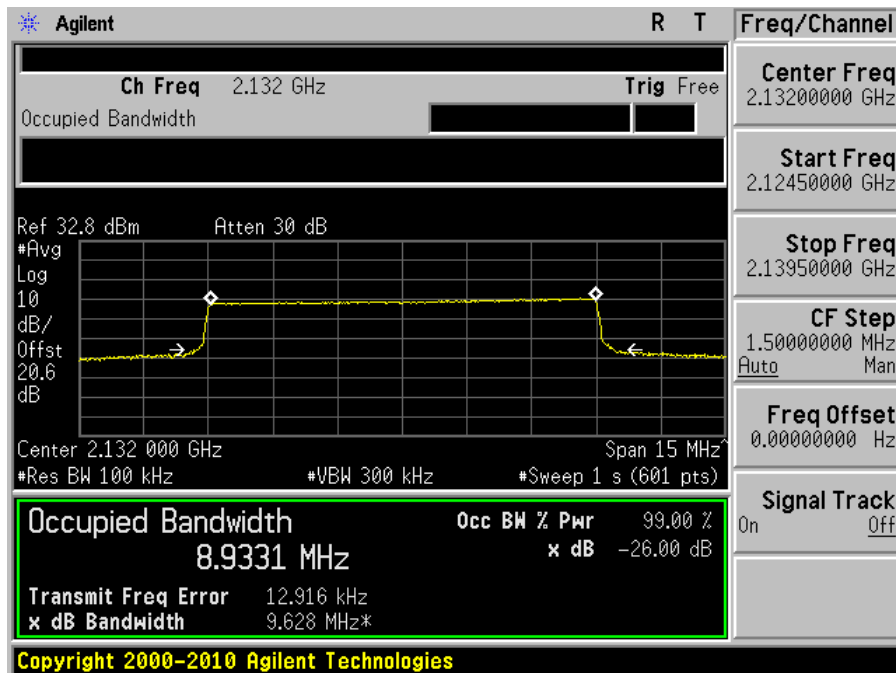


LTE, Uplink: 1710 - 1755 MHz

LTE-QPSK (1.4 MHz), Frequency: 1732 MHz

Input

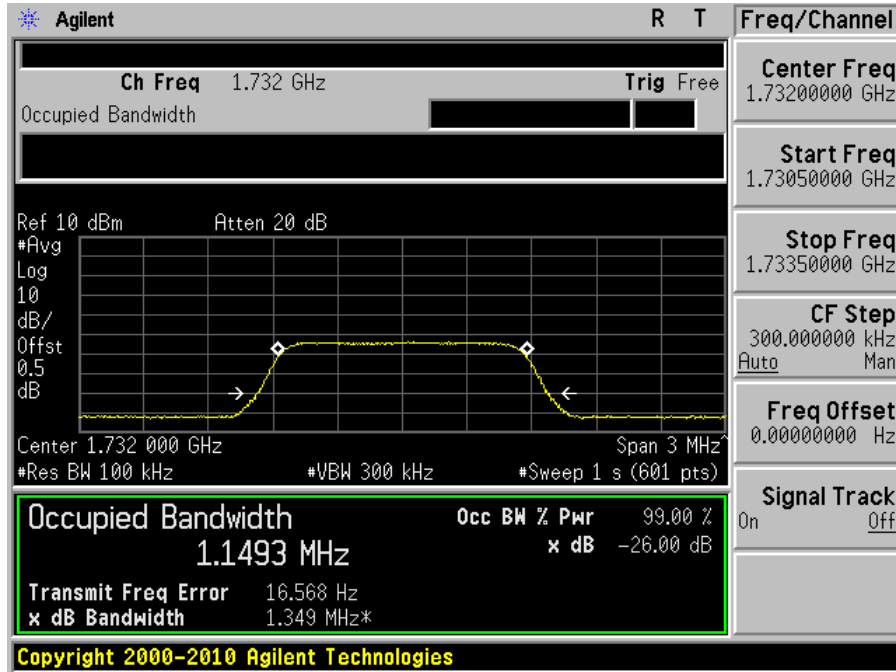


Output

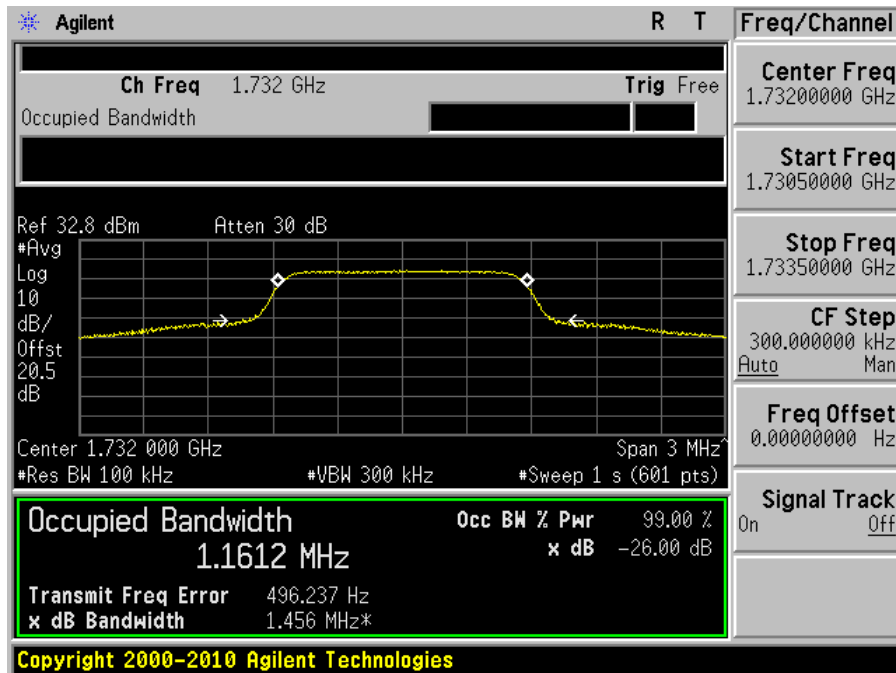


LTE-16QAM (1.4 MHz), Frequency: 1732 MHz

Input

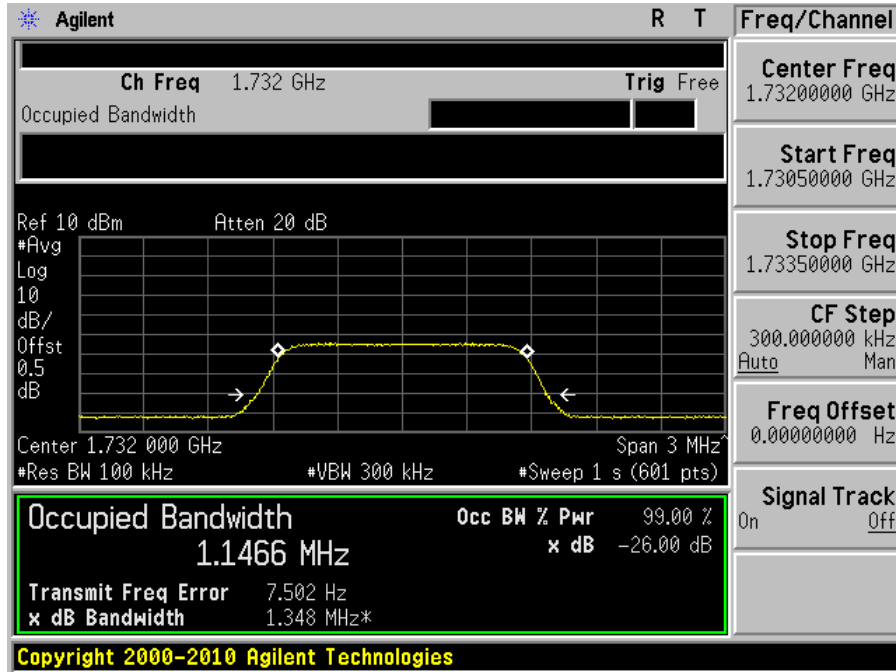


Output

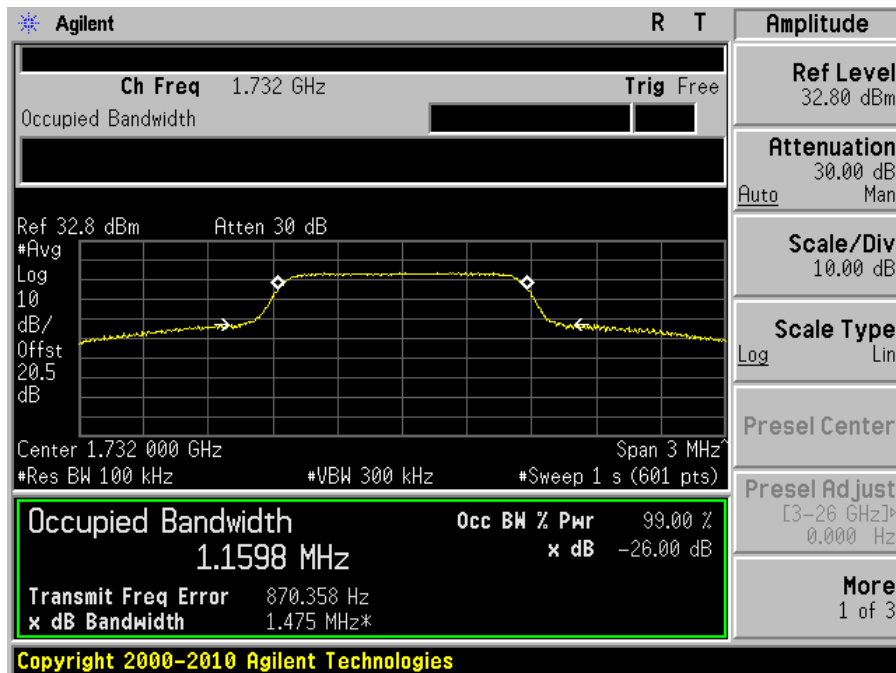


LTE-64QAM (1.4 MHz), Frequency: 1732 MHz

Input

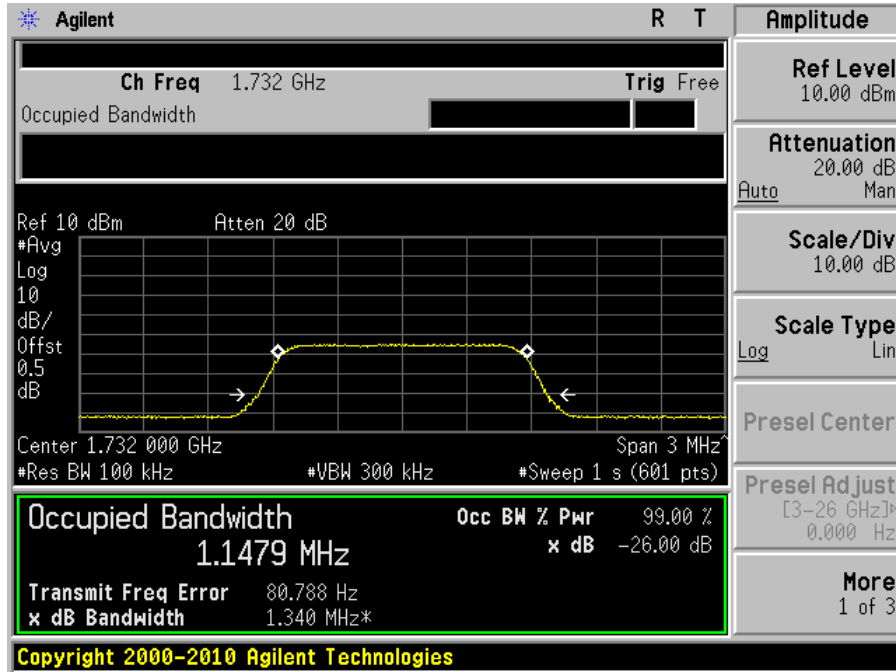


Output

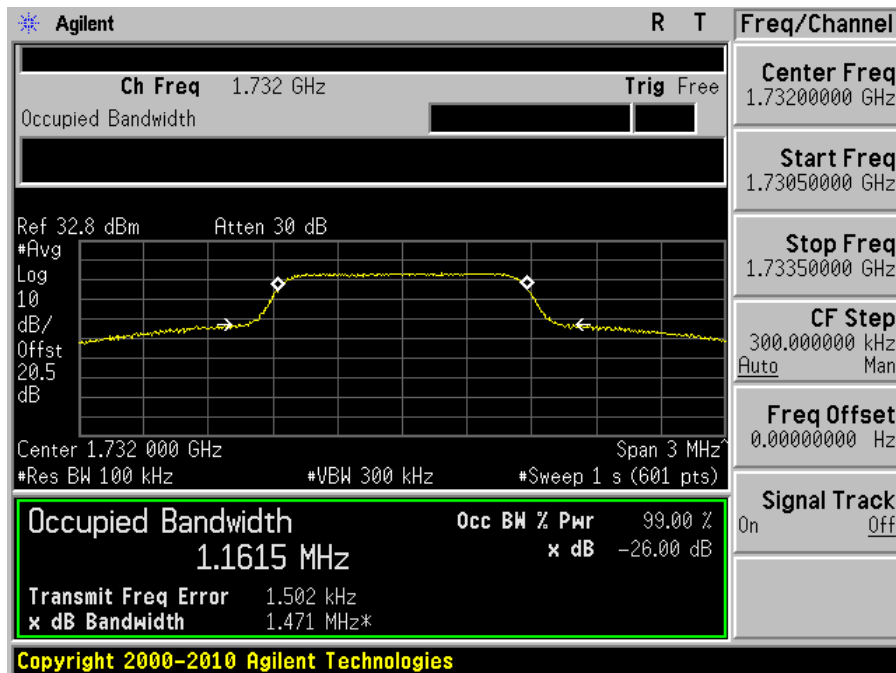


LTE-QPSK (3 MHz), Frequency: 1732 MHz

Input

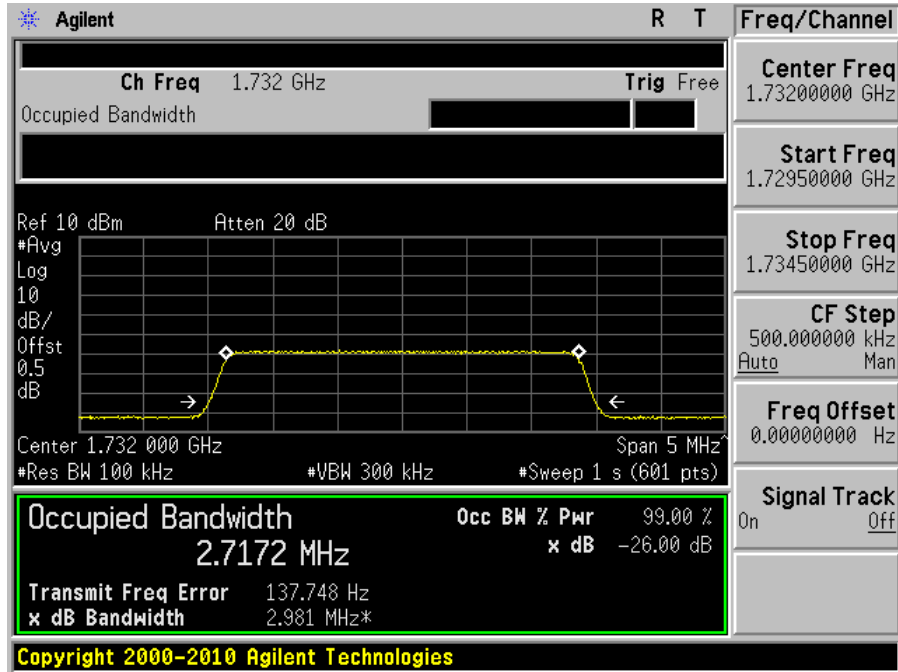


Output

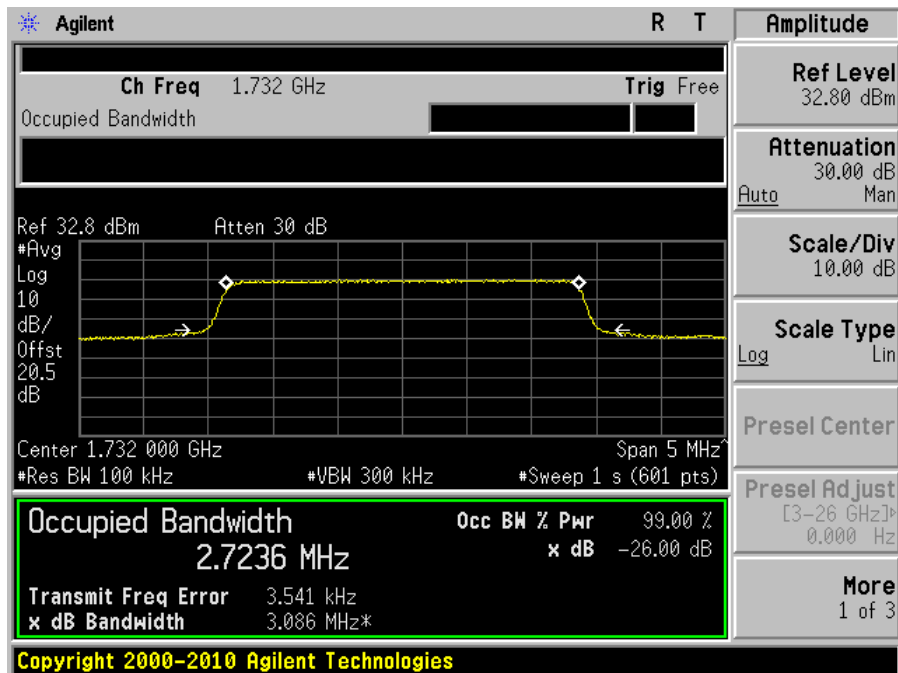


LTE-16QAM (3 MHz), Frequency: 1732 MHz

Input

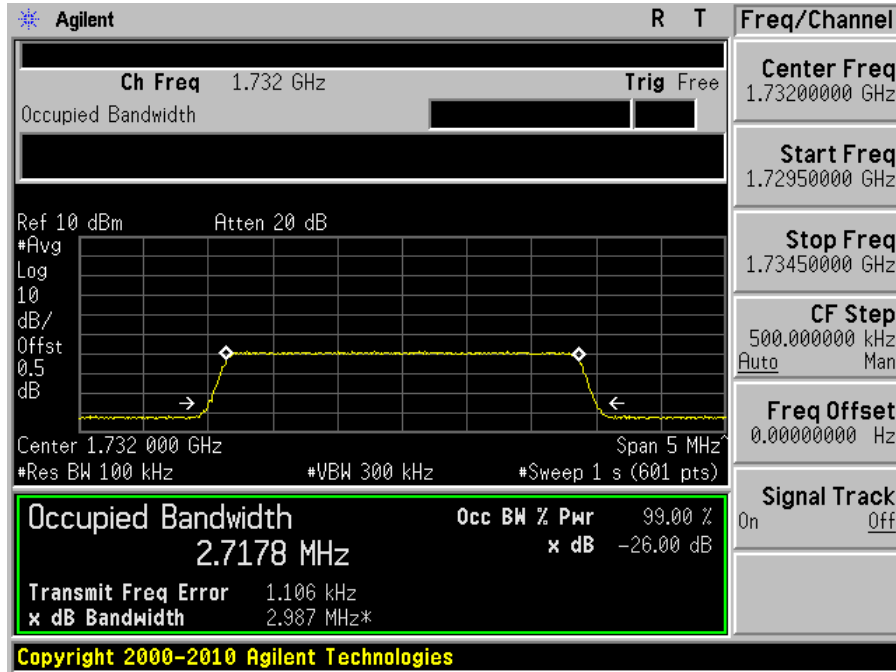


Output

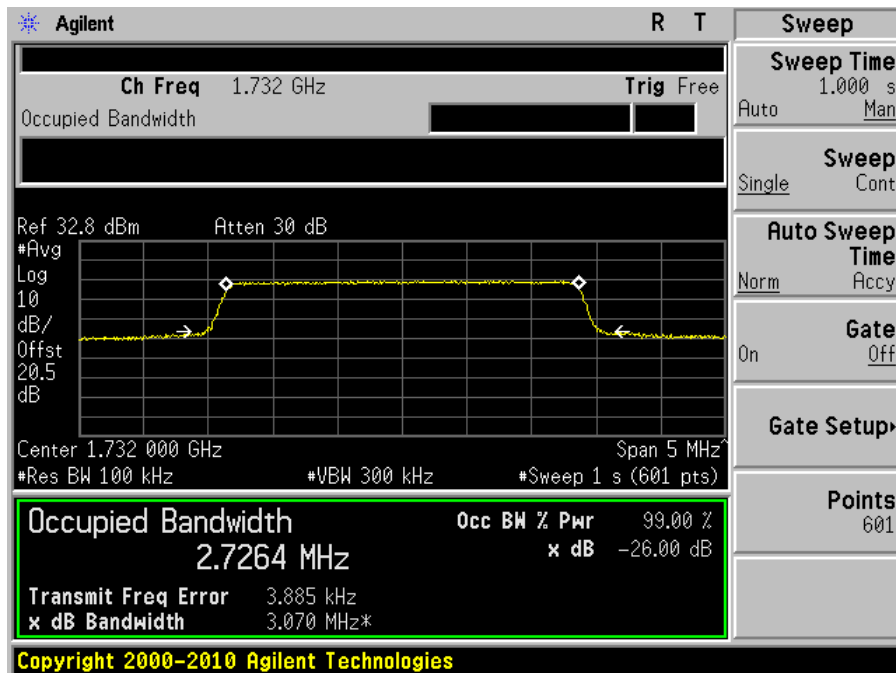


LTE-64QAM (3 MHz), Frequency: 1732 MHz

Input

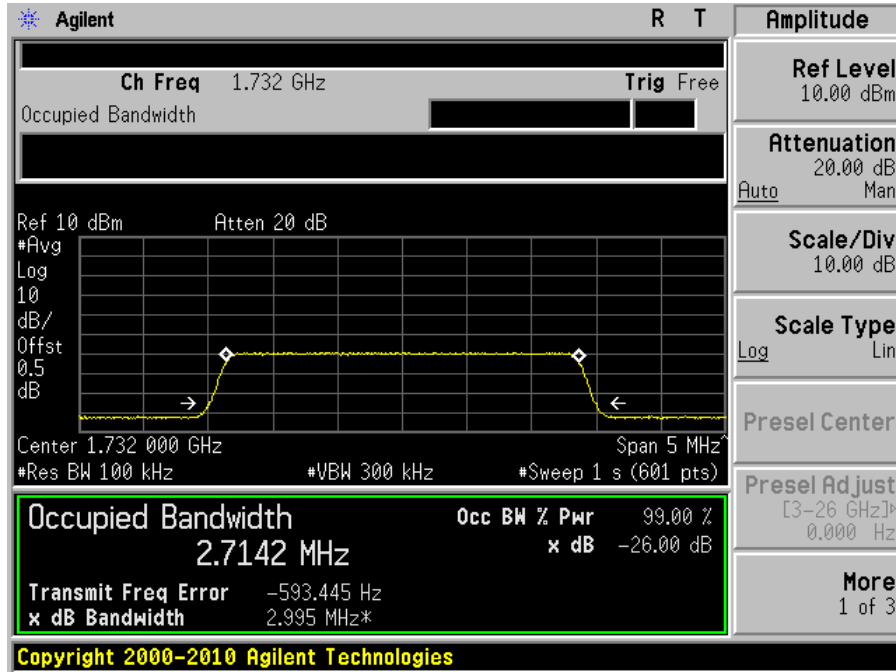


Output

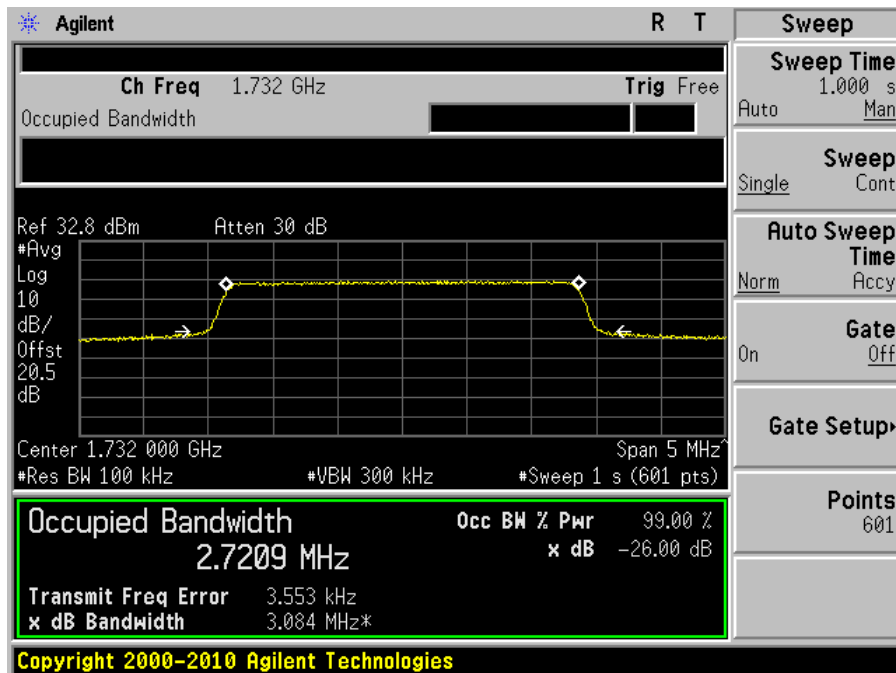


LTE-QPSK (5 MHz), Frequency: 1732 MHz

Input

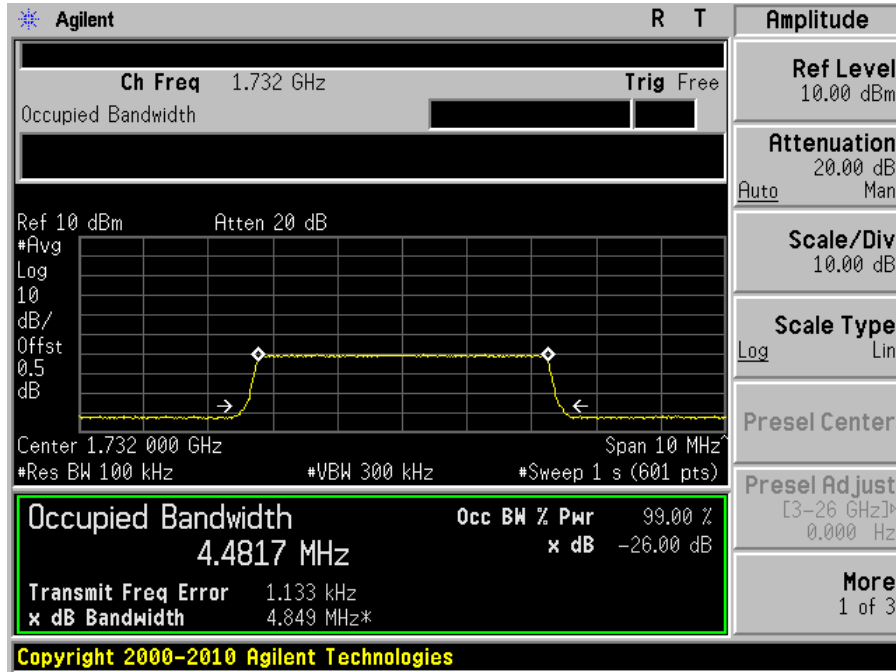


Output

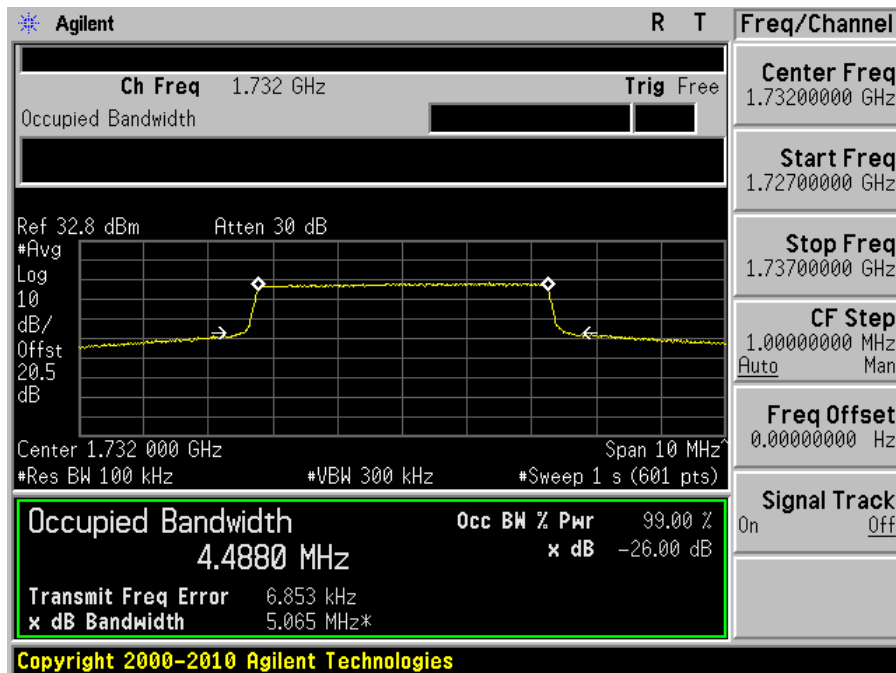


LTE-16QAM (5 MHz), Frequency: 1732 MHz

Input

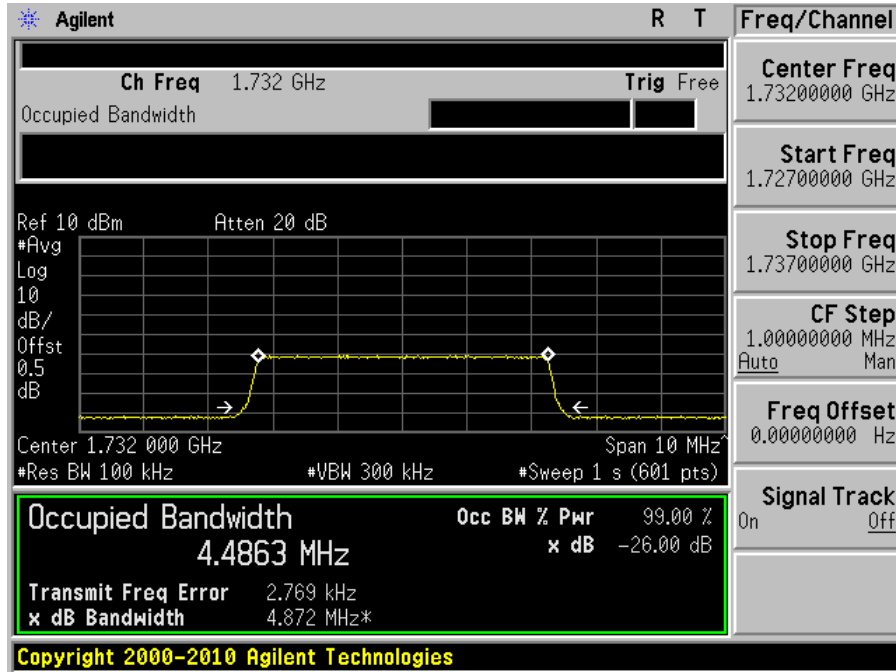


Output

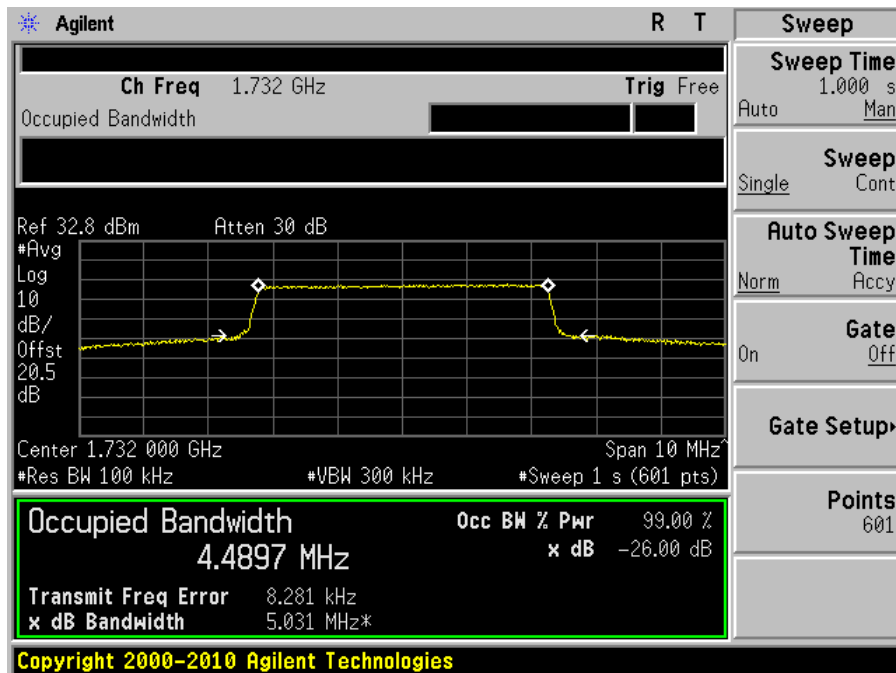


LTE-64QAM (5 MHz), Frequency: 1732 MHz

Input

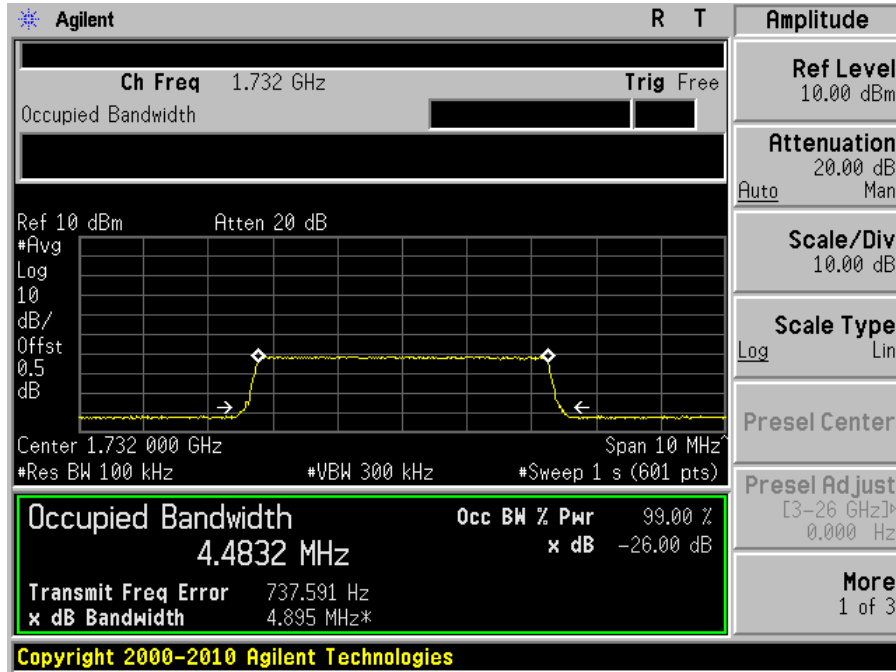


Output

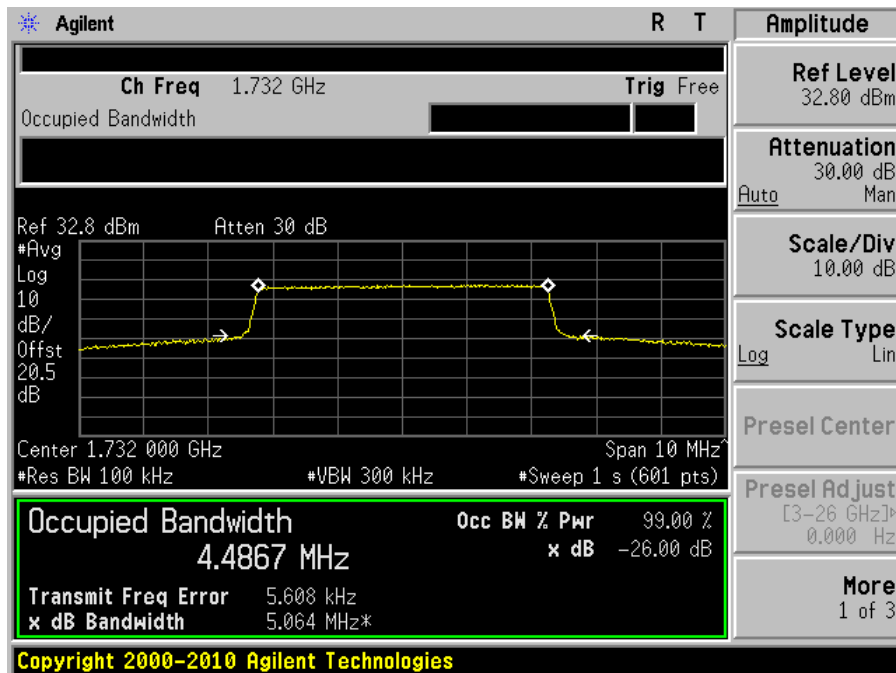


LTE-QPSK (10 MHz), Frequency: 1732 MHz

Input

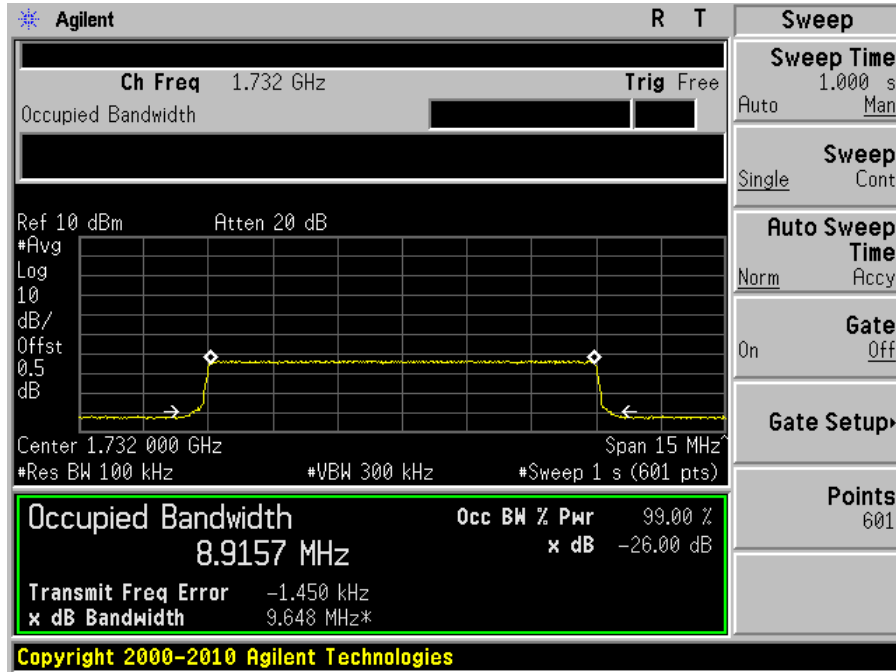


Output

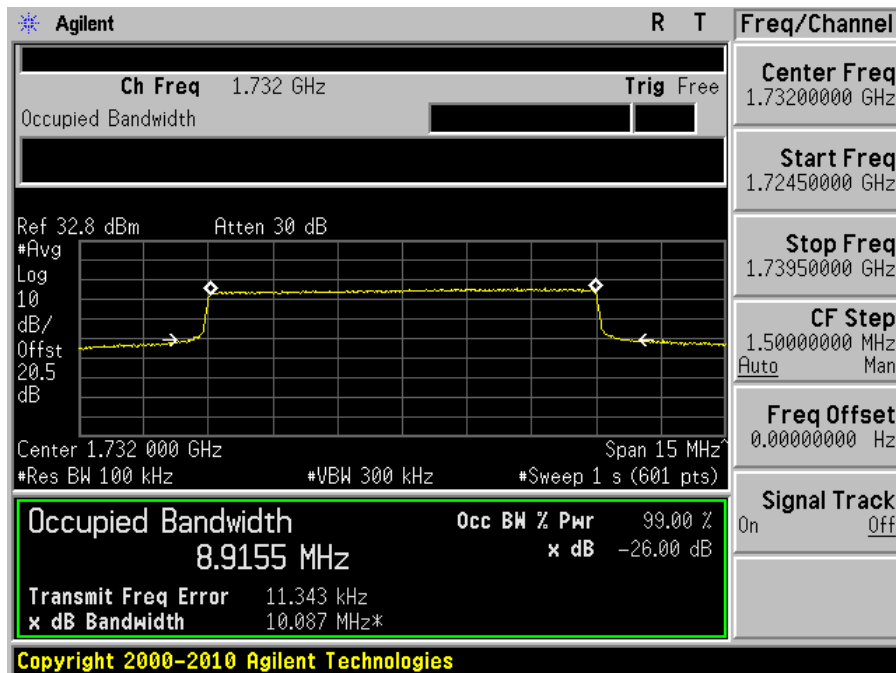


LTE-16QAM (10 MHz), Frequency: 1732 MHz

Input

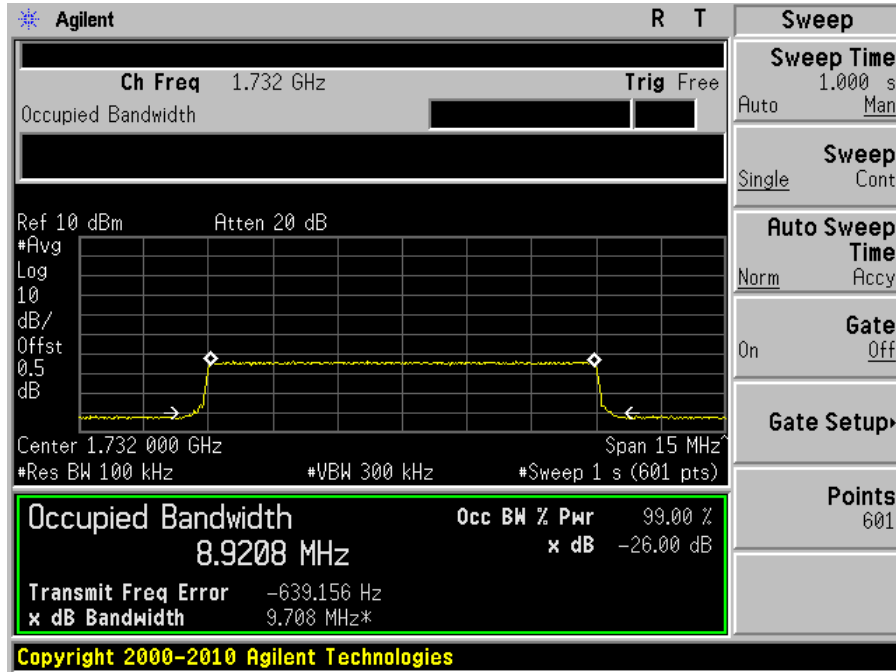


Output

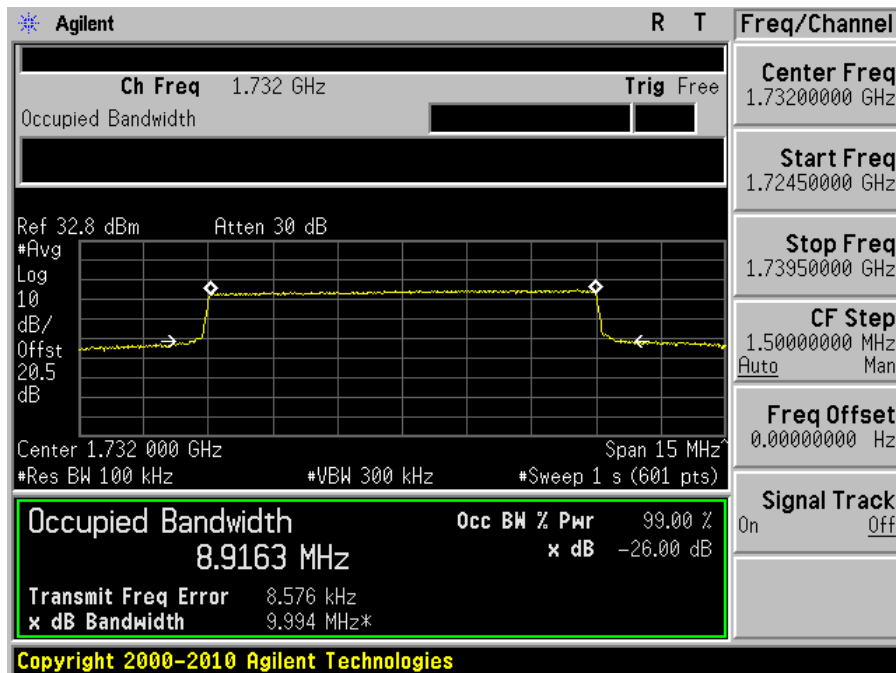


LTE-64QAM (10 MHz), Frequency: 1732 MHz

Input

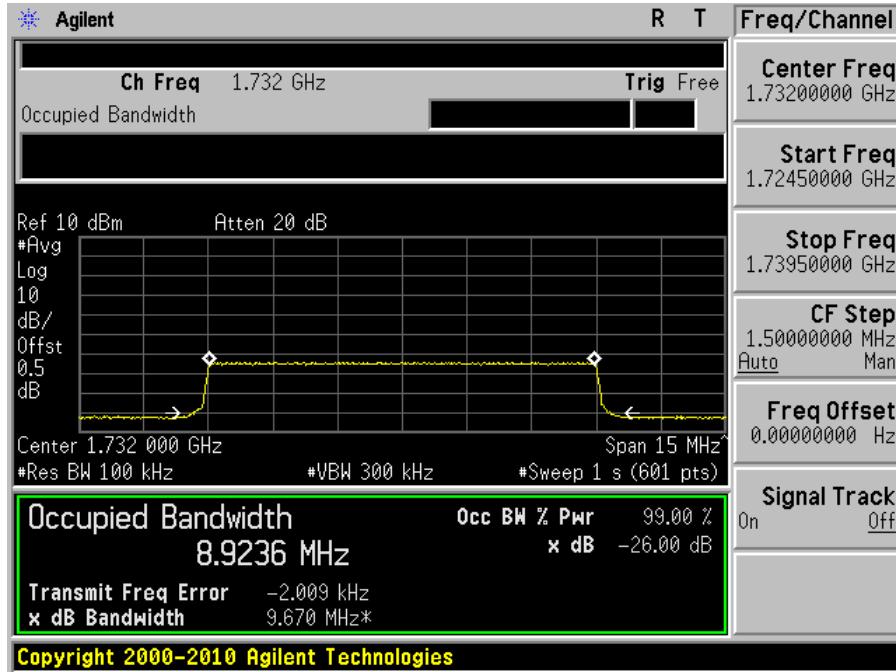


Output

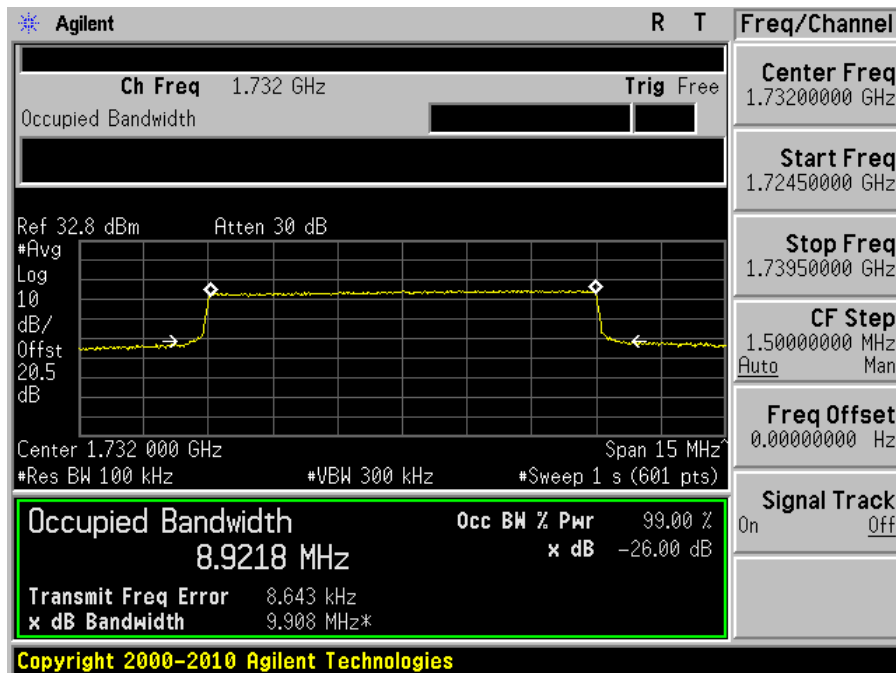


WCDMA, Downlink: 2110-2155 MHz

WCDMA, Frequency: 2132.4 MHz

Input

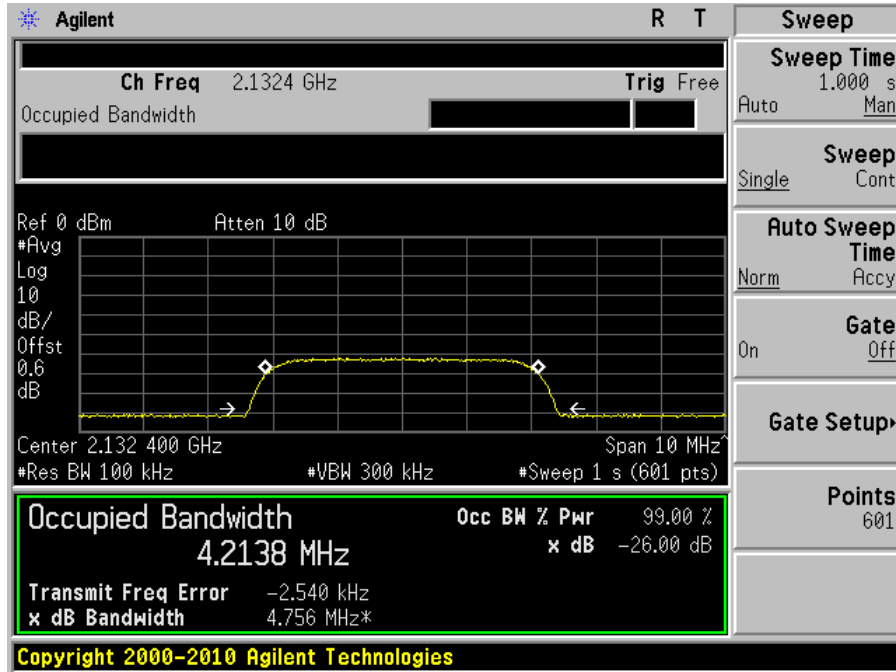


Output

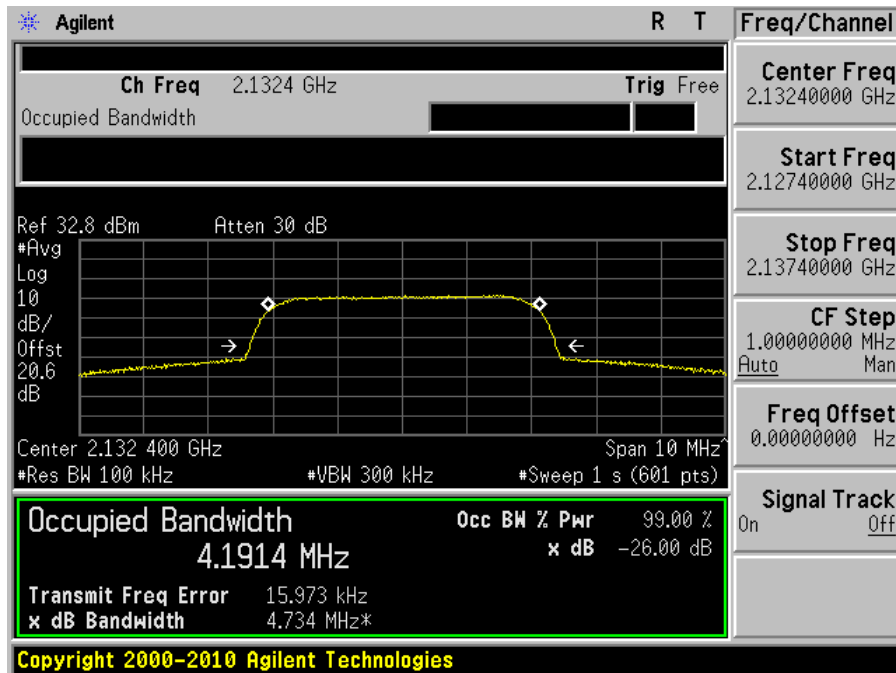


WCDMA, Uplink: 1710-1755 MHz

WCDMA, Frequency: 1732.4 MHz

Input

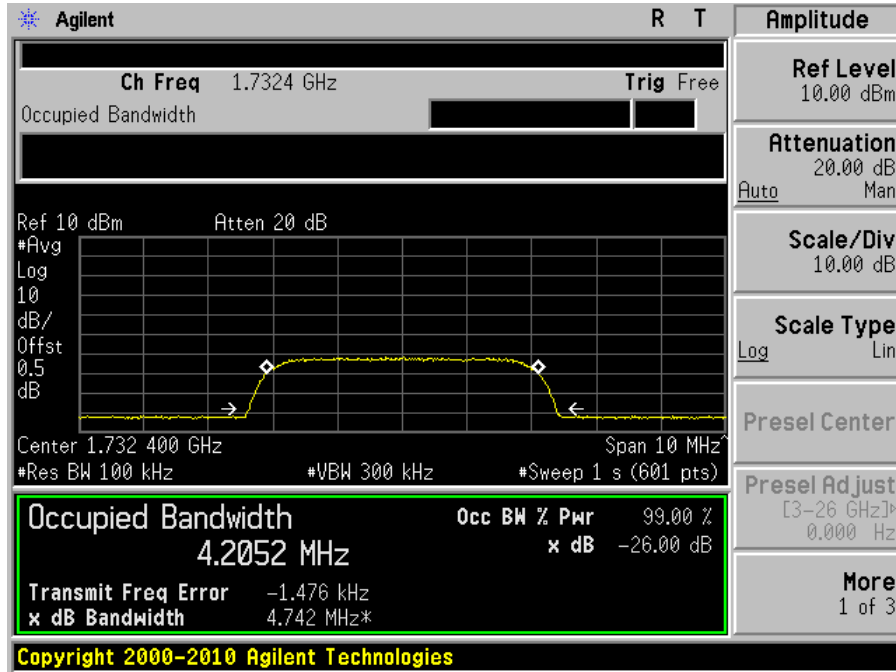


Output

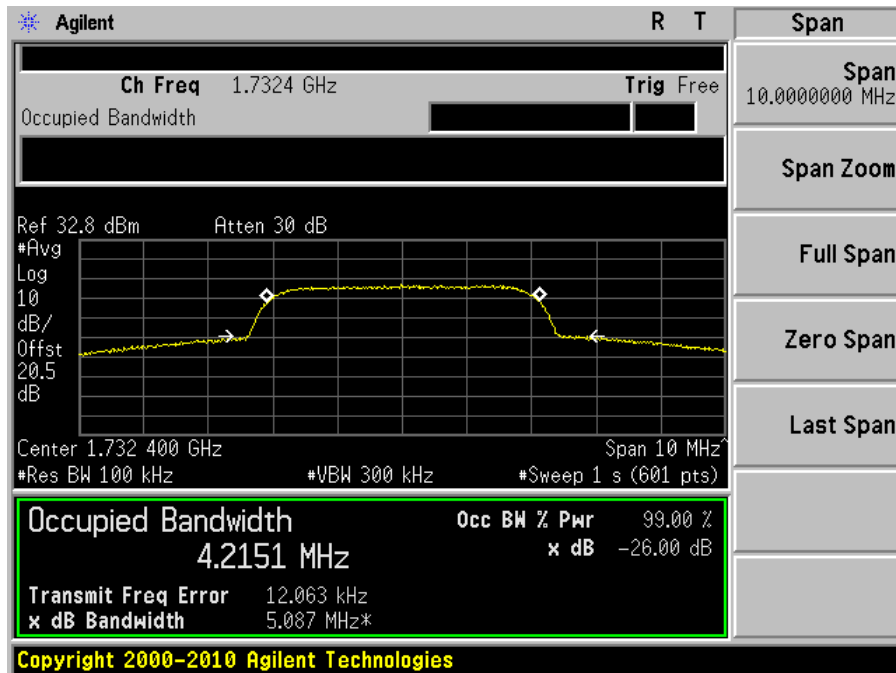


HSDPA, Downlink: 2110-2155 MHz

HSDPA, Frequency: 2132.4 MHz

Input

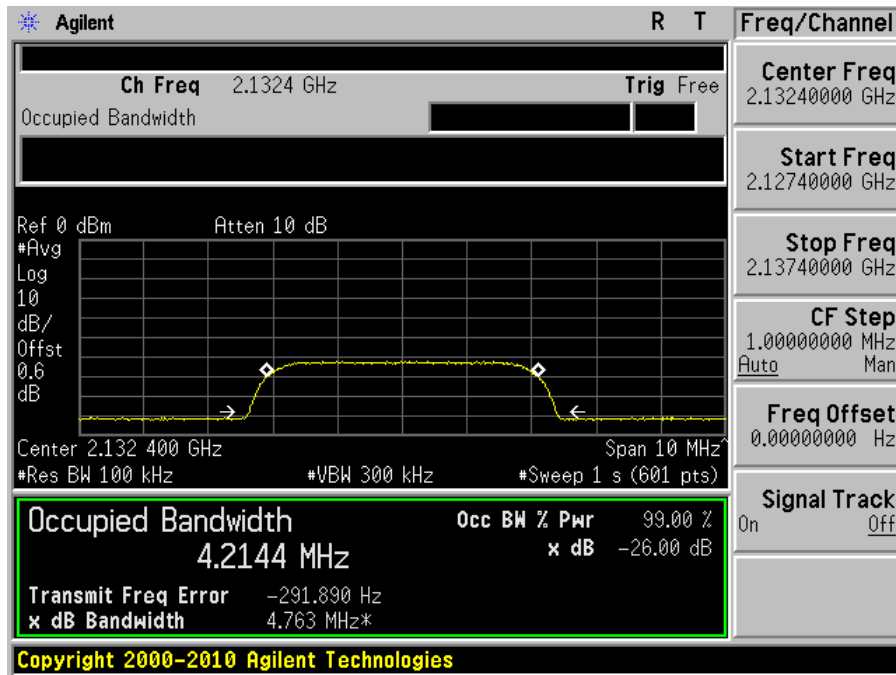


Output

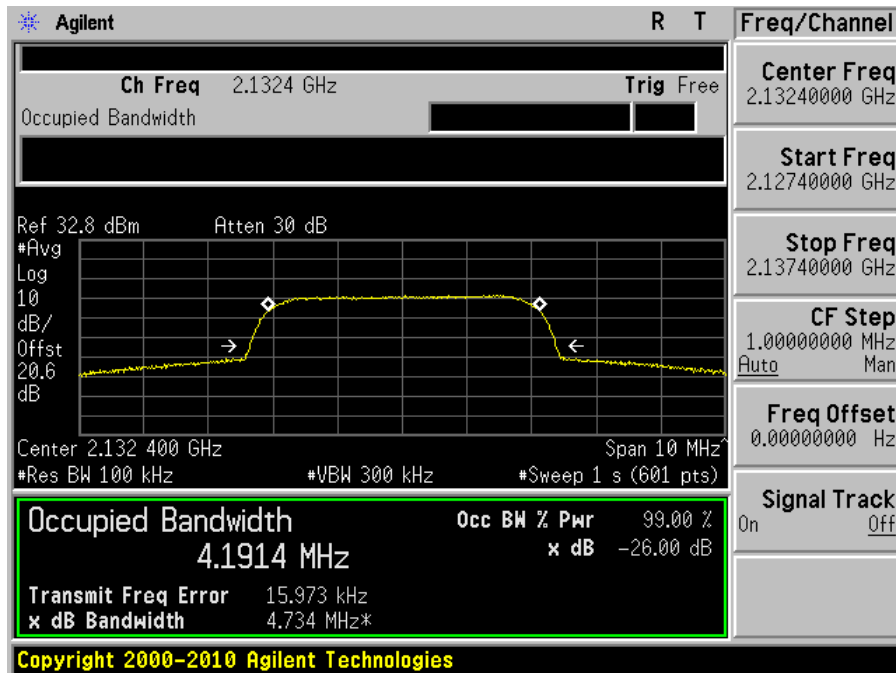


HSDPA, Uplink: 1710-1755 MHz

HSDPA, Frequency: 1732.4 MHz

Input

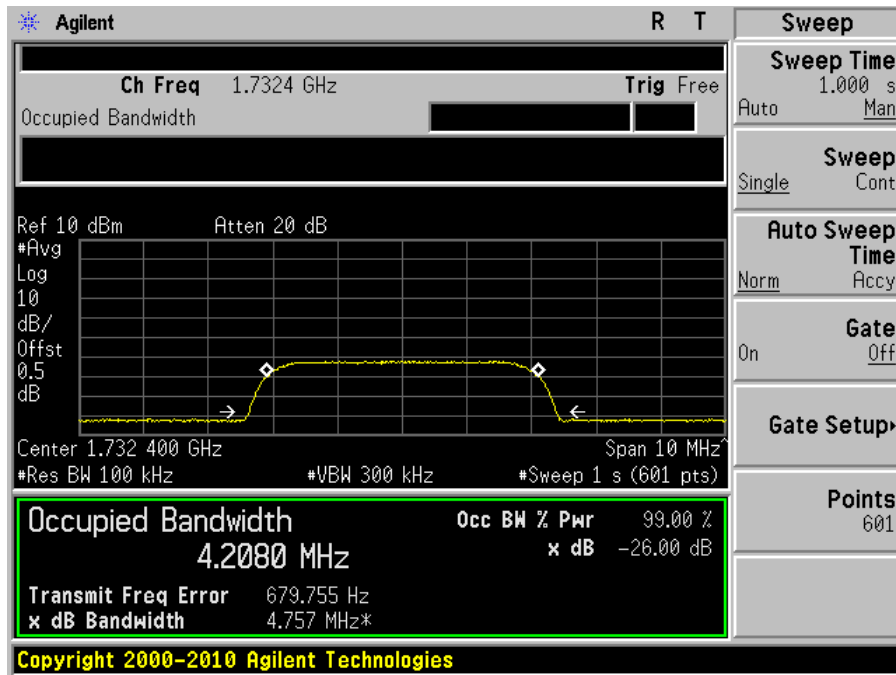


Output

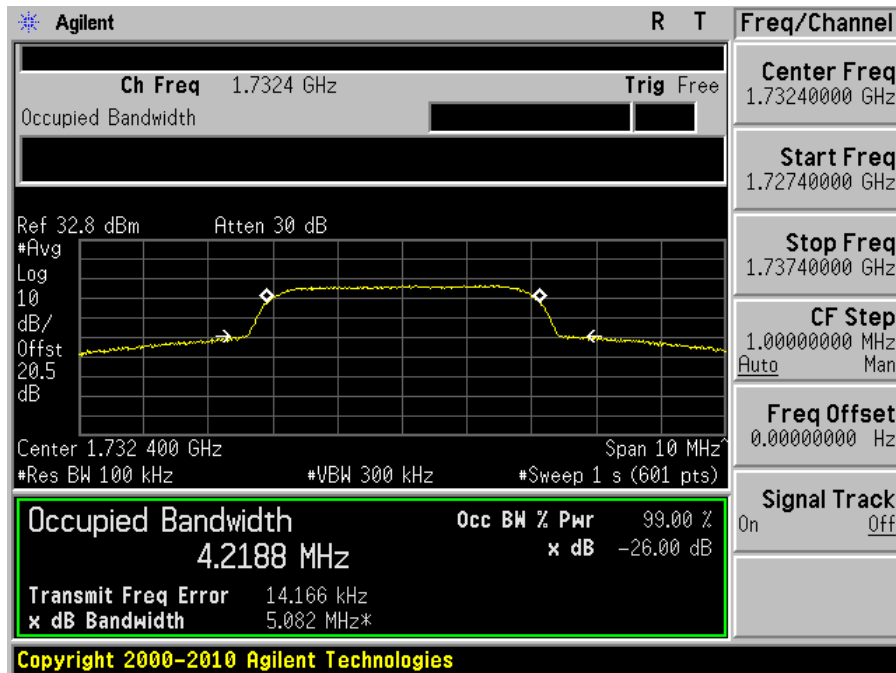


HSUPA, Downlink: 2110-2155 MHz

HSUPA, Frequency: 2132.4 MHz

Input

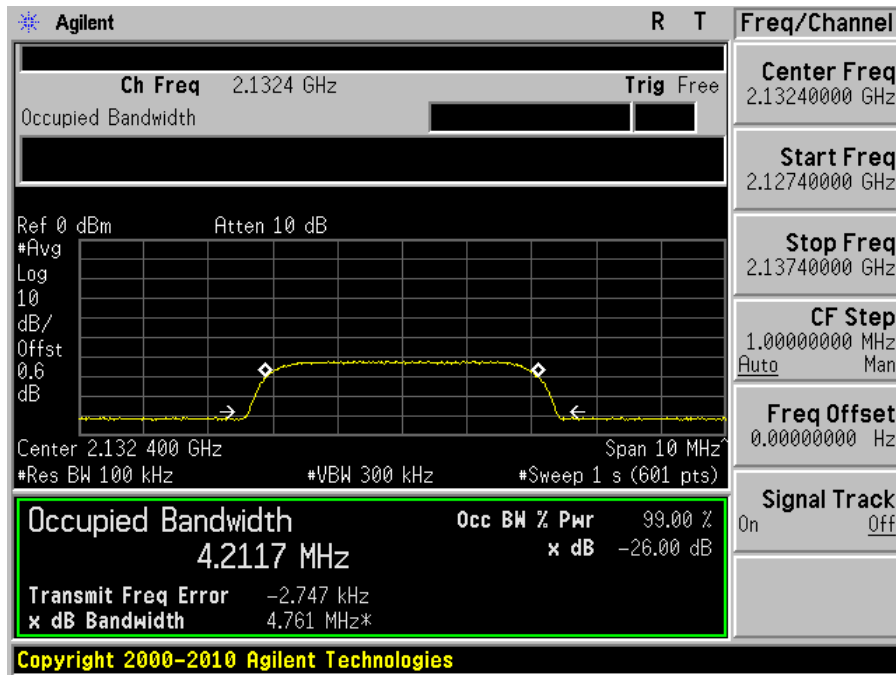


Output

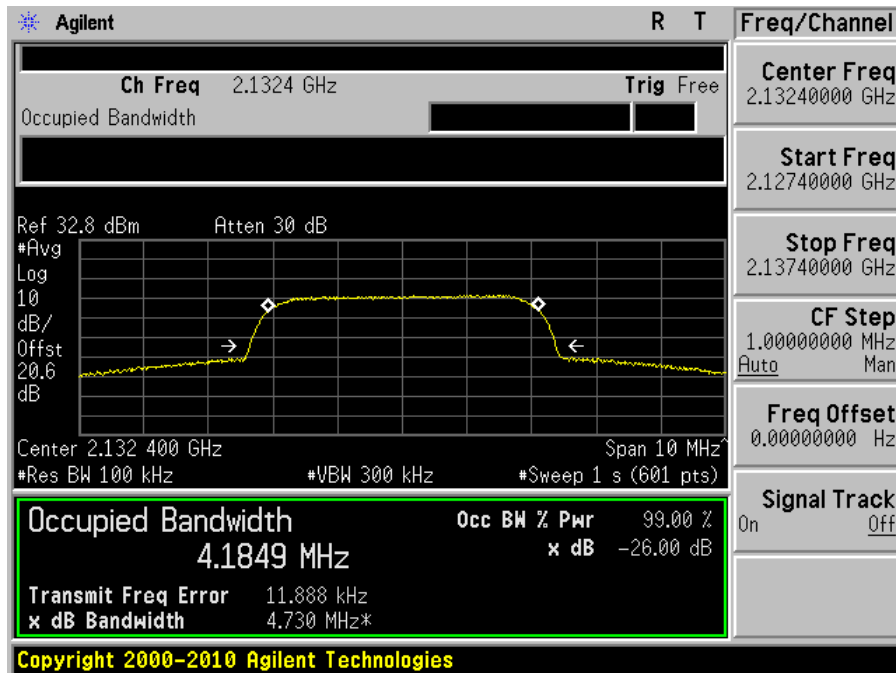


HSUPA, Uplink: 1710-1755 MHz

HSUPA, Frequency: 1732.4 MHz

Input

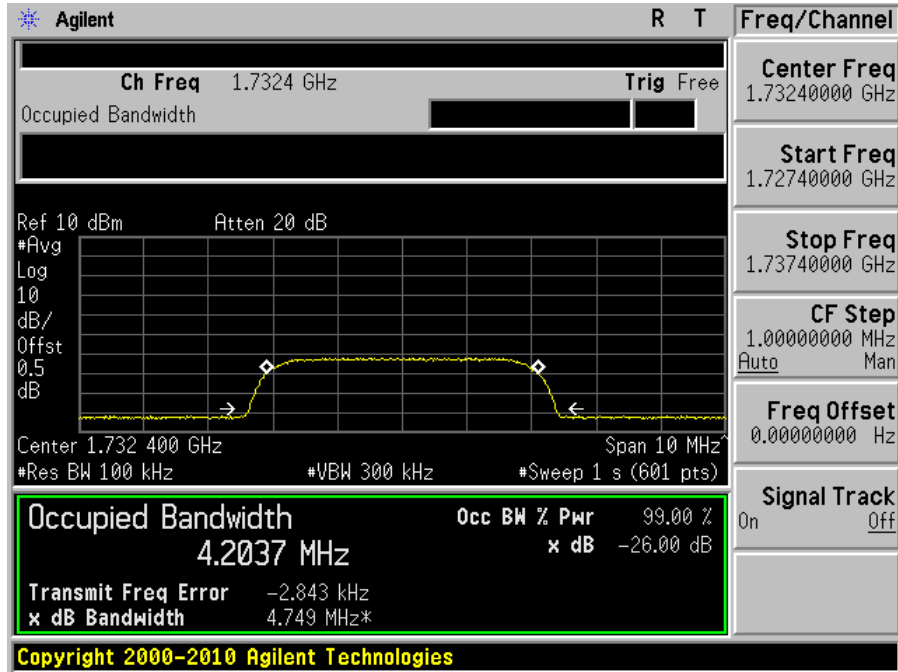

Output

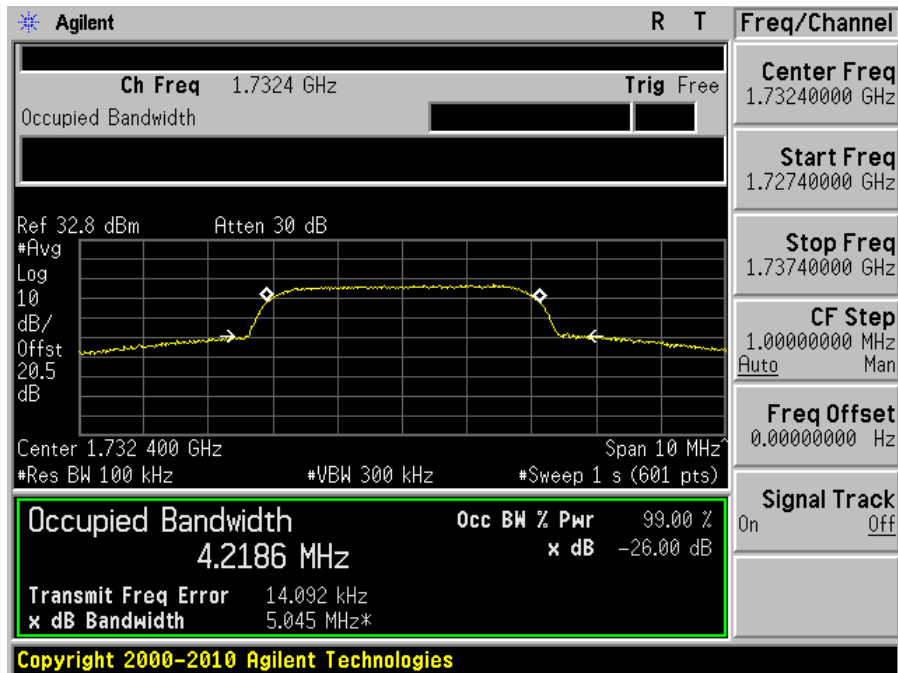

7 FCC §2.1053 & §27.53 - SPURIOUS RADIATED EMISSIONS

7.1 Applicable Standard

Requirements: FCC §2.1053, §27.53.

7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX Power in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{ Log}_{10} (\text{power out in Watts})$

7.3 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	38-45 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-16 to 2011-06-18 at Chamber3.

7.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746	2010-03-31 ¹
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB1	A020106-1	2011-05-17
Hewlett Packard	Pre amplifier	8447D	2944A06639	2011-06-18
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

Note¹: 2 years calibration cycle.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.5 Summary of Test Results

The worst case reading as follows:

Frequency Bands	Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Frequency Range
DL: 2110-2155 MHz	-47.43	117.72	Horizontal	30 MHz – 22 GHz
UL: 1710-1755 MHz	-23.0	5195.9	Horizontal	30 MHz – 22 GHz

7.6 Test Results

Downlink: 2110 - 2155 MHz

Modulation: CW Signal – 2111 MHz (Scan from 30 MHz to 22 GHz @ 3 Meter Distance)

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
117.72	48.1	72	150	H	117.72	-59.93	0	0.5	-60.43	-13	-47.43
117.72	43.02	110	140	V	117.72	-65.01	0	0.5	-65.51	-13	-52.51

Uplink: 1710-1755 MHz

Modulation: CW Signal – 1732 MHz (Scan from 30 MHz to 22 GHz @ 3 Meter Distance)

Indicated		Turntable Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
116.88	50.85	91	150	H	116.88	-57.18	0	0.5	-57.68	-13	-44.68
116.88	43.55	107	130	V	116.88	-64.48	0	0.5	-64.98	-13	-51.98
5195.9	46.91	277	150	H	5195.9	-44.5	10.9	2.4	-36	-13	-23.0
5195.9	43.44	107	124	V	5195.9	-47.97	10.9	2.4	-39.47	-13	-26.47

8 FCC §2.1051 & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 Applicable Standard

Requirements: FCC §2.1051 & §27.53.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

8.3 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	38-45 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-16 to 2011-06-18 at RF Site.

8.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Rohde & Schwarz	Signal Generator	SMIQ03	DE23746	2010-03-31 ¹
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Note¹: 2 years calibration cycle.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


8.5 Test Results

Please refer to the following plots.


Downlink: 2110-2155 MHz

Modulation: CW Signal, Frequency: 2132 MHz

Plot 1: 30 MHz to 1 GHz

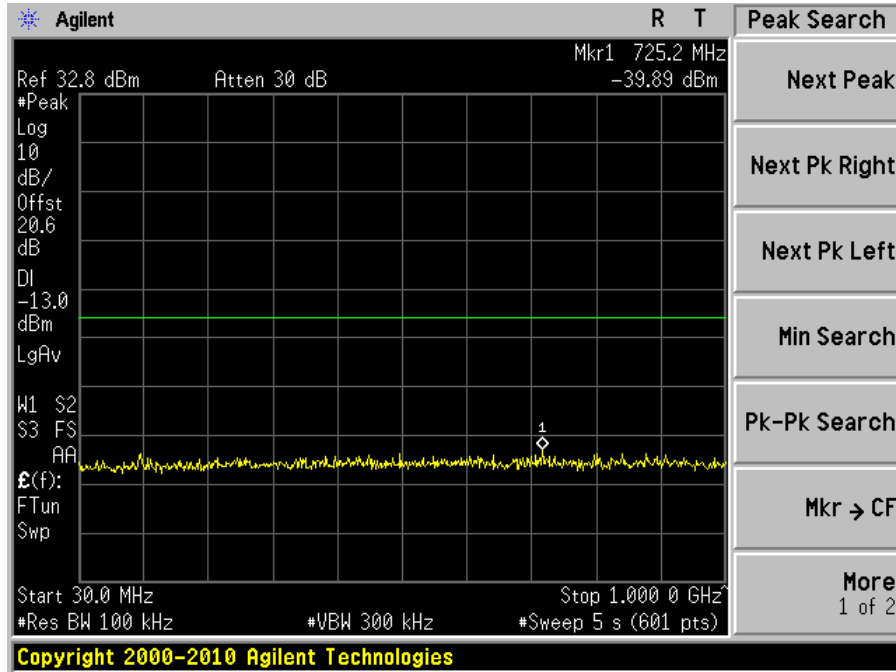


Plot 2: Above 1 GHz

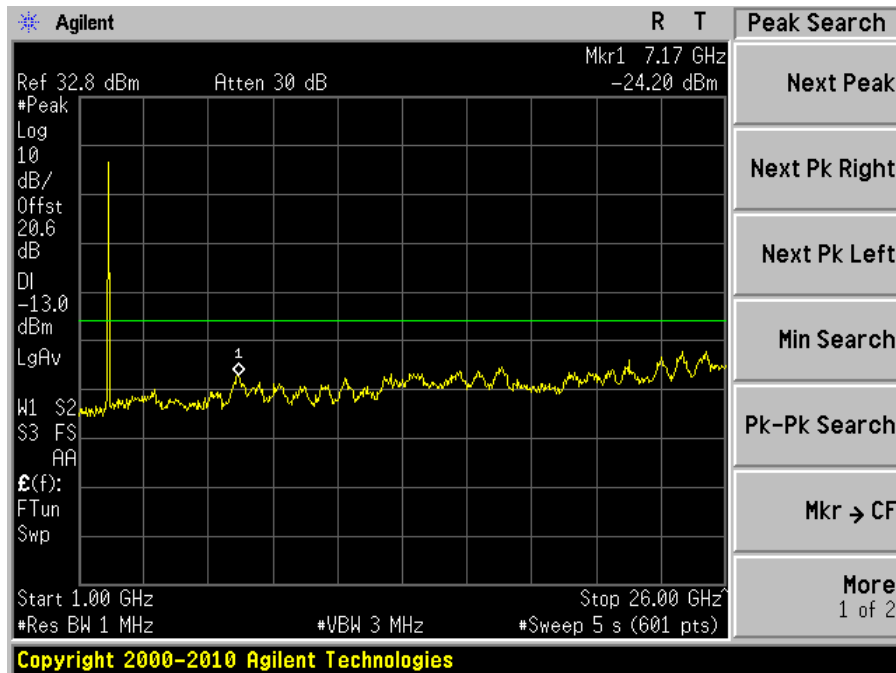


Inter-Modulation:

Lowest Frequency


Input

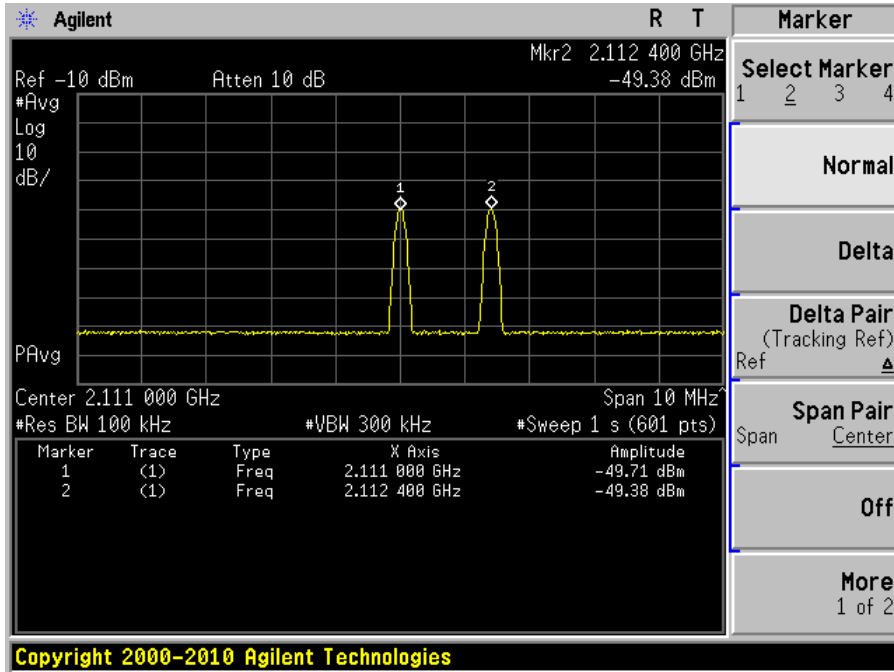


Output

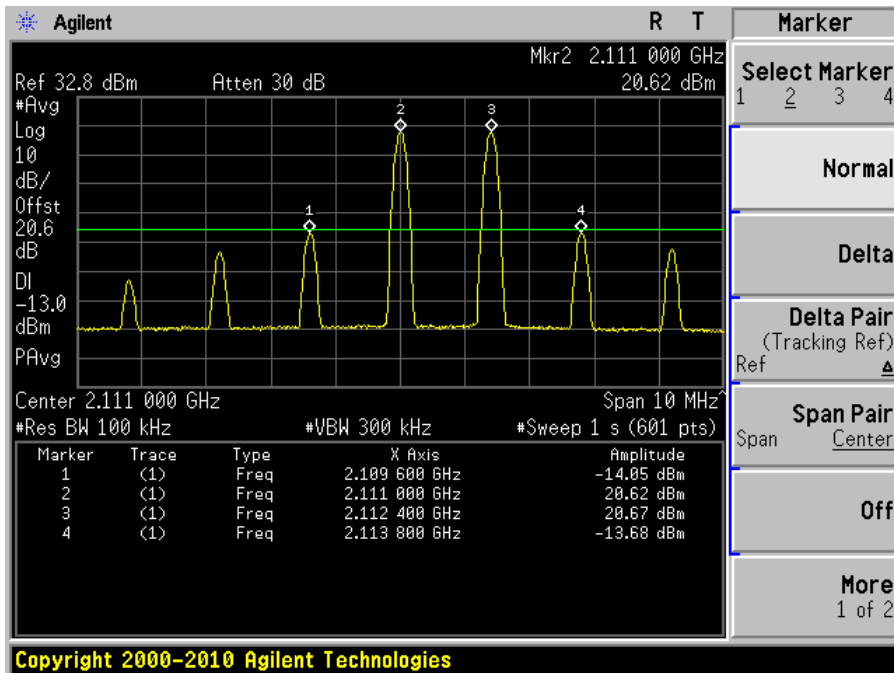

Middle Frequency Input

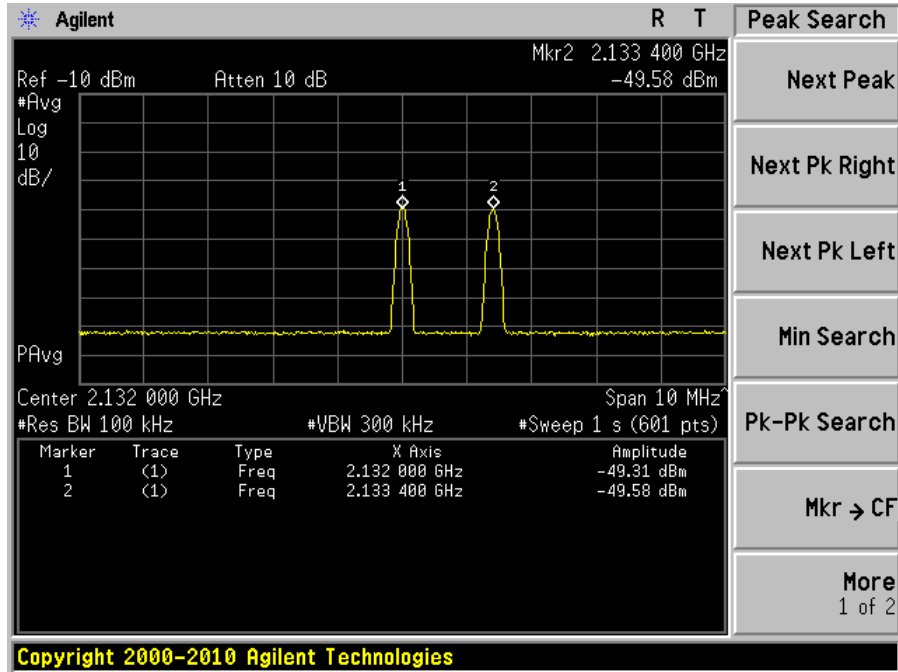


Output

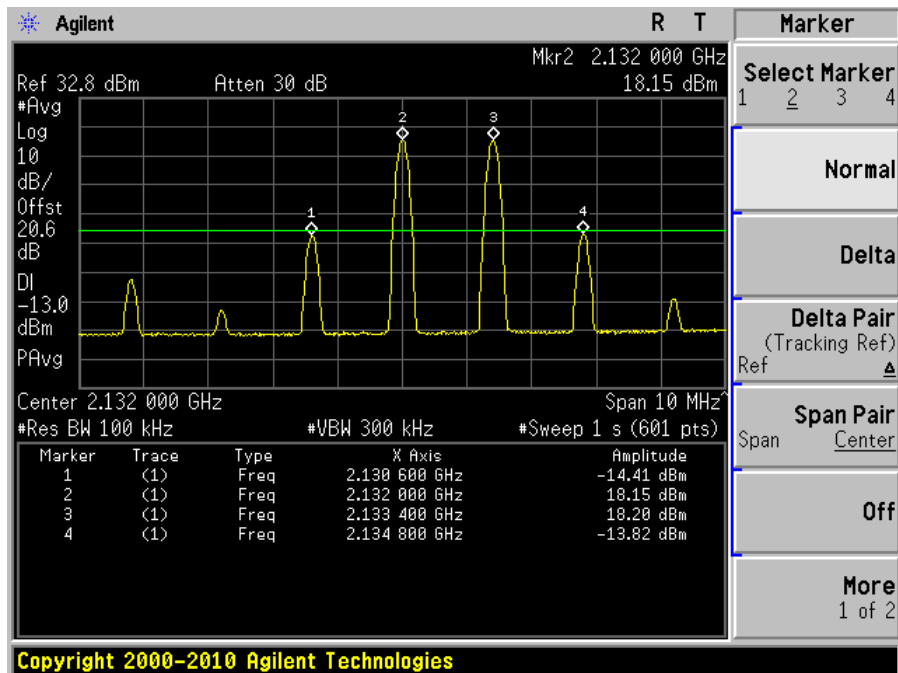


Highest Frequency

Input

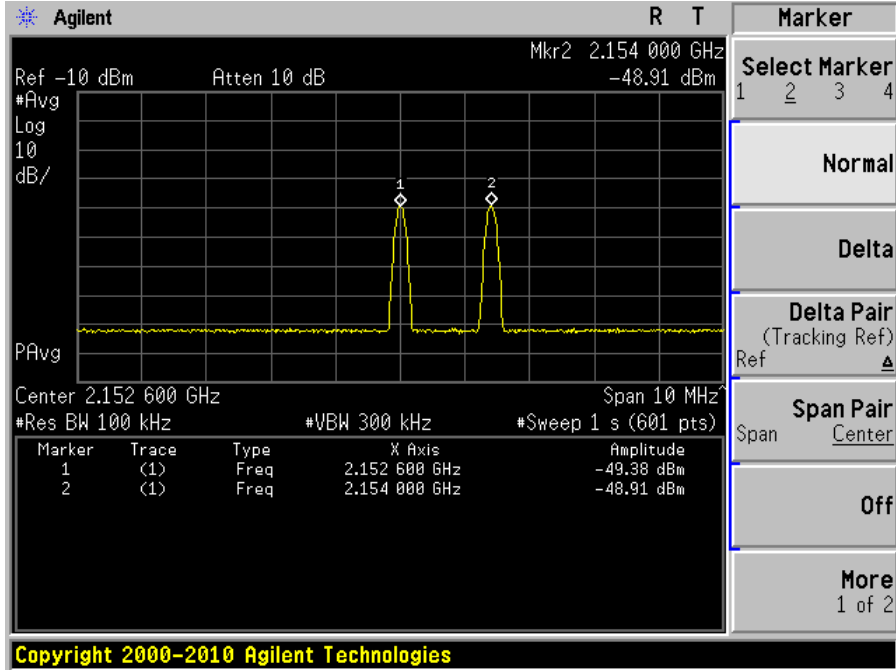


Output

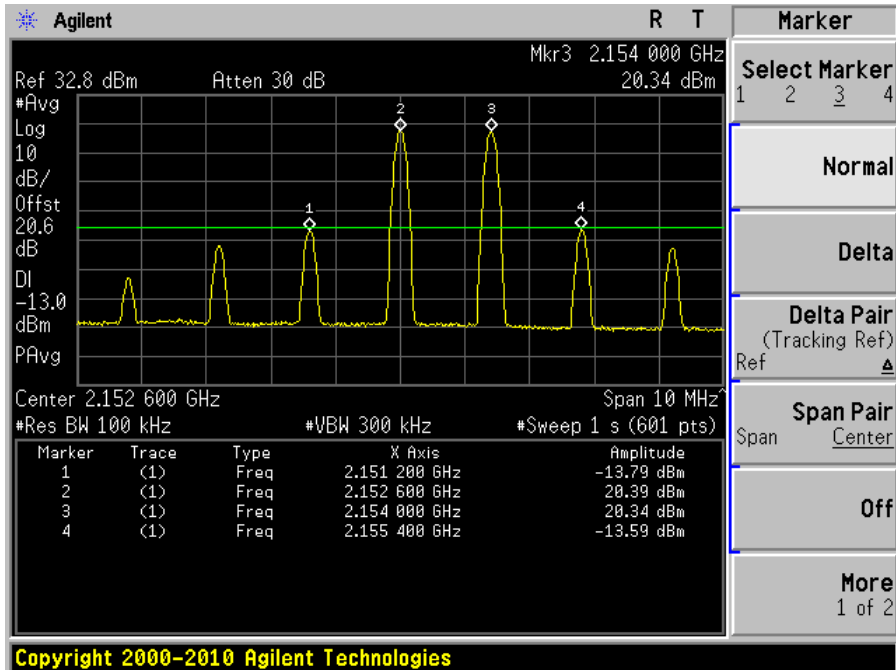


Uplink: 1710-1755 MHz

Modulation: CW Signal, Frequency: 1732 MHz

Plot 1: 30 MHz to 1 GHz

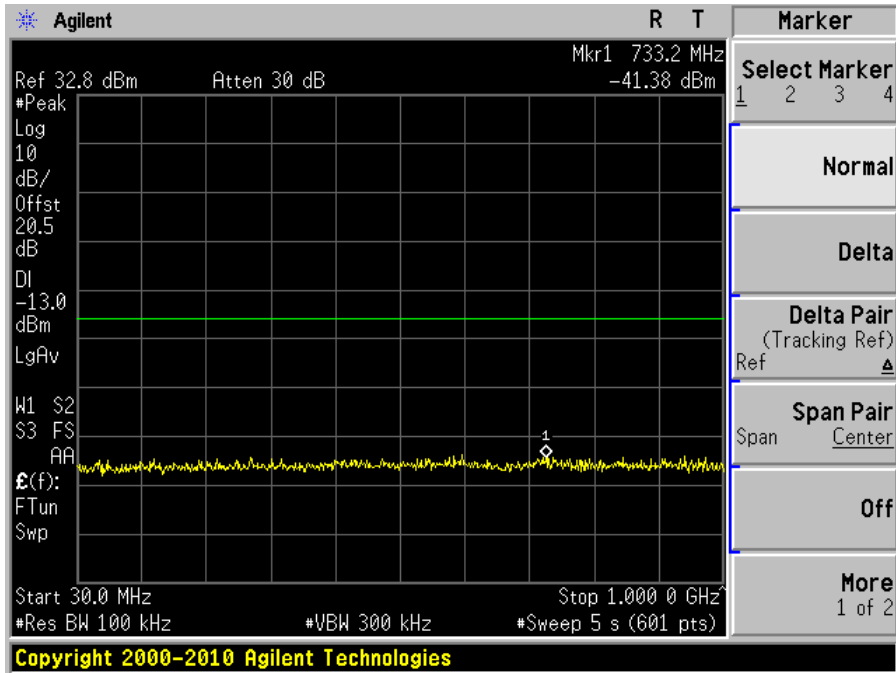


Plot 2: Above 1 GHz

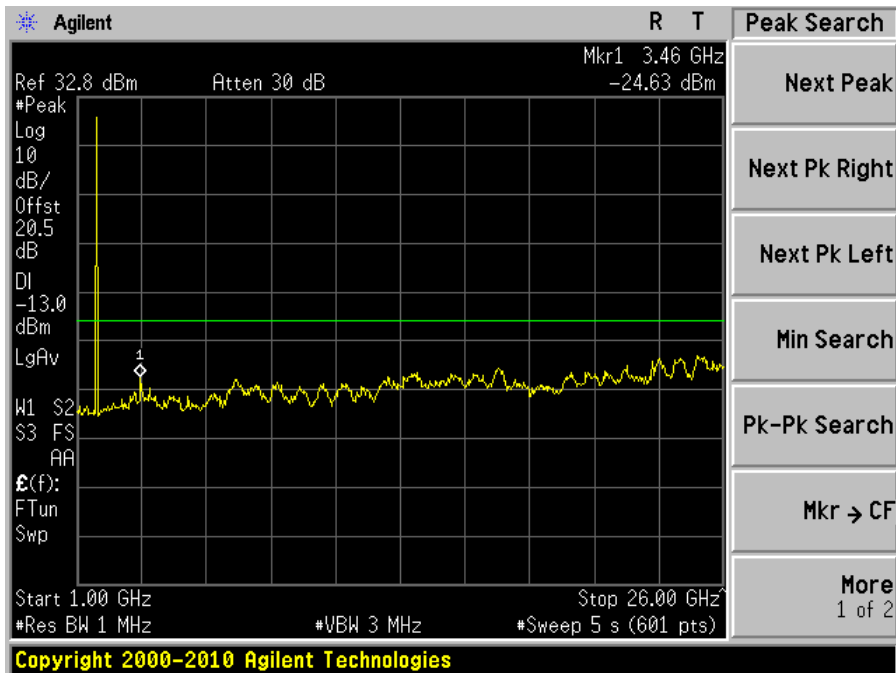


Inter-modulation:

Lowest Frequency


Input

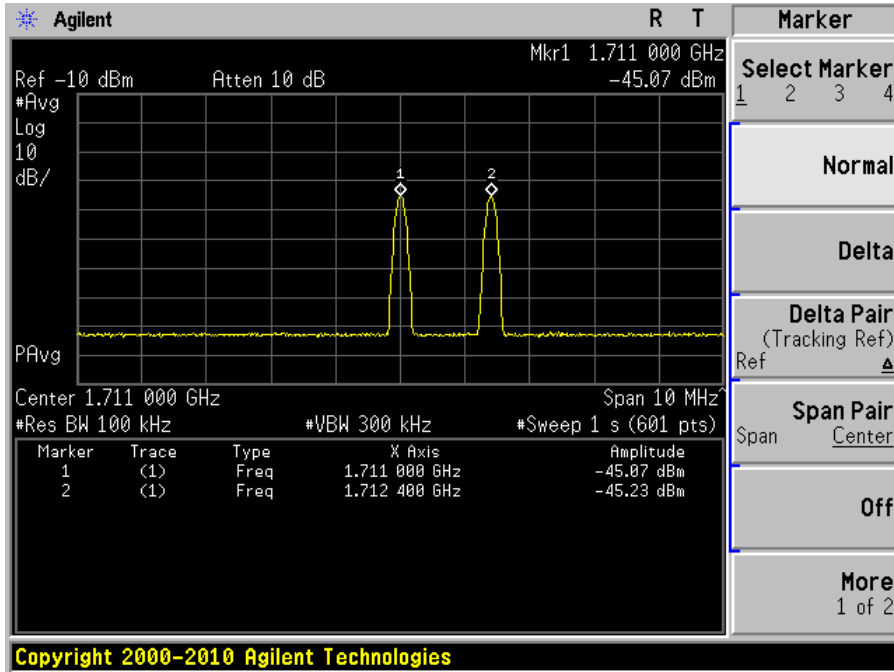


Output

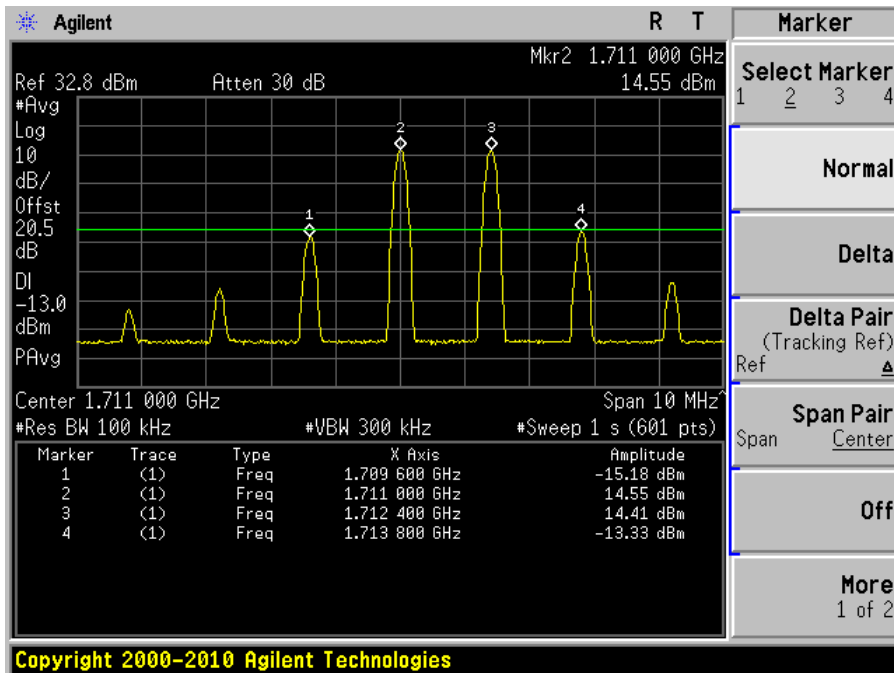

Middle Frequency Input

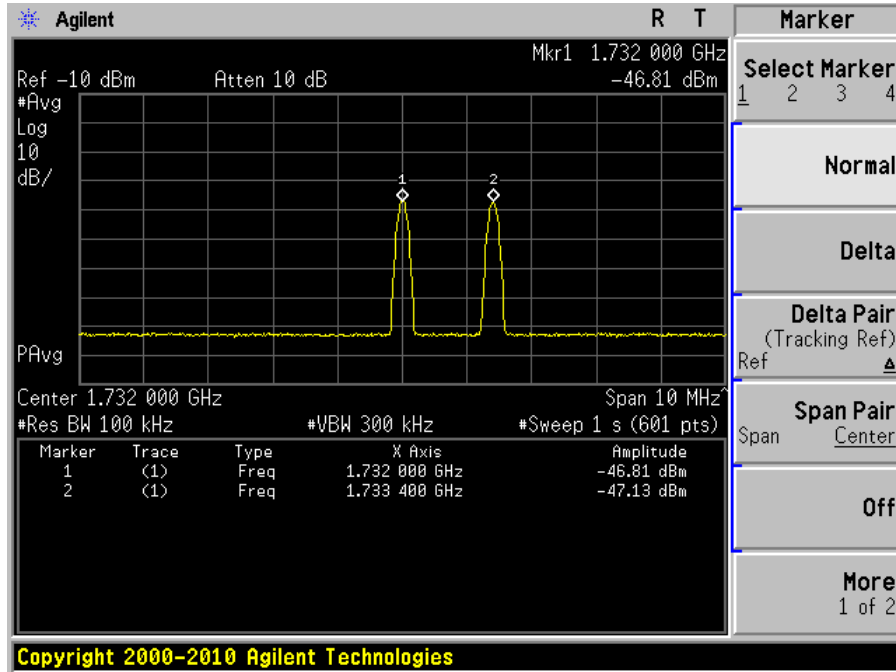


Output

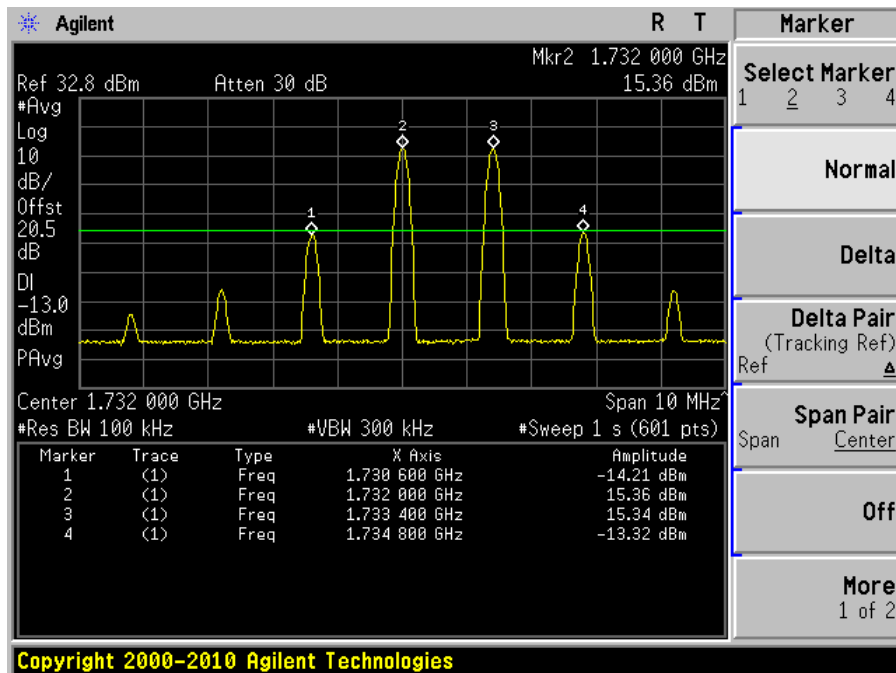


Highest Frequency

Input

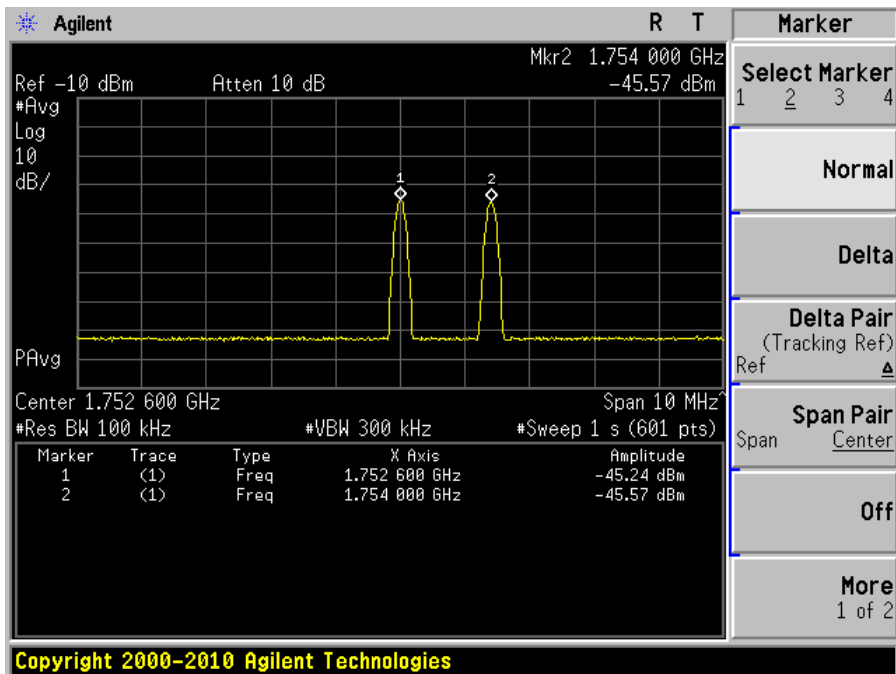

Output

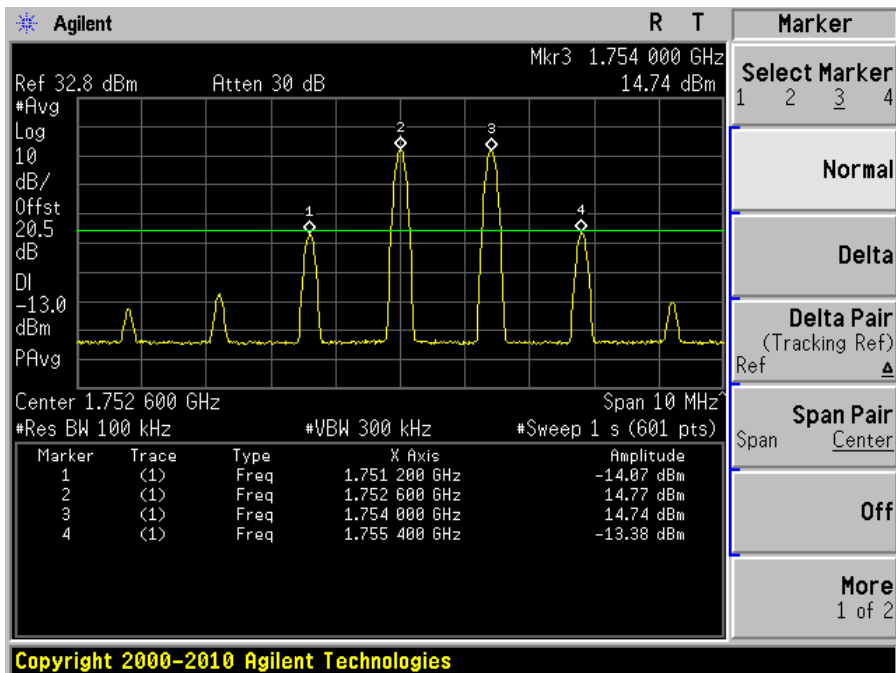

9 FCC §27.53 – BAND EDGE

9.1 Applicable Standard

According to FCC §27.53, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

9.3 Test Environmental Conditions

Temperature:	20-25°C
Relative Humidity:	38-45 %
ATM Pressure:	101-102 kPa

The testing was performed by Quinn Jiang from 2011-06-16 to 2011-06-18 at RF Site.

9.4 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	ESG-D Series Signal Generator	E4438C	MY45091309	2011-04-28
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


9.5 Test Results

Please refer to the following plots.


LTE, Downlink: 2110-2155 MHz

Modulation: LTE-QPSK (1.4 MHz):

Plot 1: Lowest Edge

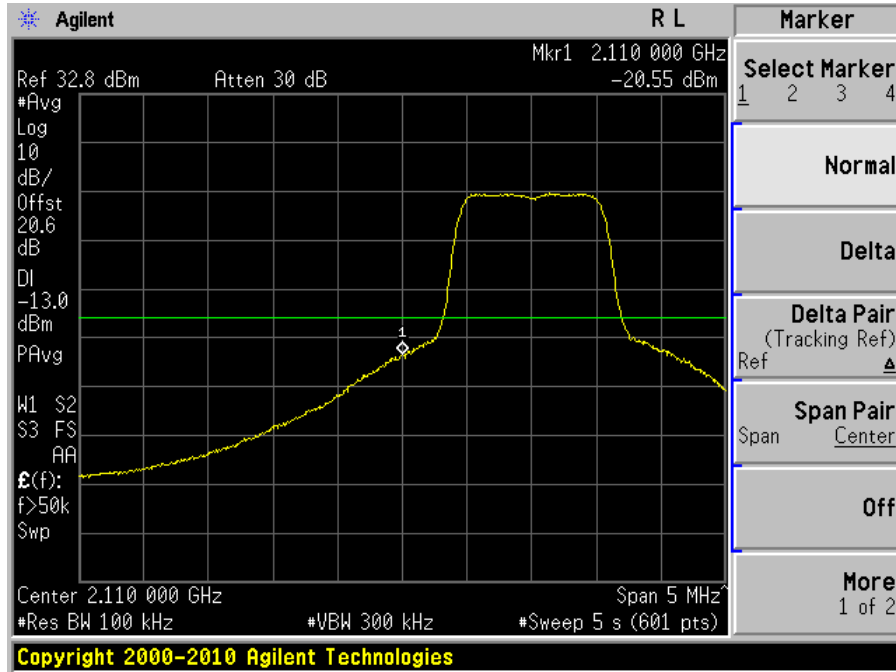


Plot 2: Highest Edge

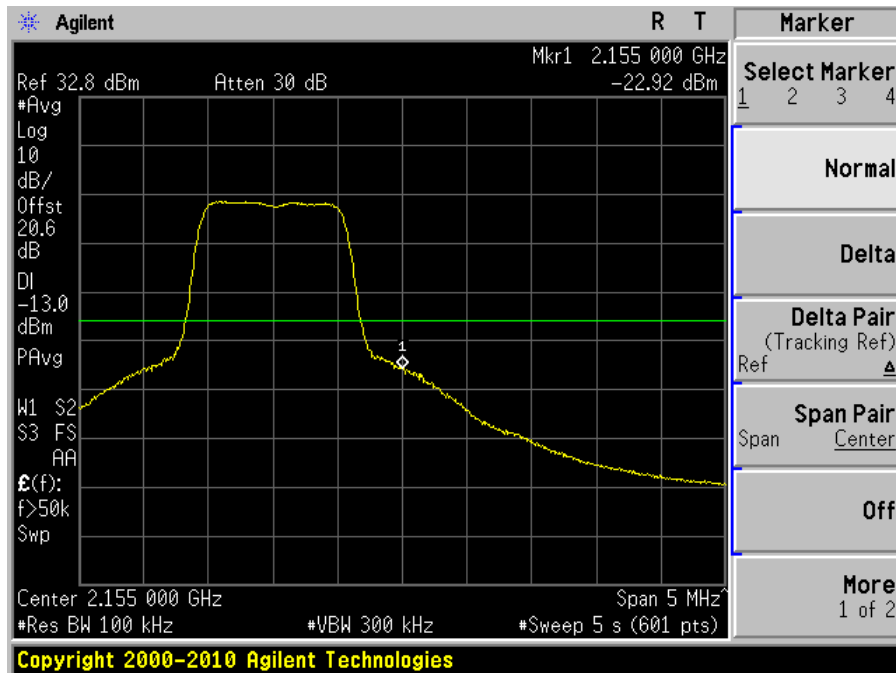


Modulation: LTE-16QAM (1.4 MHz):

Plot 1: Lowest Edge

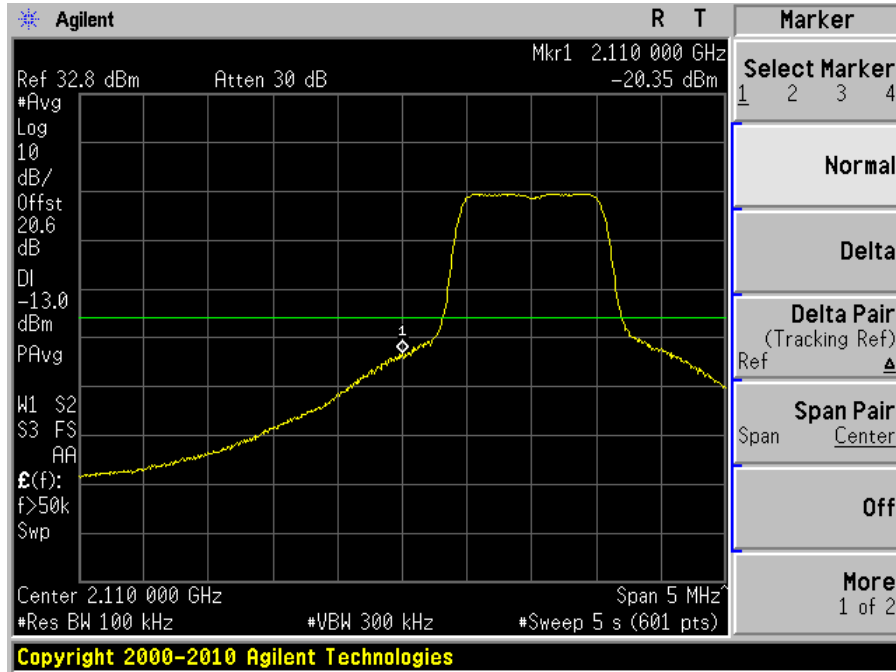


Plot 2: Highest Edge

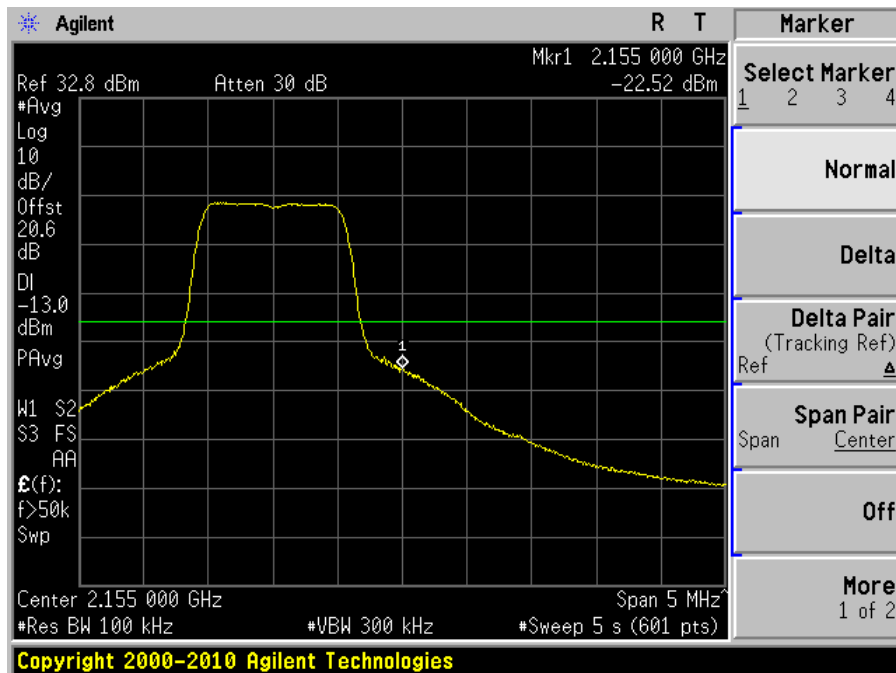


Modulation: LTE-64QAM (1.4 MHz):

Plot 1: Lowest Edge

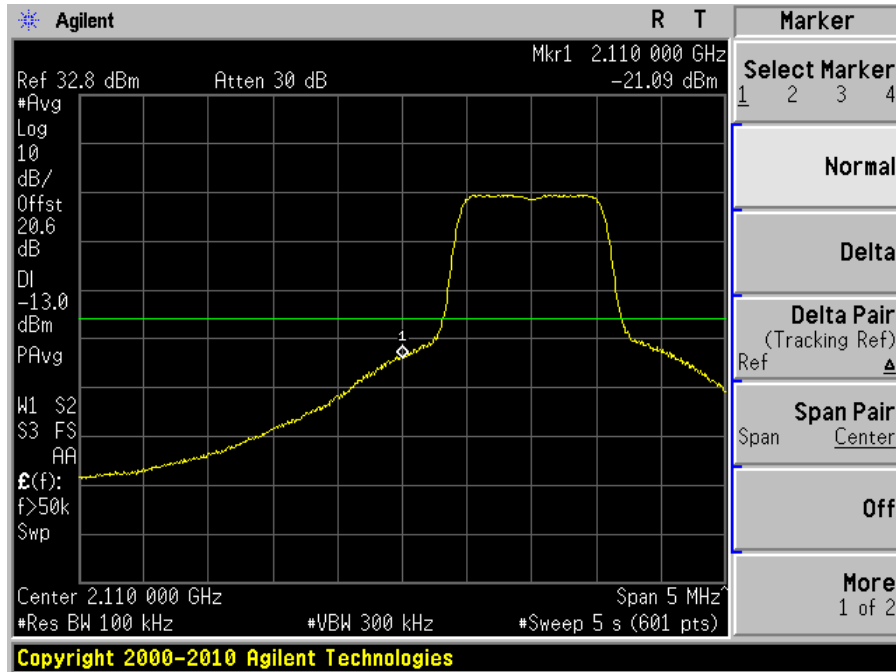


Plot 2: Highest Edge

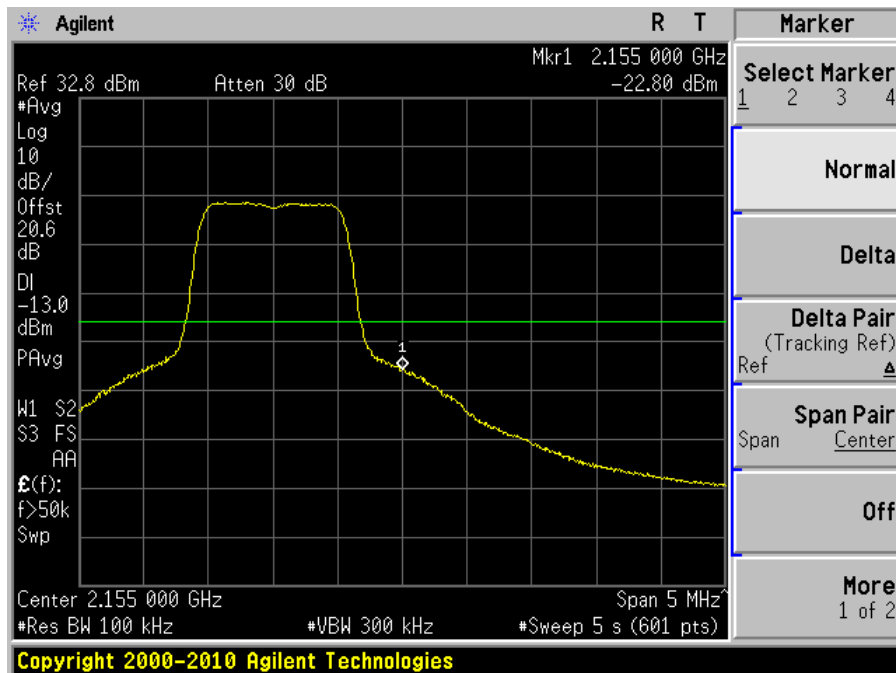


Modulation: LTE-QPSK (3 MHz):

Plot 1: Lowest Edge

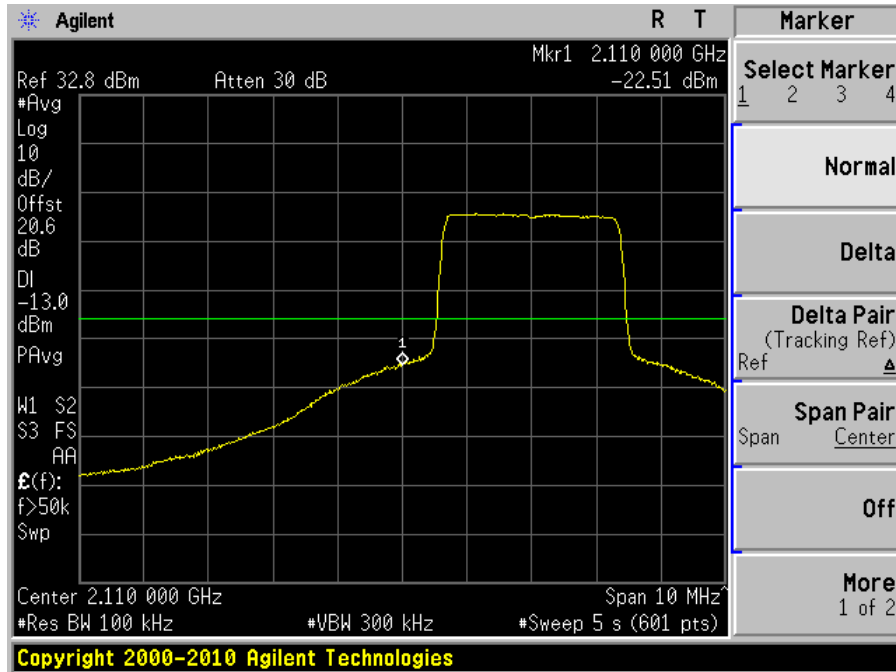


Plot 2: Highest Edge

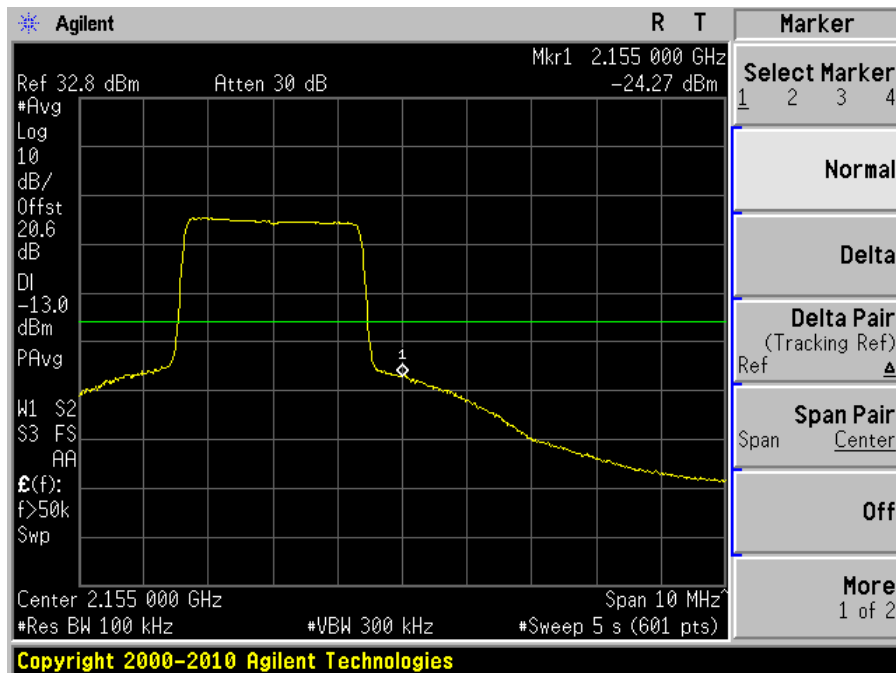


Modulation: LTE-16QAM (3 MHz):

Plot 1: Lowest Edge

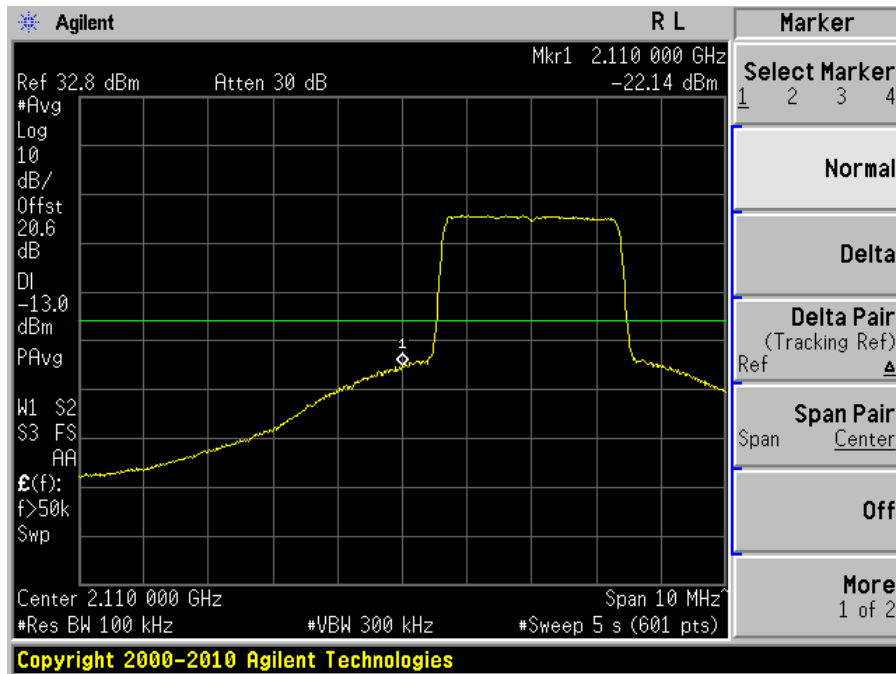


Plot 2: Highest Edge

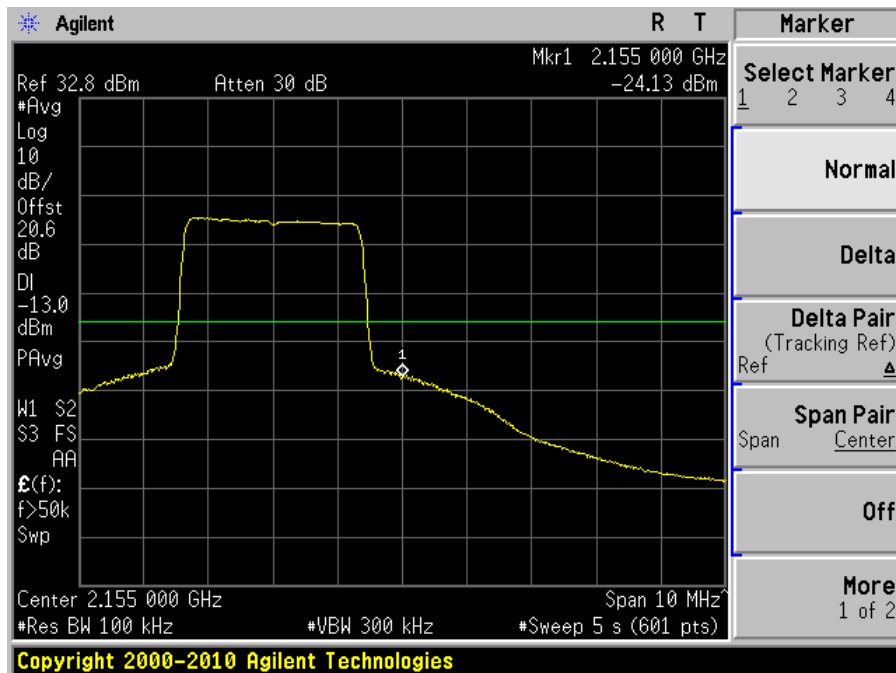


Modulation: LTE-64QAM (3 MHz):

Plot 1: Lowest Edge

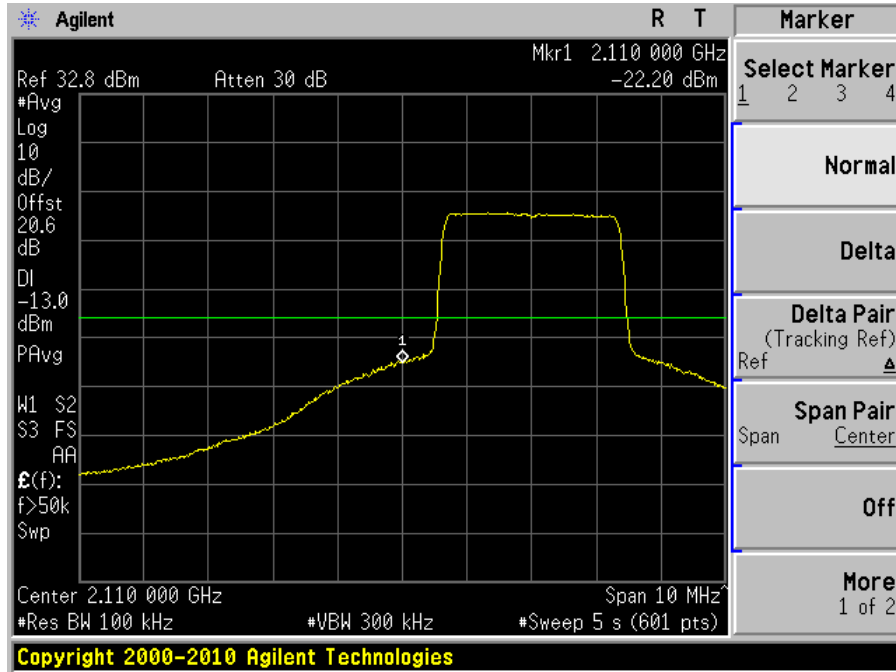


Plot 2: Highest Edge

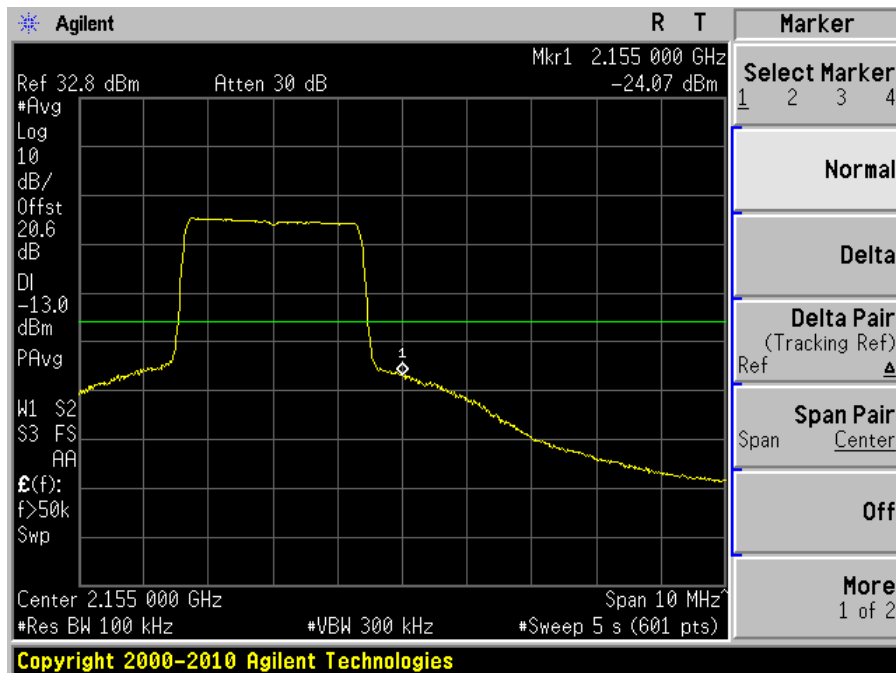


Modulation: LTE-QPSK (5 MHz):

Plot 1: Lowest Edge

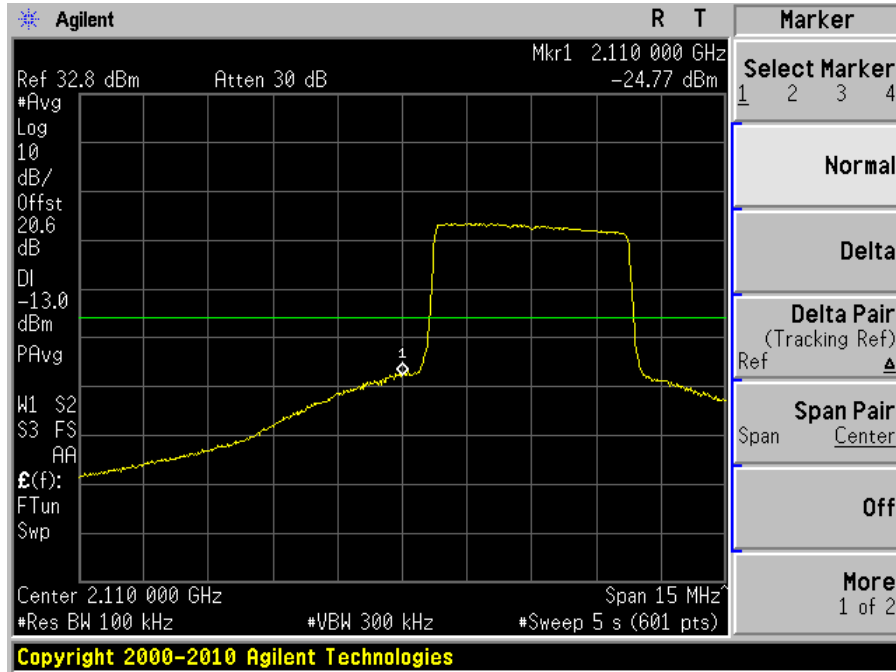


Plot 2: Highest Edge

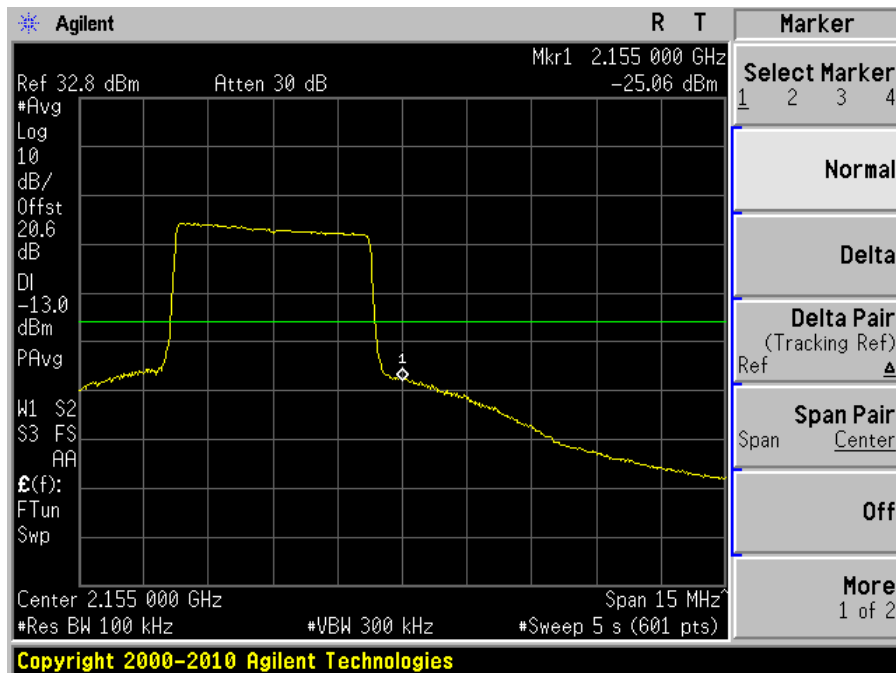


Modulation: LTE-16QAM (5 MHz):

Plot 1: Lowest Edge

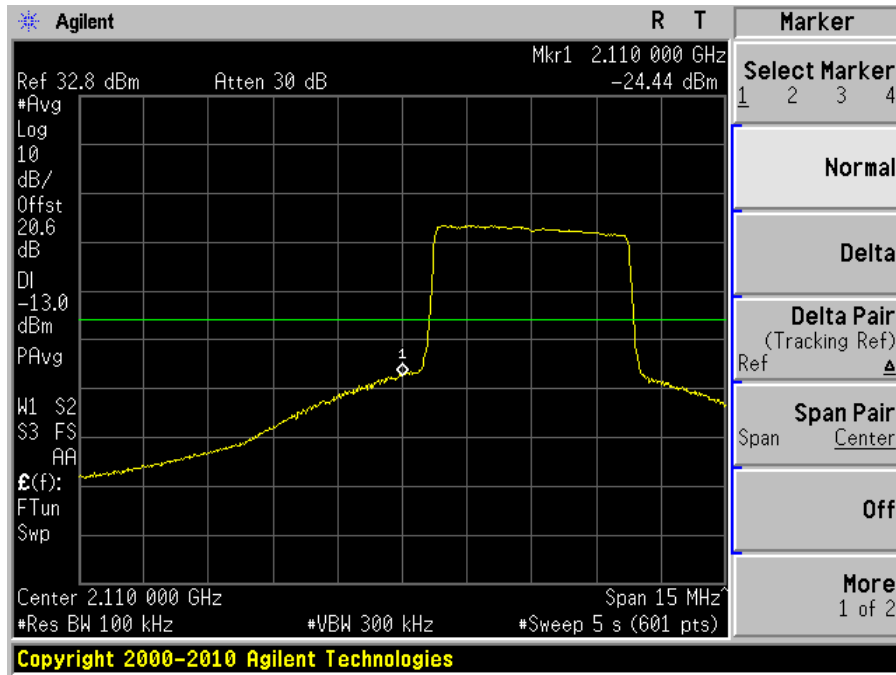


Plot 2: Highest Edge

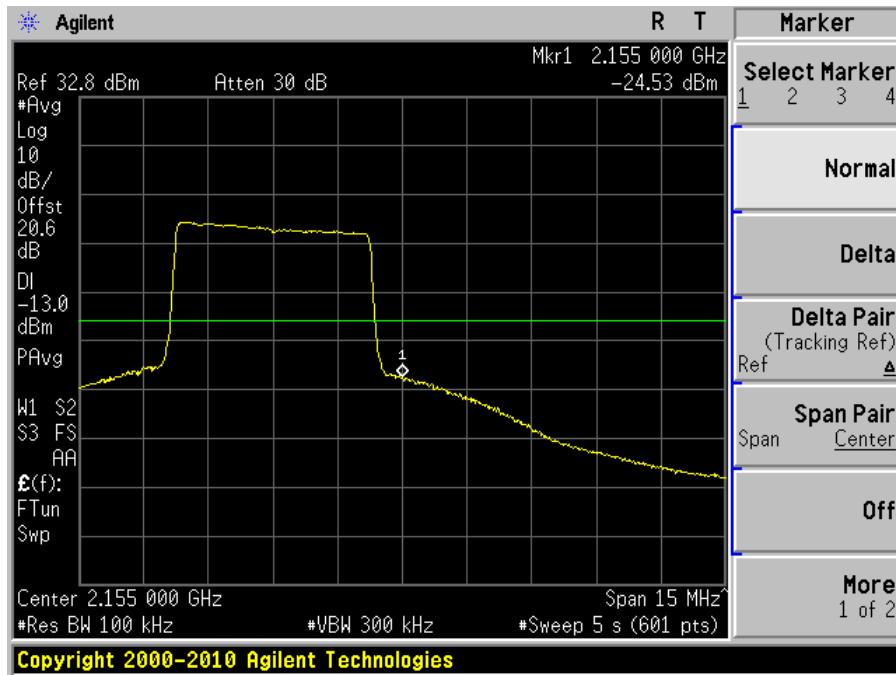


Modulation: LTE-64QAM (5 MHz):

Plot 1: Lowest Edge

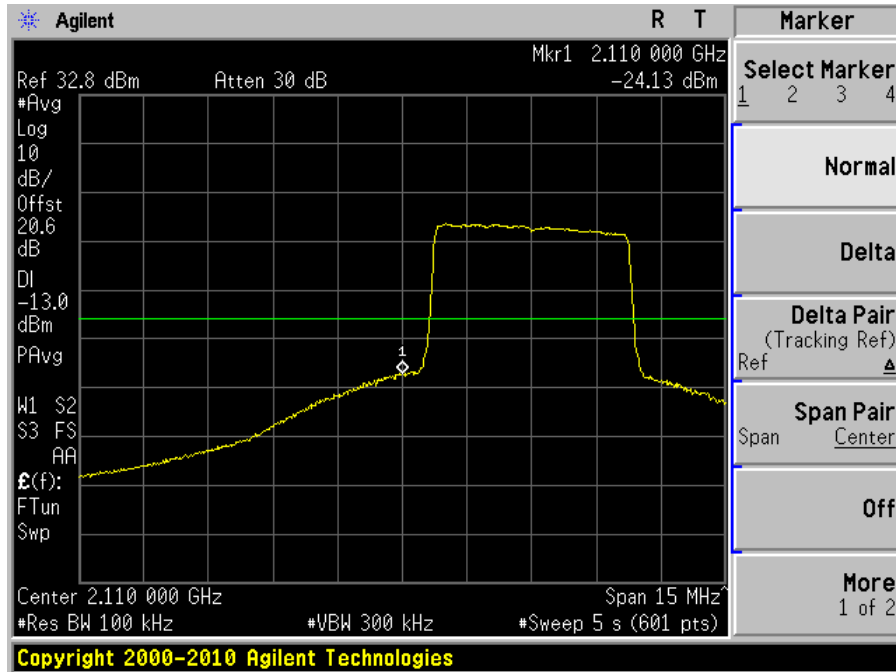


Plot 2: Highest Edge

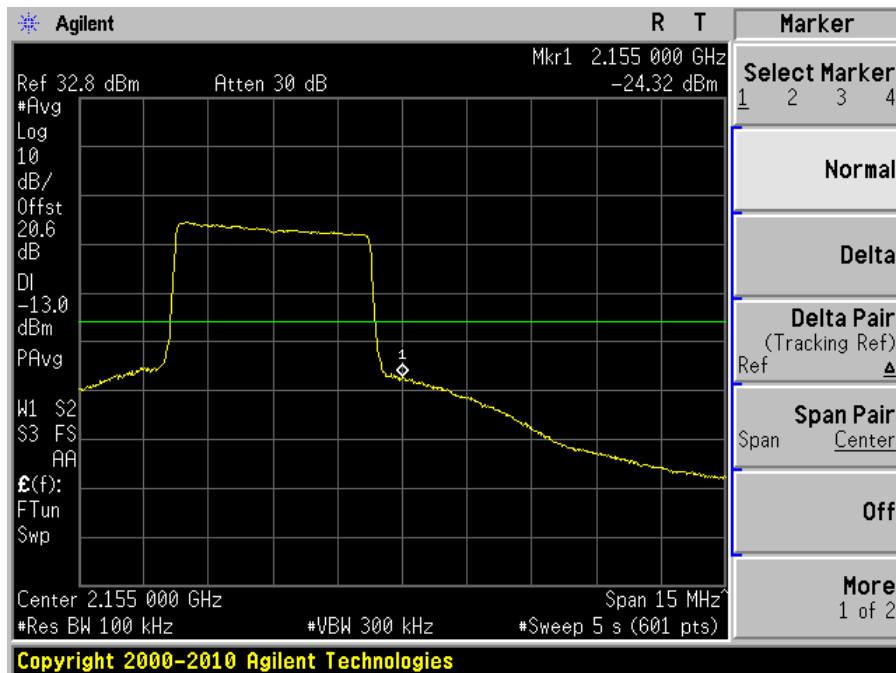


Modulation: LTE-QPSK (10 MHz):

Plot 1: Lowest Edge

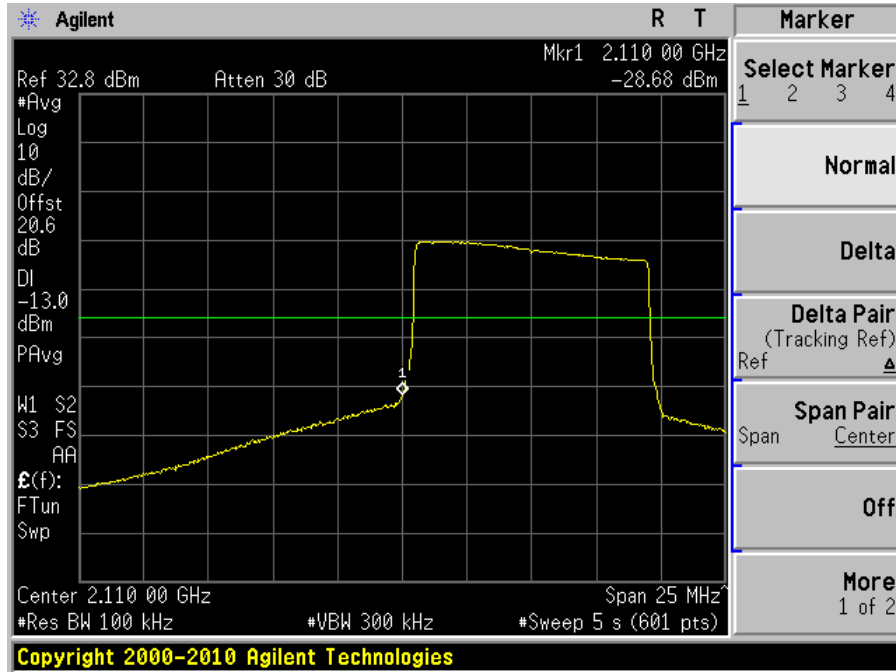


Plot 2: Highest Edge

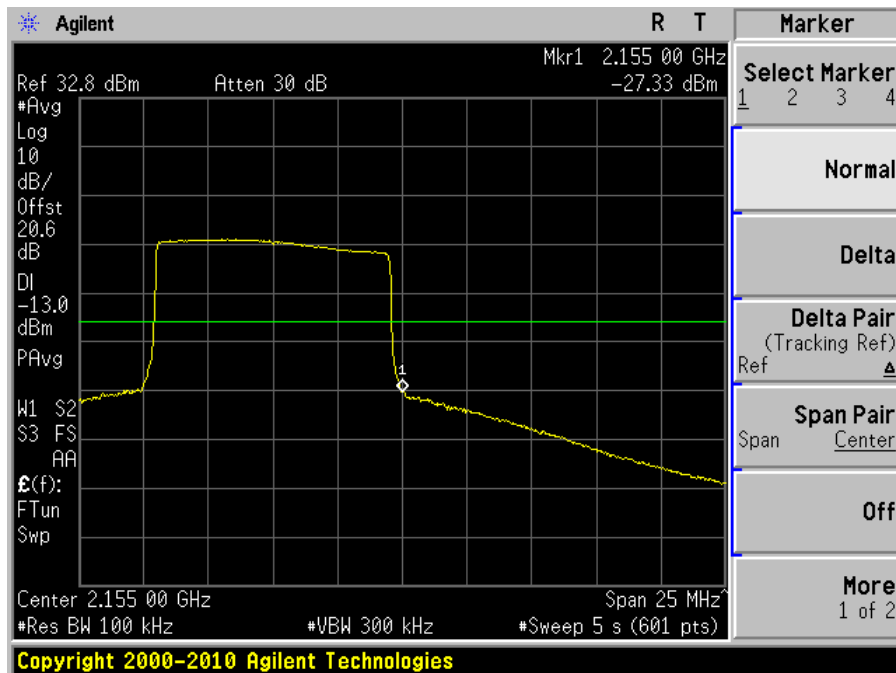


Modulation: LTE-16QAM (10 MHz):

Plot 1: Lowest Edge

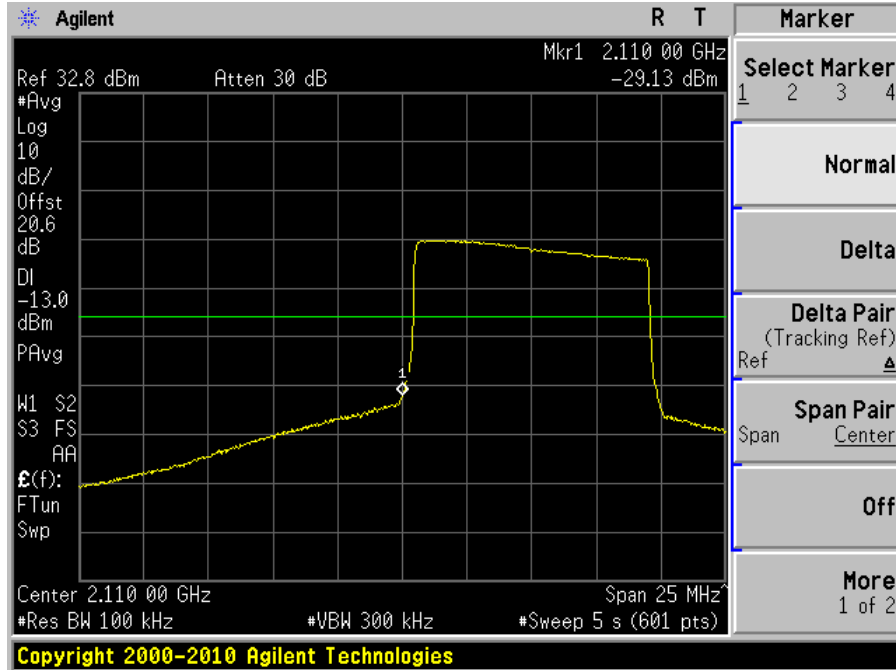


Plot 2: Highest Edge

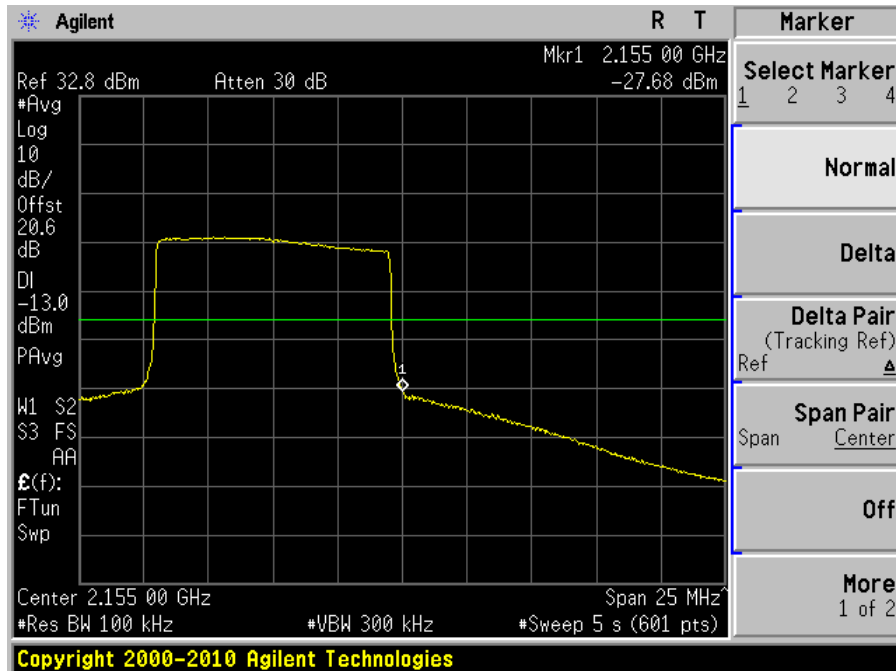


Modulation: LTE-64QAM (10 MHz):

Plot 1: Lowest Edge

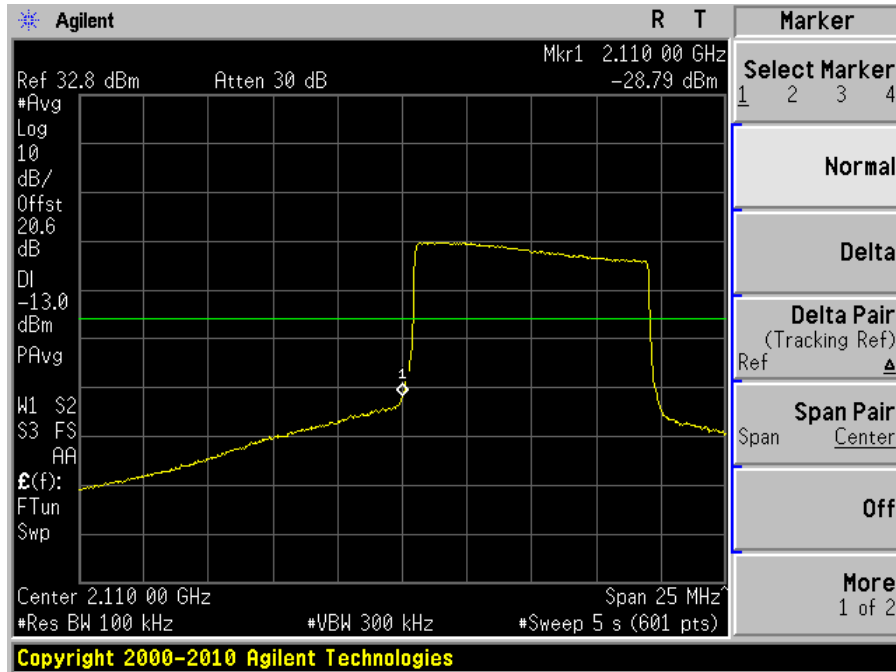


Plot 2: Highest Edge

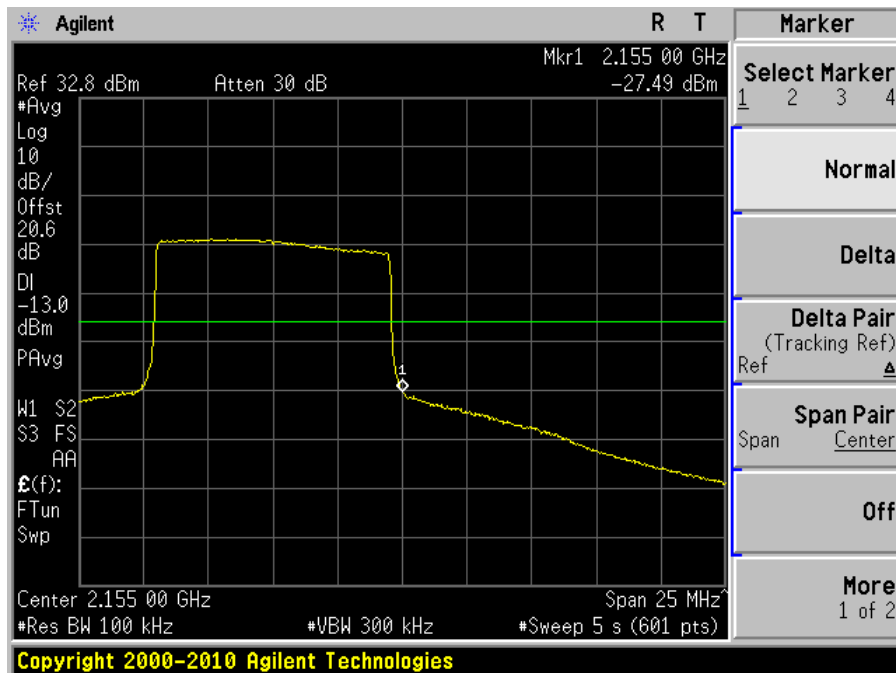


LTE, Uplink: 1710-1755 MHz

Modulation: LTE-QPSK (1.4 MHz):

Plot 1: Lowest Edge

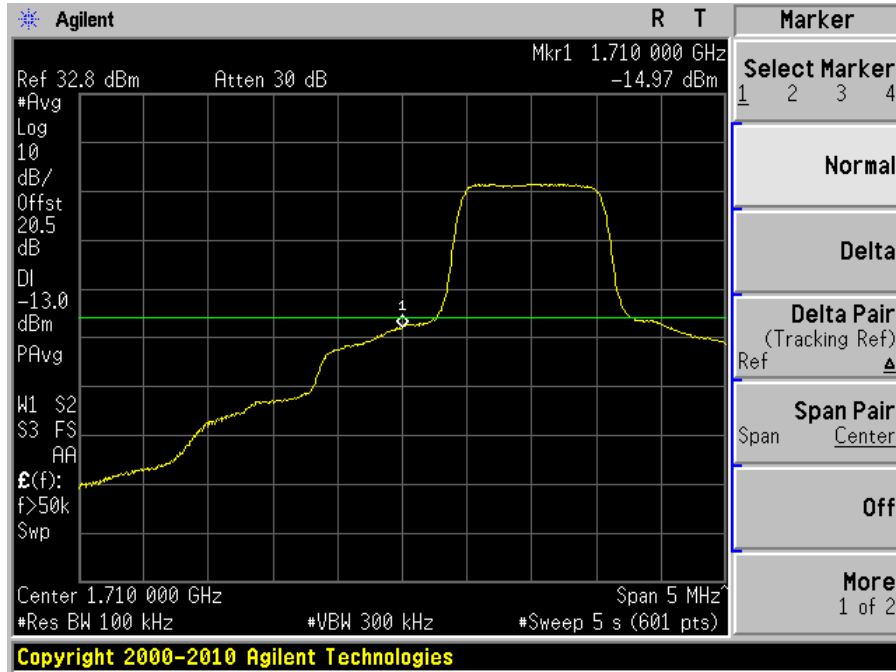


Plot 2: Highest Edge

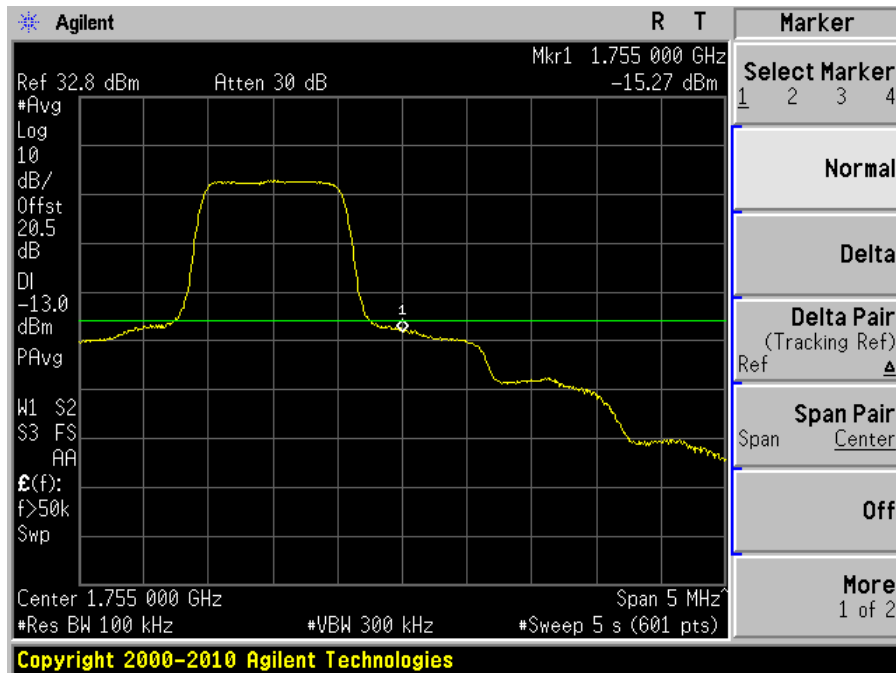


Modulation: LTE-16QAM (1.4 MHz):

Plot 1: Lowest Edge

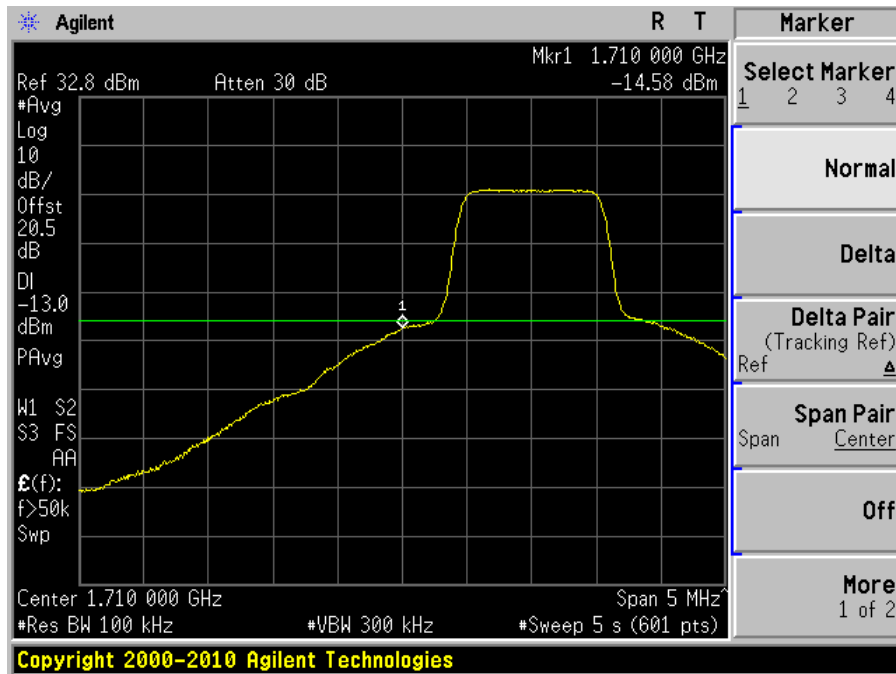


Plot 2: Highest Edge

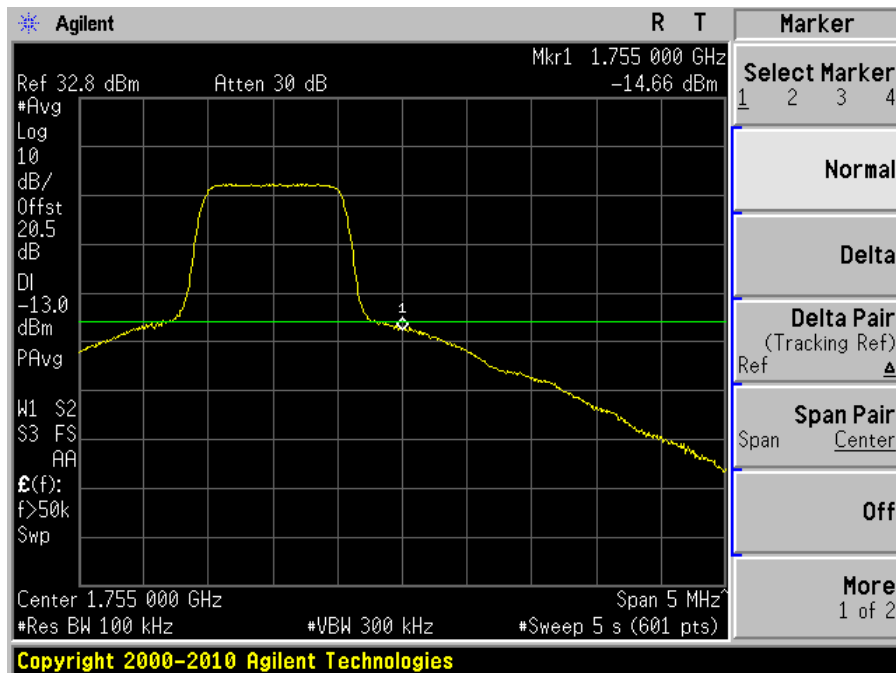


Modulation: LTE-64QAM (1.4 MHz):

Plot 1: Lowest Edge

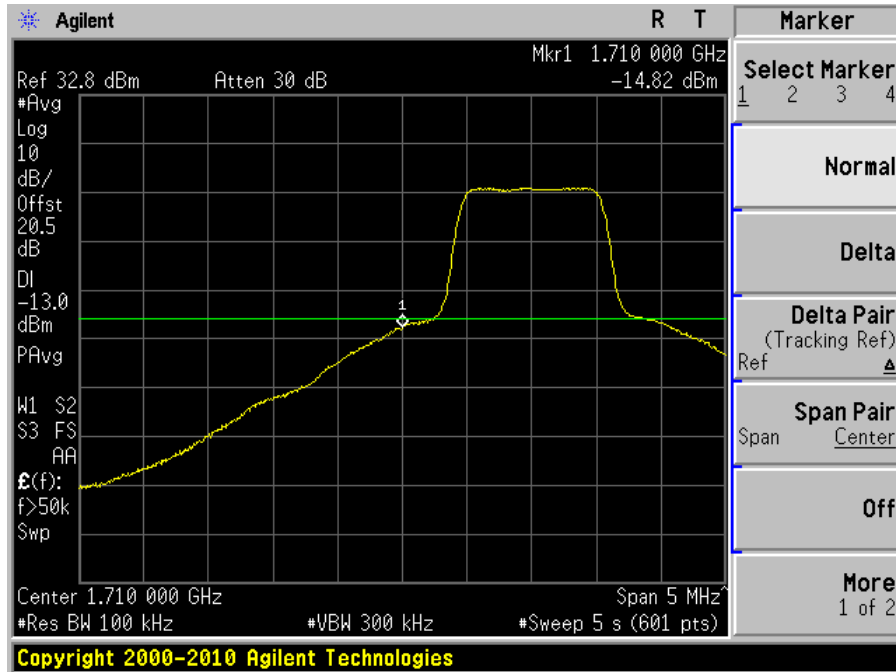


Plot 2: Highest Edge

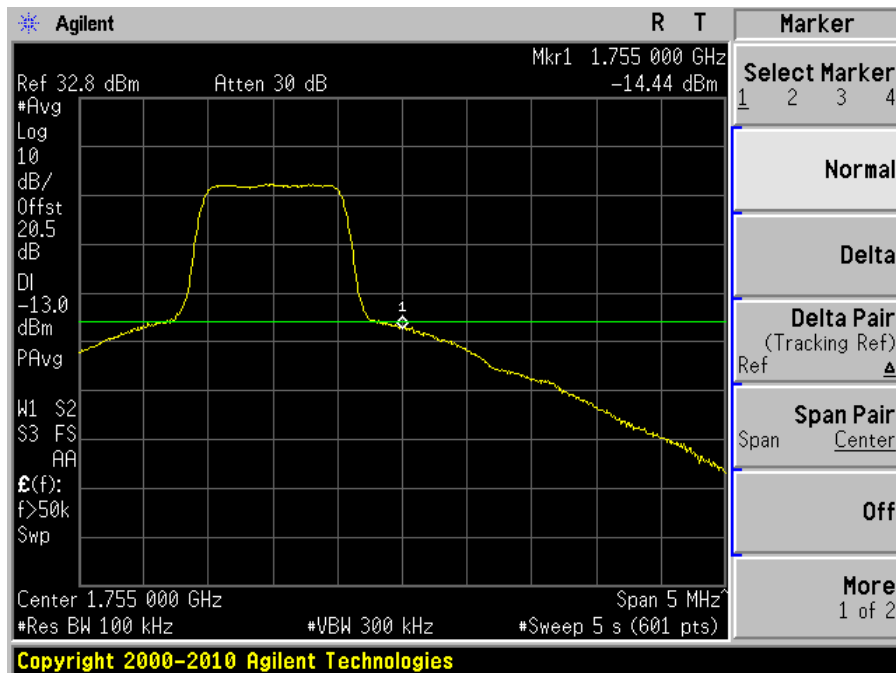


Modulation: LTE-QPSK (3 MHz):

Plot 1: Lowest Edge

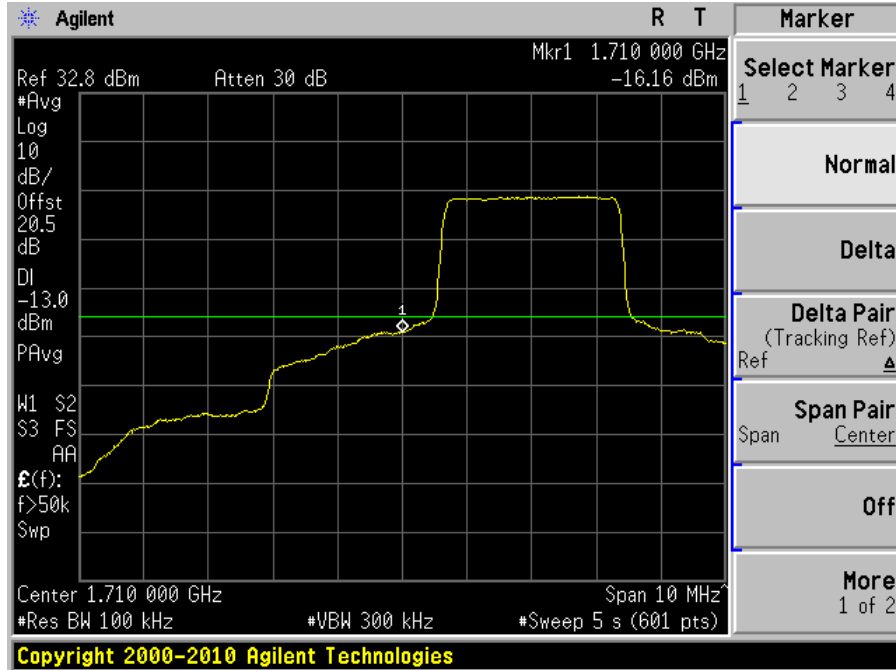


Plot 2: Highest Edge

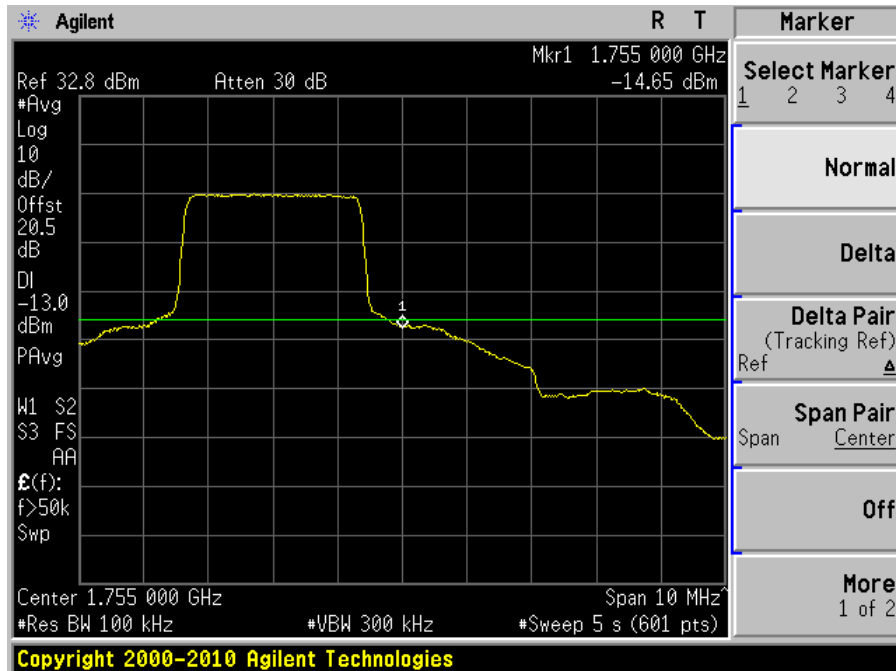


Modulation: LTE-16QAM (3 MHz):

Plot 1: Lowest Edge

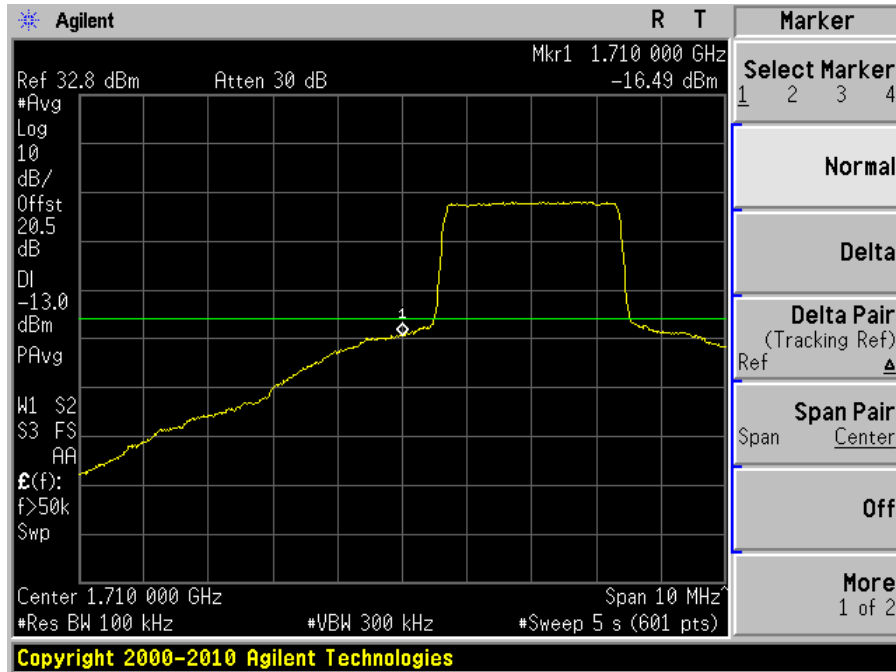


Plot 2: Highest Edge

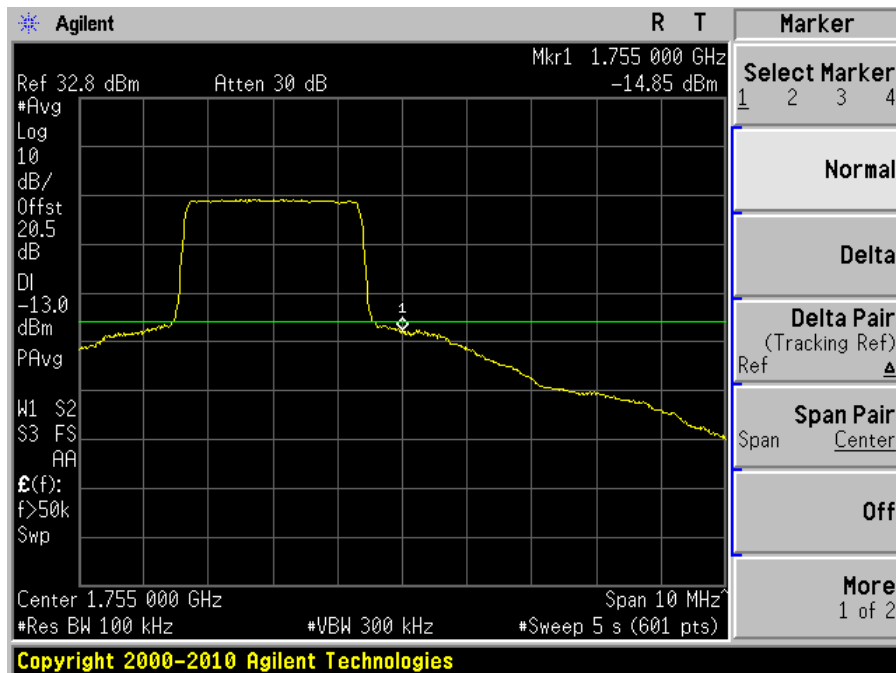


Modulation: LTE-64QAM (3 MHz):

Plot 1: Lowest Edge

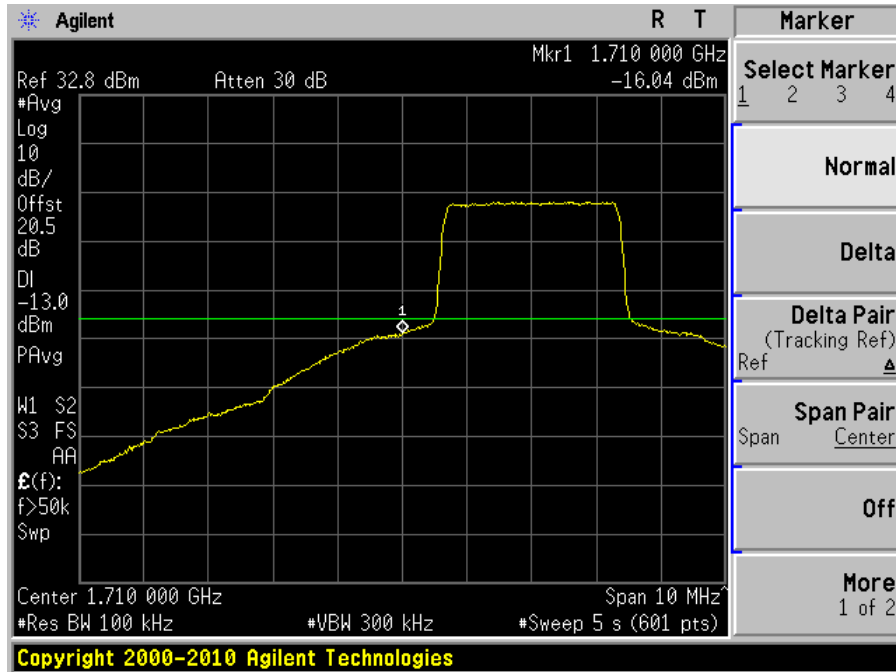


Plot 2: Highest Edge

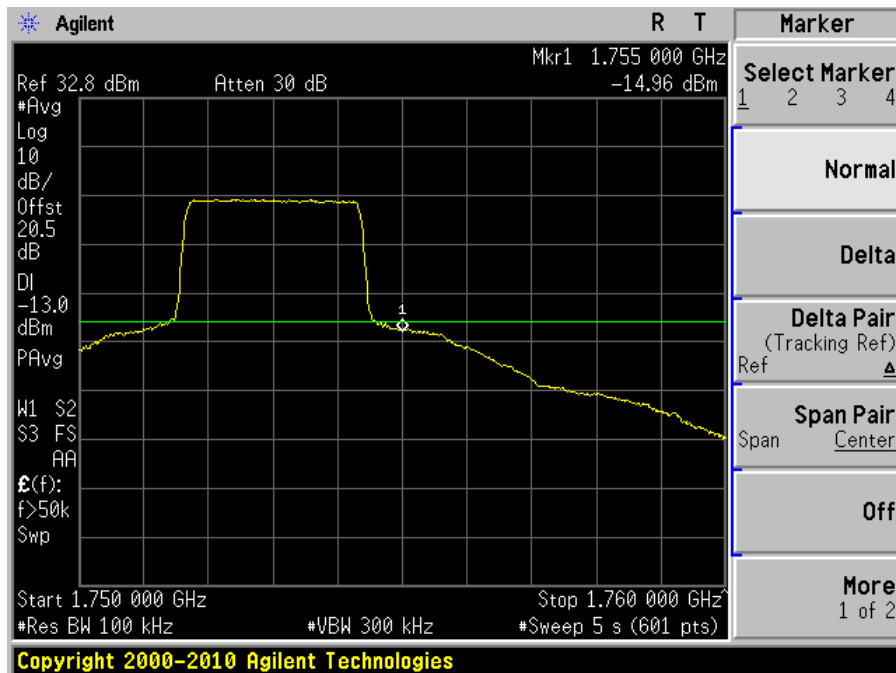


Modulation: LTE-QPSK (5 MHz):

Plot 1: Lowest Edge

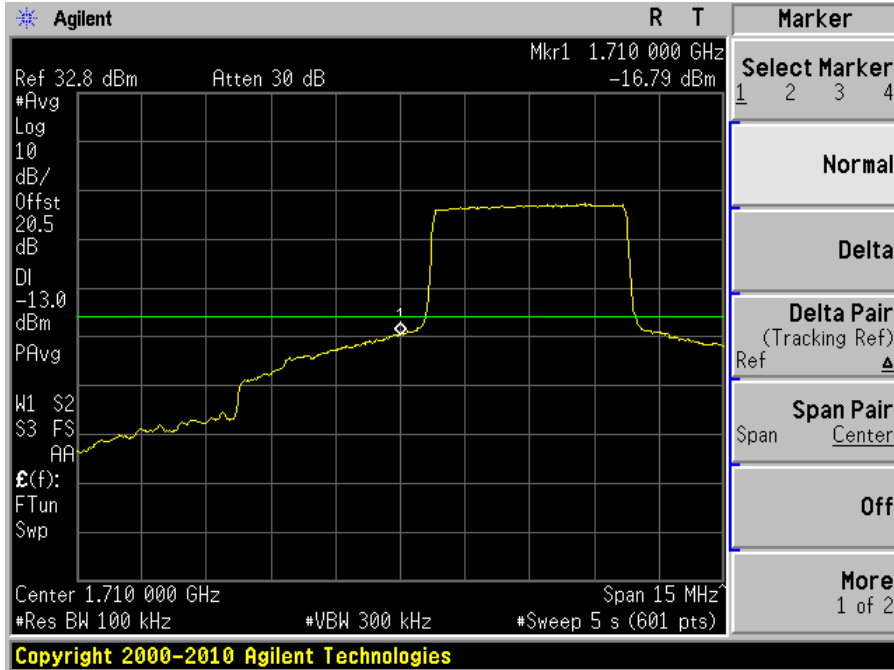


Plot 2: Highest Edge

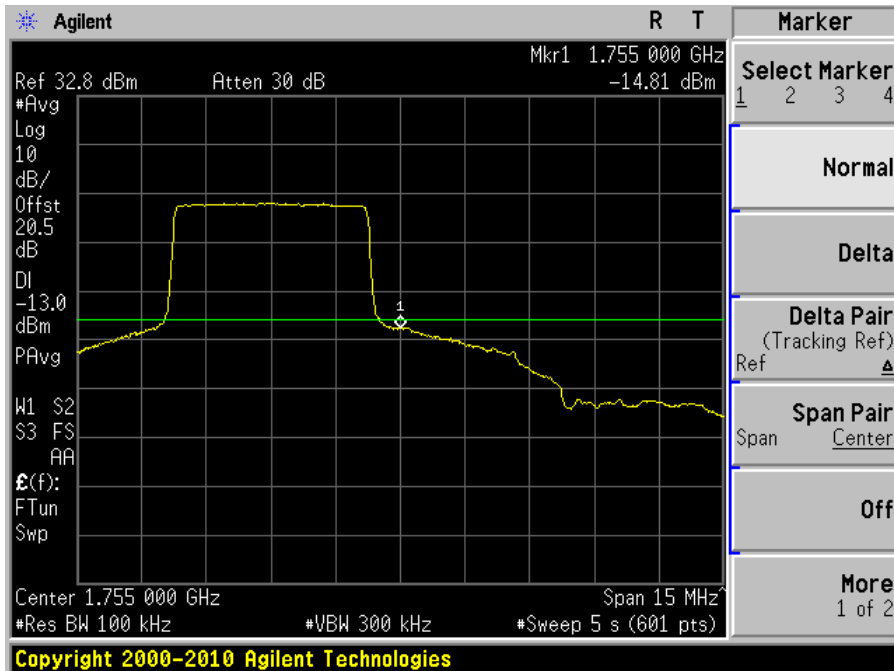


Modulation: LTE-16QAM (5 MHz):

Plot 1: Lowest Edge

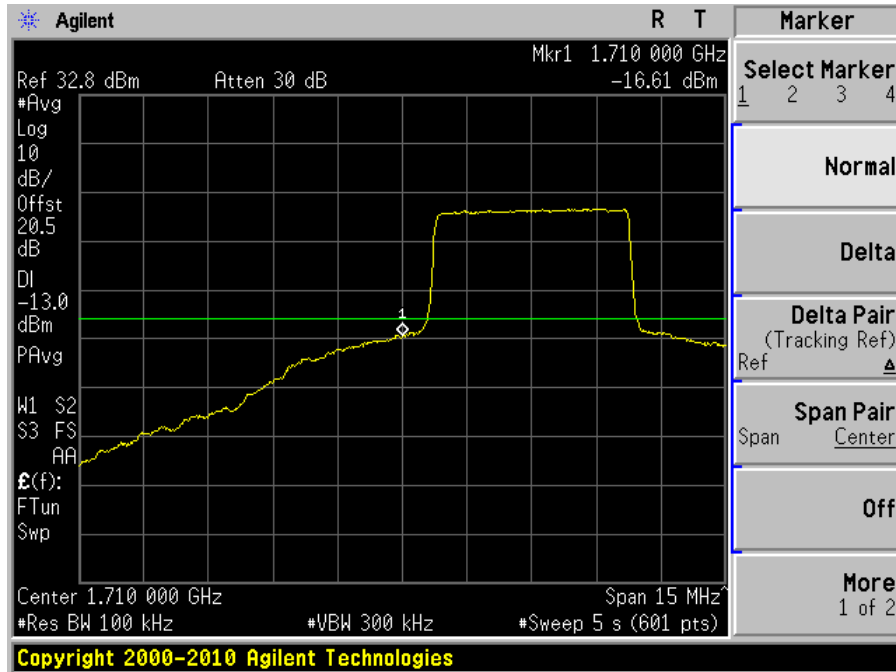


Plot 2: Highest Edge

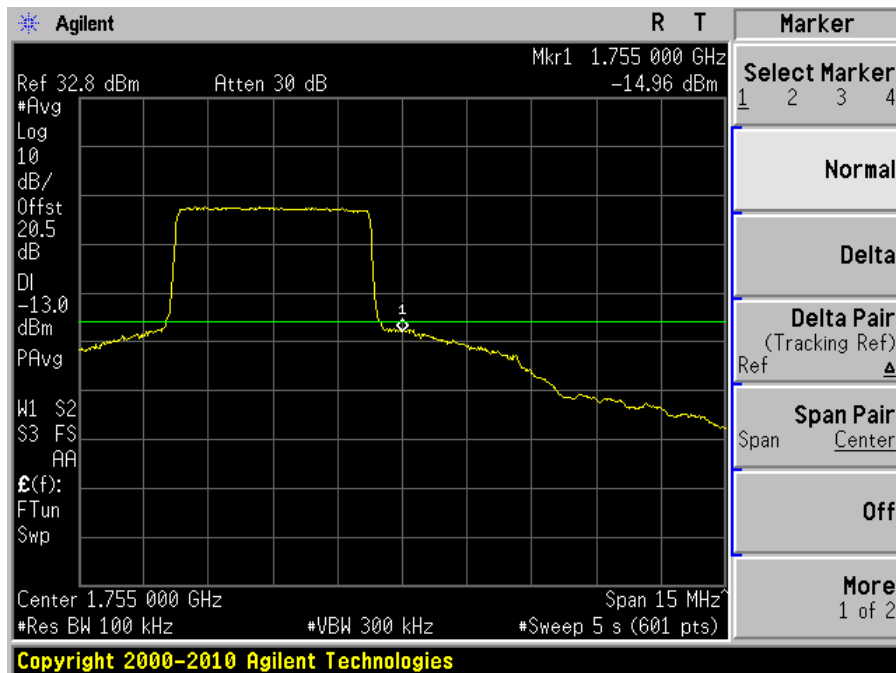


Modulation: LTE-64QAM (5 MHz):

Plot 1: Lowest Edge

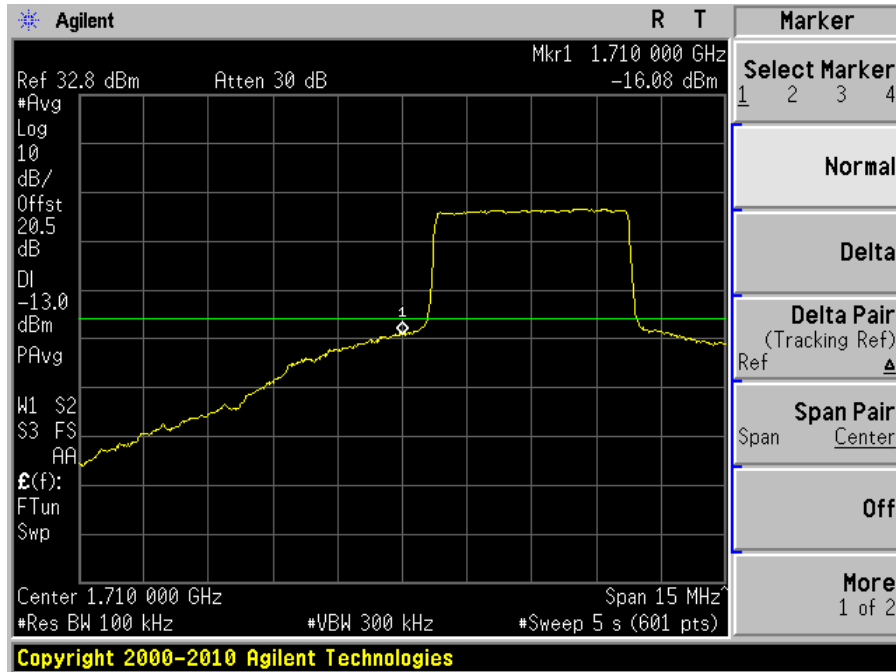


Plot 2: Highest Edge

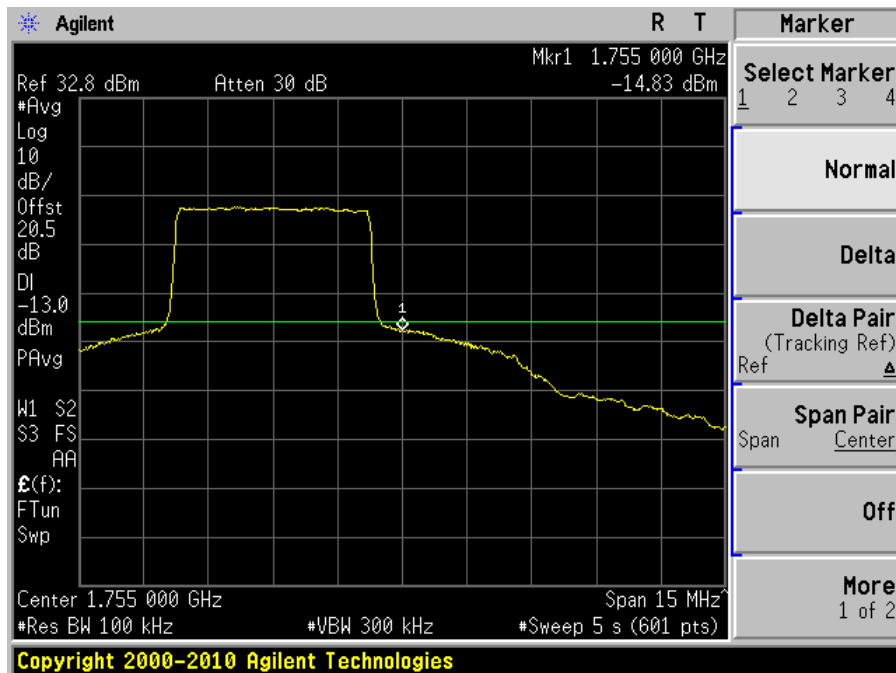


Modulation: LTE-QPSK (10 MHz):

Plot 1: Lowest Edge

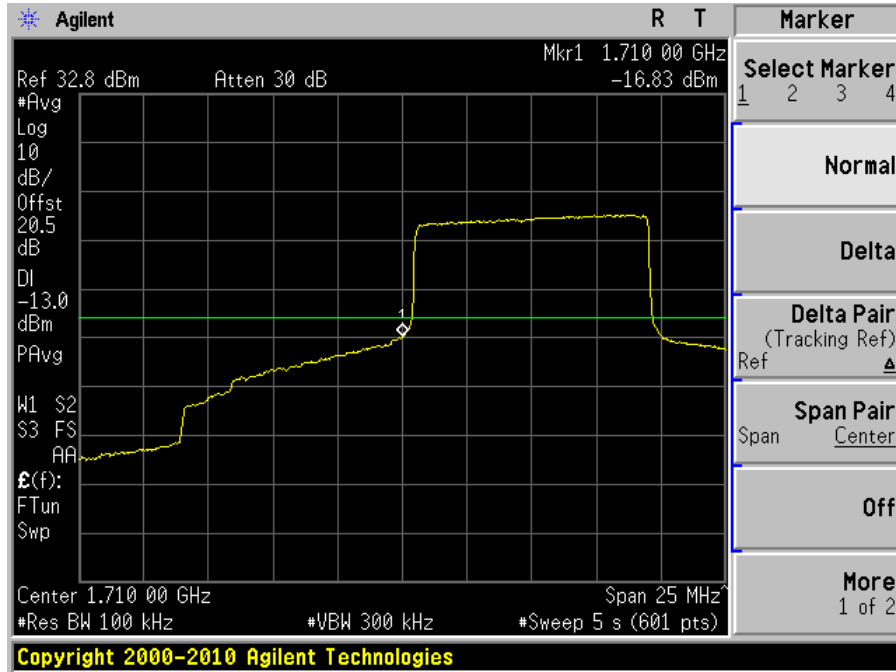


Plot 2: Highest Edge

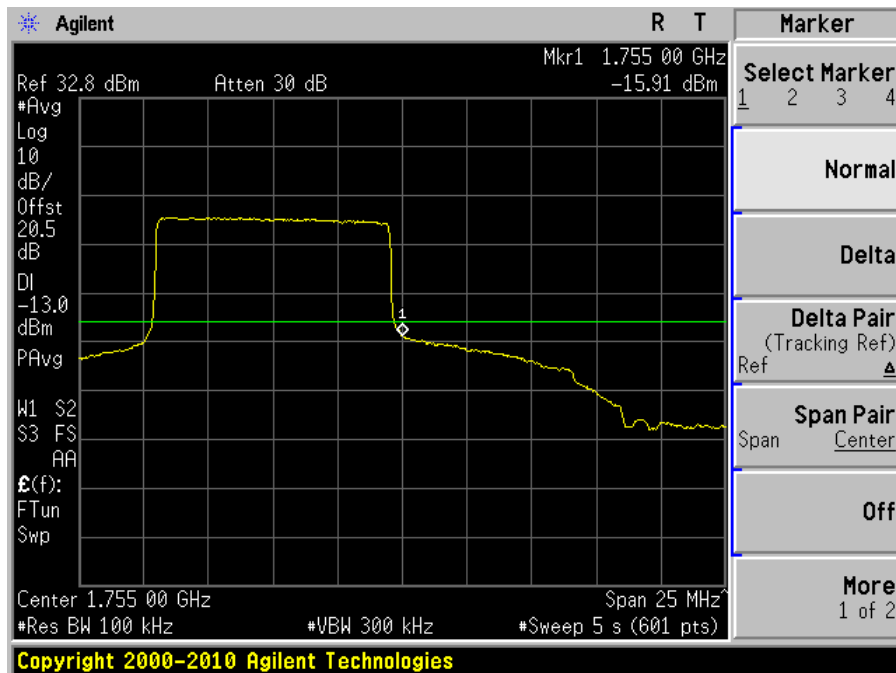


Modulation: LTE-16QAM (10 MHz):

Plot 1: Lowest Edge

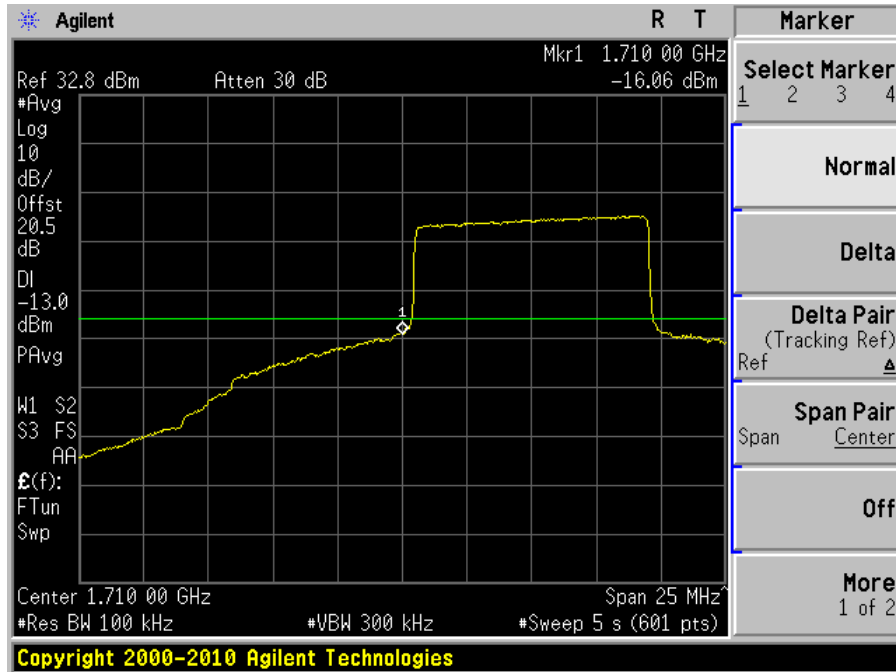


Plot 2: Highest Edge

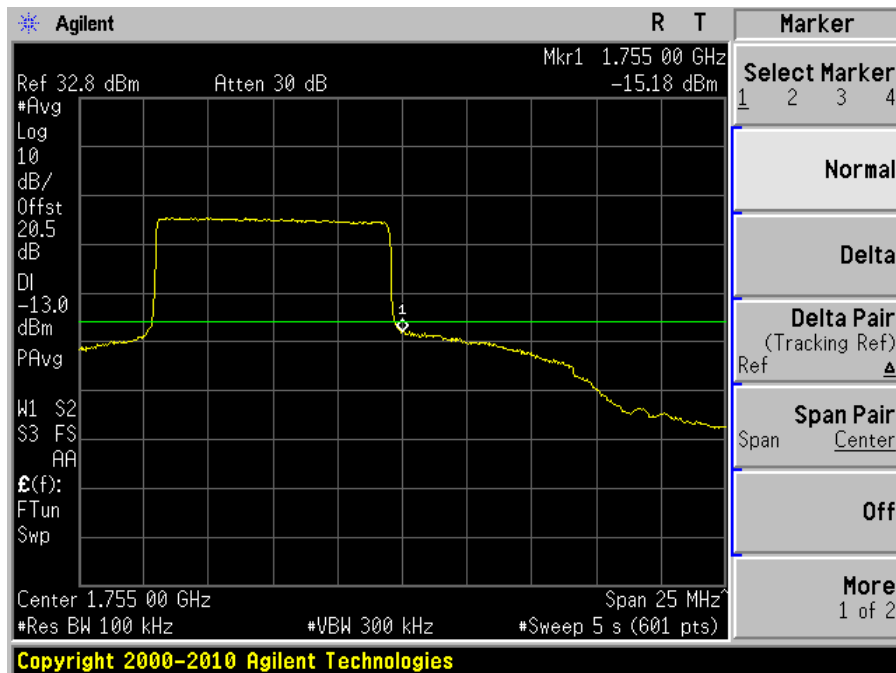


Modulation: LTE-64QAM (10 MHz):

Plot 1: Lowest Edge

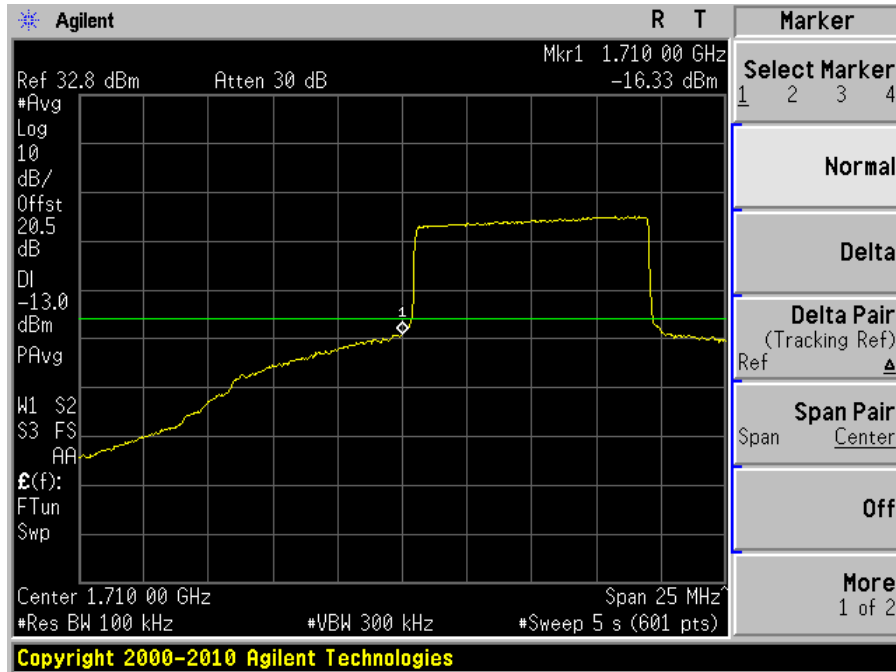


Plot 2: Highest Edge

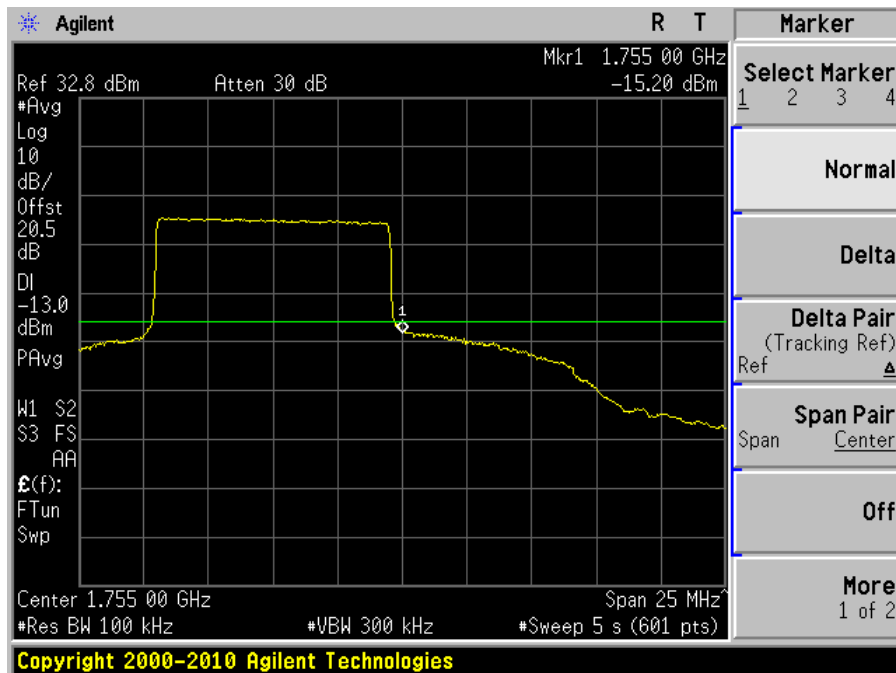


WCDMA, Downlink: 2110-2155 MHz

Modulation: WCDMA

Plot 1: Lowest Edge

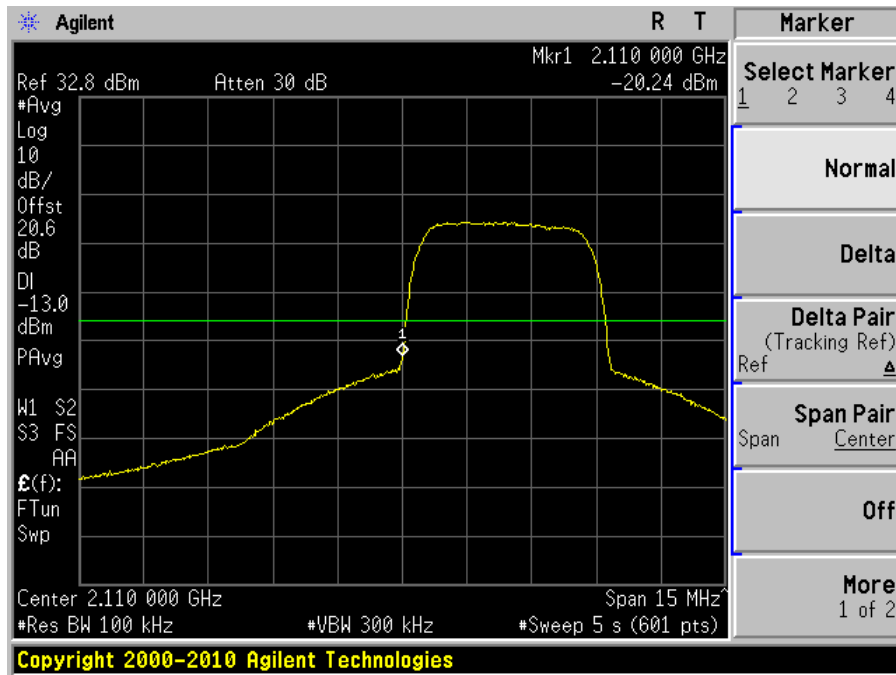


Plot 2: Highest Edge

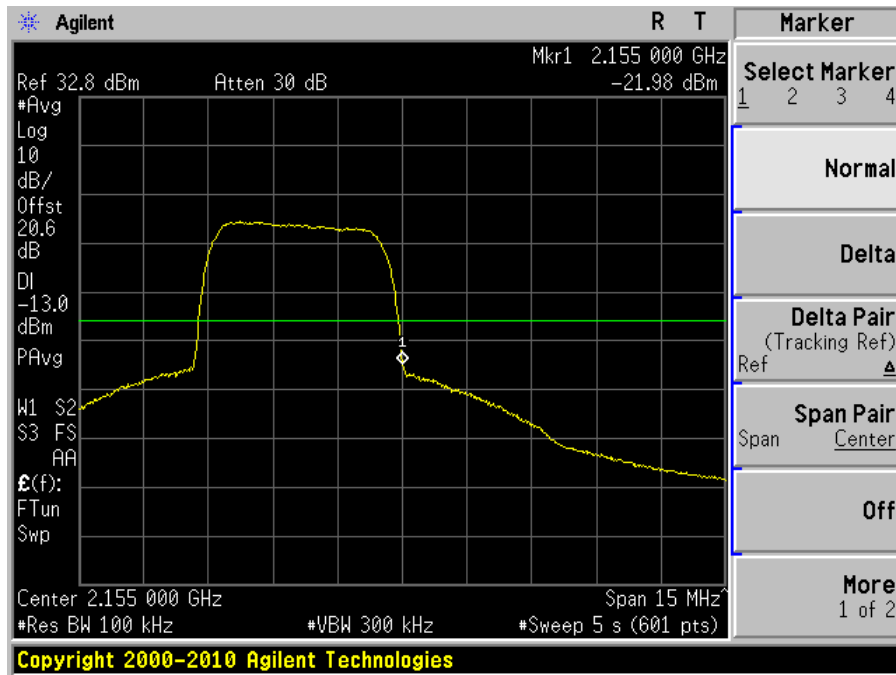


WCDMA,Uplink: 1710-1755 MHz

Modulation: WCDMA

Plot 1: Lowest Edge

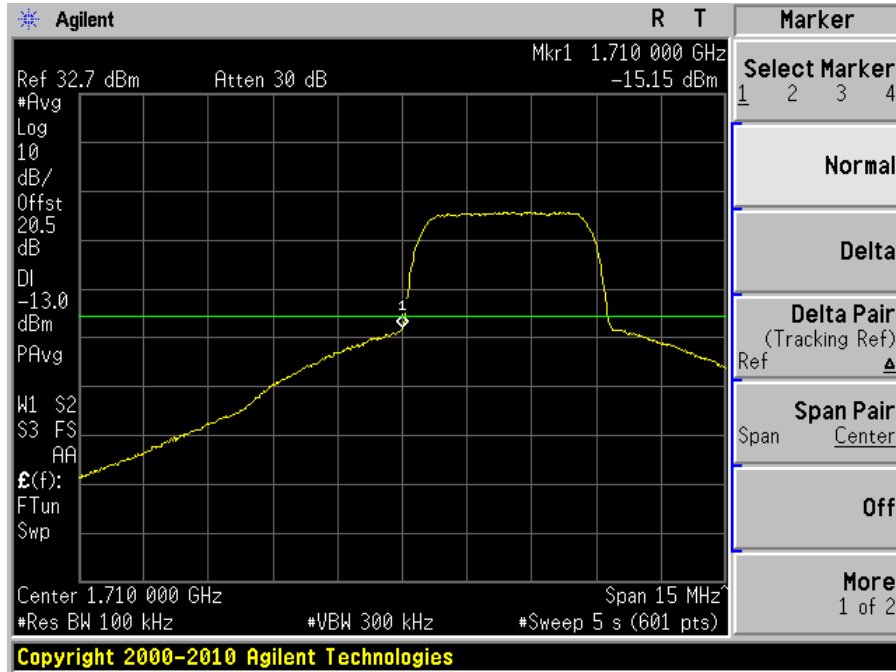


Plot 2: Highest Edge

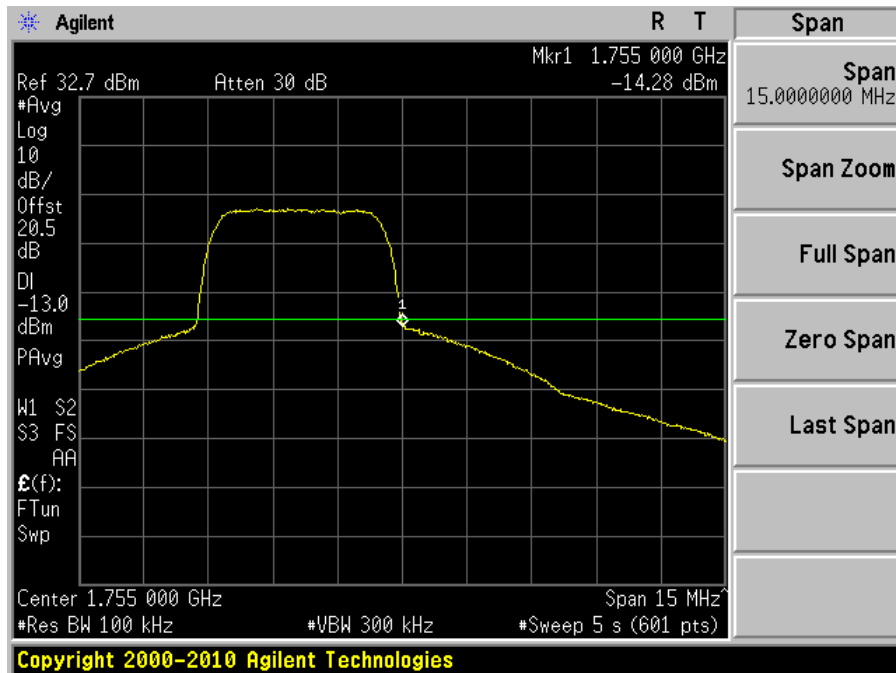


HSDPA, Downlink: 2110-2155 MHz

Modulation: HSDPA

Plot 1: Lowest Edge

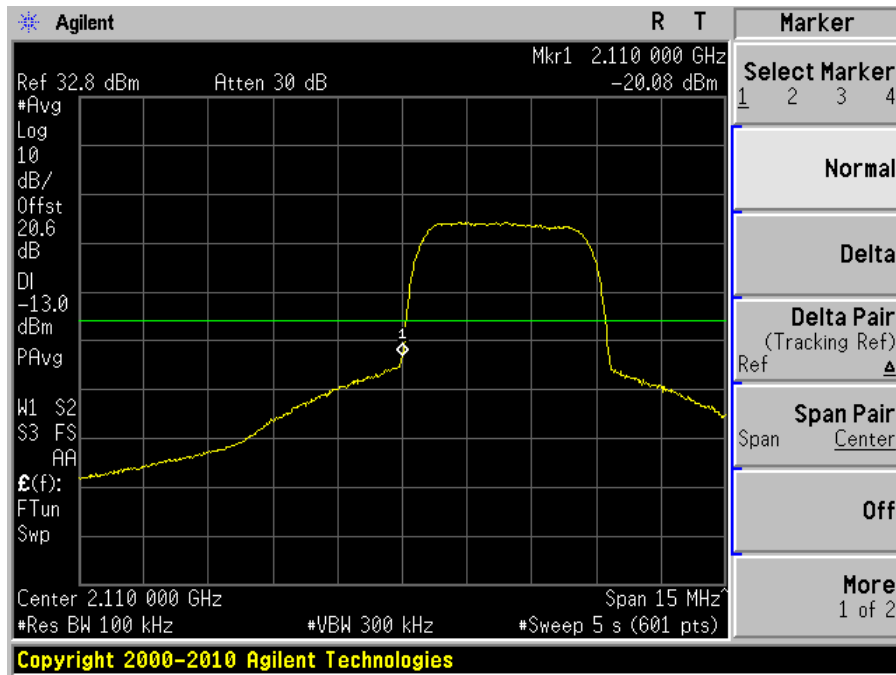


Plot 2: Highest Edge

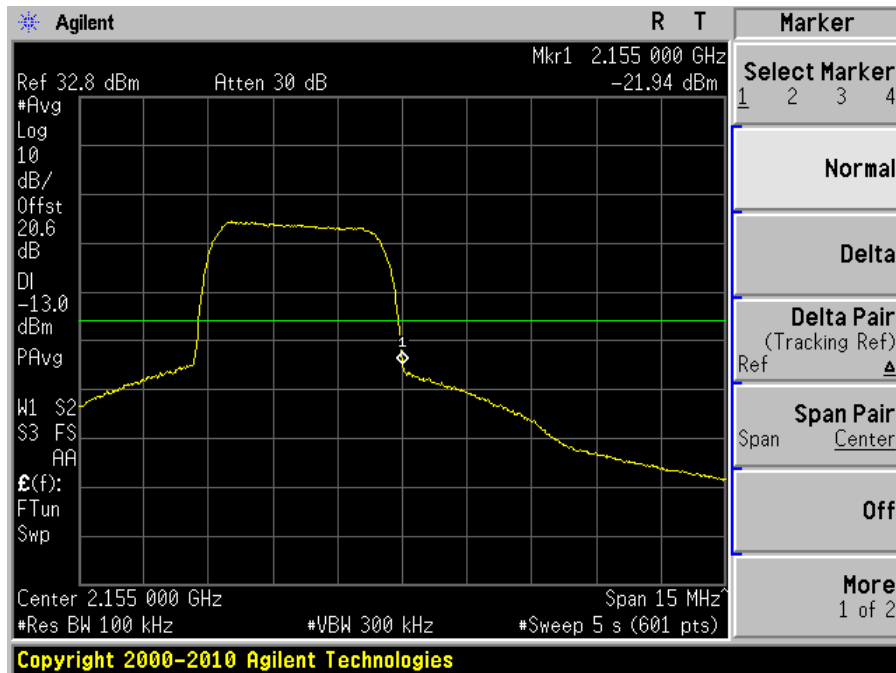


HSDPA, Uplink: 1710-1755 MHz

Modulation: HSDPA

Plot 1: Lowest Edge

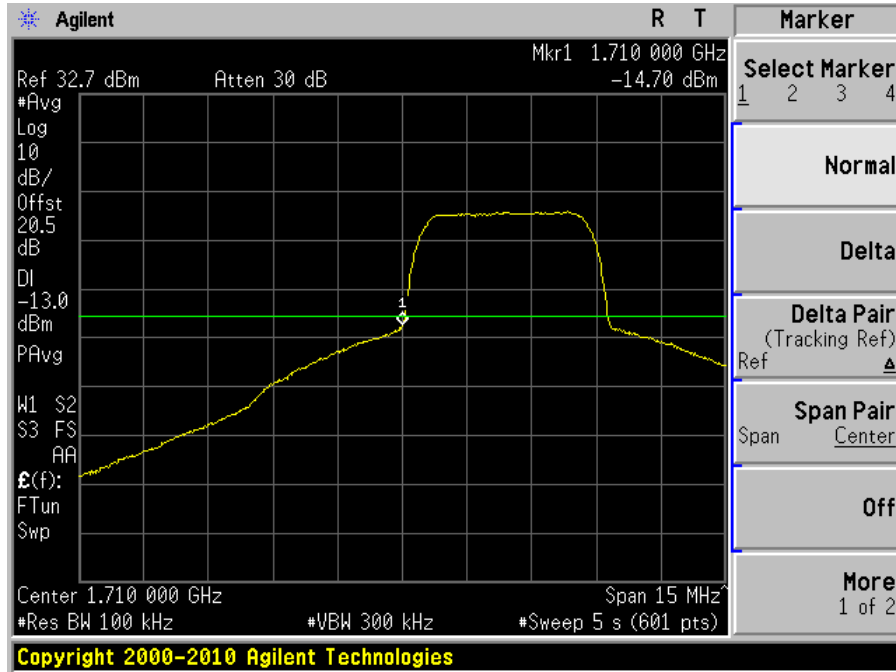


Plot 2: Highest Edge

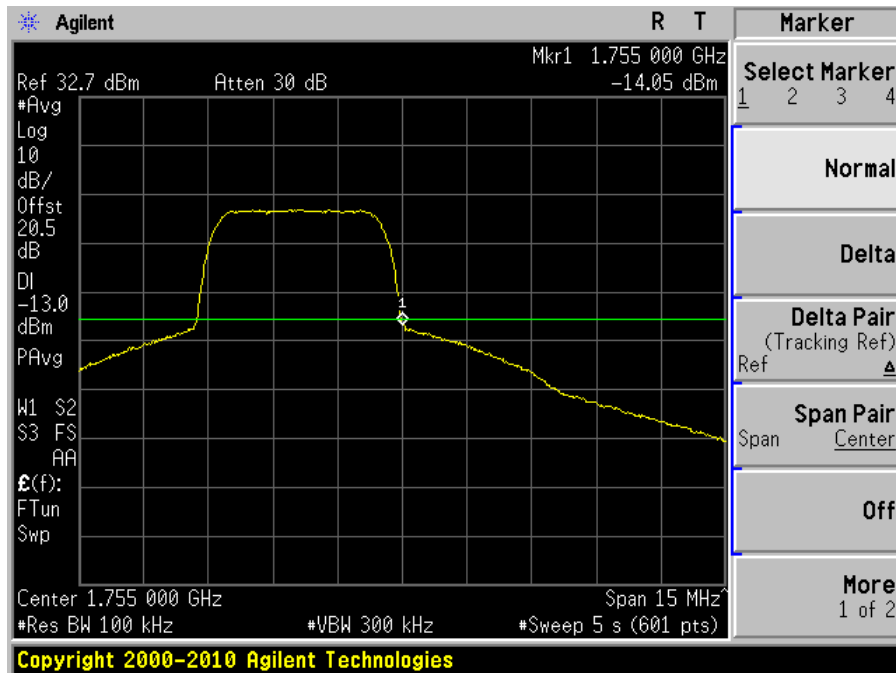


HSUPA, Downlink: 2110-2155 MHz

Modulation: HSUPA

Plot 1: Lowest Edge

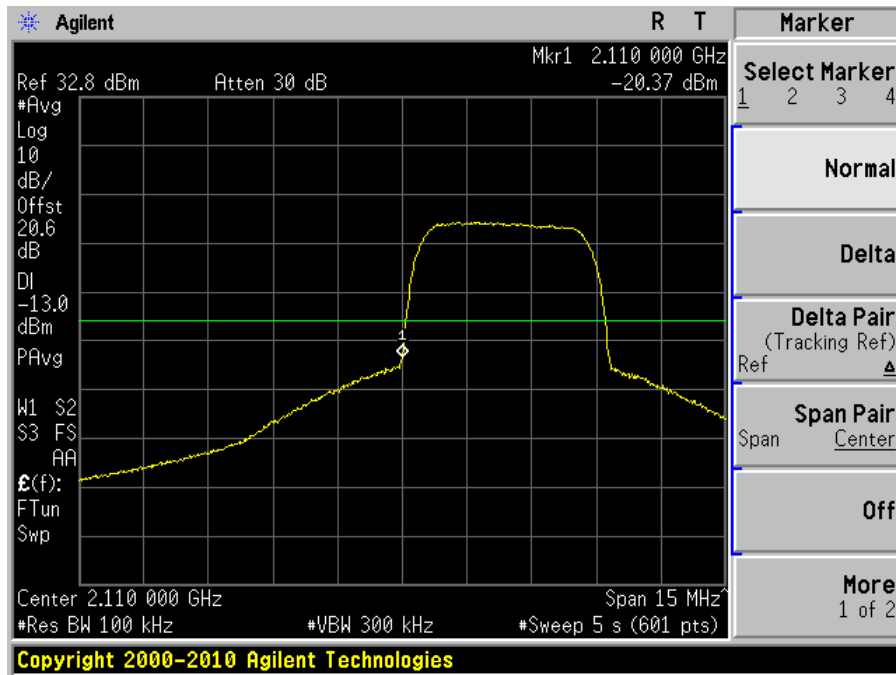


Plot 2: Highest Edge

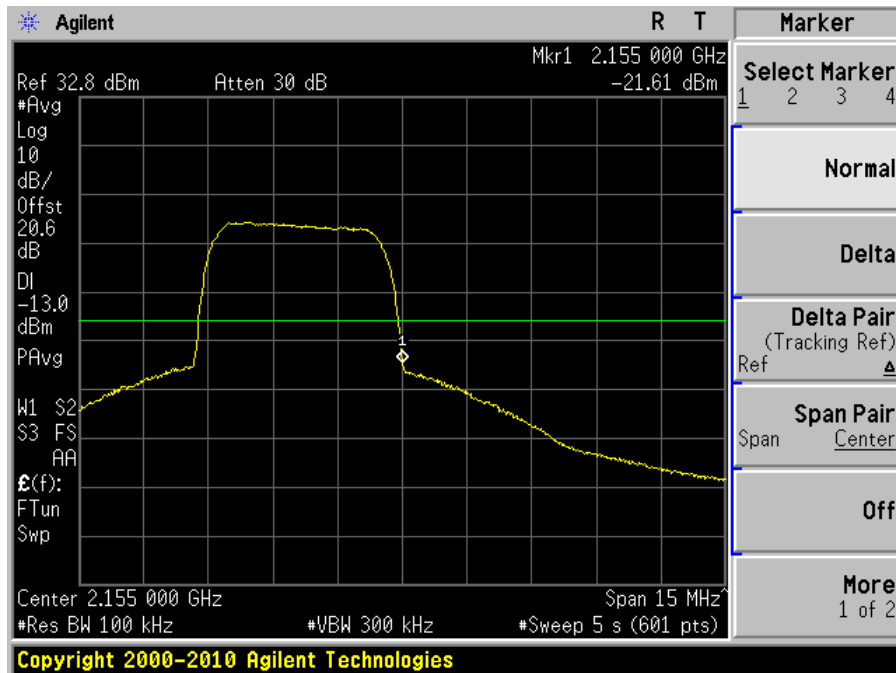


HSUPA, Uplink: 1710-1755 MHz

Modulation: HSUPA

Plot 1: Lowest Edge

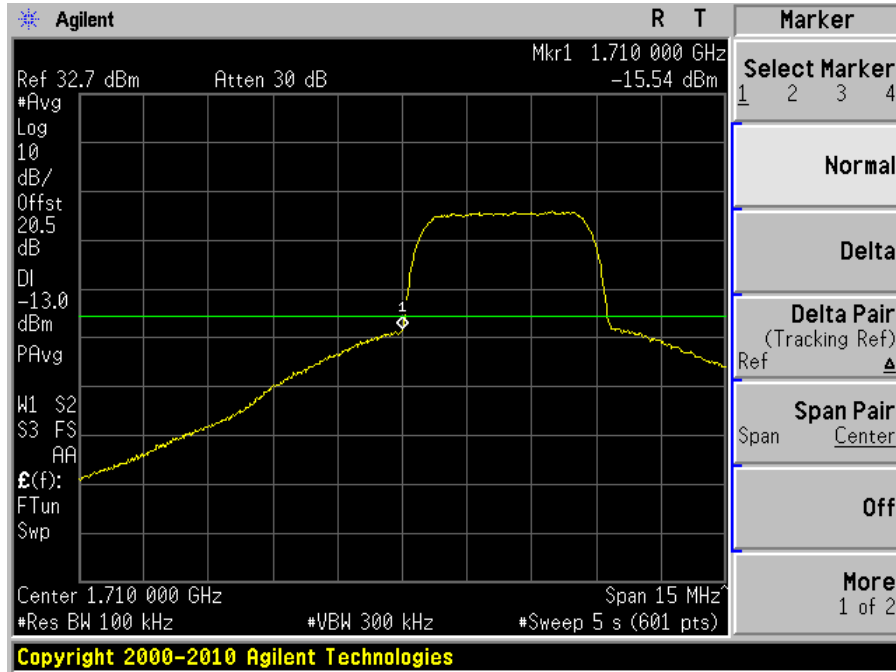

Plot 2: Highest Edge

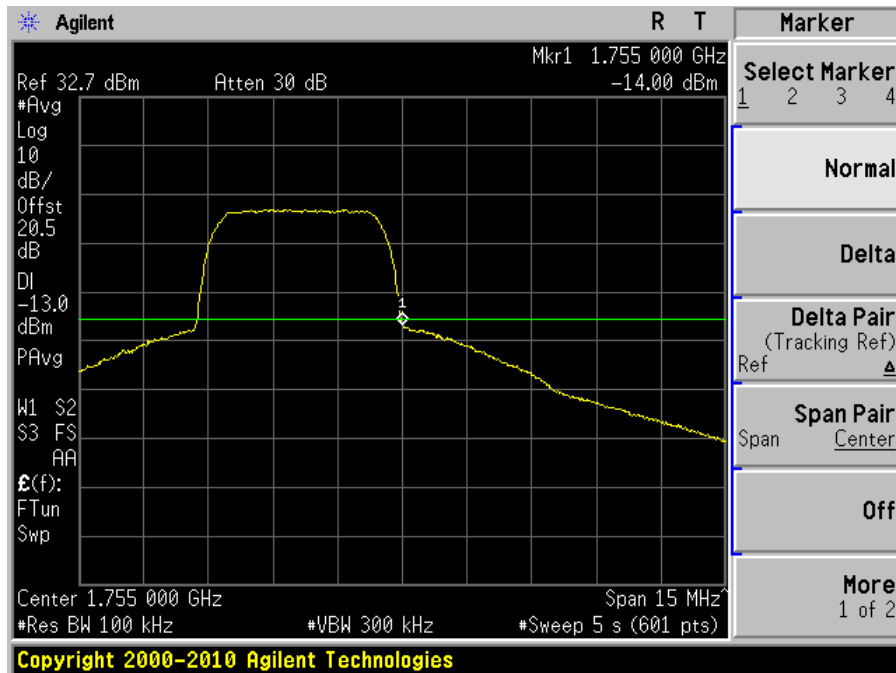

10 FCC §2.1055 & §27.54 – FREQUENCY STABILITY

10.1 Applicable Standard

According to FCC §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

10.2 Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

10.3 Test Results

Not applicable, *EUT is an amplifier; the signal source is from the signal generator, no frequency stability applied.*

11 FCC §1.1307(b) & §27.52 & §2.1091 - RF EXPOSURE INFORMATION

11.1 Applicable Standard

According to FCC §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	¹ (100)	30
1.34-30	824/f	2.19/f	¹ (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

¹ = Plane-wave equivalent power density

11.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Test Result

Please see the following MPE calculation for details.



Minimum Safe Distance From Antennas Based upon FCC OET Bulletin 65 and other FCC Sources

INPUT DATA

Frequency MHz	2110
Pout Watts	0.23000
Duty Cycle Percent	100.0%
Ant. Gain dBi	13.20
Coax Loss dB	0.00

RESULTS OF CALCULATIONS

Ant. Gain less Coax Loss dBi	13.20
Min. Distance Inches	7.70
Min. Distance Centimeters	19.56
ERP (Watts)	2.9301
EIRP (Watts)	4.8054

REFERENCE DATA

Pout dBm	23.62
Antenna Gain (non-log)	20.89
Coax loss (non-log)	1.00
FCC Limit (mw/cm ²)	1.00
Calculated limit (mw/cm ²)	1.00

NOTES:

- (1) Valid only between 300 MHz - 100,000 MHz.
- (2) Calculations are sufficient for determining antenna safe distance for mobile antennas and fixed inside antennas provided that calculated ERP < 1.5 watts for frequencies equal to or below 1.5 GHz, and calculated ERP < 3 watts for frequencies above 1.5 GHz.
- (3) Mobile antenna distances and fixed indoor antenna distances shall be no less than 8 inches.
- (4) There are no predefined ERP and distance limitations for fixed outside (building) antennas.
- (5) Mobile/portable stations are limited to 2 watts EIRP peak power in the 1900 MHz band (FCC rules §24.232(c)).

SUMMARY FOR PUBLICATION

For Amplifier Model Number:	272365
Frequency Band (MHz)	2110-2155 MHz (downlink)
Mobile or Fixed?	Fixed
Outside or Inside Antenna?	Inside
Antenna Type:	Any antenna whose gain less cable loss does not exceed 13.2 dBi
Safe Distance (inches):	8 inches
Signature:	
Date:	July 12, 2011

7/14/2011, 1:07 PM

MPE Calculations.xls



Minimum Safe Distance From Antennas

Based upon FCC OET Bulletin 65 and other FCC Sources

INPUT DATA

Frequency MHz	1710
Pout Watts	0.61900
Duty Cycle Percent	100.0%
Ant. Gain dBi	7.90
Coax Loss dB	5.90

RESULTS OF CALCULATIONS

Ant. Gain less Coax Loss dBi	2.00
Min. Distance Inches	3.48
Min. Distance Centimeters	8.84
ERP (Watts)	0.5982
EIRP (Watts)	0.9810

REFERENCE DATA

Pout dBm	27.92
Antenna Gain (non-log)	6.17
Coax loss (non-log)	0.26
FCC Limit (mw/cm ²)	1.00
Calculated limit (mw/cm ²)	1.00

NOTES:

- (1) Valid only between 300 MHz - 100,000 MHz.
- (2) Calculations are sufficient for determining antenna safe distance for mobile antennas and fixed inside antennas provided that calculated ERP < 1.5 watts for frequencies equal to or below 1.5 GHz, and calculated ERP < 3 watts for frequencies above 1.5 GHz.
- (3) Mobile antenna distances and fixed indoor antenna distances shall be no less than 8 inches.
- (4) There are no predefined ERP and distance limitations for fixed outside (building) antennas.
- (5) Mobile/portable stations are limited to 2 watts EIRP peak power in the 1900 MHz band per FCC rules §24.232(c).
- (6) Fixed/Mobile/Portable stations are limited to 1 watt EIRP in 1710-1755 MHz band per FCC rules §27.50(d)(4).

SUMMARY FOR PUBLICATION

For Amplifier Model Number:	272365
Frequency Band (MHz)	1710-1755 MHz (Uplink)
Mobile or Fixed?	Fixed
Outside or Inside Antenna?	Outside
Antenna Type:	Any antenna whose gain less cable loss does not exceed 2 dBi
Safe Distance (inches):	8 inches
Signature:	
Date:	September 1, 2011

9/1/2011, 3:11 PM

272365 MPE Uplink (revised).xls